

**EMC TEST REPORT****FCC 47 CFR Part 15B, ISED ICES-003 Issue 6**

<b>Report Reference No</b>	G0M-1911-8642-EF0115B-V01
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	     DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
<b>Applicant</b>	Hella Aglaia Mobile Vision GmbH
Address	Ullsteinstraße 140 12109 Berlin GERMANY
<b>Test Specification</b>	
Standard	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
Non-Standard Test Method	None
<b>Equipment under Test (EUT):</b>	
Product Description	Advanced People Sensor; 180 mm lens distance; without IO connector
Model(s)	APS-180E
Additional Model(s)	None
Brand Name(s)	APS-180E
Hardware Version(s)	EH604
Software Version(s)	1.12.0.19
FCC-ID	2ASWU-PS3
IC	N/A
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Date of receipt of test item	2019-12-02	
<b>Report:</b>		
Compiled by	Matthias Handrik	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2020-01-25	
Total number of pages	32	
<b>General Remarks:</b>		
<p><b>The test results presented in this report relate only to the object tested.</b></p> <p><b>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</b></p> <p>This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**ABBREVIATIONS AND ACRONYMS**

<b>Acronyms</b>	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
$T_{NOM}$	Nominal operating temperature
$V_{NOM}$	Nominal supply voltage

**VERSION HISTORY**

<b>Version History</b>			
Version	Issue Date	Remarks	Revised By
01	2020-01-25	Initial Release	

**REPORT INDEX**

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>6</b>
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	9
1.4	Support Equipment.....	12
1.5	Operational Modes .....	13
1.6	EUT Configuration.....	14
1.7	Sample emission level calculation.....	15
<b>2</b>	<b>Result Summary.....</b>	<b>16</b>
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	17
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	28

## 1 Equipment (Test Item) Under Test


Description	Advanced People Sensor; 180 mm lens distance; without IO connector	
Model	APS-180E	
Additional Model(s)	None	
Brand Name(s)	APS-180E	
Serial Number(s)	000B91803569	
Hardware Version(s)	EH604	
Software Version(s)	1.12.0.19	
FCC-ID	2ASWU-PS3	
IC	N/A	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	666	
Supply Voltage	$V_{NOM}$	48 VDC (PoE)
AC/DC-Adaptor	none	
Manufacturer	Hella Aglaia Mobile Vision GmbH Ullsteinstraße 140 12109 Berlin GERMANY	

## 1.1 Equipment Ports

Name	Type	Attributes	Comment
Ethernet	DC; TP	Count: 1 Direction: IO Service only: No	DC was powered via PoE injector (120VAC/60Hz)
USB	IO	Count: 1 Direction: IO Service only: Yes	-
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		

## 1.2 Equipment Photos - Internal

**EUT PCB FRONT**

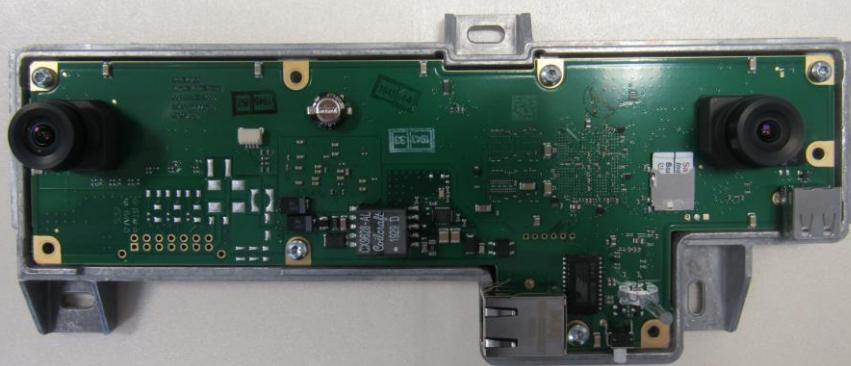

**EUT PCB BACK**



### 1.3 Equipment Photos - External



**EUT BACK**



**EUT FRONT**



**AE PoE Injector + AC/DC adaptor**

---

Test Report No.: G0M-1911-8642-EF0115B-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

#### 1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	PoE Injector	TP Link	TL-POE150S	
AE	USB Stick	-	-	-
AE	Laptop	HP	Elitebook 8470p	
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

## 1.5 Operational Modes

Mode #	Description
1	Counting mode, power via PoE (counts people coming in or going out)
Comment:	

## 1.6 EUT Configuration

Configuration #	Description
1	<p>EUT is connected to PoE-Injector via Ethernet-cable. Injector is providing power for EUT. Laptop is connected to PoE-Injector via Ethernet-cable.</p> <p>With the help of a browser and the EUT's webinface the video signal can be monitored.</p> <p>USB-Stick is connected into USB-port.</p>
Comment:	

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF +21.5 dB $\mu$ V + 26 dB/m	= Net Reading = 47.5 dB $\mu$ V/m	:	Net reading - FCC limit 47.5 dB $\mu$ V/m - 57.0 dB $\mu$ V/m	= Margin = -9.5 dB
--	--------------------------------------	---	--	-----------------------

## 2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	-
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	PASS	-
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



## 2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

### 2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	666
Measurement range	30 MHz to 5 GHz
Temperature [°C]	21
Humidity [%]	32
Operator	Matthias Handrik
Date	2019-12-02

### 2.1.2 Setup

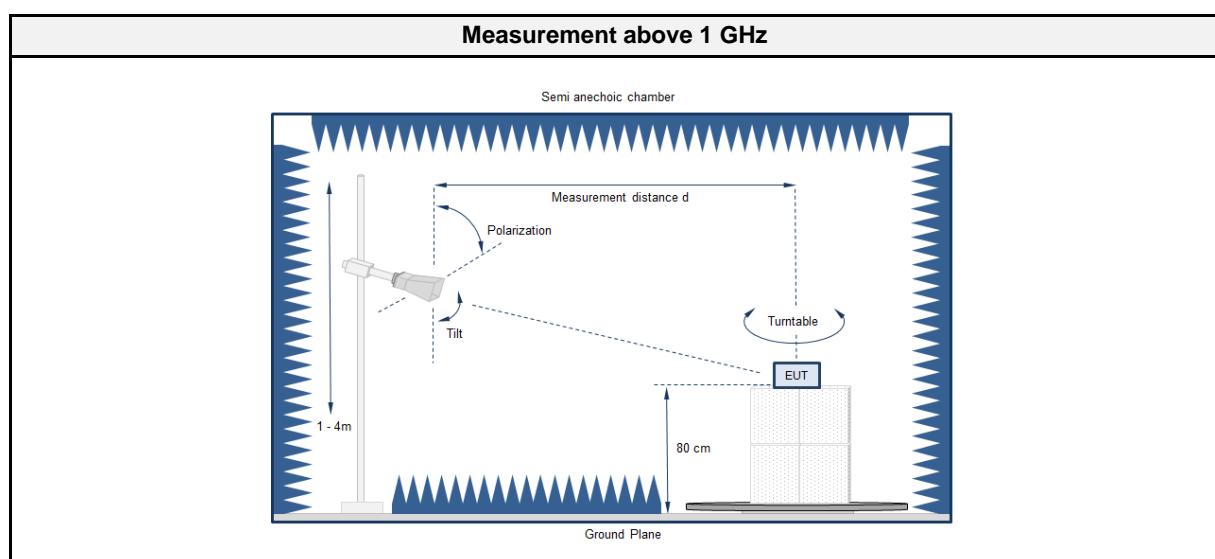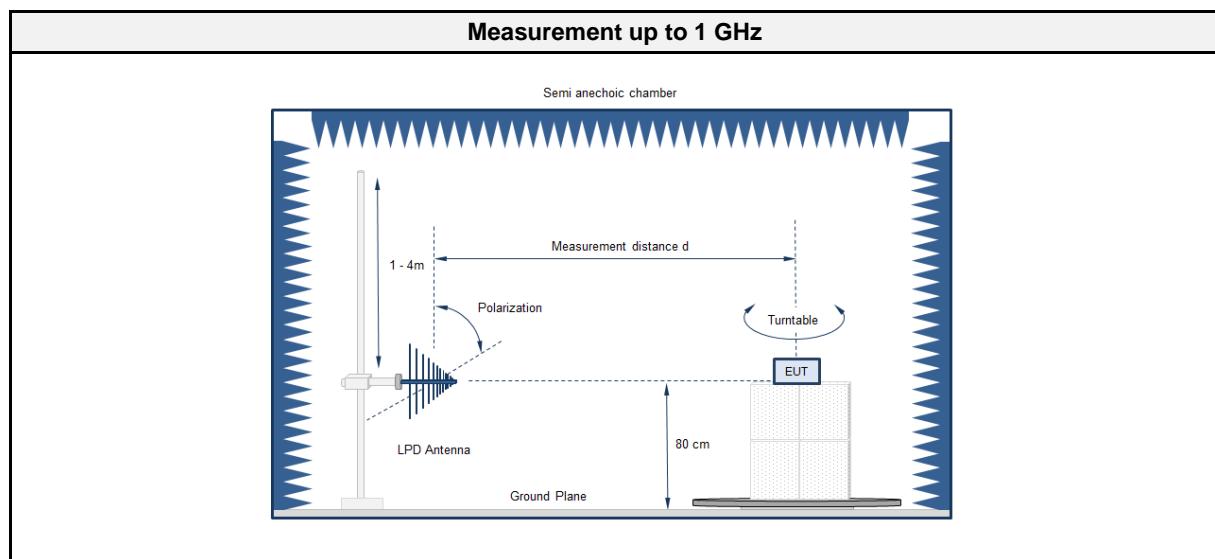

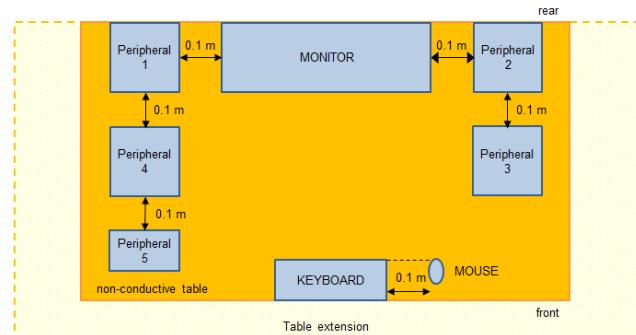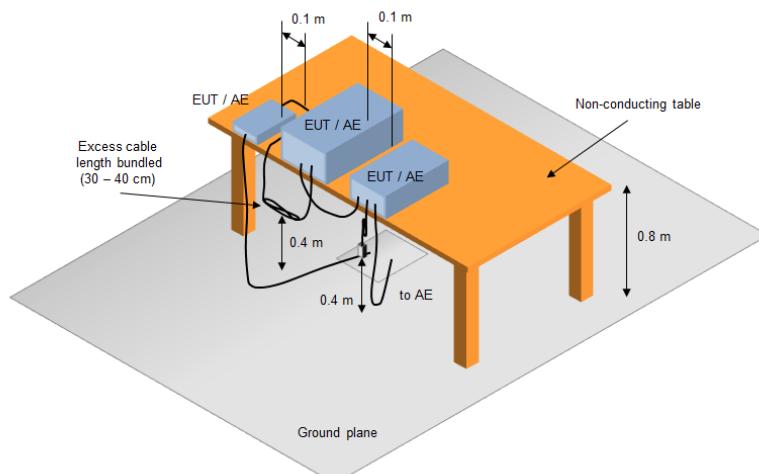**Equipment placement - Table top**

**Test Setup**

**2.1.3 Equipment**
**Test Software**

Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

**Test Equipment**

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2019-09	2020-09
Biconical Antenna	R&S	HK 116	EF00030	2019-04	2022-04
LPD Antenna	R&S	HL 223	EF00187	2019-05	2022-05
Horn antenna	Schwarzbeck	BBHA 9120D (1-18GHz)	EF00018	2019-09	2022-09

#### 2.1.4 Procedure

<b>Exploratory measurement</b>
<ol style="list-style-type: none"> <li>1. The EUT was placed on a non-conductive table at a height of 0.8m.</li> <li>2. The EUT and support equipment, if needed, were set up to simulate typical usage.</li> <li>3. Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.</li> <li>4. The antenna was placed at a distance of 3 or 10 m.</li> <li>5. The received signal was monitored at the measurement receiver.</li> <li>6. This procedure has to be performed in both antenna polarizations, horizontal and vertical.</li> <li>7. The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3</li> </ol>

<b>Final measurement</b>
<ol style="list-style-type: none"> <li>1. The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver.</li> <li>2. A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast.</li> <li>3. The EUT and cable arrangement were based on the exploratory measurement results.</li> <li>4. Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.</li> <li>5. The test data of the worst-case conditions were recorded and shown on the next pages.</li> </ol>

#### 2.1.5 Limits



<b>Class B @ 3 m</b>		
Frequency [MHz]	Detector	Limit [dB $\mu$ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54


<b>Class A @ 10 m</b>		
Frequency [MHz]	Detector	Limit [dB $\mu$ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5

#### 2.1.6 Results

<b>Test Results</b>			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	-

2.1.7 Setup Photos

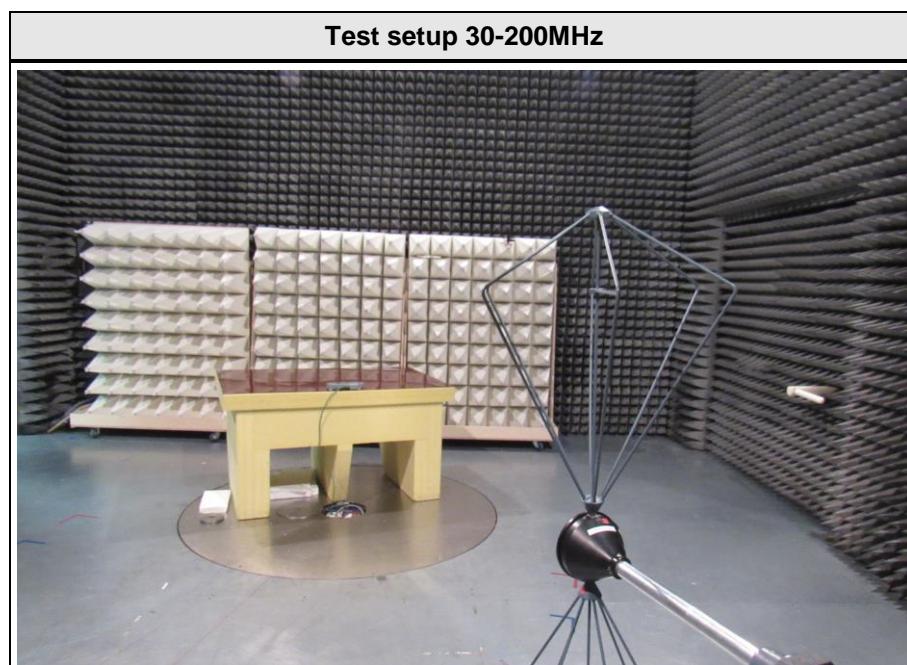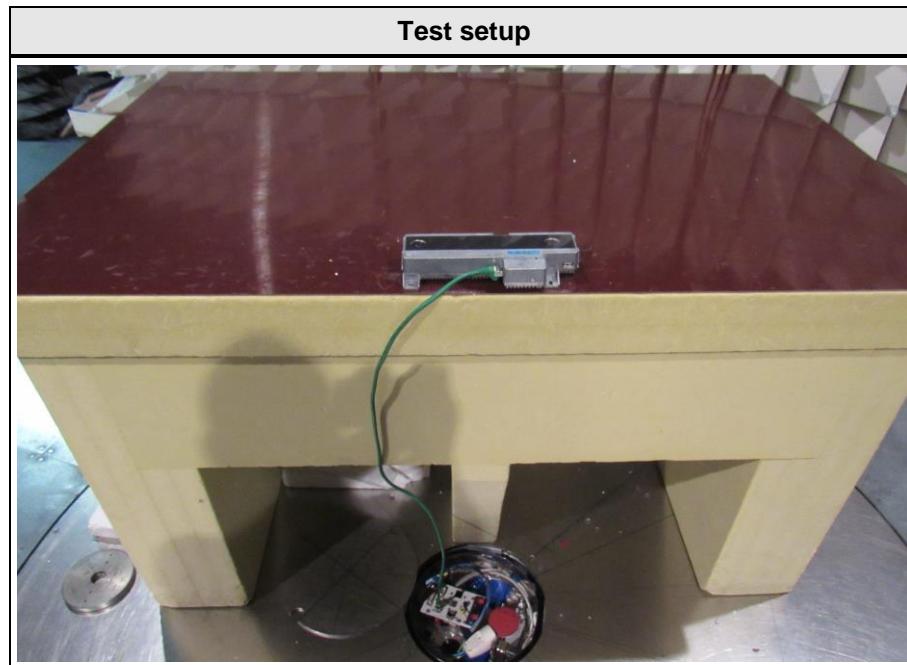

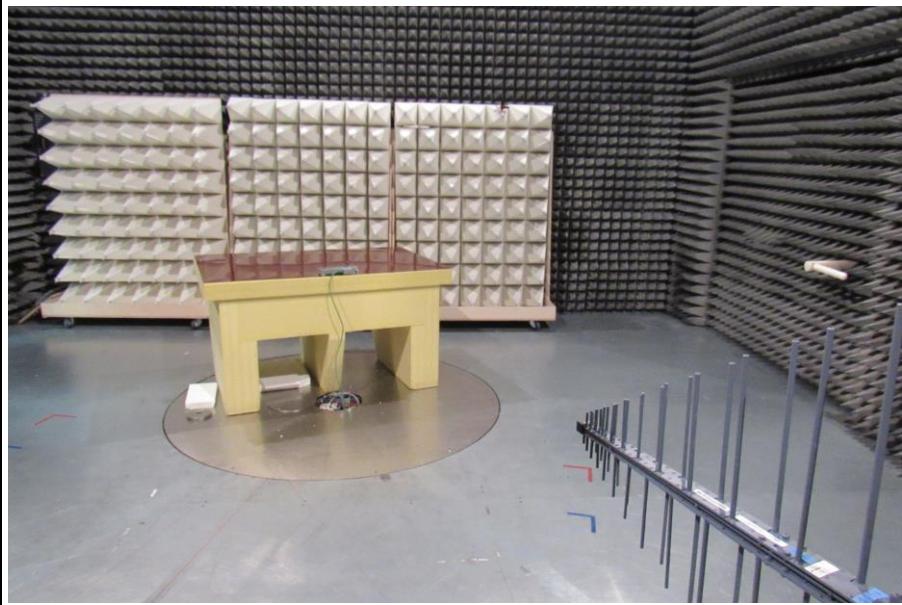**Test setup 200-1000MHz****Test setup 1-5GHz**


## 2.1.8 Records

**Radiated emissions according to FCC part 15B**

Project number: G0M-1911-8642

Applicant: Hella Aglaia Mobile Vision GmbH  
EUT Name: Advanced People Sensor; 180mm lens distance; without IO connector  
Model: APS-180E  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Handrik  
Test Conditions: Tnom: 21°C, Unom: 48V DC (PoE)  
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3m  
Mode: mode# 1  
Test Date: 2019-12-02  
Note:

Index 3

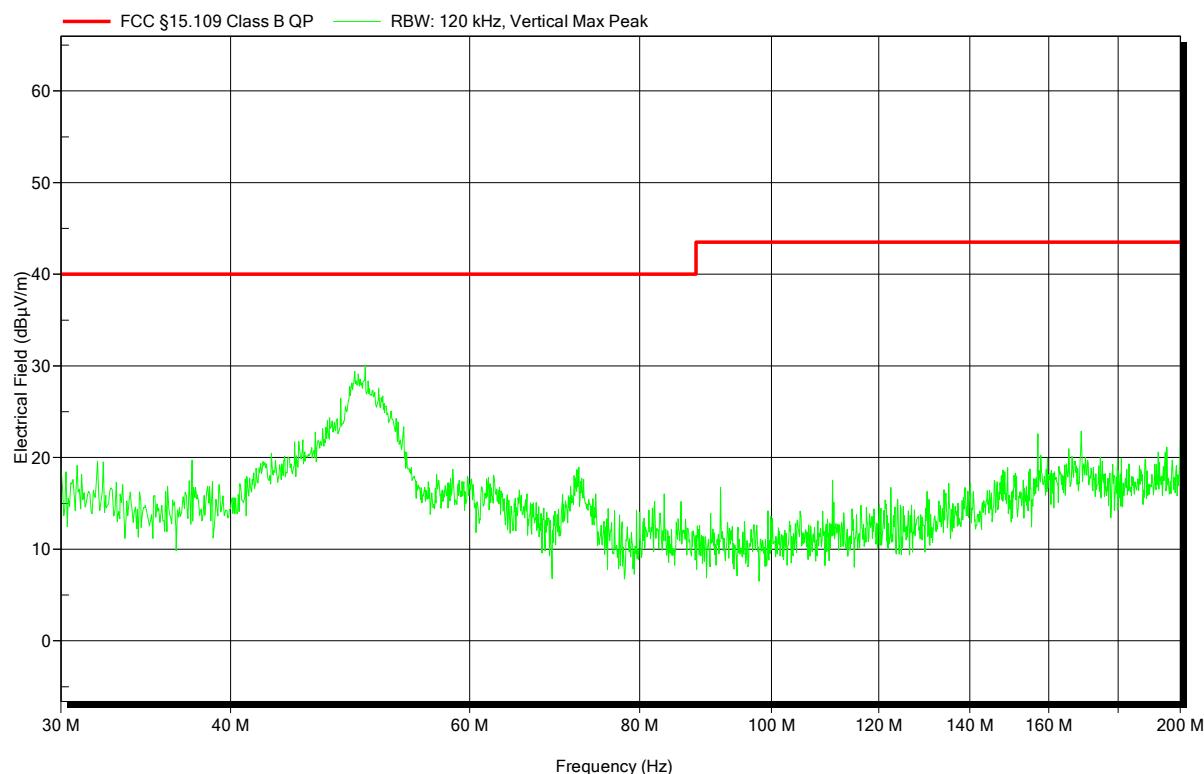


## Radiated emissions according to FCC part 15B

Project number: G0M-1911-8642

Applicant: Hella Aglaia Mobile Vision GmbH  
EUT Name: Advanced People Sensor; 180mm lens distance; without IO connector  
Model: APS-180E  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Handrik  
Test Conditions: Tnom: 21°C, Unom: 48V DC (PoE)  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3m  
Mode: mode# 1  
Test Date: 2019-12-02  
Note:

Index 4

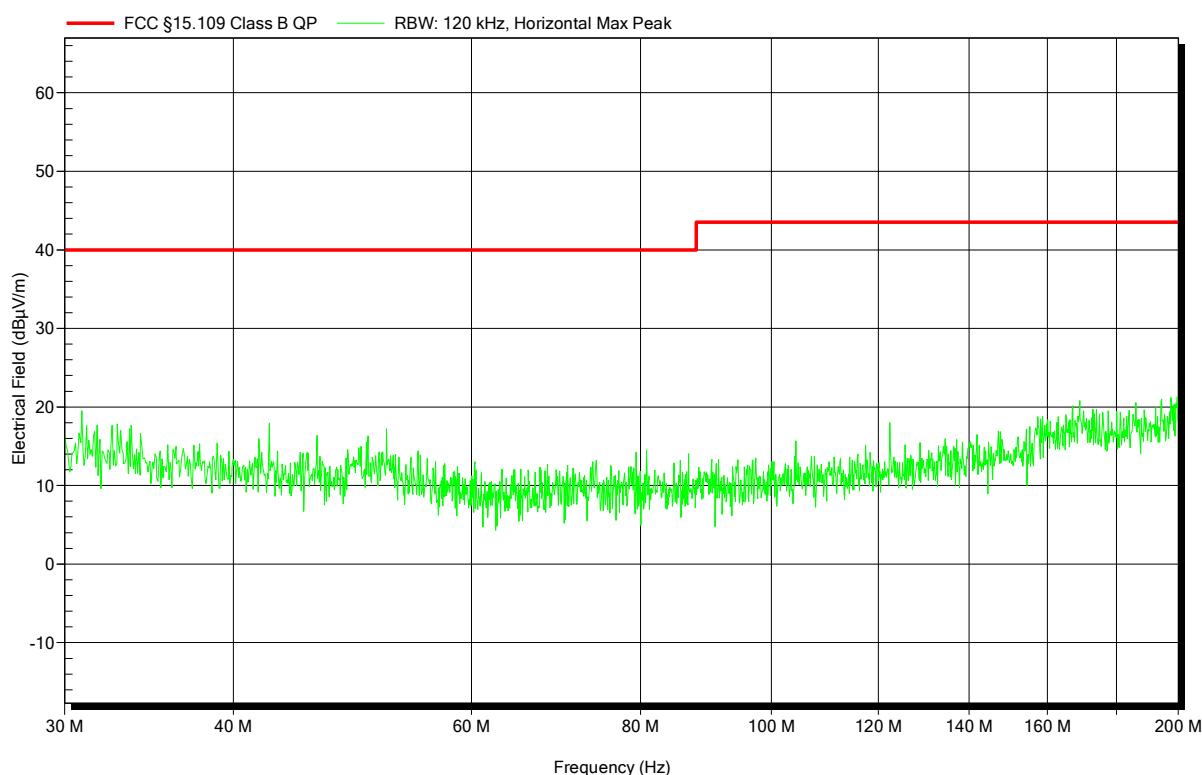

---

Test Report No.: G0M-1911-8642-EF0115B-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 23 of 32

**Radiated emissions according to FCC part 15B**

Project number: G0M-1911-8642

Applicant: Hella Aglaia Mobile Vision GmbH  
EUT Name: Advanced People Sensor; 180mm lens distance; without IO connector  
Model: APS-180E  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Handrik  
Test Conditions: Tnom: 21°C, Unom: 48V DC (PoE)  
Antenna: Rohde & Schwarz HL 223, Vertical  
Measurement distance: 3m  
Mode: mode# 1  
Test Date: 2019-12-02  
Note:

Index 5

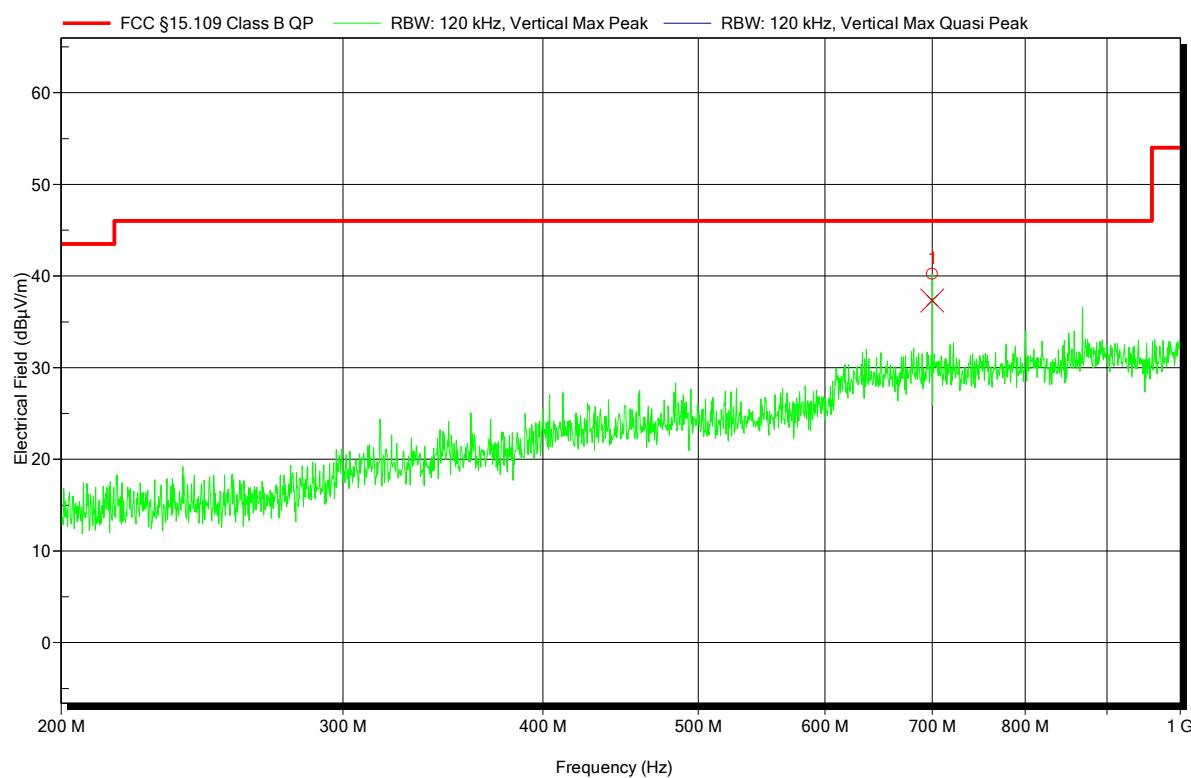


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	699.994 MHz	37.32 dB $\mu$ V/m	46.02 dB $\mu$ V/m	-8.71 dB	Pass	0 Degree	1 m

## Radiated emissions according to FCC part 15B

Project number: G0M-1911-8642

Applicant: Hella Aglaia Mobile Vision GmbH  
EUT Name: Advanced People Sensor; 180mm lens distance; without IO connector  
Model: APS-180E  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Handrik  
Test Conditions: Tnom: 21°C, Unom: 48V DC (PoE)  
Antenna: Rohde & Schwarz HL 223, Horizontal  
Measurement distance: 3m  
Mode: mode# 1  
Test Date: 2019-12-02  
Note:

Index 6

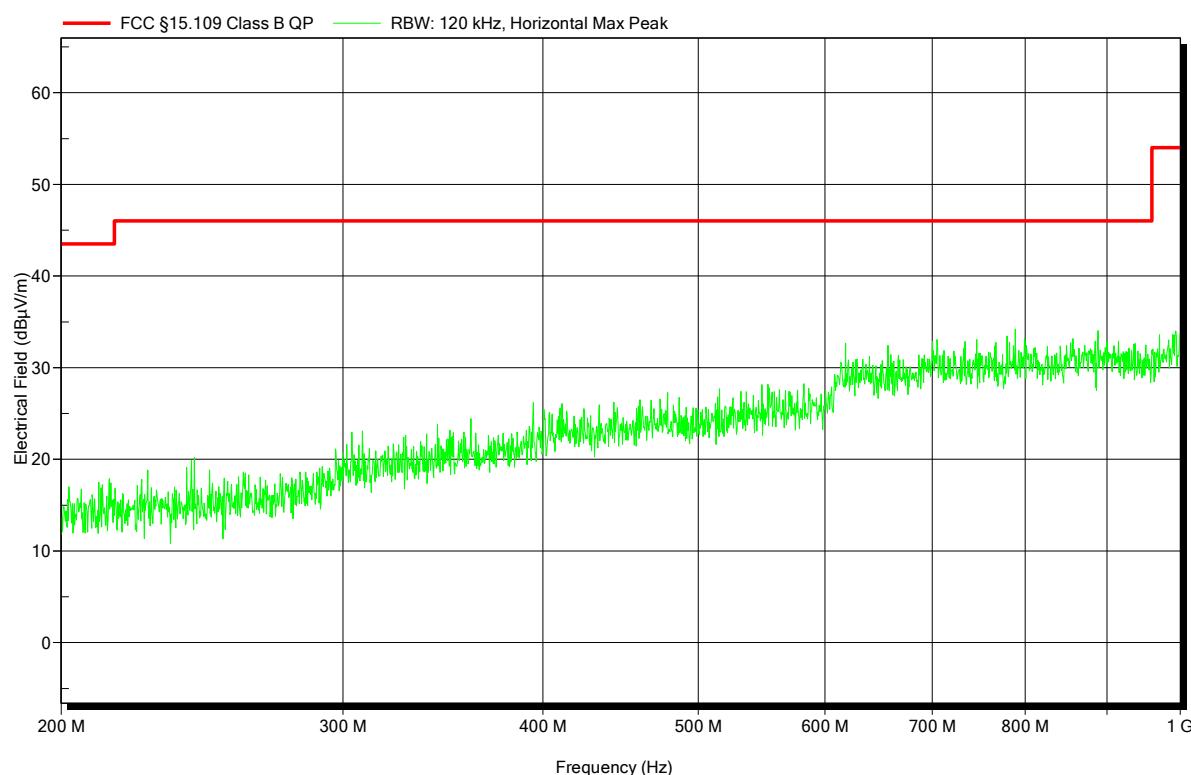

---

Test Report No.: G0M-1911-8642-EF0115B-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 25 of 32

**Radiated emissions according to FCC part 15B**

Project number: G0M-1911-8642

Applicant: Hella Aglaia Mobile Vision GmbH  
 EUT Name: Advanced People Sensor; 180mm lens distance; without IO connector  
 Model: APS-180E  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 21°C, Unom: 48V DC (PoE)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3m  
 Mode: mode# 1  
 Test Date: 2019-12-02  
 Note: -77°; 1m

Index 7

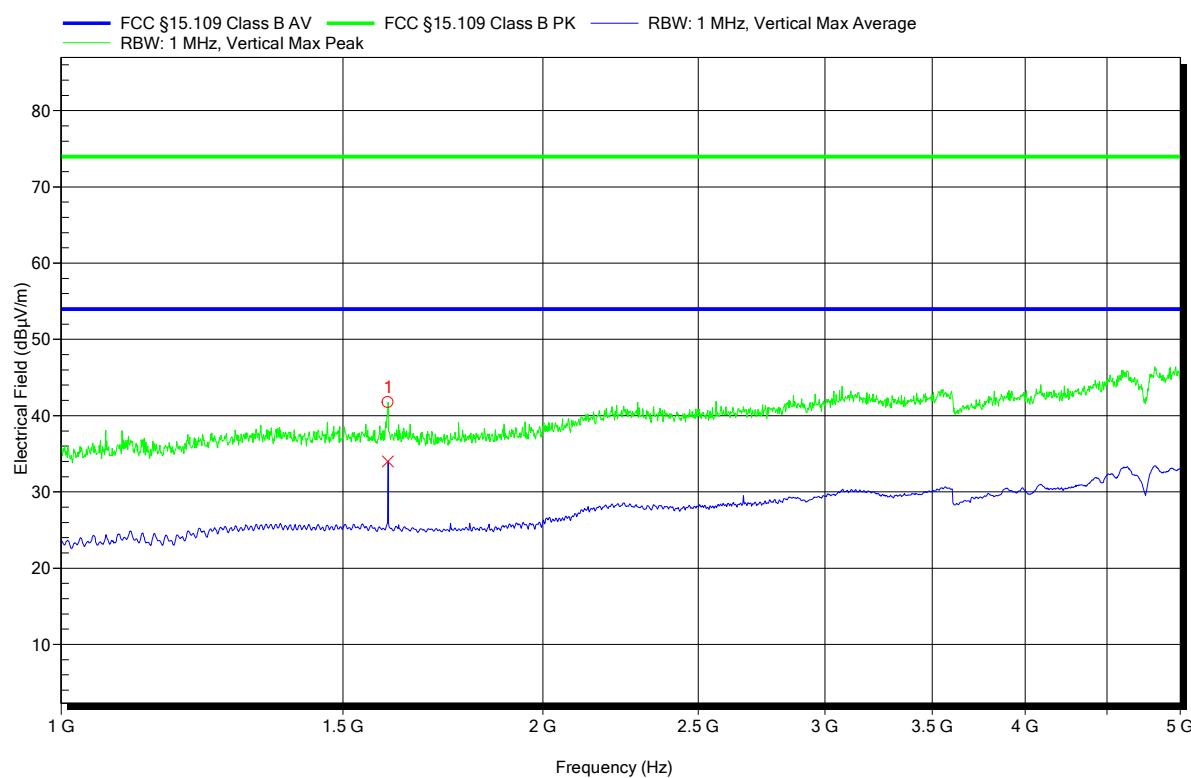


Peak Number	Frequency	Peak	Peak Limit	Peak Differences	Peak Status	Angle	Height
1	1.6 GHz	41.77 dB $\mu$ V/m	74 dB $\mu$ V/m	-32.23	Pass	-77 Degree	1 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.6 GHz	33.99 dB $\mu$ V/m	53.98 dB $\mu$ V/m	-19.99 dB	Pass	-77 Degree	1 m

**Radiated emissions according to FCC part 15B**

Project number: G0M-1911-8642

Applicant:	Hella Aglaia Mobile Vision GmbH
EUT Name:	Advanced People Sensor; 180mm lens distance; without IO connector
Model:	APS-180E
Test Site:	
Operator:	Mr. Handrik
Test Conditions:	Tnom: 21°C, Unom: 48V DC (PoE)
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	mode# 1
Test Date:	2019-12-02
Note:	-90°; 1.90m

Index 8

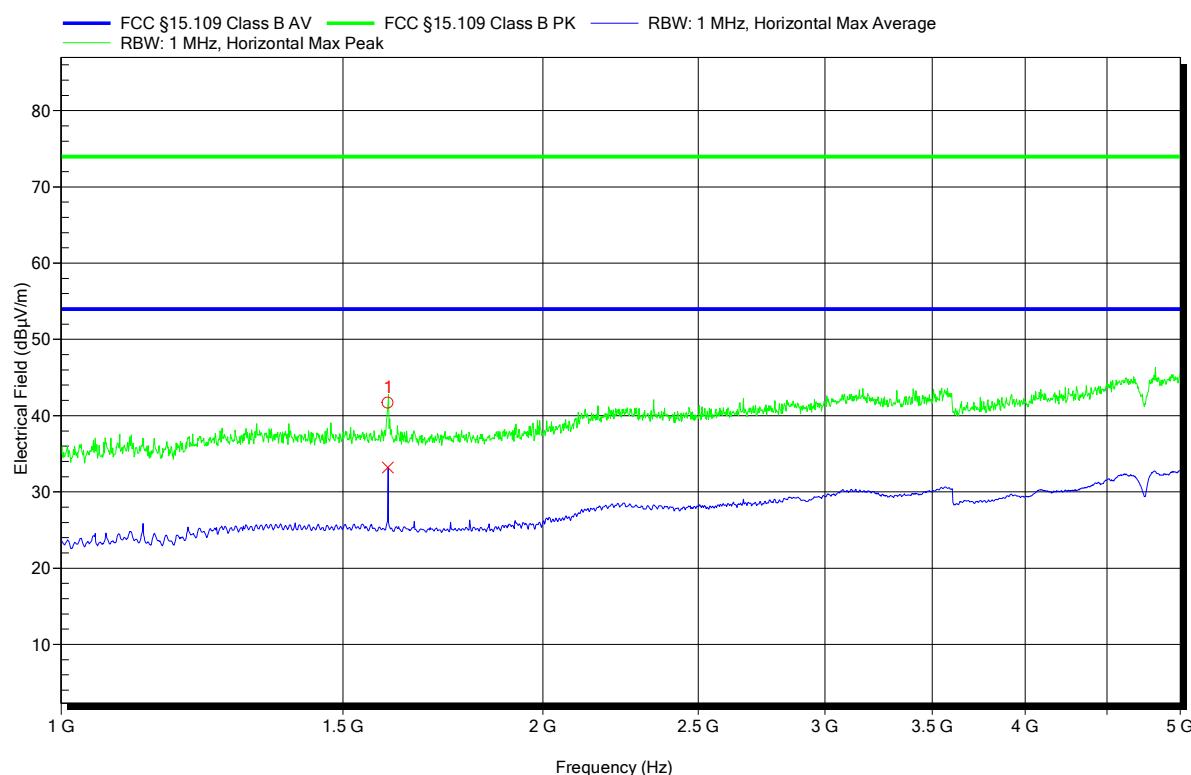



Peak Number	Frequency	Peak	Peak Limit	Peak Differences	Peak Status	Angle	Height
1	1.6 GHz	41.67 dB $\mu$ V/m	74 dB $\mu$ V/m	-32.33	Pass	-90 Degree	1.90 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.6 GHz	33.19 dB $\mu$ V/m	53.98 dB $\mu$ V/m	-20.79 dB	Pass	-90 Degree	1.90 m

## 2.2 Test Conditions and Results - Conducted emissions acc. to ANSI C63.4

### 2.2.1 Information

Test Information	
Reference	FCC 15.107, ICES-003, 8, 6.2
Reference method	ANSI C63.4:2014 Section 12
Measurement range	150 kHz to 30 MHz
Equipment class	Class B
Equipment type	Table top
Temperature [°C]	22
Humidity [%]	35
Operator	Matthias Handrik
Date	2019-12-02

### 2.2.2 Setup

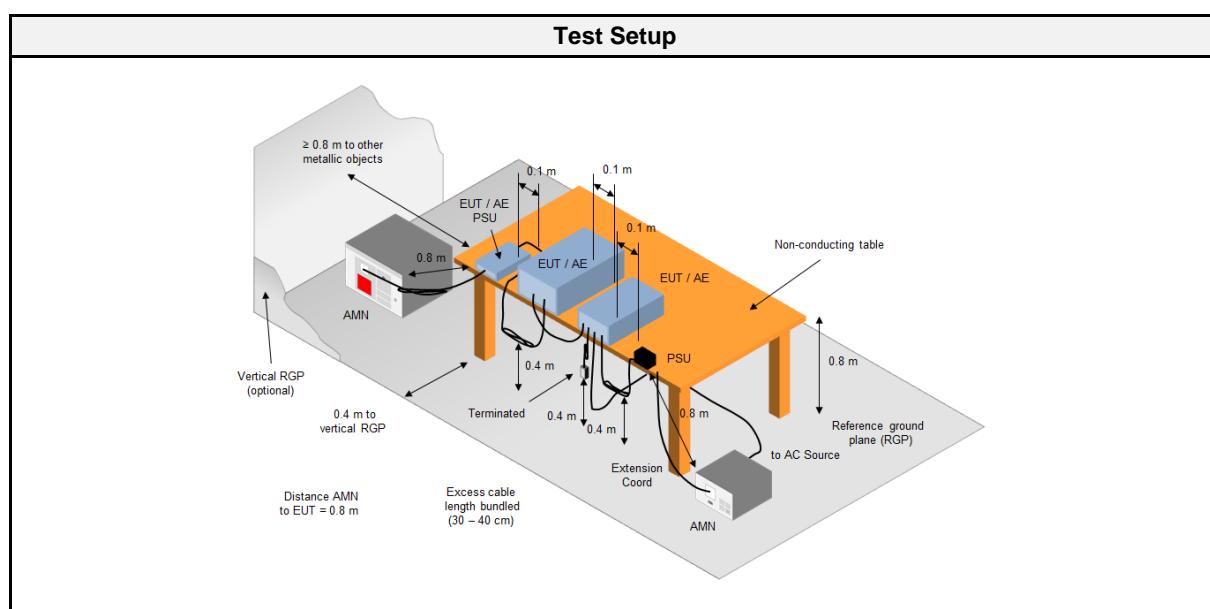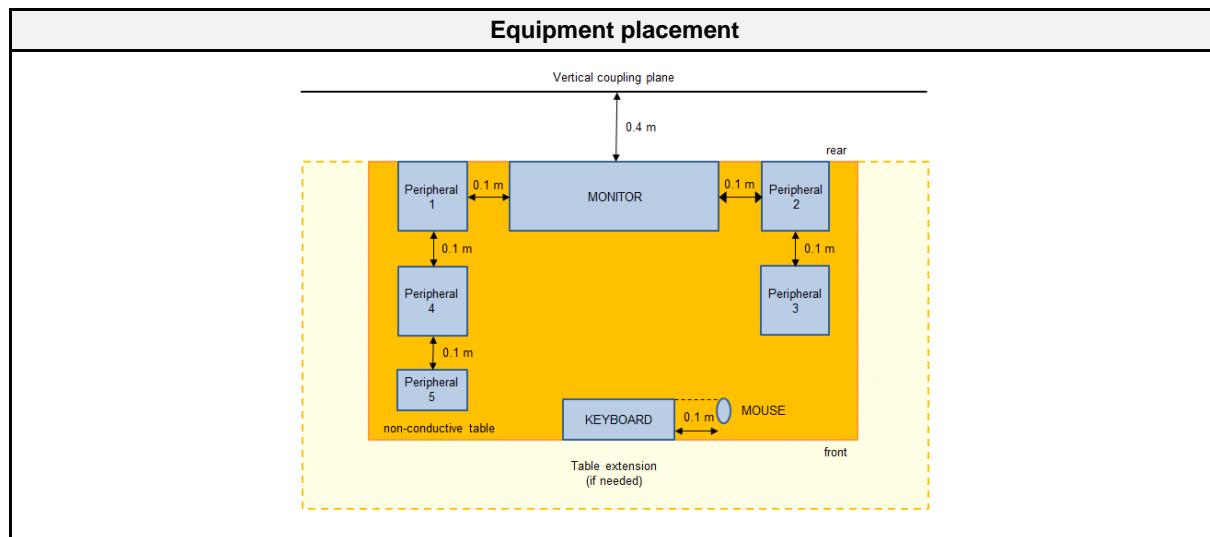

## 2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2019-07	2021-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2019-07	2020-07
EMI Test Receiver	R&S	ESR 7	EF00943	2019-10	2020-10

## 2.2.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> <li>1. The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)</li> <li>2. The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.</li> <li>3. The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).</li> <li>4. The LISN measurement port was connected to a measurement receiver</li> <li>5. I/O cables were bundled not longer than 0.4 m</li> <li>6. Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor</li> <li>7. To maximize the emissions the cable positions were manipulated</li> <li>8. The worst configuration of EUT and cables is shown on a test setup picture at item 1.3</li> </ol>

Final measurement
<ol style="list-style-type: none"> <li>1. The EUT was placed on a non-conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)</li> <li>2. The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.</li> <li>3. The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).</li> <li>4. The LISN measurement port was connected to a measurement receiver</li> <li>5. The EUT and cable arrangement were based on the exploratory measurement results</li> <li>6. The test data of the worst-case conditions were recorded and shown on the next pages</li> </ol>

## 2.2.5 Limits


Class B		
Frequency [MHz]	Quasi-peak Limit [dB $\mu$ V]	Average Limit [dB $\mu$ V]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency

## 2.2.6 Results

<b>AC power line conducted emissions</b>					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
Power	AMN	1	1	PASS	AC/DC adaptor from PoE Injector

2.2.7 Setup Photos

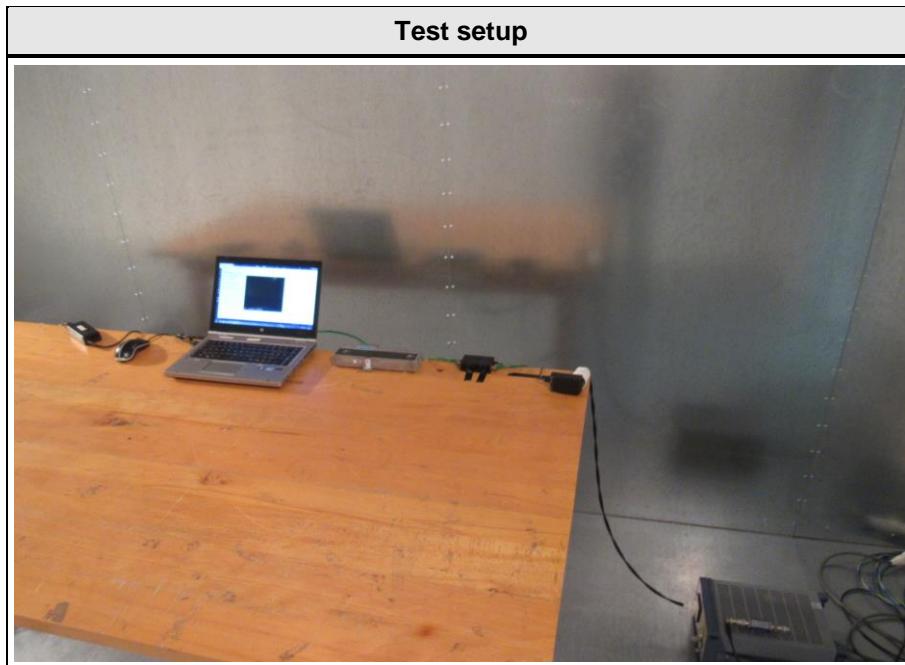


## 2.2.8 Records

### EMI voltage test in the ac-mains according to FCC part 15B

Project number: G0M-1911-8642

Applicant: Hella Aglaia Mobile Vision GmbH  
 EUT Name: Advanced People Sensor; 180mm lens distance; without IO connector  
 Model: APS-180E  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Thom: 22°C, Unom: 120V AC (AC/DC adaptor)  
 LISN: Rohde & Schwarz ESH3-Z5  
 Mode: mode# 1  
 Test Date: 2019-12-02  
 Note:

Index 9

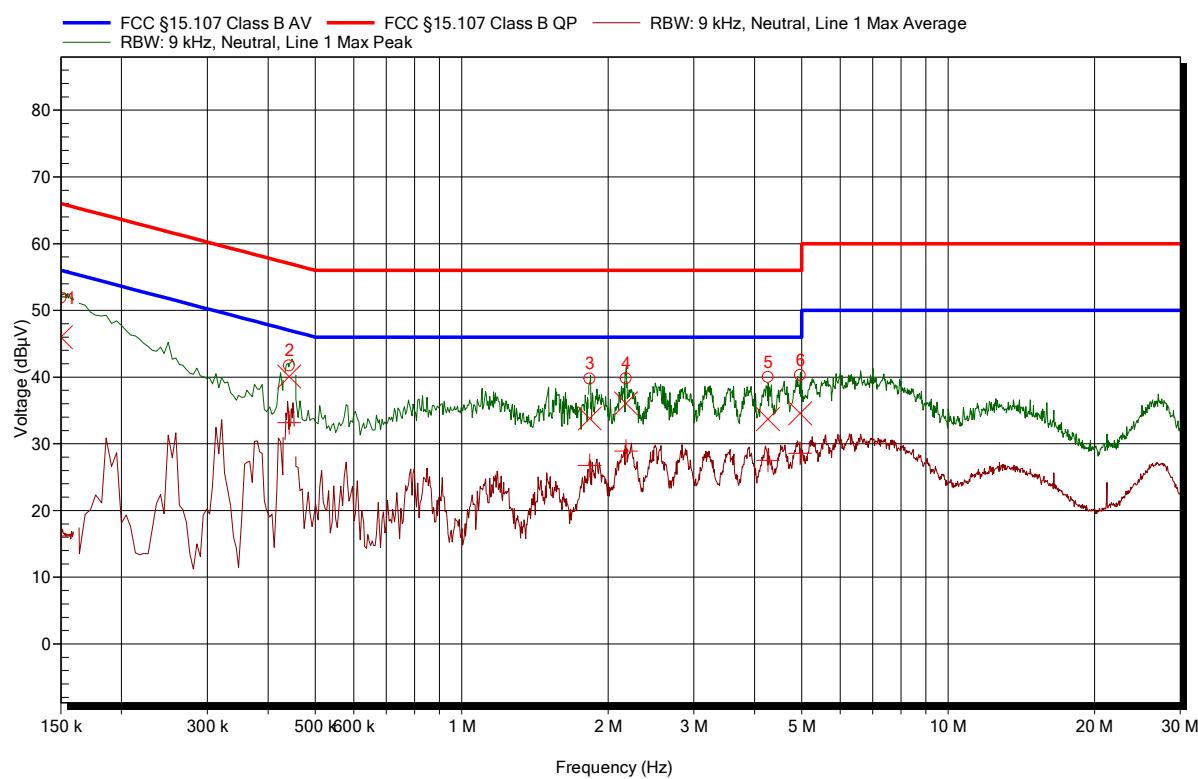

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
1	150 kHz	45.99 dB $\mu$ V	66 dB $\mu$ V	-20.01 dB	Pass
2	442.05 kHz	40.1 dB $\mu$ V	57.02 dB $\mu$ V	-16.92 dB	Pass
3	1.833 MHz	33.79 dB $\mu$ V	56 dB $\mu$ V	-22.21 dB	Pass
4	2.175 MHz	36.05 dB $\mu$ V	56 dB $\mu$ V	-19.95 dB	Pass
5	4.263 MHz	33.69 dB $\mu$ V	56 dB $\mu$ V	-22.31 dB	Pass
6	4.961 MHz	34.58 dB $\mu$ V	56 dB $\mu$ V	-21.42 dB	Pass

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status
1	150 kHz	16.21 dB $\mu$ V	56 dB $\mu$ V	-39.79 dB	Pass
2	442.05 kHz	33.18 dB $\mu$ V	47.02 dB $\mu$ V	-13.84 dB	Pass
3	1.833 MHz	26.76 dB $\mu$ V	46 dB $\mu$ V	-19.24 dB	Pass
4	2.175 MHz	28.89 dB $\mu$ V	46 dB $\mu$ V	-17.11 dB	Pass
5	4.263 MHz	27.5 dB $\mu$ V	46 dB $\mu$ V	-18.5 dB	Pass
6	4.961 MHz	28.59 dB $\mu$ V	46 dB $\mu$ V	-17.41 dB	Pass

Test Report No.: G0M-1911-8642-EF0115B-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany