




<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B, ISED ICES-003 Issue 6</b>	
<b>Report Reference No</b>	G0M-1910-8517-EF0215B-V01
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
<b>Address</b>	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b>	 <p>                     DAkkS - Registration number : D-PL-12092-01-03 (ISED)                      ISED Testing Laboratory site: 3470A-2                      DAkkS - Registration number : D-PL-12092-01-04 (FCC)                      FCC Filed Test Laboratory, Reg.-No.: 96970                 </p>
<b>Applicant</b>	Hella Aglaia Mobile Vision GmbH
<b>Address</b>	Ullsteinstraße 140 12109 Berlin GERMANY
<b>Test Specification Standard(s)</b>	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014+A1:2017
<b>Non-Standard Test Method</b>	None
<b>Equipment under Test (EUT):</b>	
<b>Product Description</b>	Advanced People Sensor; 90mm lens distance; with IO connector
<b>Model(s)</b>	GH601
<b>Additional Model(s)</b>	None
<b>Brand Name(s)</b>	APS-90E-IO
<b>Hardware Version(s)</b>	GH601
<b>Software Version(s)</b>	1.12.0.19
<b>FCC-ID</b>	2ASWU-PS4
<b>IC</b>	n/a
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Date of receipt of test item	2020-02-11	
<b>Report:</b>		
Compiled by	Stephan Liebich	
Tested by (+ signature) (Responsible for Test)	Stephan Liebich	
	Jens Marquardt	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2020-04-09	
Total number of pages	43	
<b>General Remarks:</b>		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**ABBREVIATIONS AND ACRONYMS**

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T <sub>NOM</sub>	Nominal operating temperature
V <sub>NOM</sub>	Nominal supply voltage

## VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-04-09	Initial Release	-

**REPORT INDEX**

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>6</b>
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	10
1.4	Support Equipment.....	14
1.5	Operational Modes.....	14
1.6	EUT Configuration.....	14
1.7	Sample emission level calculation.....	15
<b>2</b>	<b>Result Summary.....</b>	<b>16</b>
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	17
2.2	Test Conditions and Results - Conducted emissions acc. to ANSI C63.4.....	36



## 1 Equipment (Test Item) Under Test

Description	Advanced People Sensor; 90mm lens distance; with IO connector	
Model	GH601	
Additional Model(s)	None	
Brand Name(s)	APS-90E-IO	
Serial Number(s)	MAC: 00:0B:91:90:3B:3A	
Sample ID	27916	
Hardware Version(s)	GH601	
Software Version(s)	1.12.0.19	
Dimensions [cm]	16.0 x 16.0 x 4.2	
FCC-ID	2ASWU-PS4	
IC	n/a	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	666	
Supply Voltage 1	V <sub>NOM</sub>	48 V DC via PoE
Supply Voltage 2	V <sub>NOM</sub>	24 V DC via external power supply
Radio Module	None	
AC/DC-Adaptor	None	
Manufacturer	Hella Aglaia Mobile Vision GmbH Ullsteinstraße 140 12109 Berlin GERMANY	


**1.1 Equipment Ports**

Name	Type	Attributes	Comment
ETHERNET	TP	Count: 1 Direction: IO Max. cable length [m]: 100 Connected to outdoor: Yes Shielded: Yes Service only: No	48 V DC via PoE; Cat.6
USB	IO	Count: 1 Direction: IO Max. cable length [m]: <3 Connected to outdoor: No Shielded: Yes Service only: No	USB 2.0 Highspeed
POWER	DC	Count: 1 Direction: In Max. cable length [m]: <3 Connected to outdoor: No Shielded: No Service only: No	24 V DC
Input	IO	Count: 1 Direction: In Max. cable length [m]: >3 Connected to outdoor: No Shielded: Yes Service only: No	opt. isolated
Output	IO	Count: 1 Direction: Out Max. cable length [m]: >3 Connected to outdoor: No Shielded: Yes Service only: No	opt. isolated
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
BAT	DC power input port connected to external battery		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		



## 1.2 Equipment Photos - Internal

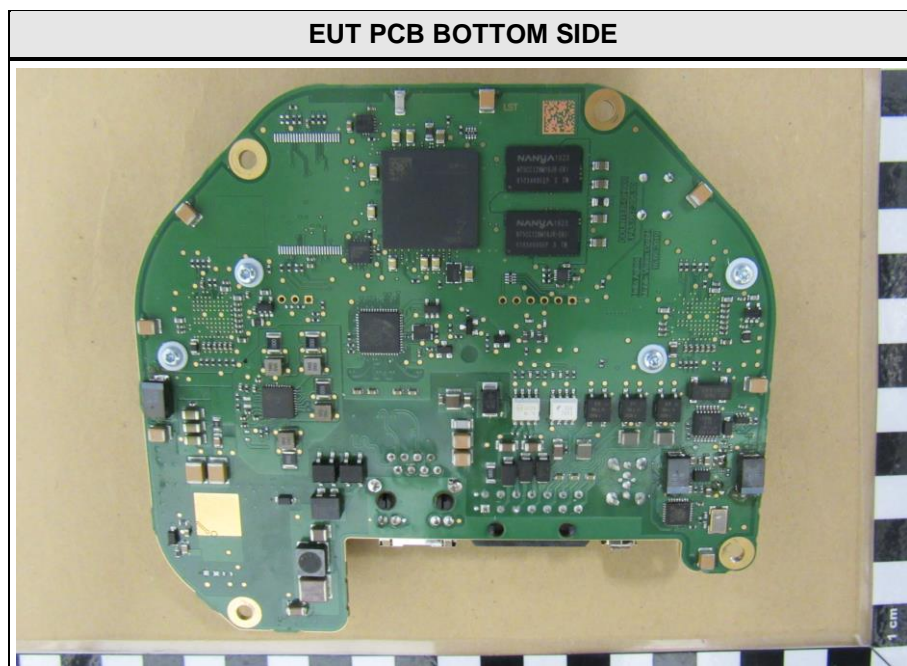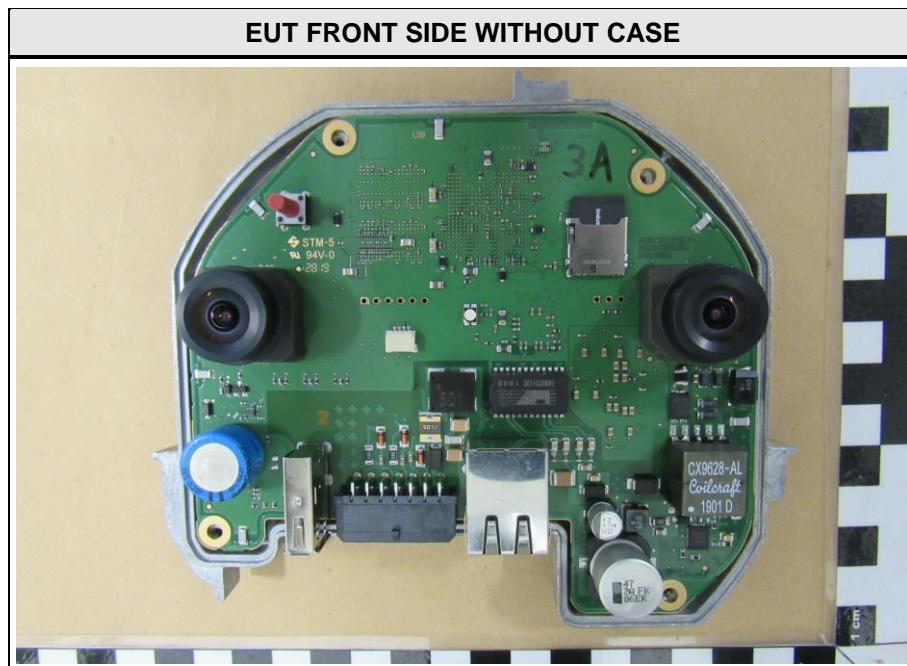




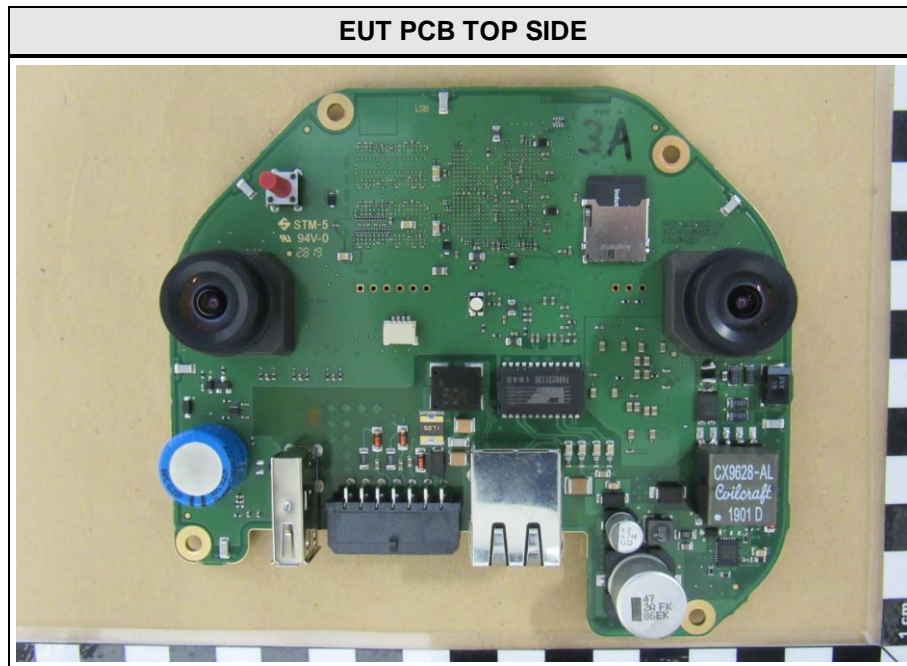


### 1.3 Equipment Photos - External

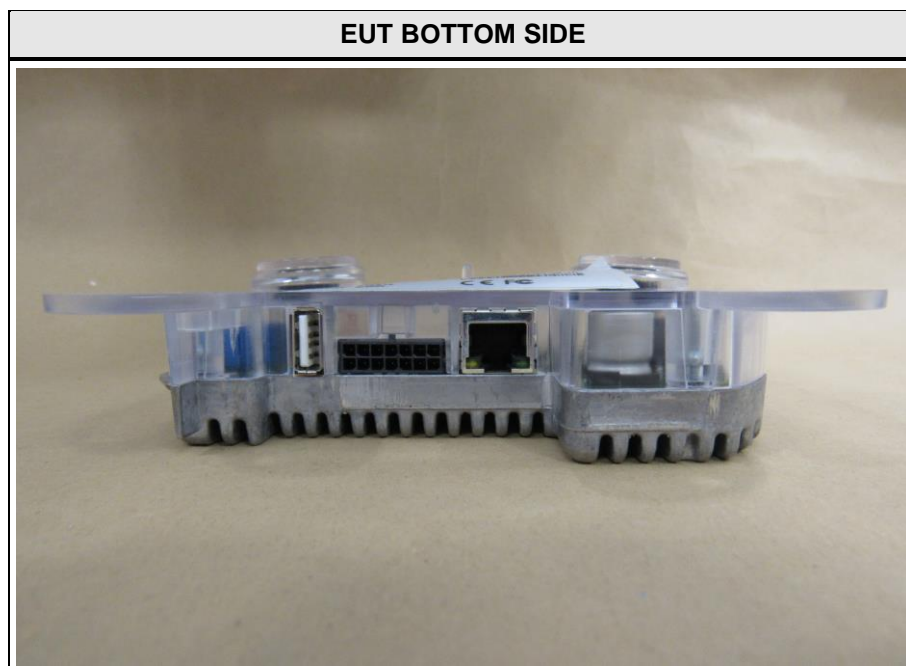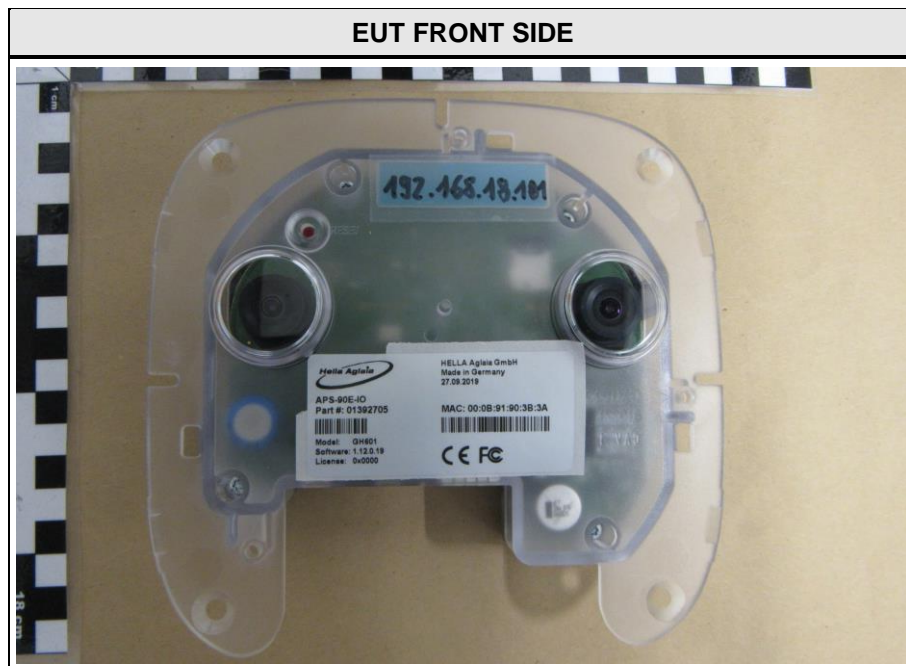


EUT CONNECTOR SIDE

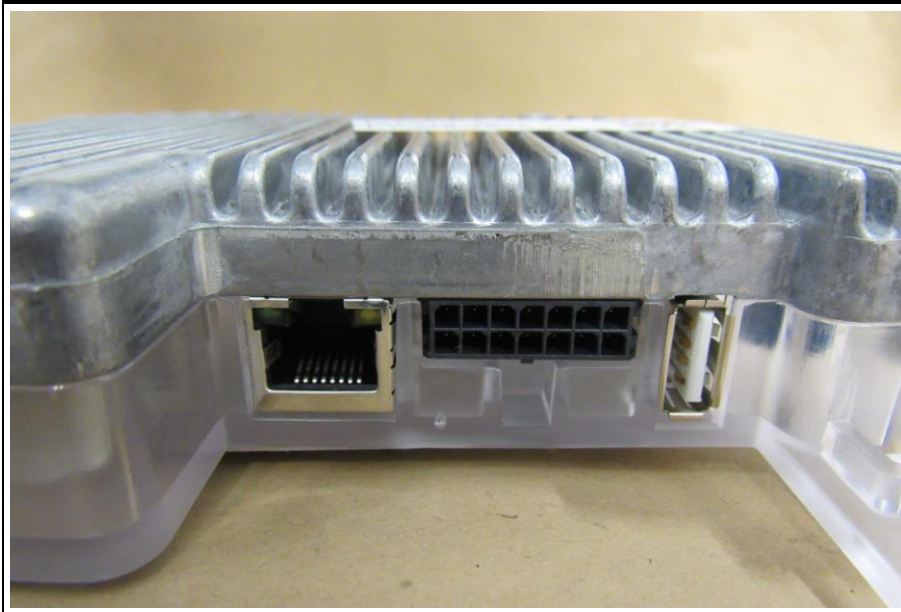

EUT LABEL

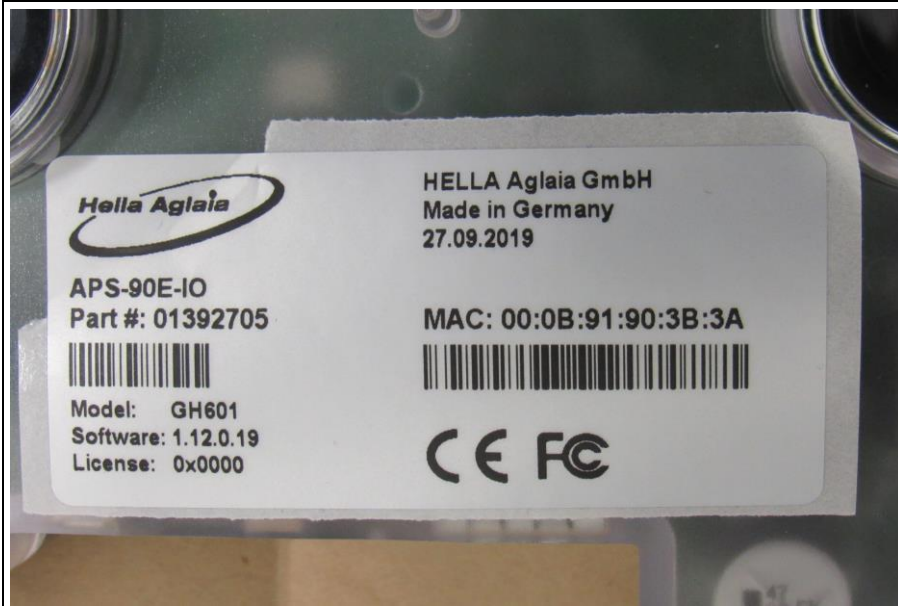


EUT LEFT SIDE

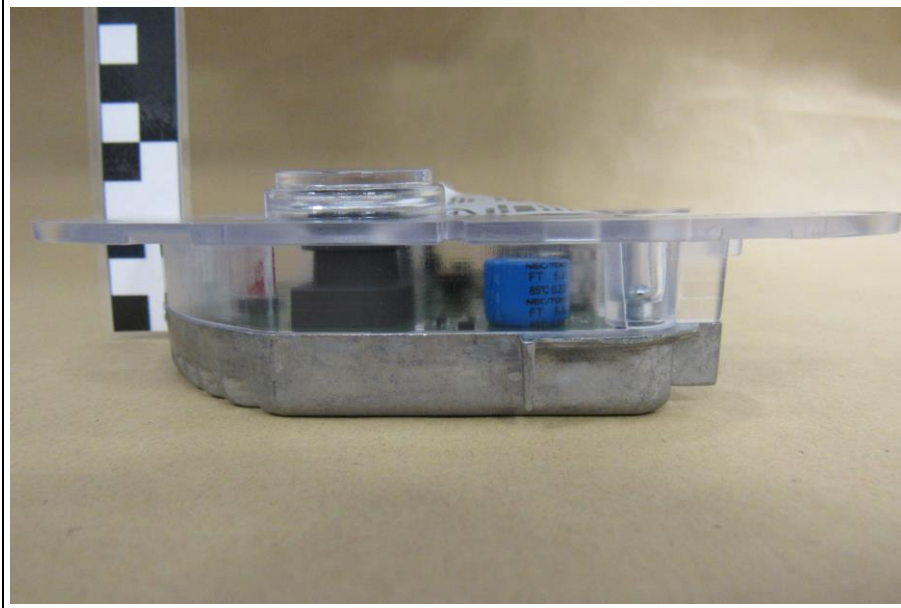


EUT REAR SIDE



EUT RIGHT SIDE

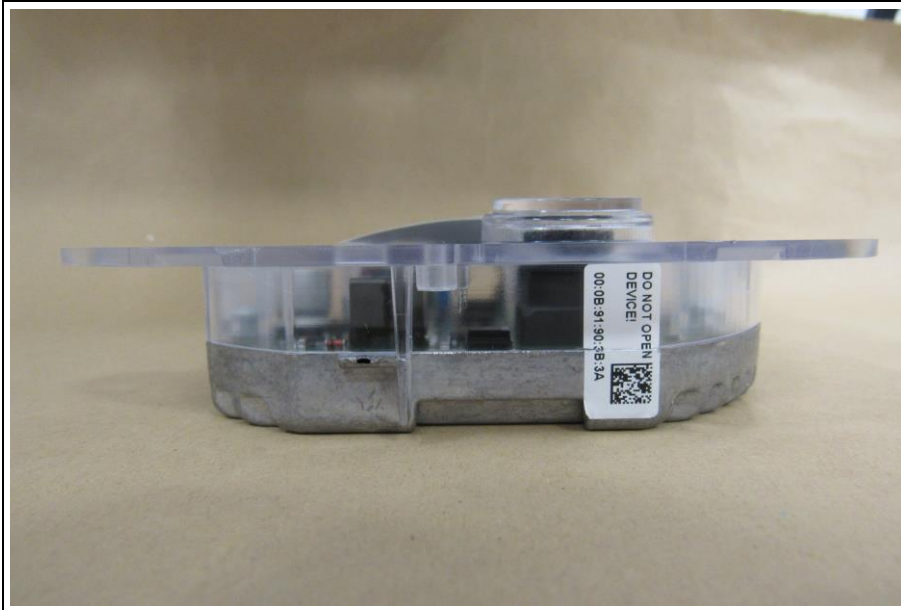

EUT TOP SIDE

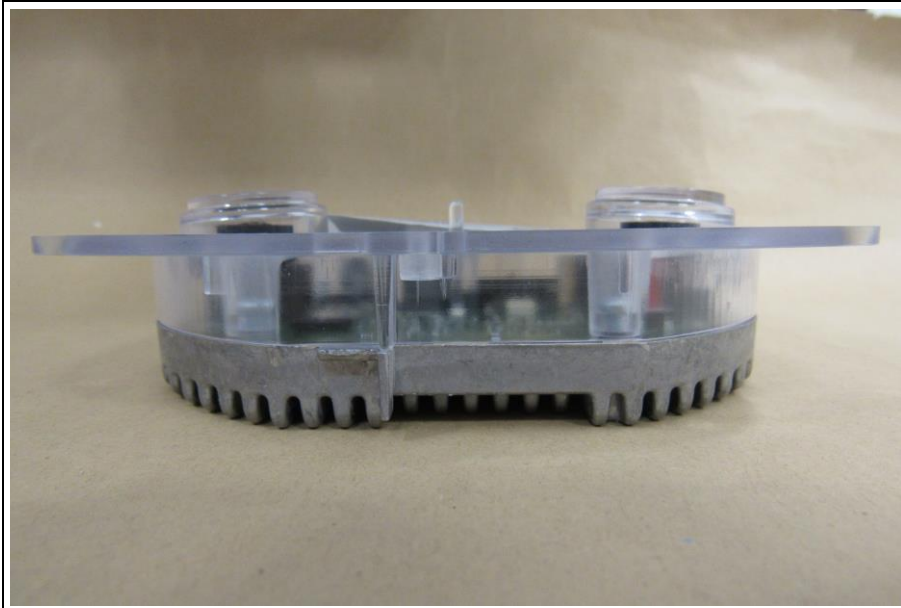

#### 1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
MON	Laptop	HP Laptop	Elitebook 8470p	-
AE	PoE Adapter	TP-Link	TL-POE150S	-
AE	USB Stick	unspecified	unspecified	-
MON	PCB	-	-	costumer build PCB for monitoring input & output (flashing LEDs)
CBL	Ethernet cable	-	-	Cat 6
AE	AC/DC-Adapter	PEAR Agency GmbH	PE-3747-675	-
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

#### 1.5 Operational Modes

Mode #	Description
1	Counting mode (counts people coming in or going out)
Comment:	

#### 1.6 EUT Configuration

Configuration #	Description
1	EUT is powered with 48 V DC via PoE Adapter. PoE Adapter is powered with 120 V / 60 Hz. PCB is connected to EUT via LAN. EUT is connected to Laptop via LAN data connection USB Stick is connected to EUT.
2	EUT is powered with 24 V DC external power supply from AC/DC-Adapter. AC/DC-Adapter is powered with 120 V / 60 Hz. EUT is connected to Laptop via LAN data connection USB Stick is connected to EUT.
Comment:	

### 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dBµV. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
+21.5 dBµV + 26 dB/m		= 47.5 dBµV/m		47.5 dBµV/m - 57.0 dBµV/m		= -9.5 dB

## 2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4	PASS	-
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4	PASS	-
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object







## 2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

### 2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014+A1:2017 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	666
Measurement range	30 MHz to 5 GHz
Temperature [°C]	23
Humidity [%]	27
Operator	Stephan Liebich
Date	2020-02-11

### 2.1.2 Setup

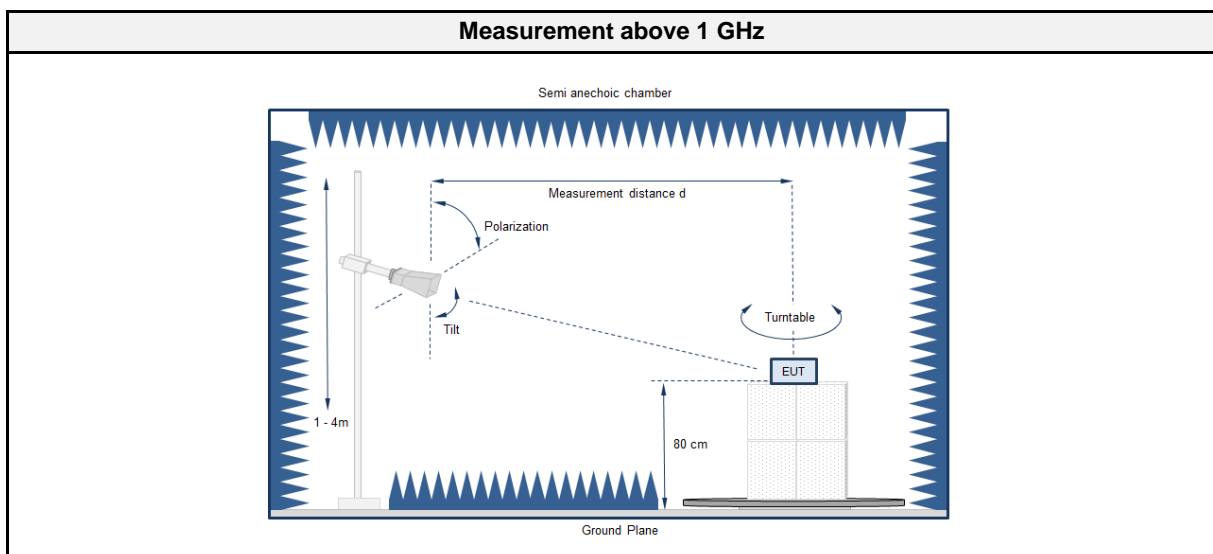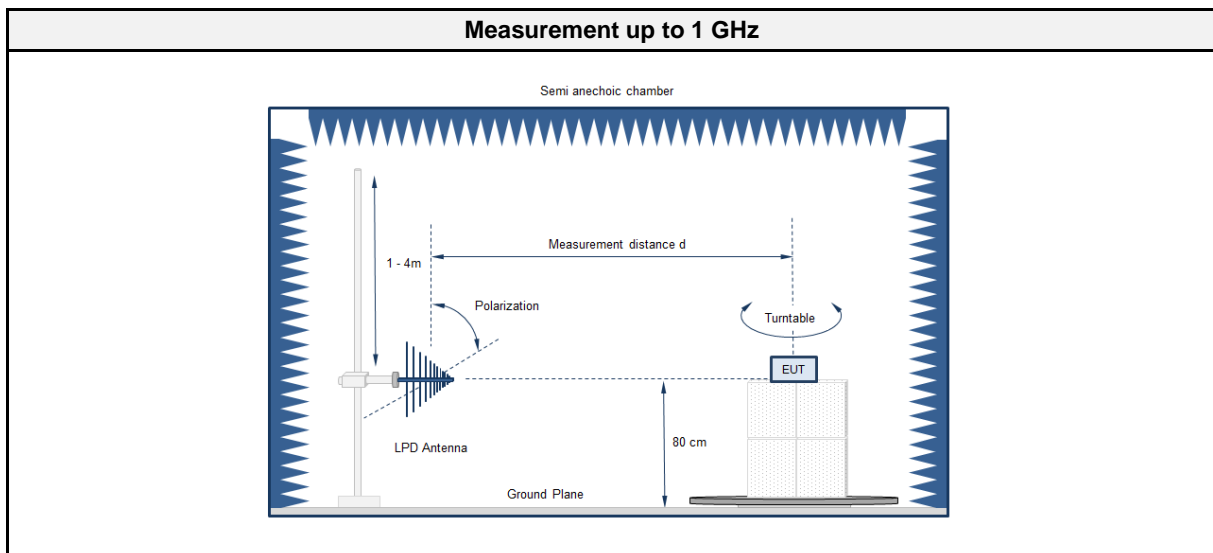

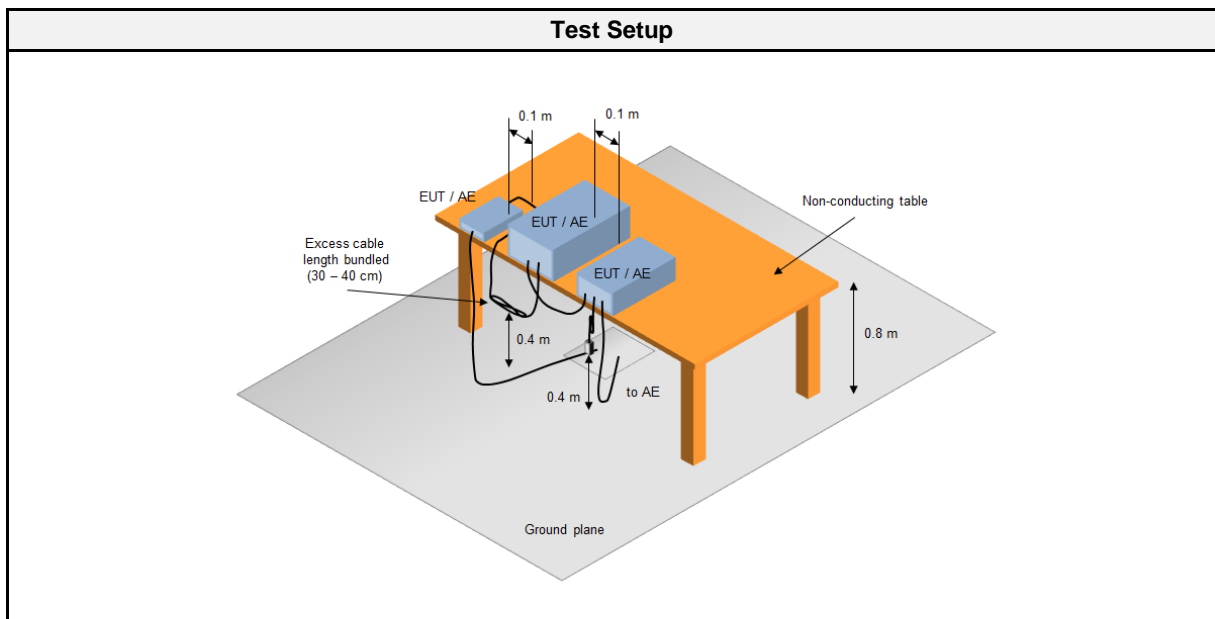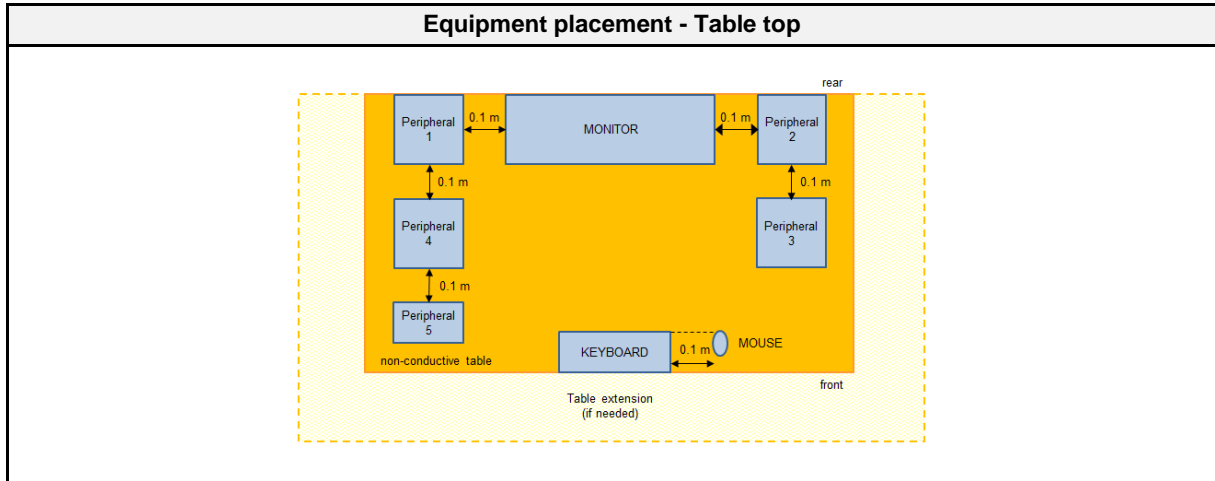

2.1.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Keysight	N9038A-526/WXP	EF01070	2019-09	2020-09
Biconical Antenna	R&S	HK 116	EF00030	2019-04	2022-04
LPD Antenna	R&S	HL 223	EF00187	2019-05	2022-05
Horn antenna	Schwarzbeck	BBHA 9120D (1-18GHz)	EF00018	2019-10	2022-10
Climatic Sensor	Embedded Data Systems, LLC.	2800100000254 17E	EF01054	2019-05	2020-05

2.1.4 Procedure

<b>Exploratory measurement</b>	
1.	The EUT was placed on a non-conductive table at a height of 0.8m.
2.	The EUT and support equipment, if needed, were set up to simulate typical usage.
3.	Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
4.	The antenna was placed at a distance of 3 or 10 m.
5.	The received signal was monitored at the measurement receiver.
6.	This procedure has to be performed in both antenna polarizations, horizontal and vertical.
7.	The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

<b>Final measurement</b>	
1.	The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver.
2.	A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast.
3.	The EUT and cable arrangement were based on the exploratory measurement results.
4.	Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
5.	The test data of the worst-case conditions were recorded and shown on the next pages.

2.1.5 Limits



<b>Class B @ 3 m</b>		
Frequency [MHz]	Detector	Limit [dBµV/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54

<b>Class A @ 10 m</b>		
Frequency [MHz]	Detector	Limit [dBµV/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5


2.1.6 Results

<b>Test Results</b>			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	-
1	2	PASS	-


2.1.7 Setup Photos

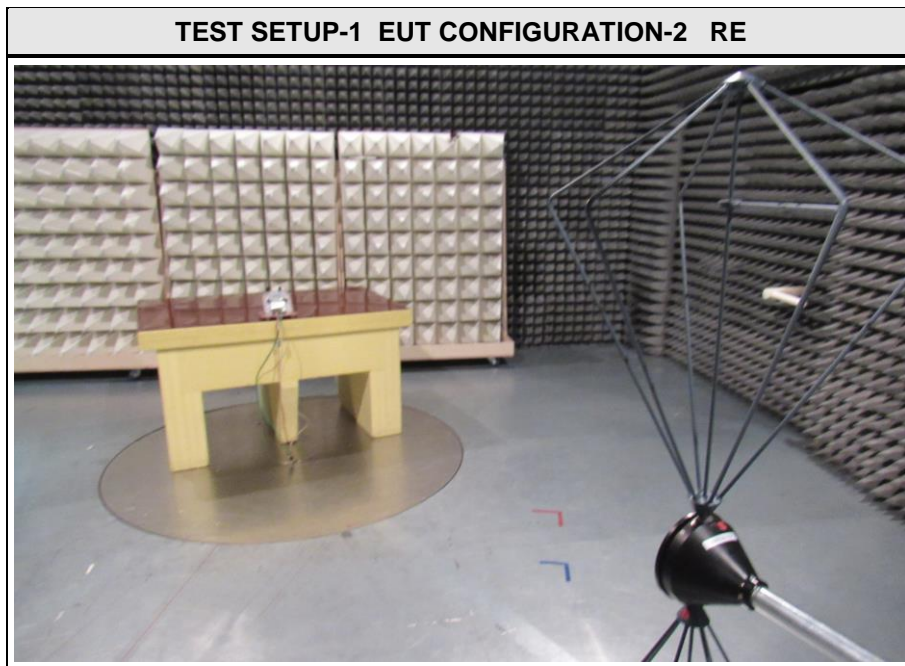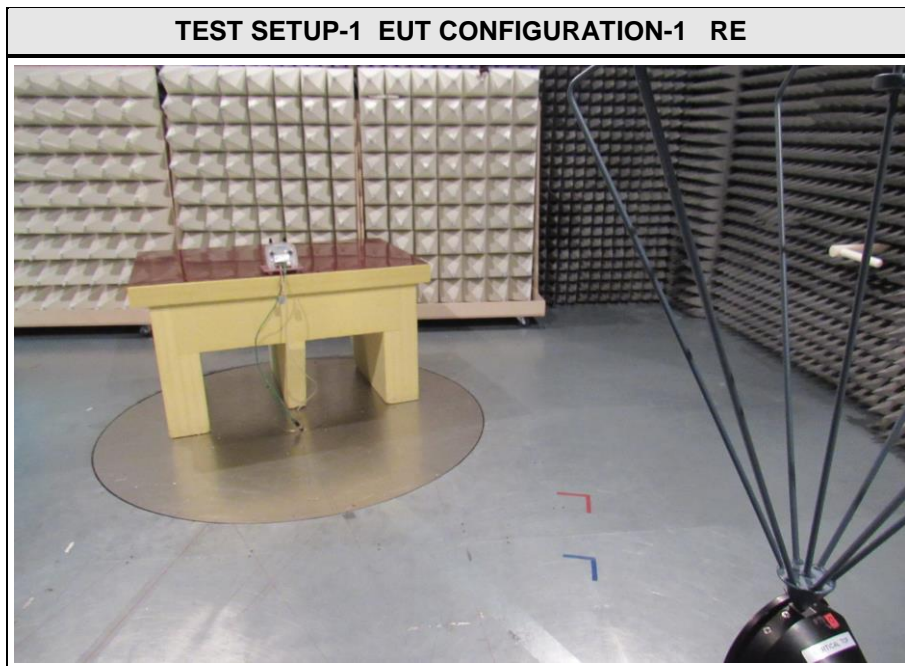


**TEST SETUP-2 EUT CONFIGURATION-1 RE**

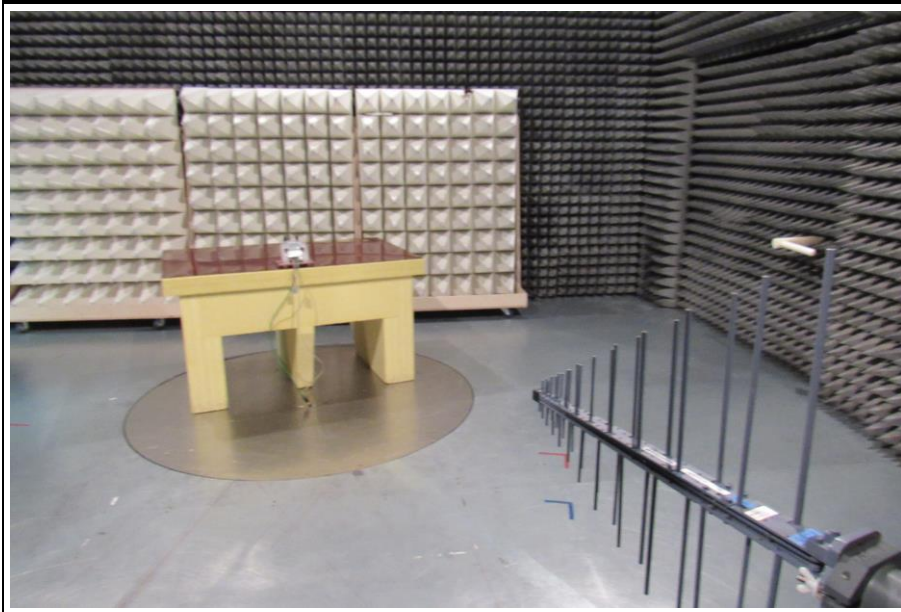


**TEST SETUP-2 EUT CONFIGURATION-2 RADIATED EMISSION**

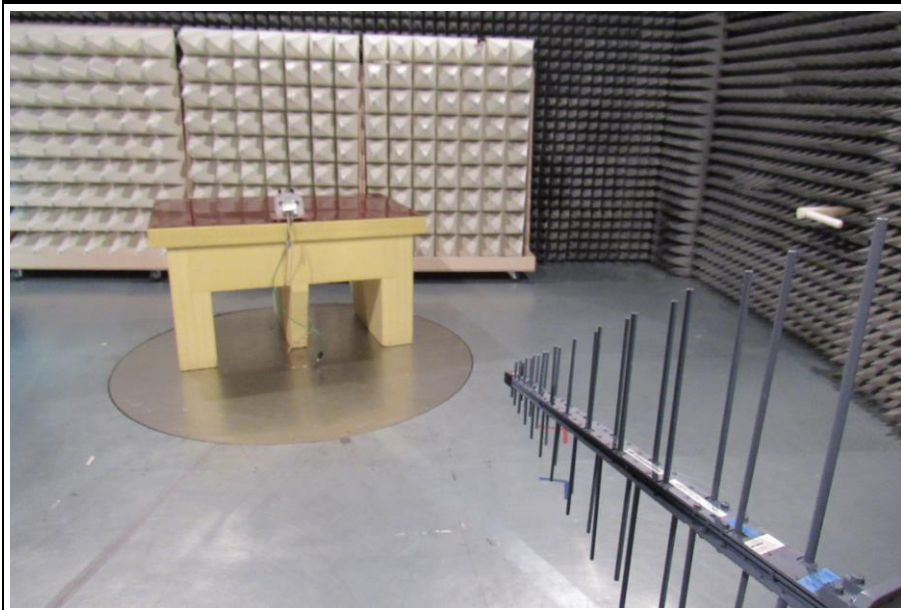

**TEST SETUP-3 EUT CONFIGURATION-1 RE**

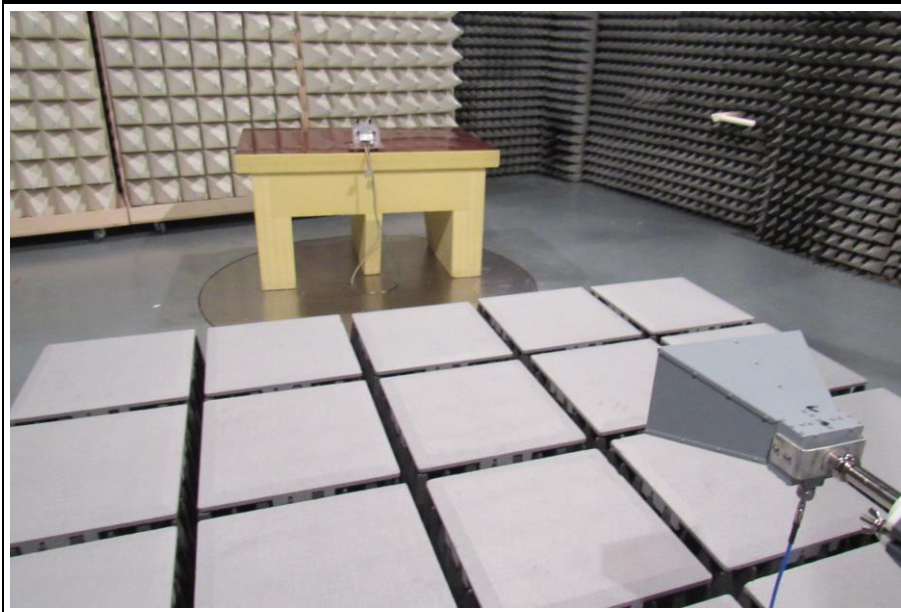


**TEST SETUP-3 EUT CONFIGURATION-2 RE**

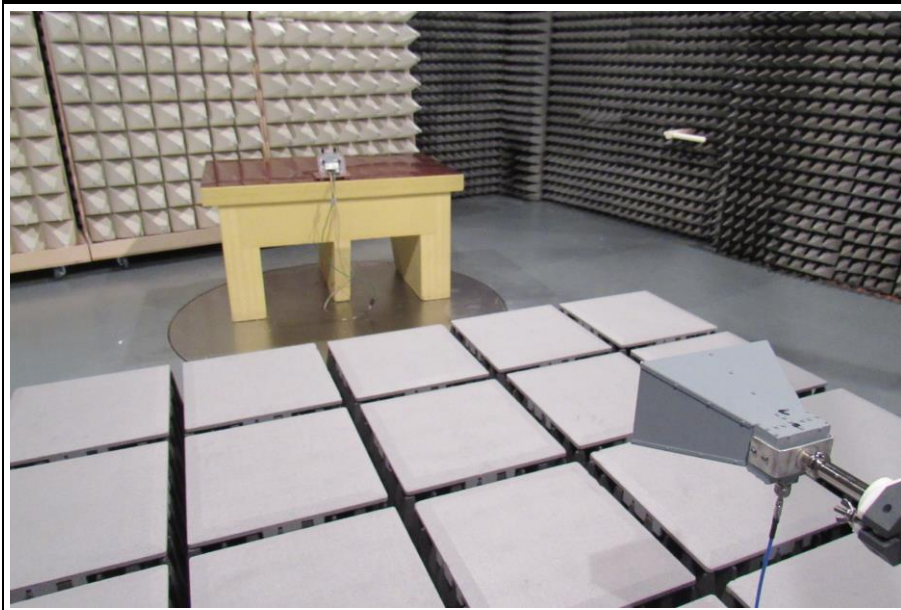

**TEST SETUP FOCUS EUT CONFIGURATION-1 RE**



**TEST SETUP FOCUS EUT CONFIGURATION-2 RE**

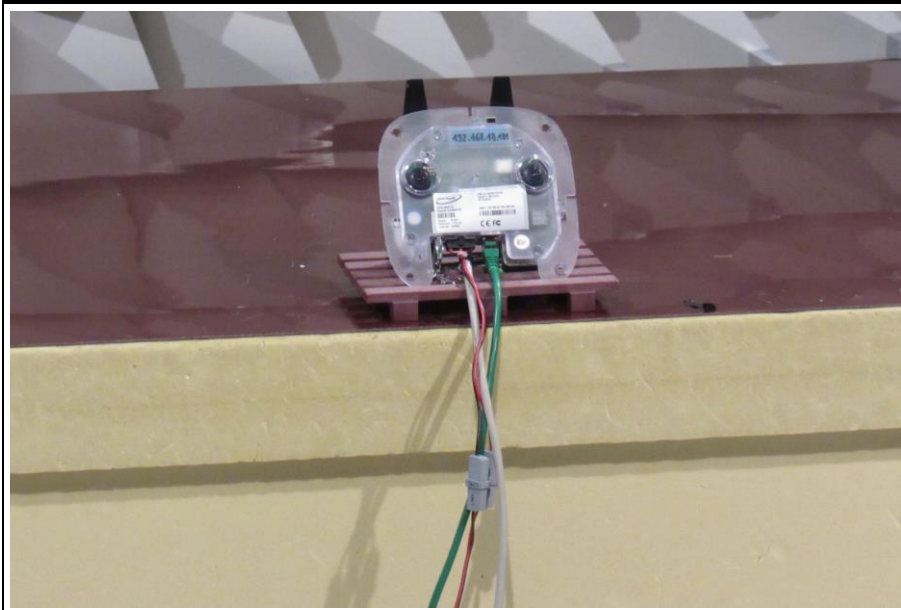


2.1.8 Records

**Radiated emissions according to FCC part 15B**

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 24 V DC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement Distance: 3m  
 Mode: 1

Index 23

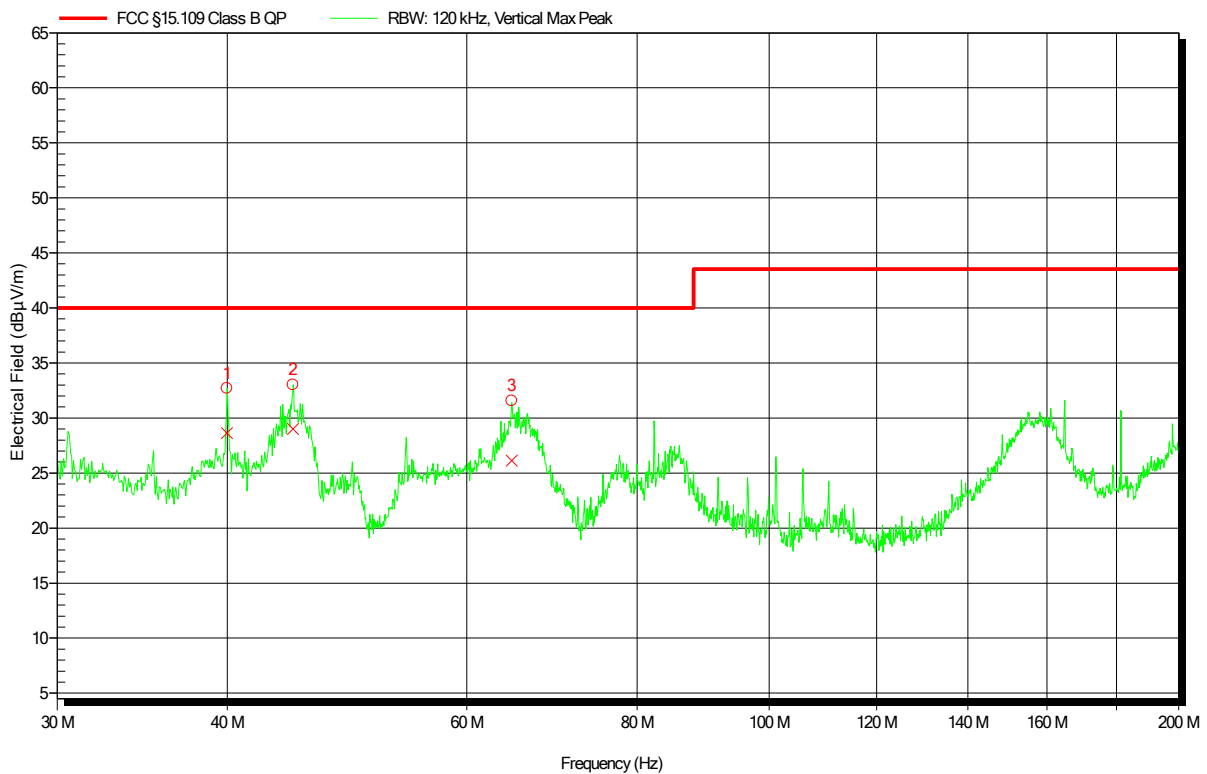


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	39.992 MHz	28.63 dBµV/m	40 dBµV/m	-11.37 dB	Pass	0 Degree	1 m
2	44.7 MHz	28.99 dBµV/m	40 dBµV/m	-11.01 dB	Pass	0 Degree	1 m
3	64.709 MHz	26.12 dBµV/m	40 dBµV/m	-13.88 dB	Pass	0 Degree	1 m



### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 24 V DC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement Distance: 3m  
 Mode: 1


Index 24

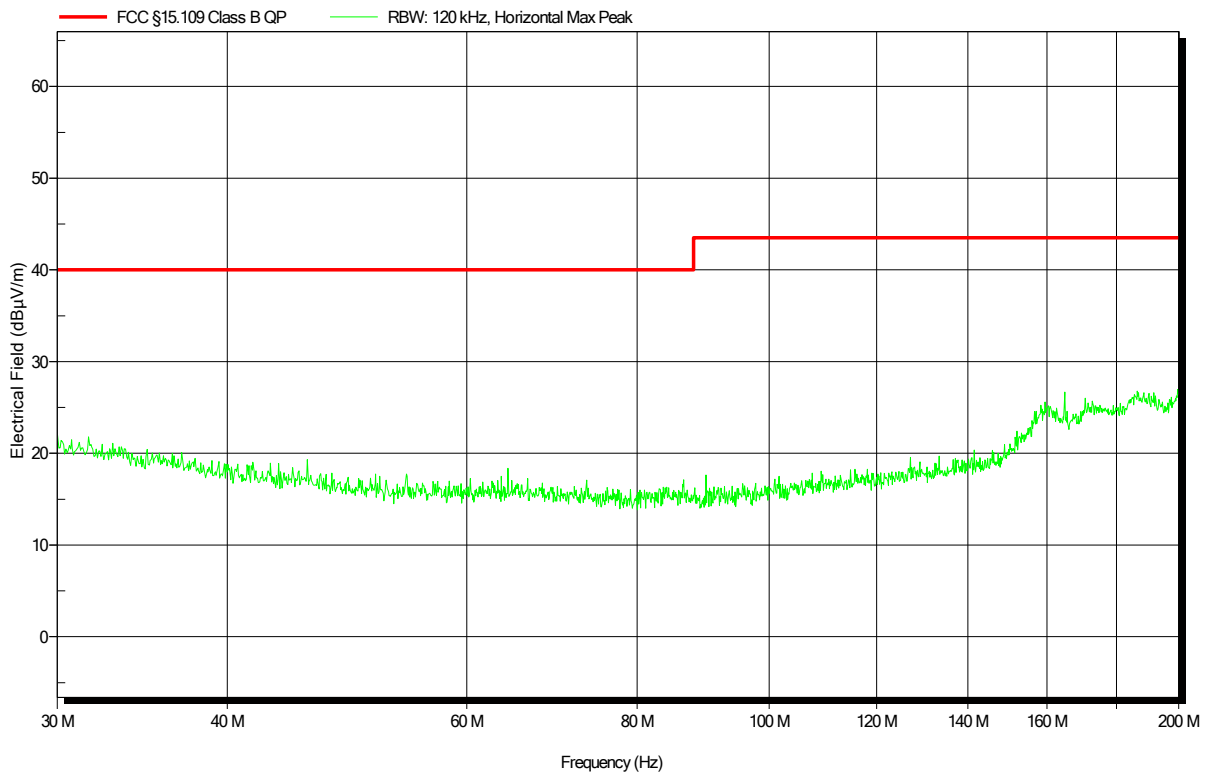

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 24 V DC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement Distance: 3m  
 Mode: 1

Index 21

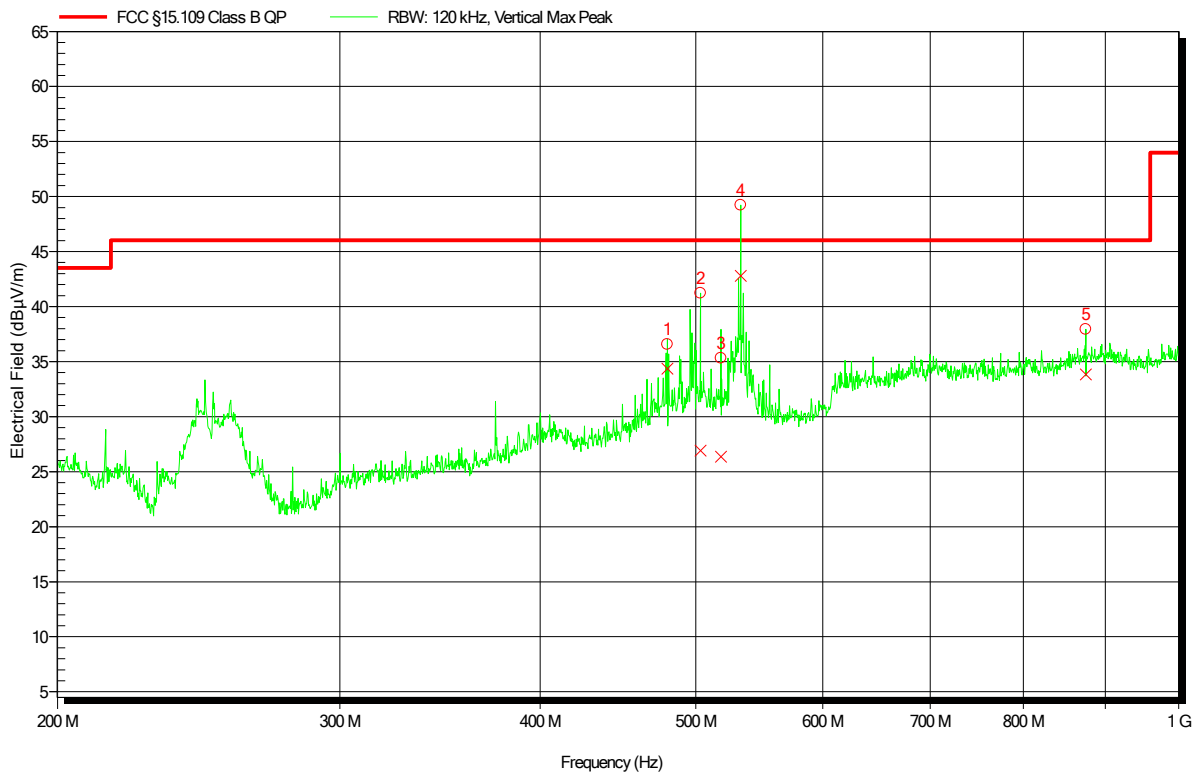


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	480.048 MHz	34.36 dBµV/m	46.02 dBµV/m	-11.66 dB	Pass	0 Degree	1 m
2	503.494 MHz	26.91 dBµV/m	46.02 dBµV/m	-19.11 dB	Pass	0 Degree	1 m
3	518.379 MHz	26.37 dBµV/m	46.02 dBµV/m	-19.65 dB	Pass	0 Degree	1 m
4	533.335 MHz	42.79 dBµV/m	46.02 dBµV/m	-3.23 dB	Pass	0 Degree	1 m
5	874.999 MHz	33.83 dBµV/m	46.02 dBµV/m	-12.19 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 24 V DC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement Distance: 3m  
 Mode: 1

Index 22

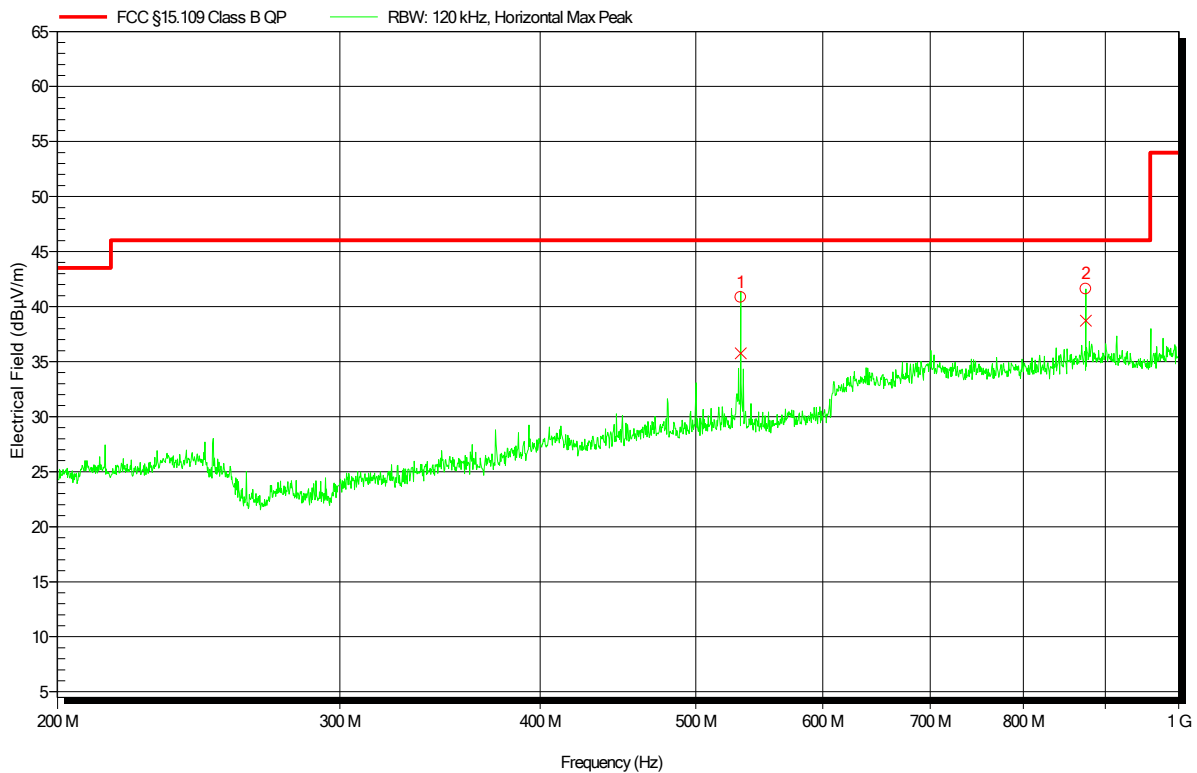


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	533.341 MHz	35.75 dBµV/m	46.02 dBµV/m	-10.27 dB	Pass	0 Degree	1 m
2	875.005 MHz	38.73 dBµV/m	46.02 dBµV/m	-7.29 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 24 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement Distance: 3m  
 Mode: 1

Index 19

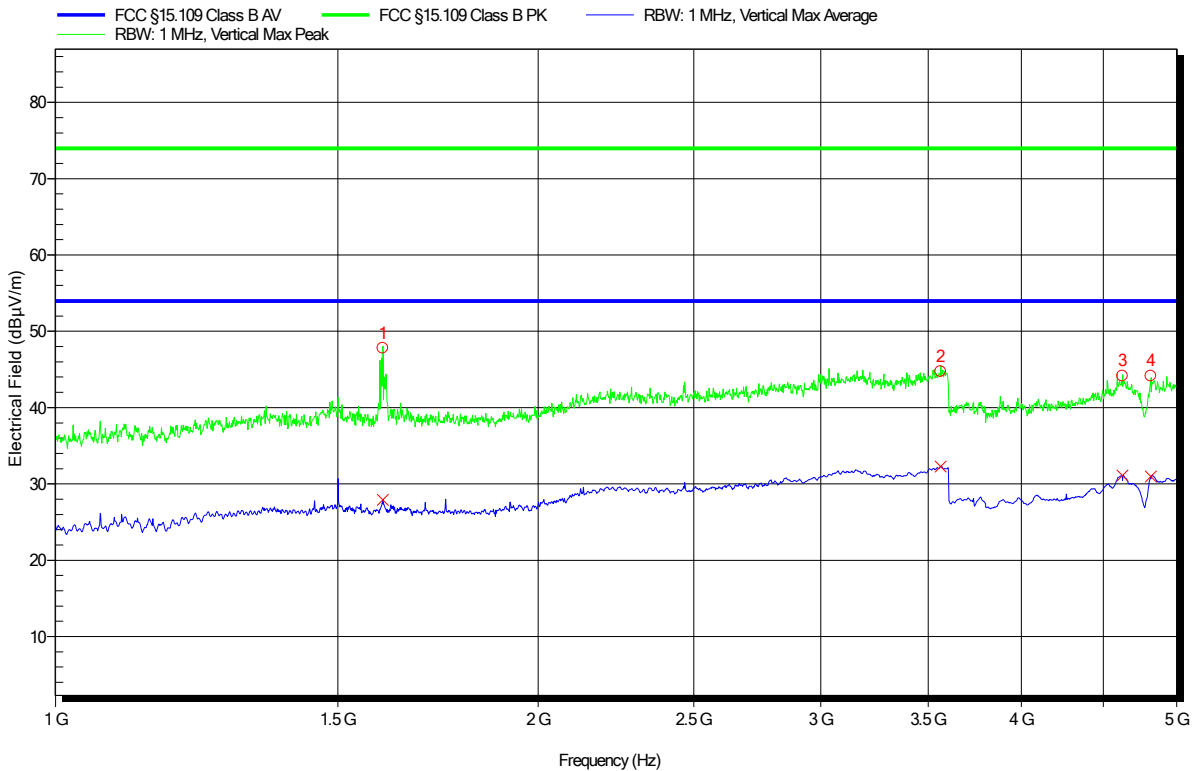

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.6 GHz	47.79 dBµV/m	73.98 dBµV/m	-26.19 dB	Pass	0 Degree	1 m
2	3.563 GHz	44.74 dBµV/m	73.98 dBµV/m	-29.24 dB	Pass	0 Degree	1 m
3	4.626 GHz	44.16 dBµV/m	73.98 dBµV/m	-29.82 dB	Pass	0 Degree	1 m
4	4.818 GHz	44.16 dBµV/m	73.98 dBµV/m	-29.82 dB	Pass	0 Degree	1 m


  

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.6 GHz	27.93 dBµV/m	53.98 dBµV/m	-26.05 dB	Pass	0 Degree	1 m
2	3.563 GHz	32.27 dBµV/m	53.98 dBµV/m	-21.71 dB	Pass	0 Degree	1 m
3	4.626 GHz	31.08 dBµV/m	53.98 dBµV/m	-22.9 dB	Pass	0 Degree	1 m
4	4.818 GHz	30.98 dBµV/m	53.98 dBµV/m	-23 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 24 V DC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement Distance: 3m  
 Mode: 1

Index 20

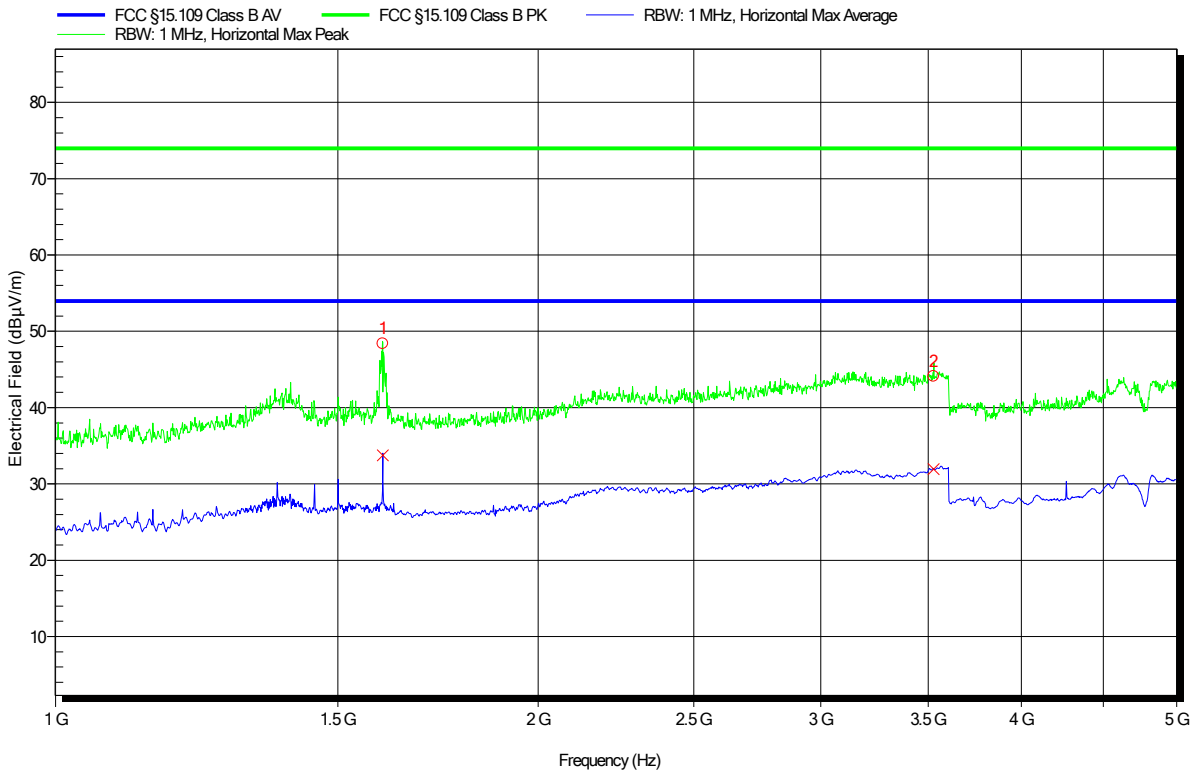

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.6 GHz	48.39 dBµV/m	73.98 dBµV/m	-25.59 dB	Pass	0 Degree	1 m
2	3.528 GHz	44.1 dBµV/m	73.98 dBµV/m	-29.88 dB	Pass	0 Degree	1 m


  

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.6 GHz	33.73 dBµV/m	53.98 dBµV/m	-20.25 dB	Pass	0 Degree	1 m
2	3.528 GHz	31.92 dBµV/m	53.98 dBµV/m	-22.06 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 48 V DC (PoE)  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement Distance: 3m  
 Mode: 1

Index 25

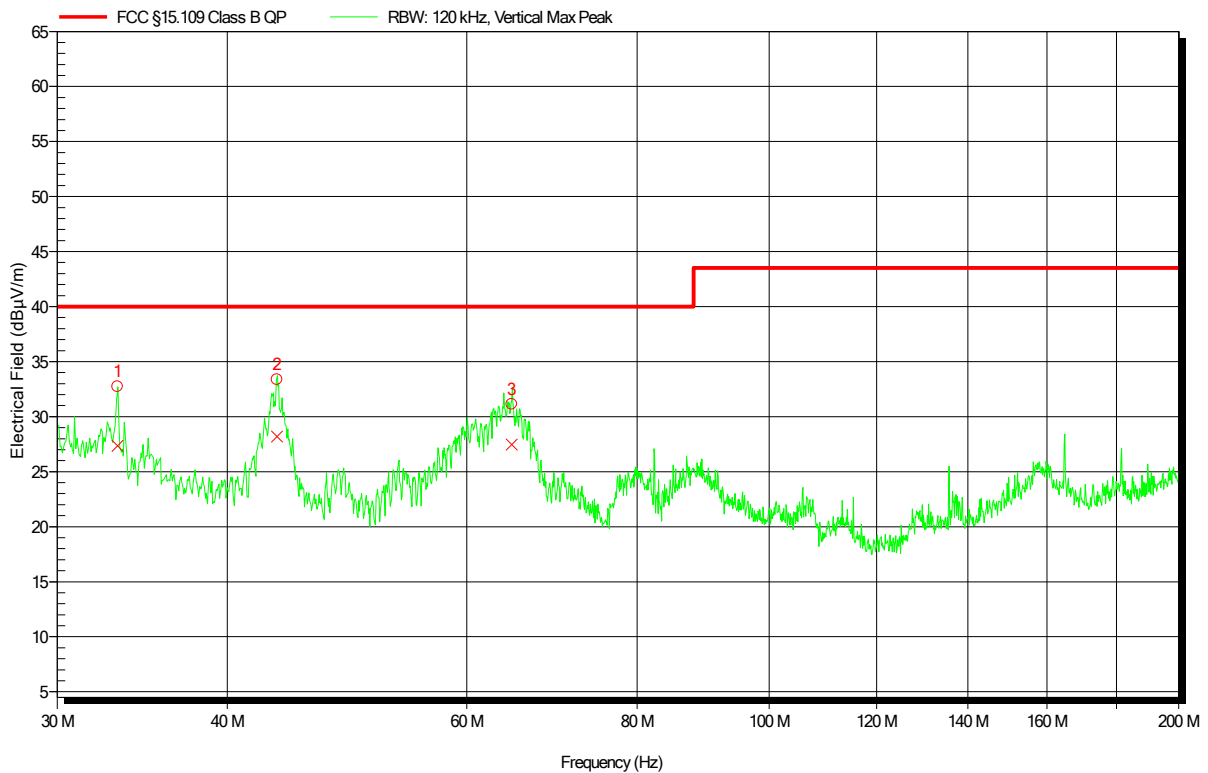


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	33.225 MHz	27.35 dBµV/m	40 dBµV/m	-12.65 dB	Pass	0 Degree	1 m
2	43.523 MHz	28.18 dBµV/m	40 dBµV/m	-11.82 dB	Pass	0 Degree	1 m
3	64.709 MHz	27.48 dBµV/m	40 dBµV/m	-12.52 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 48 V DC (PoE)  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement Distance: 3m  
 Mode: 1


Index 26

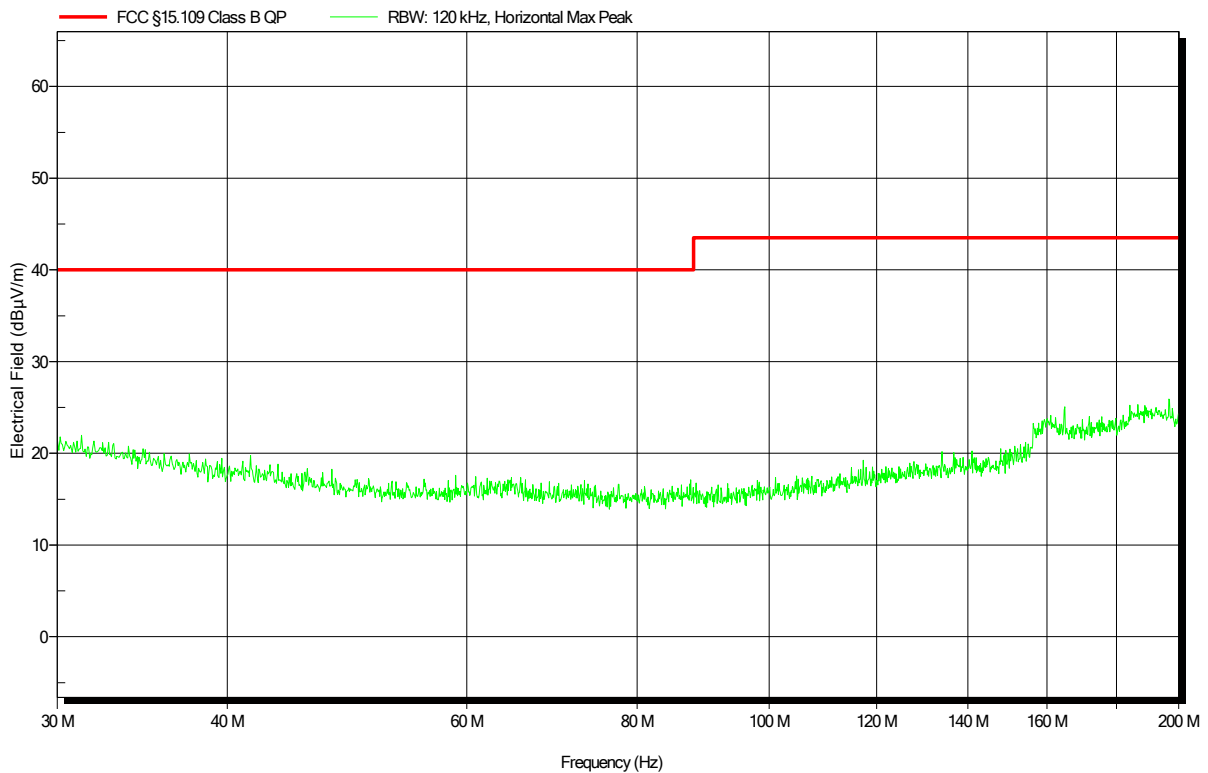

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 48 V DC (PoE)  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement Distance: 3m  
 Mode: 1

Index 27

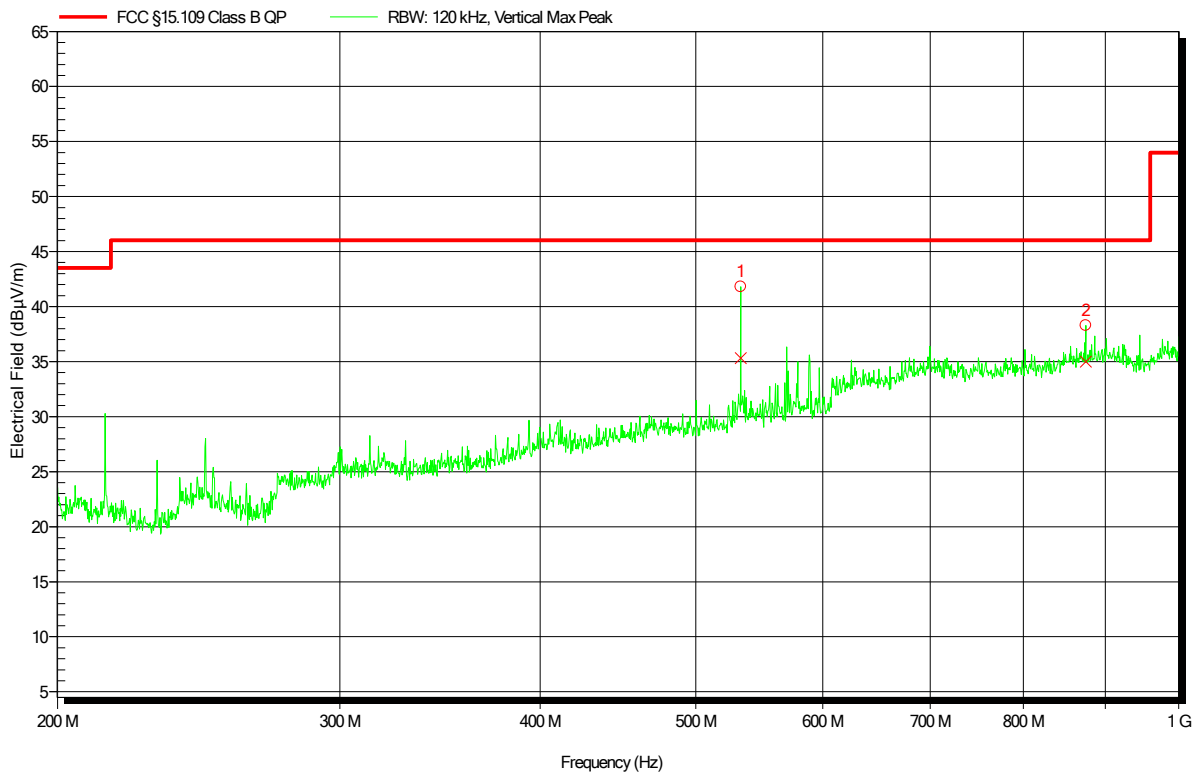


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	533.341 MHz	35.33 dBµV/m	46.02 dBµV/m	-10.69 dB	Pass	0 Degree	1 m
2	874.999 MHz	35.01 dBµV/m	46.02 dBµV/m	-11.01 dB	Pass	0 Degree	1 m



### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 48 V DC (PoE)  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement Distance: 3m  
 Mode: 1

Index 28

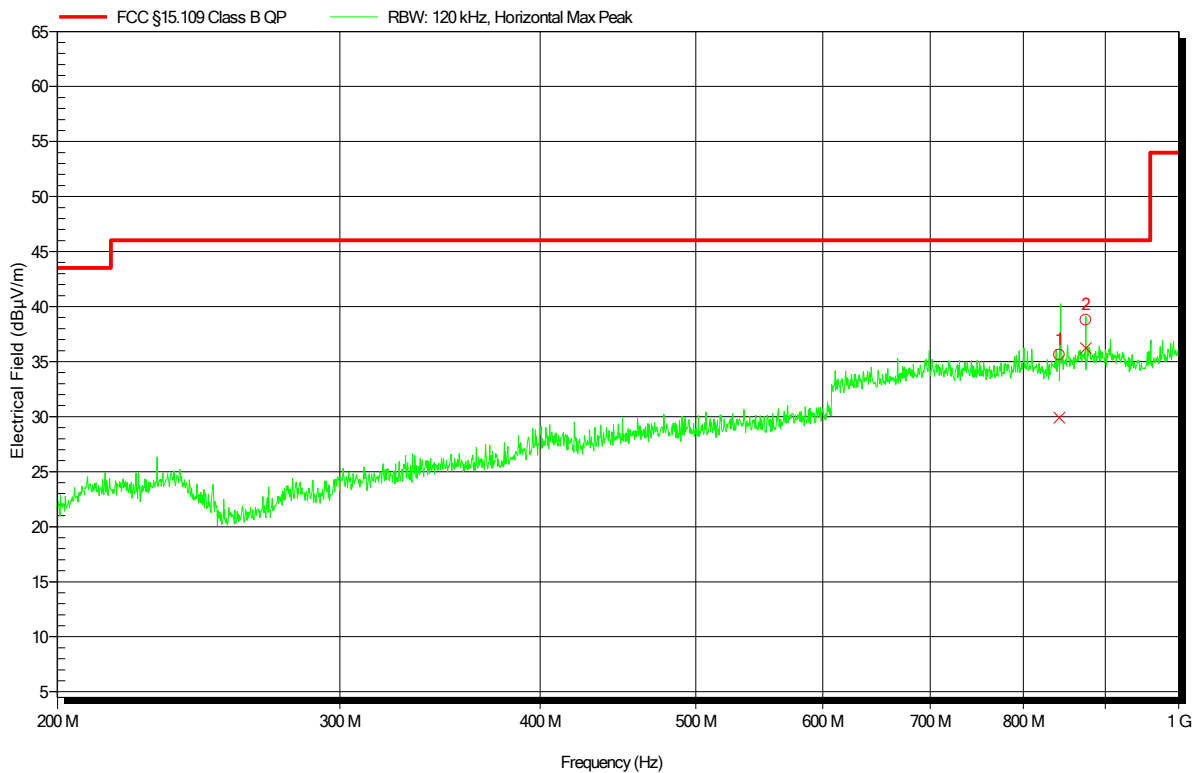


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	842.54 MHz	29.92 dBµV/m	46.02 dBµV/m	-16.11 dB	Pass	0 Degree	1 m
2	874.993 MHz	36.21 dBµV/m	46.02 dBµV/m	-9.81 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 48 V DC (PoE)  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement Distance: 3m  
 Mode: 1

Index 17

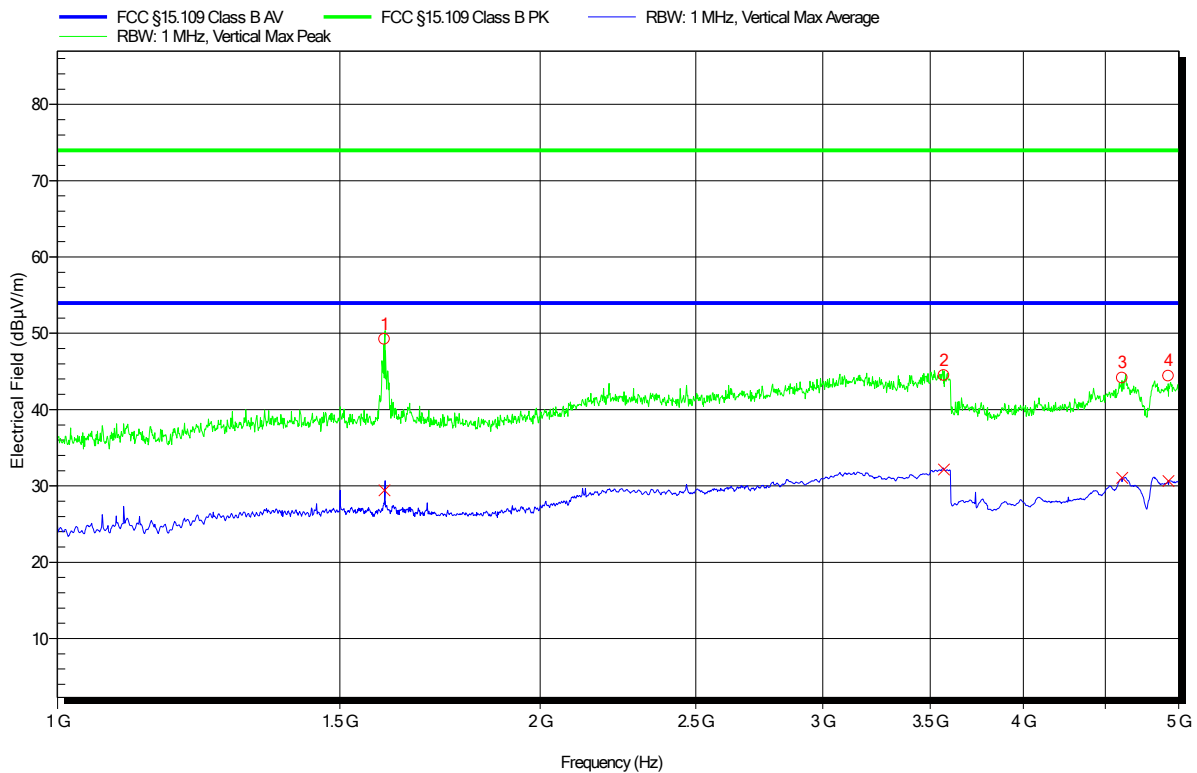

Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	1.6 GHz	49.23 dBµV/m	73.98 dBµV/m	-24.75 dB	Pass	0 Degree	1 m
2	3.57 GHz	44.48 dBµV/m	73.98 dBµV/m	-29.5 dB	Pass	0 Degree	1 m
3	4.609 GHz	44.16 dBµV/m	73.98 dBµV/m	-29.82 dB	Pass	0 Degree	1 m
4	4.927 GHz	44.39 dBµV/m	73.98 dBµV/m	-29.59 dB	Pass	0 Degree	1 m


  

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	1.6 GHz	29.44 dBµV/m	53.98 dBµV/m	-24.54 dB	Pass	0 Degree	1 m
2	3.57 GHz	32.14 dBµV/m	53.98 dBµV/m	-21.84 dB	Pass	0 Degree	1 m
3	4.609 GHz	31.04 dBµV/m	53.98 dBµV/m	-22.94 dB	Pass	0 Degree	1 m
4	4.927 GHz	30.64 dBµV/m	53.98 dBµV/m	-23.34 dB	Pass	0 Degree	1 m

### Radiated emissions according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 23°C  
 power input: 48 V DC (PoE)  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement Distance: 3m  
 Mode: 1

Index 18

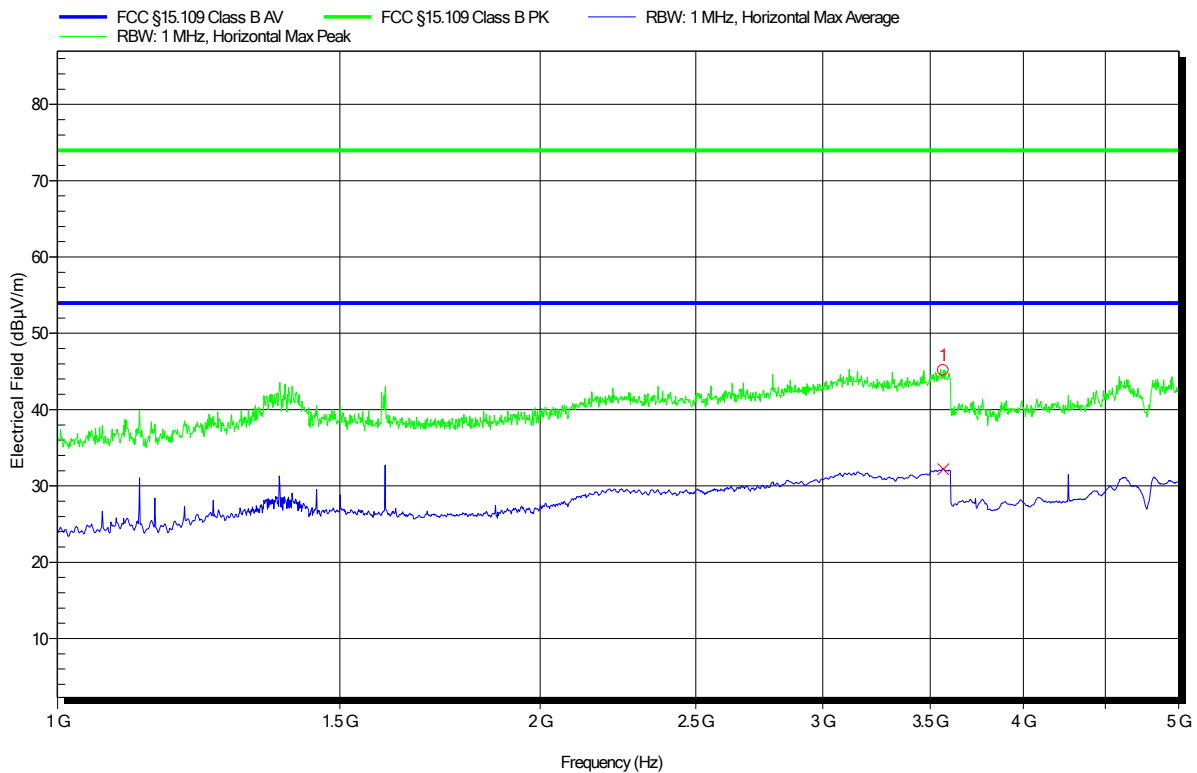



Peak Number	Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Angle	Height
1	3.567 GHz	45.17 dBµV/m	73.98 dBµV/m	-28.81 dB	Pass	0 Degree	1 m
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height
1	3.567 GHz	32.18 dBµV/m	53.98 dBµV/m	-21.8 dB	Pass	0 Degree	1 m

## 2.2 Test Conditions and Results - Conducted emissions acc. to ANSI C63.4

### 2.2.1 Information

Test Information	
Reference	FCC 15.107, ICES-003, 8, 6.2
Reference method	ANSI C63.4:2014+A1:2017 Section 12
Measurement range	150 kHz to 30 MHz
Equipment class	Class B
Equipment type	Table top
Temperature [°C]	22
Humidity [%]	26
Operator	Stephan Liebich
Date	2020-02-11

### 2.2.2 Setup

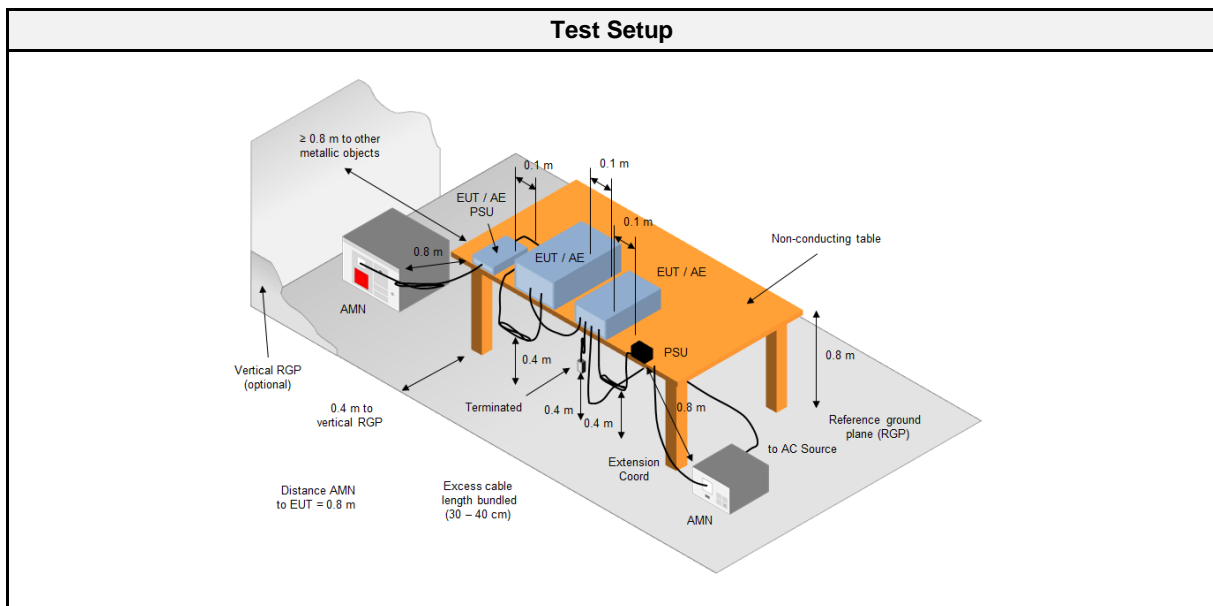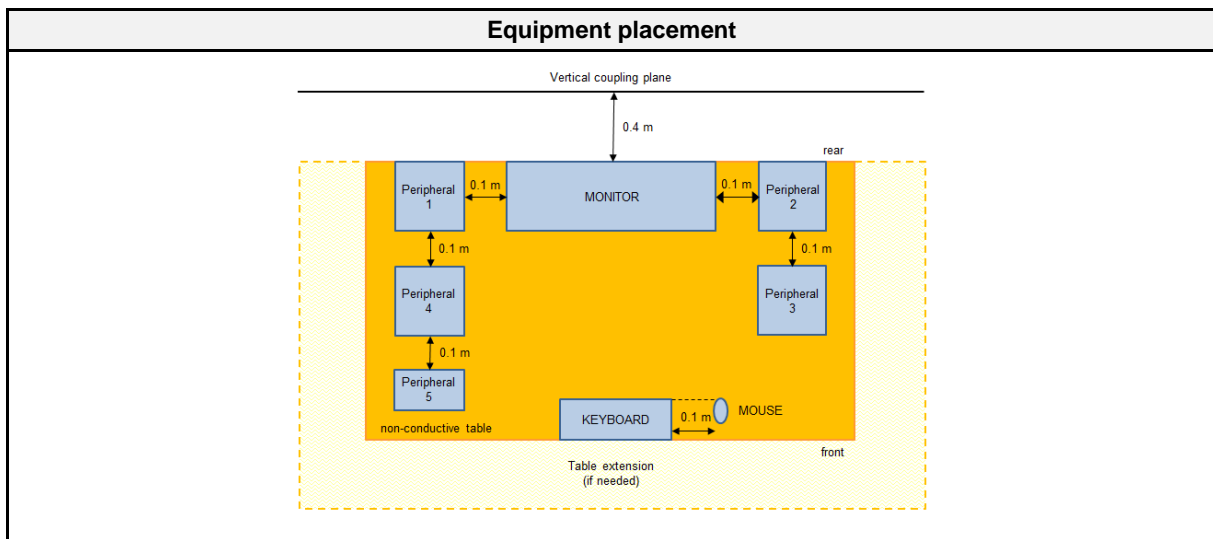

## 2.2.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2019-07	2021-07
Pulse Limiter	R&S	ESH3-Z2	EF01063	2019-07	2020-07
CDN	Teseq GmbH - Berlin	ST08A	EF00411	2019-07	2021-07
EMI Test Receiver	R&S	ESR 7	EF00943	2019-10	2020-10
Climatic Sensor	Embedded Data Systems, LLC.	2800100000254 17E	EF01054	2019-05	2020-05

## 2.2.4 Procedure

Exploratory measurement
<ol style="list-style-type: none"> <li>The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)</li> <li>The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.</li> <li>The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).</li> <li>The LISN measurement port was connected to a measurement receiver</li> <li>I/O cables were bundled not longer than 0.4 m</li> <li>Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor</li> <li>To maximize the emissions the cable positions were manipulated</li> <li>The worst configuration of EUT and cables is shown on a test setup picture at item 1.3</li> </ol>

Final measurement
<ol style="list-style-type: none"> <li>The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)</li> <li>The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.</li> <li>The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).</li> <li>The LISN measurement port was connected to a measurement receiver</li> <li>The EUT and cable arrangement were based on the exploratory measurement results</li> <li>The test data of the worst-case conditions were recorded and shown on the next pages</li> </ol>

## 2.2.5 Limits



Class B		
Frequency [MHz]	Quasi-peak Limit [dB $\mu$ V]	Average Limit [dB $\mu$ V]
0.15 - 0.5	66 - 56 *	56 - 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency

## 2.2.6 Results

AC power line conducted emissions					
Port	Coupling	Operational mode	EUT Configuration	Verdict	Remark
POWER	AMN	1	1	PASS	-
POWER	AMN	1	2	PASS	-

2.2.7 Setup Photos

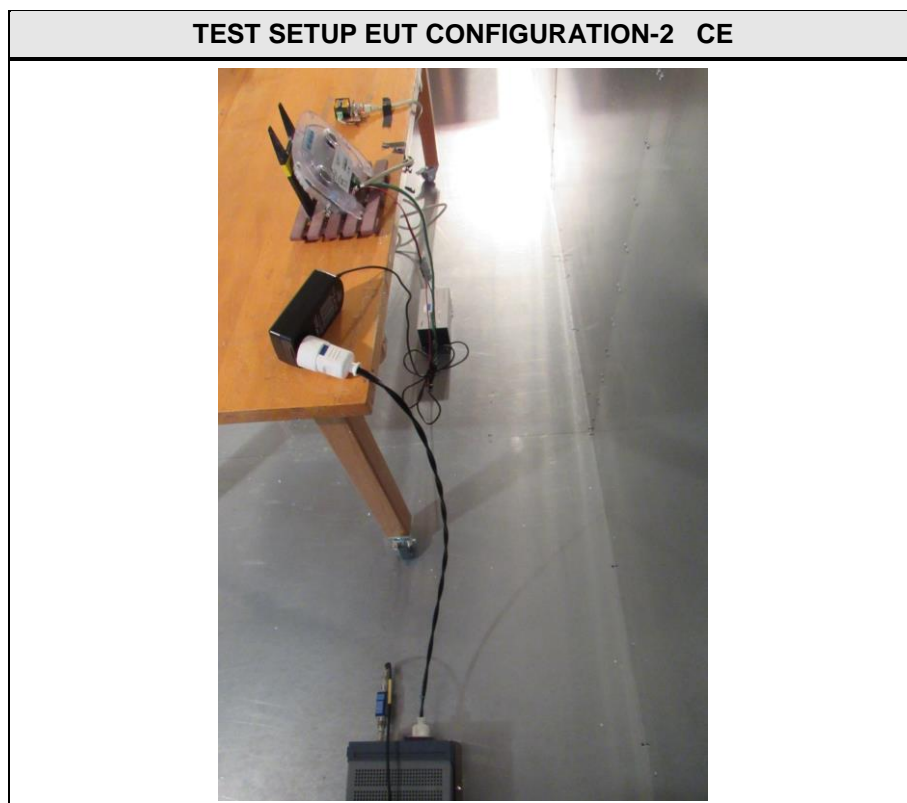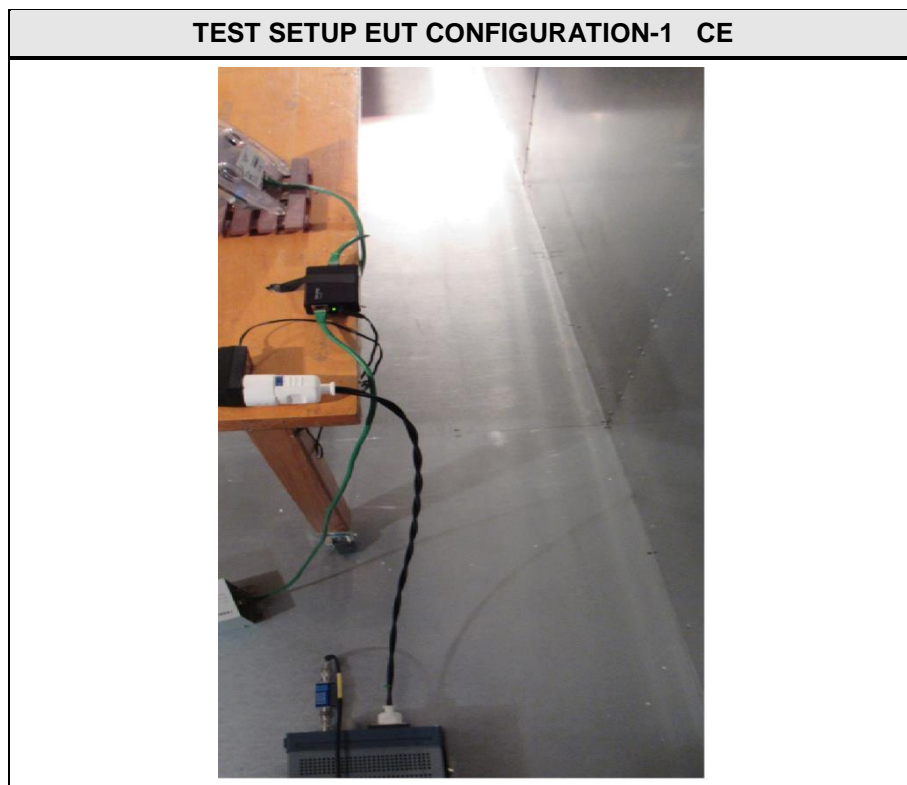


2.2.8 Records

**Conducted emissions at the mains power port according to FCC part 15B**

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 22°C  
 power input: 120 V AC (AC/DC Adapter output 24 VDC)  
 LISN: Rohde & Schwarz ESH3-Z5  
 Mode: 1  
 Applied to Port: POWER

Index 29

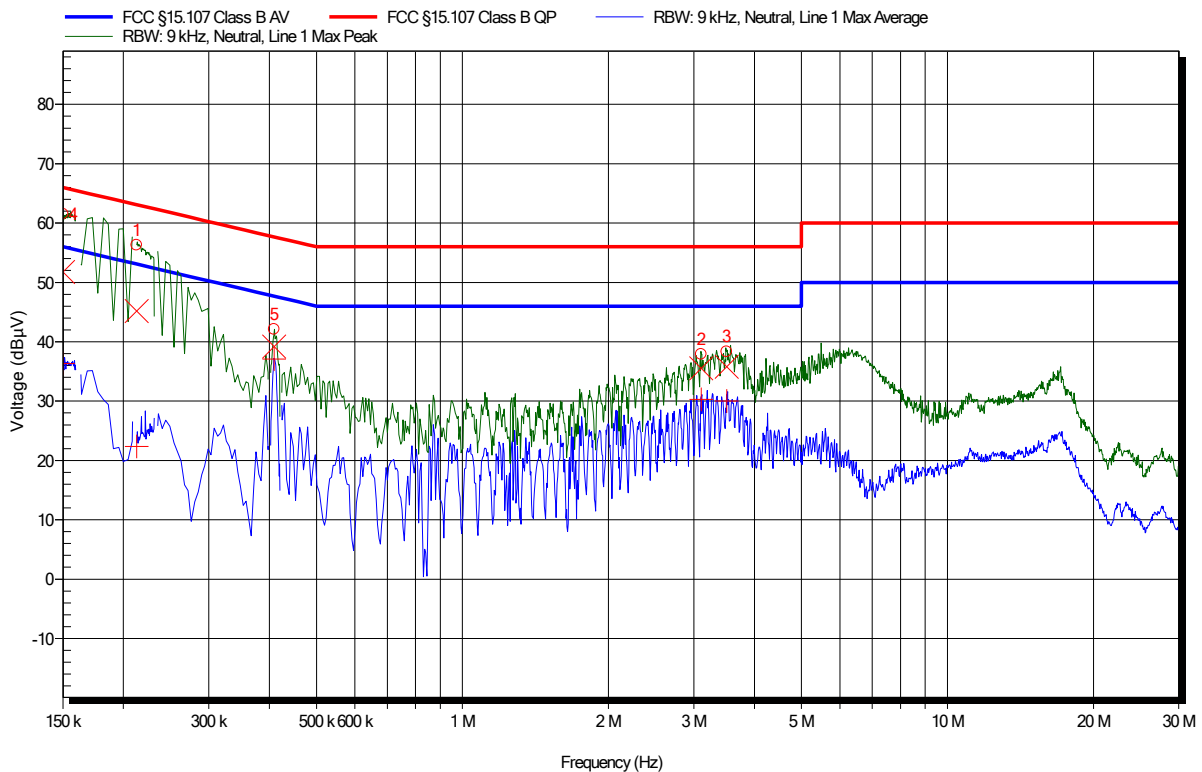

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	213 kHz	45.2 dBµV	63.09 dBµV	-17.89 dB	Pass	Neutral
2	3.107 MHz	35.55 dBµV	56 dBµV	-20.45 dB	Pass	Neutral
3	3.507 MHz	35.77 dBµV	56 dBµV	-20.23 dB	Pass	Neutral
4	150 kHz	51.73 dBµV	66 dBµV	-14.27 dB	Pass	Line 1
5	408.75 kHz	39.2 dBµV	57.67 dBµV	-18.47 dB	Pass	Line 1




Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	213 kHz	22.37 dB $\mu$ V	53.09 dB $\mu$ V	-30.72 dB	Pass	Neutral
2	3.107 MHz	30.3 dB $\mu$ V	46 dB $\mu$ V	-15.7 dB	Pass	Neutral
3	3.507 MHz	30.04 dB $\mu$ V	46 dB $\mu$ V	-15.96 dB	Pass	Neutral
4	150 kHz	36.35 dB $\mu$ V	56 dB $\mu$ V	-19.65 dB	Pass	Line 1
5	408.75 kHz	37.11 dB $\mu$ V	47.67 dB $\mu$ V	-10.57 dB	Pass	Line 1

### Conducted emissions at the mains power port according to FCC part 15B

Project Number: G0M-1910-8517  
 Applicant: Hella Aglaia Mobile Vision GmbH  
 Model Description: Advanced People Sensor; 90mm lens distance; with IO connector  
 Model: GH601  
 Test Sample ID: 27916  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Liebich  
 Test Date: 2020-02-11  
 Operating Conditions: ambient temperature: 22°C  
 power input: 120 VAC (48 V DC (PoE))  
 LISN: Rohde & Schwarz ESH3-Z5  
 Mode: 1  
 Applied to Port: POWER

Index 30

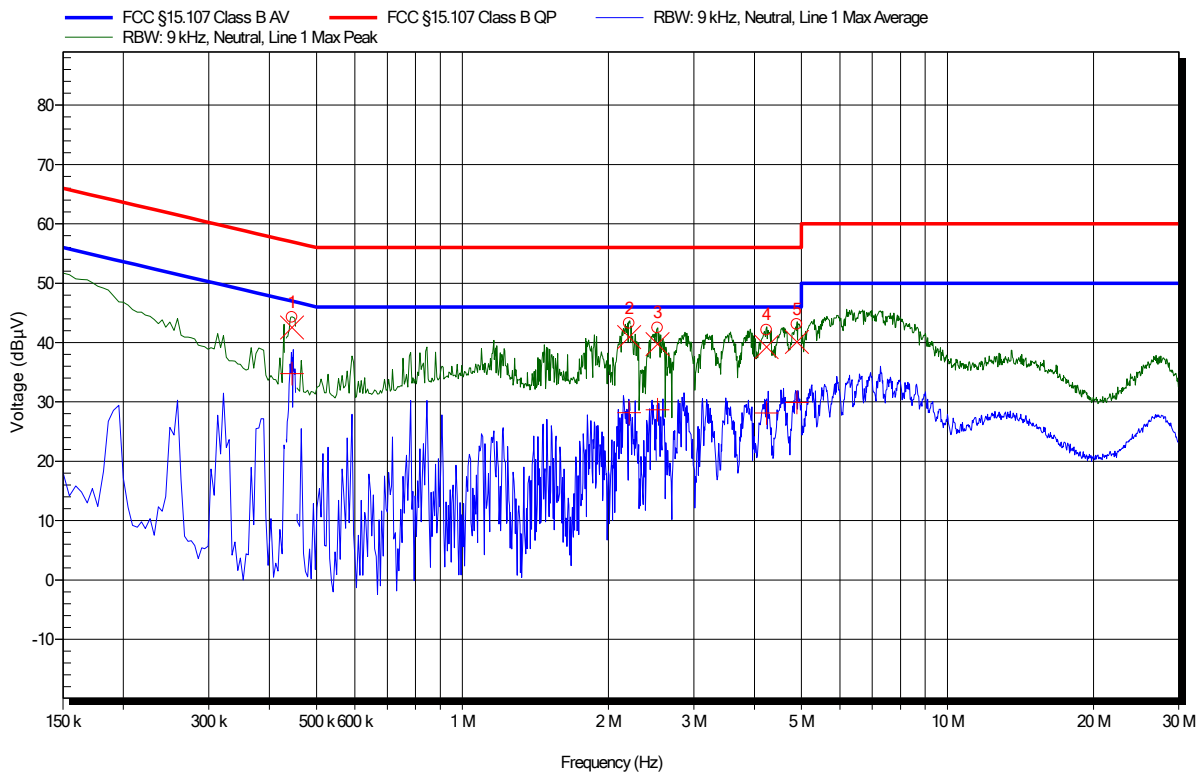

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	445.2 kHz	42.51 dBµV	56.96 dBµV	-14.45 dB	Pass	Neutral
2	2.206 MHz	40.93 dBµV	56 dBµV	-15.07 dB	Pass	Neutral
3	2.526 MHz	39.75 dBµV	56 dBµV	-16.25 dB	Pass	Neutral
4	4.236 MHz	39.27 dBµV	56 dBµV	-16.73 dB	Pass	Neutral
5	4.893 MHz	40.11 dBµV	56 dBµV	-15.89 dB	Pass	Line 1

Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	445.2 kHz	34.74 dB $\mu$ V	46.96 dB $\mu$ V	-12.22 dB	Pass	Neutral
2	2.206 MHz	28.16 dB $\mu$ V	46 dB $\mu$ V	-17.84 dB	Pass	Neutral
3	2.526 MHz	28.67 dB $\mu$ V	46 dB $\mu$ V	-17.33 dB	Pass	Neutral
4	4.236 MHz	28.11 dB $\mu$ V	46 dB $\mu$ V	-17.89 dB	Pass	Neutral
5	4.893 MHz	29.93 dB $\mu$ V	46 dB $\mu$ V	-16.07 dB	Pass	Line 1