

Project No.	SHT2211001302EW		
Test sample No.	YPHT22110013004	Model No.	Power K 4G
Start test date	2022/11/14	Finish date	2022/10/17
Temperature	22.3°C	Humidity	44%
Test Engineer	Bo Wang	Auditor	<i>Xiaodong Zhu</i>

Appendix clause	Test Item	Result
A	Conducted Power Measurement Results	PASS
B	SAR Measurement Results	PASS
C	Simultaneous Transmission analysis	PASS

Appendix A:Conducted Power Measurement Results-GSM

GSM850		Burst Average Power (dBm)			Tune-up limit (dBm)	Division Factors	Frame-Average Power (dBm)			Tune-up limit (dBm)
		CH128	CH190	CH251			CH128	CH190	CH251	
		824.2MHz	836.6MHz	848.8MHz			824.2MHz	836.6MHz	848.8MHz	
GSM		31.90	31.81	31.54	32.00	-9.03	22.87	22.78	22.51	22.97
GPRS (GMSK)	1Tx slot	31.23	31.44	31.30	31.50	-9.03	22.20	22.41	22.27	22.47
	2Tx slots	29.40	30.18	30.41	30.50	-6.02	23.38	24.16	24.39	24.48
	3Tx slots	27.15	28.24	28.77	29.00	-4.26	22.89	23.98	24.51	24.74
	4Tx slots	24.44	25.57	26.21	26.50	-3.01	21.43	22.56	23.20	23.49

GSM1900		Burst Average Power (dBm)			Tune-up limit (dBm)	Division Factors	Frame-Average Power (dBm)			Tune-up limit (dBm)
		CH512	CH661	CH810			CH512	CH661	CH810	
		1850.2MHz	1880MHz	1909.8MHz			1850.2MHz	1880.0MHz	1909.8MHz	
GSM		28.15	28.71	29.30	29.50	-9.03	19.12	19.68	20.27	20.47
GPRS (GMSK)	1Tx slot	28.25	28.68	29.24	29.50	-9.03	19.22	19.65	20.21	20.47
	2Tx slots	26.54	27.00	27.77	28.00	-6.02	20.52	20.98	21.75	21.98
	3Tx slots	25.02	25.37	25.97	26.00	-4.26	20.76	21.11	21.71	21.74
	4Tx slots	22.98	23.38	23.89	24.00	-3.01	19.97	20.37	20.88	20.99

Appendix A:Conducted Power Measurement Results-WCDMA

WCDMA Band II		Conducted Power (dBm)			Tune-up limit (dBm)
		CH9262	CH9400	CH9538	
		1852.4MHz	1880MHz	1907.6MHz	
AMR 12.2K		20.15	20.77	21.52	22.00
RMC 12.2K		20.18	20.80	21.55	22.00
HSDPA	Subtest-1	19.73	21.08	21.32	21.50
	Subtest-2	19.62	20.89	21.19	21.50
	Subtest-3	18.67	19.82	20.31	20.50
	Subtest-4	18.40	19.53	19.98	20.00
HSUPA	Subtest-1	16.62	17.95	18.55	19.00
	Subtest-2	17.01	18.28	18.93	19.00
	Subtest-3	16.80	18.08	18.72	19.00
	Subtest-4	17.01	18.28	18.97	19.00
	Subtest-5	19.01	20.12	20.80	21.00

WCDMA Band V		Conducted Power (dBm)			Tune-up limit (dBm)
		CH4132	CH4183	CH4233	
		826.4MHz	836.6MHz	846.6MHz	
AMR 12.2K		21.45	21.64	21.46	22.00
RMC 12.2K		21.48	21.67	21.49	22.00
HSDPA	Subtest-1	22.00	22.04	21.75	22.50
	Subtest-2	21.07	19.78	20.86	21.50
	Subtest-3	20.20	20.43	20.03	20.50
	Subtest-4	19.78	20.04	19.45	20.50
HSUPA	Subtest-1	18.53	19.01	18.50	19.50
	Subtest-2	18.64	19.15	18.57	19.50
	Subtest-3	18.33	6.78	18.31	18.50
	Subtest-4	18.15	18.65	18.21	19.00
	Subtest-5	21.70	22.27	21.51	22.50

LTE-FDD Band 2				Conducted Power (dBm)			Tune-up Limit(dBm)	
Band-width (MHz)	Modulation	RB allocation	RB offset	Low	Middle	High		
1.4	QPSK	1	0	21.55	22.14	21.86	22.50	
			2	21.59	22.25	21.73		
			5	21.57	22.20	21.64		
		3	0	21.73	22.31	21.66	22.50	
			1	21.65	22.30	21.72		
			3	21.58	22.40	21.77		
	6	0	21.46	21.30	21.48	21.50		
	16QAM	1	0	21.43	21.26	21.22	22.00	
			2	21.51	21.22	21.32		
			5	21.51	21.22	21.26		
		3	0	21.37	21.30	21.56	22.00	
			1	21.36	21.31	21.59		
			3	21.45	21.36	21.63		
	6	0	21.21	21.44	21.61	22.00		
	3	QPSK	1	0	21.72	22.11	22.26	22.50
				8	21.69	22.26	22.30	
				14	21.71	22.34	22.35	
			8	0	21.68	21.32	22.06	22.50
4				21.71	21.25	22.12		
7				21.60	21.32	22.15		
15		0	21.66	21.32	22.03	22.50		
16QAM		1	0	21.37	21.54	21.91	22.50	
			8	21.34	21.64	21.99		
			14	21.38	21.66	22.02		
		8	0	21.93	21.46	21.67	22.00	
			4	21.87	21.42	21.67		
			7	21.99	21.42	21.66		
15		0	21.72	21.34	21.53	22.00		
5		QPSK	1	0	21.71	22.47	22.23	23.00
				12	21.73	22.53	22.32	
				24	21.76	22.68	22.40	
			12	0	21.64	21.32	22.17	22.50
	6			21.68	21.34	22.24		
	13			21.75	21.56	22.21		
	25	0	21.64	21.50	22.11	22.50		
	16QAM	1	0	21.55	21.43	21.81	22.00	
			12	21.68	21.50	21.80		
			24	21.71	21.61	21.88		
		12	0	21.72	21.45	21.38	22.00	
			6	21.74	21.42	21.38		
			13	21.73	21.54	21.50		
	25	0	21.70	21.61	21.50	22.00		
	10	QPSK	1	0	22.19	22.56	22.66	23.00
				24	22.39	22.71	22.66	
				49	22.33	22.59	22.08	
			25	0	21.33	21.57	21.26	22.00
12				21.35	21.57	21.29		
25				21.40	21.67	21.24		
50		0	21.37	21.57	21.26	22.00		
16QAM		1	0	21.38	21.44	21.85	22.00	
			24	21.55	21.62	21.73		
			49	21.54	21.53	21.31		
		25	0	20.36	20.65	20.34	21.00	
			12	20.41	20.61	20.33		
			25	20.46	20.76	20.30		
50		0	20.42	20.61	20.26	21.00		

15	QPSK	1	0	21.56	22.08	22.03	23.00
			38	21.62	22.31	22.14	
			74	21.79	22.53	22.44	
		38	0	21.54	21.37	21.88	22.50
			18	21.52	21.62	22.08	
			37	21.76	21.89	22.22	
	75	0	21.73	21.28	22.19	22.50	
	16QAM	1	0	21.45	21.38	21.75	22.50
			38	21.47	21.66	22.06	
			74	21.67	21.87	22.21	
		38	0	21.52	21.36	21.82	22.50
			18	21.58	21.63	22.04	
37			21.76	21.87	22.24		
75	0	21.79	21.61	21.41	22.00		
20	QPSK	1	0	21.78	21.87	21.90	23.00
			49	21.92	22.20	22.17	
			99	22.20	22.64	22.46	
		50	0	21.79	21.64	21.84	22.50
			25	21.67	21.77	22.00	
			50	21.95	21.58	22.24	
	100	0	21.77	21.30	22.08	22.50	
	16QAM	1	0	21.08	21.06	21.58	22.00
			49	21.22	21.10	21.90	
			99	21.40	21.48	21.84	
		50	0	21.21	21.30	21.02	21.50
			25	21.17	21.32	21.05	
			50	21.04	21.44	21.30	
	100	0	21.23	21.36	21.16	21.50	

LTE-FDD Band 4				Conducted Power (dBm)			Tune-up Limit(dBm)	
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High		
1.4	QPSK	1	0	21.33	21.82	21.99	22.00	
			2	21.36	21.72	21.93		
			5	21.31	21.84	21.91		
		3	0	21.70	21.97	22.04	22.50	
			1	21.70	21.97	22.05		
			3	21.35	21.99	22.04		
	6	0	20.82	20.91	21.10	21.50		
	16QAM	1	0	21.23	20.83	21.45	22.00	
			2	21.31	20.92	21.45		
			5	21.61	20.86	21.38		
		3	0	20.28	20.79	20.98	21.00	
			1	20.15	20.78	20.95		
			3	20.33	20.82	20.89		
	6	0	20.23	20.36	20.47	20.50		
	3	QPSK	1	0	21.33	21.86	21.97	22.50
				8	21.48	21.88	22.07	
				14	21.47	21.96	21.96	
			8	0	20.36	20.93	21.07	21.50
4				20.40	20.86	21.07		
7				20.54	20.98	21.14		
15		0	20.46	20.90	21.00	21.50		
16QAM		1	0	20.91	21.42	20.84	22.00	
			8	20.88	21.47	20.80		
			14	20.96	21.52	20.82		
		8	0	20.59	20.17	20.22	21.00	
			4	20.70	20.19	20.22		
			7	20.76	20.20	20.19		
15		0	20.45	20.64	20.78	21.00		
5		QPSK	1	0	21.50	22.11	22.13	22.50
				12	21.65	22.02	22.18	
				24	21.62	22.10	22.10	
			12	0	20.51	20.88	21.13	21.50
	6			20.52	20.90	21.06		
	13			20.49	20.91	21.17		
	25	0	20.54	20.94	20.99	21.00		
	16QAM	1	0	20.44	21.00	20.50	21.50	
			12	20.46	20.95	20.60		
			24	20.56	21.01	20.64		
		12	0	20.54	20.84	21.25	21.50	
			6	20.64	20.92	21.23		
			13	20.56	20.86	21.15		
	25	0	20.43	20.59	20.65	21.00		
	10	QPSK	1	0	21.19	21.46	21.62	22.00
				24	21.36	21.49	21.56	
				49	21.26	21.32	21.49	
			25	0	20.41	20.50	20.57	21.00
12				20.42	20.44	20.57		
25				20.36	20.40	20.47		
50		0	20.36	20.40	20.50	21.00		
16QAM		1	0	20.39	20.59	20.33	21.00	
			24	20.54	20.69	20.44		
			49	20.48	20.53	20.40		
		25	0	20.42	20.50	20.71	21.00	
			12	20.46	20.55	20.57		
			25	20.34	20.44	20.55		
50		0	20.37	20.46	20.58	21.00		

15	QPSK	1	0	21.53	21.82	21.88	22.00
			38	21.76	21.86	21.98	
			74	21.80	21.95	21.63	
		38	0	20.32	20.75	20.84	21.00
			18	20.53	20.80	20.79	
			37	20.73	20.80	20.94	
	75	0	20.69	20.73	20.85	21.00	
	16QAM	1	0	20.32	20.77	20.87	21.00
			38	20.52	20.81	20.78	
			74	20.71	20.77	20.96	
		38	0	20.30	20.70	20.84	21.00
			18	20.50	20.80	20.78	
37			20.72	20.82	20.95		
75	0	20.73	20.93	21.08	21.50		
20	QPSK	1	0	21.56	21.56	22.29	22.50
			49	21.77	21.68	22.30	
			99	21.88	21.81	22.47	
		50	0	20.44	20.98	21.04	21.50
			25	20.60	20.83	20.81	
			50	20.88	20.84	20.93	
	100	0	20.59	20.93	21.05	21.50	
	16QAM	1	0	20.83	20.82	20.49	21.50
			49	21.07	21.05	21.11	
			99	21.08	21.11	21.14	
		50	0	20.68	21.02	21.05	22.00
			25	20.67	21.08	21.04	
			50	20.89	21.19	21.50	
	100	0	20.78	21.03	21.10	21.50	

LTE-FDD Band 5				Conducted Power (dBm)			Tune-up Limit(dBm)	
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High		
1.4	QPSK	1	0	23.41	23.59	23.05	24.00	
			2	23.65	23.60	23.13		
			5	23.57	23.48	23.22		
		3	0	23.79	23.60	23.16	24.00	
			1	23.78	23.55	23.19		
			3	23.76	23.70	23.18		
	6	0	23.73	23.61	23.13	24.00		
	16QAM	1	0	23.24	22.76	22.81	23.50	
			2	23.19	22.87	22.91		
			5	23.14	23.02	22.88		
		3	0	22.51	22.34	21.88	23.00	
			1	22.49	22.42	21.89		
			3	22.53	22.46	21.87		
	6	0	22.21	22.62	22.32	23.00		
	3	QPSK	1	0	23.28	23.33	22.96	23.50
				8	23.22	23.49	23.05	
				14	23.29	23.43	23.09	
			8	0	22.32	22.47	22.17	22.50
4				22.36	22.35	22.12		
7				22.40	22.45	22.10		
15		0	22.50	22.55	22.07	23.00		
16QAM		1	0	22.37	22.28	22.99	23.50	
			8	22.40	22.28	23.02		
			14	22.30	22.33	22.94		
		8	0	23.51	23.52	23.24	24.00	
			4	23.54	23.53	23.17		
			7	23.49	23.69	23.21		
15		0	23.32	23.30	22.97	23.50		
5		QPSK	1	0	23.14	23.36	23.01	24.00
	12			23.21	23.51	23.05		
	24			23.22	23.60	23.15		
	12		0	23.16	23.17	23.13	23.50	
			6	23.19	23.30	23.05		
			13	23.11	23.38	23.11		
	25	0	23.09	23.30	22.98	23.50		
	16QAM	1	0	23.04	23.18	22.48	23.50	
			12	23.02	23.34	22.49		
			24	23.17	23.37	22.37		
		12	0	22.12	22.32	22.12	22.50	
			6	22.11	22.31	22.12		
			13	22.07	22.46	22.08		
	25	0	22.07	22.36	22.15	22.50		
	10	QPSK	1	0	22.87	22.79	22.65	23.50
24				23.08	22.86	22.54		
49				22.44	22.69	22.25		
25			0	19.87	19.71	19.47	20.50	
			12	20.03	19.80	19.56		
			25	19.99	19.78	19.61		
50		0	21.96	21.79	21.64	22.00		
16QAM		1	0	22.16	22.01	21.63	23.00	
			24	22.52	22.08	21.65		
			49	22.04	21.89	21.54		
		25	0	21.84	21.78	21.51	22.00	
			12	21.04	21.83	21.62		
			25	21.08	21.87	21.61		
50		0	21.65	21.86	21.54	22.00		

LTE-FDD Band 7				Conducted Power (dBm)			Tune-up Limit(dBm)	
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High		
5	QPSK	1	0	22.63	22.65	22.42	23.00	
			12	22.60	22.73	22.29		
			24	22.57	22.61	22.35		
		12	0	21.52	21.44	21.32	22.00	
			6	21.47	21.46	21.32		
			13	21.63	21.42	21.26		
	25	0	21.55	21.58	21.23	22.00		
	16QAM	1	0	21.49	21.47	20.77	22.00	
			12	21.44	21.52	20.70		
			24	21.56	21.36	20.71		
		12	0	20.62	20.52	20.29	21.00	
			6	20.61	20.52	20.24		
			13	20.56	20.60	20.29		
		25	0	20.39	20.71	20.37	21.00	
		10	QPSK	1	0	22.68	22.85	22.55
24					22.86	22.52	22.64	
49	22.74				22.38	22.56		
25	0			21.72	21.43	21.65	22.00	
	12			21.73	21.41	21.61		
	25			21.90	21.51	21.64		
50	0		21.85	21.48	21.65	22.00		
16QAM	1		0	21.84	21.76	21.48	22.50	
			24	21.98	21.65	21.63		
			49	22.01	21.49	21.43		
	25		0	20.74	20.49	20.68	21.00	
			12	20.66	20.47	20.71		
			25	20.94	20.60	20.75		
	50		0	20.86	20.56	20.71	21.00	
	15		QPSK	1	0	21.80	22.09	21.72
		38			21.80	22.08	21.71	
74		21.78			22.09	21.81		
38		0		21.23	20.93	20.53	21.50	
		18		21.26	20.99	20.53		
		37		21.25	20.87	20.56		
75		0	20.95	21.04	20.89	21.50		
16QAM		1	0	21.23	20.97	20.57	21.50	
			38	21.22	20.96	20.58		
			74	21.27	20.86	20.53		
		38	0	21.17	20.92	20.54	21.50	
			18	21.29	20.98	20.57		
			37	21.26	20.91	20.49		
		75	0	20.02	20.11	19.96	20.50	
		20	QPSK	1	0	22.30	21.92	21.95
	49				22.25	22.05	21.90	
99	22.28				21.94	22.05		
50	0			20.95	20.85	20.84	21.00	
	25			20.97	20.96	20.88		
	50			20.96	20.58	20.86		
100	0		21.05	20.97	20.93	21.50		
16QAM	1		0	21.51	21.29	21.40	22.00	
			49	21.48	21.31	21.22		
			99	21.44	21.21	21.39		
	50		0	20.18	20.20	19.88	20.50	
			25	20.18	20.18	19.94		
			50	20.03	20.25	19.97		
	100		0	20.11	20.00	19.98	20.50	

LTE-FDD Band 17				Conducted Power (dBm)			Tune-up Limit(dBm)	
Band-width(MHz)	Modulation	RB allocation	RB offset	Low	Middle	High		
5	QPSK	1	0	23.92	24.09	24.07	24.50	
			12	23.92	24.13	24.12		
			24	24.02	24.13	24.01		
		12	0	22.96	23.16	23.20	24.00	
			6	22.97	23.06	23.36		
			13	23.05	23.02	23.63		
		25	0	22.99	23.03	22.68	23.50	
		16QAM	1	0	23.12	22.41	22.94	23.50
				12	23.18	22.43	22.98	
	24			23.25	22.53	22.64		
	12		0	22.54	22.01	21.99	23.00	
			6	22.54	22.03	22.33		
			13	22.62	22.13	22.63		
	25	0	22.59	22.10	22.69	23.00		
	10	QPSK	1	0	23.11	22.97	23.23	23.50
24				23.09	22.84	22.96		
49				22.75	22.83	22.80		
25			0	21.97	21.88	21.91	22.50	
			12	22.29	21.85	22.04		
			25	22.21	21.80	22.04		
50			0	21.83	21.84	22.09	22.50	
16QAM			1	0	21.96	21.99	21.71	22.50
				24	22.21	22.11	21.84	
		49		21.96	21.93	21.71		
		25	0	21.23	20.89	20.95	21.50	
			12	21.28	20.95	20.99		
			25	20.99	20.88	21.05		
		50	0	20.82	20.92	21.05	21.50	

Appendix A:Conducted Power Measurement Results-Bluetooth

Bluetooth					
Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Average Power (dBm)	Tune-up limit (dBm)
EDR	GFSK	0	2402	9.52	9.50
		39	2441	9.46	9.44
		78	2480	8.03	7.59
	$\pi/4$ QPSK	0	2402	9.96	9.14
		39	2441	9.67	9.50
		78	2480	8.66	7.76
	8DPSK	0	2402	9.99	9.14
		39	2441	9.81	8.93
		78	2480	8.57	7.51

Appendix B:SAR Measurement Results-Head

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Left Touch	128	824.2	27.15	29.00	1.531	-	-	-	-
		190	836.6	28.24	29.00	1.191	-	-	-	-
		251	848.8	28.77	29.00	1.054	-0.08	0.376	0.396	-
	Left Tilt	128	824.2	27.15	29.00	1.531	-	-	-	-
		190	836.6	28.24	29.00	1.191	-	-	-	-
		251	848.8	28.77	29.00	1.054	-0.02	0.326	0.344	-
	Right Touch	128	824.2	27.15	29.00	1.531	-	-	-	-
		190	836.6	28.24	29.00	1.191	-	-	-	-
		251	848.8	28.77	29.00	1.054	-0.05	0.403	0.425	1
	Right Tilt	128	824.2	27.15	29.00	1.531	-	-	-	-
		190	836.6	28.24	29.00	1.191	-	-	-	-
		251	848.8	28.77	29.00	1.054	-0.07	0.355	0.374	-

GSM1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 2Tx slots	Left Touch	512	1850.2	26.54	28.00	1.400	-	-	-	-
		661	1880.0	27.00	28.00	1.259	-	-	-	-
		810	1909.8	27.77	28.00	1.054	-0.03	0.142	0.150	-
	Left Tilt	512	1850.2	26.54	28.00	1.400	-	-	-	-
		661	1880.0	27.00	28.00	1.259	-	-	-	-
		810	1909.8	27.77	28.00	1.054	-0.09	0.097	0.102	-
	Right Touch	512	1850.2	26.54	28.00	1.400	-	-	-	-
		661	1880.0	27.00	28.00	1.259	-	-	-	-
		810	1909.8	27.77	28.00	1.054	-0.05	0.147	0.155	2
	Right Tilt	512	1850.2	26.54	28.00	1.400	-	-	-	-
		661	1880.0	27.00	28.00	1.259	-	-	-	-
		810	1909.8	27.77	28.00	1.054	-0.02	0.106	0.112	-

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Left Touch	9262	1852.4	20.18	22.00	1.521	-	-	-	-
		9400	1880.0	20.80	22.00	1.318	-	-	-	-
		9538	1907.6	21.55	22.00	1.109	-0.08	0.256	0.284	-
	Left Tilt	9262	1852.4	20.18	22.00	1.521	-	-	-	-
		9400	1880.0	20.80	22.00	1.318	-	-	-	-
		9538	1907.6	21.55	22.00	1.109	-0.04	0.120	0.133	-
	Right Touch	9262	1852.4	20.18	22.00	1.521	-	-	-	-
		9400	1880.0	20.80	22.00	1.318	-	-	-	-
		9538	1907.6	21.55	22.00	1.109	-0.10	0.292	0.324	3
	Right Tilt	9262	1852.4	20.18	22.00	1.521	-	-	-	-
		9400	1880.0	20.80	22.00	1.318	-	-	-	-
		9538	1907.6	21.55	22.00	1.109	-0.03	0.126	0.140	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Left Touch	4132	826.4	21.48	22.00	1.127	-	-	-	-
		4183	836.6	21.67	22.00	1.079	0.04	0.432	0.466	-
		4233	846.6	21.49	22.00	1.125	-	-	-	-
	Left Tilt	4132	826.4	21.48	22.00	1.127	-	-	-	-
		4183	836.6	21.67	22.00	1.079	0.10	0.387	0.418	-
		4233	846.6	21.49	22.00	1.125	-	-	-	-
	Right Touch	4132	826.4	21.48	22.00	1.127	-	-	-	-
		4183	836.6	21.67	22.00	1.079	-0.02	0.495	0.534	4
		4233	846.6	21.49	22.00	1.125	-	-	-	-
	Right Tilt	4132	826.4	21.48	22.00	1.127	-	-	-	-
		4183	836.6	21.67	22.00	1.079	-0.11	0.451	0.487	-
		4233	846.6	21.49	22.00	1.125	-	-	-	-

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Left Touch	18700	1860.0	22.20	23.00	1.202	-	-	-	-
		18900	1880.0	22.64	23.00	1.086	-0.06	0.342	0.372	-
		19100	1900.0	22.46	23.00	1.132	-	-	-	-
	Left Tilt	18700	1860.0	22.20	23.00	1.202	-	-	-	-
		18900	1880.0	22.64	23.00	1.086	0.05	0.179	0.194	-
		19100	1900.0	22.46	23.00	1.132	-	-	-	-
	Right Touch	18700	1860.0	22.20	23.00	1.202	-	-	-	-
		18900	1880.0	22.64	23.00	1.086	-0.12	0.436	0.474	5
		19100	1900.0	22.46	23.00	1.132	-	-	-	-
	Right Tilt	18700	1860.0	22.20	23.00	1.202	-	-	-	-
		18900	1880.0	22.64	23.00	1.086	-0.08	0.214	0.232	-
		19100	1900.0	22.46	23.00	1.132	-	-	-	-
20M QPSK 50RB	Left Touch	18700	1860.0	21.95	22.50	1.135	-	-	-	-
		18900	1880.0	21.58	22.50	1.236	-	-	-	-
		19100	1900.0	22.24	22.50	1.062	0.04	0.305	0.324	-
	Left Tilt	18700	1860.0	21.95	22.50	1.135	-	-	-	-
		18900	1880.0	21.58	22.50	1.236	-	-	-	-
		19100	1900.0	22.24	22.50	1.062	0.09	0.135	0.143	-
	Right Touch	18700	1860.0	21.95	22.50	1.135	-	-	-	-
		18900	1880.0	21.58	22.50	1.236	-	-	-	-
		19100	1900.0	22.24	22.50	1.062	-0.02	0.411	0.436	-
	Right Tilt	18700	1860.0	21.95	22.50	1.135	-	-	-	-
		18900	1880.0	21.58	22.50	1.236	-	-	-	-
		19100	1900.0	22.24	22.50	1.062	-0.10	0.206	0.219	-

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Left Touch	20050	1720.0	21.88	22.50	1.153	-	-	-	-
		20175	1732.5	21.81	22.50	1.172	-	-	-	-
		20300	1745.0	22.47	22.50	1.007	-0.05	0.766	0.771	-
	Left Tilt	20050	1720.0	21.88	22.50	1.153	-	-	-	-
		20175	1732.5	21.81	22.50	1.172	-	-	-	-
		20300	1745.0	22.47	22.50	1.007	0.08	0.443	0.446	-
	Right Touch	20050	1720.0	21.88	22.50	1.153	0.01	0.671	0.774	-
		20175	1732.5	21.81	22.50	1.172	-0.05	0.652	0.764	-
		20300	1745.0	22.47	22.50	1.007	0.04	0.803	0.809	6
	Right Tilt	20050	1720.0	21.88	22.50	1.153	-	-	-	-
		20175	1732.5	21.81	22.50	1.172	-	-	-	-
		20300	1745.0	22.47	22.50	1.007	-0.06	0.510	0.514	-
20M QPSK 50RB	Left Touch	20050	1720.0	20.44	21.50	1.276	-	-	-	-
		20175	1732.5	20.98	21.50	1.127	-	-	-	-
		20300	1745.0	21.04	21.50	1.112	0.03	0.682	0.758	-
	Left Tilt	20050	1720.0	20.44	21.50	1.276	-	-	-	-
		20175	1732.5	20.98	21.50	1.127	-	-	-	-
		20300	1745.0	21.04	21.50	1.112	-0.07	0.375	0.417	-
	Right Touch	20050	1720.0	20.44	21.50	1.276	0.09	0.623	0.795	-
		20175	1732.5	20.98	21.50	1.127	0.16	0.686	0.773	-
		20300	1745.0	21.04	21.50	1.112	0.10	0.721	0.802	-
	Right Tilt	20050	1720.0	20.44	21.50	1.276	-	-	-	-
		20175	1732.5	20.98	21.50	1.127	-	-	-	-
		20300	1745.0	21.04	21.50	1.112	0.11	0.417	0.464	-
20M QPSK 100RB	Left Touch	20050	1720.0	20.59	21.50	1.233	-	-	-	-
		20175	1732.5	20.93	21.50	1.140	-	-	-	-
		20300	1745.0	21.05	21.50	1.109	-0.03	0.656	0.728	-
	Left Tilt	20050	1720.0	20.59	21.50	1.233	-	-	-	-
		20175	1732.5	20.93	21.50	1.140	-	-	-	-
		20300	1745.0	21.05	21.50	1.109	0.14	0.341	0.378	-
	Right Touch	20050	1720.0	20.59	21.50	1.233	-	-	-	-
		20175	1732.5	20.93	21.50	1.140	-	-	-	-
		20300	1745.0	21.05	21.50	1.109	0.11	0.716	0.794	-
	Right Tilt	20050	1720.0	20.59	21.50	1.233	-	-	-	-
		20175	1732.5	20.93	21.50	1.140	-	-	-	-
		20300	1745.0	21.05	21.50	1.109	-0.05	0.383	0.425	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Left Touch	20450	829.0	23.08	23.50	1.102	0.06	0.685	0.755	-
		20525	836.5	22.86	23.50	1.159	-	-	-	-
		20600	844.0	22.54	23.50	1.247	-	-	-	-
	Left Tilt	20450	829.0	23.08	23.50	1.102	-0.03	0.632	0.696	-
		20525	836.5	22.86	23.50	1.159	-	-	-	-
		20600	844.0	22.54	23.50	1.247	-	-	-	-
	Right Touch	20450	829.0	23.08	23.50	1.102	0.02	0.705	0.777	7
		20525	836.5	22.86	23.50	1.159	-	-	-	-
		20600	844.0	22.54	23.50	1.247	-	-	-	-
	Right Tilt	20450	829.0	23.08	23.50	1.102	-0.01	0.677	0.746	-
		20525	836.5	22.86	23.50	1.159	-	-	-	-
		20600	844.0	22.54	23.50	1.247	-	-	-	-
10M QPSK 25RB	Left Touch	20450	829.0	20.03	20.50	1.114	0.01	0.517	0.576	-
		20525	836.5	19.80	20.50	1.175	-	-	-	-
		20600	844.0	19.56	20.50	1.242	-	-	-	-
	Left Tilt	20450	829.0	20.03	20.50	1.114	-0.07	0.482	0.537	-
		20525	836.5	19.80	20.50	1.175	-	-	-	-
		20600	844.0	19.56	20.50	1.242	-	-	-	-
	Right Touch	20450	829.0	20.03	20.50	1.114	0.04	0.546	0.608	-
		20525	836.5	19.80	20.50	1.175	-	-	-	-
		20600	844.0	19.56	20.50	1.242	-	-	-	-
	Right Tilt	20450	829.0	20.03	20.50	1.114	-0.12	0.509	0.567	-
		20525	836.5	19.80	20.50	1.175	-	-	-	-
		20600	844.0	19.56	20.50	1.242	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Left Touch	20850	2510.0	22.30	22.50	1.047	0.05	0.020	0.021	-
		21100	2535.0	21.92	22.50	1.143	-	-	-	-
		21350	2560.0	21.95	22.50	1.135	-	-	-	-
	Left Tilt	20850	2510.0	22.30	22.50	1.047	-0.07	0.007	0.007	-
		21100	2535.0	21.92	22.50	1.143	-	-	-	-
		21350	2560.0	21.95	22.50	1.135	-	-	-	-
	Right Touch	20850	2510.0	22.30	22.50	1.047	-0.13	0.023	0.024	8
		21100	2535.0	21.92	22.50	1.143	-	-	-	-
		21350	2560.0	21.95	22.50	1.135	-	-	-	-
	Right Tilt	20850	2510.0	22.30	22.50	1.047	0.10	0.011	0.012	-
		21100	2535.0	21.92	22.50	1.143	-	-	-	-
		21350	2560.0	21.95	22.50	1.135	-	-	-	-
20M QPSK 50RB	Left Touch	20850	2510.0	20.97	21.00	1.007	0.11	0.013	0.013	-
		21100	2535.0	20.96	21.00	1.009	-	-	-	-
		21350	2560.0	20.88	21.00	1.028	-	-	-	-
	Left Tilt	20850	2510.0	20.97	21.00	1.007	0.08	0.003	0.003	-
		21100	2535.0	20.96	21.00	1.009	-	-	-	-
		21350	2560.0	20.88	21.00	1.028	-	-	-	-
	Right Touch	20850	2510.0	20.97	21.00	1.007	0.05	0.016	0.016	-
		21100	2535.0	20.96	21.00	1.009	-	-	-	-
		21350	2560.0	20.88	21.00	1.028	-	-	-	-
	Right Tilt	20850	2510.0	20.97	21.00	1.007	0.03	0.005	0.005	-
		21100	2535.0	20.96	21.00	1.009	-	-	-	-
		21350	2560.0	20.88	21.00	1.028	-	-	-	-

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Left Touch	23780	709.0	23.11	23.50	1.094	-	-	-	-
		23790	710.0	22.97	23.50	1.130	-	-	-	-
		23800	711.0	23.23	23.50	1.064	-0.05	0.049	0.052	-
	Left Tilt	23780	709.0	23.11	23.50	1.094	-	-	-	-
		23790	710.0	22.97	23.50	1.130	-	-	-	-
		23800	711.0	23.23	23.50	1.064	0.02	0.040	0.043	-
	Right Touch	23780	709.0	23.11	23.50	1.094	-	-	-	-
		23790	710.0	22.97	23.50	1.130	-	-	-	-
		23800	711.0	23.23	23.50	1.064	-0.04	0.051	0.054	9
	Right Tilt	23780	709.0	23.11	23.50	1.094	-	-	-	-
		23790	710.0	22.97	23.50	1.130	-	-	-	-
		23800	711.0	23.23	23.50	1.064	0.08	0.045	0.048	-
10M QPSK 25RB	Left Touch	23780	709.0	22.29	22.50	1.050	0.07	0.037	0.039	-
		23790	710.0	21.85	22.50	1.161	-	-	-	-
		23800	711.0	22.04	22.50	1.112	-	-	-	-
	Left Tilt	23780	709.0	22.29	22.50	1.050	-0.11	0.030	0.031	-
		23790	710.0	21.85	22.50	1.161	-	-	-	-
		23800	711.0	22.04	22.50	1.112	-	-	-	-
	Right Touch	23780	709.0	22.29	22.50	1.050	0.13	0.044	0.046	-
		23790	710.0	21.85	22.50	1.161	-	-	-	-
		23800	711.0	22.04	22.50	1.112	-	-	-	-
	Right Tilt	23780	709.0	22.29	22.50	1.050	0.08	0.036	0.038	-
		23790	710.0	21.85	22.50	1.161	-	-	-	-
		23800	711.0	22.04	22.50	1.112	-	-	-	-

Bluetooth												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz							(W/kg)	(W/kg)	
GFSK	Left Touch	0	2402	9.50	9.50	1.000	77.50%	1.290	0.07	0.008	0.010	-
		39	2441	9.44	9.50	1.014	77.50%	1.290	-	-	-	-
		78	2480	7.59	8.00	1.099	77.50%	1.290	-	-	-	-
	Left Tilt	0	2402	9.50	9.50	1.000	77.50%	1.290	0.05	0.005	0.006	-
		39	2441	9.44	9.50	1.014	77.50%	1.290	-	-	-	-
		78	2480	7.59	8.00	1.099	77.50%	1.290	-	-	-	-
	Right Touch	0	2402	9.50	9.50	1.000	77.50%	1.290	-0.10	0.010	0.012	10
		39	2441	9.44	9.50	1.014	77.50%	1.290	-	-	-	-
		78	2480	7.59	8.00	1.099	77.50%	1.290	-	-	-	-
	Right Tilt	0	2402	9.50	9.50	1.000	77.50%	1.290	0.09	0.007	0.009	-
		39	2441	9.44	9.50	1.014	77.50%	1.290	-	-	-	-
		78	2480	7.59	8.00	1.099	77.50%	1.290	-	-	-	-

Appendix B:SAR Measurement Results-Body

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 3Tx slots	Front	128	824.2	27.15	29.00	1.531	-	-	-	-
		190	836.6	28.24	29.00	1.191	-	-	-	-
		251	848.8	28.77	29.00	1.054	-0.07	0.418	0.441	11
	Rear	128	824.2	27.15	29.00	1.531	-	-	-	-
		190	836.6	28.24	29.00	1.191	-	-	-	-
		251	848.8	28.77	29.00	1.054	-0.05	0.388	0.409	-

GSM1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
GPRS 2Tx slots	Front	512	1850.2	26.54	28.00	1.400	-	-	-	-
		661	1880.0	27.00	28.00	1.259	-	-	-	-
		810	1909.8	27.77	28.00	1.054	-0.06	0.174	0.183	12
	Rear	512	1850.2	26.54	28.00	1.400	-	-	-	-
		661	1880.0	27.00	28.00	1.259	-	-	-	-
		810	1909.8	27.77	28.00	1.054	-0.03	0.155	0.163	-

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	9262	1852.4	20.18	22.00	1.521	-	-	-	-
		9400	1880.0	20.80	22.00	1.318	-	-	-	-
		9538	1907.6	21.55	22.00	1.109	-0.21	0.389	0.431	13
	Rear	9262	1852.4	20.18	22.00	1.521	-	-	-	-
		9400	1880.0	20.80	22.00	1.318	-	-	-	-
		9538	1907.6	21.55	22.00	1.109	-0.08	0.340	0.377	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
RMC 12.2Kbps	Front	4132	826.4	21.48	22.00	1.127	-	-	-	-
		4183	836.6	21.67	22.00	1.079	0.01	0.476	0.514	14
		4233	846.6	21.49	22.00	1.125	-	-	-	-
	Rear	4132	826.4	21.48	22.00	1.127	-	-	-	-
		4183	836.6	21.67	22.00	1.079	0.09	0.369	0.398	-
		4233	846.6	21.49	22.00	1.125	-	-	-	-

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	18700	1860.0	22.20	23.00	1.202	-	-	-	-
		18900	1880.0	22.64	23.00	1.086	-0.03	0.525	0.570	15
		19100	1900.0	22.46	23.00	1.132	-	-	-	-
	Rear	18700	1860.0	22.20	23.00	1.202	-	-	-	-
		18900	1880.0	22.64	23.00	1.086	-0.05	0.487	0.529	-
		19100	1900.0	22.46	23.00	1.132	-	-	-	-
20M QPSK 50RB	Front	18700	1860.0	21.95	22.50	1.135	-	-	-	-
		18900	1880.0	21.58	22.50	1.236	-	-	-	-
		19100	1900.0	22.24	22.50	1.062	-0.08	0.502	0.533	-
	Rear	18700	1860.0	21.95	22.50	1.135	-	-	-	-
		18900	1880.0	21.58	22.50	1.236	-	-	-	-
		19100	1900.0	22.24	22.50	1.062	-0.09	0.455	0.483	-

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20050	1720.0	21.88	22.50	1.153	-0.06	0.796	0.918	-
		20175	1732.5	21.81	22.50	1.172	0.05	0.762	0.893	-
		20300	1745.0	22.47	22.50	1.007	-0.05	0.918	0.924	16
	Rear	20050	1720.0	21.88	22.50	1.153	-0.13	0.734	0.847	-
		20175	1732.5	21.81	22.50	1.172	0.08	0.706	0.828	-
		20300	1745.0	22.47	22.50	1.007	-0.07	0.854	0.860	-
20M QPSK 50RB	Front	20050	1720.0	20.44	21.50	1.276	-0.10	0.709	0.905	-
		20175	1732.5	20.98	21.50	1.127	0.11	0.783	0.883	-
		20300	1745.0	21.04	21.50	1.112	0.05	0.826	0.918	-
	Rear	20050	1720.0	20.44	21.50	1.276	-0.09	0.653	0.834	-
		20175	1732.5	20.98	21.50	1.127	0.05	0.717	0.808	-
		20300	1745.0	21.04	21.50	1.112	-0.09	0.763	0.848	-
20M QPSK 100RB	Front	20050	1720.0	20.59	21.50	1.233	0.14	0.710	0.876	-
		20175	1732.5	20.93	21.50	1.140	-0.03	0.775	0.884	-
		20300	1745.0	21.05	21.50	1.109	0.01	0.824	0.914	-
	Rear	20050	1720.0	20.59	21.50	1.233	0.03	0.622	0.767	-
		20175	1732.5	20.93	21.50	1.140	-0.08	0.693	0.790	-
		20300	1745.0	21.05	21.50	1.109	0.05	0.760	0.843	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
10M QPSK 1RB	Front	20450	829.0	23.08	23.50	1.102	-0.03	0.489	0.539	17
		20525	836.5	22.86	23.50	1.159	-	-	-	-
		20600	844.0	22.54	23.50	1.247	-	-	-	-
	Rear	20450	829.0	23.08	23.50	1.102	0.04	0.428	0.471	-
		20525	836.5	22.86	23.50	1.159	-	-	-	-
		20600	844.0	22.54	23.50	1.247	-	-	-	-
10M QPSK 25RB	Front	20450	829.0	20.03	20.50	1.114	-0.08	0.326	0.363	-
		20525	836.5	19.80	20.50	1.175	-	-	-	-
		20600	844.0	19.56	20.50	1.242	-	-	-	-
	Rear	20450	829.0	20.03	20.50	1.114	-0.02	0.293	0.326	-
		20525	836.5	19.80	20.50	1.175	-	-	-	-
		20600	844.0	19.56	20.50	1.242	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g)	Report SAR(1g)	Plot No.
		CH	MHz					(W/kg)	(W/kg)	
20M QPSK 1RB	Front	20850	2510.0	22.30	22.50	1.047	-0.07	0.029	0.030	18
		21100	2535.0	21.92	22.50	1.143	-	-	-	-
		21350	2560.0	21.95	22.50	1.135	-	-	-	-
	Rear	20850	2510.0	22.30	22.50	1.047	0.08	0.020	0.021	-
		21100	2535.0	21.92	22.50	1.143	-	-	-	-
		21350	2560.0	21.95	22.50	1.135	-	-	-	-
20M QPSK 50RB	Front	20850	2510.0	20.97	21.00	1.007	0.03	0.020	0.020	-
		21100	2535.0	20.96	21.00	1.009	-	-	-	-
		21350	2560.0	20.88	21.00	1.028	-	-	-	-
	Rear	20850	2510.0	20.97	21.00	1.007	-0.07	0.011	0.011	-
		21100	2535.0	20.96	21.00	1.009	-	-	-	-
		21350	2560.0	20.88	21.00	1.028	-	-	-	-

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz							
10M QPSK 1RB	Front	23780	709.0	23.11	23.50	1.094	-	-	-	-
		23790	710.0	22.97	23.50	1.130	-	-	-	-
		23800	711.0	23.23	23.50	1.064	-0.13	0.051	0.055	19
	Rear	23780	709.0	23.11	23.50	1.094	-	-	-	-
		23790	710.0	22.97	23.50	1.130	-	-	-	-
		23800	711.0	23.23	23.50	1.064	0.02	0.044	0.047	-
10M QPSK 25RB	Front	23780	709.0	22.29	22.50	1.050	-0.04	0.037	0.039	-
		23790	710.0	21.85	22.50	1.161	-	-	-	-
		23800	711.0	22.04	22.50	1.112	-	-	-	-
	Rear	23780	709.0	22.29	22.50	1.050	0.09	0.031	0.033	-
		23790	710.0	21.85	22.50	1.161	-	-	-	-
		23800	711.0	22.04	22.50	1.112	-	-	-	-

Bluetooth												
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune-up limit (dBm)	Tune-up scaling factor	Duty Cycle	Duty Cycle Scaling Factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Plot No.
		CH	MHz									
GFSK	Front	0	2402.0	9.50	9.50	1.000	0.78	1.290	-0.11	0.004	0.005	20
		39	2441.0	9.44	9.50	1.014	0.78	1.290	-	-	-	-
		78	2480.0	7.59	8.00	1.099	0.78	1.290	-	-	-	-
	Rear	0	2402.0	9.50	9.50	1.000	0.78	1.290	0.03	0.003	0.003	-
		39	2441.0	9.44	9.50	1.014	0.78	1.290	-	-	-	-
		78	2480.0	7.59	8.00	1.099	0.78	1.290	-	-	-	-

Appendix C: Simultaneous Transmission analysis-Head

WWAN +BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN	BT	(W/kg)
GSM	GSM850	Left Touch	0.396	0.010	0.406
		Left Tilt	0.344	0.006	0.350
		Right Touch	0.425	0.012	0.437
		Right Tilt	0.374	0.009	0.383
	GSM1900	Left Touch	0.150	0.010	0.160
		Left Tilt	0.102	0.006	0.108
		Right Touch	0.155	0.012	0.167
		Right Tilt	0.112	0.009	0.121
WCDMA	Band II	Left Touch	0.284	0.010	0.294
		Left Tilt	0.133	0.006	0.139
		Right Touch	0.324	0.012	0.336
		Right Tilt	0.140	0.009	0.149
	Band V	Left Touch	0.466	0.010	0.476
		Left Tilt	0.418	0.006	0.424
		Right Touch	0.534	0.012	0.546
		Right Tilt	0.487	0.009	0.496
	B2 1RB	Left Touch	0.372	0.010	0.382
		Left Tilt	0.194	0.006	0.200
		Right Touch	0.474	0.012	0.486
		Right Tilt	0.232	0.009	0.241
	B2 50RB	Left Touch	0.324	0.010	0.334
		Left Tilt	0.143	0.006	0.149
		Right Touch	0.436	0.012	0.448
		Right Tilt	0.219	0.009	0.228
	B4 1RB	Left Touch	0.771	0.010	0.781
		Left Tilt	0.446	0.006	0.452
		Right Touch	0.809	0.012	0.821
		Right Tilt	0.514	0.009	0.523
	B4 50RB	Left Touch	0.758	0.010	0.768
		Left Tilt	0.417	0.006	0.423
		Right Touch	0.802	0.012	0.814
		Right Tilt	0.464	0.009	0.473
	B4 100RB	Left Touch	0.728	0.010	0.738
		Left Tilt	0.378	0.006	0.384
		Right Touch	0.794	0.012	0.806
		Right Tilt	0.425	0.009	0.434

LTE	B5 1RB	Left Touch	0.755	0.010	0.765
		Left Tilt	0.696	0.006	0.702
		Right Touch	0.777	0.012	0.789
		Right Tilt	0.746	0.009	0.755
	B5 25RB	Left Touch	0.576	0.010	0.586
		Left Tilt	0.537	0.006	0.543
		Right Touch	0.608	0.012	0.620
		Right Tilt	0.567	0.009	0.576
	B7 1RB	Left Touch	0.021	0.010	0.031
		Left Tilt	0.007	0.006	0.013
		Right Touch	0.024	0.012	0.036
		Right Tilt	0.012	0.009	0.021
	B7 50RB	Left Touch	0.013	0.010	0.023
		Left Tilt	0.003	0.006	0.009
		Right Touch	0.016	0.012	0.028
		Right Tilt	0.005	0.009	0.014
	B17 1RB	Left Touch	0.052	0.010	0.062
		Left Tilt	0.043	0.006	0.049
		Right Touch	0.054	0.009	0.063
		Right Tilt	0.048	0.012	0.060
B17 25RB	Left Touch	0.039	0.010	0.049	
	Left Tilt	0.031	0.006	0.037	
	Right Touch	0.046	0.009	0.055	
	Right Tilt	0.038	0.012	0.050	

Appendix C: Simultaneous Transmission analysis-Body

WWAN + BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN	BT	(W/kg)
GSM	GSM850	Front	0.441	0.005	0.446
		Rear	0.409	0.003	0.412
	GSM1900	Front	0.183	0.005	0.188
		Rear	0.163	0.003	0.166
WCDMA	Band II	Front	0.431	0.005	0.436
		Rear	0.377	0.003	0.380
	Band V	Front	0.514	0.005	0.519
		Rear	0.398	0.003	0.401
LTE	B2 1RB	Front	0.570	0.005	0.575
		Rear	0.529	0.003	0.532
	B2 50RB	Front	0.533	0.005	0.538
		Rear	0.483	0.003	0.486
	B4 1RB	Front	0.924	0.005	0.929
		Rear	0.860	0.003	0.863
	B4 50RB	Front	0.918	0.005	0.923
		Rear	0.848	0.003	0.851
	B4 100RB	Front	0.914	0.005	0.919
		Rear	0.843	0.003	0.846
	B5 1RB	Front	0.539	0.005	0.544
		Rear	0.471	0.003	0.474
	B5 25RB	Front	0.363	0.005	0.368
		Rear	0.326	0.003	0.329
	B7 1RB	Front	0.030	0.005	0.035
		Rear	0.021	0.003	0.024
	B7 50RB	Front	0.020	0.005	0.025
		Rear	0.011	0.003	0.014
	B17 1RB	Front	0.055	0.005	0.060
		Rear	0.047	0.003	0.050
B17 25RB	Front	0.039	0.005	0.044	
	Rear	0.033	0.003	0.036	

Test Laboratory: Huatongwei International Inspection Co., Ltd.,SAR Lab

Date: 11/15/2022

GSM 850-H-Head

Communication System: UID 0, Generic GPRS(TDMA, GMSK, TN 0-1-2) (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.66993

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 41.522$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.3, 10.3, 10.3) @ 848.8 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 251/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.512 W/kg


Right Touch Cheek/CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.282 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

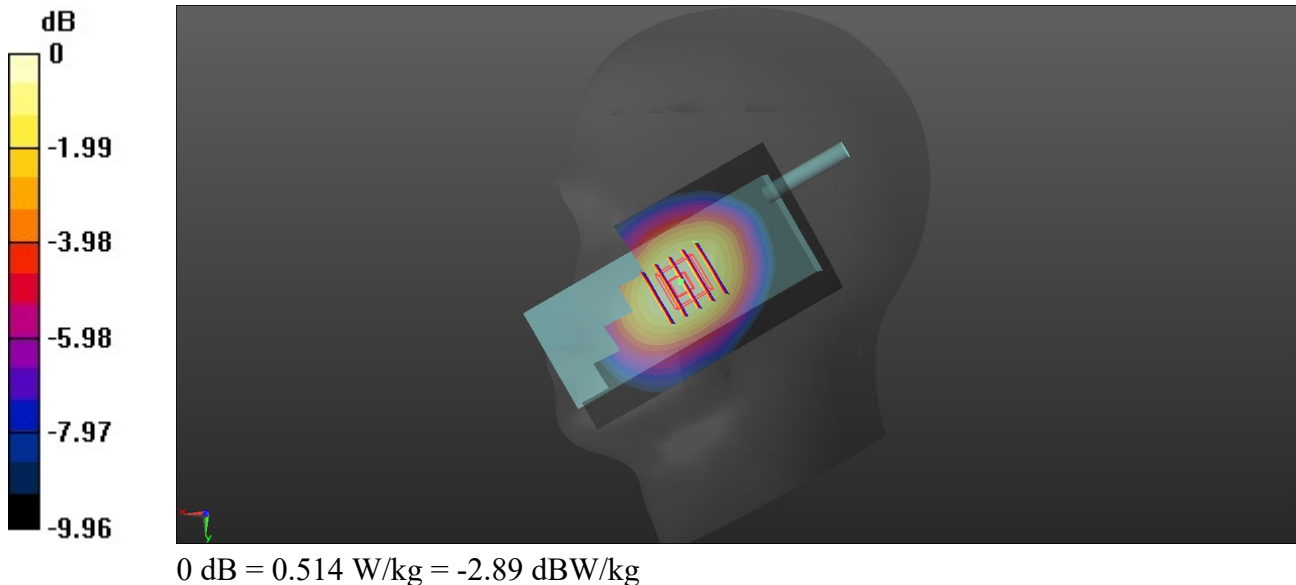

GSM 1900-H-Head

Communication System: UID 0, Generic GPRS(TDMA, GMSK, TN 0-1) (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.12$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.45, 8.45, 8.45) @ 1909.8 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 810/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.211 W/kg


Right Touch Cheek/CH 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.379 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

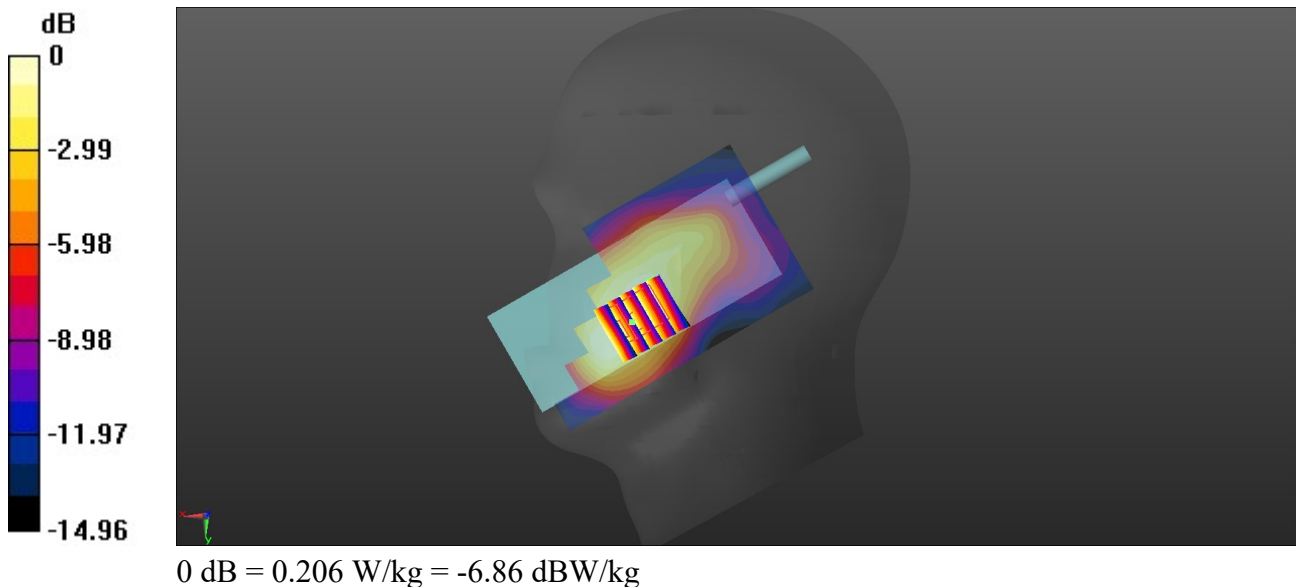

WCDMA Band II-H-Head

Communication System: UID 0, Generic UMTS (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 39.122$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.45, 8.45, 8.45) @ 1907.6 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 9538/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.412 W/kg


Right Touch Cheek/CH 9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.617 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

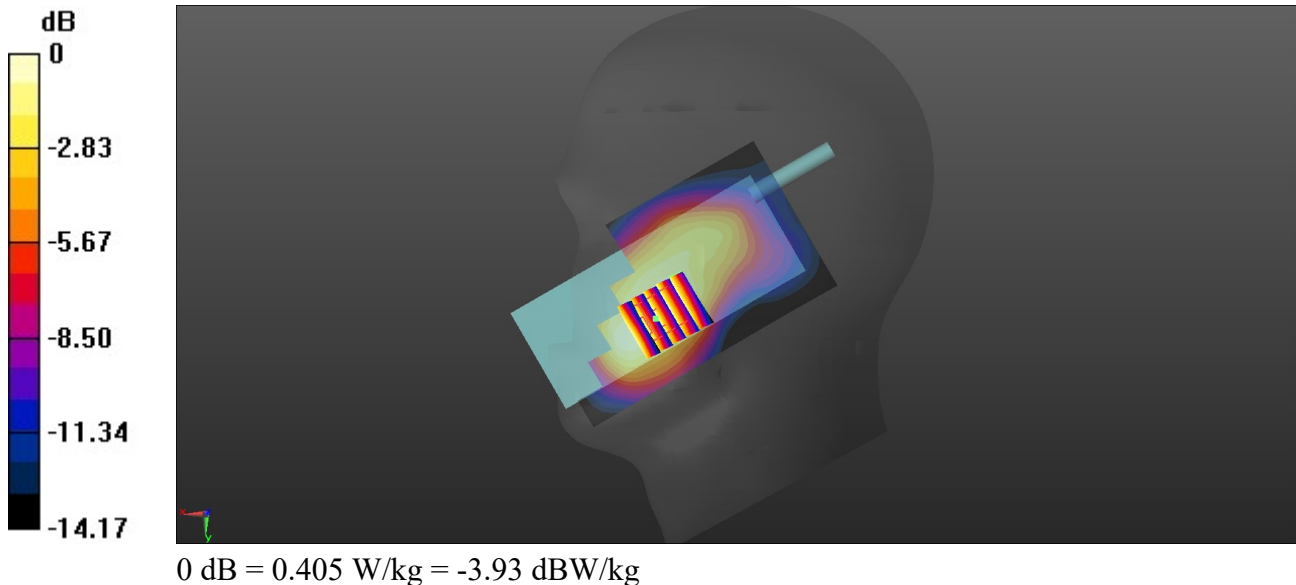

Test Laboratory: Huatongwei International Inspection Co., Ltd.,SAR Lab

Date: 11/15/2022

WCDMA Band V-M-Head

Communication System: UID 0, Generic UMTS (0); Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 41.569$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.3, 10.3, 10.3) @ 836.6 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 4183/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.630 W/kg


Right Touch Cheek/CH 4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.593 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

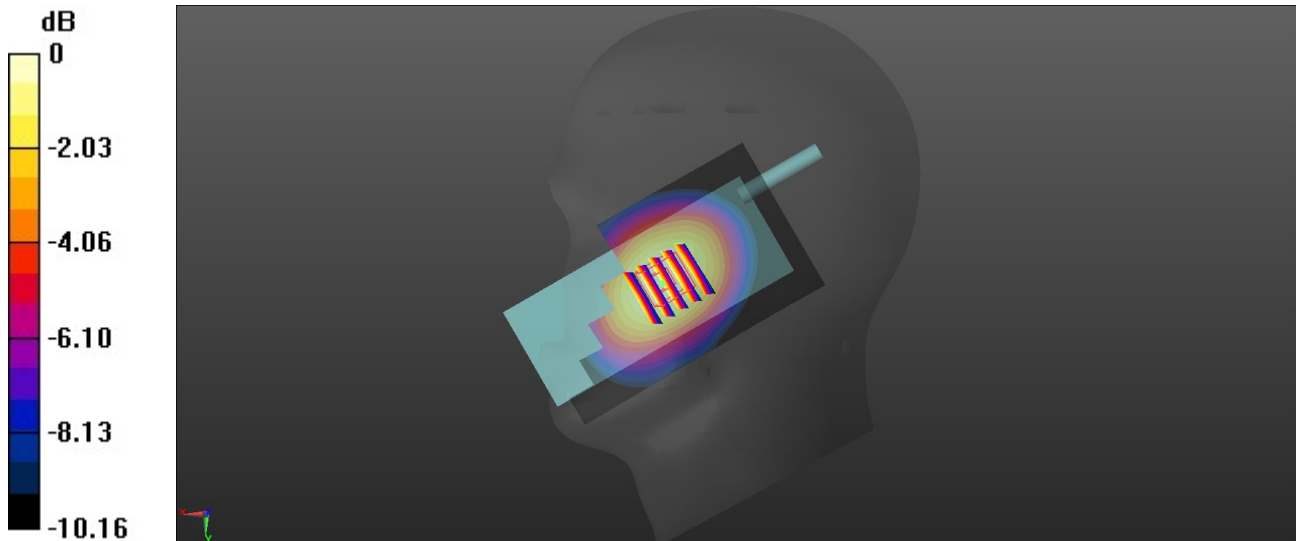

0 dB = 0.630 W/kg = -2.01 dBW/kg

LTE Band 2-M-Head

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.164$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.5°C;Liquid Temperature:22.3°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.45, 8.45, 8.45) @ 1880 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 18900/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.628 W/kg


Right Touch Cheek/CH 18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.350 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.590 W/kg

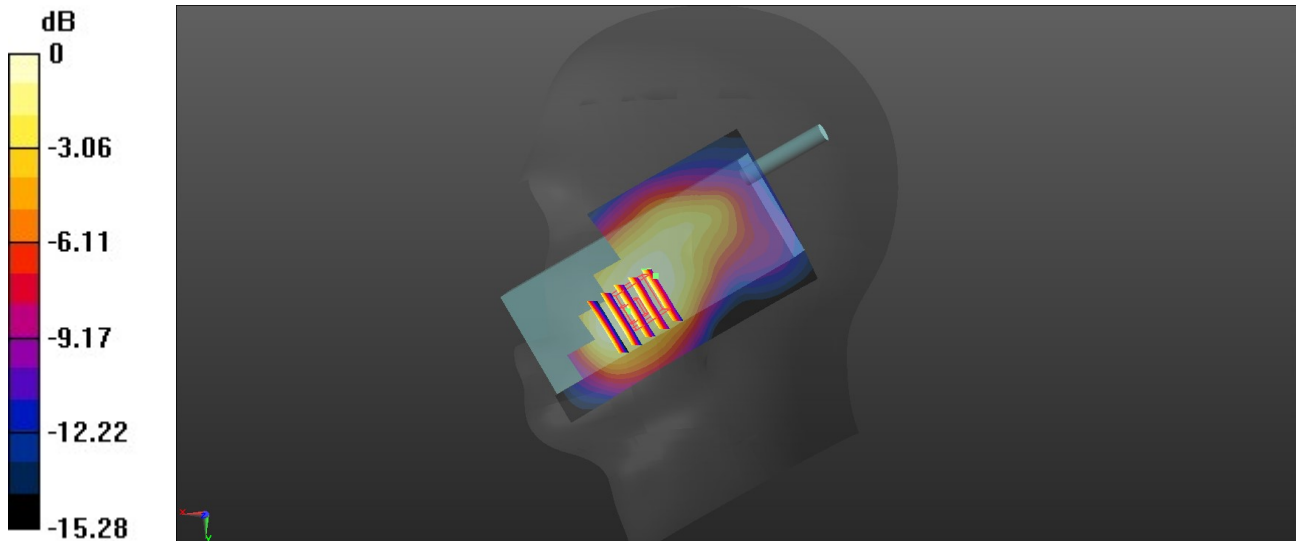

0 dB = 0.590 W/kg = -2.29 dBW/kg

LTE Band 4-H-Head

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 39.425$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.81, 8.81, 8.81) @ 1745 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 20300/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Right Touch Cheek/CH 20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.71 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.537 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

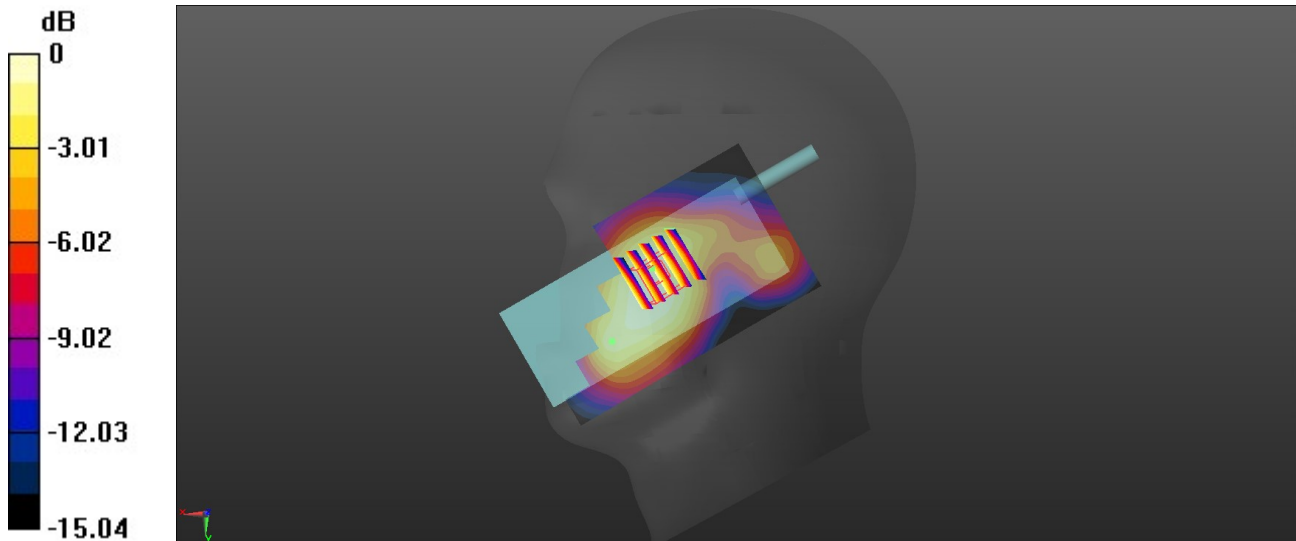

0 dB = 1.08 W/kg = 0.33 dBW/kg

LTE Band 5-L-Head

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 829 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.604$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.4°C;Liquid Temperature:22.2.°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.3, 10.3, 10.3) @ 829 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 20450/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.891 W/kg


Right Touch Cheek/CH 20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.07 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.496 W/kg

Maximum value of SAR (measured) = 0.906 W/kg

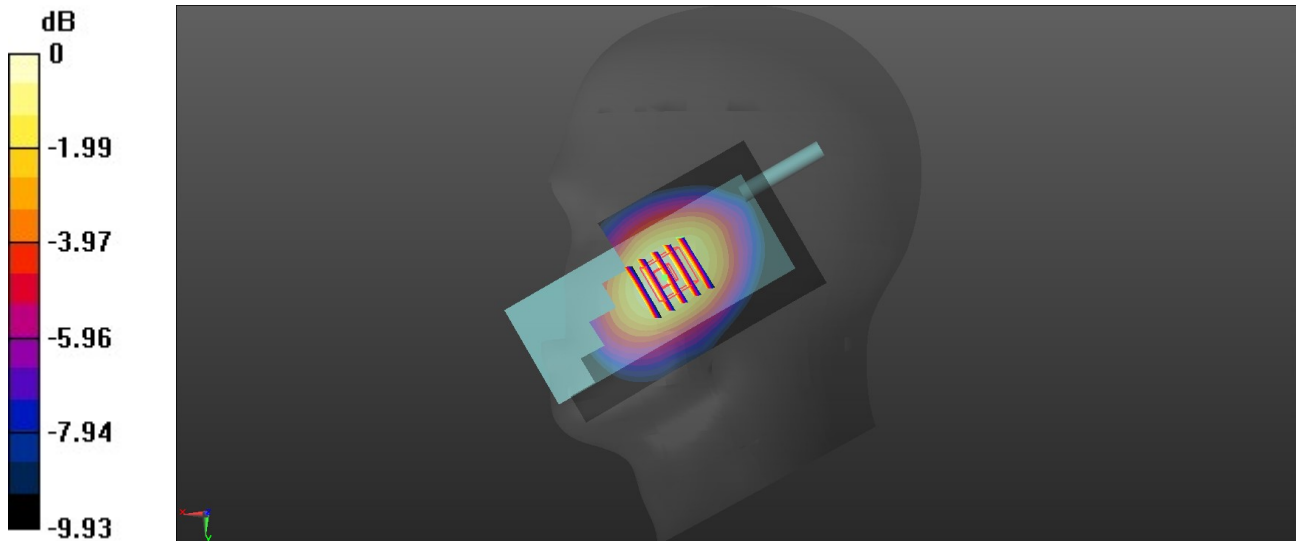

0 dB = 0.906 W/kg = -0.43 dBW/kg

LTE Band 7-L-Head

Communication System: UID 0, Generic LTE-FDD (0); Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.379$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.5°C;Liquid Temperature:22.3°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.9, 7.9, 7.9) @ 2510 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 20850/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0456 W/kg


Right Touch Cheek/CH 20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.266 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg.

Maximum value of SAR (measured) = 0.0387 W/kg

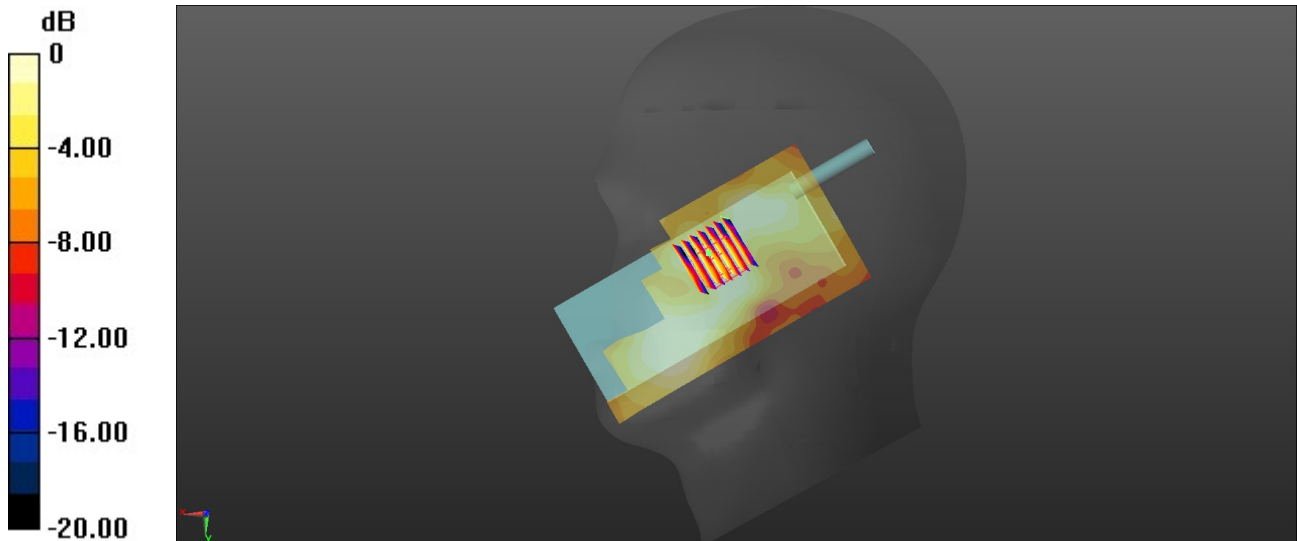

0 dB = 0.0387 W/kg = -14.12 dBW/kg

LTE Band 17-H-Head


Communication System: UID 0, Generic LTE-FDD (0); Frequency: 711 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 711 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.032$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Ambient Temperature:22.2°C;Liquid Temperature:22.0°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.6, 10.6, 10.6) @ 711 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 23800/Area Scan (61x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0652 W/kg

Right Touch Cheek/CH 23800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.322 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.0750 W/kg
SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.037 W/kg
 Maximum value of SAR (measured) = 0.0655 W/kg

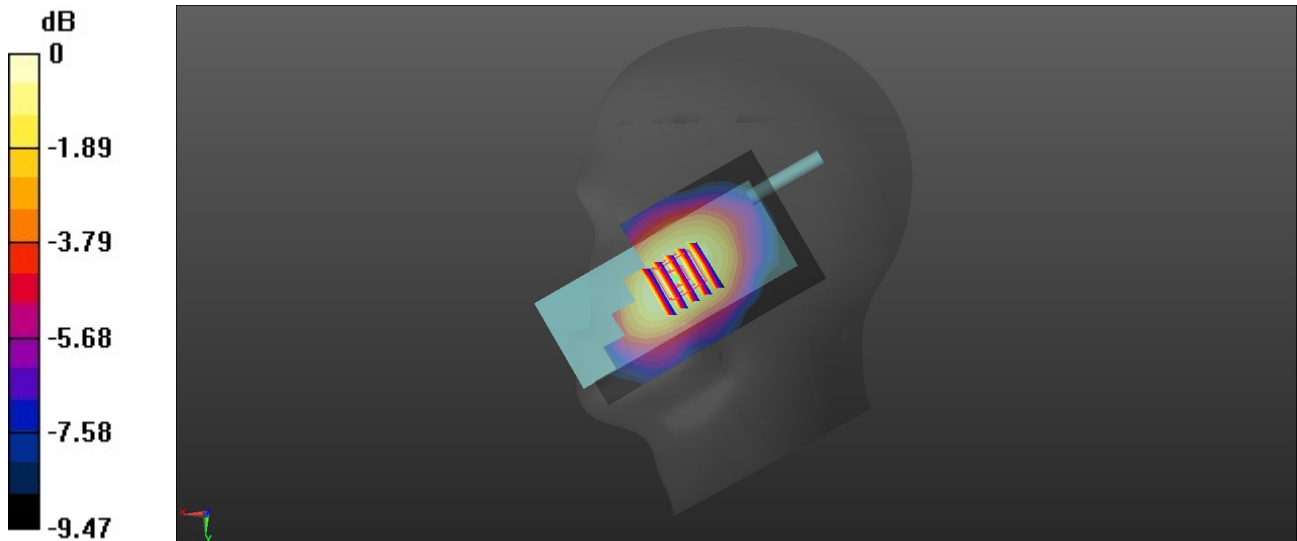

0 dB = 0.0655 W/kg = -11.84 dBW/kg

Bluetooth-L-Head

Communication System: UID 0, Generic BT (0); Frequency: 2402 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 39.41$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.5°C;Liquid Temperature:22.3°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.9, 7.9, 7.9) @ 2402 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Touch Cheek/CH 0/Area Scan (71x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0192 W/kg


Right Touch Cheek/CH 0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.824 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.00961 W/kg; SAR(10 g) = 0.00478 W/kg

Maximum value of SAR (measured) = 0.0154 W/kg

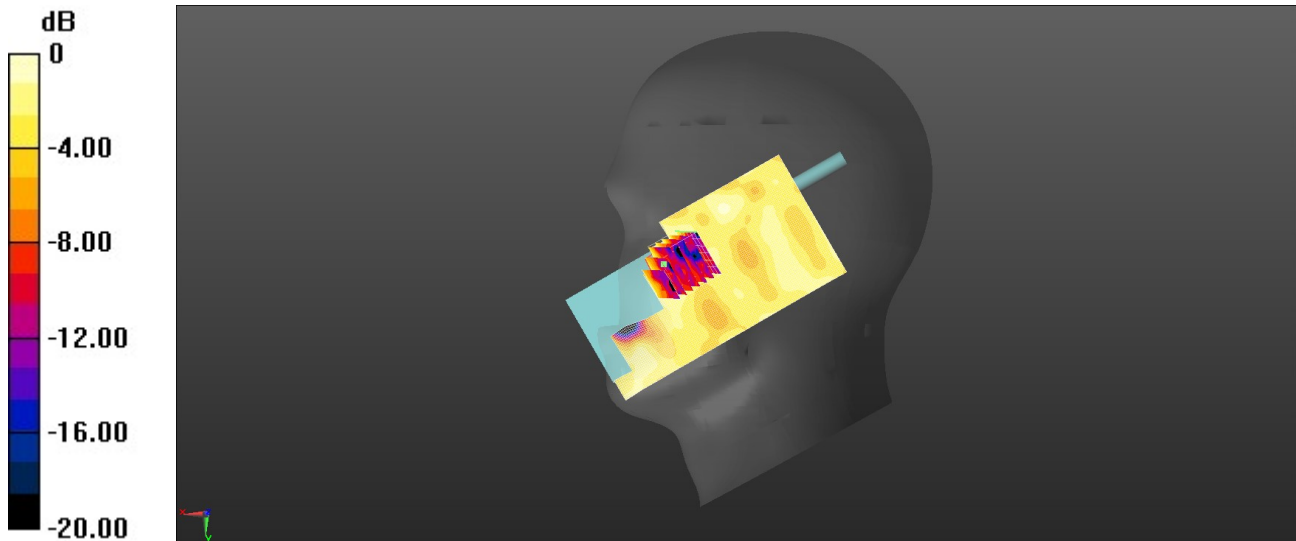

0 dB = 0.0154 W/kg = -18.12 dBW/kg

GSM 850-H-Body

Communication System: UID 0, Generic GPRS(TDMA, GMSK, TN 0-1-2) (0); Frequency: 848.8 MHz;Duty Cycle: 1:2.66993

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 41.522$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(10.3, 10.3, 10.3) @ 848.8 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front/CH 251/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.539 W/kg

Front/CH 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.95 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.606 W/kg
SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.298 W/kg
Maximum value of SAR (measured) = 0.536 W/kg

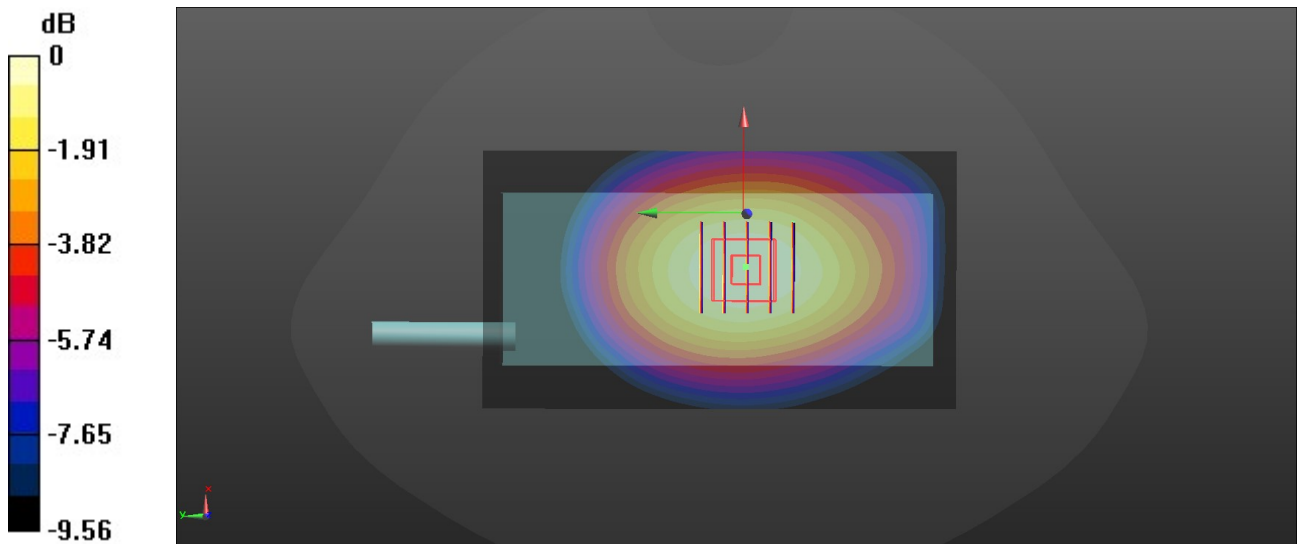

0 dB = 0.536 W/kg = -2.71 dBW/kg

GSM 1900-H-Body

Communication System: UID 0, Generic GPRS(TDMA, GMSK, TN 0-1) (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.10015

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Ambient Temperature:22.4°C;Liquid Temperature:22.2°C;

DASY Configuration:

- Probe: EX3DV4 - SN7494; ConvF(8.45, 8.45, 8.45) @ 1909.8 MHz; Calibrated: 5/16/2022
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/12/2022
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Front/CH 810/Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.264 W/kg

Front/CH 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.031 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.306 W/kg
SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.104 W/kg
Maximum value of SAR (measured) = 0.255 W/kg

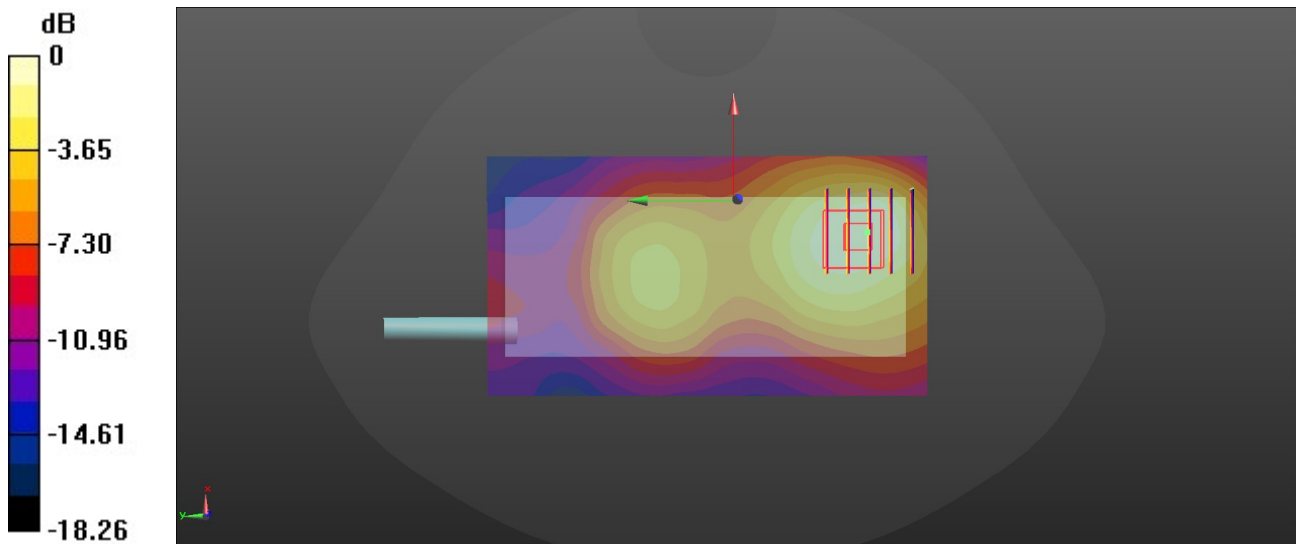

0 dB = 0.255 W/kg = -5.93 dBW/kg