



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant:** SHENZHEN TOPFLYtech CO., LIMITED.

Address: Rm409 Scientific Research Building TsinghuaHi-tech Park Hi-tech  
Industrial Nanshan District Shenzhen China

**FCC ID:** 2ASWY23PIONEERX100

**Product Name:** GPS Tracker

**Standard(s):** 47 CFR Part 15 Subpart B  
ANSI C63.4-2014

The above device has been tested and found compliant with the requirement of the relative standards by  
China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR230836391-00A

**Date Of Issue:** 2023/9/25

**Reviewed By:** Calvin Chen

Title: RF Engineer

**Approved By:** Sun Zhong

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 442868, the FCC Designation No.: CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 DESCRIPTION OF TEST CONFIGURATION .....	6
1.2.2 Support Equipment List and Details.....	6
1.2.3 Support Cable List and Details.....	6
1.2.4 Block Diagram of Test Setup .....	6
1.3 MEASUREMENT UNCERTAINTY .....	7
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES.....</b>	<b>9</b>
3.1 AC LINE CONDUCTED EMISSIONS .....	9
3.1.1 EUT Setup.....	9
3.1.2 EMI Test Receiver Setup .....	9
3.1.3 Test Procedure.....	10
3.1.4 Corrected Amplitude & Margin Calculation.....	10
3.2 RADIATION SPURIOUS EMISSIONS .....	11
3.2.1 EUT Setup.....	11
3.2.2 Equipment Setup .....	12
3.2.3 Test Procedure.....	12
3.2.4 Corrected Amplitude & Margin Calculation.....	12
<b>4. TEST DATA AND RESULTS .....</b>	<b>13</b>
4.1 AC LINE CONDUCTED EMISSIONS .....	13
4.2 RADIATION SPURIOUS EMISSIONS .....	14
<b>5. EUT PHOTOGRAPHS .....</b>	<b>19</b>
<b>6. TEST SETUP PHOTOGRAPHS.....</b>	<b>20</b>

**DOCUMENT REVISION HISTORY**

---

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
1.0	CR230836391-00A	Original Report	2023/9/25

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>Product Name:</b>	GPS Tracker
<b>Test Model:</b>	PioneerX100
<b>Highest Operation Frequency:</b>	2690 MHz
<b>Rated Input Voltage:</b>	DC 7V~32V or 3.7V from battery
<b>Serial Number:</b>	27TU-1
<b>EUT Received Date:</b>	2023/8/5
<b>EUT Received Status:</b>	Good

### Accessory Information:

<b>Accessory Description</b>	<b>Manufacturer</b>	<b>Model</b>
/	/	/

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Charging& Operating
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	No

### 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Anritsu	Radio Communication Analyzer	MT8820C	620118
Unknown	Load	Unknown	Unknown
Unknown	Antenna	Unknown	Unknown
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386

### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Antenna Cable	No	No	2	MT8820	Antenna
Cable	No	No	2	EUT	Load
Power Cable	No	No	1.5	DC Power Supply	EUT

### 1.2.4 Block Diagram of Test Setup

Radiated Emissions:

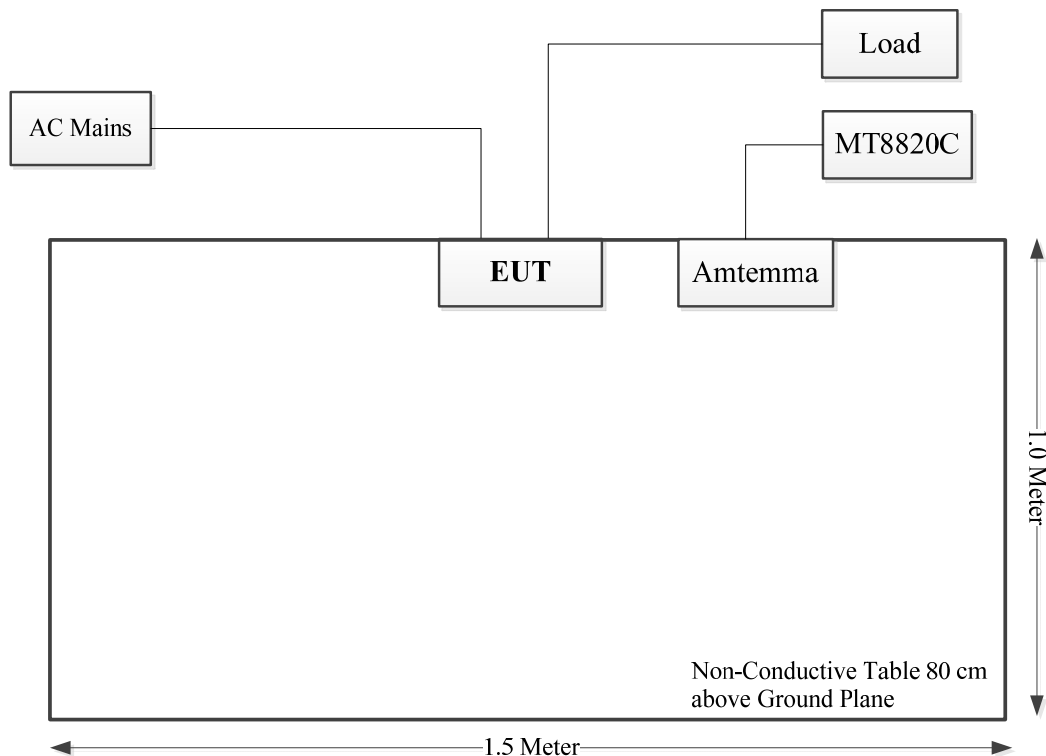

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1 °C
Humidity	±5%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

---


<b>Standard(s) Section</b>	<b>Description of Test</b>	<b>Result</b>
§15.107	Conducted emissions	Compliant
§15.109	Radiated emissions	Compliant



### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 EUT Setup

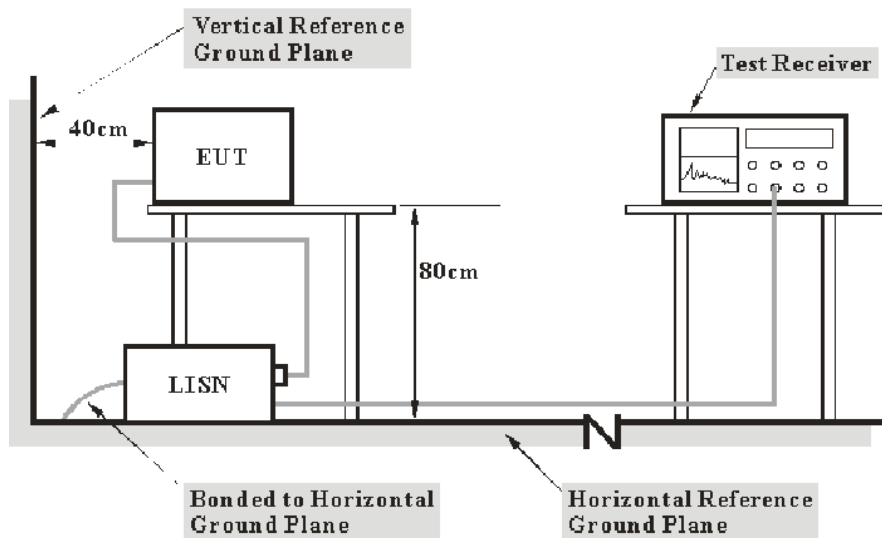

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

##### 3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

### 3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


## 3.2 Radiation Spurious Emissions

### 3.2.1 EUT Setup

Below 1GHz:

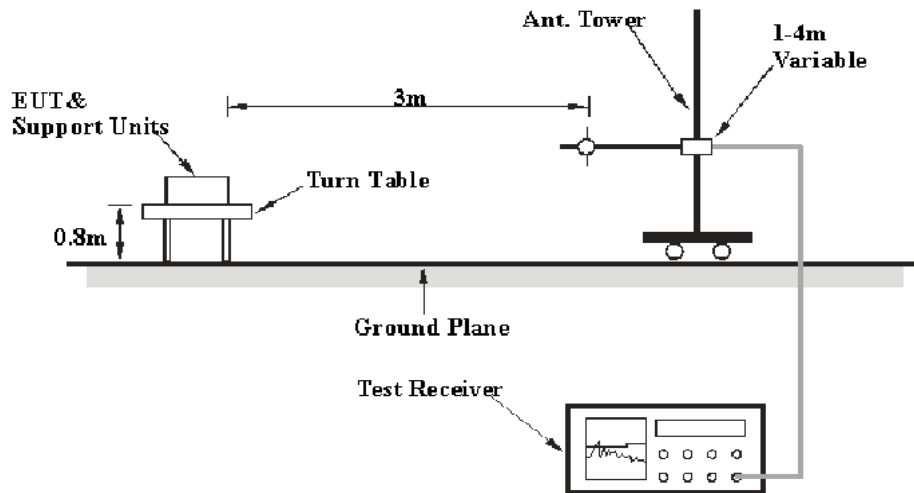

Above 1GHz:

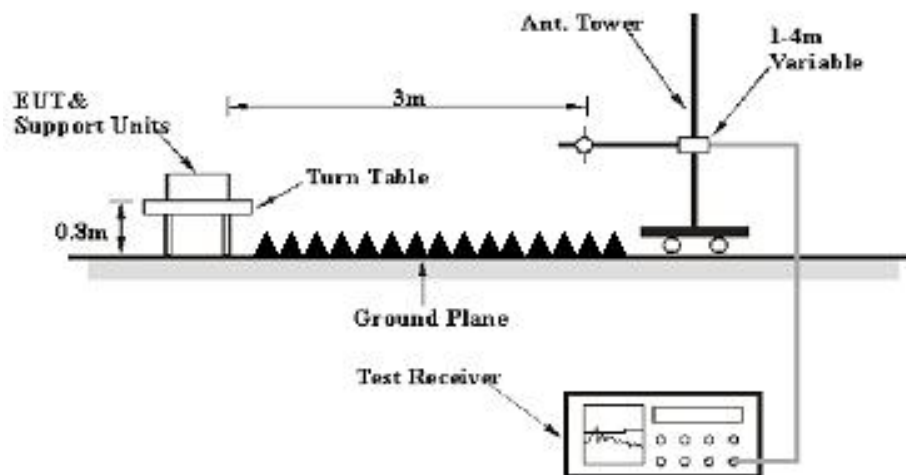

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

### 3.2.2 Equipment Setup

The system was investigated from 30 MHz to 14 GHz.

During the radiated emission test, the test equipment was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	10Hz	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## **4. TEST DATA AND RESULTS**

---

### **4.1 AC Line Conducted Emissions**

Not Applicable, the device was vehicle device.

## 4.2 Radiation Spurious Emissions

Serial Number:	27TU-1	Test Date:	2023/9/15~2023/9/19
Test Site:	966-1, 966-2	Test Mode:	Charging& Operating
Tester:	Hugo Huo, Mack Huang	Test Result:	Pass

### Environmental Conditions:

Temperature: (°C)	25.8~26.1	Relative Humidity: (%)	64~66	ATM Pressure: (kPa)	100.2~100.6
----------------------	-----------	------------------------------	-------	------------------------	-------------

### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


### Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 30MHz-1GHz:

Project No.: CR230836391-EM  
 Tester: Hugo Huo  
 Polarization: horizontal  
 Note:


Date: 2023-09-15

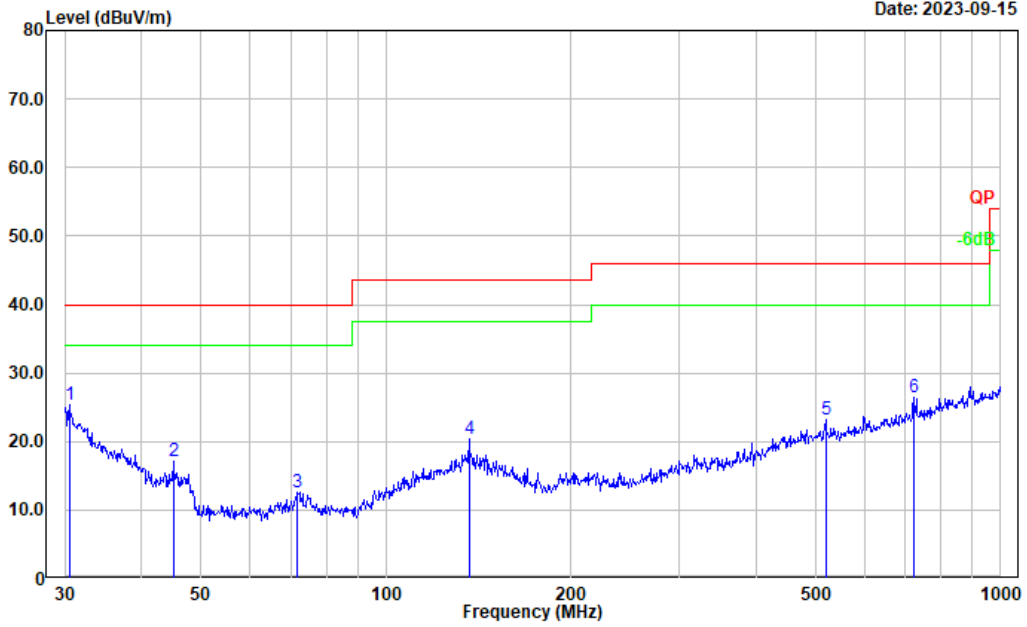

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	29.60	-4.20	25.40	40.00	14.60	Peak
2	45.058	31.47	-14.25	17.22	40.00	22.78	Peak
3	71.581	29.20	-16.72	12.48	40.00	27.52	Peak
4	136.460	32.00	-11.61	20.39	43.50	23.11	Peak
5	519.065	29.13	-5.84	23.29	46.00	22.71	Peak
6	721.726	29.74	-3.32	26.42	46.00	19.58	Peak

Project No.: CR230836391-EM  
 Tester: Hugo Huo  
 Polarization: vertical  
 Note:

Date: 2023-09-15

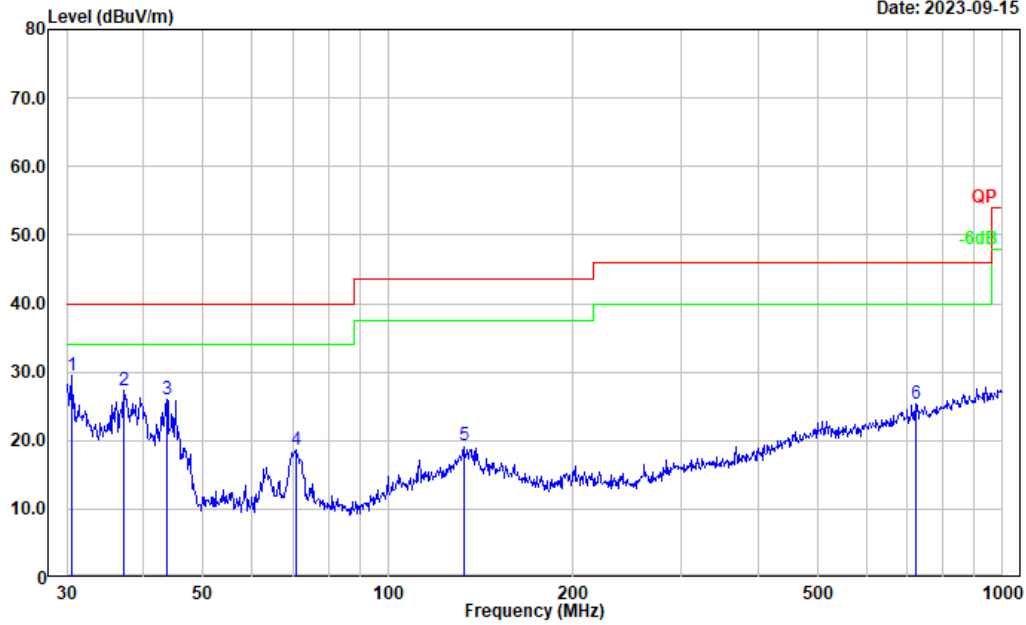


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	33.79	-4.20	29.59	40.00	10.41	Peak
2	37.155	36.46	-9.25	27.21	40.00	12.79	Peak
3	43.659	39.49	-13.49	26.00	40.00	14.00	Peak
4	70.832	35.24	-16.64	18.60	40.00	21.40	Peak
5	132.685	30.64	-11.45	19.19	43.50	24.31	Peak
6	721.726	28.60	-3.32	25.28	46.00	20.72	Peak



2) Above 1GHz:


Project No.: CR230836391-EM  
 Tester: Mack Huang  
 Polarization: horizontal  
 Note: Y

Date: 2023-09-19

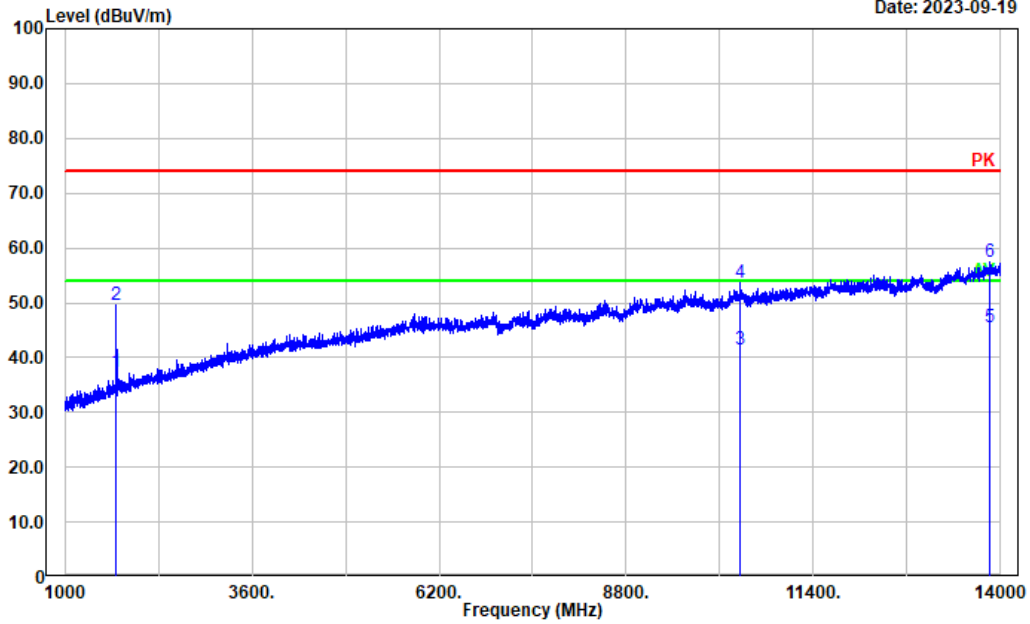

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	1712.542	36.53	0.78	37.31	54.00	16.69	Average
2	1712.542	48.84	0.78	49.62	74.00	24.38	Peak
3	10377.480	22.17	19.16	41.33	54.00	12.67	Average
4	10377.480	34.50	19.16	53.66	74.00	20.34	Peak
5	13854.370	21.63	24.01	45.64	54.00	8.36	Average
6	13854.370	33.45	24.01	57.46	74.00	16.54	Peak

Project No.: CR230836391-EM  
 Tester: Mack Huang  
 Polarization: vertical  
 Note: Y

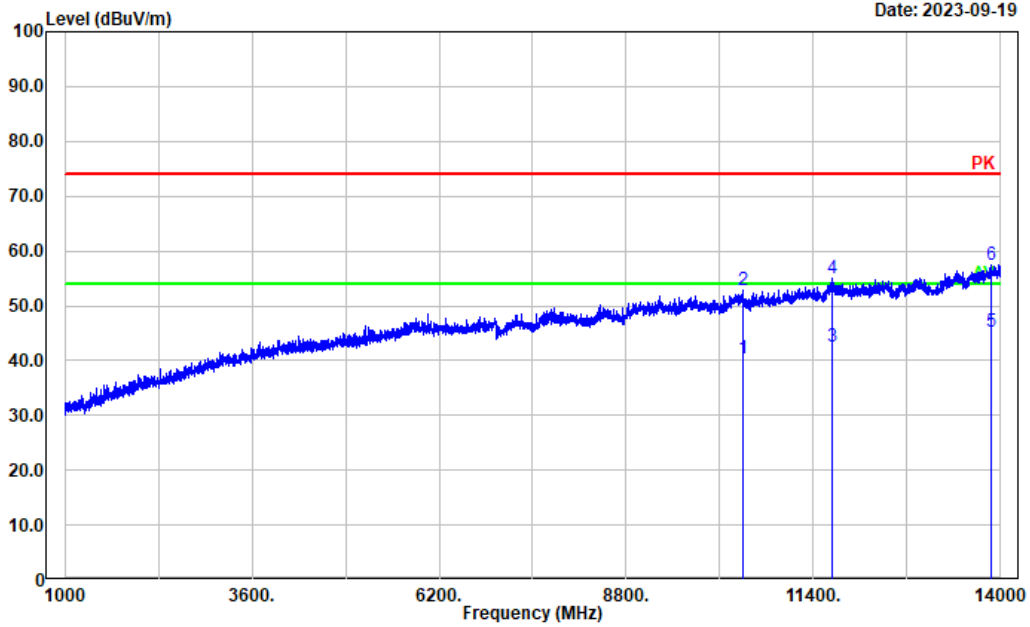

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	10419.080	21.37	19.10	40.47	54.00	13.53	Average
2	10419.080	33.84	19.10	52.94	74.00	21.06	Peak
3	11654.330	21.39	21.08	42.47	54.00	11.53	Average
4	11654.330	33.86	21.08	54.94	74.00	19.06	Peak
5	13877.780	21.06	24.13	45.19	54.00	8.81	Average
6	13877.780	33.25	24.13	57.38	74.00	16.62	Peak

## **5. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR230836391-EXP EUT EXTERNAL PHOTOGRAPHS and CR230836391-  
INP EUT INTERNAL PHOTOGRAPHS

## **6. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment CR230836391-00A-TSP TEST SETUP PHOTOGRAPHS.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***