

Model: PA300-E: External antenna


Reference level

Mode 2: IEEE 802.11b Continuous TX mode\_ANT-0

2412



2437

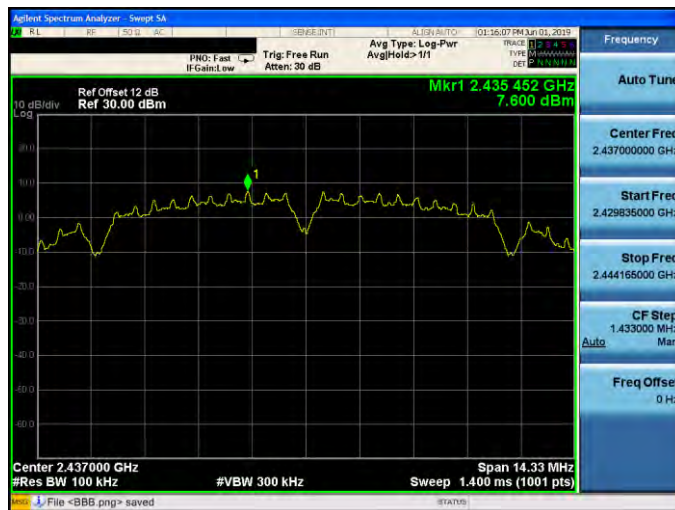

2462










Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0	
2412	<p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.413 248 5 GHz 5.047 dBm</p> <p>Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts)</p> <p>Center Freq: 2.41200000 GHz Start Freq: 2.40065000 GHz Stop Freq: 2.42335000 GHz CF Step: 2.270000 MHz Freq Offset: 0 Hz</p>
2437	<p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.438 248 5 GHz 1.791 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts)</p> <p>Center Freq: 2.43700000 GHz Start Freq: 2.42565000 GHz Stop Freq: 2.44835000 GHz CF Step: 2.270000 MHz Freq Offset: 0 Hz</p>
2462	<p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.463 248 5 GHz 5.744 dBm</p> <p>Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts)</p> <p>Center Freq: 2.46200000 GHz Start Freq: 2.45065000 GHz Stop Freq: 2.47335000 GHz CF Step: 2.270000 MHz Freq Offset: 0 Hz</p>






Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0	
2422	<p>Ref Offset 12 dB Ref 30.00 dBm Mkr1 2.426 98 GHz 9.095 dBm</p> <p>Center 2.42200 GHz #Res BW 100 kHz #VBW 300 kHz Span 50.79 MHz Sweep 4.867 ms (1001 pts)</p> <p>Frequency Auto Tune Center Freq 2.42200000 GHz Start Freq 2.39606000 GHz Stop Freq 2.44739500 GHz CF Step 6.079000 MHz Freq Offset 0 Hz</p>
2437	<p>Ref Offset 12 dB Ref 30.00 dBm Mkr1 2.441 98 GHz 11.006 dBm</p> <p>Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 50.84 MHz Sweep 4.867 ms (1001 pts)</p> <p>Frequency Auto Tune Center Freq 2.43700000 GHz Start Freq 2.41158000 GHz Stop Freq 2.46242000 GHz CF Step 6.084000 MHz Freq Offset 0 Hz</p>
2452	<p>Ref Offset 12 dB Ref 30.00 dBm Mkr1 2.456 93 GHz 10.247 dBm</p> <p>Center 2.45200 GHz #Res BW 100 kHz #VBW 300 kHz Span 50.84 MHz Sweep 4.867 ms (1001 pts)</p> <p>Frequency Auto Tune Center Freq 2.45200000 GHz Start Freq 2.42658000 GHz Stop Freq 2.47742000 GHz CF Step 6.084000 MHz Freq Offset 0 Hz</p>





Mode 2: IEEE 802.11b Continuous TX mode_ANT-1	
2412	
2437	
2462	

Mode 3: IEEE 802.11g Continuous TX mode_ANT-1	
<p>2412</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.412000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts)</p> <p>Mkr1 2.413 202 GHz 5.170 dBm</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Auto Tune Center Freq 2.412000000 GHz Start Freq 2.400600000 GHz Stop Freq 2.423340000 GHz CF Step 2.289000 MHz Freq Offset 0 Hz</p>
<p>2437</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.437000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts)</p> <p>Mkr1 2.438 225 GHz 2.383 dBm</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Auto Tune Center Freq 2.437000000 GHz Start Freq 2.425600000 GHz Stop Freq 2.448340000 GHz CF Step 2.289000 MHz Freq Offset 0 Hz</p>
<p>2462</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center 2.462000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts)</p> <p>Mkr1 2.463 249 GHz 2.410 dBm</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Auto Tune Center Freq 2.462000000 GHz Start Freq 2.450645000 GHz Stop Freq 2.473395000 GHz CF Step 2.271000 MHz Freq Offset 0 Hz</p>



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1									
2412	<p>Agilent Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg Hold: 1/1 Ref Offset 12 dB Ref 30.00 dBm Mkr1 2.413 225 GHz 5.138 dBm Center 2.412000 GHz Span 22.68 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts) File &lt;BBB.png&gt; saved</p> <table border="1"><thead><tr><th>Frequency</th></tr></thead><tbody><tr><td>Auto Tune</td></tr><tr><td>Center Freq 2.41200000 GHz</td></tr><tr><td>Start Freq 2.40060000 GHz</td></tr><tr><td>Stop Freq 2.42340000 GHz</td></tr><tr><td>CF Step 2.289000 MHz</td></tr><tr><td>Auto Man</td></tr><tr><td>Freq Offset 0 Hz</td></tr></tbody></table>	Frequency	Auto Tune	Center Freq 2.41200000 GHz	Start Freq 2.40060000 GHz	Stop Freq 2.42340000 GHz	CF Step 2.289000 MHz	Auto Man	Freq Offset 0 Hz
Frequency									
Auto Tune									
Center Freq 2.41200000 GHz									
Start Freq 2.40060000 GHz									
Stop Freq 2.42340000 GHz									
CF Step 2.289000 MHz									
Auto Man									
Freq Offset 0 Hz									
2437	<p>Agilent Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg Hold: 1/1 Ref Offset 12 dB Ref 30.00 dBm Mkr1 2.438 226 GHz 2.425 dBm Center 2.437000 GHz Span 22.71 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts) File &lt;BBB.png&gt; saved</p> <table border="1"><thead><tr><th>Frequency</th></tr></thead><tbody><tr><td>Auto Tune</td></tr><tr><td>Center Freq 2.43700000 GHz</td></tr><tr><td>Start Freq 2.42564500 GHz</td></tr><tr><td>Stop Freq 2.44835500 GHz</td></tr><tr><td>CF Step 2.271000 MHz</td></tr><tr><td>Auto Man</td></tr><tr><td>Freq Offset 0 Hz</td></tr></tbody></table>	Frequency	Auto Tune	Center Freq 2.43700000 GHz	Start Freq 2.42564500 GHz	Stop Freq 2.44835500 GHz	CF Step 2.271000 MHz	Auto Man	Freq Offset 0 Hz
Frequency									
Auto Tune									
Center Freq 2.43700000 GHz									
Start Freq 2.42564500 GHz									
Stop Freq 2.44835500 GHz									
CF Step 2.271000 MHz									
Auto Man									
Freq Offset 0 Hz									
2462	<p>Agilent Spectrum Analyzer - Swept SA PNO: Fast IF Gain: Low Trig: Free Run Atten: 30 dB Avg Type: Log-Pwr Avg Hold: 1/1 Ref Offset 12 dB Ref 30.00 dBm Mkr1 2.463 246 GHz 6.270 dBm Center 2.462000 GHz Span 22.65 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.200 ms (1001 pts) File &lt;BBB.png&gt; saved</p> <table border="1"><thead><tr><th>Frequency</th></tr></thead><tbody><tr><td>Auto Tune</td></tr><tr><td>Center Freq 2.46200000 GHz</td></tr><tr><td>Start Freq 2.45067500 GHz</td></tr><tr><td>Stop Freq 2.47332500 GHz</td></tr><tr><td>CF Step 2.285000 MHz</td></tr><tr><td>Auto Man</td></tr><tr><td>Freq Offset 0 Hz</td></tr></tbody></table>	Frequency	Auto Tune	Center Freq 2.46200000 GHz	Start Freq 2.45067500 GHz	Stop Freq 2.47332500 GHz	CF Step 2.285000 MHz	Auto Man	Freq Offset 0 Hz
Frequency									
Auto Tune									
Center Freq 2.46200000 GHz									
Start Freq 2.45067500 GHz									
Stop Freq 2.47332500 GHz									
CF Step 2.285000 MHz									
Auto Man									
Freq Offset 0 Hz									

Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1	
<p>2422</p>	
<p>2437</p>	
<p>2452</p>	



Out of Band Conducted Spurious Emission

Mode 2: IEEE 802.11b Continuous TX mode ANT-0																												
2412	<p>Ref Offset 12 dB Ref 25.00 dBm Mkr1 2.412 3 GHz 13.266 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412 3 GHz</td> <td>13.266 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.996 4 GHz</td> <td>-24.015 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 3 GHz	13.266 dBm				2	N	1	f	25.996 4 GHz	-24.015 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.412 3 GHz	13.266 dBm																							
2	N	1	f	25.996 4 GHz	-24.015 dBm																							
2437	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.438 8 GHz 6.710 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.438 8 GHz</td> <td>6.710 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.942 1 GHz</td> <td>-33.823 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.438 8 GHz	6.710 dBm				2	N	1	f	25.942 1 GHz	-33.823 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.438 8 GHz	6.710 dBm																							
2	N	1	f	25.942 1 GHz	-33.823 dBm																							
2462	<p>Ref Offset 12 dB Ref 25.00 dBm Mkr1 2.463 3 GHz 12.557 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 3 GHz</td> <td>12.557 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.716 9 GHz</td> <td>-24.029 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 3 GHz	12.557 dBm				2	N	1	f	24.716 9 GHz	-24.029 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.463 3 GHz	12.557 dBm																							
2	N	1	f	24.716 9 GHz	-24.029 dBm																							



Mode 3: IEEE 802.11g Continuous TX mode_ANT-0																												
2412	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 20.00 dBm</p> <p>Mkr1 2.414 3 GHz 4.223 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.414 3 GHz</td> <td>4.223 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.968 0 GHz</td> <td>-33.623 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 3 GHz	4.223 dBm				2	N	1	f	26.968 0 GHz	-33.623 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.414 3 GHz	4.223 dBm																							
2	N	1	f	26.968 0 GHz	-33.623 dBm																							
2437	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 10.00 dBm</p> <p>Mkr1 2.439 4 GHz 1.354 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.439 4 GHz</td> <td>1.354 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.974 6 GHz</td> <td>-43.241 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 4 GHz	1.354 dBm				2	N	1	f	26.974 6 GHz	-43.241 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.439 4 GHz	1.354 dBm																							
2	N	1	f	26.974 6 GHz	-43.241 dBm																							
2462	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 12.00 dBm</p> <p>Mkr1 2.464 6 GHz 2.404 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.464 6 GHz</td> <td>2.404 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.984 7 GHz</td> <td>-43.978 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.464 6 GHz	2.404 dBm				2	N	1	f	26.984 7 GHz	-43.978 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.464 6 GHz	2.404 dBm																							
2	N	1	f	26.984 7 GHz	-43.978 dBm																							

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0																												
2412	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.414 3 GHz</td> <td>4.249 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.893 9 GHz</td> <td>-33.644 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 3 GHz	4.249 dBm				2	N	1	f	24.893 9 GHz	-33.644 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.414 3 GHz	4.249 dBm																							
2	N	1	f	24.893 9 GHz	-33.644 dBm																							
2437	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.433 5 GHz</td> <td>0.658 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.716 1 GHz</td> <td>-42.703 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.433 5 GHz	0.658 dBm				2	N	1	f	24.716 1 GHz	-42.703 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.433 5 GHz	0.658 dBm																							
2	N	1	f	24.716 1 GHz	-42.703 dBm																							
2462	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 3 GHz</td> <td>4.749 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.748 3 GHz</td> <td>-34.202 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 3 GHz	4.749 dBm				2	N	1	f	24.748 3 GHz	-34.202 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.463 3 GHz	4.749 dBm																							
2	N	1	f	24.748 3 GHz	-34.202 dBm																							



Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0																												
2422	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.425 5 GHz 8.916 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.425 5 GHz</td> <td>8.916 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.946 8 GHz</td> <td>-34.333 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	8.916 dBm				2	N	1	f	25.946 8 GHz	-34.333 dBm			
MKR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.425 5 GHz	8.916 dBm																							
2	N	1	f	25.946 8 GHz	-34.333 dBm																							
2437	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.440 8 GHz 9.797 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 8 GHz</td> <td>9.797 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.899 9 GHz</td> <td>-33.919 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 8 GHz	9.797 dBm				2	N	1	f	25.899 9 GHz	-33.919 dBm			
MKR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.440 8 GHz	9.797 dBm																							
2	N	1	f	25.899 9 GHz	-33.919 dBm																							
2452	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.463 3 GHz 9.289 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 3 GHz</td> <td>9.289 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.891 2 GHz</td> <td>-34.499 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 3 GHz	9.289 dBm				2	N	1	f	25.891 2 GHz	-34.499 dBm			
MKR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.463 3 GHz	9.289 dBm																							
2	N	1	f	25.891 2 GHz	-34.499 dBm																							





Mode 2: IEEE 802.11b Continuous TX mode_ANT-1																												
2412	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 25.00 dBm</p> <p>Mkr1 2.414 3 GHz 12.563 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.414 3 GHz</td> <td>12.563 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.931 6 GHz</td> <td>-23.901 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 3 GHz	12.563 dBm				2	N	1	f	25.931 6 GHz	-23.901 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.414 3 GHz	12.563 dBm																							
2	N	1	f	25.931 6 GHz	-23.901 dBm																							
2437	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 20.00 dBm</p> <p>Mkr1 2.435 5 GHz 7.312 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.435 5 GHz</td> <td>7.312 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.921 6 GHz</td> <td>-33.654 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.435 5 GHz	7.312 dBm				2	N	1	f	25.921 6 GHz	-33.654 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.435 5 GHz	7.312 dBm																							
2	N	1	f	25.921 6 GHz	-33.654 dBm																							
2462	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 25.00 dBm</p> <p>Mkr1 2.461 3 GHz 12.449 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.531 s (40001 pts) Stop 26.50 GHz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.461 3 GHz</td> <td>12.449 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.788 9 GHz</td> <td>-23.973 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.461 3 GHz	12.449 dBm				2	N	1	f	24.788 9 GHz	-23.973 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.461 3 GHz	12.449 dBm																							
2	N	1	f	24.788 9 GHz	-23.973 dBm																							



Mode 3: IEEE 802.11g Continuous TX mode_ANT-1																												
2412	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4143 GHz</td> <td>4.533 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.7993 GHz</td> <td>-33.636 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4143 GHz	4.533 dBm				2	N	1	f	24.7993 GHz	-33.636 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4143 GHz	4.533 dBm																							
2	N	1	f	24.7993 GHz	-33.636 dBm																							
2437	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4381 GHz</td> <td>1.376 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.9746 GHz</td> <td>-44.327 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4381 GHz	1.376 dBm				2	N	1	f	25.9746 GHz	-44.327 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4381 GHz	1.376 dBm																							
2	N	1	f	25.9746 GHz	-44.327 dBm																							
2462	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4593 GHz</td> <td>1.917 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.7391 GHz</td> <td>-43.261 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4593 GHz	1.917 dBm				2	N	1	f	24.7391 GHz	-43.261 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4593 GHz	1.917 dBm																							
2	N	1	f	24.7391 GHz	-43.261 dBm																							

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1																												
2412	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4130 GHz</td> <td>4.263 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.8268 GHz</td> <td>-33.722 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4130 GHz	4.263 dBm				2	N	1	f	24.8268 GHz	-33.722 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4130 GHz	4.263 dBm																							
2	N	1	f	24.8268 GHz	-33.722 dBm																							
2437	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4355 GHz</td> <td>0.090 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.7161 GHz</td> <td>-45.189 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4355 GHz	0.090 dBm				2	N	1	f	24.7161 GHz	-45.189 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4355 GHz	0.090 dBm																							
2	N	1	f	24.7161 GHz	-45.189 dBm																							
2462	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4593 GHz</td> <td>4.806 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.8072 GHz</td> <td>-32.353 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4593 GHz	4.806 dBm				2	N	1	f	24.8072 GHz	-32.353 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4593 GHz	4.806 dBm																							
2	N	1	f	24.8072 GHz	-32.353 dBm																							



Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1																												
2422	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.425 5 GHz 8.417 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.425 5 GHz</td> <td>8.417 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.801 3 GHz</td> <td>-33.935 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.425 5 GHz	8.417 dBm				2	N	1	f	24.801 3 GHz	-33.935 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.425 5 GHz	8.417 dBm																							
2	N	1	f	24.801 3 GHz	-33.935 dBm																							
2437	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.432 2 GHz 10.469 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.432 2 GHz</td> <td>10.469 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.999 1 GHz</td> <td>-33.785 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.432 2 GHz	10.469 dBm				2	N	1	f	25.999 1 GHz	-33.785 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.432 2 GHz	10.469 dBm																							
2	N	1	f	25.999 1 GHz	-33.785 dBm																							
2452	<p>Ref Offset 12 dB Ref 20.00 dBm Mkr1 2.446 7 GHz 9.164 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.446 7 GHz</td> <td>9.164 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.940 8 GHz</td> <td>-33.618 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.446 7 GHz	9.164 dBm				2	N	1	f	25.940 8 GHz	-33.618 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.446 7 GHz	9.164 dBm																							
2	N	1	f	25.940 8 GHz	-33.618 dBm																							




Conducted Band Edge

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0																																					
2412	<p>Agilent Spectrum Analyzer - Swgpt 5A</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.411 520 GHz 13.705 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.44500 GHz Sweep 12.93 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.411 520 GHz</td> <td>13.705 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-41.891 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.398 020 GHz</td> <td>-26.443 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.411 520 GHz	13.705 dBm				2	N	1	f	2.400 000 GHz	-41.891 dBm				3	N	1	f	2.398 020 GHz	-26.443 dBm			
MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.411 520 GHz	13.705 dBm																																
2	N	1	f	2.400 000 GHz	-41.891 dBm																																
3	N	1	f	2.398 020 GHz	-26.443 dBm																																
2462	<p>Agilent Spectrum Analyzer - Swgpt 5A</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.459 970 GHz 13.950 dBm</p> <p>Start 2.43000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.56500 GHz Sweep 12.93 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.459 970 GHz</td> <td>13.950 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 600 GHz</td> <td>-38.651 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.613 025 GHz</td> <td>-34.812 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 970 GHz	13.950 dBm				2	N	1	f	2.483 600 GHz	-38.651 dBm				3	N	1	f	2.613 025 GHz	-34.812 dBm			
MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.459 970 GHz	13.950 dBm																																
2	N	1	f	2.483 600 GHz	-38.651 dBm																																
3	N	1	f	2.613 025 GHz	-34.812 dBm																																


Mode 3: IEEE 802.11g Continuous TX mode_ANT-0																																					
2412	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413275 GHz</td> <td>4.887 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-32.789 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413275 GHz	4.887 dBm				2	N	1	f	2.400000 GHz	-32.789 dBm												
MkR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.413275 GHz	4.887 dBm																																
2	N	1	f	2.400000 GHz	-32.789 dBm																																
2462	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460645 GHz</td> <td>2.529 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-43.973 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.510480 GHz</td> <td>-39.634 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460645 GHz	2.529 dBm				2	N	1	f	2.483500 GHz	-43.973 dBm				3	N	1	f	2.510480 GHz	-39.634 dBm			
MkR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.460645 GHz	2.529 dBm																																
2	N	1	f	2.483500 GHz	-43.973 dBm																																
3	N	1	f	2.510480 GHz	-39.634 dBm																																

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode\_ANT-0

2412

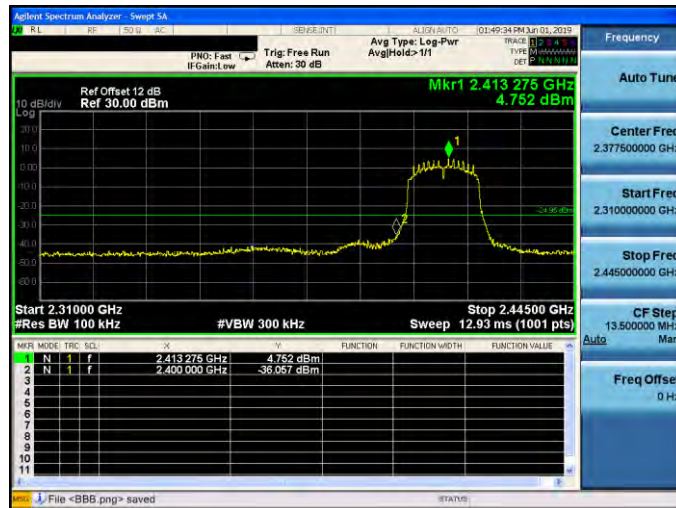

2462

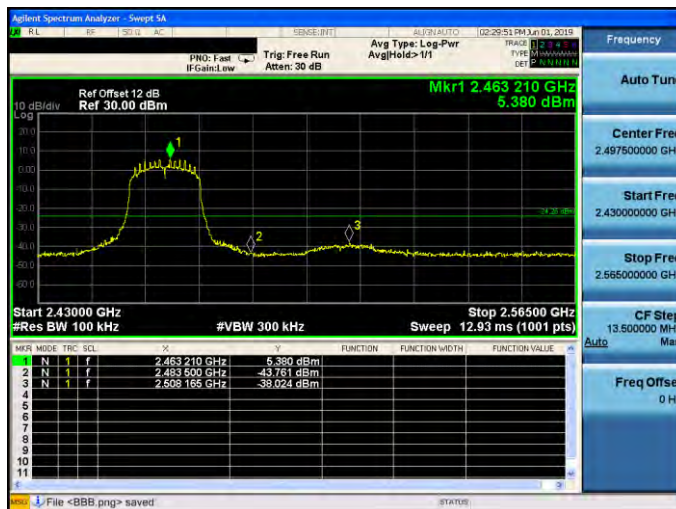


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0																																					
2422	<p>Agilent Spectrum Analyzer - Swgpt 5A</p> <p>Ref Offset 12 dB Ref 20.00 dBm</p> <p>Mkr1 2.426 910 GHz 8.827 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.44500 GHz Sweep 12.93 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.426 910 GHz</td> <td>8.827 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-22.666 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.396 940 GHz</td> <td>-21.153 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.426 910 GHz	8.827 dBm				2	N	1	f	2.400 000 GHz	-22.666 dBm				3	N	1	f	2.396 940 GHz	-21.153 dBm			
MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.426 910 GHz	8.827 dBm																																
2	N	1	f	2.400 000 GHz	-22.666 dBm																																
3	N	1	f	2.396 940 GHz	-21.153 dBm																																
2452	<p>Agilent Spectrum Analyzer - Swgpt 5A</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.457 000 GHz 10.187 dBm</p> <p>Start 2.43000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.56500 GHz Sweep 12.93 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.457 000 GHz</td> <td>10.187 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 600 GHz</td> <td>-31.104 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 640 GHz</td> <td>-26.133 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.457 000 GHz	10.187 dBm				2	N	1	f	2.483 600 GHz	-31.104 dBm				3	N	1	f	2.484 640 GHz	-26.133 dBm			
MKR	MODE	TRIG	SL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.457 000 GHz	10.187 dBm																																
2	N	1	f	2.483 600 GHz	-31.104 dBm																																
3	N	1	f	2.484 640 GHz	-26.133 dBm																																




Mode 2: IEEE 802.11b Continuous TX mode\_ANT-1

2412

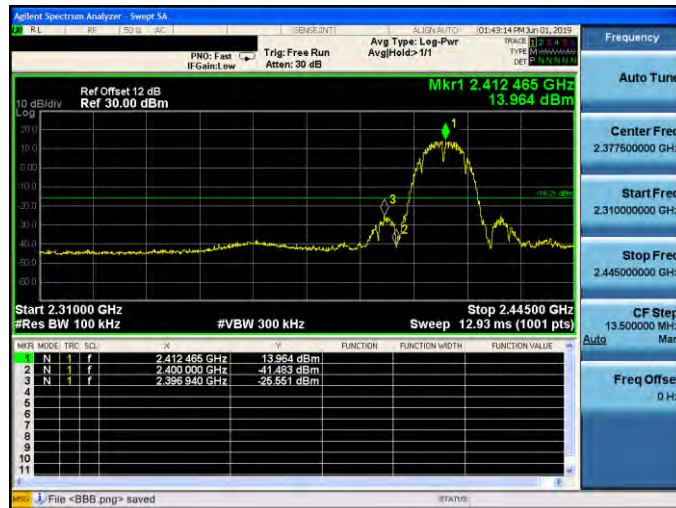


2462

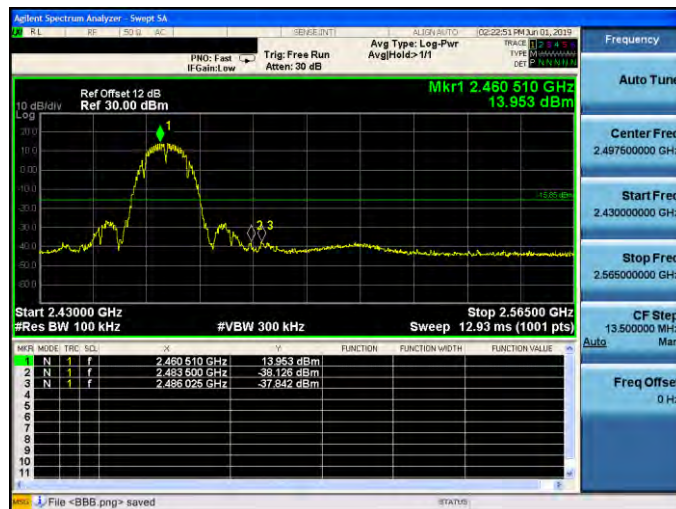


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1																																					
2412	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.415 705 GHz 4.771 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.44500 GHz Sweep 12.93 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.415 705 GHz</td> <td>4.771 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-36.489 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.415 705 GHz	4.771 dBm				2	N	1	f	2.400 000 GHz	-36.489 dBm												
MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.415 705 GHz	4.771 dBm																																
2	N	1	f	2.400 000 GHz	-36.489 dBm																																
2462	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 12 dB Ref 30.00 dBm</p> <p>Mkr1 2.464 425 GHz 2.464 dBm</p> <p>Start 2.43000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.56500 GHz Sweep 12.93 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.464 425 GHz</td> <td>2.464 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-44.450 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.506 140 GHz</td> <td>-41.195 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.464 425 GHz	2.464 dBm				2	N	1	f	2.483 500 GHz	-44.450 dBm				3	N	1	f	2.506 140 GHz	-41.195 dBm			
MKR	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.464 425 GHz	2.464 dBm																																
2	N	1	f	2.483 500 GHz	-44.450 dBm																																
3	N	1	f	2.506 140 GHz	-41.195 dBm																																

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode\_ANT-1

2412

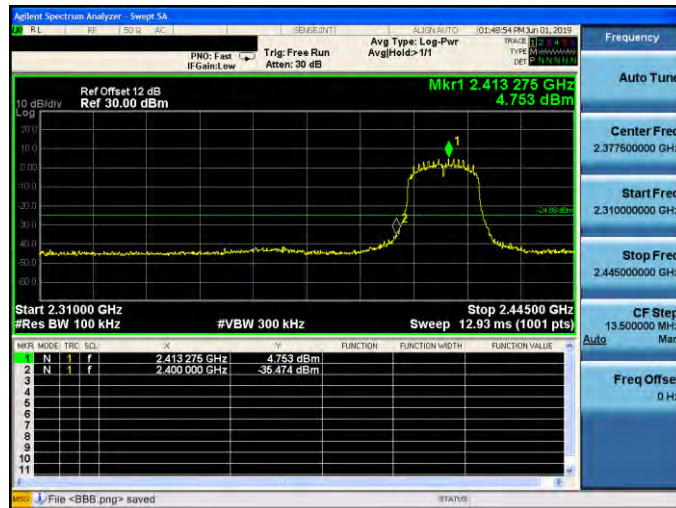

2462

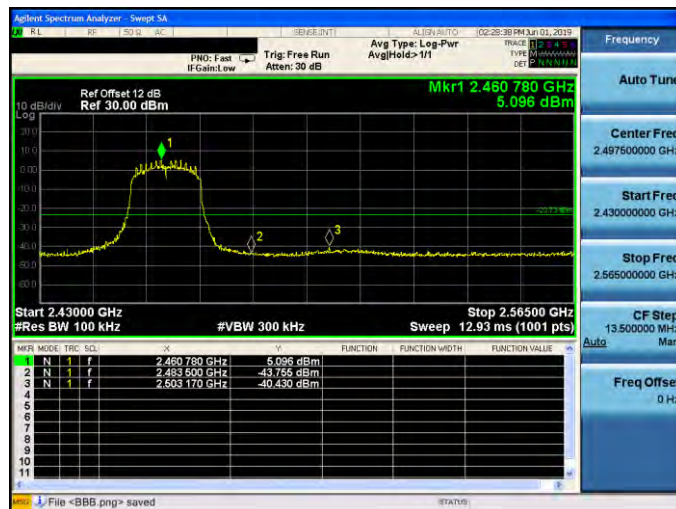



Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode\_ANT-1

2422



2452







## Annex C. Radiated Emission Measurement

### Harmonic

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m				
Test item:	Harmonic	Power:	AC 120 V/60 Hz				
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
61.0400	40.03	-7.18	32.85	40.00	-7.15	QP	H
111.4800	40.65	-9.24	31.41	43.50	-12.09	QP	H
158.0400	39.47	-5.73	33.74	43.50	-9.76	QP	H
242.4300	49.05	-6.34	42.71	46.00	-3.29	QP	H
373.3800	39.69	-2.76	36.93	46.00	-9.07	QP	H
897.1800	32.85	7.56	40.41	46.00	-5.59	QP	H
85.2900	46.38	-11.74	34.64	40.00	-5.36	QP	V
114.3900	45.54	-9.00	36.54	43.50	-6.96	QP	V
229.8200	46.45	-7.26	39.19	46.00	-6.81	QP	V
279.2900	45.31	-4.69	40.62	46.00	-5.38	QP	V
514.0300	35.71	-0.08	35.63	46.00	-10.37	QP	V
897.1800	34.50	7.56	42.06	46.00	-3.94	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example:  $32.85 = -7.18 + 40.03$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.



Above 1 GHz

Model: PA300: built-in antenna

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

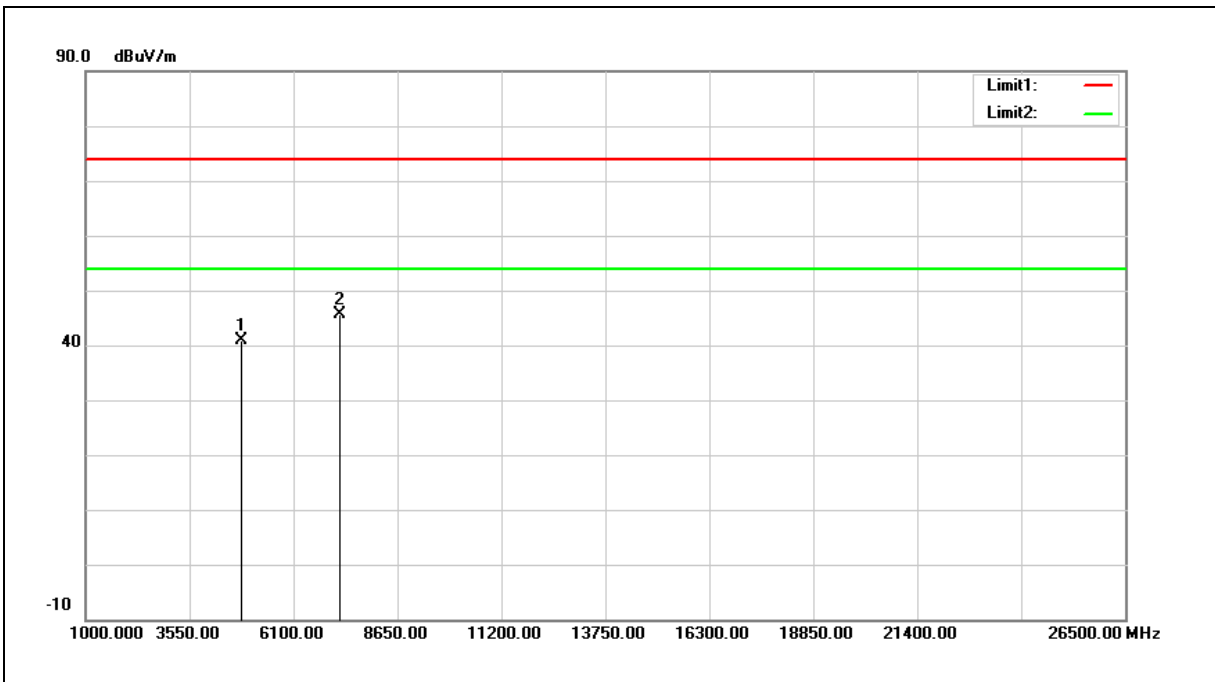

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.35	5.57	40.92	74.00	-33.08	peak
2	7236.000	33.66	11.98	45.64	74.00	-28.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 40.92 =5.57 + 35.35

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

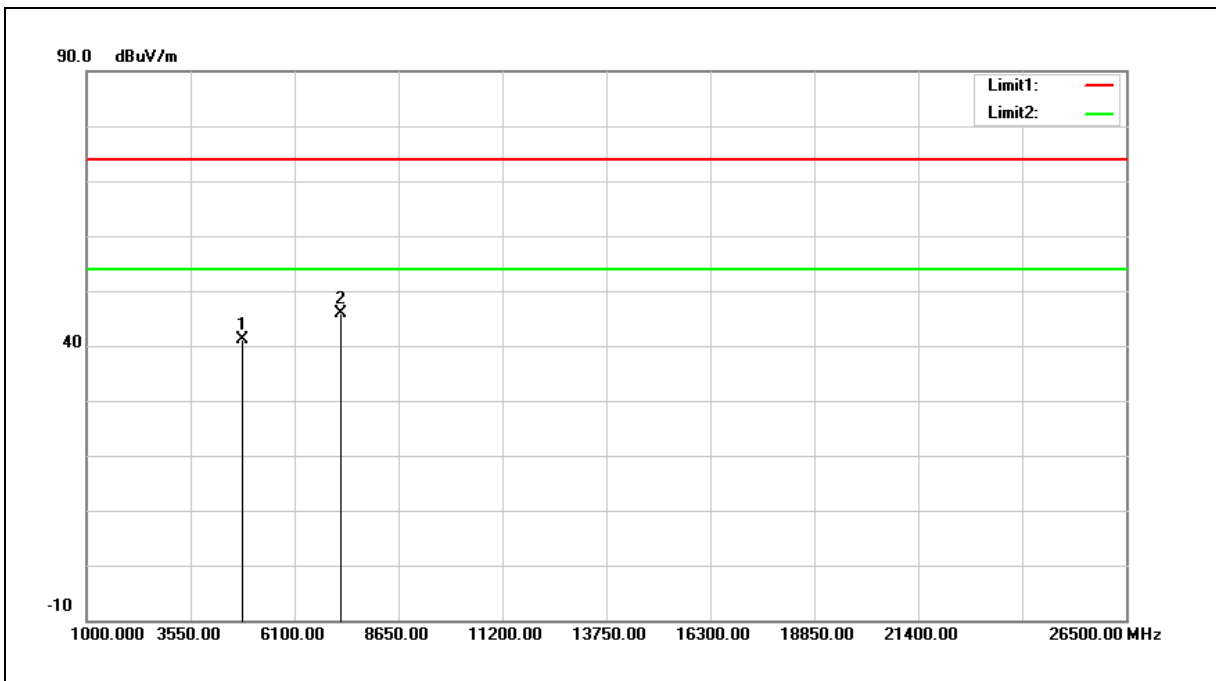

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.65	5.57	41.22	74.00	-32.78	peak
2	7236.000	33.95	11.98	45.93	74.00	-28.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 41.22 = 5.57 + 35.65

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

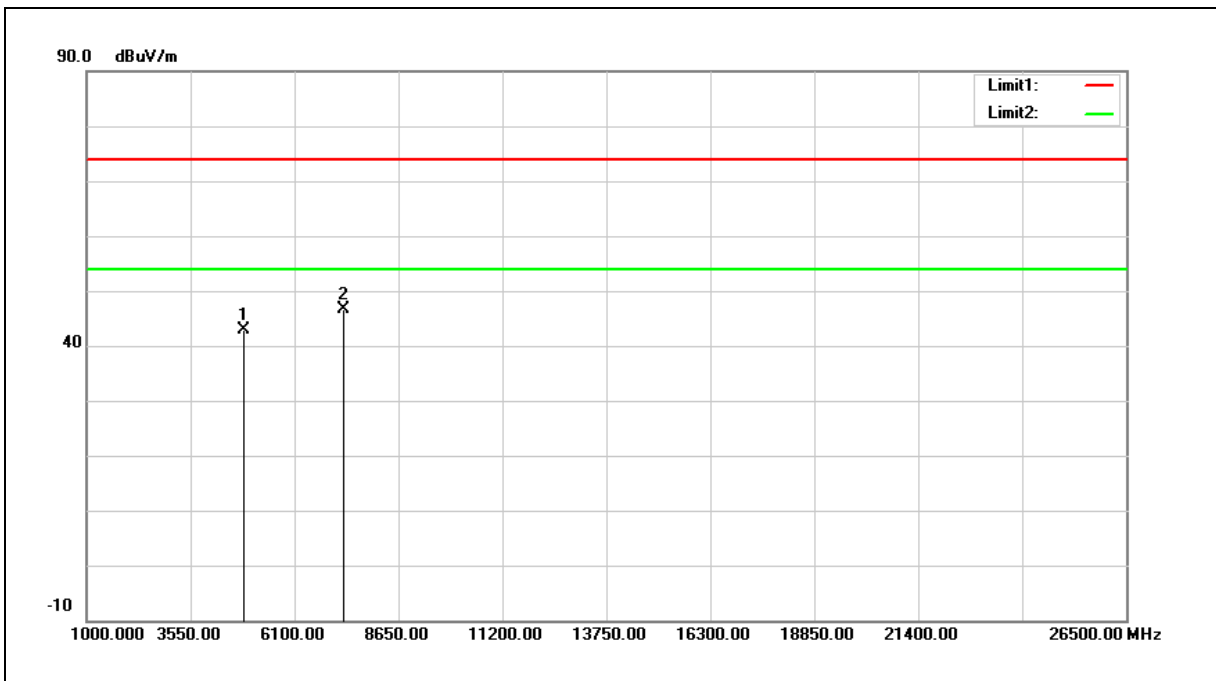

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.11	5.67	42.78	74.00	-31.22	peak
2	7311.000	34.60	12.15	46.75	74.00	-27.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

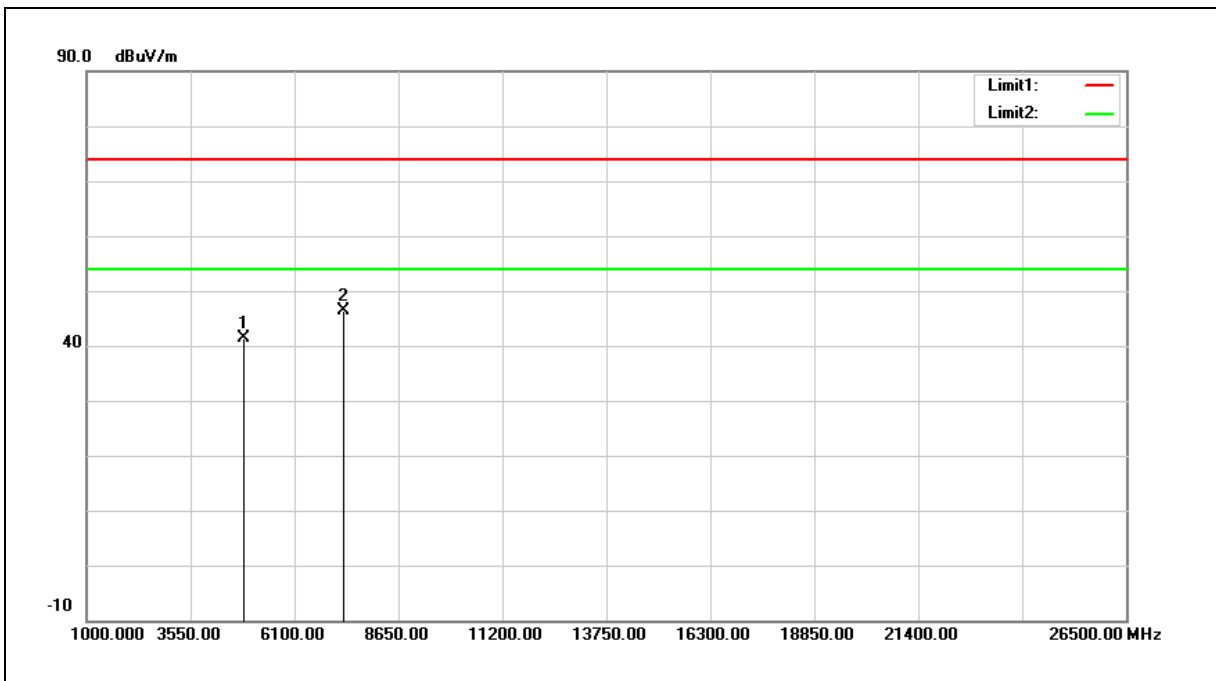

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.68	5.67	41.35	74.00	-32.65	peak
2	7311.000	34.32	12.15	46.47	74.00	-27.53	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

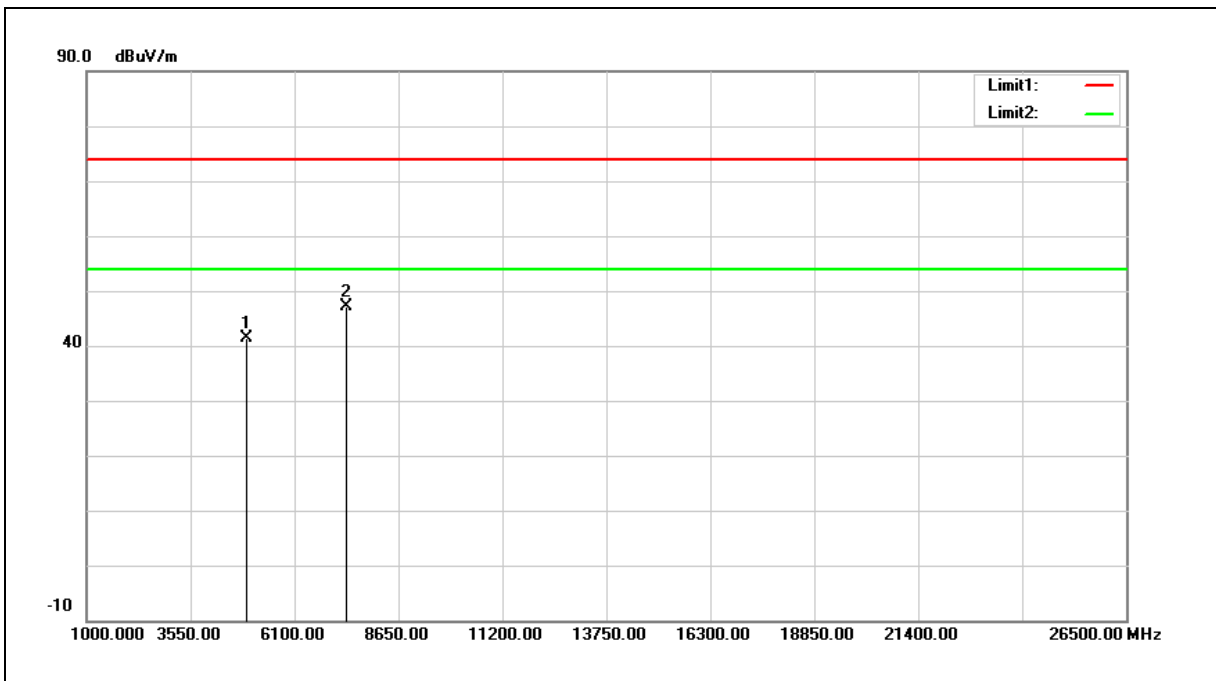


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.72	5.77	41.49	74.00	-32.51	peak
2	7386.000	34.81	12.33	47.14	74.00	-26.86	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

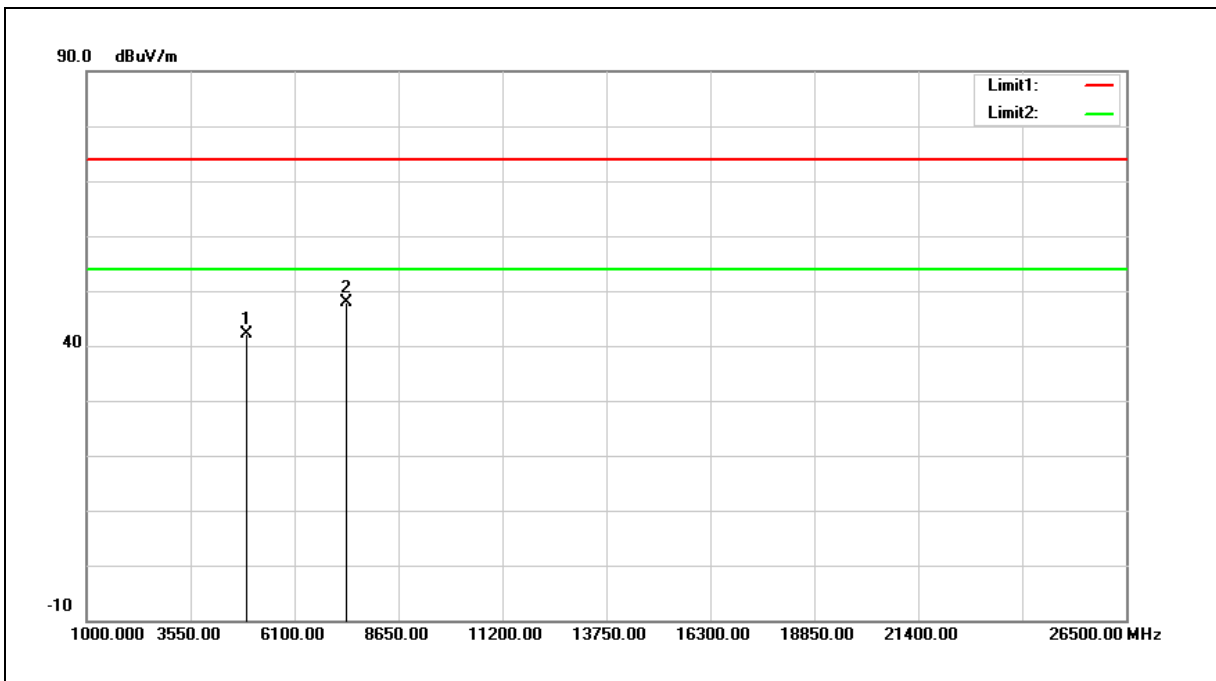


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.30	5.77	42.07	74.00	-31.93	peak
2	7386.000	35.65	12.33	47.98	74.00	-26.02	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

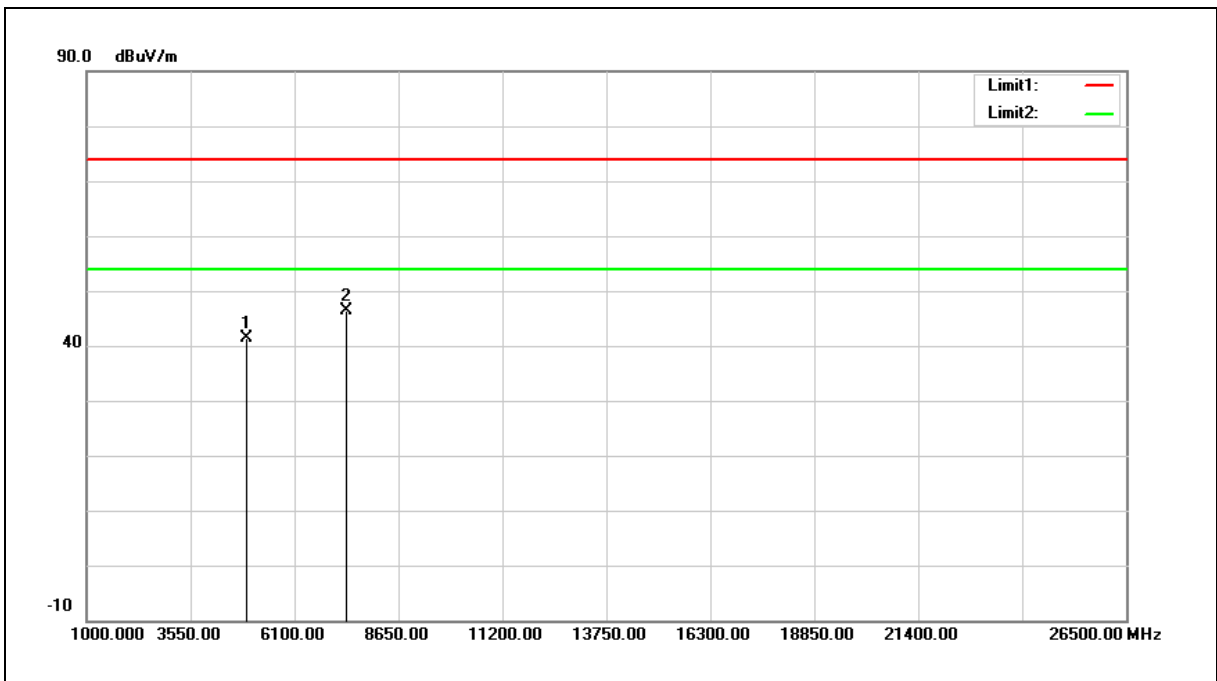

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.66	5.77	41.43	74.00	-32.57	peak
2	7386.000	33.93	12.33	46.26	74.00	-27.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

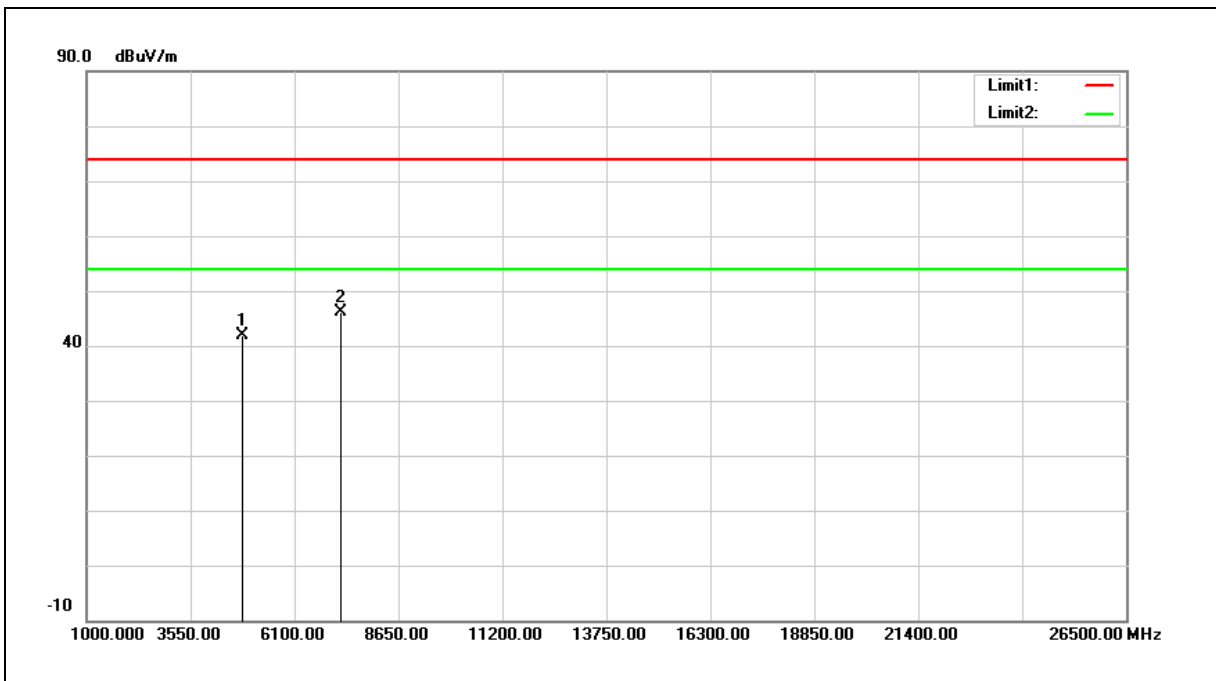

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.39	5.57	41.96	74.00	-32.04	peak
2	7236.000	34.17	11.98	46.15	74.00	-27.85	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

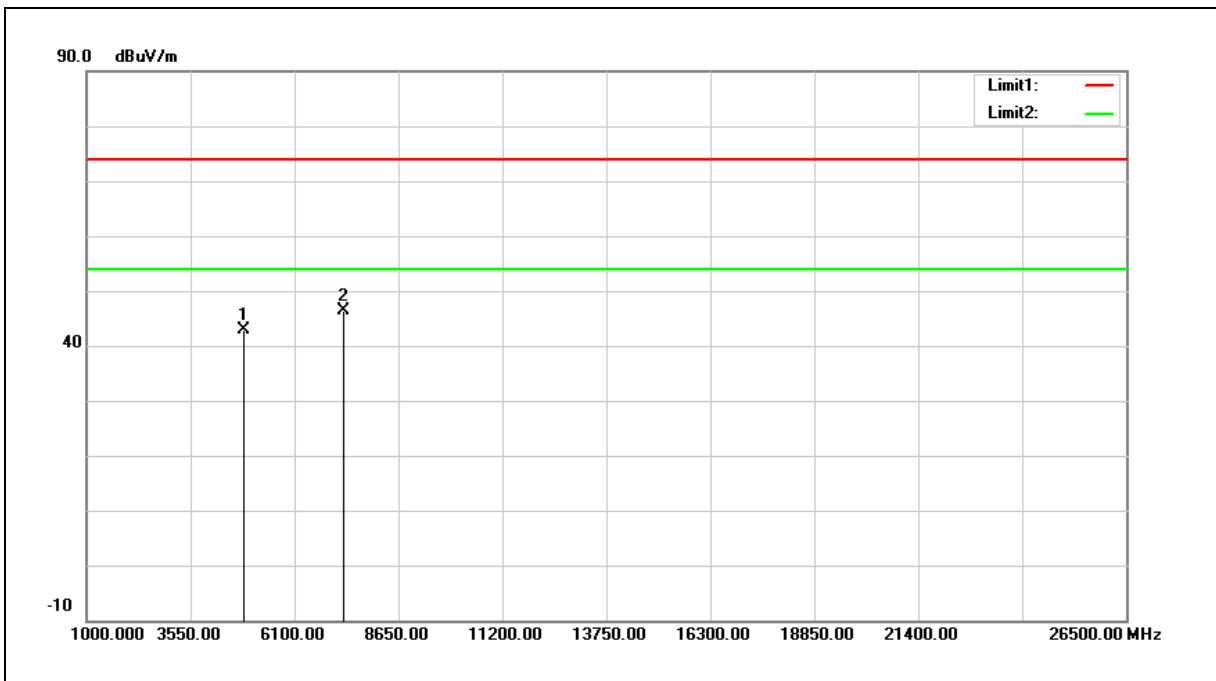


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.10	5.67	42.77	74.00	-31.23	peak
2	7311.000	34.14	12.15	46.29	74.00	-27.71	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

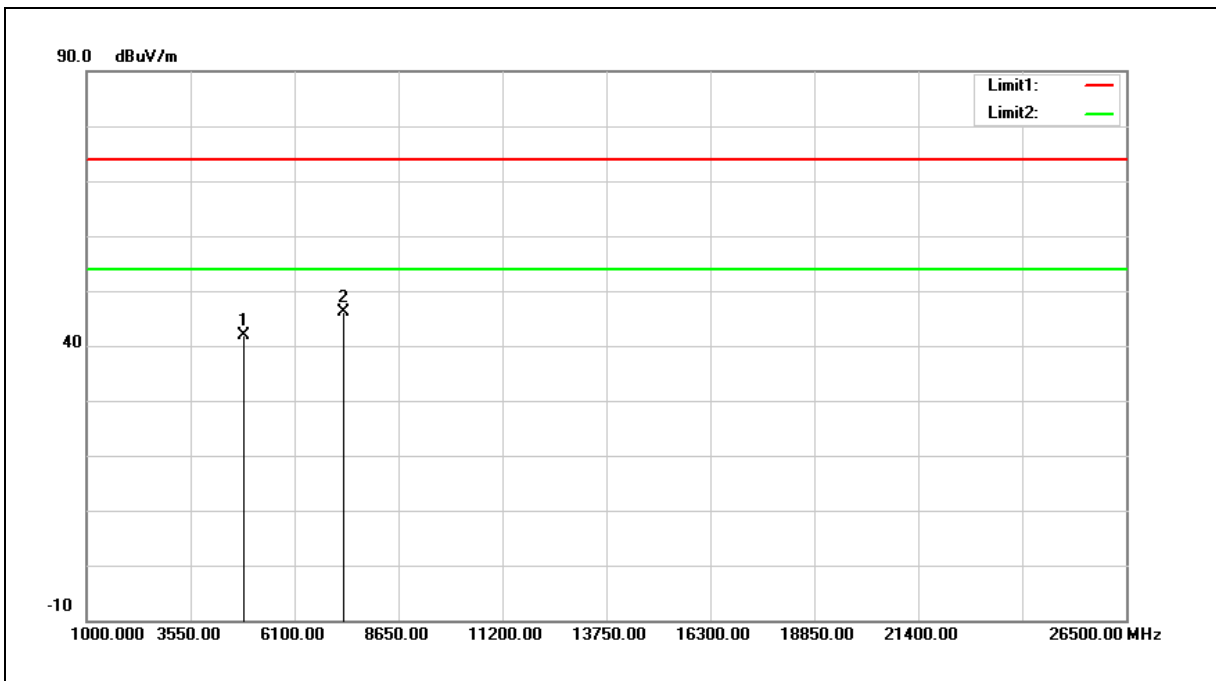

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.15	5.67	41.82	74.00	-32.18	peak
2	7311.000	33.99	12.15	46.14	74.00	-27.86	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

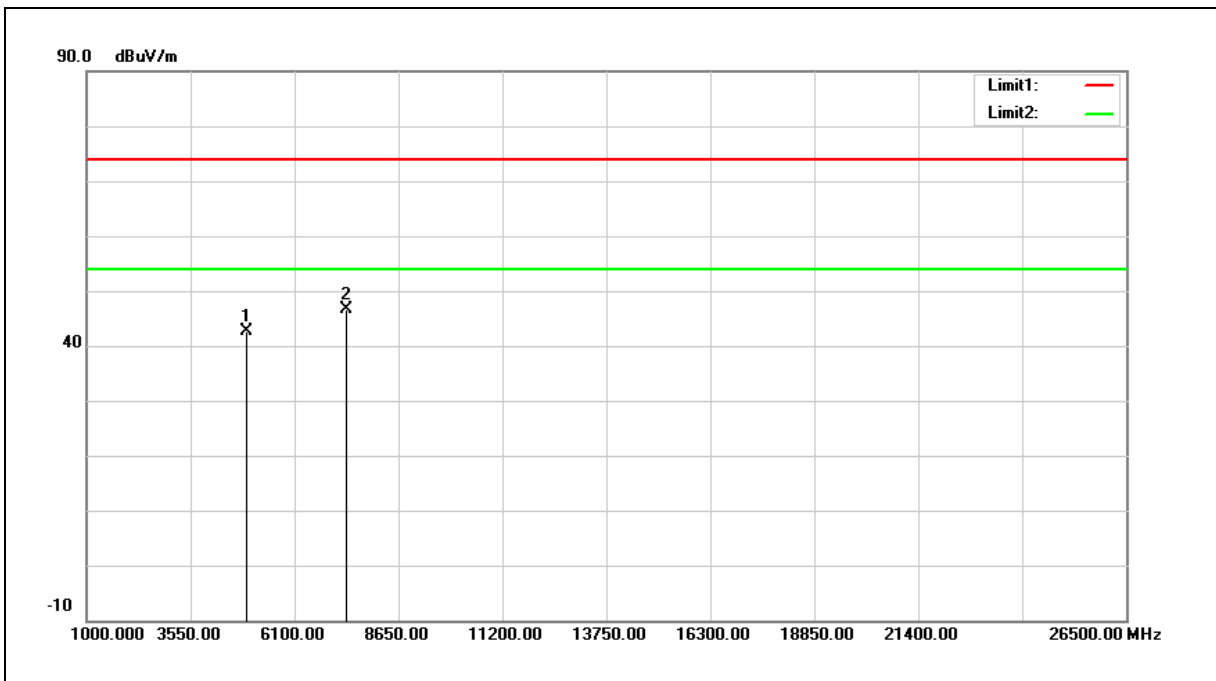

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.95	5.77	42.72	74.00	-31.28	peak
2	7386.000	34.31	12.33	46.64	74.00	-27.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

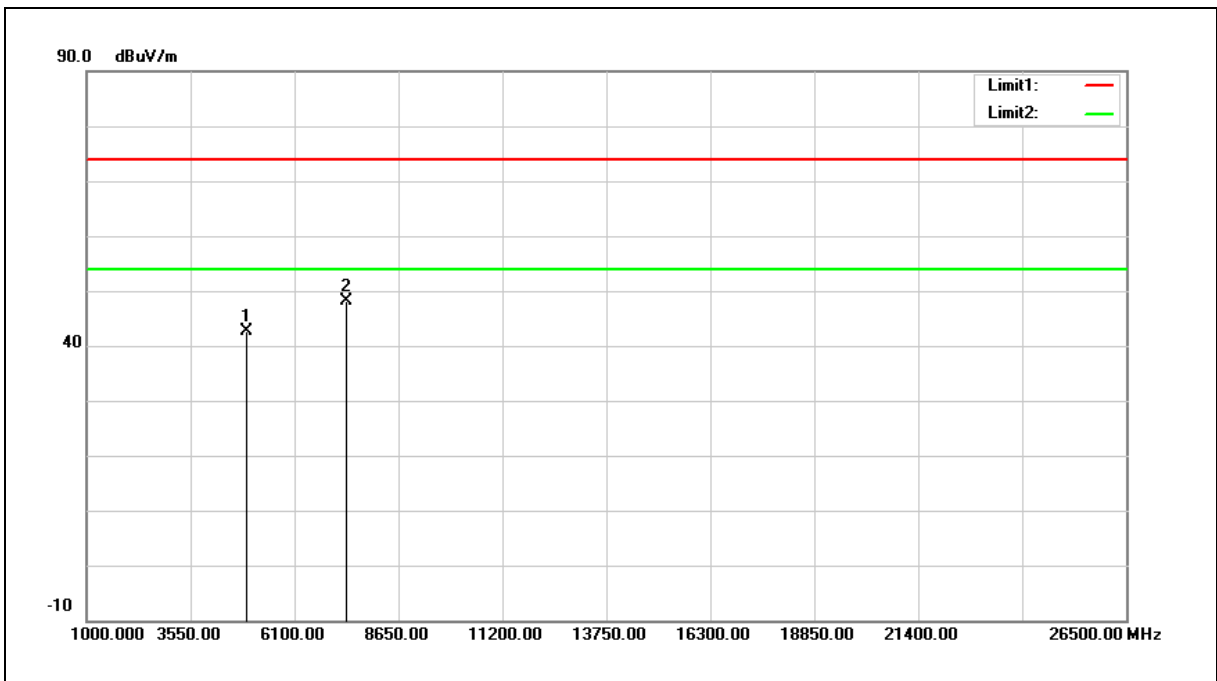

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.78	5.77	42.55	74.00	-31.45	peak
2	7386.000	35.87	12.33	48.20	74.00	-25.80	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

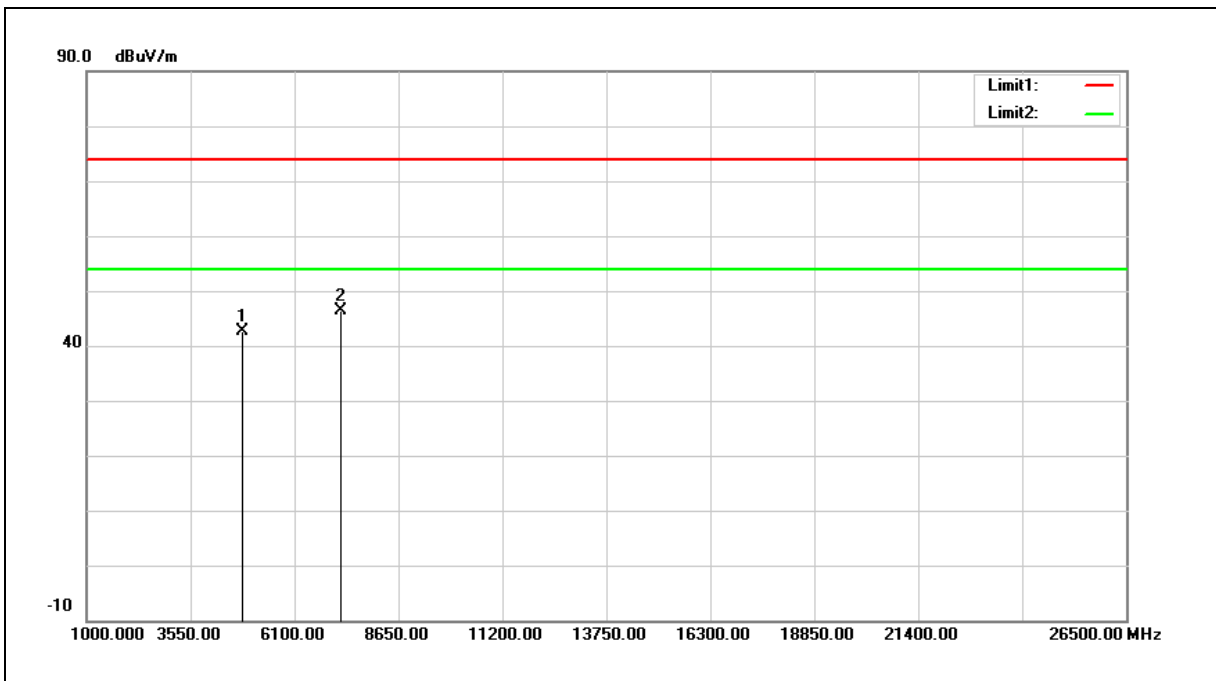

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.03	5.57	42.60	74.00	-31.40	peak
2	7236.000	34.36	11.98	46.34	74.00	-27.66	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

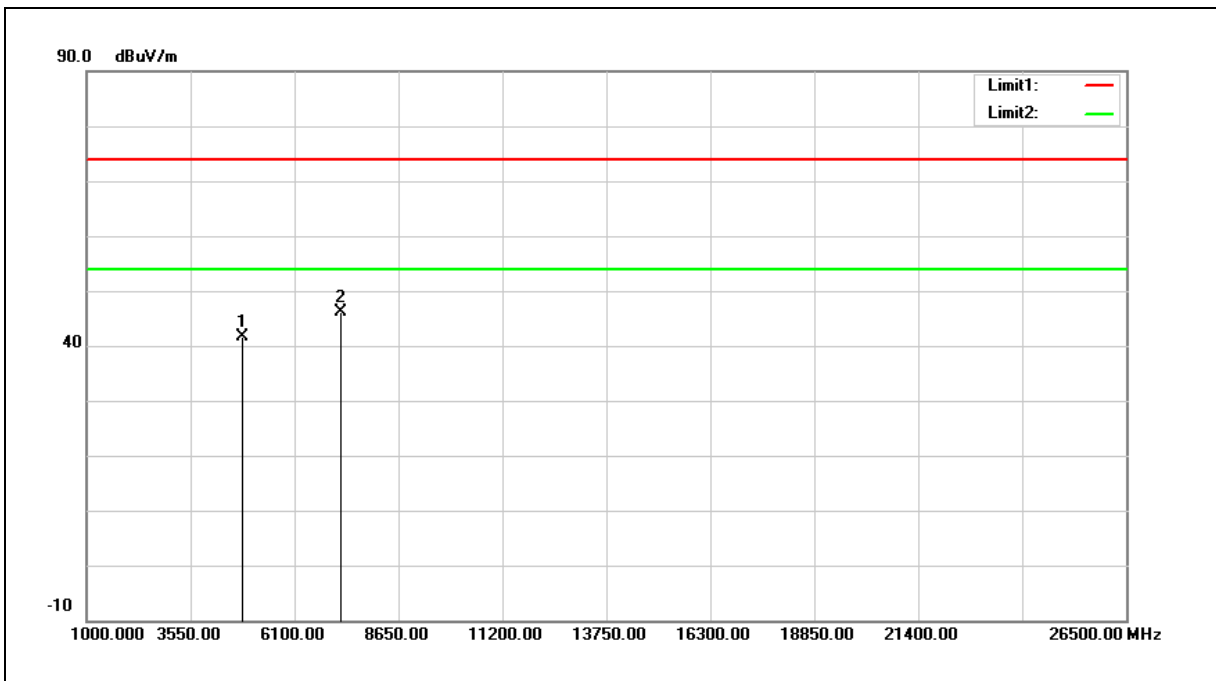

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.09	5.57	41.66	74.00	-32.34	peak
2	7236.000	34.17	11.98	46.15	74.00	-27.85	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

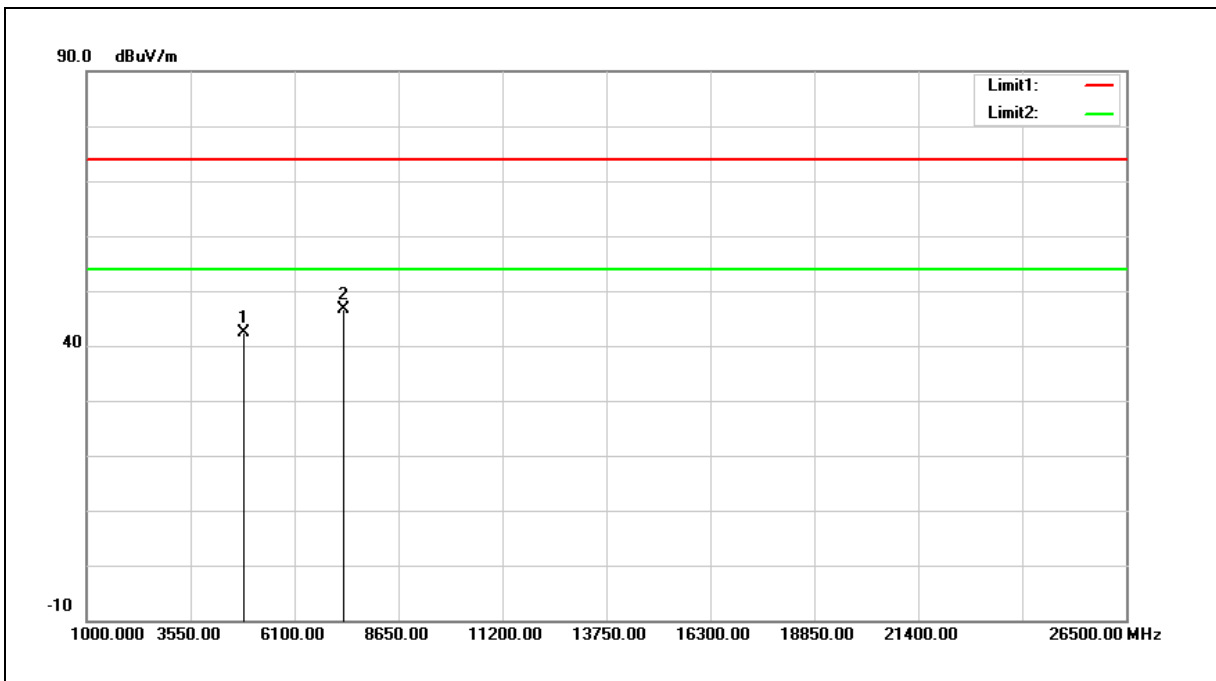


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.69	5.67	42.36	74.00	-31.64	peak
2	7311.000	34.51	12.15	46.66	74.00	-27.34	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

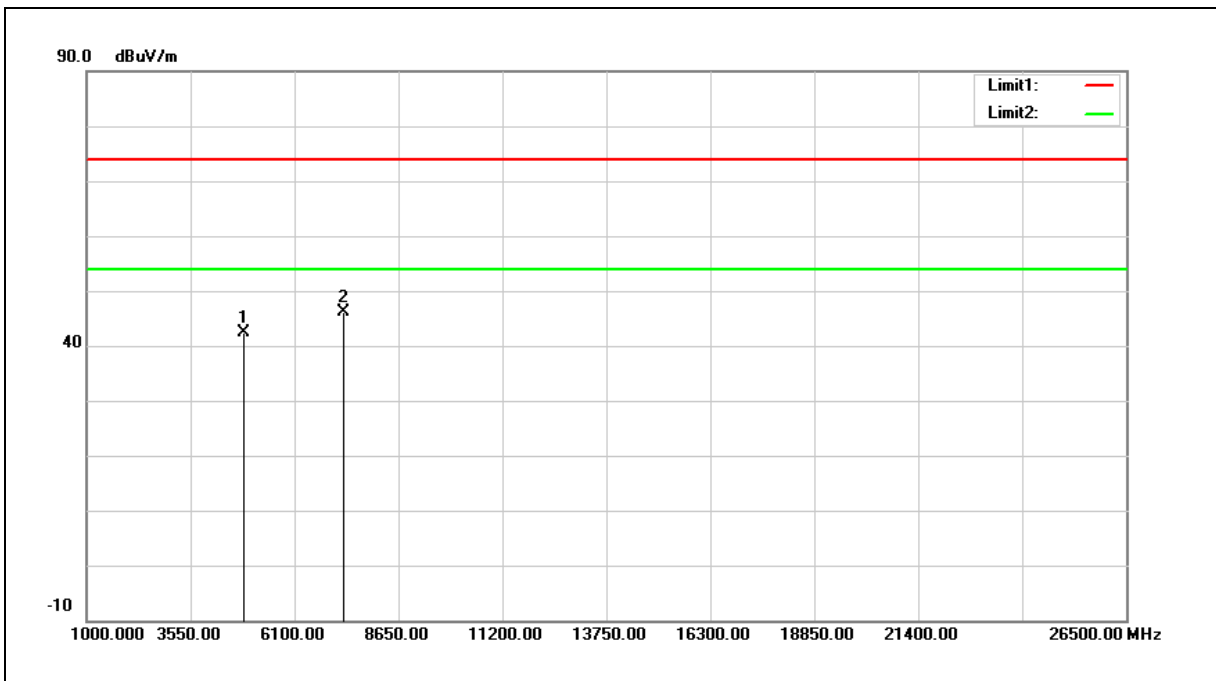

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.63	5.67	42.30	74.00	-31.70	peak
2	7311.000	33.88	12.15	46.03	74.00	-27.97	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

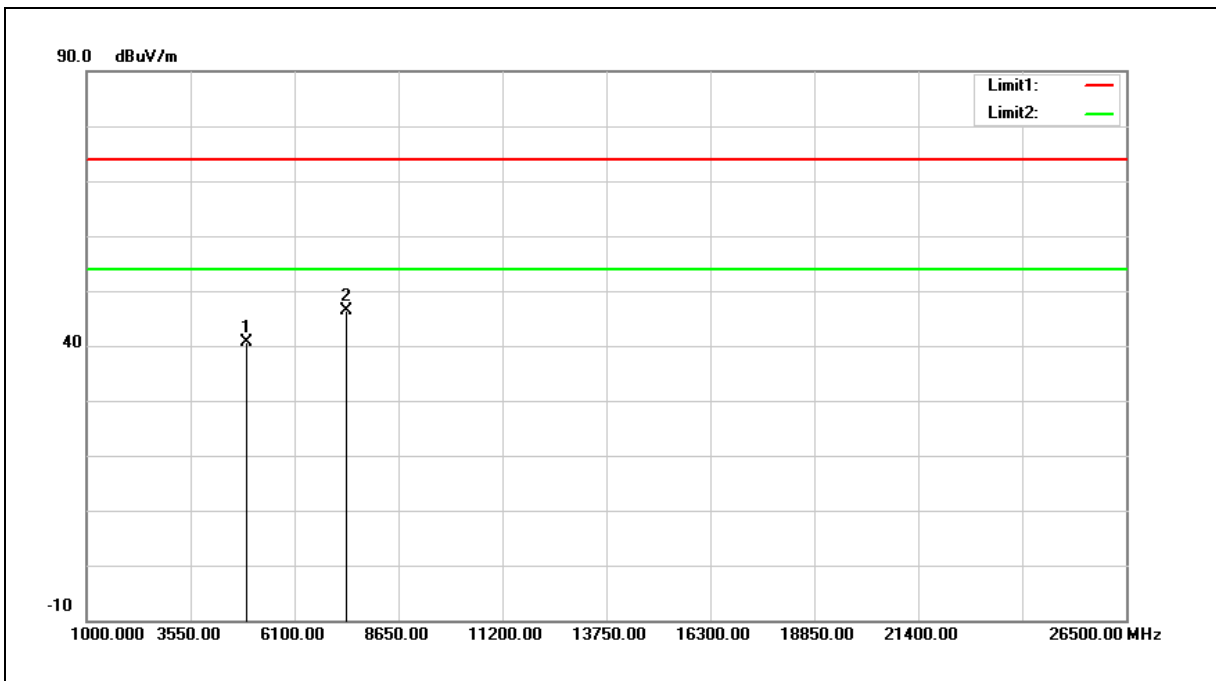

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.81	5.77	40.58	74.00	-33.42	peak
2	7386.000	34.17	12.33	46.50	74.00	-27.50	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

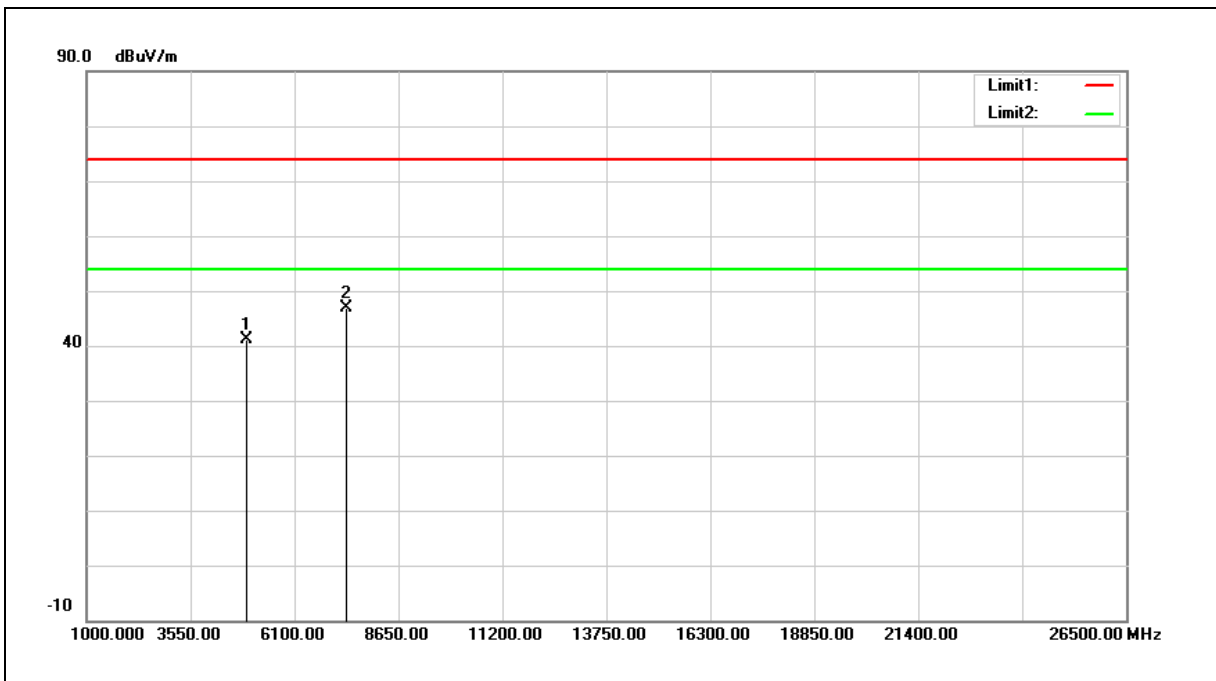


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.33	5.77	41.10	74.00	-32.90	peak
2	7386.000	34.59	12.33	46.92	74.00	-27.08	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

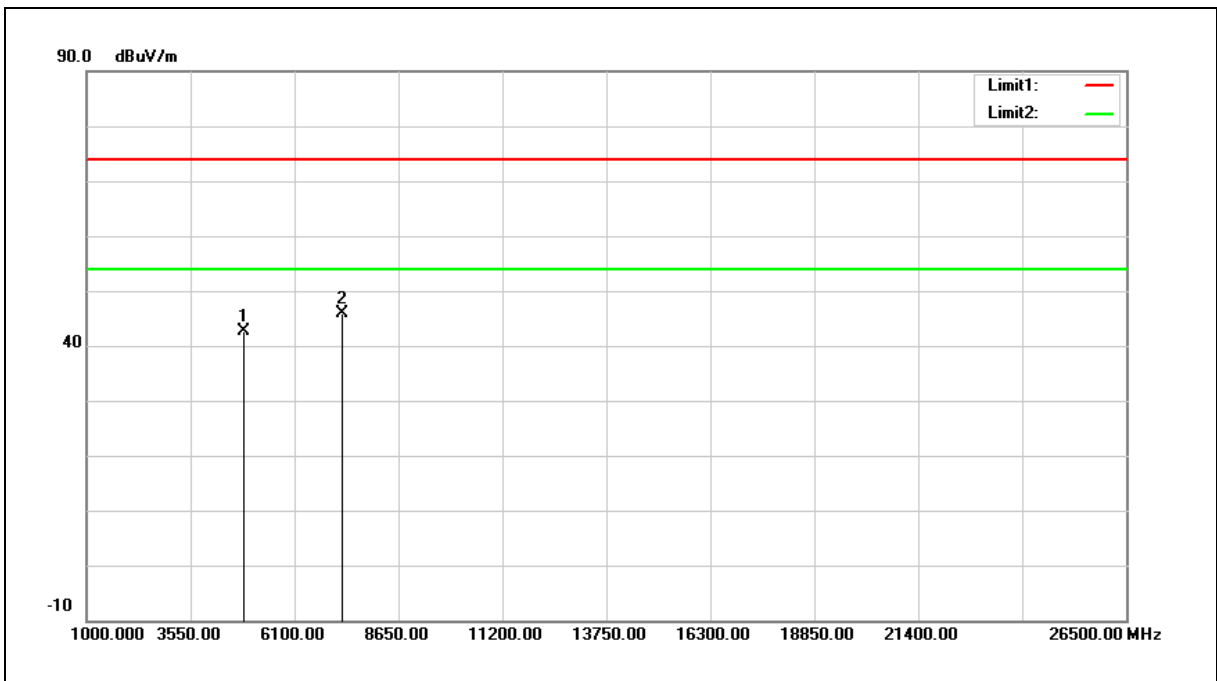

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.00	5.62	42.62	74.00	-31.38	peak
2	7266.000	33.81	12.04	45.85	74.00	-28.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

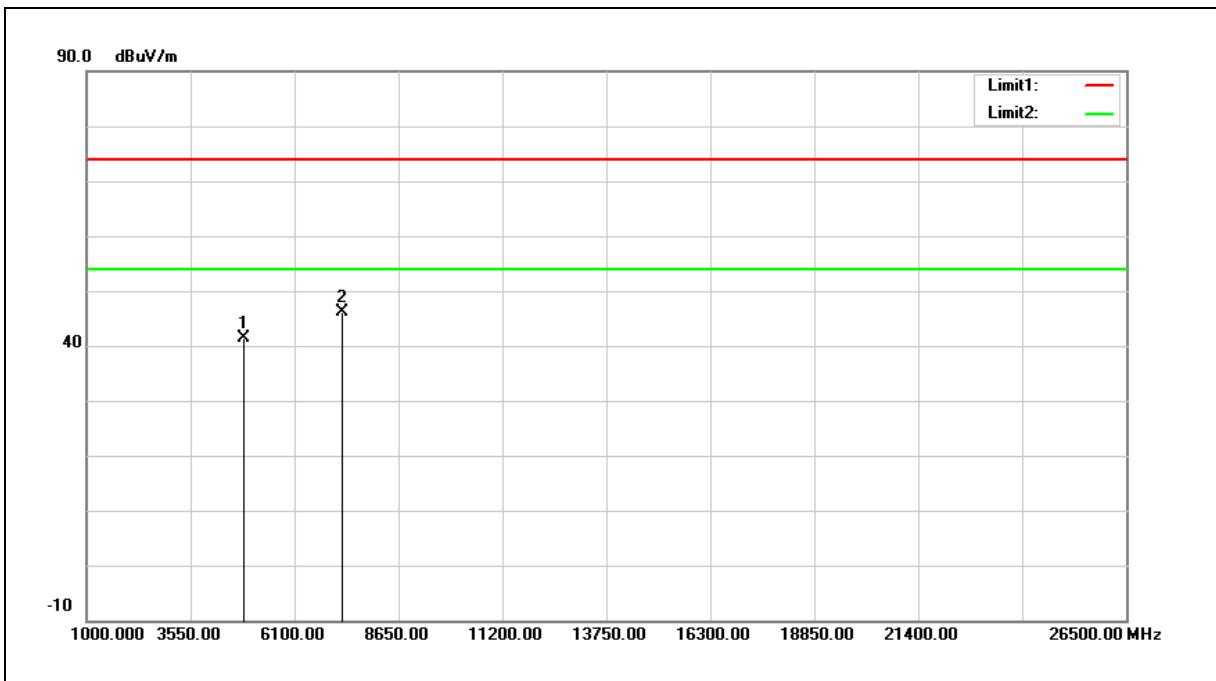


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	35.80	5.62	41.42	74.00	-32.58	peak
2	7266.000	34.15	12.04	46.19	74.00	-27.81	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

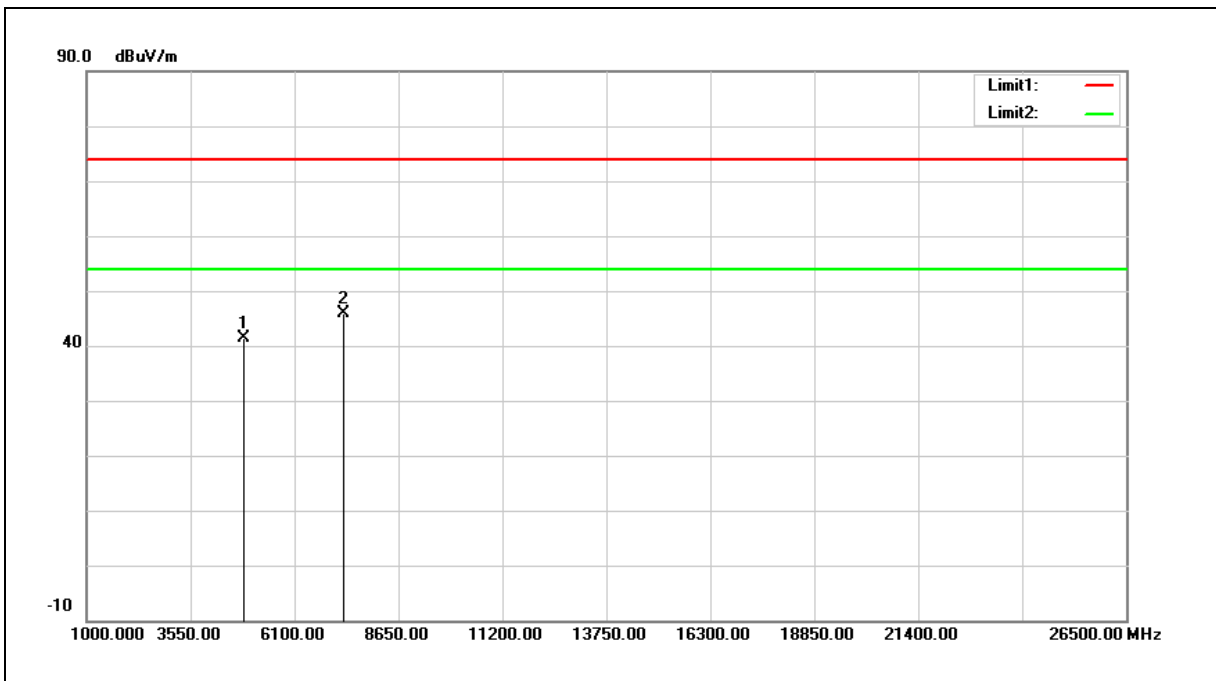

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.72	5.67	41.39	74.00	-32.61	peak
2	7311.000	33.76	12.15	45.91	74.00	-28.09	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

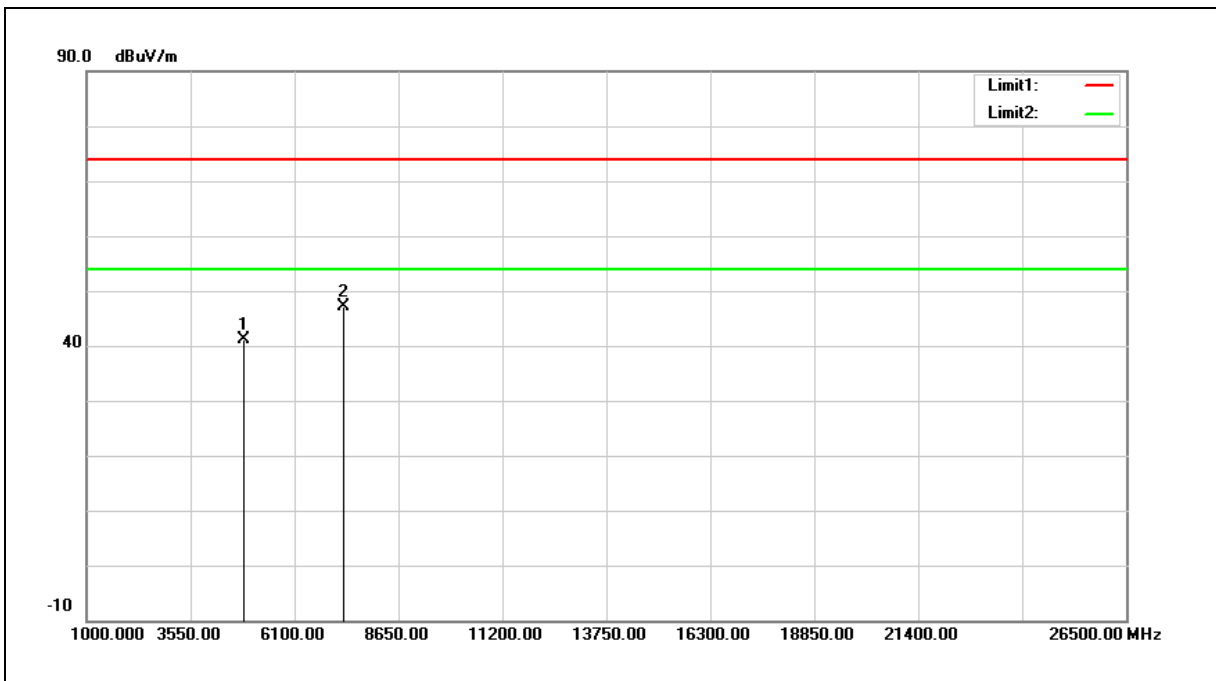


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.58	5.67	41.25	74.00	-32.75	peak
2	7311.000	35.02	12.15	47.17	74.00	-26.83	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

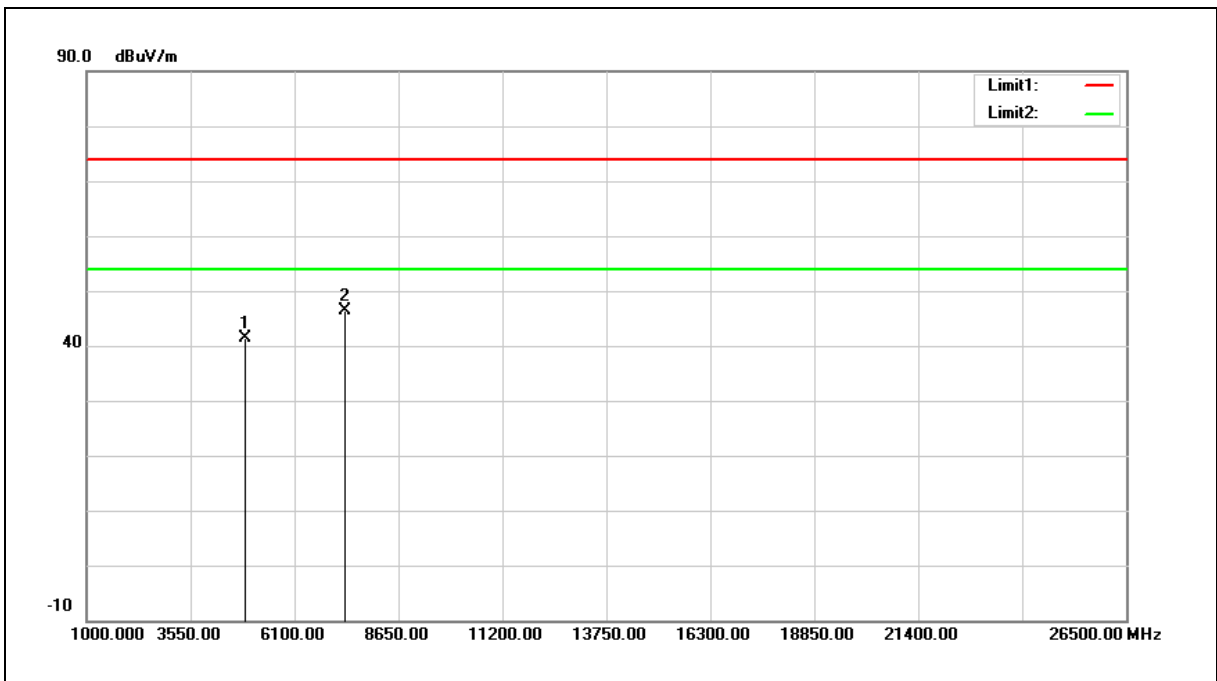

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.68	5.73	41.41	74.00	-32.59	peak
2	7356.000	34.19	12.25	46.44	74.00	-27.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

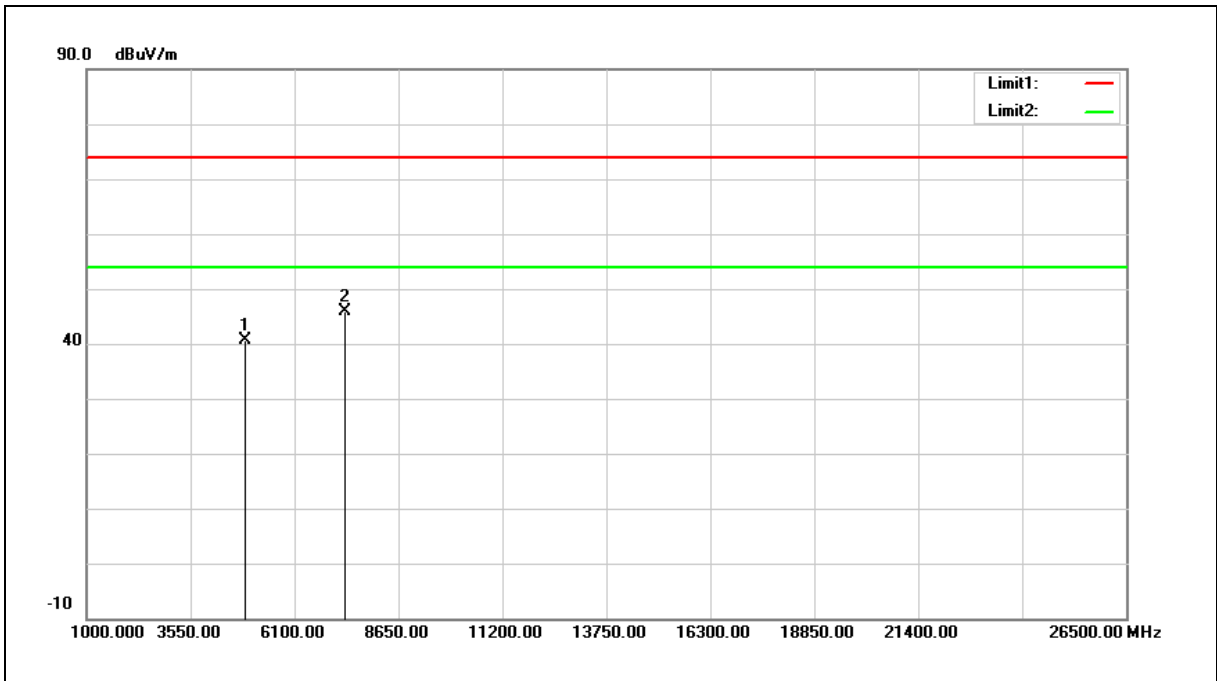

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	34.96	5.73	40.69	74.00	-33.31	peak
2	7356.000	33.51	12.25	45.76	74.00	-28.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Model: PA300-E: External antenna

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

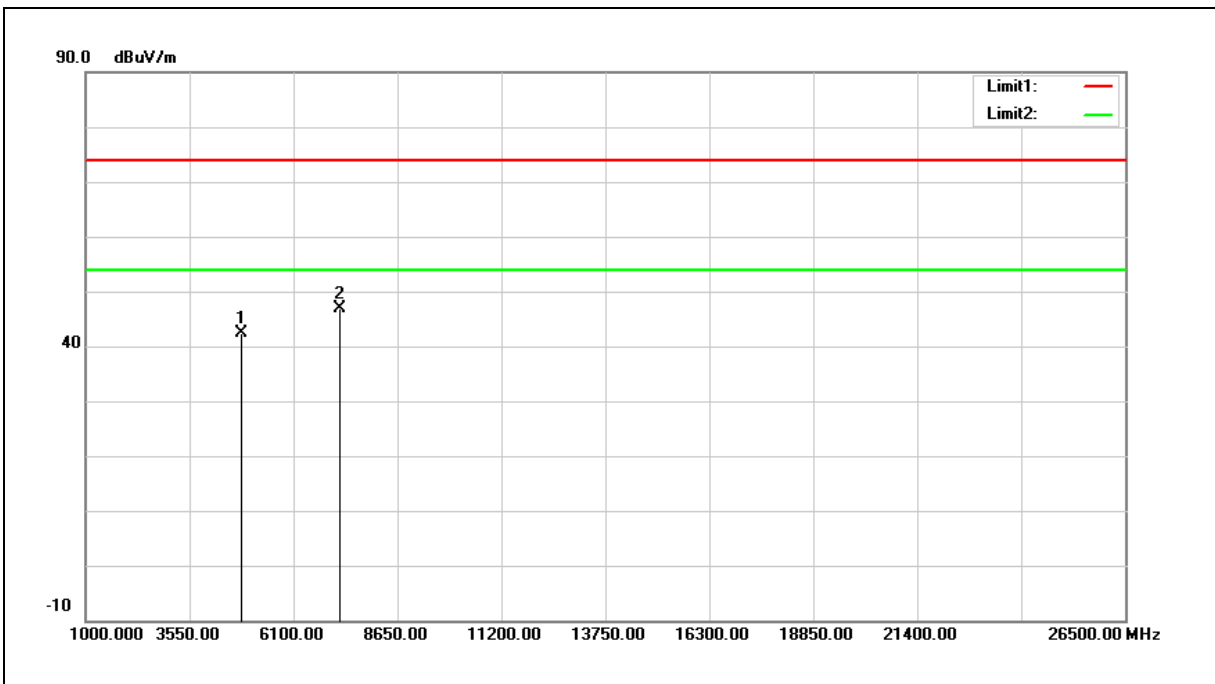


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.77	5.57	42.34	74.00	-31.66	peak
2	7236.000	34.82	11.98	46.80	74.00	-27.20	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

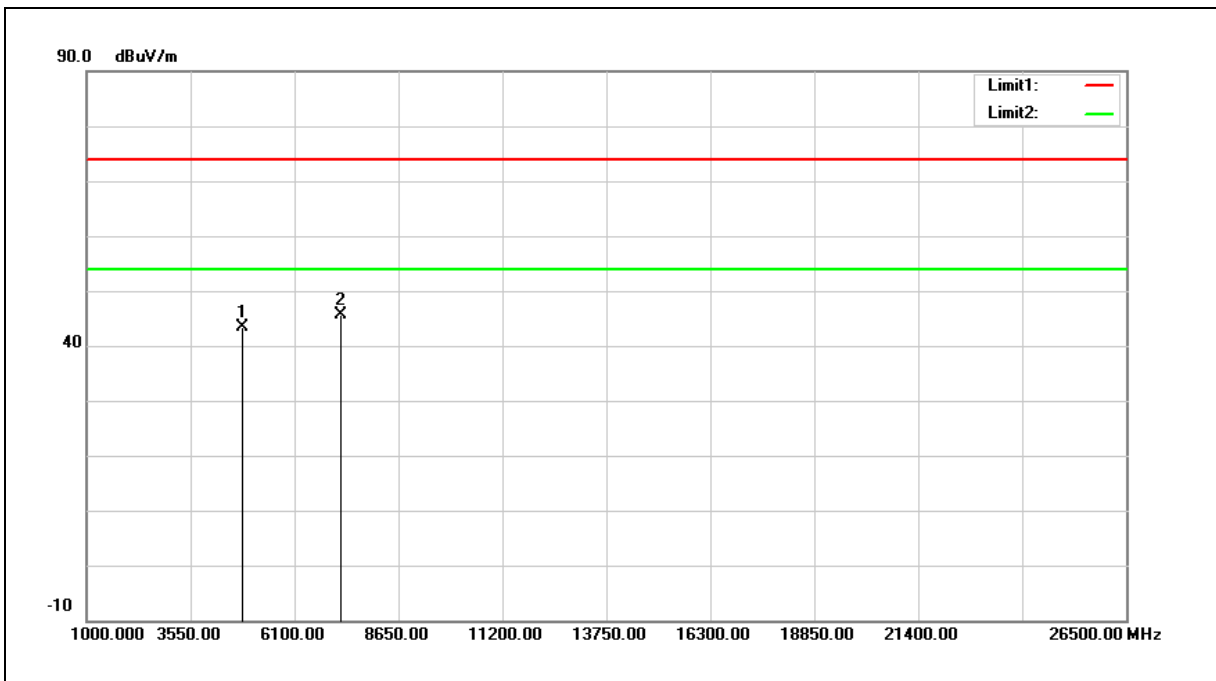


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.74	5.57	43.31	74.00	-30.69	peak
2	7236.000	33.59	11.98	45.57	74.00	-28.43	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

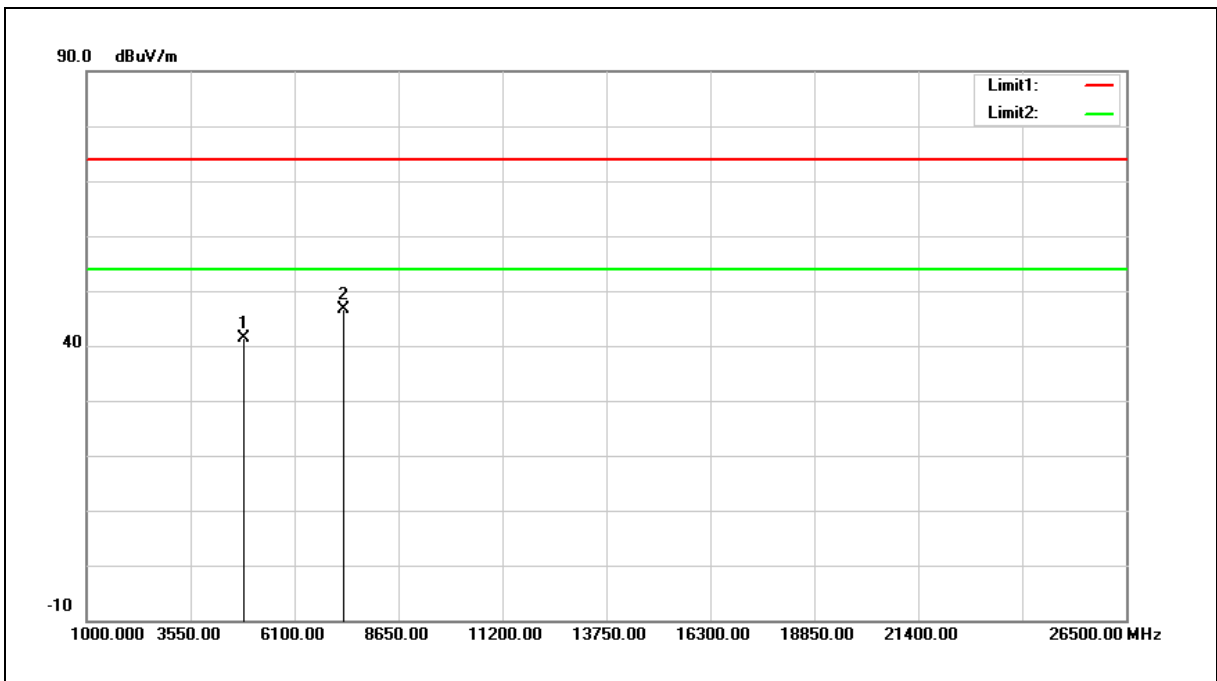

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.83	5.67	41.50	74.00	-32.50	peak
2	7311.000	34.52	12.15	46.67	74.00	-27.33	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

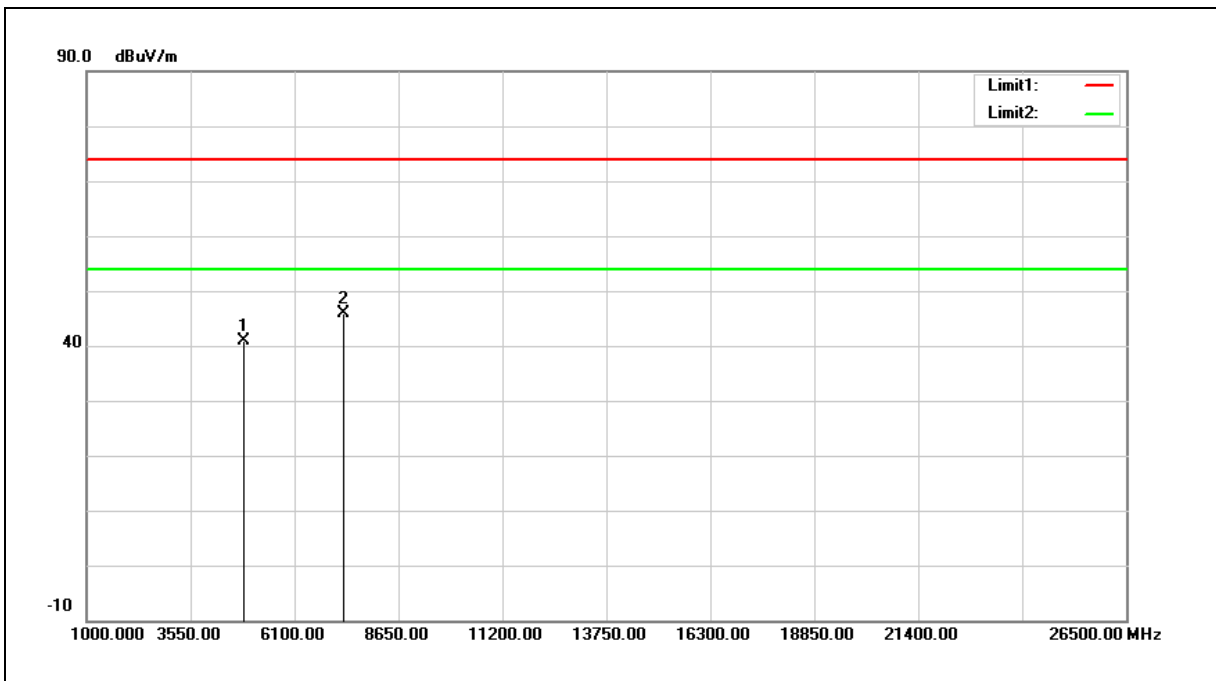

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.25	5.67	40.92	74.00	-33.08	peak
2	7311.000	33.83	12.15	45.98	74.00	-28.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

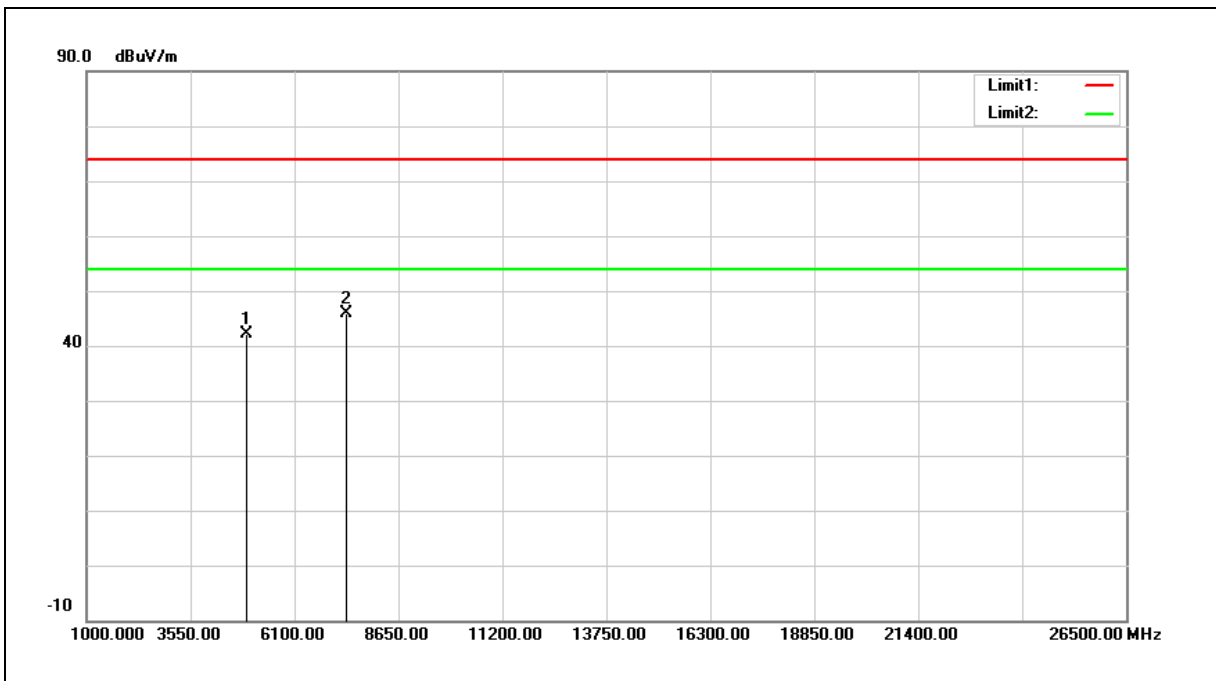


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.32	5.77	42.09	74.00	-31.91	peak
2	7386.000	33.53	12.33	45.86	74.00	-28.14	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

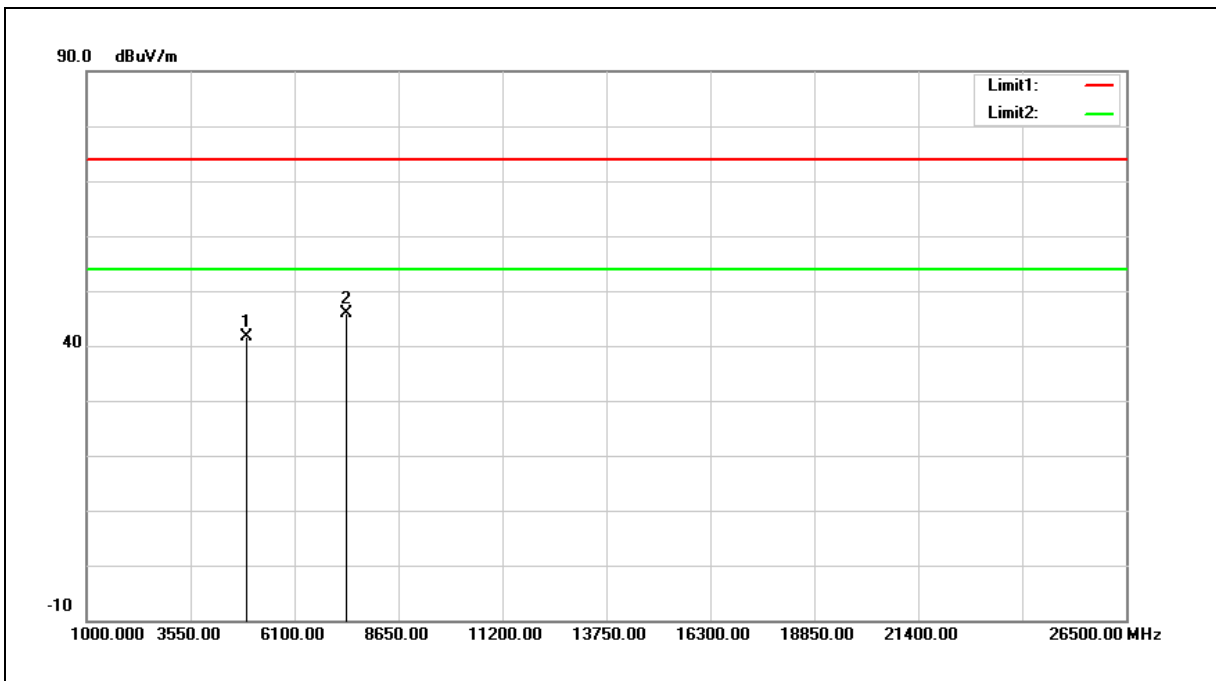


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.97	5.77	41.74	74.00	-32.26	peak
2	7386.000	33.61	12.33	45.94	74.00	-28.06	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

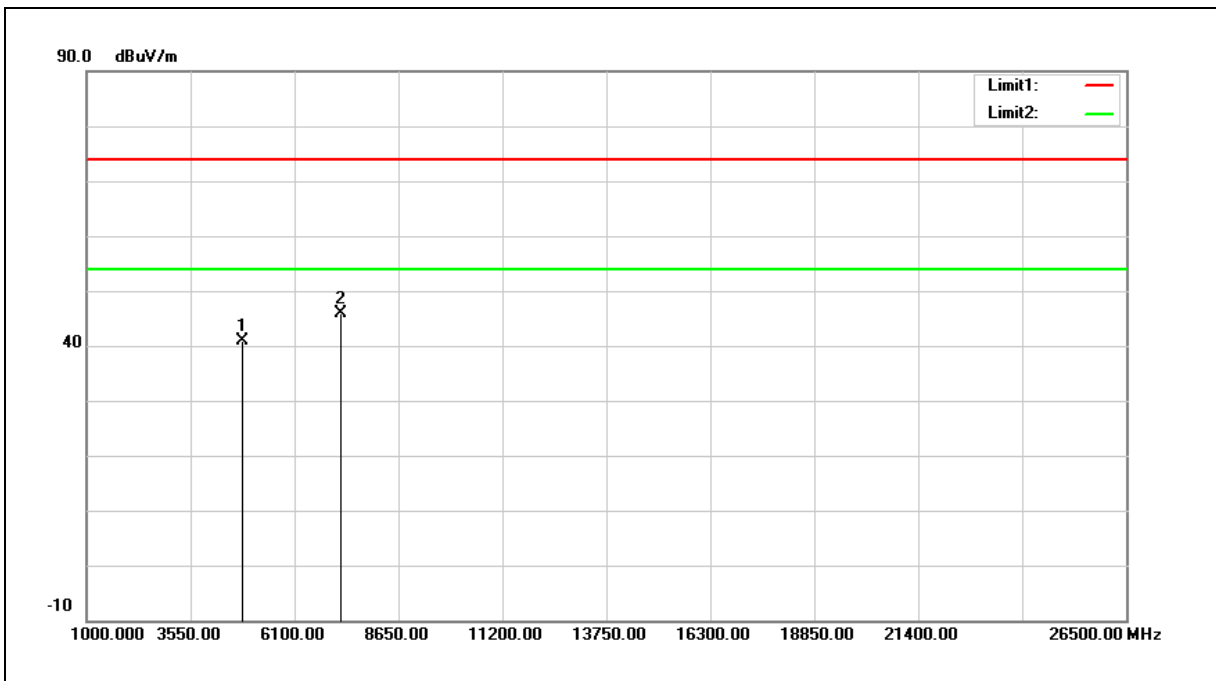

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.27	5.57	40.84	74.00	-33.16	peak
2	7236.000	33.86	11.98	45.84	74.00	-28.16	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

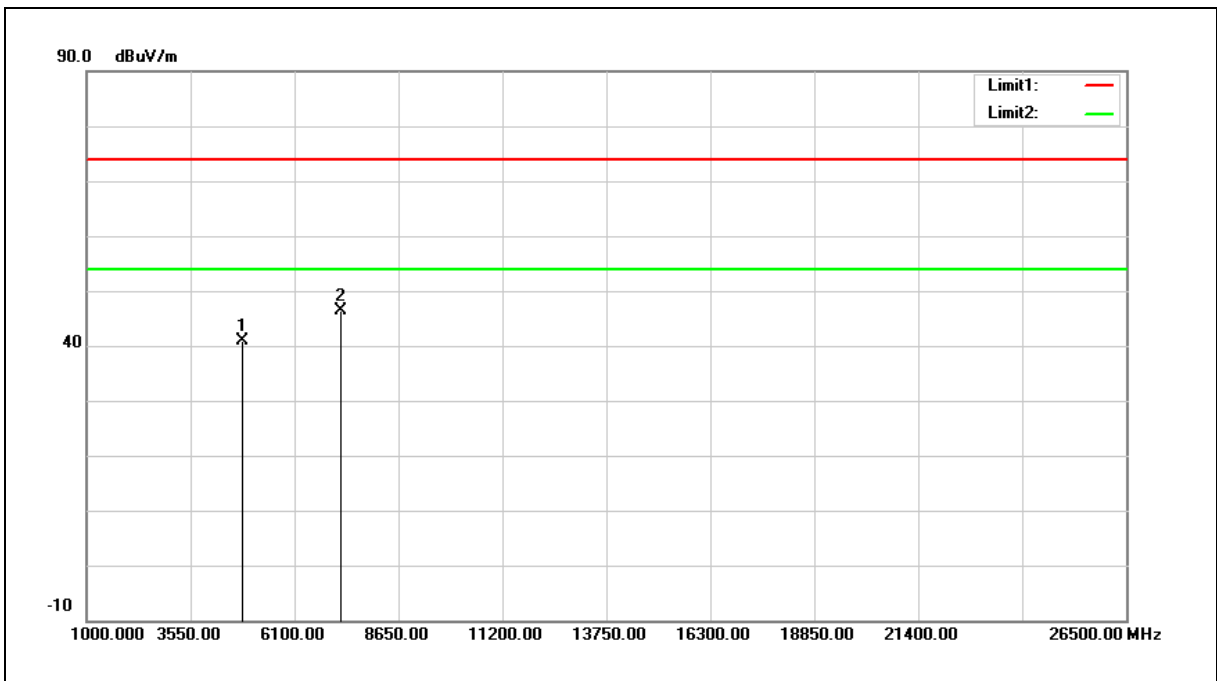

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.20	5.57	40.77	74.00	-33.23	peak
2	7236.000	34.38	11.98	46.36	74.00	-27.64	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

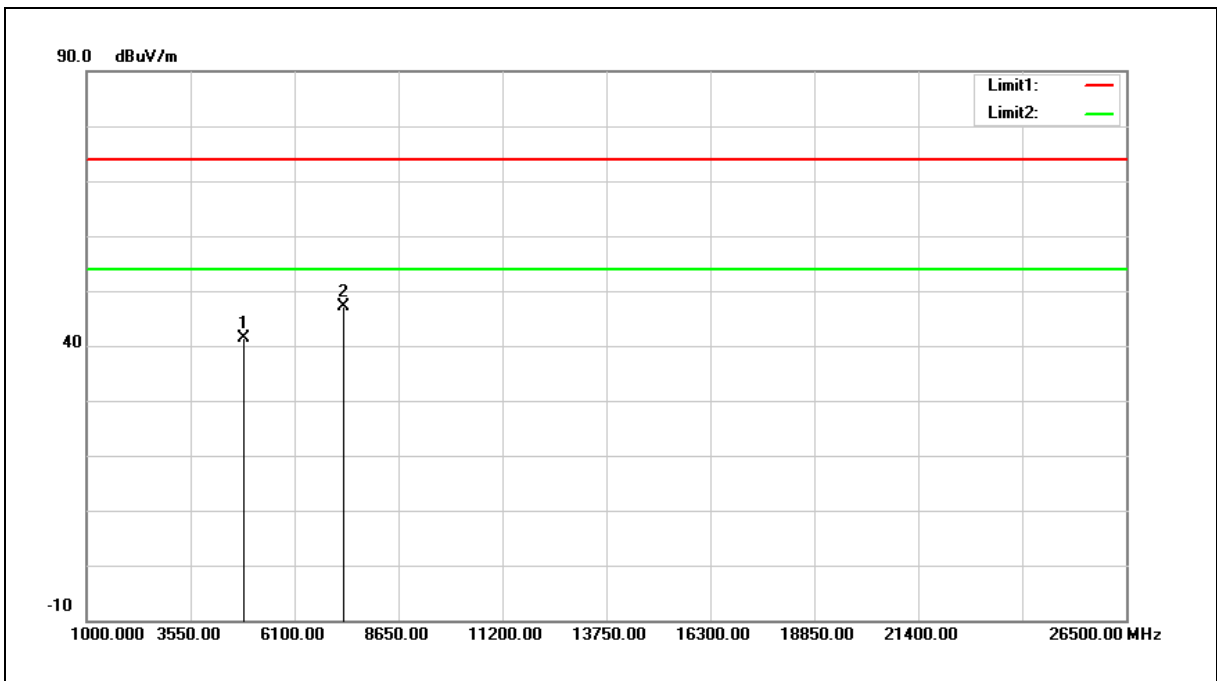

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.65	5.67	41.32	74.00	-32.68	peak
2	7311.000	34.87	12.15	47.02	74.00	-26.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

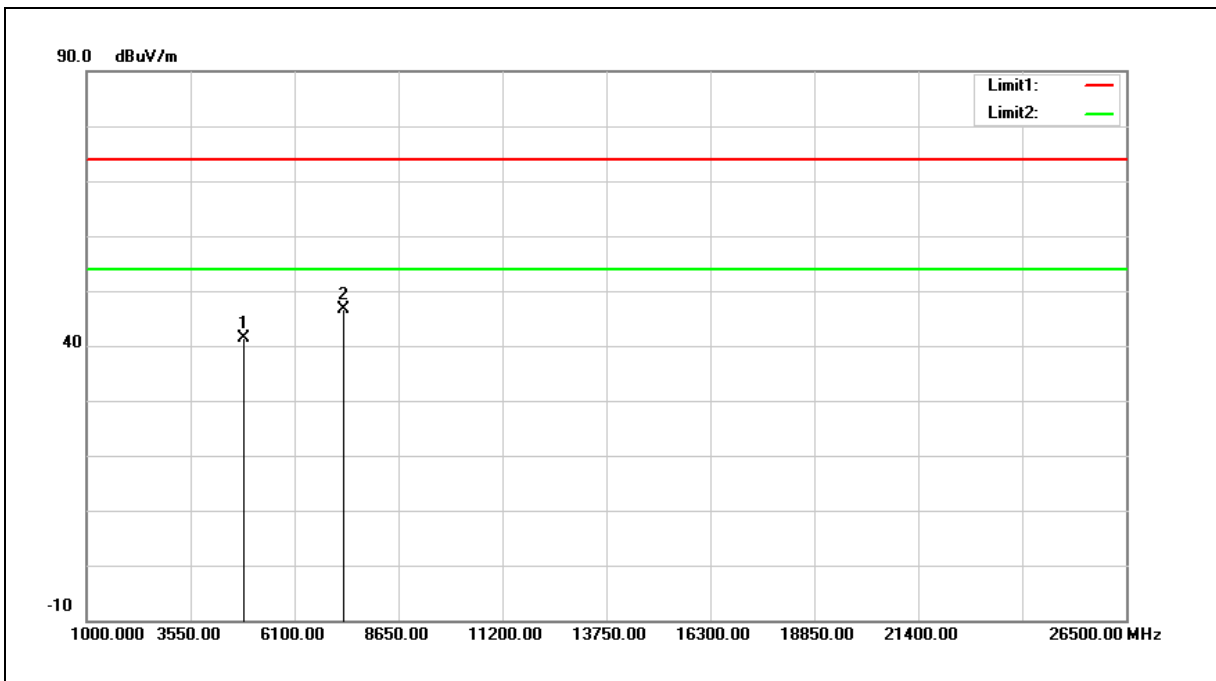


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.72	5.67	41.39	74.00	-32.61	peak
2	7311.000	34.39	12.15	46.54	74.00	-27.46	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

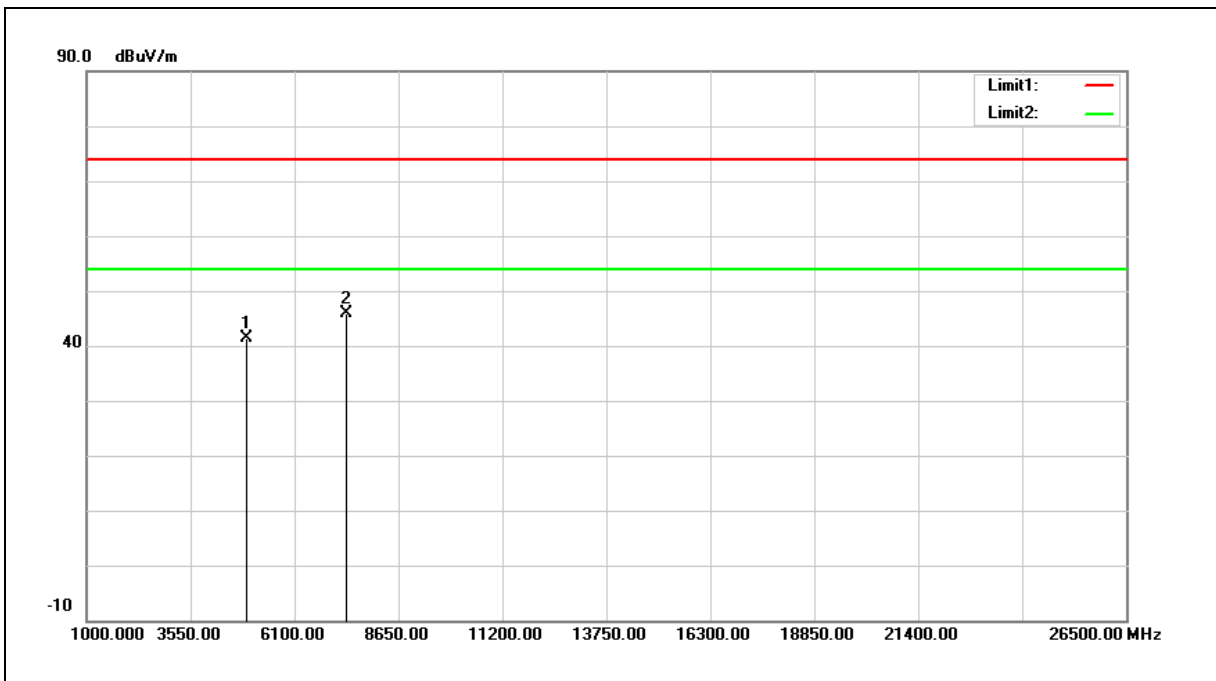

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.64	5.77	41.41	74.00	-32.59	peak
2	7386.000	33.45	12.33	45.78	74.00	-28.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

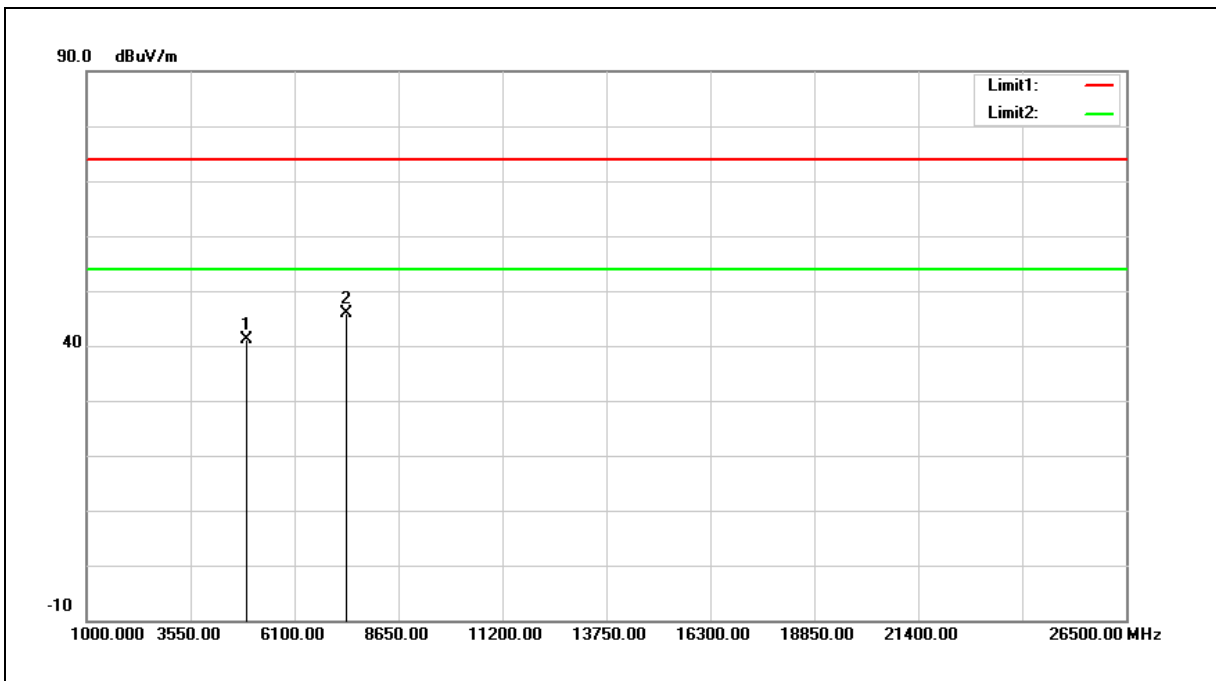

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.40	5.77	41.17	74.00	-32.83	peak
2	7386.000	33.63	12.33	45.96	74.00	-28.04	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

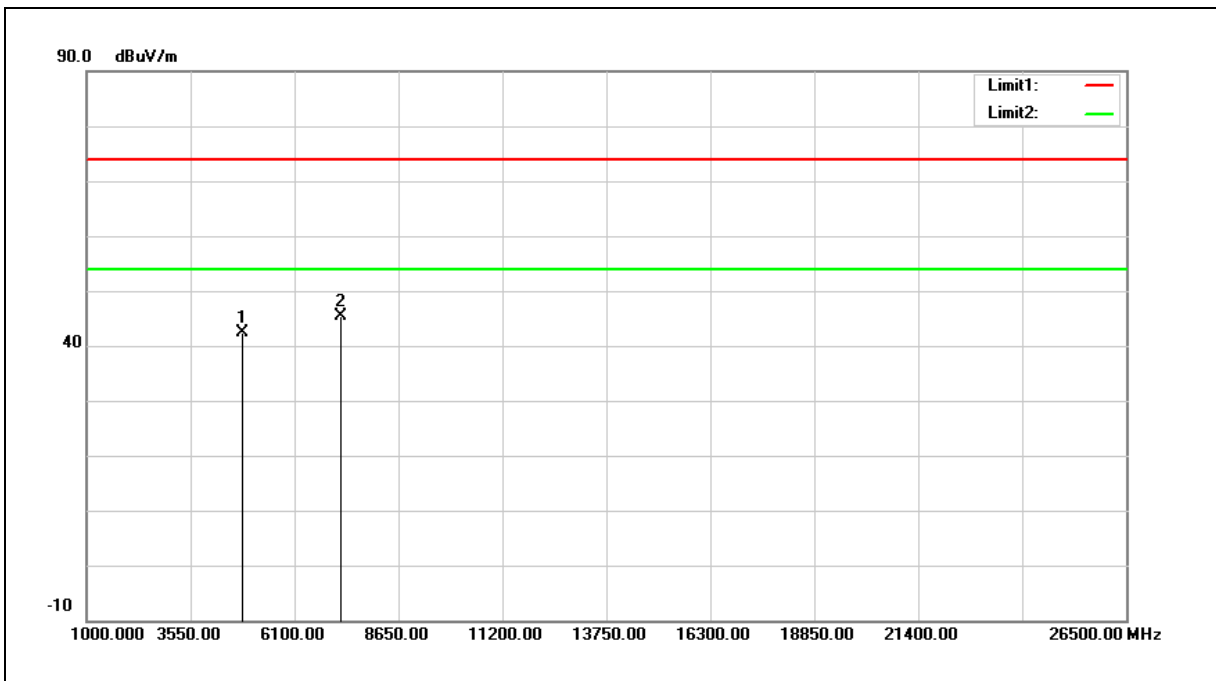


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.70	5.57	42.27	74.00	-31.73	peak
2	7236.000	33.45	11.98	45.43	74.00	-28.57	peak

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

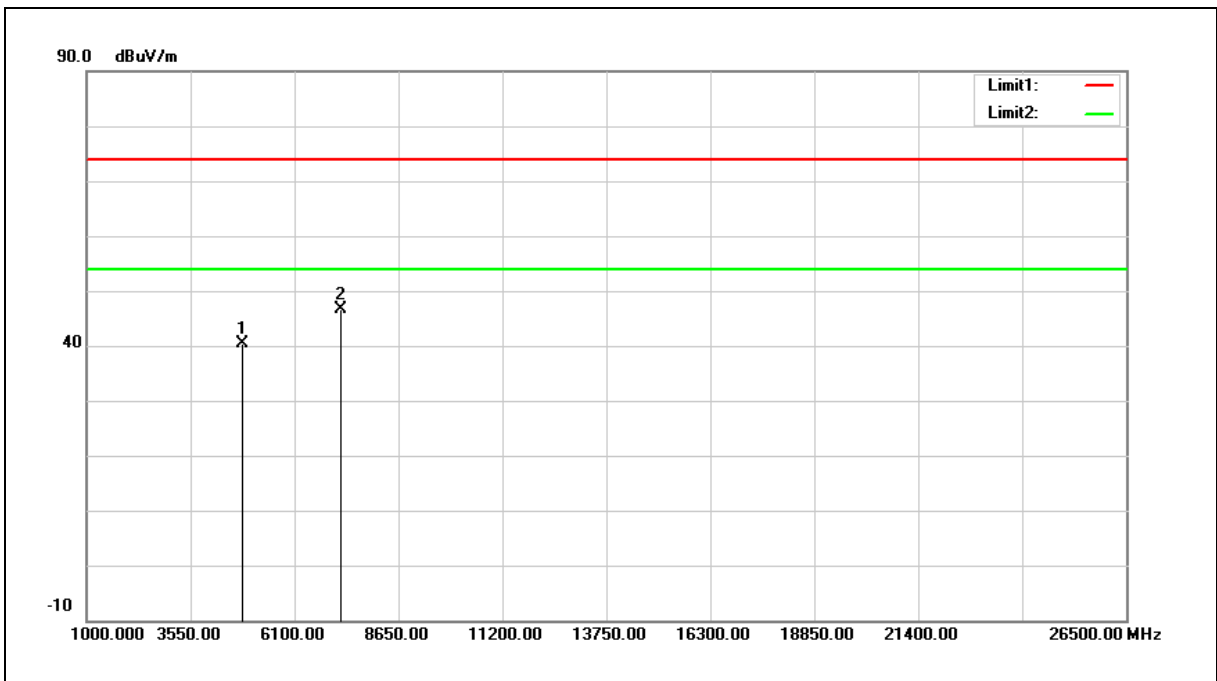

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.88	5.57	40.45	74.00	-33.55	peak
2	7236.000	34.69	11.98	46.67	74.00	-27.33	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

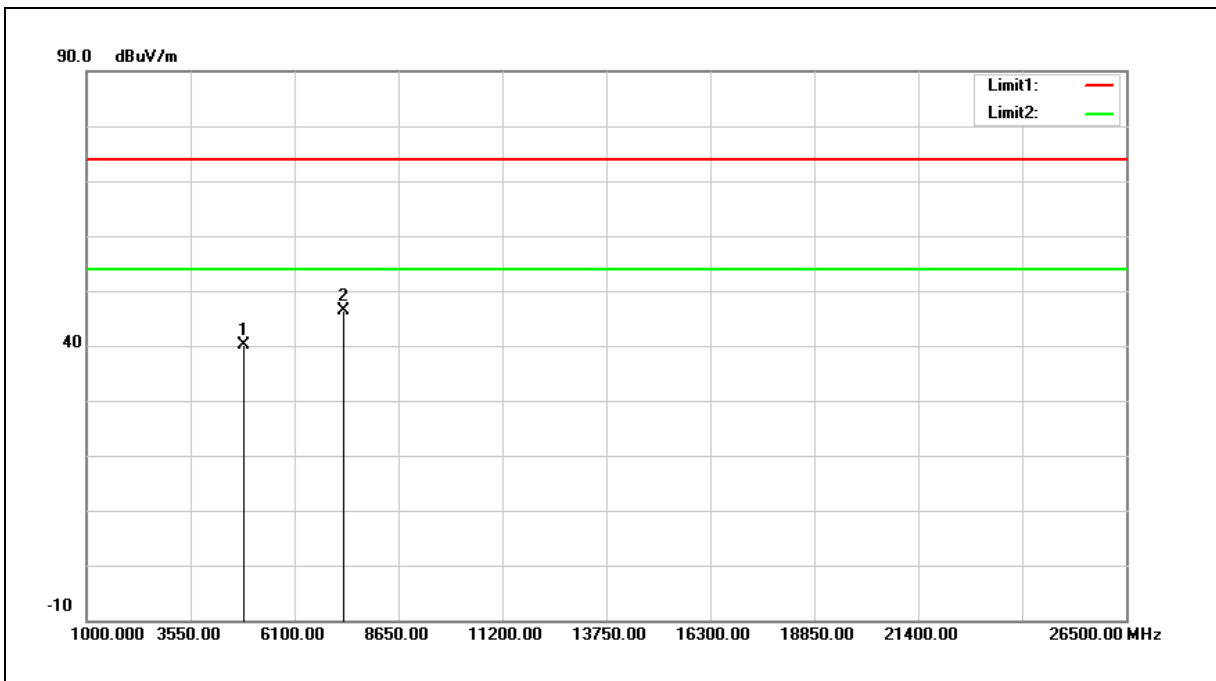

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.52	5.67	40.19	74.00	-33.81	peak
2	7311.000	34.22	12.15	46.37	74.00	-27.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

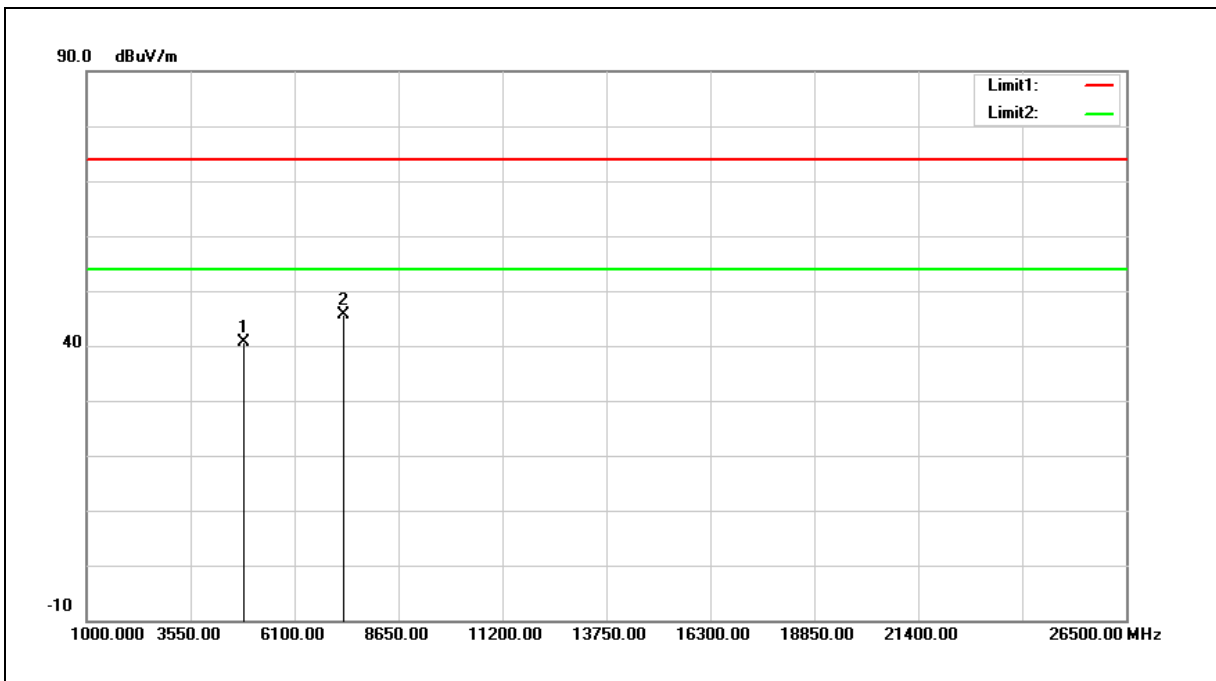

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.08	5.67	40.75	74.00	-33.25	peak
2	7311.000	33.43	12.15	45.58	74.00	-28.42	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

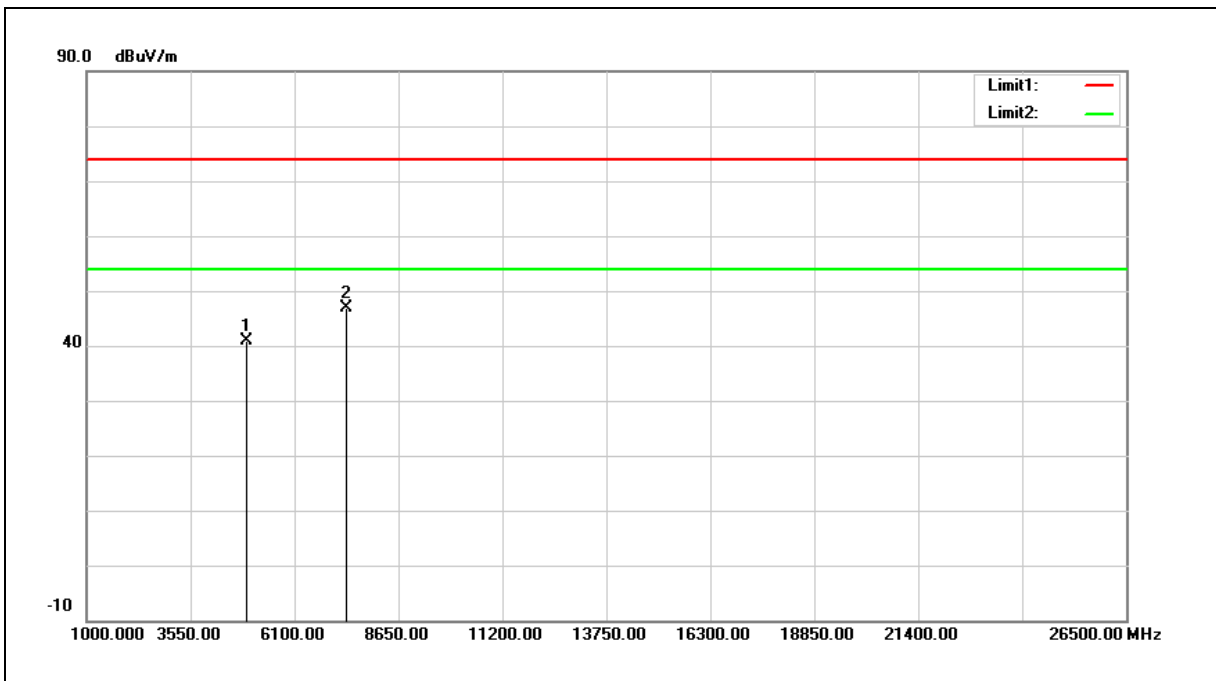

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.21	5.77	40.98	74.00	-33.02	peak
2	7386.000	34.57	12.33	46.90	74.00	-27.10	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

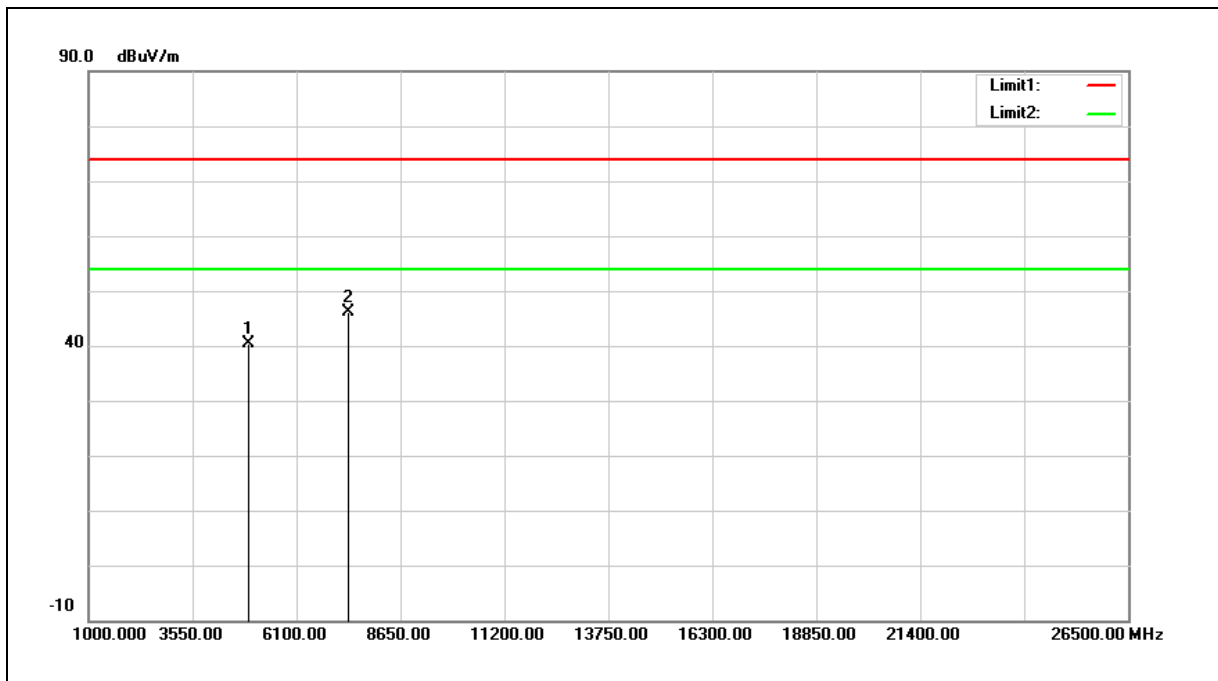


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.71	5.77	40.48	74.00	-33.52	peak
2	7386.000	33.87	12.33	46.20	74.00	-27.80	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

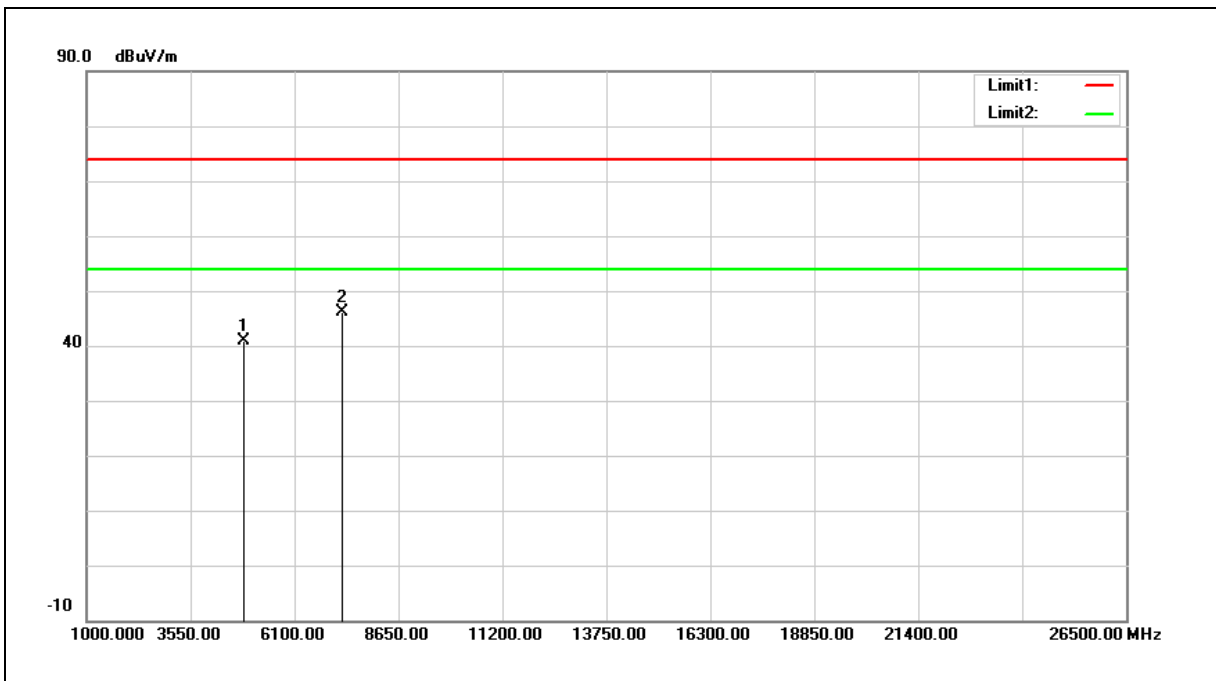

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	35.33	5.62	40.95	74.00	-33.05	peak
2	7266.000	34.00	12.04	46.04	74.00	-27.96	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

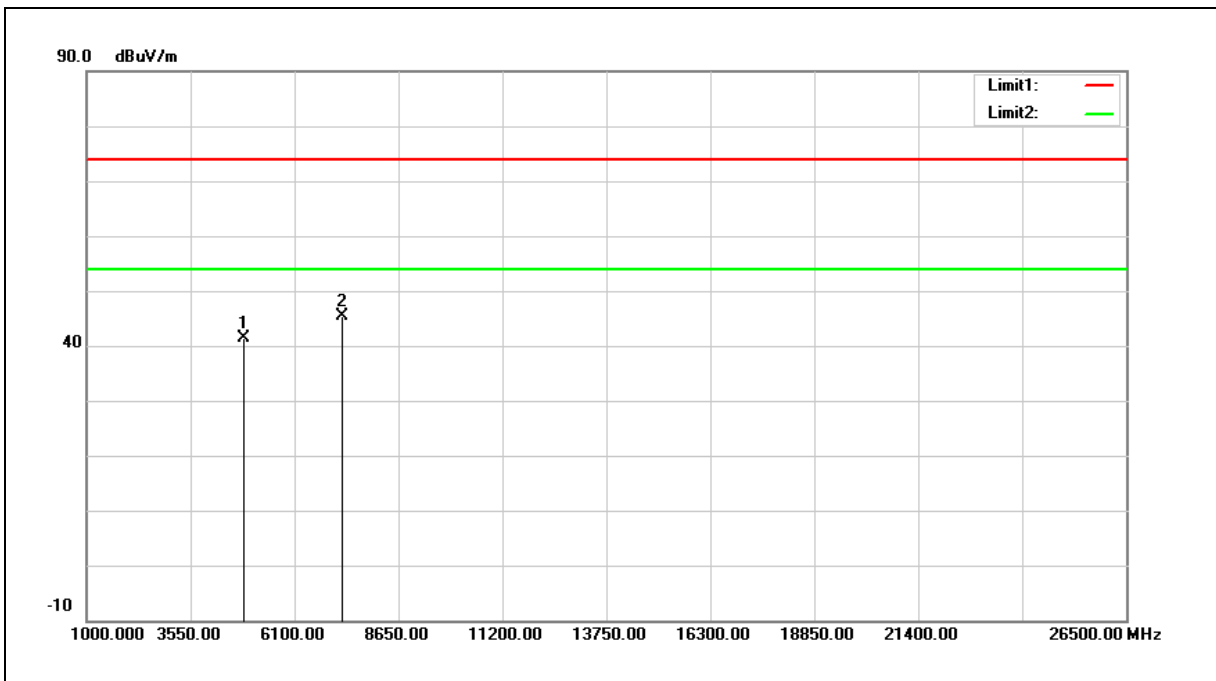

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	35.68	5.62	41.30	74.00	-32.70	peak
2	7266.000	33.46	12.04	45.50	74.00	-28.50	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

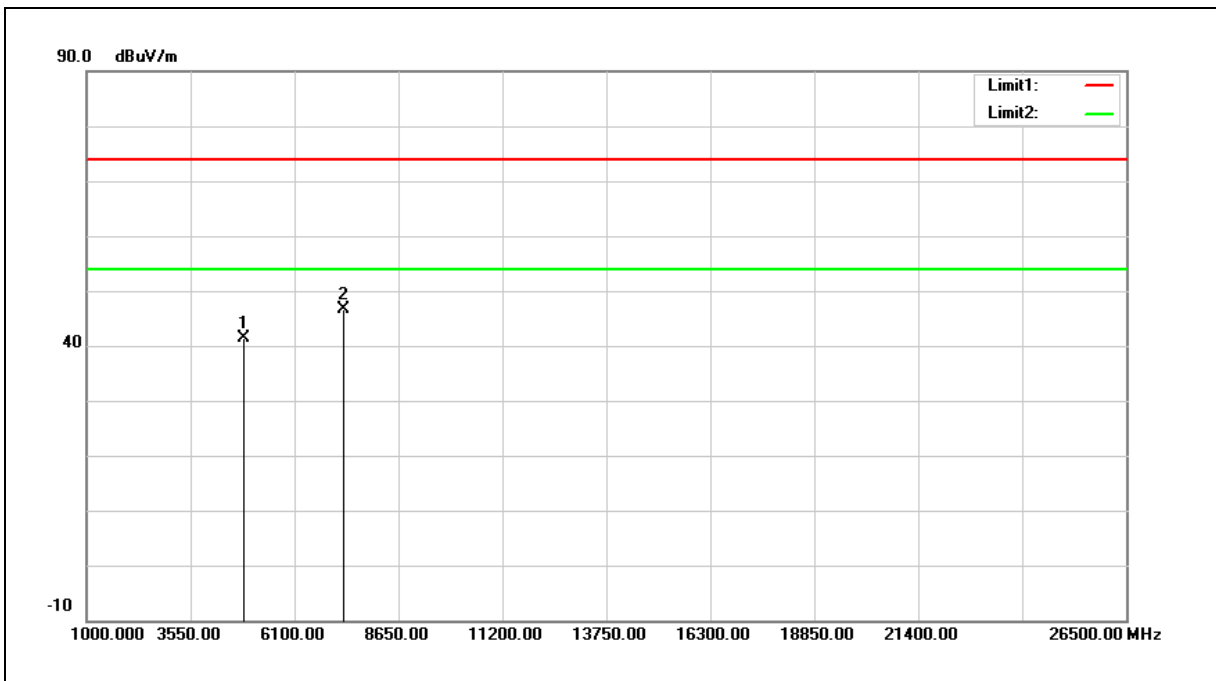


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.61	5.67	41.28	74.00	-32.72	peak
2	7311.000	34.37	12.15	46.52	74.00	-27.48	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

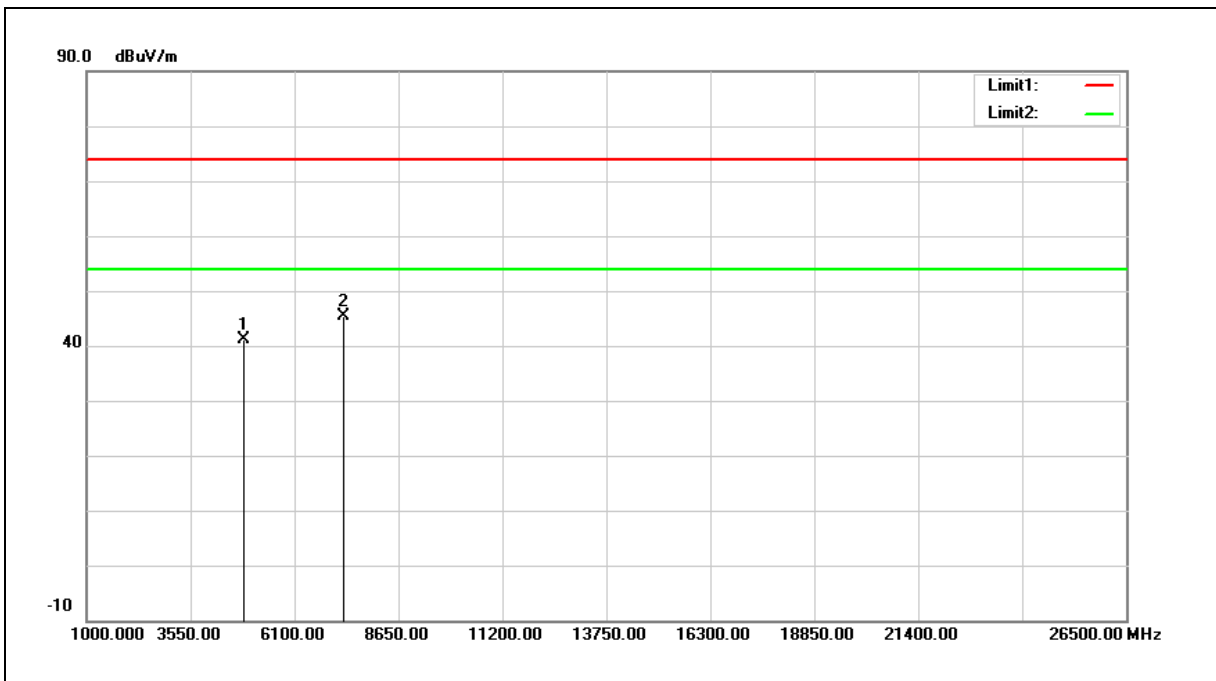

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.52	5.67	41.19	74.00	-32.81	peak
2	7311.000	33.27	12.15	45.42	74.00	-28.58	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

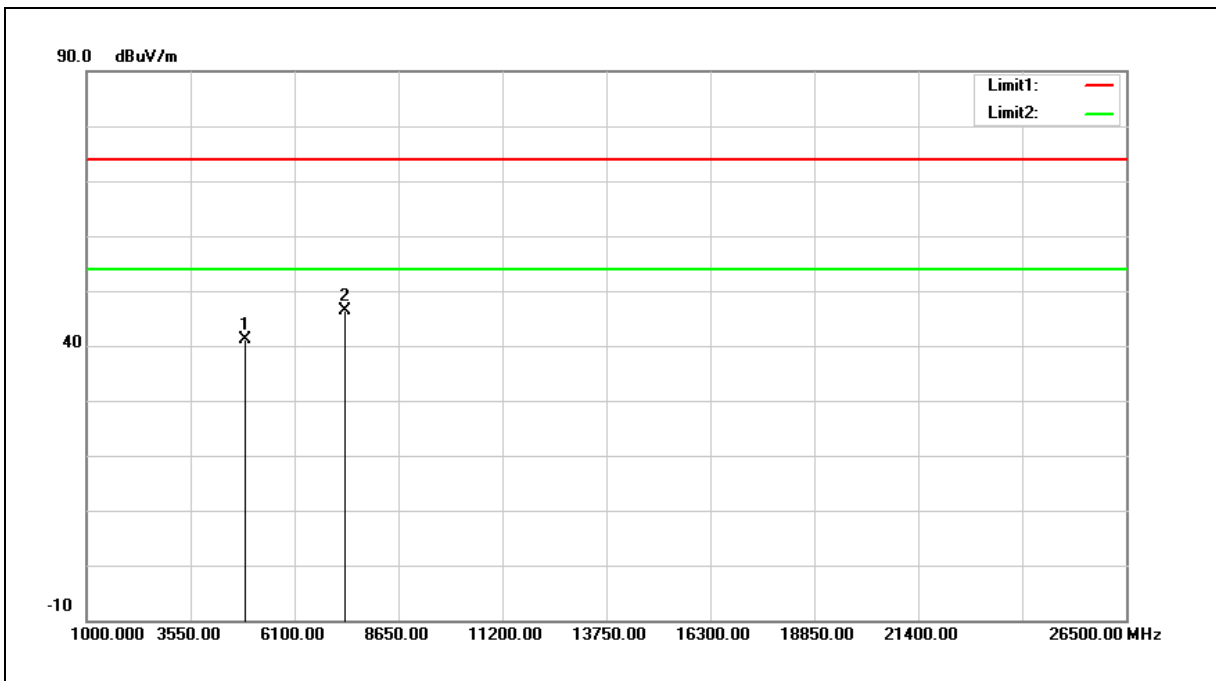

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.32	5.73	41.05	74.00	-32.95	peak
2	7356.000	34.25	12.25	46.50	74.00	-27.50	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

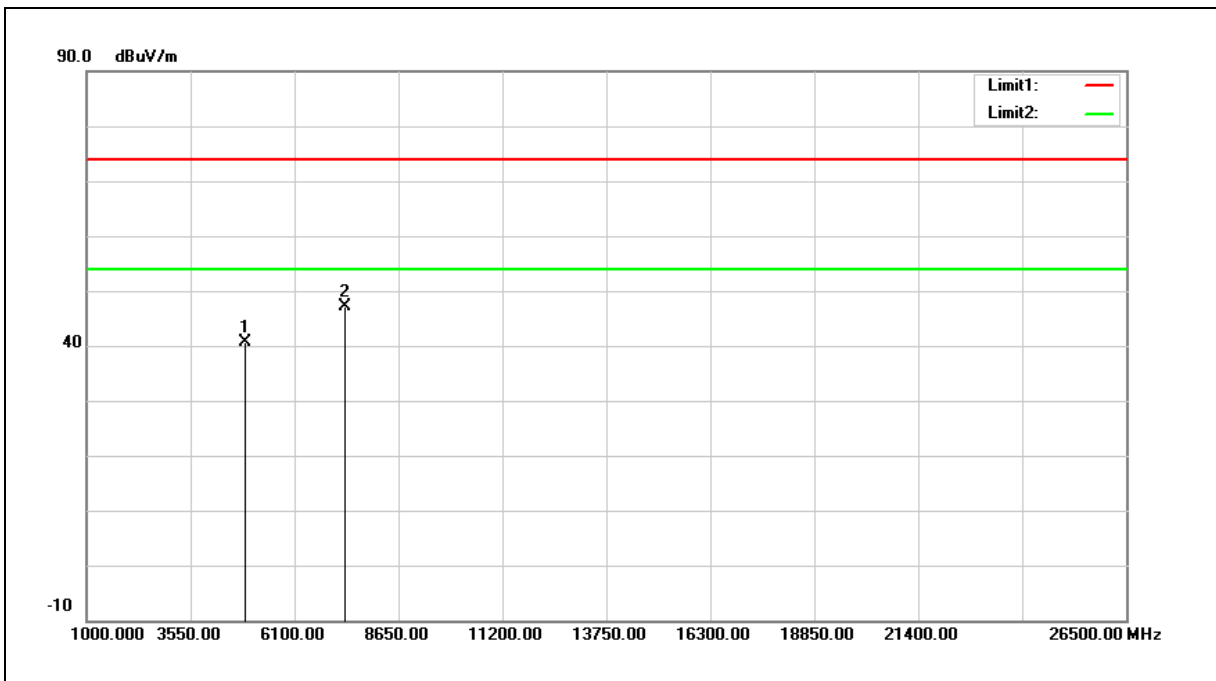

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	34.93	5.73	40.66	74.00	-33.34	peak
2	7356.000	34.92	12.25	47.17	74.00	-26.83	peak


- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



### Band Edges

Model: PA300: built-in antenna

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

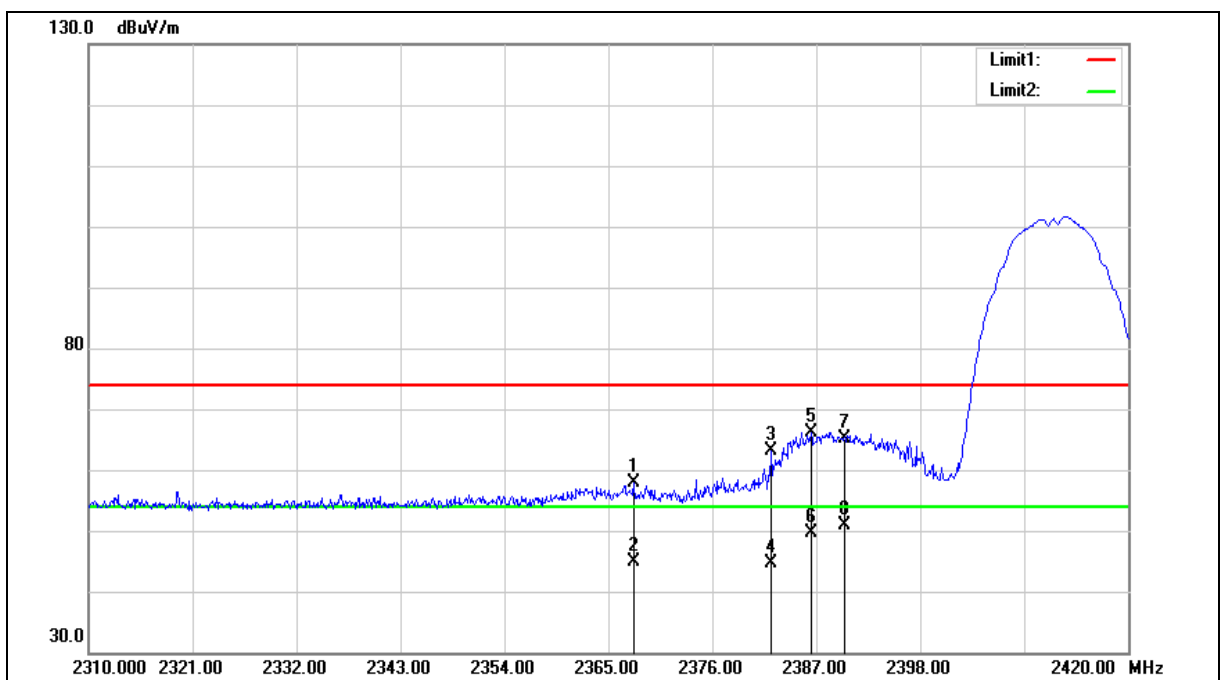



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.640	59.03	-1.12	57.91	74.00	-16.09	peak
2	2367.640	46.01	-1.12	44.89	54.00	-9.11	AVG
3	2382.270	64.13	-1.08	63.05	74.00	-10.95	peak
4	2382.270	45.74	-1.08	44.66	54.00	-9.34	AVG
5	2386.450	67.21	-1.07	66.14	74.00	-7.86	peak
6	2386.450	50.68	-1.07	49.61	54.00	-4.39	AVG
7	2390.000	66.20	-1.05	65.15	74.00	-8.85	peak
8	2390.000	52.00	-1.05	50.95	54.00	-3.05	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

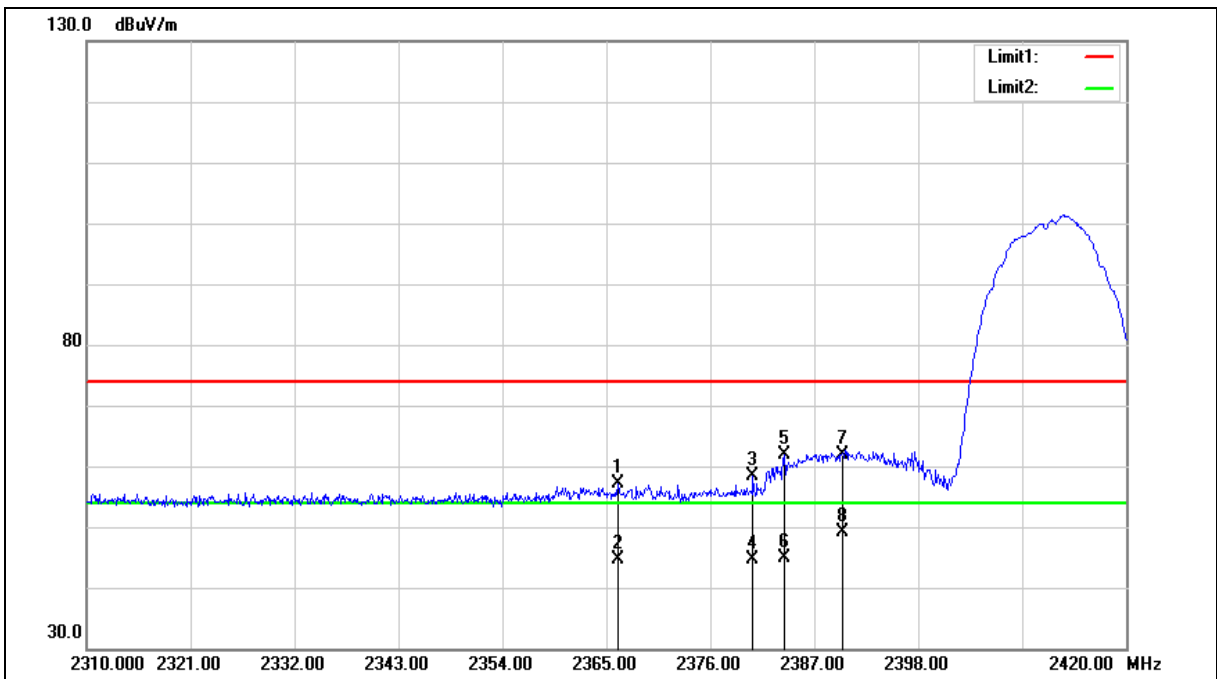



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2366.210	58.29	-1.13	57.16	74.00	-16.84	peak
2	2366.210	45.71	-1.13	44.58	54.00	-9.42	AVG
3	2380.510	59.51	-1.08	58.43	74.00	-15.57	peak
4	2380.510	45.76	-1.08	44.68	54.00	-9.32	AVG
5	2383.810	62.90	-1.07	61.83	74.00	-12.17	peak
6	2383.810	45.83	-1.07	44.76	54.00	-9.24	AVG
7	2390.000	62.89	-1.05	61.84	74.00	-12.16	peak
8	2390.000	50.12	-1.05	49.07	54.00	-4.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

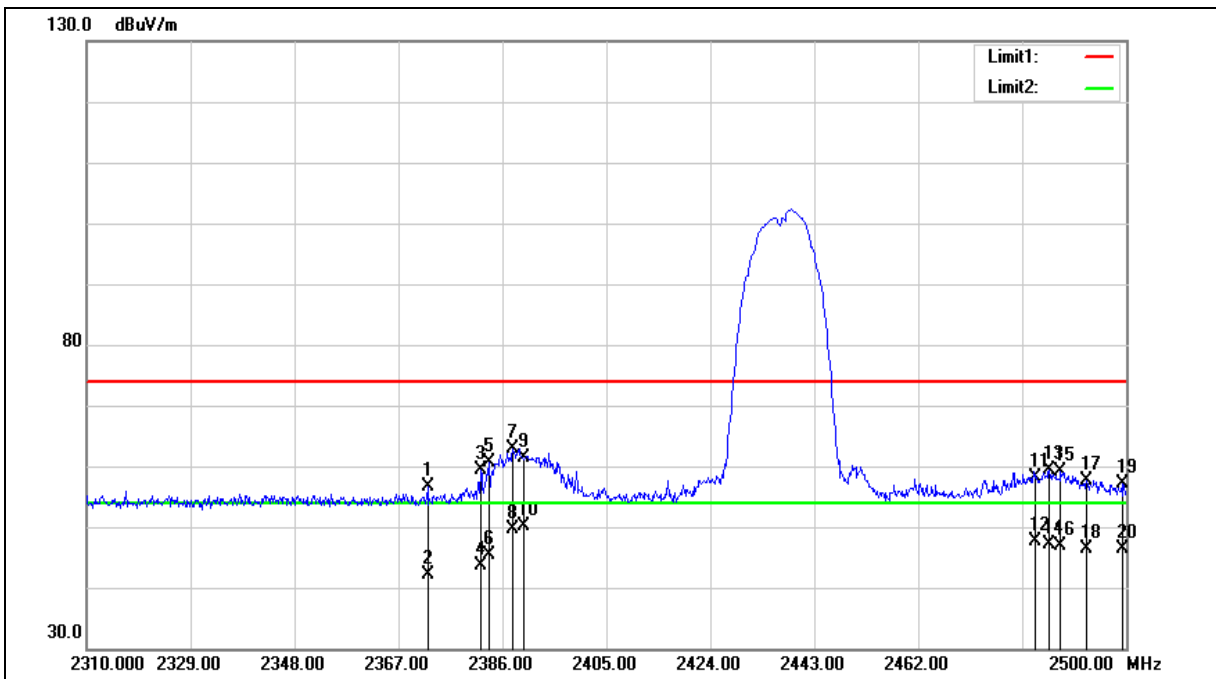



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.320	57.78	-1.10	56.68	74.00	-17.32	peak
2	2372.320	43.15	-1.10	42.05	54.00	-11.95	AVG
3	2382.010	60.47	-1.08	59.39	74.00	-14.61	peak
4	2382.010	44.79	-1.08	43.71	54.00	-10.29	AVG
5	2383.530	61.68	-1.07	60.61	74.00	-13.39	peak
6	2383.530	46.39	-1.07	45.32	54.00	-8.68	AVG
7	2387.900	63.96	-1.05	62.91	74.00	-11.09	peak
8	2387.900	50.64	-1.05	49.59	54.00	-4.41	AVG
9	2390.000	62.48	-1.05	61.43	74.00	-12.57	peak
10	2390.000	51.26	-1.05	50.21	54.00	-3.79	AVG
11	2483.500	58.86	-0.70	58.16	74.00	-15.84	peak
12	2483.500	48.34	-0.70	47.64	54.00	-6.36	AVG
13	2485.940	60.02	-0.70	59.32	74.00	-14.68	peak
14	2485.940	47.73	-0.70	47.03	54.00	-6.97	AVG
15	2488.030	59.70	-0.68	59.02	74.00	-14.98	peak
16	2488.030	47.67	-0.68	46.99	54.00	-7.01	AVG
17	2492.780	58.31	-0.67	57.64	74.00	-16.36	peak
18	2492.780	47.11	-0.67	46.44	54.00	-7.56	AVG
19	2499.240	57.71	-0.64	57.07	74.00	-16.93	peak
20	2499.240	47.04	-0.64	46.40	54.00	-7.60	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

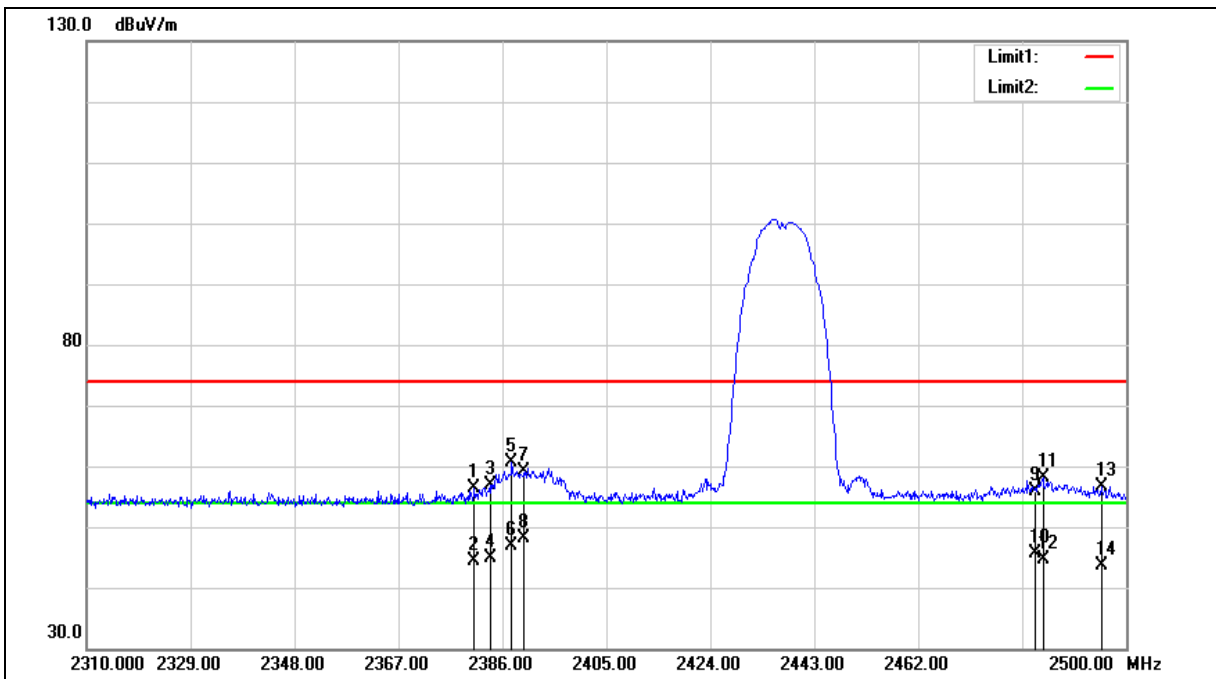



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2380.870	57.42	-1.08	56.34	74.00	-17.66	peak
2	2380.870	45.57	-1.08	44.49	54.00	-9.51	AVG
3	2383.720	58.04	-1.07	56.97	74.00	-17.03	peak
4	2383.720	45.87	-1.07	44.80	54.00	-9.20	AVG
5	2387.710	61.58	-1.05	60.53	74.00	-13.47	peak
6	2387.710	48.00	-1.05	46.95	54.00	-7.05	AVG
7	2390.000	60.06	-1.05	59.01	74.00	-14.99	peak
8	2390.000	49.21	-1.05	48.16	54.00	-5.84	AVG
9	2483.500	56.47	-0.70	55.77	74.00	-18.23	peak
10	2483.500	46.37	-0.70	45.67	54.00	-8.33	AVG
11	2484.800	58.90	-0.70	58.20	74.00	-15.80	peak
12	2484.800	45.34	-0.70	44.64	54.00	-9.36	AVG
13	2495.440	57.35	-0.66	56.69	74.00	-17.31	peak
14	2495.440	44.23	-0.66	43.57	54.00	-10.43	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

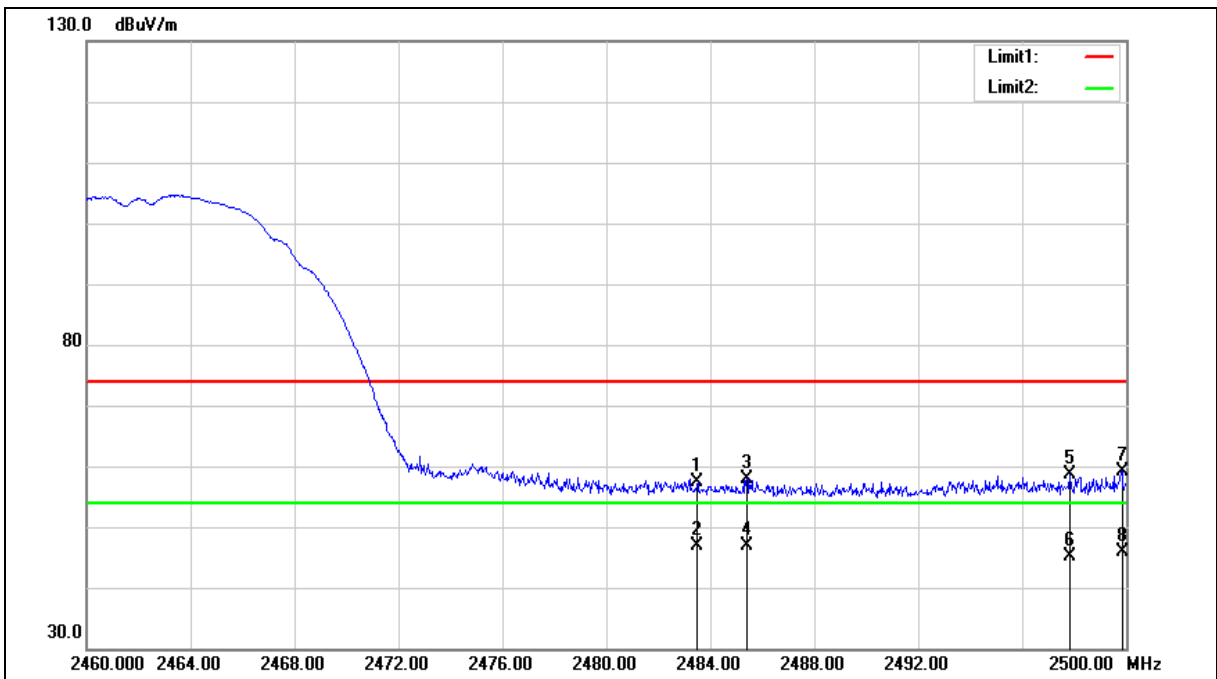



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.12	-0.70	57.42	74.00	-16.58	peak
2	2483.500	47.47	-0.70	46.77	54.00	-7.23	AVG
3	2485.400	58.49	-0.70	57.79	74.00	-16.21	peak
4	2485.400	47.49	-0.70	46.79	54.00	-7.21	AVG
5	2497.840	59.21	-0.65	58.56	74.00	-15.44	peak
6	2497.840	45.82	-0.65	45.17	54.00	-8.83	AVG
7	2499.840	59.75	-0.64	59.11	74.00	-14.89	peak
8	2499.840	46.40	-0.64	45.76	54.00	-8.24	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

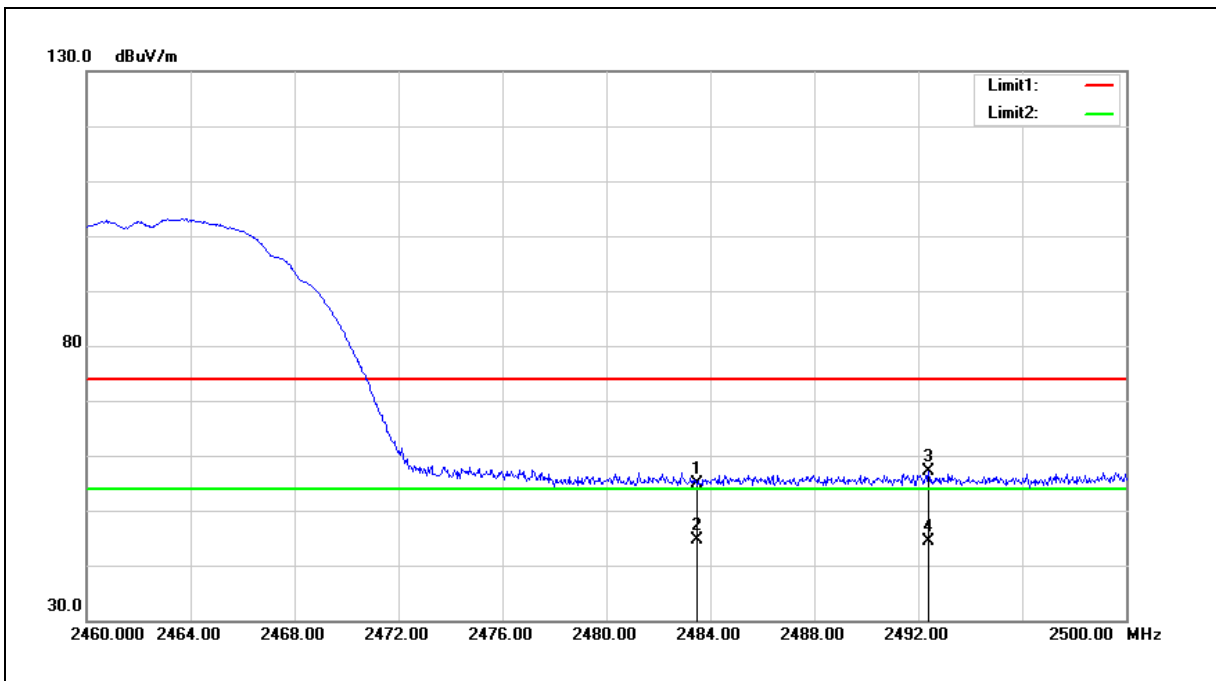


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.56	-0.70	54.86	74.00	-19.14	peak
2	2483.500	45.45	-0.70	44.75	54.00	-9.25	AVG
3	2492.400	57.75	-0.67	57.08	74.00	-16.92	peak
4	2492.400	45.10	-0.67	44.43	54.00	-9.57	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

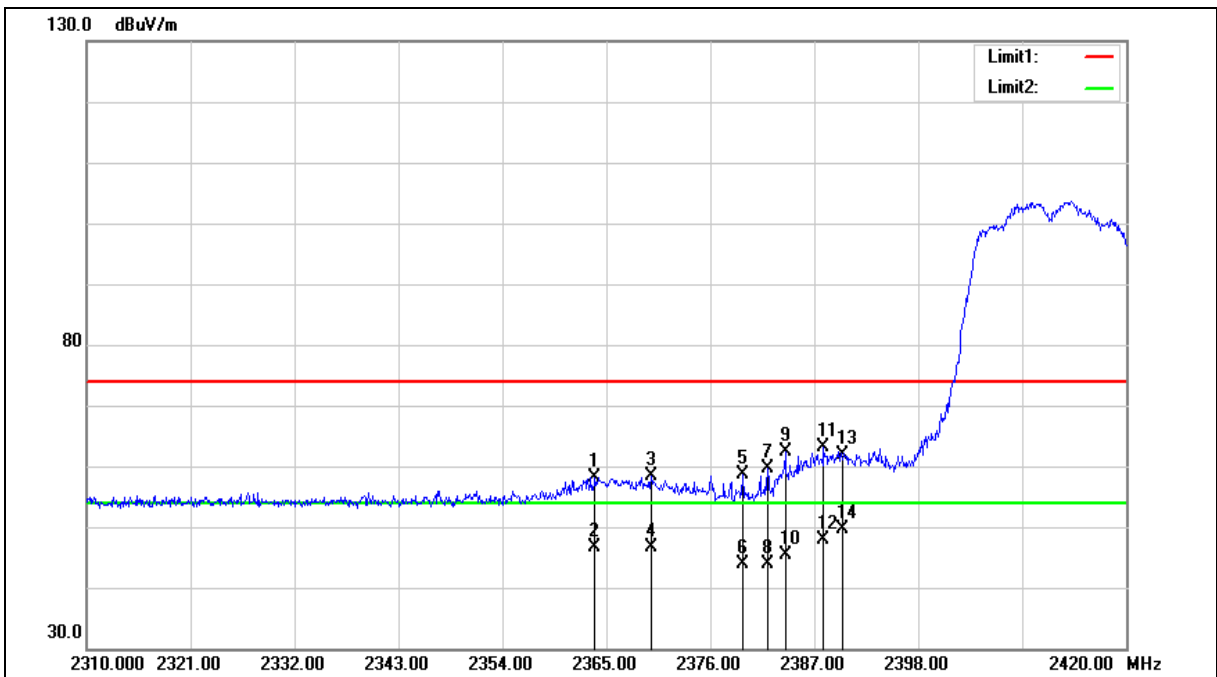



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2363.790	59.28	-1.13	58.15	74.00	-15.85	peak
2	2363.790	47.78	-1.13	46.65	54.00	-7.35	AVG
3	2369.730	59.48	-1.12	58.36	74.00	-15.64	peak
4	2369.730	47.77	-1.12	46.65	54.00	-7.35	AVG
5	2379.410	59.59	-1.08	58.51	74.00	-15.49	peak
6	2379.410	44.89	-1.08	43.81	54.00	-10.19	AVG
7	2382.050	60.65	-1.08	59.57	74.00	-14.43	peak
8	2382.050	44.93	-1.08	43.85	54.00	-10.15	AVG
9	2383.920	63.39	-1.07	62.32	74.00	-11.68	peak
10	2383.920	46.40	-1.07	45.33	54.00	-8.67	AVG
11	2387.990	64.21	-1.05	63.16	74.00	-10.84	peak
12	2387.990	49.01	-1.05	47.96	54.00	-6.04	AVG
13	2390.000	63.03	-1.05	61.98	74.00	-12.02	peak
14	2390.000	50.60	-1.05	49.55	54.00	-4.45	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

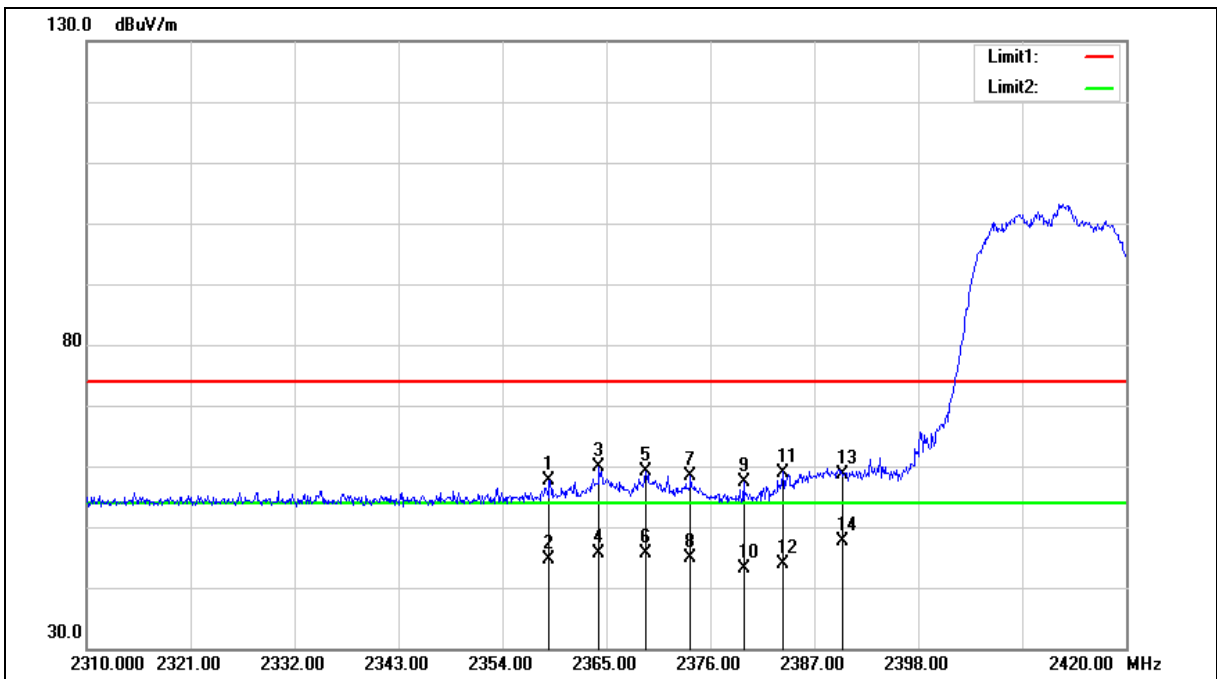



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2358.950	58.79	-1.16	57.63	74.00	-16.37	peak
2	2358.950	45.79	-1.16	44.63	54.00	-9.37	AVG
3	2364.230	60.93	-1.13	59.80	74.00	-14.20	peak
4	2364.230	46.69	-1.13	45.56	54.00	-8.44	AVG
5	2369.180	60.28	-1.12	59.16	74.00	-14.84	peak
6	2369.180	46.67	-1.12	45.55	54.00	-8.45	AVG
7	2373.910	59.49	-1.10	58.39	74.00	-15.61	peak
8	2373.910	45.89	-1.10	44.79	54.00	-9.21	AVG
9	2379.520	58.43	-1.08	57.35	74.00	-16.65	peak
10	2379.520	44.30	-1.08	43.22	54.00	-10.78	AVG
11	2383.700	60.07	-1.07	59.00	74.00	-15.00	peak
12	2383.700	44.83	-1.07	43.76	54.00	-10.24	AVG
13	2390.000	59.69	-1.05	58.64	74.00	-15.36	peak
14	2390.000	48.71	-1.05	47.66	54.00	-6.34	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

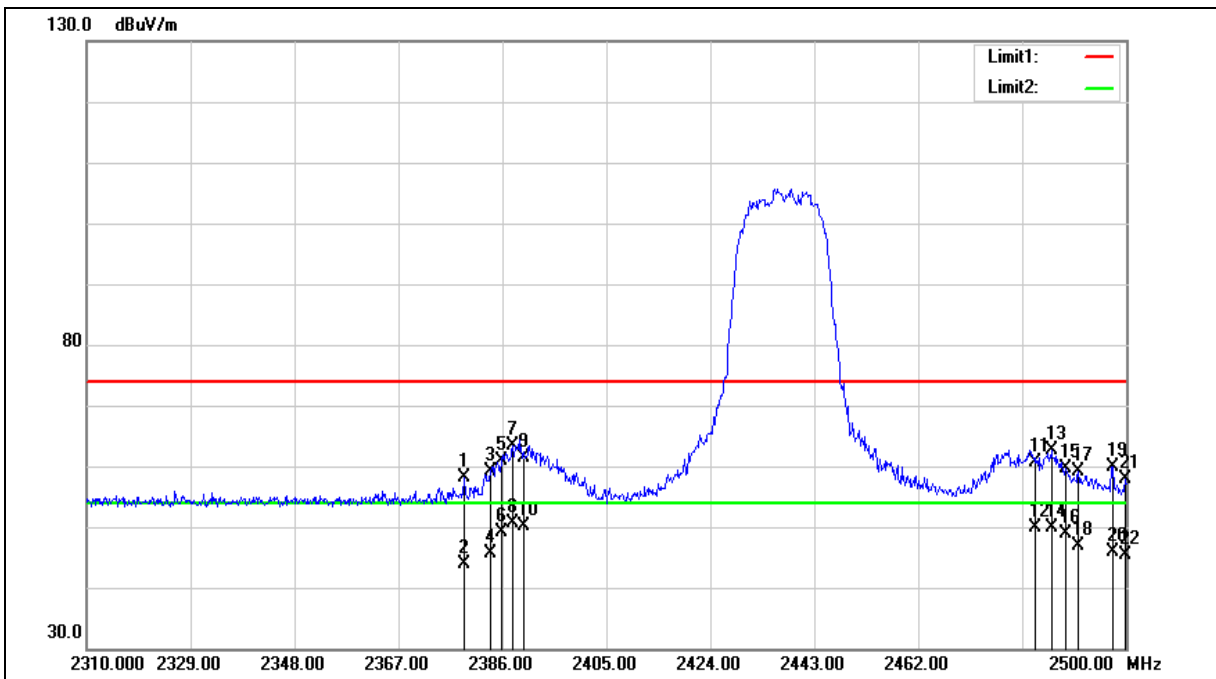



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.970	59.17	-1.09	58.08	74.00	-15.92	peak
2	2378.970	45.07	-1.09	43.98	54.00	-10.02	AVG
3	2383.720	60.32	-1.07	59.25	74.00	-14.75	peak
4	2383.720	46.69	-1.07	45.62	54.00	-8.38	AVG
5	2385.810	61.89	-1.07	60.82	74.00	-13.18	peak
6	2385.810	50.16	-1.07	49.09	54.00	-4.91	AVG
7	2387.900	64.31	-1.05	63.26	74.00	-10.74	peak
8	2387.900	51.66	-1.05	50.61	54.00	-3.39	AVG
9	2390.000	62.31	-1.05	61.26	74.00	-12.74	peak
10	2390.000	51.21	-1.05	50.16	54.00	-3.84	AVG
11	2483.500	61.44	-0.70	60.74	74.00	-13.26	peak
12	2483.500	50.53	-0.70	49.83	54.00	-4.17	AVG
13	2486.320	63.29	-0.70	62.59	74.00	-11.41	peak
14	2486.320	50.58	-0.70	49.88	54.00	-4.12	AVG
15	2488.980	60.23	-0.68	59.55	74.00	-14.45	peak
16	2488.980	49.62	-0.68	48.94	54.00	-5.06	AVG
17	2491.260	59.83	-0.67	59.16	74.00	-14.84	peak
18	2491.260	47.63	-0.67	46.96	54.00	-7.04	AVG
19	2497.530	60.56	-0.65	59.91	74.00	-14.09	peak
20	2497.530	46.51	-0.65	45.86	54.00	-8.14	AVG
21	2499.810	58.52	-0.64	57.88	74.00	-16.12	peak
22	2499.810	46.07	-0.64	45.43	54.00	-8.57	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

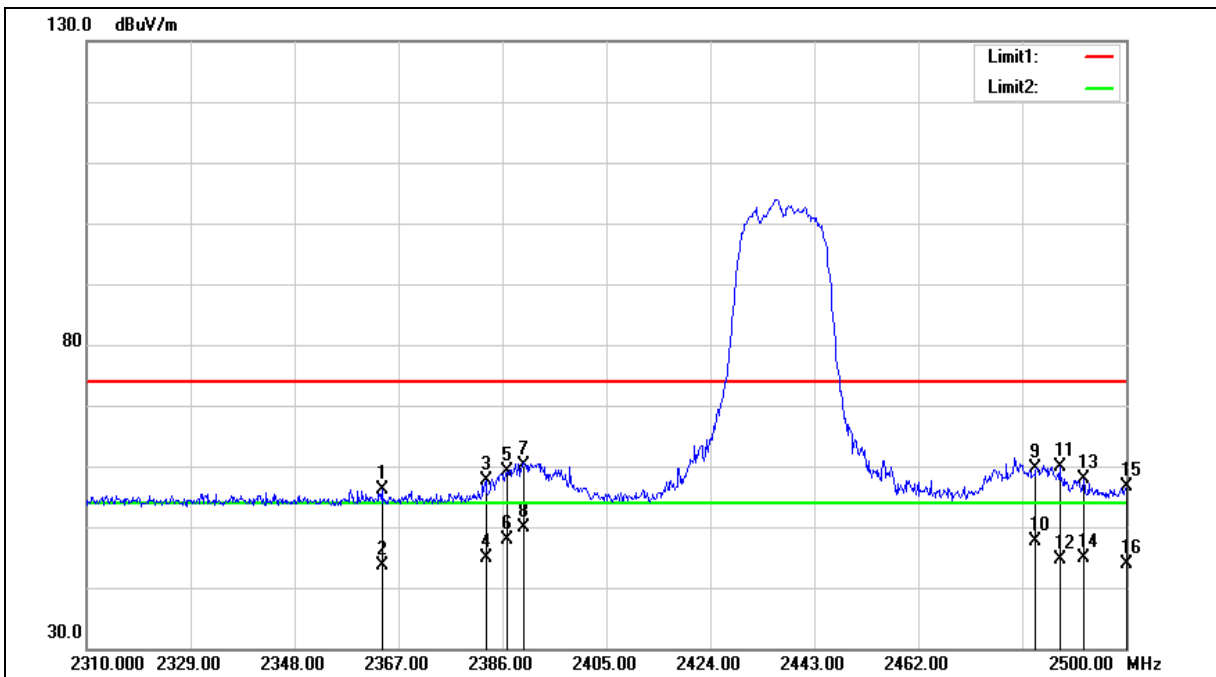





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.960	57.26	-1.13	56.13	74.00	-17.87	peak
2	2363.960	44.77	-1.13	43.64	54.00	-10.36	AVG
3	2382.960	58.79	-1.07	57.72	74.00	-16.28	peak
4	2382.960	45.85	-1.07	44.78	54.00	-9.22	AVG
5	2386.760	60.18	-1.06	59.12	74.00	-14.88	peak
6	2386.760	49.05	-1.06	47.99	54.00	-6.01	AVG
7	2390.000	61.28	-1.05	60.23	74.00	-13.77	peak
8	2390.000	51.03	-1.05	49.98	54.00	-4.02	AVG
9	2483.500	60.29	-0.70	59.59	74.00	-14.41	peak
10	2483.500	48.24	-0.70	47.54	54.00	-6.46	AVG
11	2487.840	60.55	-0.68	59.87	74.00	-14.13	peak
12	2487.840	45.43	-0.68	44.75	54.00	-9.25	AVG
13	2492.210	58.62	-0.67	57.95	74.00	-16.05	peak
14	2492.210	45.53	-0.67	44.86	54.00	-9.14	AVG
15	2500.000	57.21	-0.64	56.57	74.00	-17.43	peak
16	2500.000	44.58	-0.64	43.94	54.00	-10.06	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

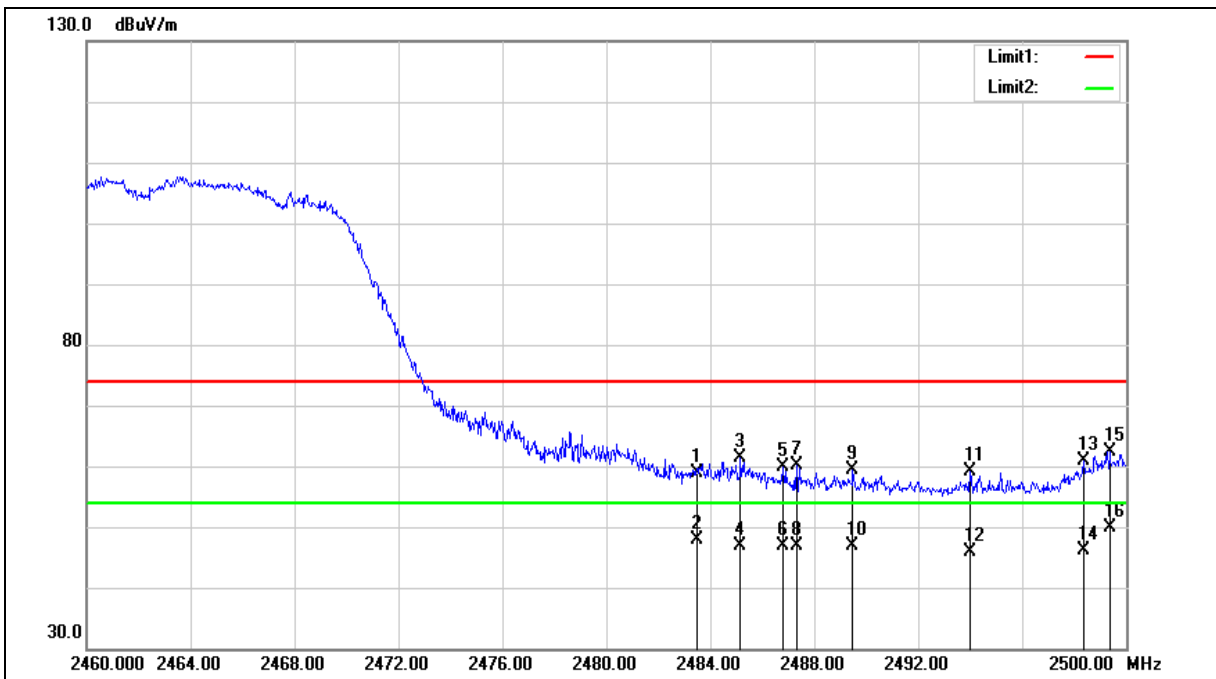



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2483.500	59.47	-0.70	58.77	74.00	-15.23	peak
2	2483.500	48.68	-0.70	47.98	54.00	-6.02	AVG
3	2485.160	62.08	-0.70	61.38	74.00	-12.62	peak
4	2485.160	47.64	-0.70	46.94	54.00	-7.06	AVG
5	2486.800	60.45	-0.69	59.76	74.00	-14.24	peak
6	2486.800	47.57	-0.69	46.88	54.00	-7.12	AVG
7	2487.320	60.85	-0.69	60.16	74.00	-13.84	peak
8	2487.320	47.68	-0.69	46.99	54.00	-7.01	AVG
9	2489.480	59.98	-0.68	59.30	74.00	-14.70	peak
10	2489.480	47.48	-0.68	46.80	54.00	-7.20	AVG
11	2494.000	59.90	-0.67	59.23	74.00	-14.77	peak
12	2494.000	46.43	-0.67	45.76	54.00	-8.24	AVG
13	2498.360	61.51	-0.64	60.87	74.00	-13.13	peak
14	2498.360	46.65	-0.64	46.01	54.00	-7.99	AVG
15	2499.360	63.09	-0.64	62.45	74.00	-11.55	peak
16	2499.360	50.40	-0.64	49.76	54.00	-4.24	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

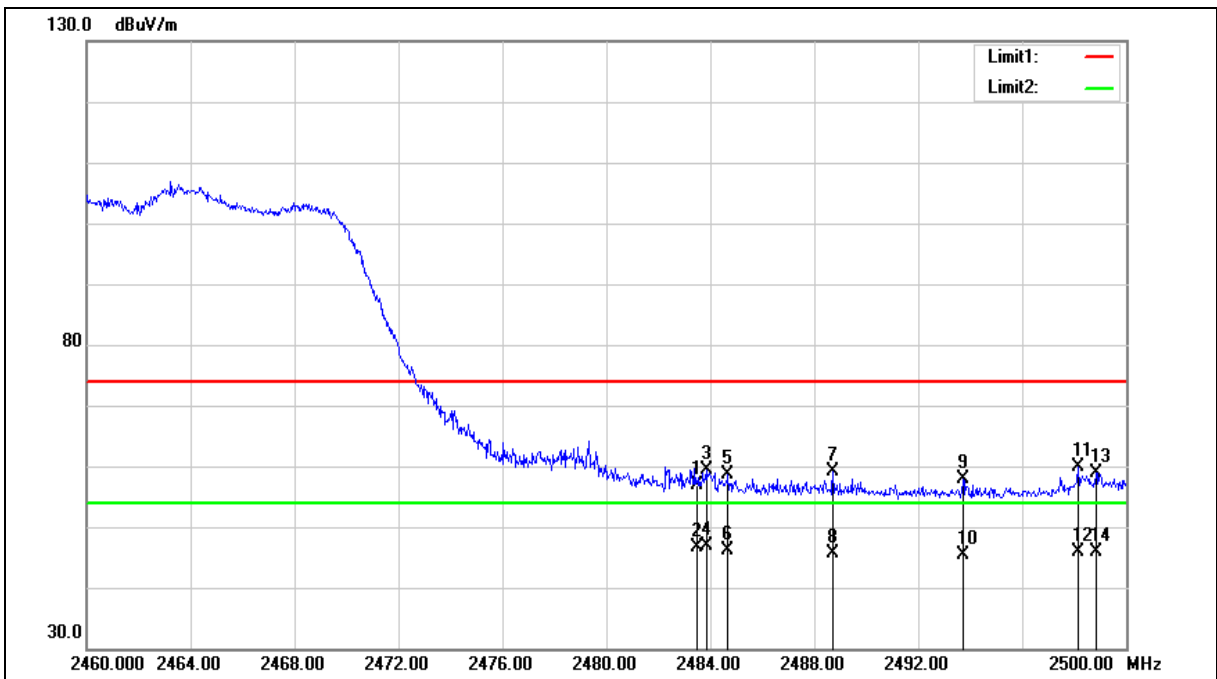



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2483.500	57.60	-0.70	56.90	74.00	-17.10	peak
2	2483.500	47.33	-0.70	46.63	54.00	-7.37	AVG
3	2483.840	60.03	-0.70	59.33	74.00	-14.67	peak
4	2483.840	47.46	-0.70	46.76	54.00	-7.24	AVG
5	2484.680	59.24	-0.70	58.54	74.00	-15.46	peak
6	2484.680	46.94	-0.70	46.24	54.00	-7.76	AVG
7	2488.720	59.89	-0.68	59.21	74.00	-14.79	peak
8	2488.720	46.36	-0.68	45.68	54.00	-8.32	AVG
9	2493.720	58.63	-0.67	57.96	74.00	-16.04	peak
10	2493.720	46.06	-0.67	45.39	54.00	-8.61	AVG
11	2498.160	60.41	-0.64	59.77	74.00	-14.23	peak
12	2498.160	46.62	-0.64	45.98	54.00	-8.02	AVG
13	2498.840	59.62	-0.64	58.98	74.00	-15.02	peak
14	2498.840	46.62	-0.64	45.98	54.00	-8.02	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

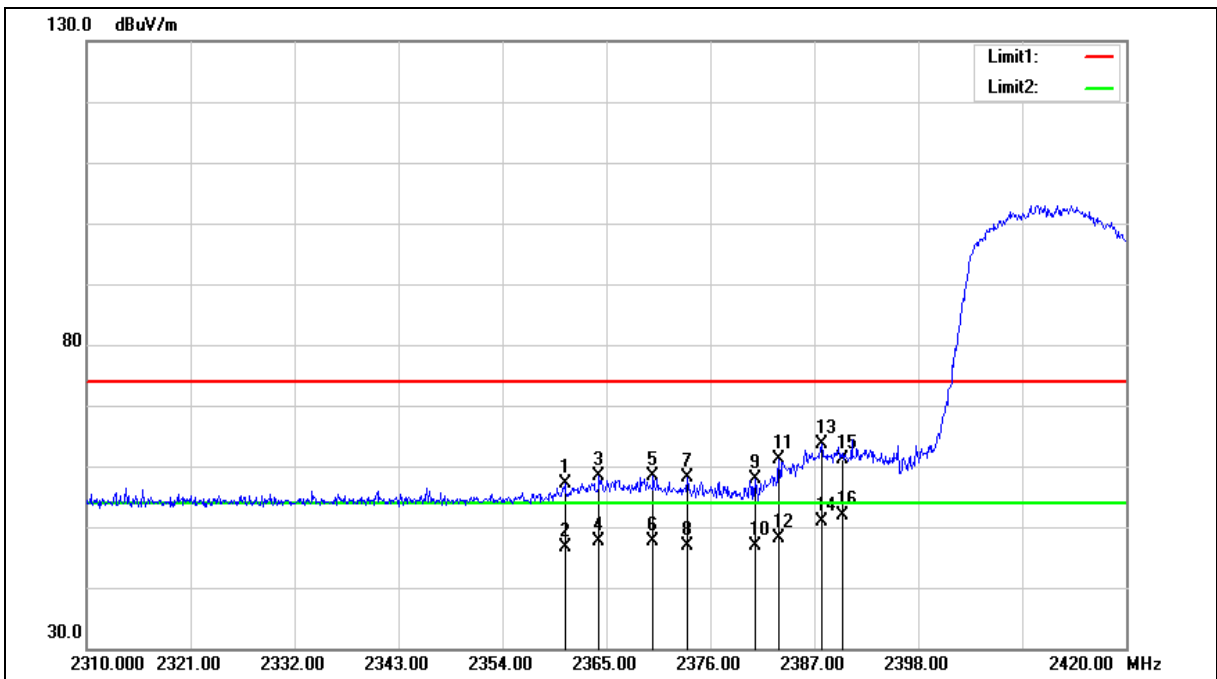



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2360.600	58.33	-1.15	57.18	74.00	-16.82	peak
2	2360.600	47.88	-1.15	46.73	54.00	-7.27	AVG
3	2364.230	59.48	-1.13	58.35	74.00	-15.65	peak
4	2364.230	48.76	-1.13	47.63	54.00	-6.37	AVG
5	2369.950	59.49	-1.12	58.37	74.00	-15.63	peak
6	2369.950	48.69	-1.12	47.57	54.00	-6.43	AVG
7	2373.580	59.17	-1.10	58.07	74.00	-15.93	peak
8	2373.580	47.95	-1.10	46.85	54.00	-7.15	AVG
9	2380.730	58.93	-1.08	57.85	74.00	-16.15	peak
10	2380.730	48.02	-1.08	46.94	54.00	-7.06	AVG
11	2383.260	62.09	-1.07	61.02	74.00	-12.98	peak
12	2383.260	49.23	-1.07	48.16	54.00	-5.84	AVG
13	2387.770	64.57	-1.05	63.52	74.00	-10.48	peak
14	2387.770	51.93	-1.05	50.88	54.00	-3.12	AVG
15	2390.000	62.26	-1.05	61.21	74.00	-12.79	peak
16	2390.000	52.81	-1.05	51.76	54.00	-2.24	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

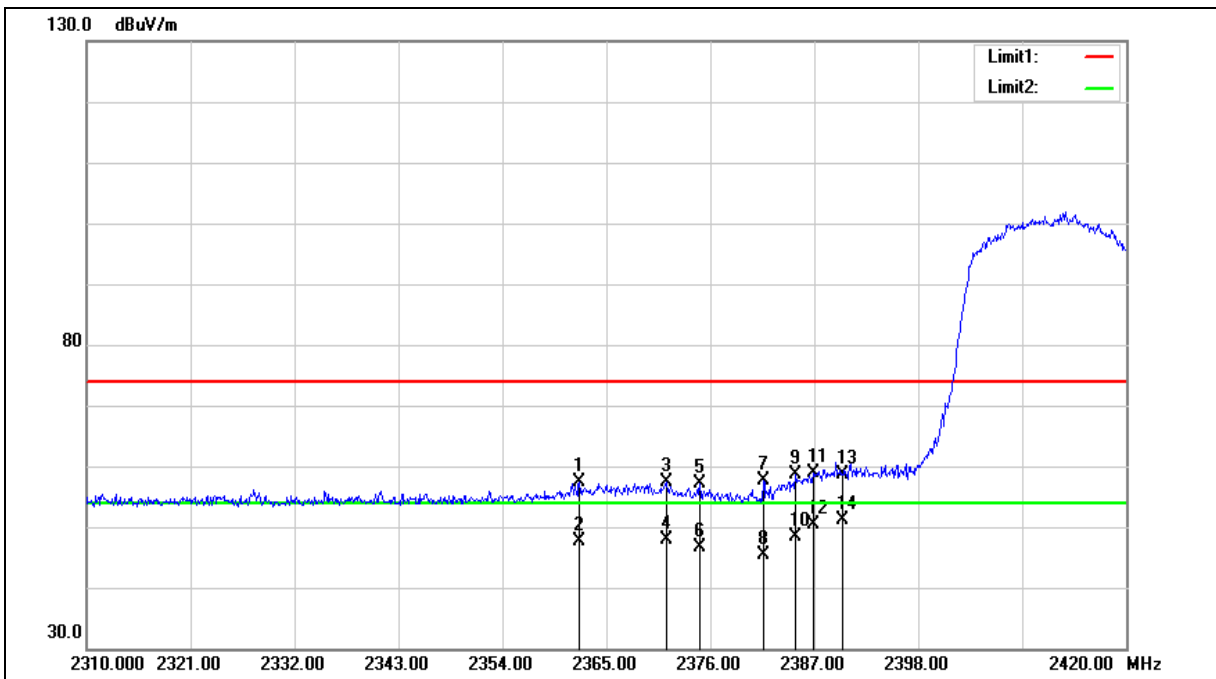





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2362.140	58.41	-1.15	57.26	74.00	-16.74	peak
2	2362.140	48.79	-1.15	47.64	54.00	-6.36	AVG
3	2371.380	58.58	-1.10	57.48	74.00	-16.52	peak
4	2371.380	49.04	-1.10	47.94	54.00	-6.06	AVG
5	2374.900	58.21	-1.10	57.11	74.00	-16.89	peak
6	2374.900	47.73	-1.10	46.63	54.00	-7.37	AVG
7	2381.610	58.73	-1.08	57.65	74.00	-16.35	peak
8	2381.610	46.55	-1.08	45.47	54.00	-8.53	AVG
9	2385.020	59.61	-1.07	58.54	74.00	-15.46	peak
10	2385.020	49.35	-1.07	48.28	54.00	-5.72	AVG
11	2386.890	59.82	-1.06	58.76	74.00	-15.24	peak
12	2386.890	51.36	-1.06	50.30	54.00	-3.70	AVG
13	2390.000	59.57	-1.05	58.52	74.00	-15.48	peak
14	2390.000	52.11	-1.05	51.06	54.00	-2.94	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

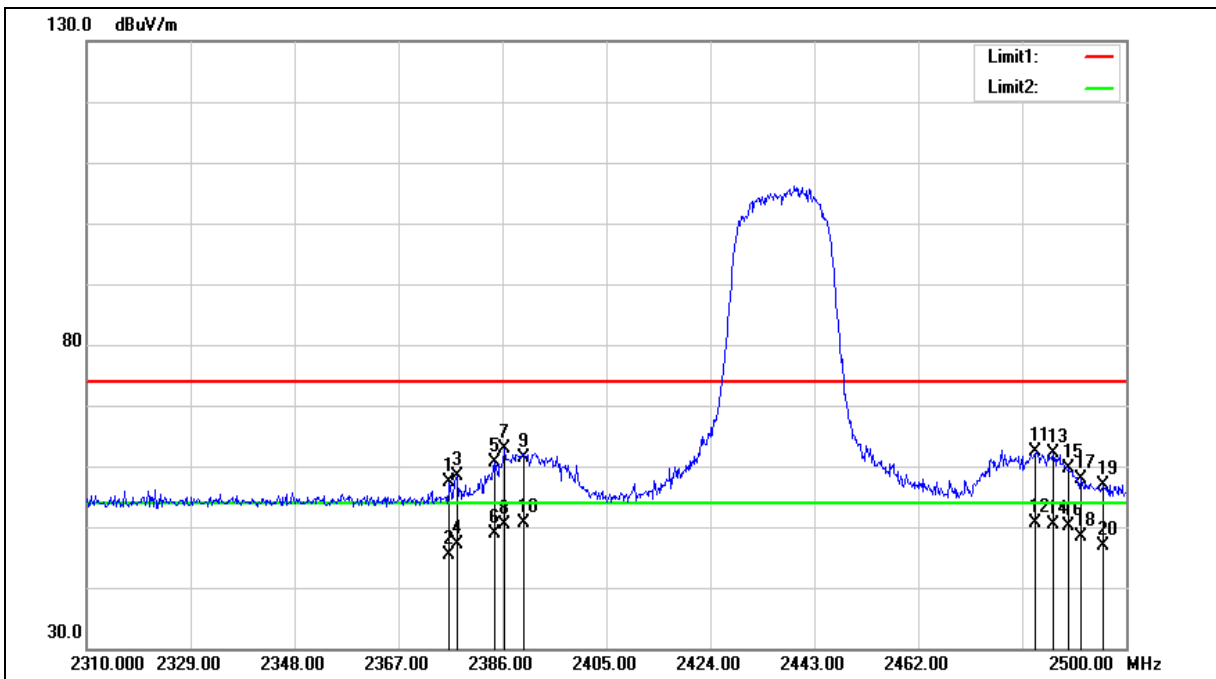



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.310	58.56	-1.10	57.46	74.00	-16.54	peak
2	2376.310	46.53	-1.10	45.43	54.00	-8.57	AVG
3	2377.640	59.38	-1.10	58.28	74.00	-15.72	peak
4	2377.640	48.22	-1.10	47.12	54.00	-6.88	AVG
5	2384.670	61.74	-1.07	60.67	74.00	-13.33	peak
6	2384.670	50.01	-1.07	48.94	54.00	-5.06	AVG
7	2386.380	63.90	-1.07	62.83	74.00	-11.17	peak
8	2386.380	51.48	-1.07	50.41	54.00	-3.59	AVG
9	2390.000	62.52	-1.05	61.47	74.00	-12.53	peak
10	2390.000	51.78	-1.05	50.73	54.00	-3.27	AVG
11	2483.500	63.04	-0.70	62.34	74.00	-11.66	peak
12	2483.500	51.29	-0.70	50.59	54.00	-3.41	AVG
13	2486.700	62.91	-0.69	62.22	74.00	-11.78	peak
14	2486.700	50.98	-0.69	50.29	54.00	-3.71	AVG
15	2489.360	60.21	-0.68	59.53	74.00	-14.47	peak
16	2489.360	50.69	-0.68	50.01	54.00	-3.99	AVG
17	2491.830	58.43	-0.67	57.76	74.00	-16.24	peak
18	2491.830	49.11	-0.67	48.44	54.00	-5.56	AVG
19	2495.820	57.63	-0.66	56.97	74.00	-17.03	peak
20	2495.820	47.52	-0.66	46.86	54.00	-7.14	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

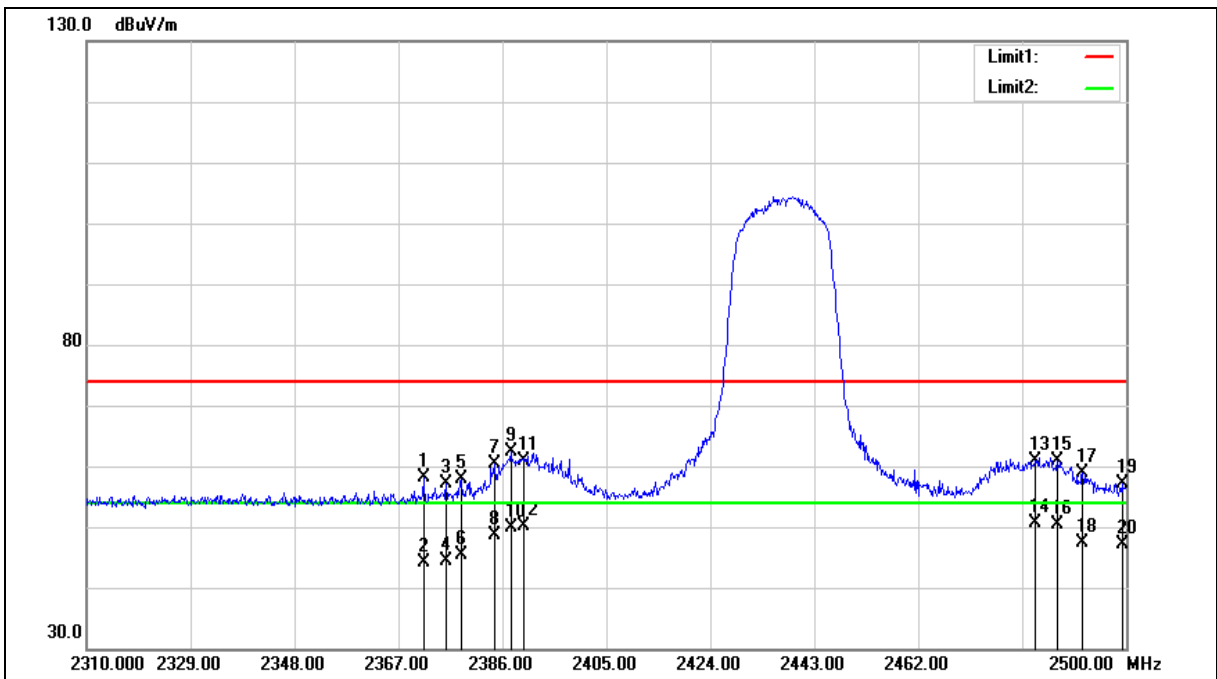



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.560	59.31	-1.10	58.21	74.00	-15.79	peak
2	2371.560	45.16	-1.10	44.06	54.00	-9.94	AVG
3	2375.740	58.13	-1.10	57.03	74.00	-16.97	peak
4	2375.740	45.47	-1.10	44.37	54.00	-9.63	AVG
5	2378.400	59.03	-1.10	57.93	74.00	-16.07	peak
6	2378.400	46.44	-1.10	45.34	54.00	-8.66	AVG
7	2384.480	61.55	-1.07	60.48	74.00	-13.52	peak
8	2384.480	49.71	-1.07	48.64	54.00	-5.36	AVG
9	2387.520	63.33	-1.05	62.28	74.00	-11.72	peak
10	2387.520	51.03	-1.05	49.98	54.00	-4.02	AVG
11	2390.000	61.96	-1.05	60.91	74.00	-13.09	peak
12	2390.000	51.20	-1.05	50.15	54.00	-3.85	AVG
13	2483.500	61.68	-0.70	60.98	74.00	-13.02	peak
14	2483.500	51.38	-0.70	50.68	54.00	-3.32	AVG
15	2487.460	61.50	-0.69	60.81	74.00	-13.19	peak
16	2487.460	50.97	-0.69	50.28	54.00	-3.72	AVG
17	2492.020	59.51	-0.67	58.84	74.00	-15.16	peak
18	2492.020	48.04	-0.67	47.37	54.00	-6.63	AVG
19	2499.240	57.79	-0.64	57.15	74.00	-16.85	peak
20	2499.240	47.70	-0.64	47.06	54.00	-6.94	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

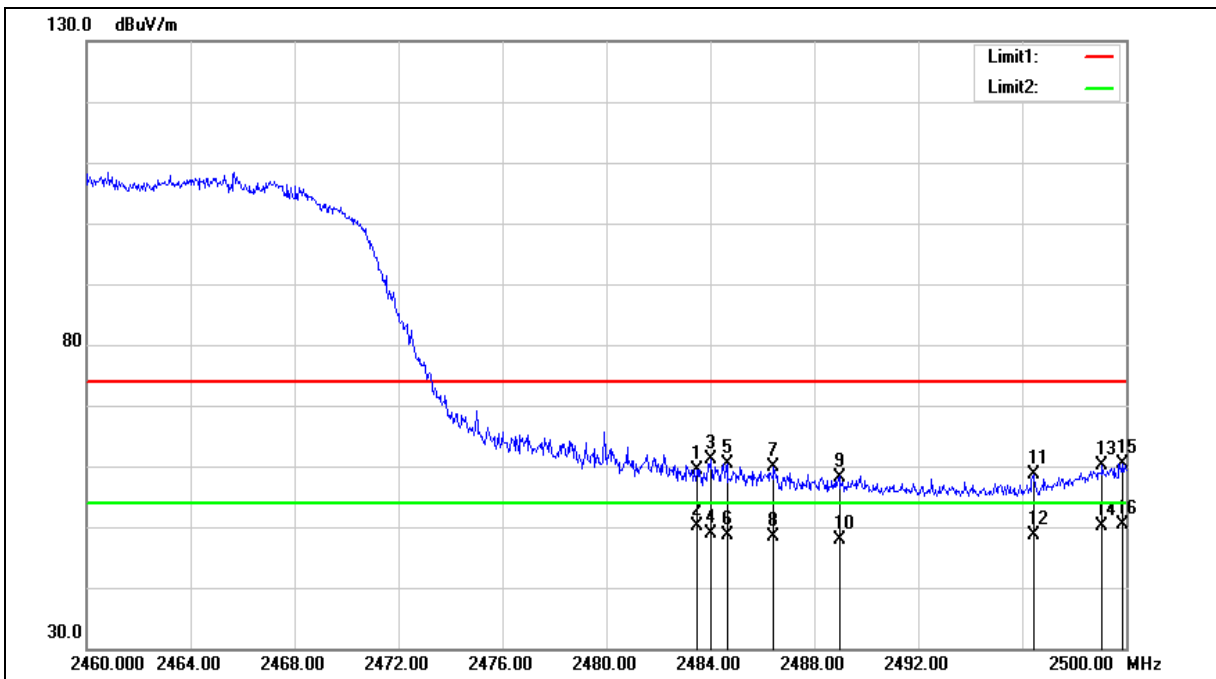



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2483.500	60.10	-0.70	59.40	74.00	-14.60	peak
2	2483.500	50.74	-0.70	50.04	54.00	-3.96	AVG
3	2484.000	61.90	-0.70	61.20	74.00	-12.80	peak
4	2484.000	49.59	-0.70	48.89	54.00	-5.11	AVG
5	2484.640	61.10	-0.70	60.40	74.00	-13.60	peak
6	2484.640	49.21	-0.70	48.51	54.00	-5.49	AVG
7	2486.440	60.51	-0.70	59.81	74.00	-14.19	peak
8	2486.440	49.02	-0.70	48.32	54.00	-5.68	AVG
9	2488.960	58.93	-0.68	58.25	74.00	-15.75	peak
10	2488.960	48.51	-0.68	47.83	54.00	-6.17	AVG
11	2496.440	59.17	-0.65	58.52	74.00	-15.48	peak
12	2496.440	49.32	-0.65	48.67	54.00	-5.33	AVG
13	2499.080	60.74	-0.64	60.10	74.00	-13.90	peak
14	2499.080	50.76	-0.64	50.12	54.00	-3.88	AVG
15	2499.840	60.98	-0.64	60.34	74.00	-13.66	peak
16	2499.840	50.92	-0.64	50.28	54.00	-3.72	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

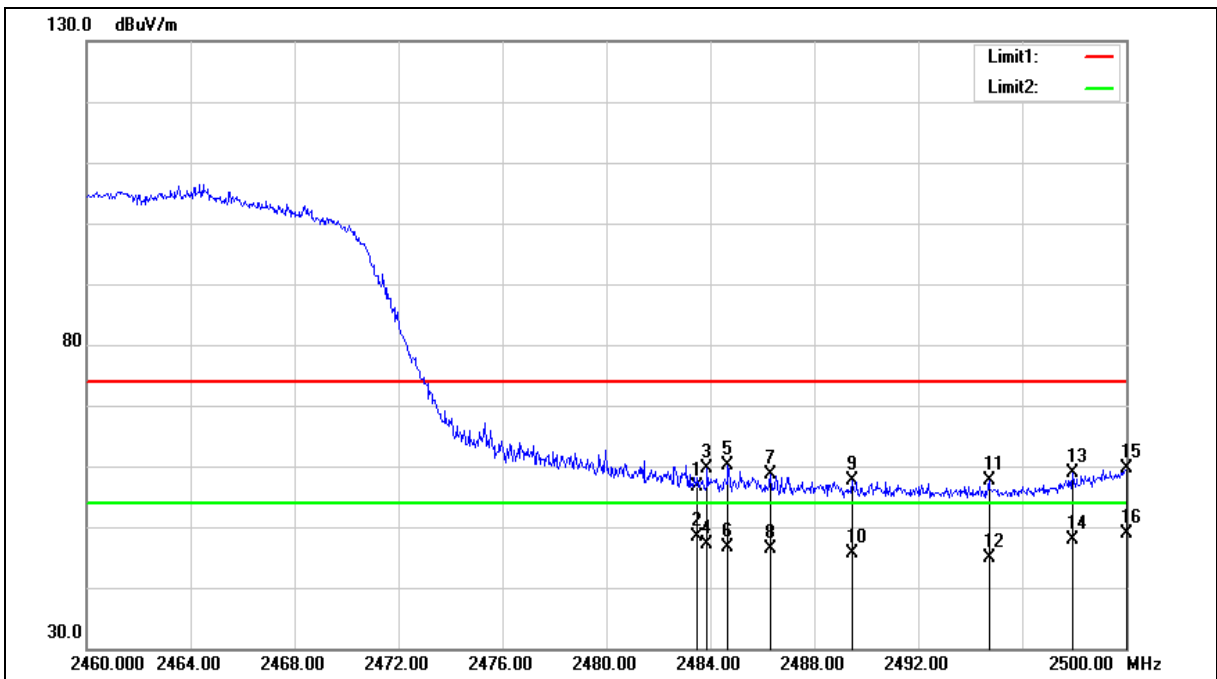





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.29	-0.70	56.59	74.00	-17.41	peak
2	2483.500	49.10	-0.70	48.40	54.00	-5.60	AVG
3	2483.880	60.30	-0.70	59.60	74.00	-14.40	peak
4	2483.880	47.88	-0.70	47.18	54.00	-6.82	AVG
5	2484.680	60.72	-0.70	60.02	74.00	-13.98	peak
6	2484.680	47.43	-0.70	46.73	54.00	-7.27	AVG
7	2486.320	59.21	-0.70	58.51	74.00	-15.49	peak
8	2486.320	47.12	-0.70	46.42	54.00	-7.58	AVG
9	2489.440	58.30	-0.68	57.62	74.00	-16.38	peak
10	2489.440	46.29	-0.68	45.61	54.00	-8.39	AVG
11	2494.720	58.24	-0.66	57.58	74.00	-16.42	peak
12	2494.720	45.57	-0.66	44.91	54.00	-9.09	AVG
13	2497.920	59.41	-0.65	58.76	74.00	-15.24	peak
14	2497.920	48.48	-0.65	47.83	54.00	-6.17	AVG
15	2500.000	60.27	-0.64	59.63	74.00	-14.37	peak
16	2500.000	49.47	-0.64	48.83	54.00	-5.17	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C )/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

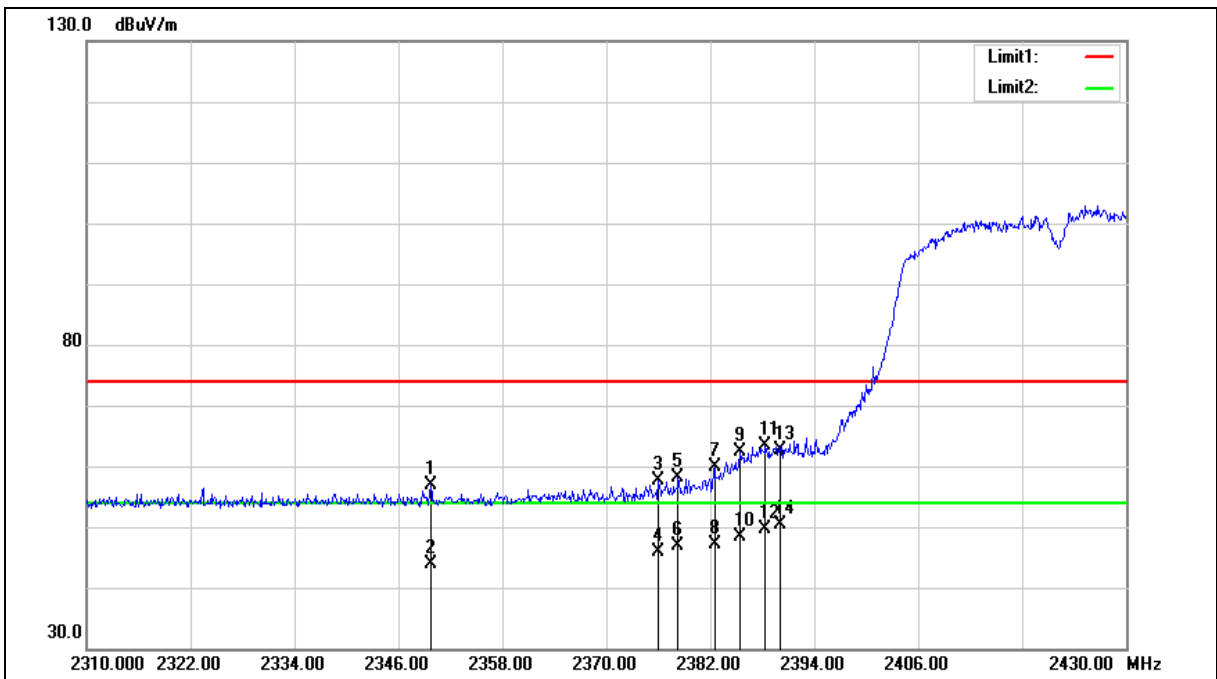



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2349.720	58.10	-1.19	56.91	74.00	-17.09	peak
2	2349.720	45.18	-1.19	43.99	54.00	-10.01	AVG
3	2376.000	58.77	-1.10	57.67	74.00	-16.33	peak
4	2376.000	46.87	-1.10	45.77	54.00	-8.23	AVG
5	2378.280	59.21	-1.10	58.11	74.00	-15.89	peak
6	2378.280	48.04	-1.10	46.94	54.00	-7.06	AVG
7	2382.480	60.91	-1.08	59.83	74.00	-14.17	peak
8	2382.480	48.09	-1.08	47.01	54.00	-6.99	AVG
9	2385.360	63.55	-1.07	62.48	74.00	-11.52	peak
10	2385.360	49.48	-1.07	48.41	54.00	-5.59	AVG
11	2388.360	64.40	-1.05	63.35	74.00	-10.65	peak
12	2388.360	50.66	-1.05	49.61	54.00	-4.39	AVG
13	2390.000	63.58	-1.05	62.53	74.00	-11.47	peak
14	2390.000	51.43	-1.05	50.38	54.00	-3.62	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

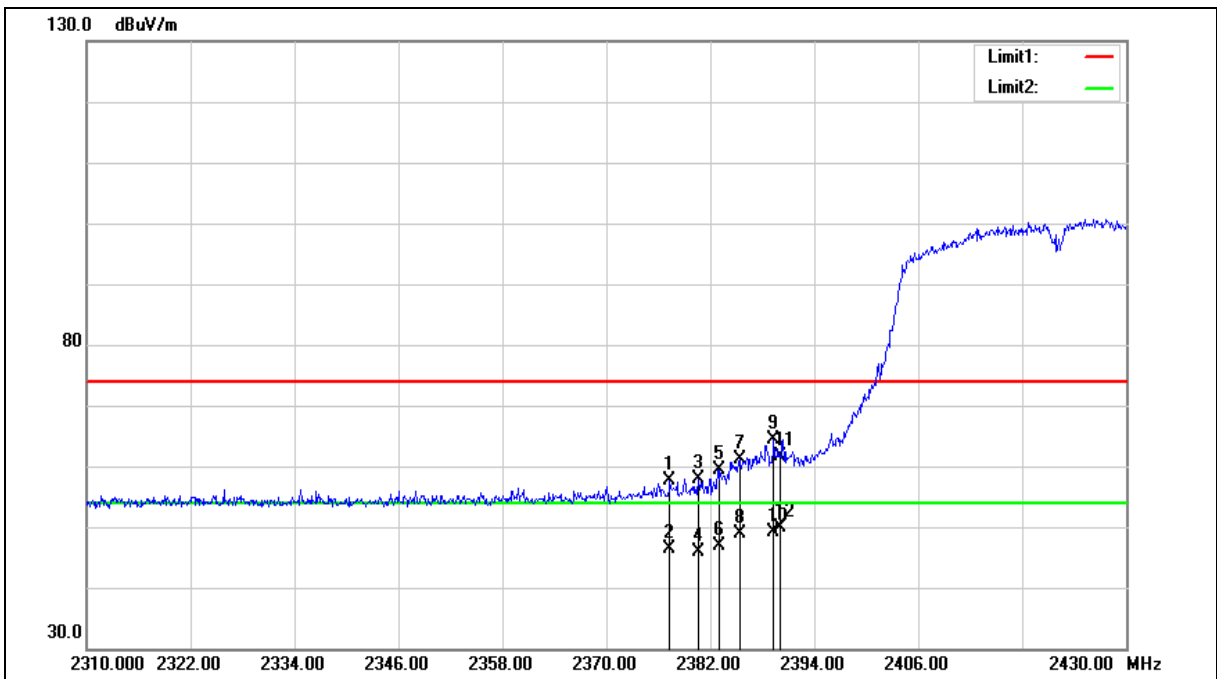



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.320	58.81	-1.10	57.71	74.00	-16.29	peak
2	2377.320	47.55	-1.10	46.45	54.00	-7.55	AVG
3	2380.680	59.04	-1.08	57.96	74.00	-16.04	peak
4	2380.680	46.97	-1.08	45.89	54.00	-8.11	AVG
5	2382.960	60.41	-1.07	59.34	74.00	-14.66	peak
6	2382.960	47.91	-1.07	46.84	54.00	-7.16	AVG
7	2385.360	62.28	-1.07	61.21	74.00	-12.79	peak
8	2385.360	49.99	-1.07	48.92	54.00	-5.08	AVG
9	2389.320	65.32	-1.05	64.27	74.00	-9.73	peak
10	2389.320	50.24	-1.05	49.19	54.00	-4.81	AVG
11	2390.000	62.69	-1.05	61.64	74.00	-12.36	peak
12	2390.000	50.94	-1.05	49.89	54.00	-4.11	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

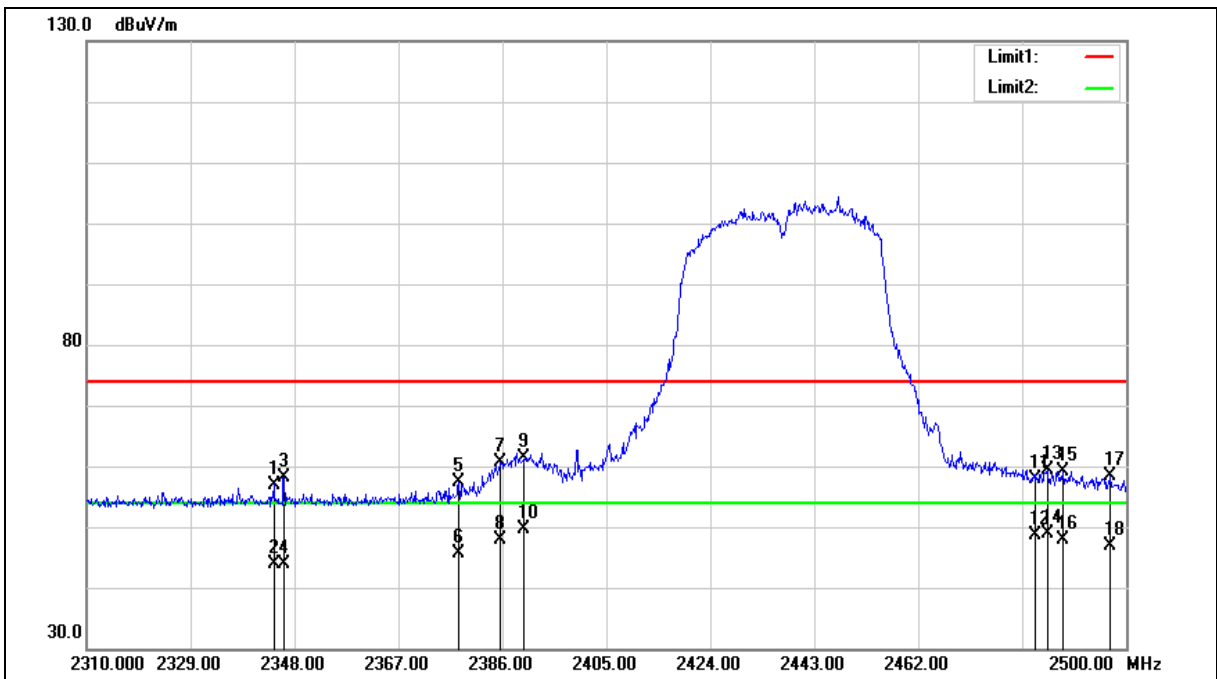



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	2344.200	58.22	-1.22	57.00	74.00	-17.00	peak
2	2344.200	45.08	-1.22	43.86	54.00	-10.14	AVG
3	2346.100	59.35	-1.20	58.15	74.00	-15.85	peak
4	2346.100	45.03	-1.20	43.83	54.00	-10.17	AVG
5	2378.020	58.44	-1.10	57.34	74.00	-16.66	peak
6	2378.020	46.69	-1.10	45.59	54.00	-8.41	AVG
7	2385.620	61.62	-1.07	60.55	74.00	-13.45	peak
8	2385.620	49.01	-1.07	47.94	54.00	-6.06	AVG
9	2390.000	62.37	-1.05	61.32	74.00	-12.68	peak
10	2390.000	50.67	-1.05	49.62	54.00	-4.38	AVG
11	2483.500	58.56	-0.70	57.86	74.00	-16.14	peak
12	2483.500	49.26	-0.70	48.56	54.00	-5.44	AVG
13	2485.560	60.09	-0.70	59.39	74.00	-14.61	peak
14	2485.560	49.63	-0.70	48.93	54.00	-5.07	AVG
15	2488.410	59.81	-0.68	59.13	74.00	-14.87	peak
16	2488.410	48.62	-0.68	47.94	54.00	-6.06	AVG
17	2497.150	59.00	-0.65	58.35	74.00	-15.65	peak
18	2497.150	47.49	-0.65	46.84	54.00	-7.16	AVG


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

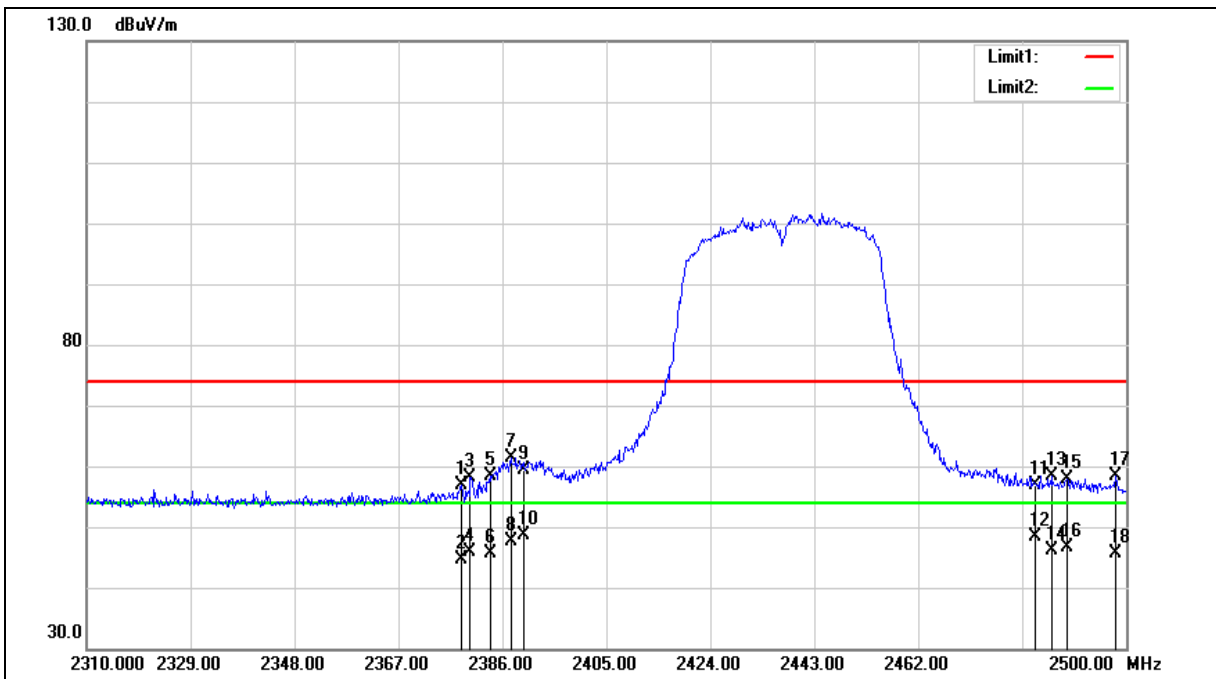





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.400	57.91	-1.10	56.81	74.00	-17.19	peak
2	2378.400	45.68	-1.10	44.58	54.00	-9.42	AVG
3	2380.110	59.22	-1.08	58.14	74.00	-15.86	peak
4	2380.110	46.95	-1.08	45.87	54.00	-8.13	AVG
5	2383.720	59.34	-1.07	58.27	74.00	-15.73	peak
6	2383.720	46.72	-1.07	45.65	54.00	-8.35	AVG
7	2387.520	62.39	-1.05	61.34	74.00	-12.66	peak
8	2387.520	48.57	-1.05	47.52	54.00	-6.48	AVG
9	2390.000	60.51	-1.05	59.46	74.00	-14.54	peak
10	2390.000	49.56	-1.05	48.51	54.00	-5.49	AVG
11	2483.500	57.58	-0.70	56.88	74.00	-17.12	peak
12	2483.500	48.98	-0.70	48.28	54.00	-5.72	AVG
13	2486.320	59.11	-0.70	58.41	74.00	-15.59	peak
14	2486.320	46.95	-0.70	46.25	54.00	-7.75	AVG
15	2489.170	58.56	-0.68	57.88	74.00	-16.12	peak
16	2489.170	47.32	-0.68	46.64	54.00	-7.36	AVG
17	2498.100	58.98	-0.64	58.34	74.00	-15.66	peak
18	2498.100	46.23	-0.64	45.59	54.00	-8.41	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

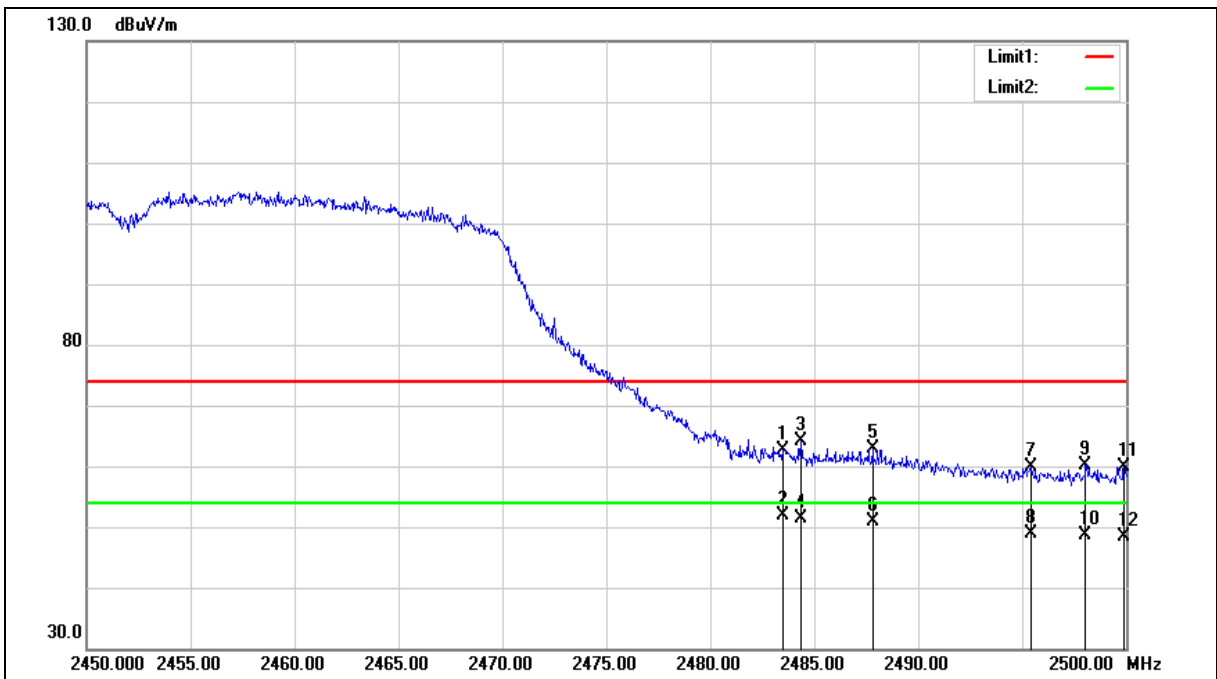



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.24	-0.70	62.54	74.00	-11.46	peak
2	2483.500	52.67	-0.70	51.97	54.00	-2.03	AVG
3	2484.350	64.86	-0.70	64.16	74.00	-9.84	peak
4	2484.350	52.18	-0.70	51.48	54.00	-2.52	AVG
5	2487.800	63.60	-0.68	62.92	74.00	-11.08	peak
6	2487.800	51.61	-0.68	50.93	54.00	-3.07	AVG
7	2495.400	60.44	-0.66	59.78	74.00	-14.22	peak
8	2495.400	49.50	-0.66	48.84	54.00	-5.16	AVG
9	2498.050	60.68	-0.65	60.03	74.00	-13.97	peak
10	2498.050	49.31	-0.65	48.66	54.00	-5.34	AVG
11	2499.900	60.58	-0.64	59.94	74.00	-14.06	peak
12	2499.900	49.13	-0.64	48.49	54.00	-5.51	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

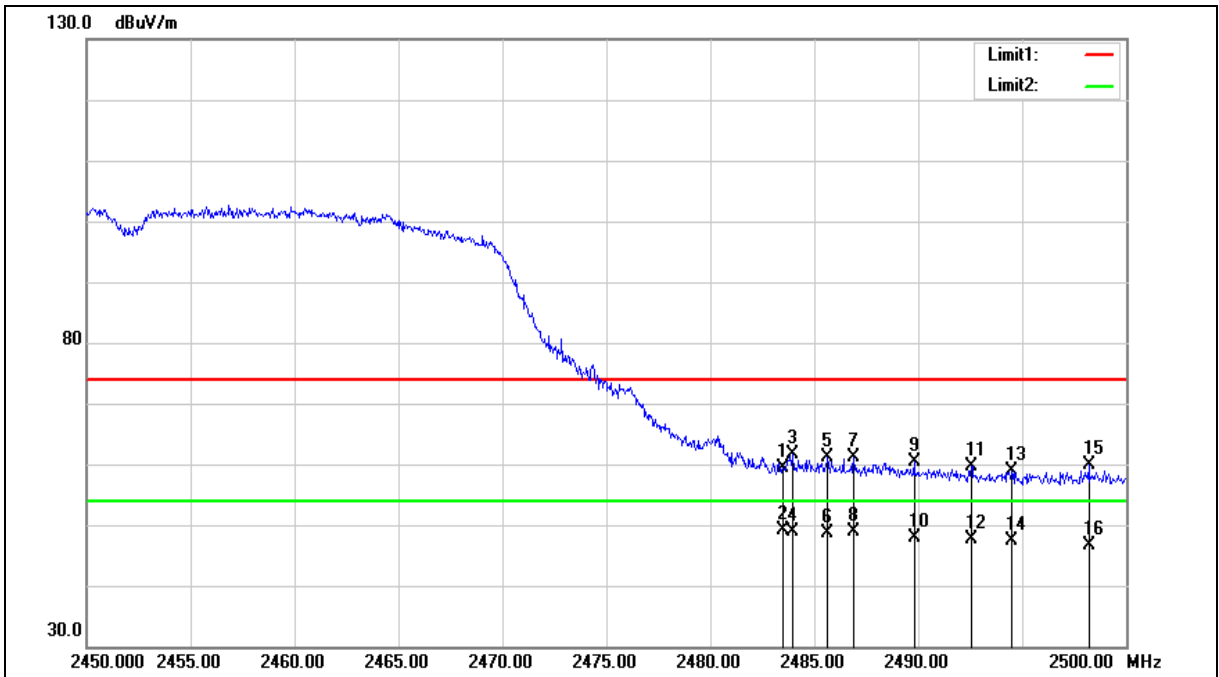



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.15	-0.70	59.45	74.00	-14.55	peak
2	2483.500	49.81	-0.70	49.11	54.00	-4.89	AVG
3	2483.950	62.43	-0.70	61.73	74.00	-12.27	peak
4	2483.950	49.58	-0.70	48.88	54.00	-5.12	AVG
5	2485.650	61.72	-0.70	61.02	74.00	-12.98	peak
6	2485.650	49.29	-0.70	48.59	54.00	-5.41	AVG
7	2486.900	61.72	-0.69	61.03	74.00	-12.97	peak
8	2486.900	49.52	-0.69	48.83	54.00	-5.17	AVG
9	2489.800	60.98	-0.68	60.30	74.00	-13.70	peak
10	2489.800	48.64	-0.68	47.96	54.00	-6.04	AVG
11	2492.550	60.36	-0.67	59.69	74.00	-14.31	peak
12	2492.550	48.41	-0.67	47.74	54.00	-6.26	AVG
13	2494.500	59.60	-0.66	58.94	74.00	-15.06	peak
14	2494.500	48.09	-0.66	47.43	54.00	-6.57	AVG
15	2498.200	60.41	-0.64	59.77	74.00	-14.23	peak
16	2498.200	47.36	-0.64	46.72	54.00	-7.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Model: PA300-E: External antenna

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

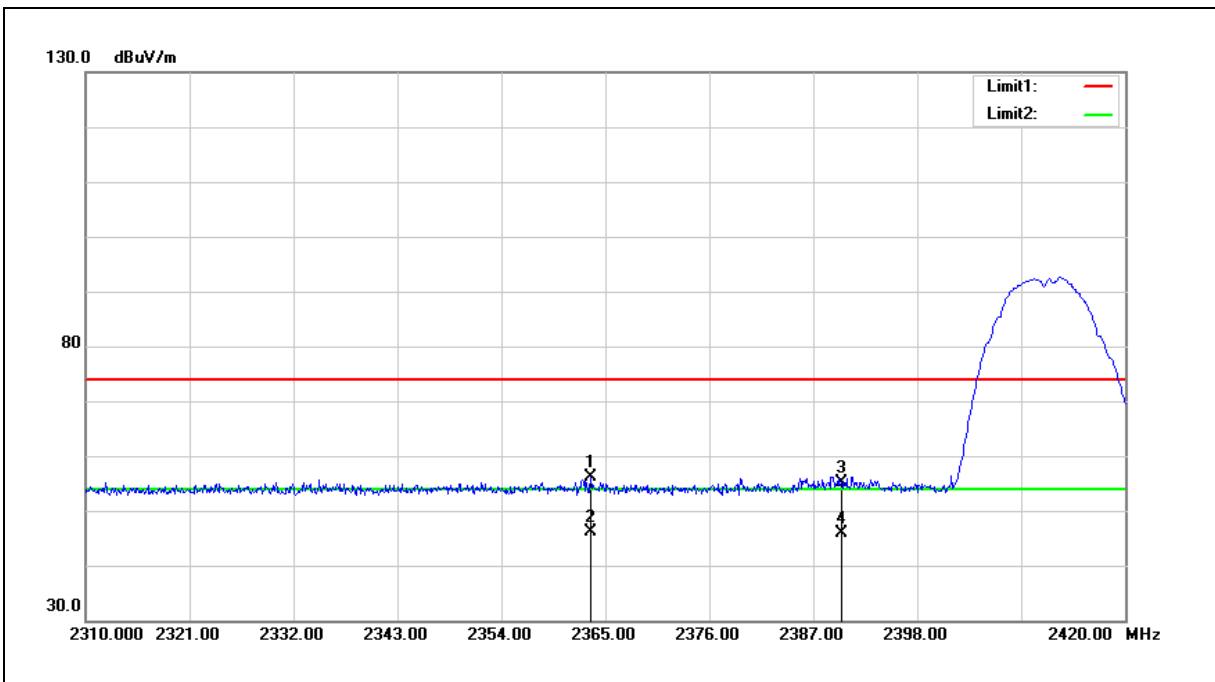

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.460	57.17	-1.14	56.03	74.00	-17.97	peak
2	2363.460	47.34	-1.14	46.20	54.00	-7.80	AVG
3	2390.000	56.19	-1.05	55.14	74.00	-18.86	peak
4	2390.000	46.98	-1.05	45.93	54.00	-8.07	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

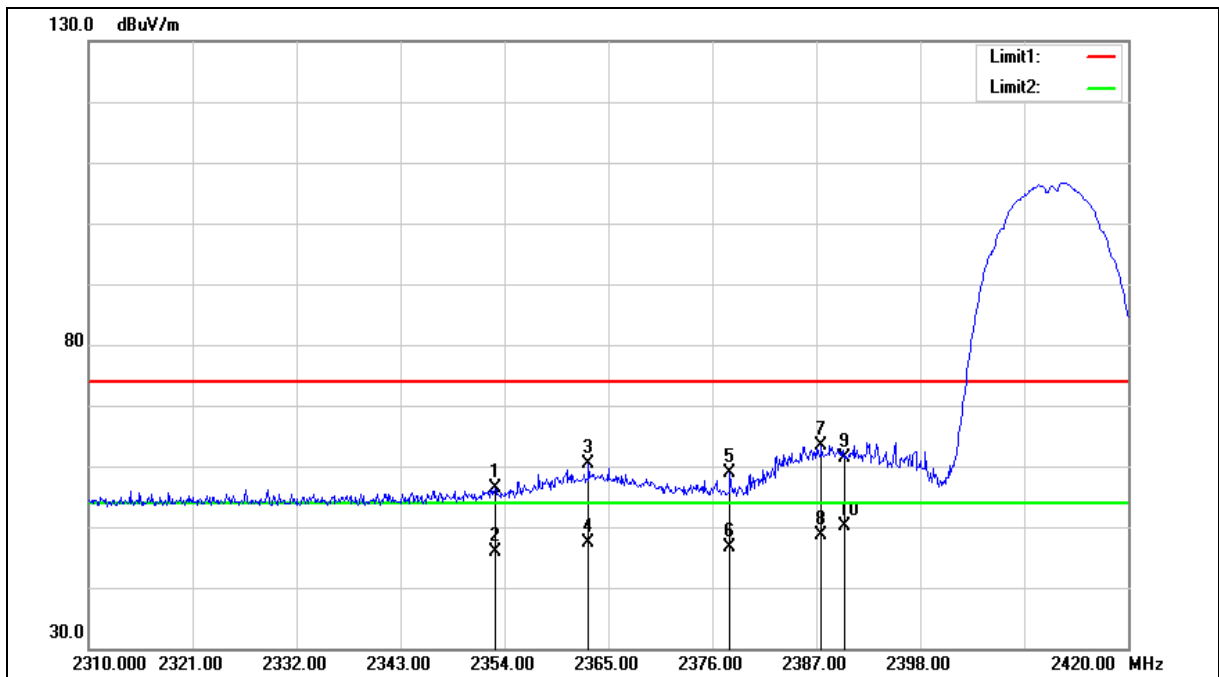



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2353.010	57.52	-1.18	56.34	74.00	-17.66	peak
2	2353.010	47.05	-1.18	45.87	54.00	-8.13	AVG
3	2362.910	61.50	-1.14	60.36	74.00	-13.64	peak
4	2362.910	48.53	-1.14	47.39	54.00	-6.61	AVG
5	2377.870	59.94	-1.10	58.84	74.00	-15.16	peak
6	2377.870	47.76	-1.10	46.66	54.00	-7.34	AVG
7	2387.550	64.36	-1.05	63.31	74.00	-10.69	peak
8	2387.550	49.68	-1.05	48.63	54.00	-5.37	AVG
9	2390.000	62.41	-1.05	61.36	74.00	-12.64	peak
10	2390.000	51.08	-1.05	50.03	54.00	-3.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

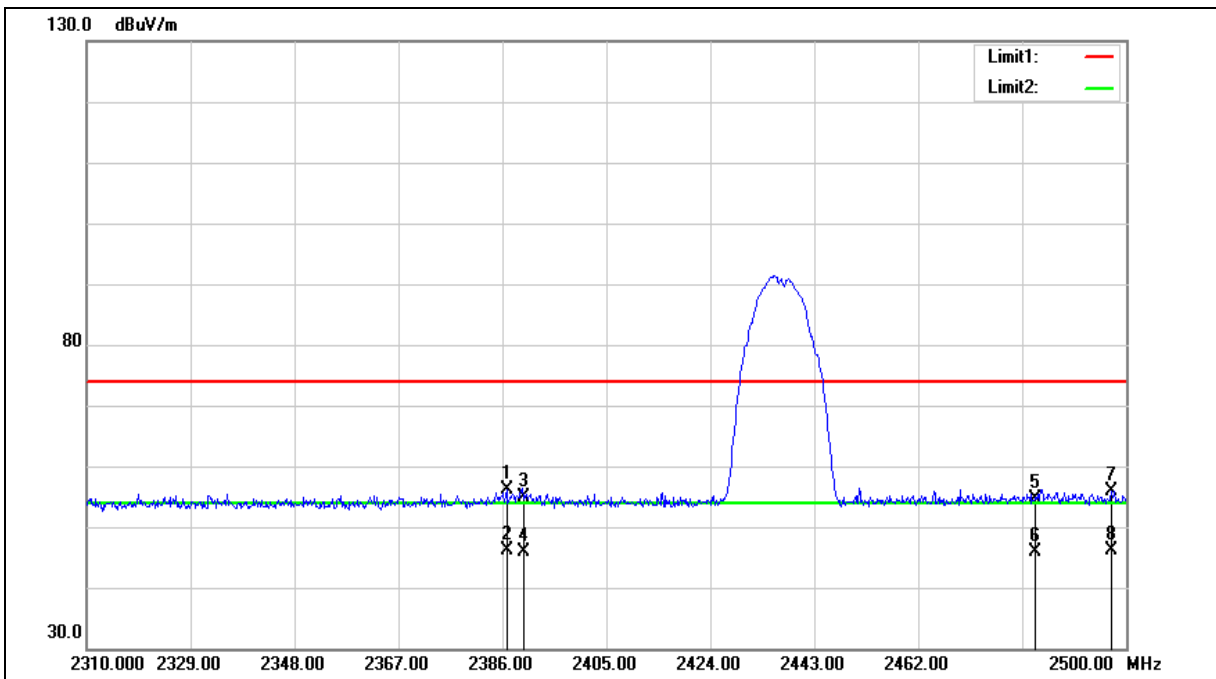



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.760	57.21	-1.06	56.15	74.00	-17.85	peak
2	2386.760	47.16	-1.06	46.10	54.00	-7.90	AVG
3	2390.000	56.01	-1.05	54.96	74.00	-19.04	peak
4	2390.000	46.94	-1.05	45.89	54.00	-8.11	AVG
5	2483.500	55.41	-0.70	54.71	74.00	-19.29	peak
6	2483.500	46.47	-0.70	45.77	54.00	-8.23	AVG
7	2497.340	56.45	-0.65	55.80	74.00	-18.20	peak
8	2497.340	46.66	-0.65	46.01	54.00	-7.99	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

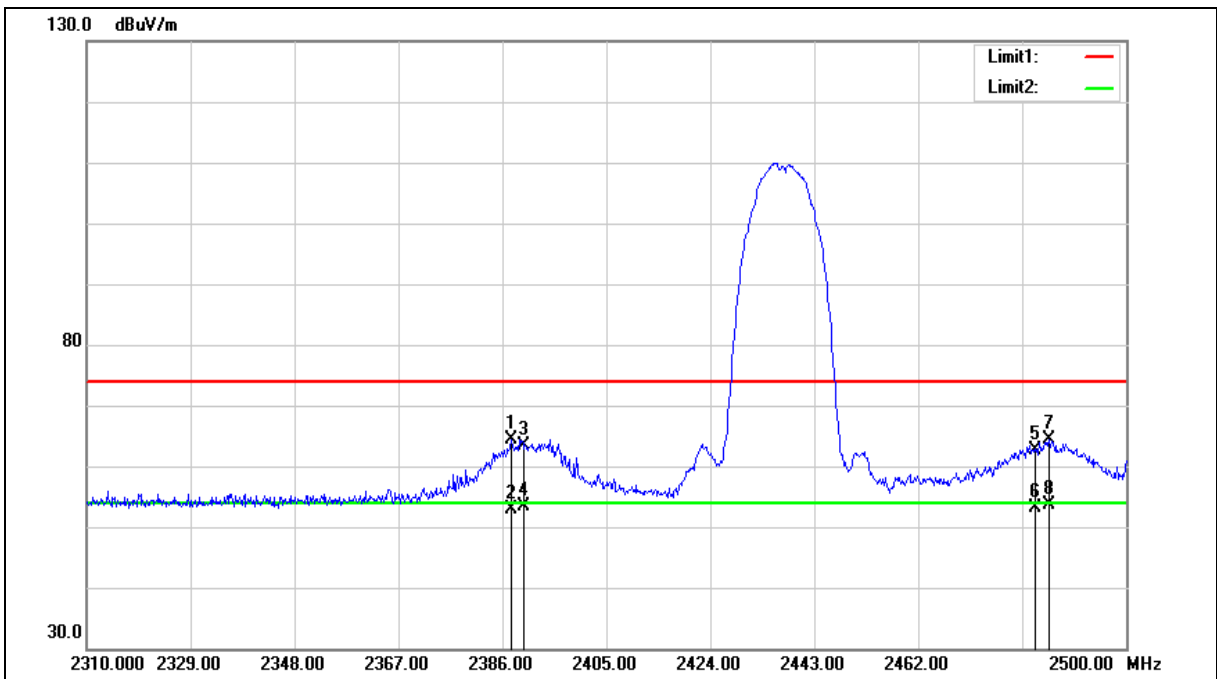



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.520	65.48	-1.05	64.43	74.00	-9.57	peak
2	2387.520	53.92	-1.05	52.87	54.00	-1.13	AVG
3	2390.000	64.42	-1.05	63.37	74.00	-10.63	peak
4	2390.000	54.43	-1.05	53.38	54.00	-0.62	AVG
5	2483.500	63.22	-0.70	62.52	74.00	-11.48	peak
6	2483.500	53.90	-0.70	53.20	54.00	-0.80	AVG
7	2485.940	65.07	-0.70	64.37	74.00	-9.63	peak
8	2485.940	54.42	-0.70	53.72	54.00	-0.28	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

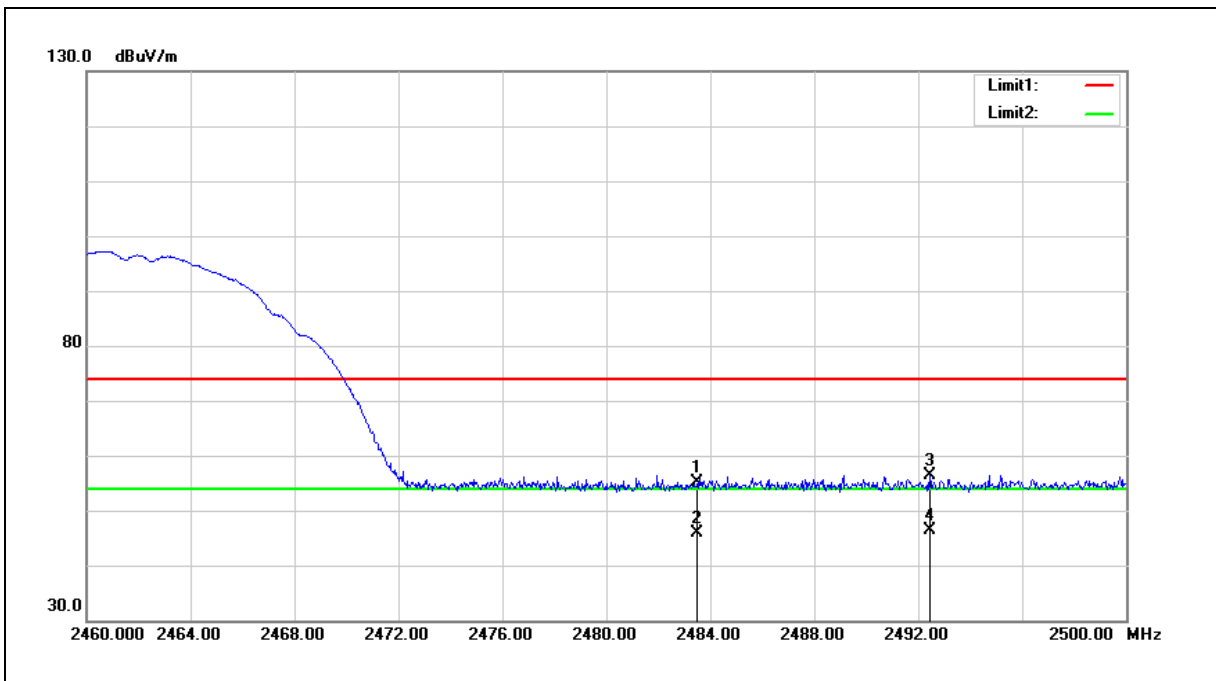

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.79	-0.70	55.09	74.00	-18.91	peak
2	2483.500	46.53	-0.70	45.83	54.00	-8.17	AVG
3	2492.440	57.08	-0.67	56.41	74.00	-17.59	peak
4	2492.440	47.03	-0.67	46.36	54.00	-7.64	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

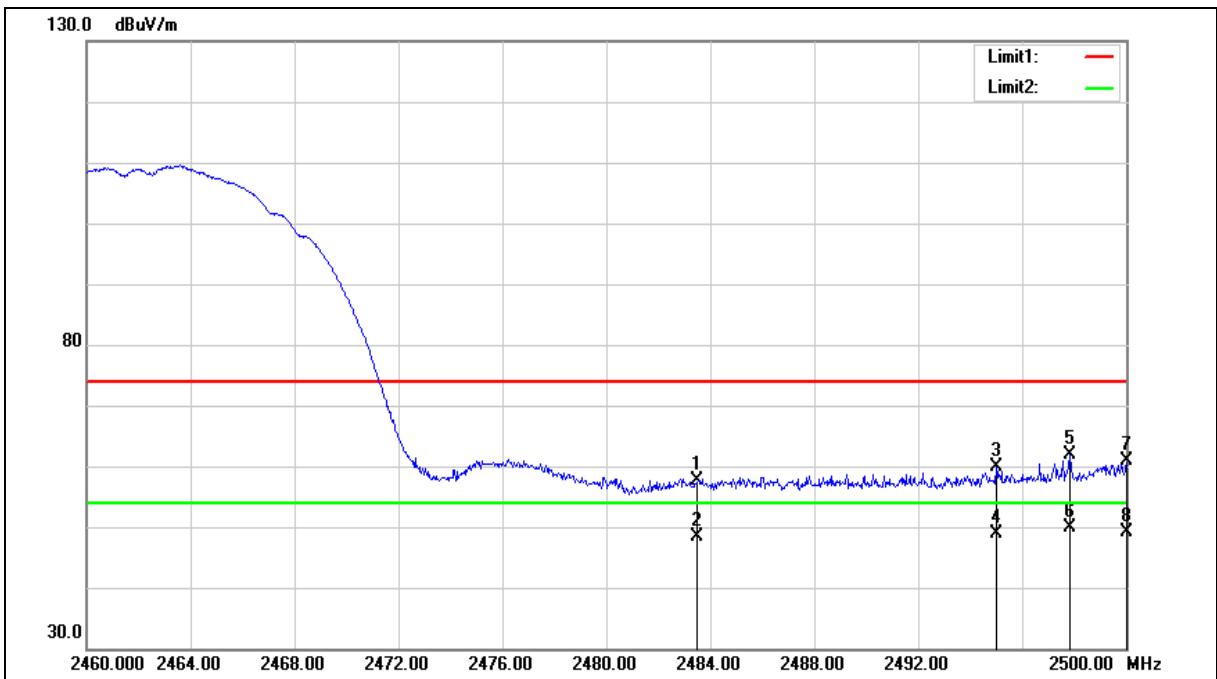



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.40	-0.70	57.70	74.00	-16.30	peak
2	2483.500	49.17	-0.70	48.47	54.00	-5.53	AVG
3	2495.000	60.62	-0.66	59.96	74.00	-14.04	peak
4	2495.000	49.64	-0.66	48.98	54.00	-5.02	AVG
5	2497.840	62.53	-0.65	61.88	74.00	-12.12	peak
6	2497.840	50.50	-0.65	49.85	54.00	-4.15	AVG
7	2500.000	61.48	-0.64	60.84	74.00	-13.16	peak
8	2500.000	49.76	-0.64	49.12	54.00	-4.88	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

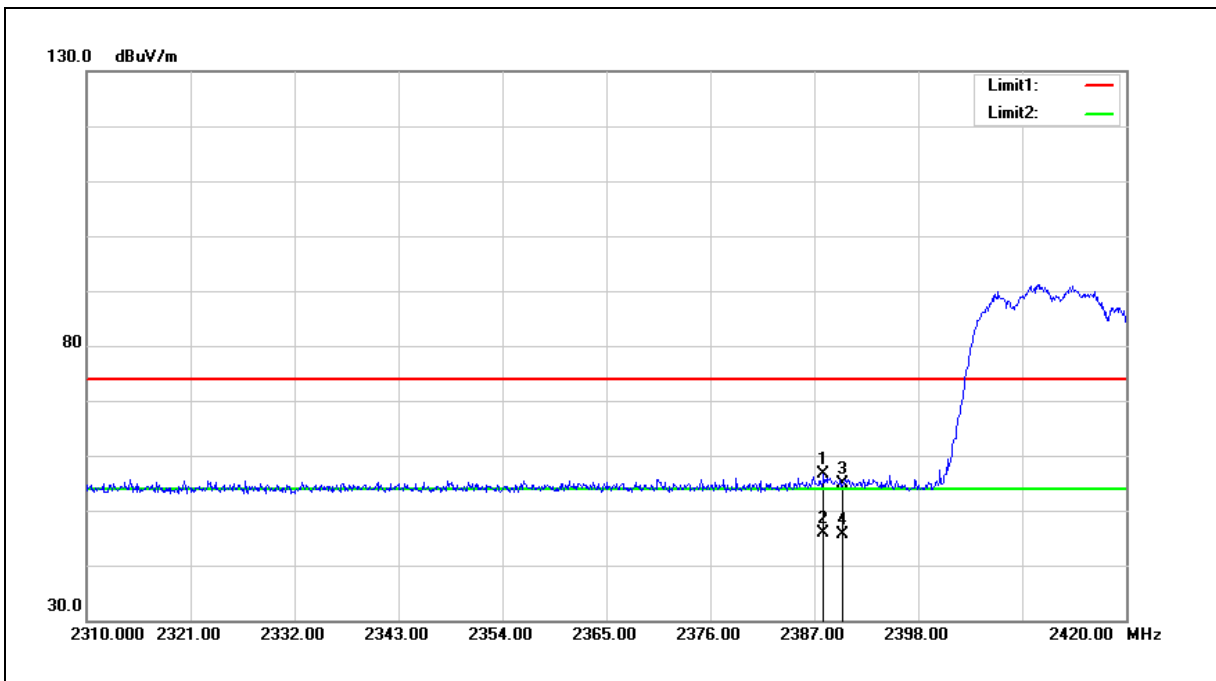

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.990	57.65	-1.05	56.60	74.00	-17.40	peak
2	2387.990	47.04	-1.05	45.99	54.00	-8.01	AVG
3	2390.000	55.87	-1.05	54.82	74.00	-19.18	peak
4	2390.000	46.66	-1.05	45.61	54.00	-8.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

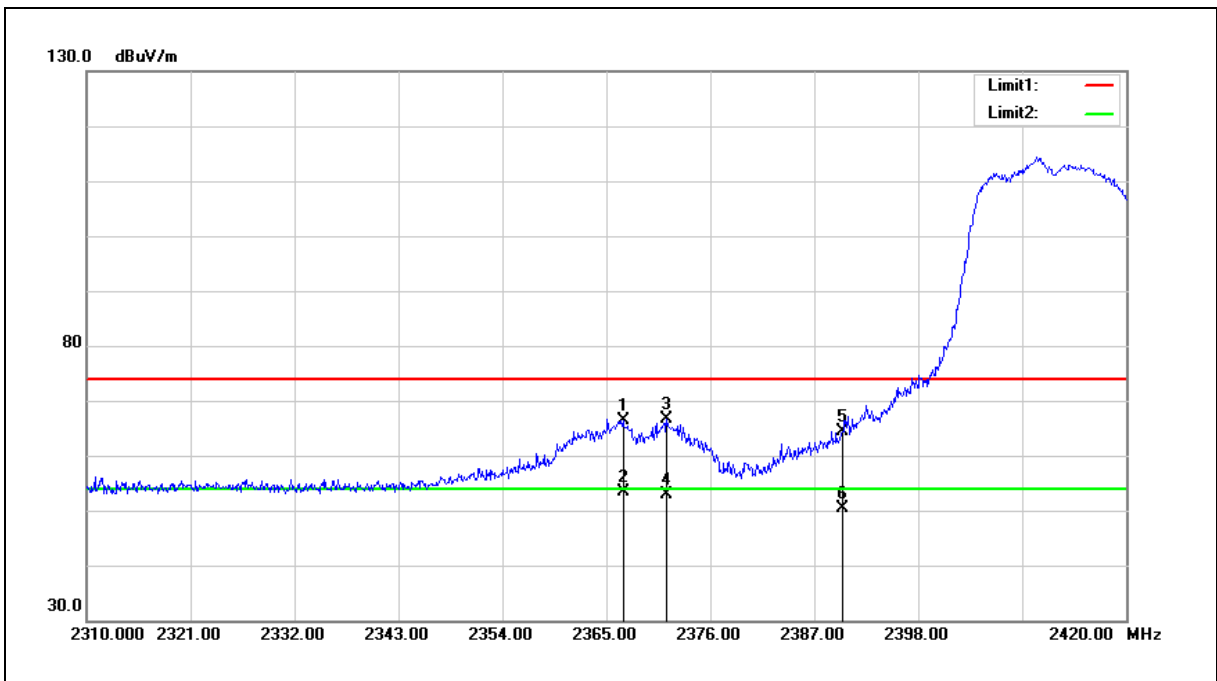

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2366.760	67.47	-1.13	66.34	74.00	-7.66	peak
2	2366.760	54.61	-1.13	53.48	54.00	-0.52	AVG
3	2371.380	67.62	-1.10	66.52	74.00	-7.48	peak
4	2371.380	53.96	-1.10	52.86	54.00	-1.14	AVG
5	2390.000	65.44	-1.05	64.39	74.00	-9.61	peak
6	2390.000	51.46	-1.05	50.41	54.00	-3.59	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

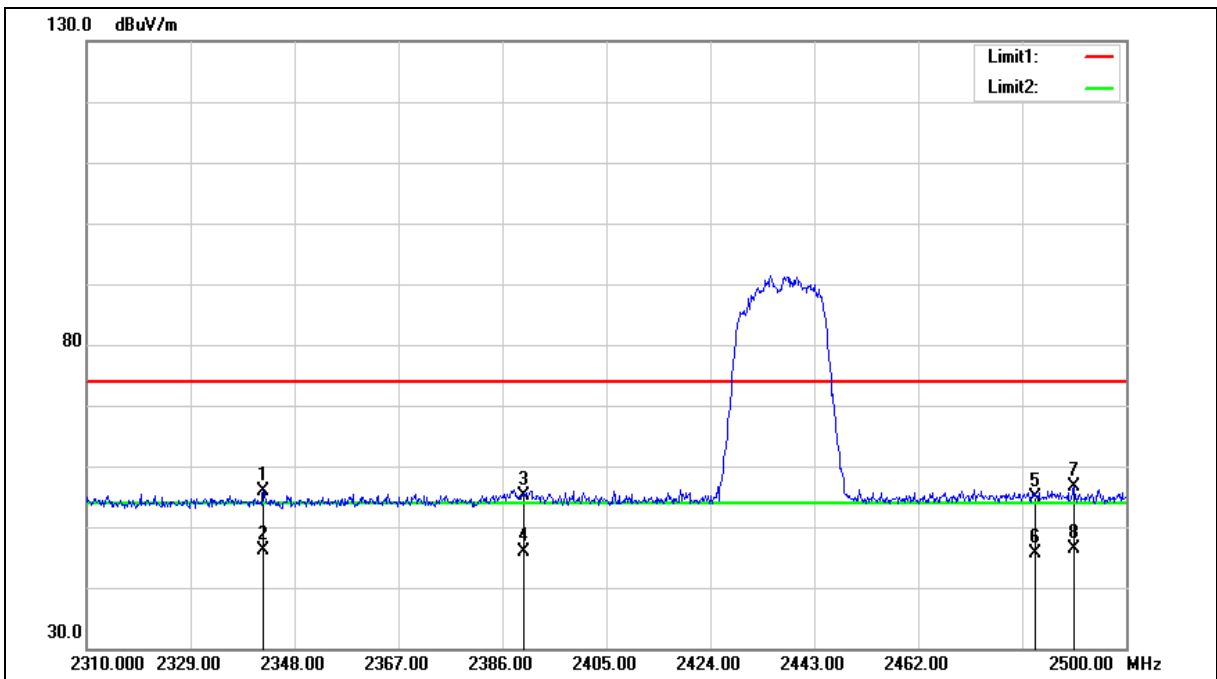



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2342.300	57.20	-1.22	55.98	74.00	-18.02	peak
2	2342.300	47.23	-1.22	46.01	54.00	-7.99	AVG
3	2390.000	56.21	-1.05	55.16	74.00	-18.84	peak
4	2390.000	47.02	-1.05	45.97	54.00	-8.03	AVG
5	2483.500	55.64	-0.70	54.94	74.00	-19.06	peak
6	2483.500	46.42	-0.70	45.72	54.00	-8.28	AVG
7	2490.500	57.40	-0.67	56.73	74.00	-17.27	peak
8	2490.500	47.01	-0.67	46.34	54.00	-7.66	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

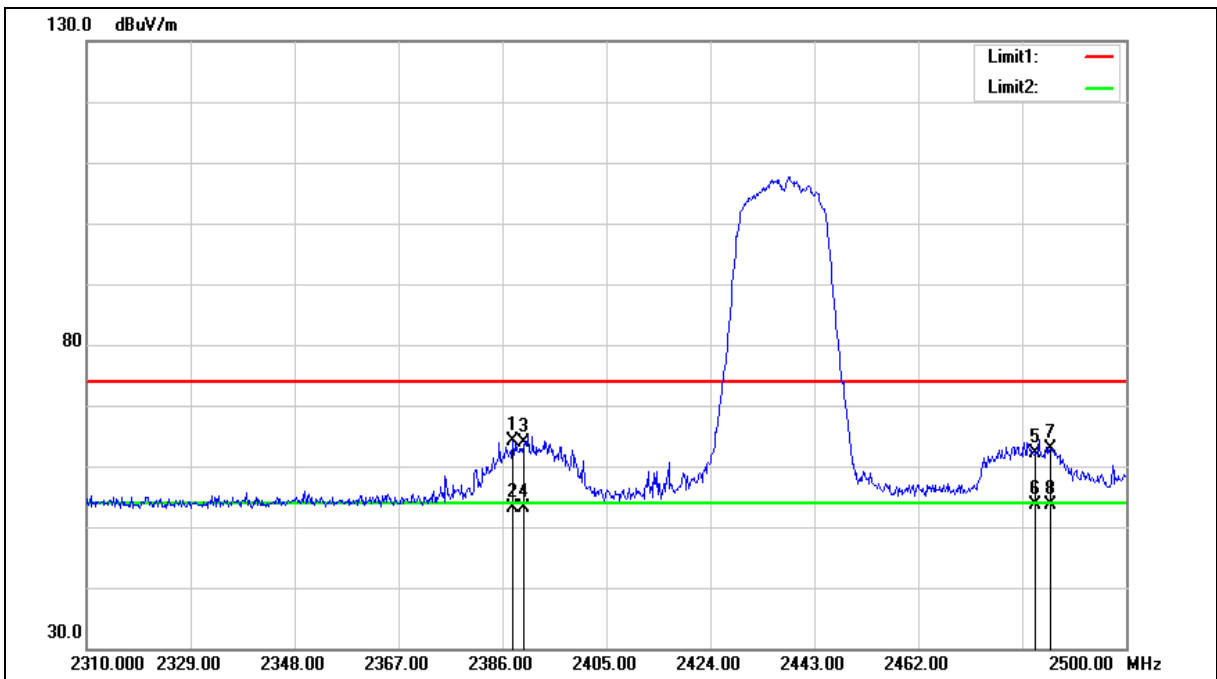



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.900	65.13	-1.05	64.08	74.00	-9.92	peak
2	2387.900	54.09	-1.05	53.04	54.00	-0.96	AVG
3	2390.000	65.00	-1.05	63.95	74.00	-10.05	peak
4	2390.000	54.12	-1.05	53.07	54.00	-0.93	AVG
5	2483.500	62.89	-0.70	62.19	74.00	-11.81	peak
6	2483.500	54.34	-0.70	53.64	54.00	-0.36	AVG
7	2486.130	63.57	-0.70	62.87	74.00	-11.13	peak
8	2486.130	54.43	-0.70	53.73	54.00	-0.27	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

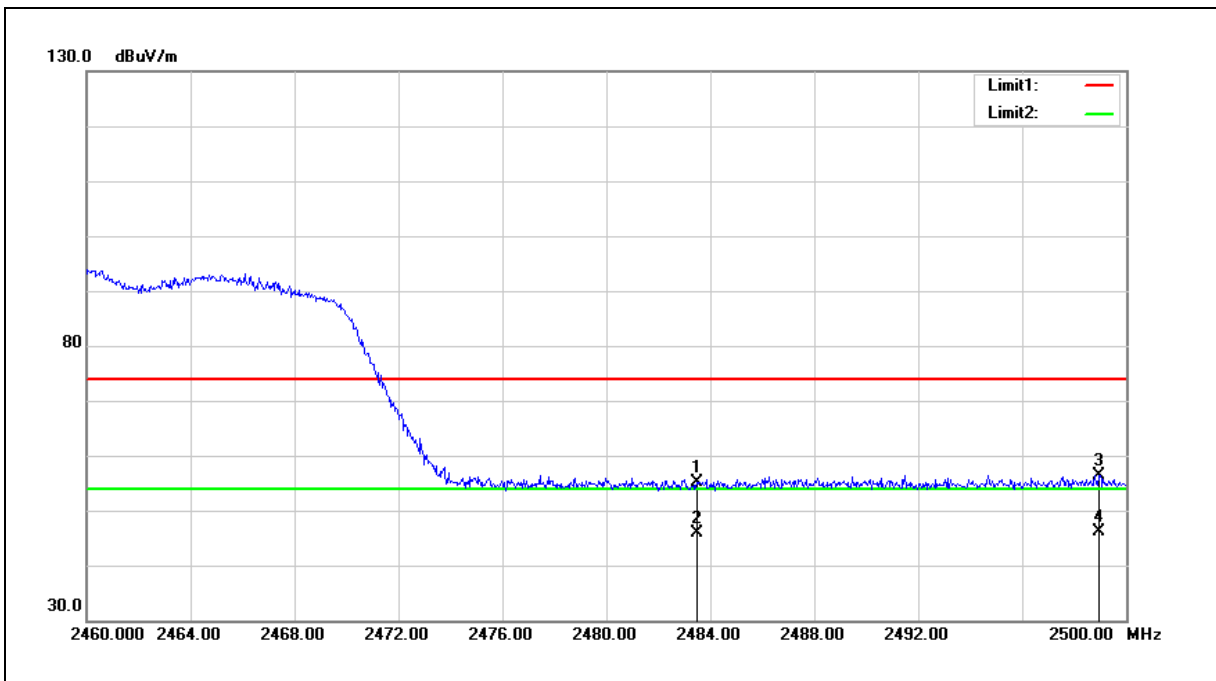


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.79	-0.70	55.09	74.00	-18.91	peak
2	2483.500	46.57	-0.70	45.87	54.00	-8.13	AVG
3	2498.960	57.08	-0.64	56.44	74.00	-17.56	peak
4	2498.960	46.83	-0.64	46.19	54.00	-7.81	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

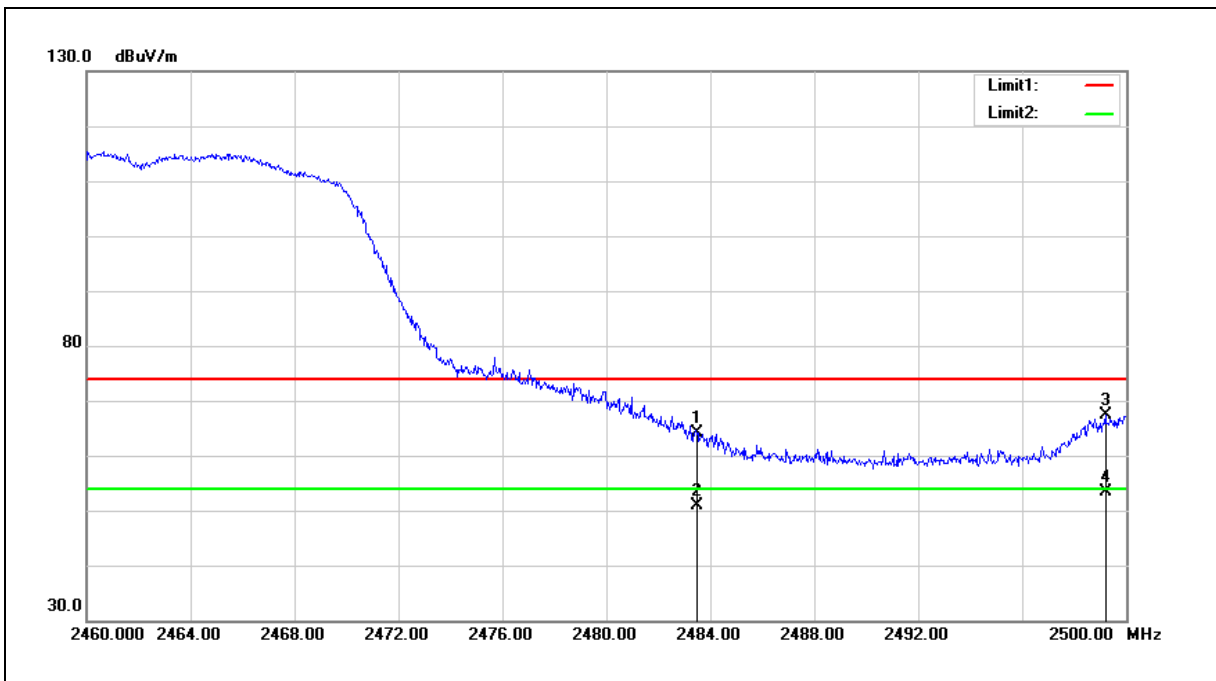

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.75	-0.70	64.05	74.00	-9.95	peak
2	2483.500	51.55	-0.70	50.85	54.00	-3.15	AVG
3	2499.200	68.00	-0.64	67.36	74.00	-6.64	peak
4	2499.200	53.95	-0.64	53.31	54.00	-0.69	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

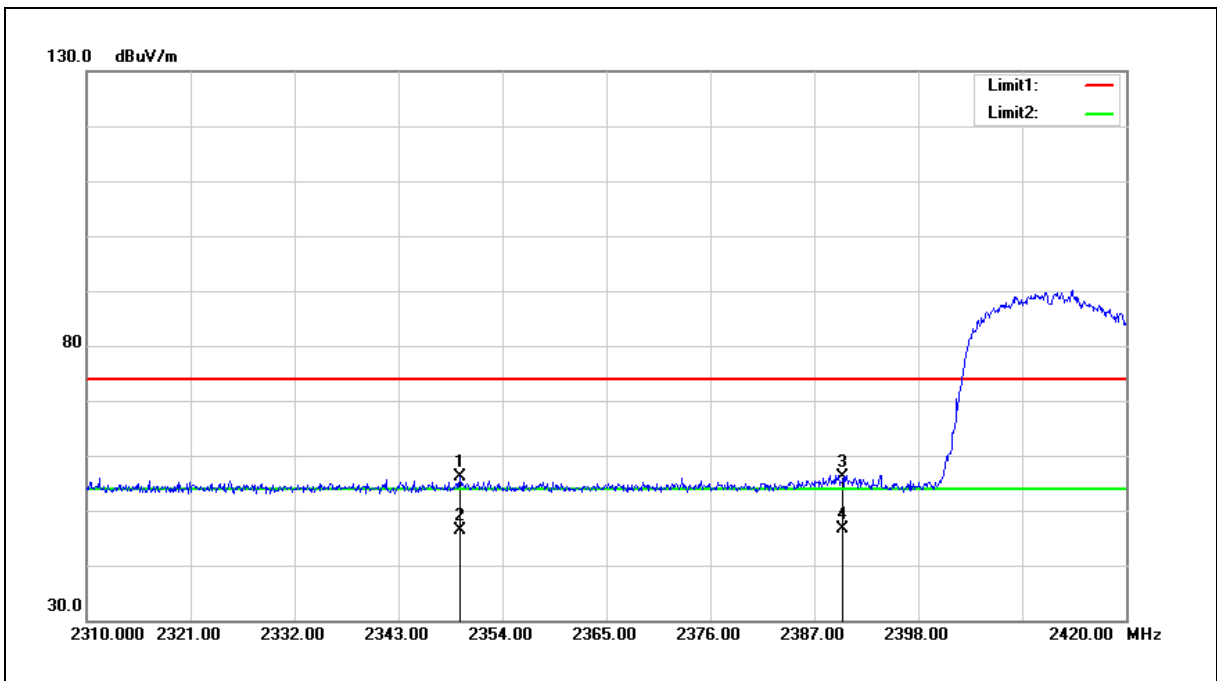

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.490	57.25	-1.19	56.06	74.00	-17.94	peak
2	2349.490	47.47	-1.19	46.28	54.00	-7.72	AVG
3	2390.000	57.29	-1.05	56.24	74.00	-17.76	peak
4	2390.000	47.70	-1.05	46.65	54.00	-7.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2412 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

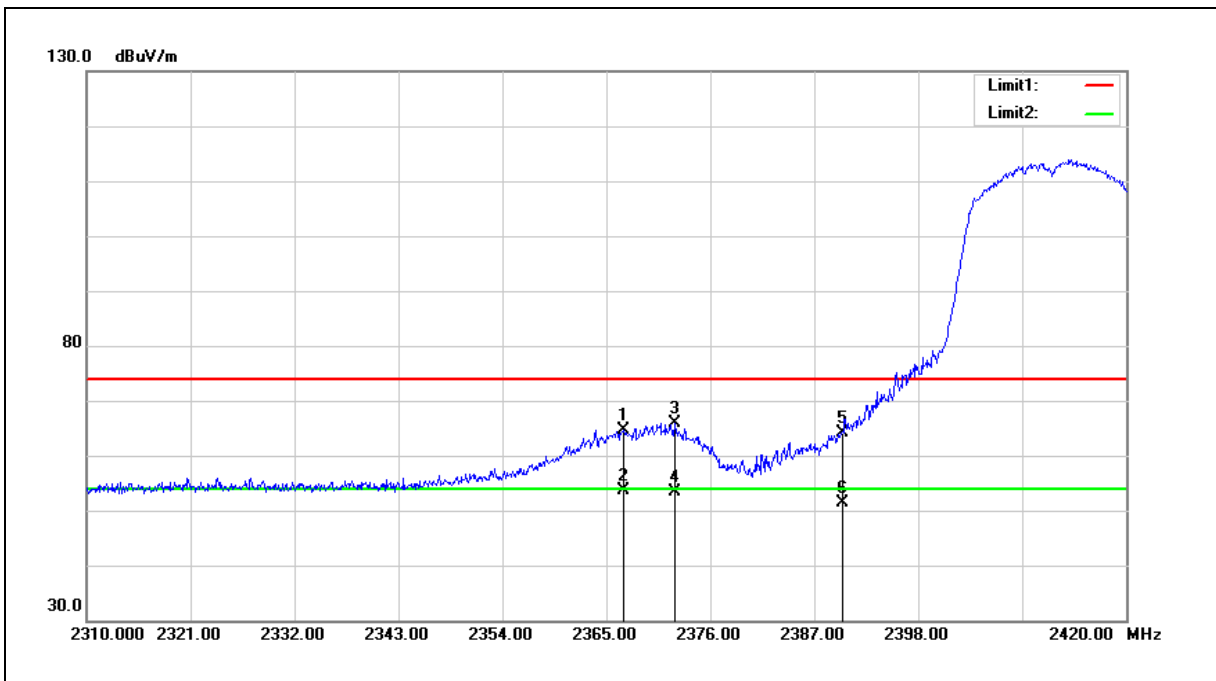

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2366.870	65.73	-1.13	64.60	74.00	-9.40	peak
2	2366.870	54.76	-1.13	53.63	54.00	-0.37	AVG
3	2372.260	66.95	-1.10	65.85	74.00	-8.15	peak
4	2372.260	54.42	-1.10	53.32	54.00	-0.68	AVG
5	2390.000	65.14	-1.05	64.09	74.00	-9.91	peak
6	2390.000	52.37	-1.05	51.32	54.00	-2.68	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

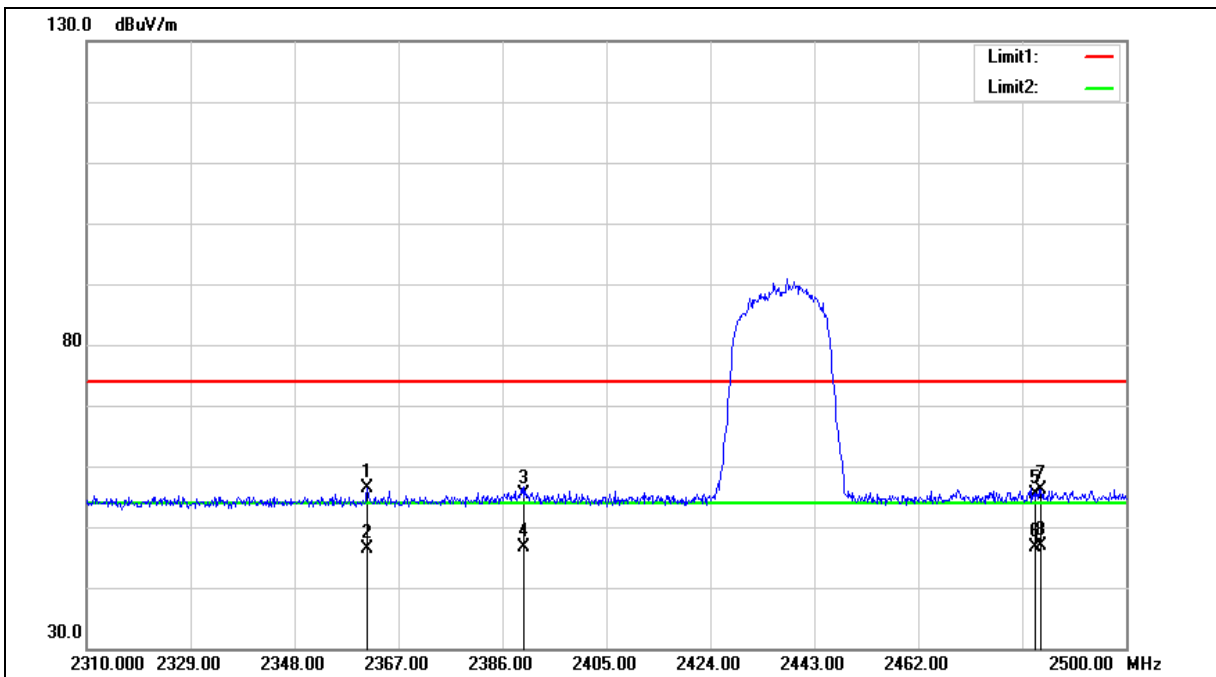



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.300	57.51	-1.15	56.36	74.00	-17.64	peak
2	2361.300	47.57	-1.15	46.42	54.00	-7.58	AVG
3	2390.000	56.45	-1.05	55.40	74.00	-18.60	peak
4	2390.000	47.59	-1.05	46.54	54.00	-7.46	AVG
5	2483.500	55.99	-0.70	55.29	74.00	-18.71	peak
6	2483.500	47.30	-0.70	46.60	54.00	-7.40	AVG
7	2484.420	56.83	-0.70	56.13	74.00	-17.87	peak
8	2484.420	47.57	-0.70	46.87	54.00	-7.13	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

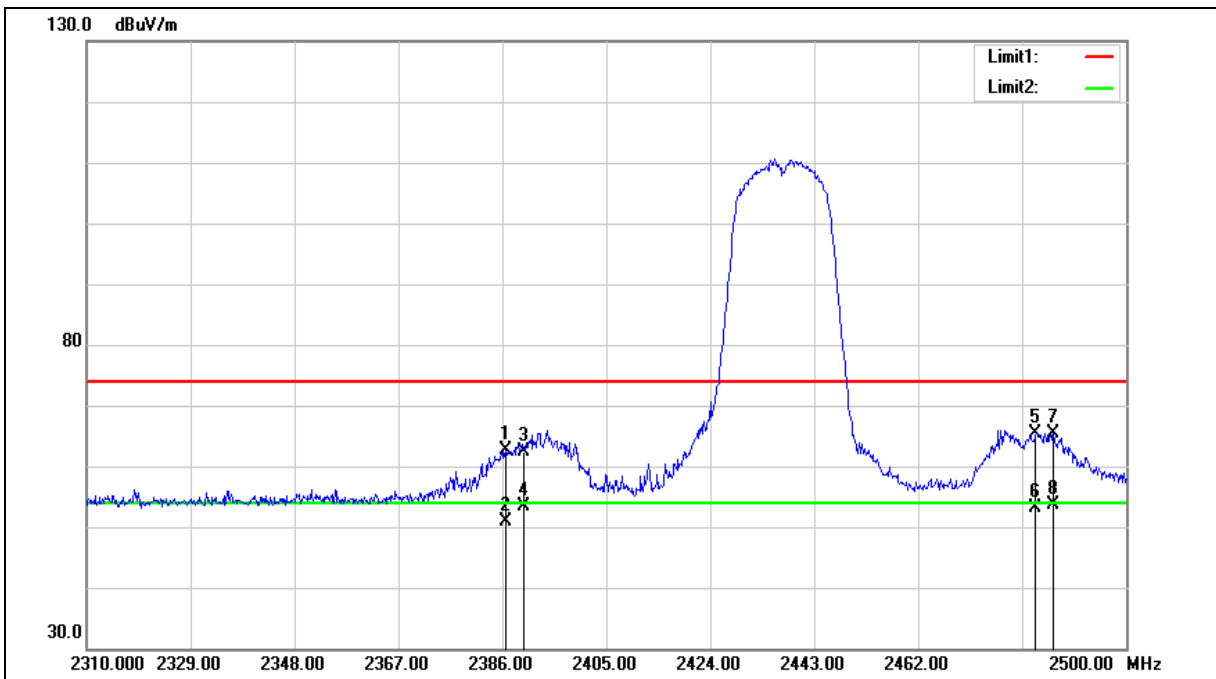



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.570	63.62	-1.06	62.56	74.00	-11.44	peak
2	2386.570	51.91	-1.06	50.85	54.00	-3.15	AVG
3	2390.000	63.52	-1.05	62.47	74.00	-11.53	peak
4	2390.000	54.38	-1.05	53.33	54.00	-0.67	AVG
5	2483.500	66.06	-0.70	65.36	74.00	-8.64	peak
6	2483.500	53.76	-0.70	53.06	54.00	-0.94	AVG
7	2486.700	66.08	-0.69	65.39	74.00	-8.61	peak
8	2486.700	54.20	-0.69	53.51	54.00	-0.49	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

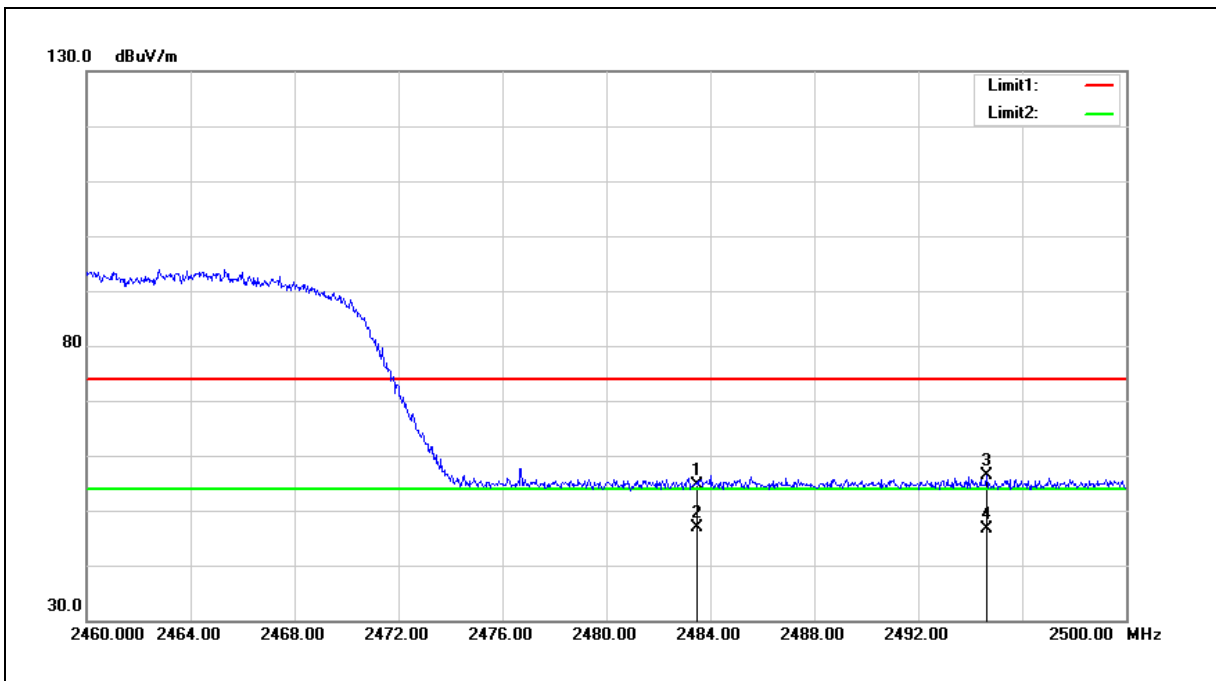


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.31	-0.70	54.61	74.00	-19.39	peak
2	2483.500	47.49	-0.70	46.79	54.00	-7.21	AVG
3	2494.640	56.97	-0.66	56.31	74.00	-17.69	peak
4	2494.640	47.18	-0.66	46.52	54.00	-7.48	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2462 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

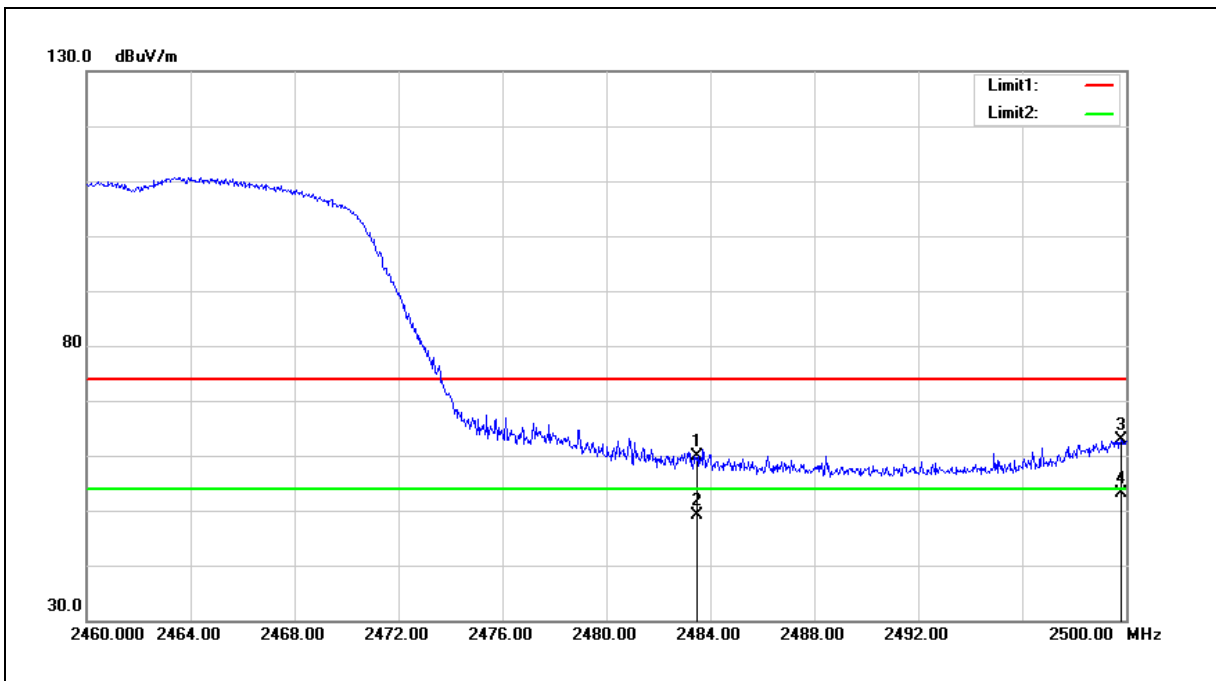

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	60.59	-0.70	59.89	74.00	-14.11	peak
2	2483.500	49.78	-0.70	49.08	54.00	-4.92	AVG
3	2499.800	63.54	-0.64	62.90	74.00	-11.10	peak
4	2499.800	53.89	-0.64	53.25	54.00	-0.75	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

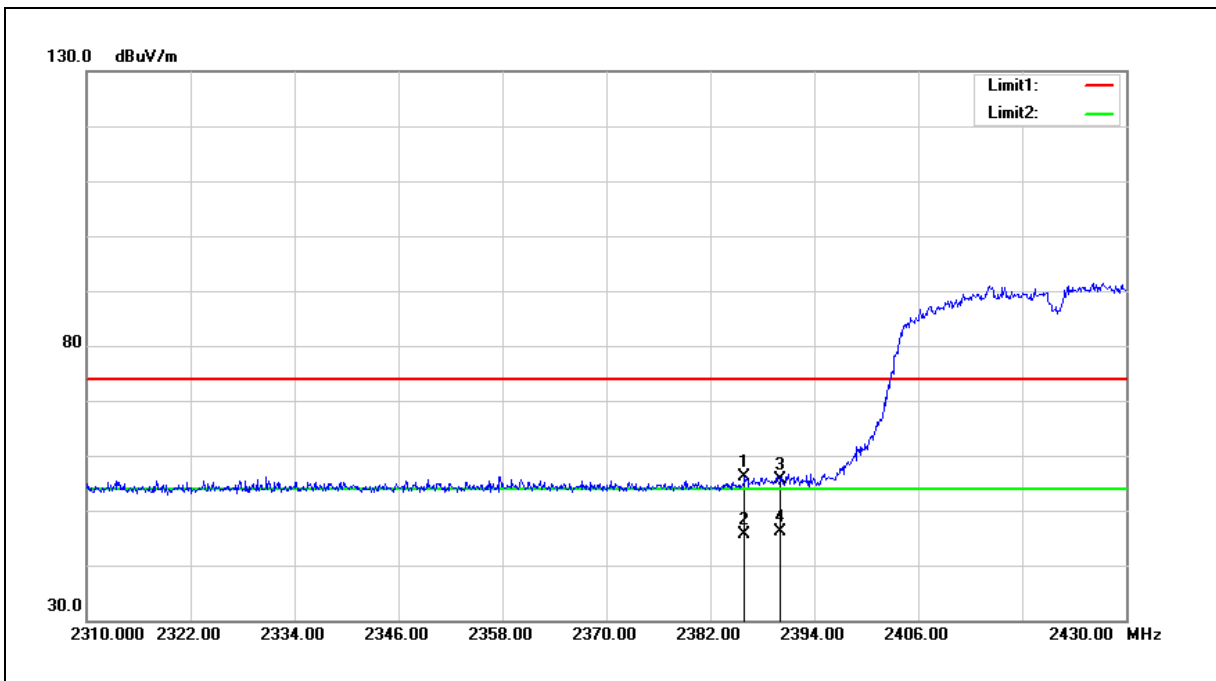

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.960	57.26	-1.07	56.19	74.00	-17.81	peak
2	2385.960	46.80	-1.07	45.73	54.00	-8.27	AVG
3	2390.000	56.72	-1.05	55.67	74.00	-18.33	peak
4	2390.000	47.15	-1.05	46.10	54.00	-7.90	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

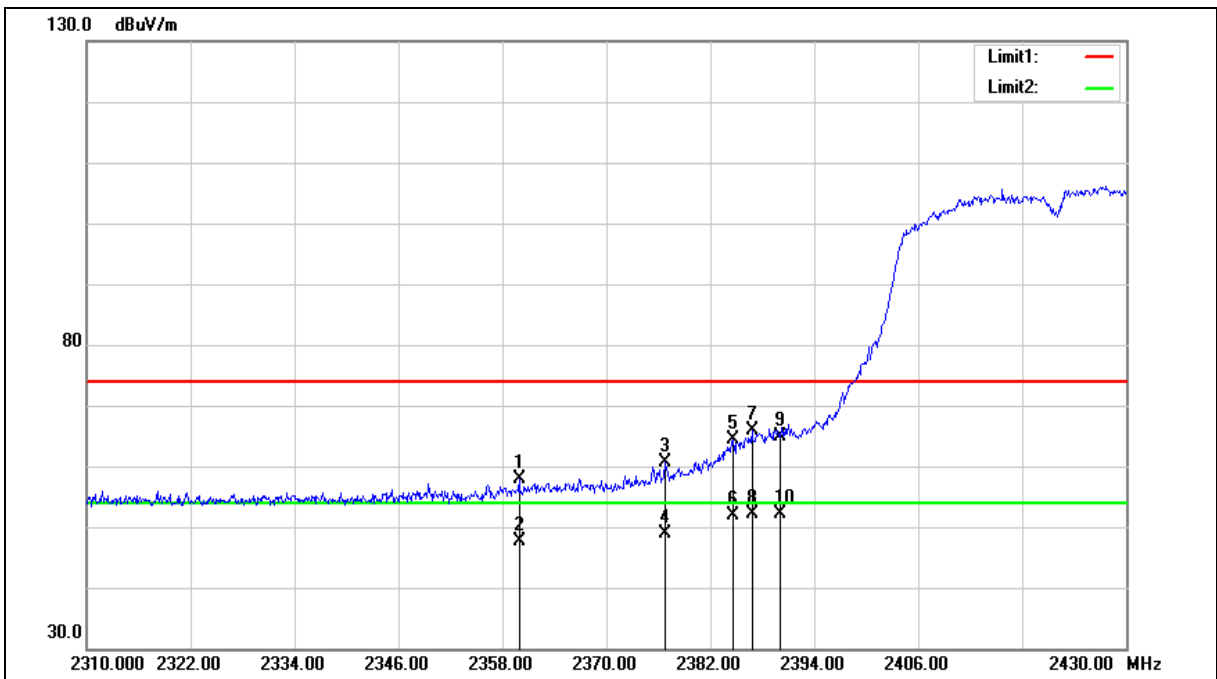



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2422 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2359.920	58.91	-1.15	57.76	74.00	-16.24	peak
2	2359.920	48.80	-1.15	47.65	54.00	-6.35	AVG
3	2376.840	61.76	-1.10	60.66	74.00	-13.34	peak
4	2376.840	50.08	-1.10	48.98	54.00	-5.02	AVG
5	2384.640	65.41	-1.07	64.34	74.00	-9.66	peak
6	2384.640	53.01	-1.07	51.94	54.00	-2.06	AVG
7	2386.800	67.01	-1.06	65.95	74.00	-8.05	peak
8	2386.800	53.27	-1.06	52.21	54.00	-1.79	AVG
9	2390.000	65.96	-1.05	64.91	74.00	-9.09	peak
10	2390.000	53.10	-1.05	52.05	54.00	-1.95	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

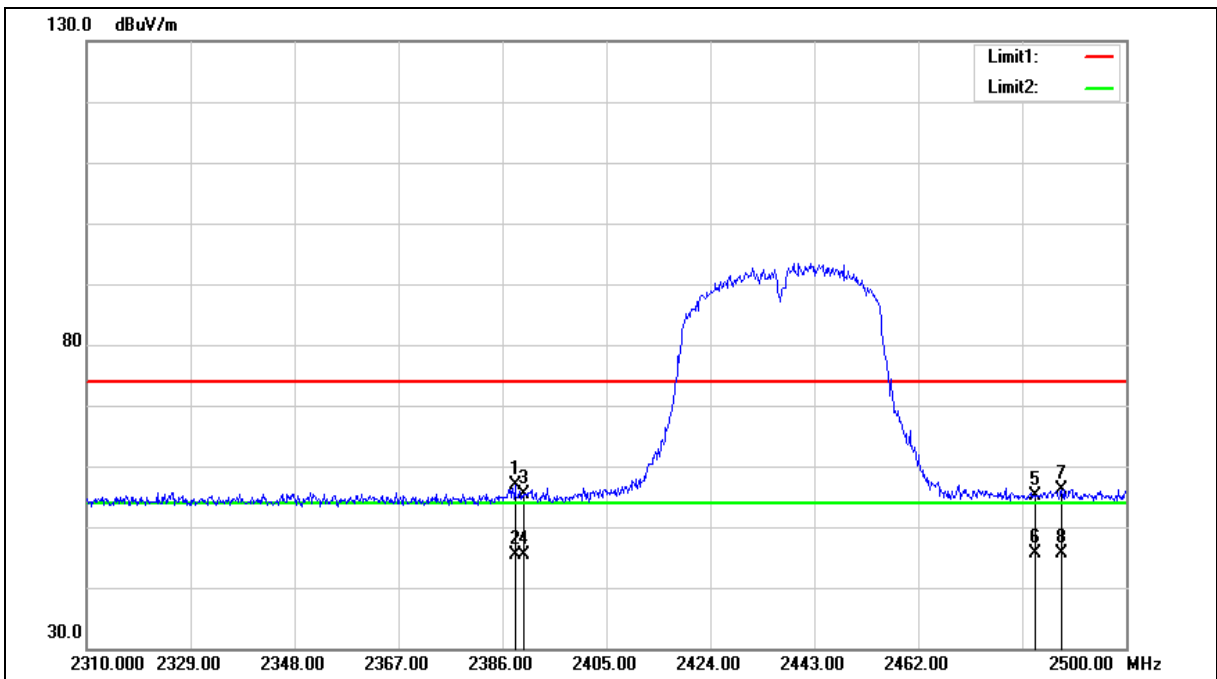



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.280	57.95	-1.05	56.90	74.00	-17.10	peak
2	2388.280	46.42	-1.05	45.37	54.00	-8.63	AVG
3	2390.000	56.38	-1.05	55.33	74.00	-18.67	peak
4	2390.000	46.35	-1.05	45.30	54.00	-8.70	AVG
5	2483.500	55.90	-0.70	55.20	74.00	-18.80	peak
6	2483.500	46.22	-0.70	45.52	54.00	-8.48	AVG
7	2488.220	56.86	-0.68	56.18	74.00	-17.82	peak
8	2488.220	46.35	-0.68	45.67	54.00	-8.33	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

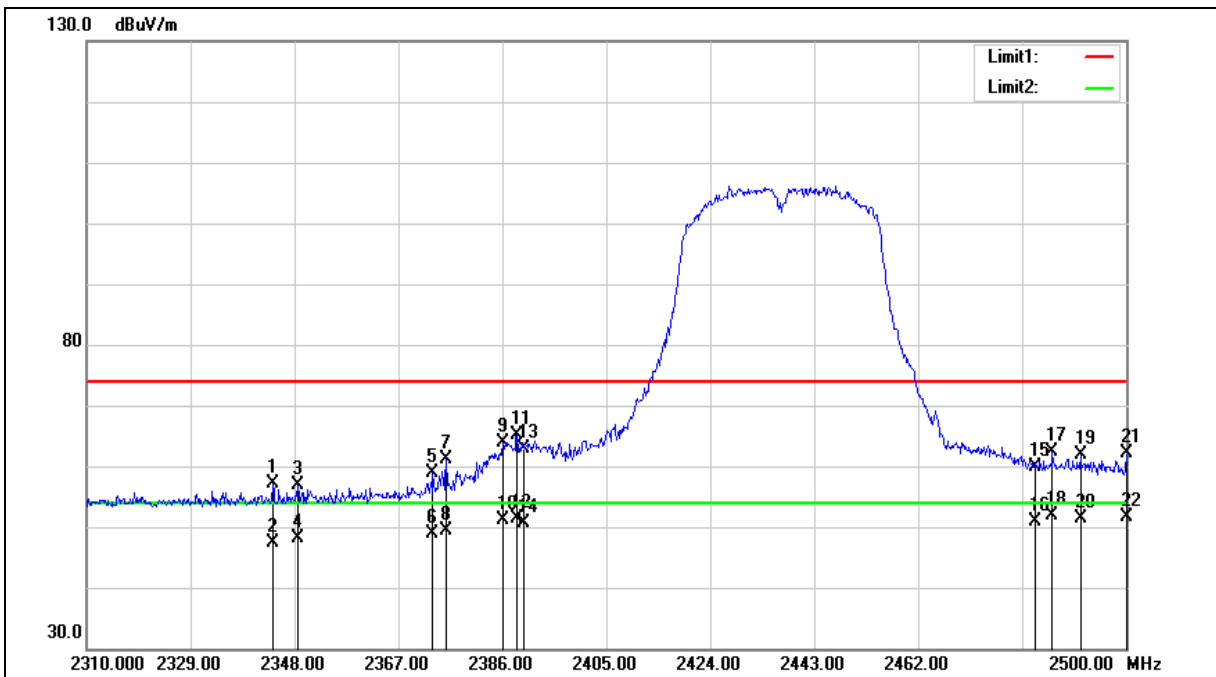



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2437 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2344.010	58.24	-1.22	57.02	74.00	-16.98	peak
2	2344.010	48.72	-1.22	47.50	54.00	-6.50	AVG
3	2348.570	58.07	-1.19	56.88	74.00	-17.12	peak
4	2348.570	49.40	-1.19	48.21	54.00	-5.79	AVG
5	2373.270	59.90	-1.10	58.80	74.00	-15.20	peak
6	2373.270	49.91	-1.10	48.81	54.00	-5.19	AVG
7	2375.740	62.16	-1.10	61.06	74.00	-12.94	peak
8	2375.740	50.51	-1.10	49.41	54.00	-4.59	AVG
9	2386.190	65.07	-1.07	64.00	74.00	-10.00	peak
10	2386.190	52.24	-1.07	51.17	54.00	-2.83	AVG
11	2388.660	66.25	-1.05	65.20	74.00	-8.80	peak
12	2388.660	52.55	-1.05	51.50	54.00	-2.50	AVG
13	2390.000	63.94	-1.05	62.89	74.00	-11.11	peak
14	2390.000	51.70	-1.05	50.65	54.00	-3.35	AVG
15	2483.500	60.57	-0.70	59.87	74.00	-14.13	peak
16	2483.500	51.68	-0.70	50.98	54.00	-3.02	AVG
17	2486.510	62.98	-0.70	62.28	74.00	-11.72	peak
18	2486.510	52.55	-0.70	51.85	54.00	-2.15	AVG
19	2491.640	62.55	-0.67	61.88	74.00	-12.12	peak
20	2491.640	52.07	-0.67	51.40	54.00	-2.60	AVG
21	2500.000	62.69	-0.64	62.05	74.00	-11.95	peak
22	2500.000	52.36	-0.64	51.72	54.00	-2.28	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

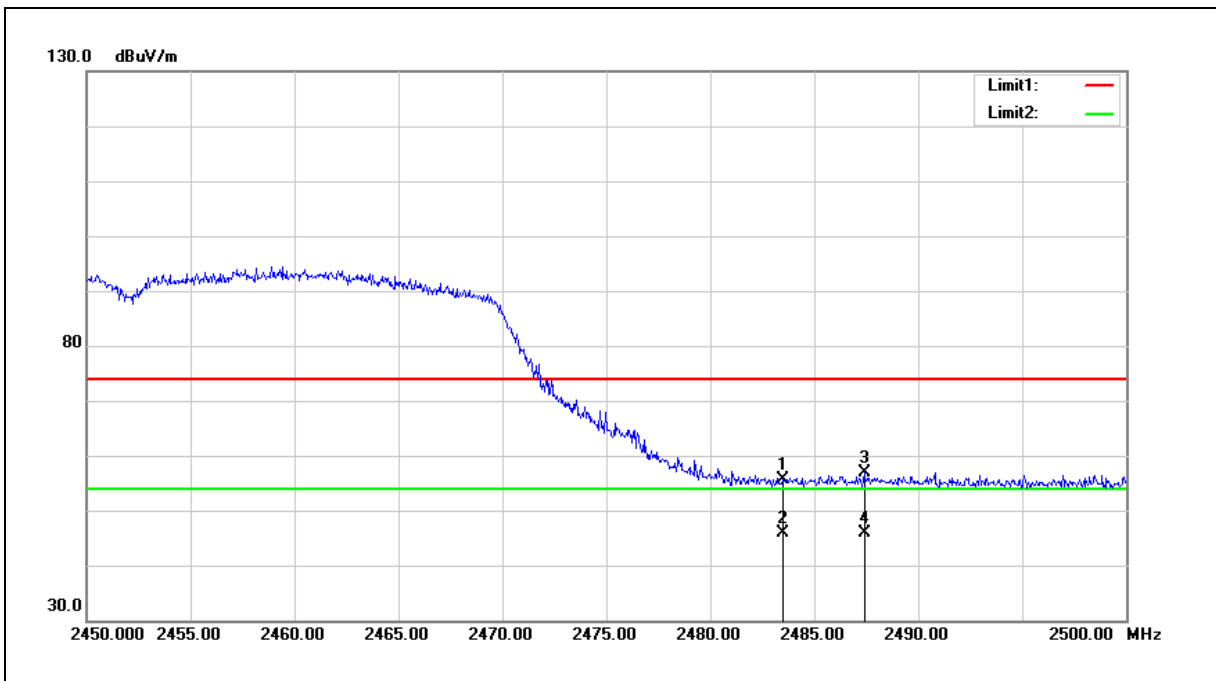


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.31	-0.70	55.61	74.00	-18.39	peak
2	2483.500	46.51	-0.70	45.81	54.00	-8.19	AVG
3	2487.400	57.61	-0.69	56.92	74.00	-17.08	peak
4	2487.400	46.66	-0.69	45.97	54.00	-8.03	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

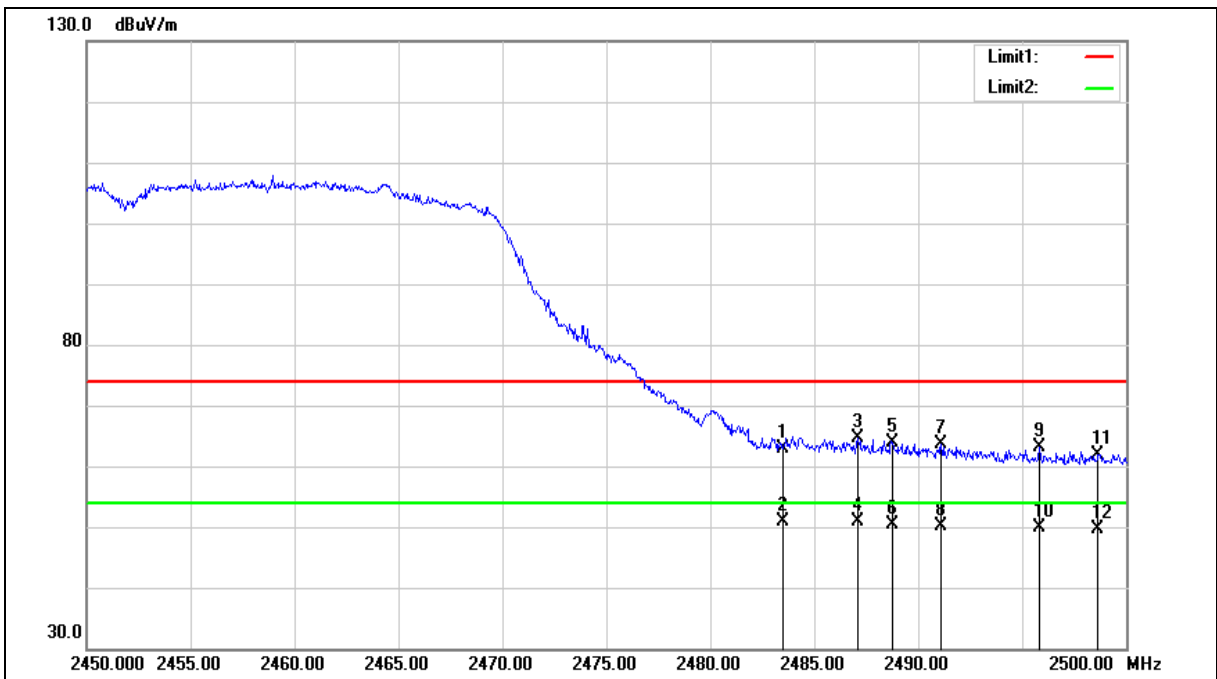





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2452 MHz	Temp.(°C)/Hum.(%RH):	26(°C )/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.60	-0.70	62.90	74.00	-11.10	peak
2	2483.500	51.63	-0.70	50.93	54.00	-3.07	AVG
3	2487.100	65.28	-0.69	64.59	74.00	-9.41	peak
4	2487.100	51.46	-0.69	50.77	54.00	-3.23	AVG
5	2488.750	64.56	-0.68	63.88	74.00	-10.12	peak
6	2488.750	51.02	-0.68	50.34	54.00	-3.66	AVG
7	2491.100	64.20	-0.67	63.53	74.00	-10.47	peak
8	2491.100	50.72	-0.67	50.05	54.00	-3.95	AVG
9	2495.800	63.73	-0.66	63.07	74.00	-10.93	peak
10	2495.800	50.54	-0.66	49.88	54.00	-4.12	AVG
11	2498.650	62.63	-0.64	61.99	74.00	-12.01	peak
12	2498.650	50.21	-0.64	49.57	54.00	-4.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.