

**ATC**

# TEST REPORT

Applicant Name : Shenzhen Xin Yuan Electronic Technology Co., Ltd.  
Address : 401 4F Bldg.building B. No.5, 1st Rd Bantianshangxue  
Technology Park ,Bantian St, Longgang Dist.,Shenzhen  
Guangdong China  
Report Number : SZNS220330-11519E-RF-00B  
FCC ID: 2ASYE-T3-V1-6-1

**Test Standard (s)**

FCC PART 15.247

**Sample Description**

Product Type: T3 V1.6.1  
Model No.: T3 V1.6.1  
Multiple Model(s) No.: N/A  
Trade Mark: LILYGO  
Date Received: 2022/03/30  
Report Date: 2022/07/07

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**

Ting Lü  
EMC Engineer

**Approved By:**

Robert Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**Shenzhen Accurate Technology Co., Ltd.**

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	7
EUT EXERCISE SOFTWARE .....	7
DUTY CYCLE .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC §15.247 (I) &amp;§1.1307 (B) (3) - RF EXPOSURE EVALUATION.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
RESULT .....	13
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
ANTENNA CONNECTOR CONSTRUCTION .....	14
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP .....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE .....	15
TRANSD FACTOR & MARGIN CALCULATION.....	16
TEST DATA .....	16
<b>FCC §15.209, §15.205 &amp; §15.247(D) - SPURIOUS EMISSIONS.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
EUT SETUP .....	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	20
TEST PROCEDURE .....	20
FACTOR & MARGIN CALCULATION .....	20
TEST DATA .....	20
<b>FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30

<b>FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31
<b>FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE .....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST PROCEDURE .....	32
TEST DATA .....	32
<b>FCC §15.247(E) - POWER SPECTRAL DENSITY.....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST DATA .....	33
<b>APPENDIX WI-FI.....</b>	<b>34</b>
APPENDIX A: DTS BANDWIDTH .....	34
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	39
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER .....	44
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	45
APPENDIX E: BAND EDGE MEASUREMENTS .....	50
APPENDIX F: DUTY CYCLE .....	53
<b>APPENDIX BLE.....</b>	<b>55</b>
APPENDIX A: DTS BANDWIDTH .....	55
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	57
APPENDIX C: MAXIMUM OUTPUT POWER.....	59
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	61
APPENDIX E: BAND EDGE MEASUREMENTS .....	63
APPENDIX F: DUTY CYCLE .....	64

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE 1M: -7.97dBm Wi-Fi: 6.71dBm(802.11b), 8.76dBm(802.11g), 8.69dBm(802.11n20), 8.20dBm(802.11n40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	0.37 dBi (provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from usb port
Sample serial number	SZNS220330-11519E-RF-S2 for Conducted and Radiated Emissions SZNS220330-11519E-RF-S1 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.73dB	
Unwanted Emission, conducted	1.6dB	
AC Line Conducted emission	2.72dB	
Emissions, Radiated	30MHz - 1GHz 1GHz- 18GHz 18GHz- 26.5GHz	4.28dB 4.98dB 5.06dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

802.11n-HT40 mode was tested with Channel 3, 6 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

“EspRFTestTool\_v2.8\_Manual.exe”\* exercise software was used.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	60	60	60
802.11g	6Mbps	20	20	20
802.11n-HT20	MCS0	20	20	20
802.11n-HT40	MCS0	20	20	20
BLE	1Mbps	2	2	2

Note: the power level was provided by applicant.

## Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

## Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TECNO	Adapter	U180TSA	8JD07016222119
Aigo	TF Card	U312	Unknown

## External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

## Block Diagram of Test Setup

For conducted emission:

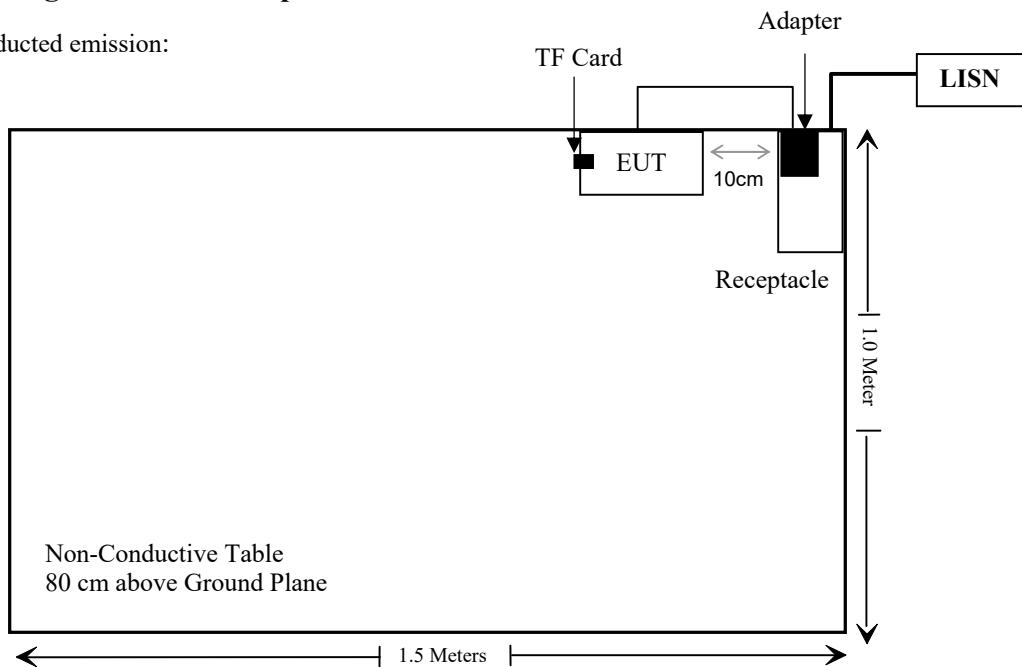

For radiated emission:

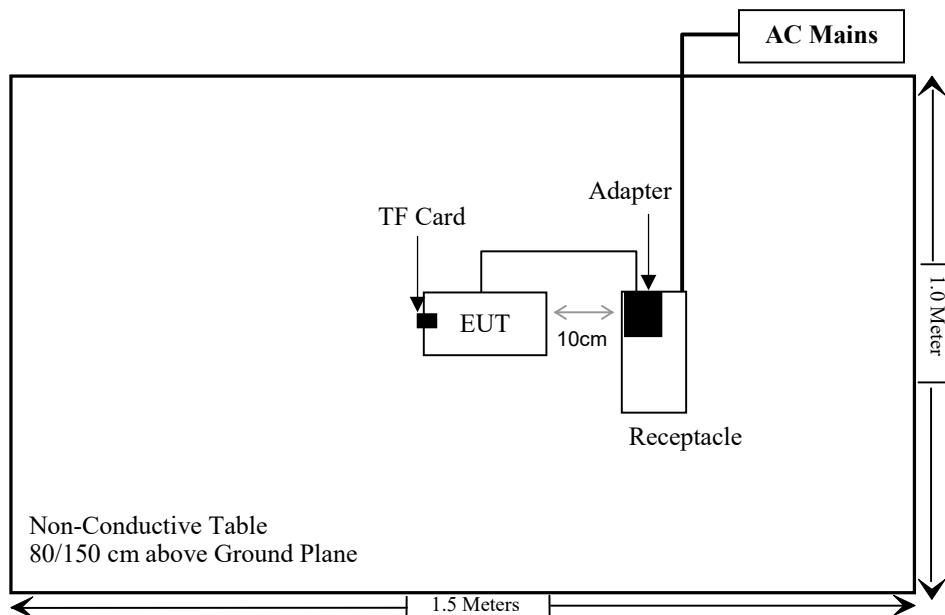

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1307 (b) (3)	RF Exposure Evaluation	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde&Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated emission test					
Rohde&Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF conducted test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/01/19	2023/01/18
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/10/26	2022/10/25
WEINSCHEL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) &§1.1307 (b) (3) - RF EXPOSURE EVALUATION

### Applicable Standard

According to subpart 15.247 (i) and §1.1307(b) (3), systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

1-mW Test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

SAR-Based Exemption:

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum timeaveraged power or maximum time-averaged ERP, whichever is greater.

Per § 1.1307(b)(3)(i)(B), for single RF sources (i.e., any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold  $P_{th}$  (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).  $P_{th}$  is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}}(d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

$d$  = the separation distance (cm);

**Result****For worst case:**

For BLE:

Mode	Frequency (MHz)	Maximum Tune-up power		Exemption Limit (mW)	SAR Test Exclusion
		(dBm)	(mW)		
BLE	2402-2480	-7.5	0.18	1	Yes

Note: . The tune up conducted power was declared by the applicant.

For Wi-Fi:

Mode	Frequency (MHz)	P <sub>th</sub>		Maximum tune-up conducted power (dBm)	Exemption
		(mW)	(dBm)		
Wi-Fi	2412-2462	3060	34.86	9.0	Compliant

- Note: 1. The tune up conducted power was declared by the applicant.  
2. The antenna gain is 0.37dBi(-1.78dBd),so the conducted power was used for evaluation  
3. The Lora, BT and 2.4G Wi-Fi can't transmit at the same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant.**

## FCC §15.203 - ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, and the maximum antenna gain is 0.37dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

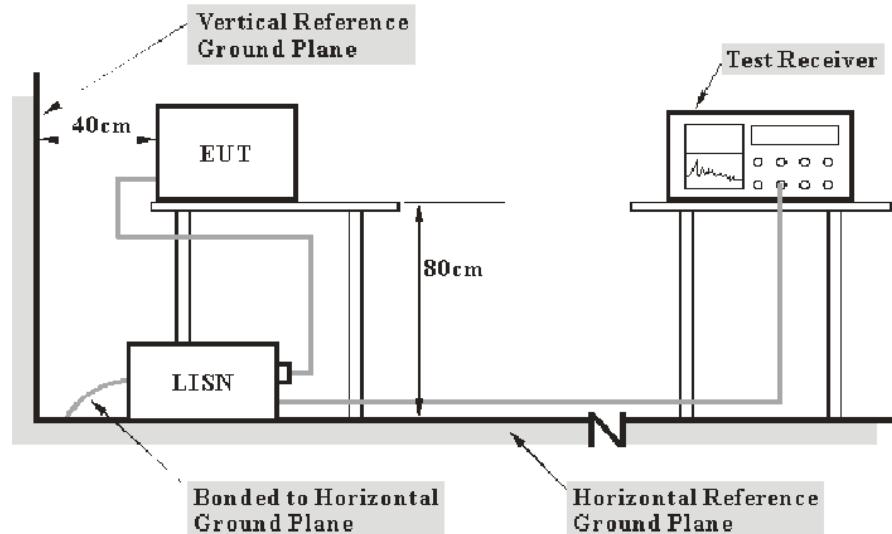

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$


## Test Data

### Environmental Conditions

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Jason on 2022-06-14.*

*EUT operation mode: Transmitting (Worst case is 802.11b, middle channel)*

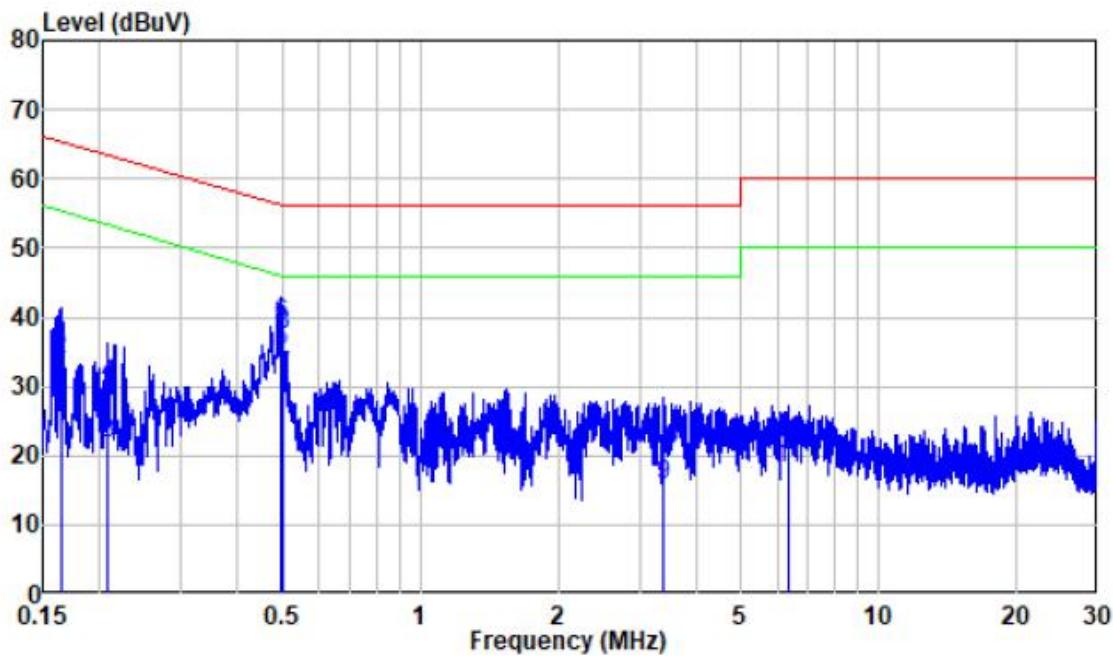**AC 120V/60 Hz, Line**

Site : Shielding Room


Condition: Line

Mode : 2.4G WIFI

Model : T3 V1.6.1

Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
			MHz	dB	dBuV	dBuV	dB
1	0.164	9.80	13.69	23.49	55.26	-31.77	Average
2	0.164	9.80	24.03	33.83	65.26	-31.43	QP
3	0.208	9.80	11.81	21.61	53.30	-31.69	Average
4	0.208	9.80	20.37	30.17	63.30	-33.13	QP
5	0.496	9.80	25.31	35.11	46.07	-10.96	Average
6	0.496	9.80	29.02	38.82	56.07	-17.25	QP
7	0.500	9.80	21.50	31.30	46.00	-14.70	Average
8	0.500	9.80	27.55	37.35	56.00	-18.65	QP
9	3.393	9.83	5.92	15.75	46.00	-30.25	Average
10	3.393	9.83	10.97	20.80	56.00	-35.20	QP
11	6.331	9.86	8.27	18.13	50.00	-31.87	Average
12	6.331	9.86	12.25	22.11	60.00	-37.89	QP

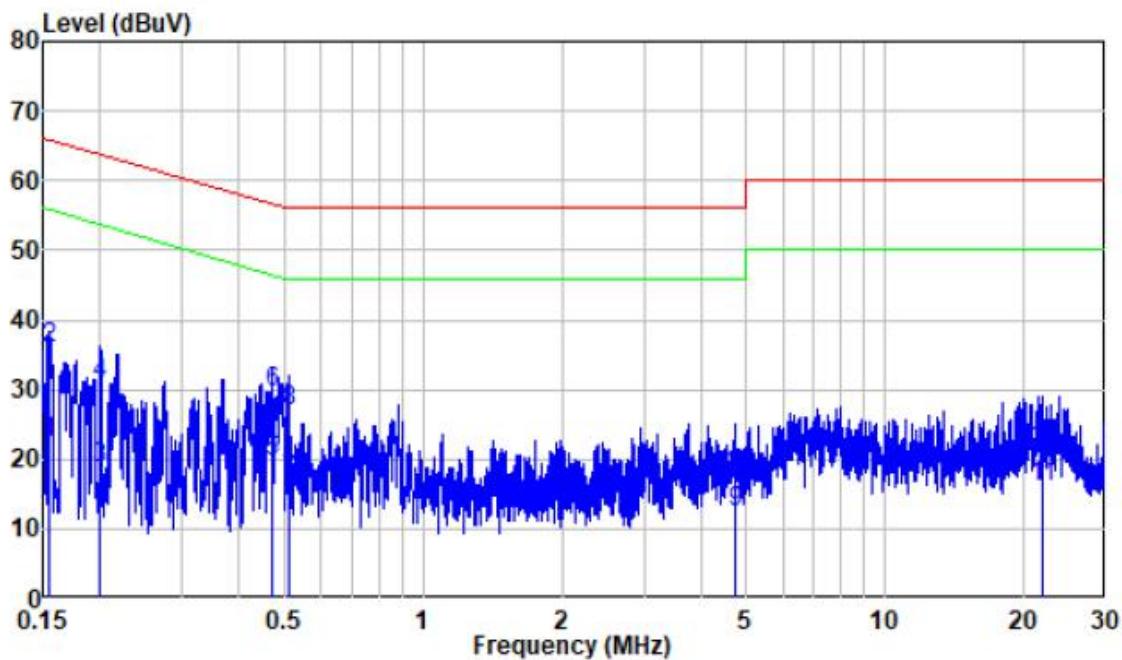**AC 120V/60 Hz, Neutral**

Site : Shielding Room

Condition: Neutral

Mode : 2.4G WIFI



Model : T3 V1.6.1

Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.155	9.80	12.46	22.26	55.75	-33.49	Average
2	0.155	9.80	26.25	36.05	65.75	-29.70	QP
3	0.200	9.80	8.90	18.70	53.61	-34.91	Average
4	0.200	9.80	21.03	30.83	63.61	-32.78	QP
5	0.471	9.80	9.80	19.60	46.49	-26.89	Average
6	0.471	9.80	19.79	29.59	56.49	-26.90	QP
7	0.510	9.81	7.15	16.96	46.00	-29.04	Average
8	0.510	9.81	17.10	26.91	56.00	-29.09	QP
9	4.724	9.88	2.57	12.45	46.00	-33.55	Average
10	4.724	9.88	7.66	17.54	56.00	-38.46	QP
11	21.888	10.12	5.79	15.91	50.00	-34.09	Average
12	21.888	10.12	11.39	21.51	60.00	-38.49	QP

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

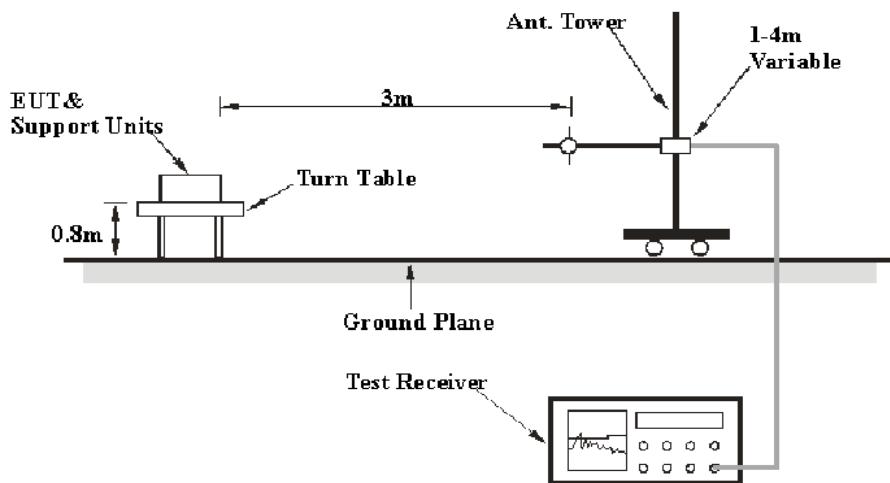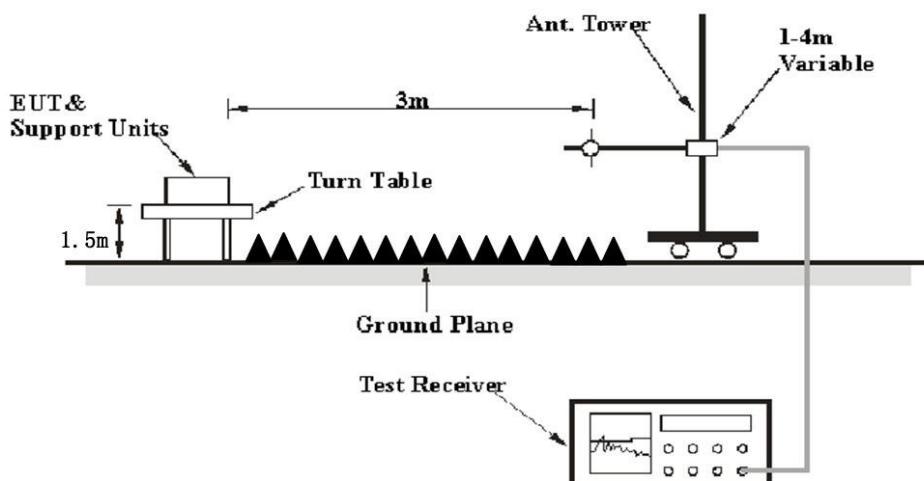**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	>1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions


Temperature:	29 °C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

*The testing was performed by Level on 2022-06-17 for below 1GHz and Level Li on 2022-06-17 for above 1GHz.*

*EUT operation mode: Transmitting (Pre-scan the battery power supply and power supply from USB micro port, the worst case usb micro port was recorded)*

**30MHz-1GHz:** (worst case is 8DPSK Mode, High channel)

Note: When the test result of Peak was less than the limit of QP, just the peak value was recorded.

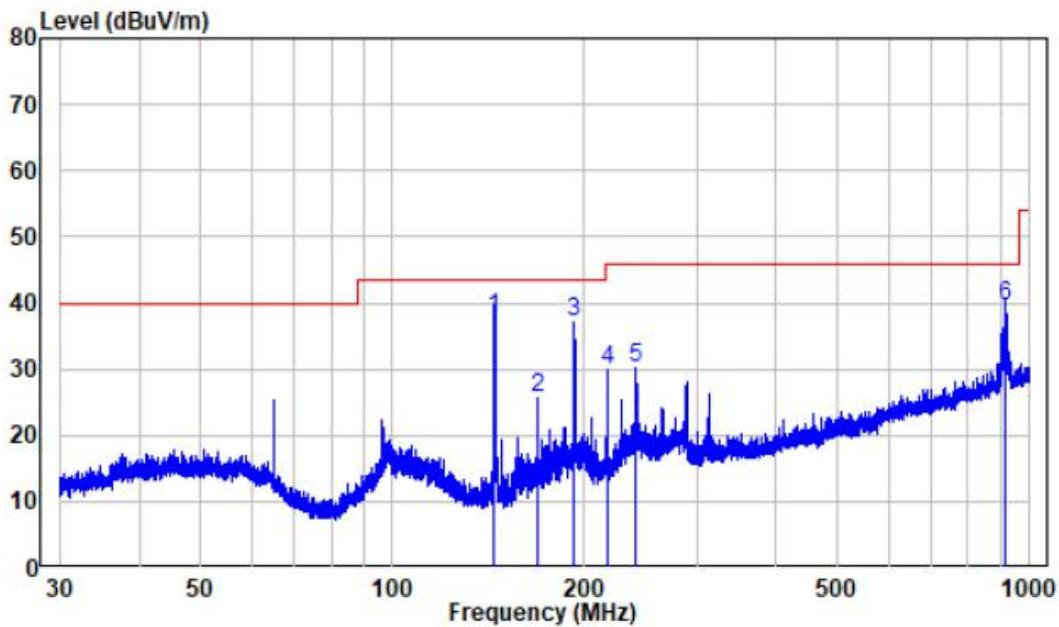**Horizontal:**


Site : chamber

Condition: 3m HORIZONTAL

Job No. : SZNS220330-11519E-RF

Test Mode: 2.4G WIFI

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	144.588	-15.51	53.25	37.74	43.50	-5.76	QP
2	168.709	-13.71	39.34	25.63	43.50	-17.87	Peak
3	192.925	-11.28	48.37	37.09	43.50	-6.41	Peak
4	216.878	-11.57	41.48	29.91	46.00	-16.09	Peak
5	241.147	-10.83	40.95	30.12	46.00	-15.88	Peak
6	912.862	1.57	38.11	39.68	46.00	-6.32	QP

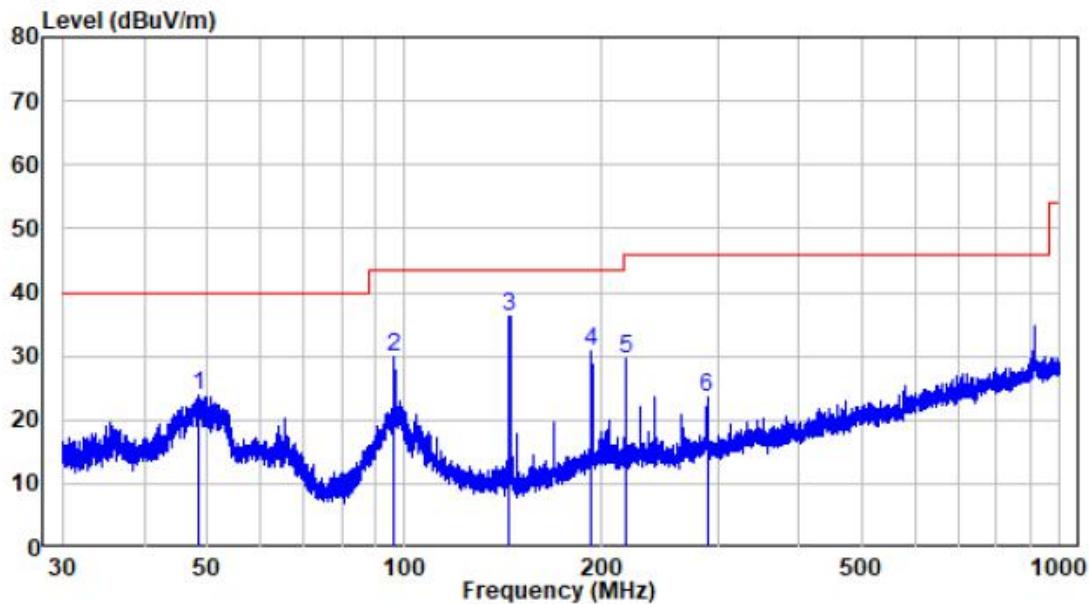**Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS220330-11519E-RF

Test Mode: 2.4G WIFI

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	48.587	-9.97	33.67	23.70	40.00	-16.30	Peak
2	96.436	-12.30	42.18	29.88	43.50	-13.62	Peak
3	144.588	-15.51	51.76	36.25	43.50	-7.25	Peak
4	192.841	-11.27	42.07	30.80	43.50	-12.70	Peak
5	217.068	-11.57	41.04	29.47	46.00	-16.53	Peak
6	289.256	-9.32	32.86	23.54	46.00	-22.46	Peak

**1-25 GHz:****BLE 1M:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/AV		Height (m)	Polar (H/V)				
Low Channel									
2310	68.18	PK	26	1.5	H	-7.24	60.94	74	-13.06
2310	53.86	AV	26	1.5	H	-7.24	46.62	54	-7.38
2310	68.07	PK	247	1.2	V	-7.24	60.83	74	-13.17
2310	53.82	AV	247	1.2	V	-7.24	46.58	54	-7.42
2390	67.99	PK	134	2.4	H	-7.22	60.77	74	-13.23
2390	53.50	AV	134	2.4	H	-7.22	46.28	54	-7.72
2390	68.36	PK	42	1.9	V	-7.22	61.14	74	-12.86
2390	53.46	AV	42	1.9	V	-7.22	46.24	54	-7.76
4804	62.04	PK	268	1.3	H	-3.51	58.53	74	-15.47
4804	54.47	AV	268	1.3	H	-3.51	50.96	54	-3.04
4804	59.66	PK	125	1.9	V	-3.51	56.15	74	-17.85
4804	50.10	AV	125	1.9	V	-3.51	46.59	54	-7.41
Middle Channel									
4880	61.65	PK	100	2.5	H	-3.37	58.28	74	-15.72
4880	54.32	AV	100	2.5	H	-3.37	50.95	54	-3.05
4880	59.94	PK	287	1.9	V	-3.37	56.57	74	-17.43
4880	50.22	AV	244	1.9	V	-3.37	46.85	54	-7.15
High Channel									
2483.5	68.73	PK	342	2.3	H	-7.2	61.53	74	-12.47
2483.5	54.09	AV	342	2.3	H	-7.2	46.89	54	-7.11
2483.5	69.38	PK	175	1.5	V	-7.2	62.18	74	-11.82
2483.5	54.09	AV	175	1.5	V	-7.2	46.89	54	-7.11
2500	69.40	PK	300	1.2	H	-7.18	62.22	74	-11.78
2500	54.69	AV	300	1.2	H	-7.18	47.51	54	-6.49
2500	69.52	PK	53	1.7	V	-7.18	62.34	74	-11.66
2500	54.69	AV	53	1.7	V	-7.18	47.51	54	-6.49
4960	62.48	PK	66	2.1	H	-3.01	59.47	74	-14.53
4960	54.82	AV	66	2.1	H	-3.01	51.81	54	-2.19
4960	60.03	PK	287	2	V	-3.01	57.02	74	-16.98
4960	51.13	AV	287	2	V	-3.01	48.12	54	-5.88

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss - Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

**Wi-Fi:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	68.80	PK	114	1	H	-7.24	61.56	74	-12.44
2310	55.24	AV	114	1	H	-7.24	48.00	54	-6.00
2310	68.32	PK	183	1.8	V	-7.24	61.08	74	-12.92
2310	54.06	AV	183	1.8	V	-7.24	46.82	54	-7.18
2390	69.70	PK	284	2.1	H	-7.22	62.48	74	-11.52
2390	55.06	AV	284	2.1	H	-7.22	47.84	54	-6.16
2390	68.53	PK	157	1.3	V	-7.22	61.31	74	-12.69
2390	53.69	AV	157	1.3	V	-7.22	46.47	54	-7.53
4824	62.22	PK	159	2	H	-3.53	58.69	74	-15.31
4824	55.41	AV	159	2	H	-3.53	51.88	54	-2.12
4824	62.92	PK	112	1.1	V	-3.53	59.39	74	-14.61
4824	55.70	AV	112	1.1	V	-3.53	52.17	54	-1.83
802.11B, Middle Channel									
4874	63.44	PK	259	2.3	H	-3.41	60.03	74	-13.97
4874	56.33	AV	259	2.3	H	-3.41	52.92	54	-1.08
4874	64.13	PK	47	1.8	V	-3.41	60.72	74	-13.28
4874	56.55	AV	244	1.8	V	-3.41	53.14	54	-0.86
802.11B, High Channel									
2483.5	68.54	PK	171	1.8	H	-7.2	61.34	74	-12.66
2483.5	54.19	AV	171	1.8	H	-7.2	46.99	54	-7.01
2483.5	68.60	PK	152	1.6	V	-7.2	61.4	74	-12.6
2483.5	53.59	AV	152	1.6	V	-7.2	46.39	54	-7.61
2500	68.90	PK	25	1.8	H	-7.18	61.72	74	-12.28
2500	54.79	AV	25	1.8	H	-7.18	47.61	54	-6.39
2500	68.92	PK	332	2.4	V	-7.18	61.74	74	-12.26
2500	54.74	AV	332	2.4	V	-7.18	47.56	54	-6.44
4924	63.10	PK	131	1.5	H	-3.16	59.94	74	-14.06
4924	55.75	AV	131	1.5	H	-3.16	52.59	54	-1.41
4924	63.64	PK	146	1	V	-3.16	60.48	74	-13.52
4924	55.91	AV	146	1	V	-3.16	52.75	54	-1.25

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11G, Low Channel									
2310	68.43	PK	133	2	H	-7.24	61.19	74	-12.81
2310	53.97	AV	133	2	H	-7.24	46.73	54	-7.27
2310	68.06	PK	273	1.6	V	-7.24	60.82	74	-13.18
2310	53.83	AV	273	1.6	V	-7.24	46.59	54	-7.41
2390	68.56	PK	117	1	H	-7.22	61.34	74	-12.66
2390	53.59	AV	117	1	H	-7.22	46.37	54	-7.63
2390	67.91	PK	326	1.2	V	-7.22	60.69	74	-13.31
2390	53.47	AV	326	1.2	V	-7.22	46.25	54	-7.75
4824	67.44	PK	82	1.1	H	-3.53	63.91	74	-10.09
4824	54.24	AV	82	1.1	H	-3.53	50.71	54	-3.29
4824	63.78	PK	153	2.4	V	-3.53	60.25	74	-13.75
4824	48.57	AV	153	2.4	V	-3.53	45.04	54	-8.96
802.11G, Middle Channel									
4874	65.52	PK	315	1.6	H	-3.41	62.11	74	-11.89
4874	52.6	AV	315	1.6	H	-3.41	49.19	54	-4.81
4874	62.21	PK	108	2.2	V	-3.41	58.8	74	-15.20
4874	48.01	AV	244	2.2	V	-3.41	44.6	54	-9.40
802.11G, High Channel									
2483.5	68.93	PK	302	1.5	H	-7.2	61.73	74	-12.27
2483.5	54.23	AV	302	1.5	H	-7.2	47.03	54	-6.97
2483.5	69.05	PK	158	2.3	V	-7.2	61.85	74	-12.15
2483.5	54.13	AV	158	2.3	V	-7.2	46.93	54	-7.07
2500	69.07	PK	247	1.6	H	-7.18	61.89	74	-12.11
2500	54.79	AV	247	1.6	H	-7.18	47.61	54	-6.39
2500	69.10	PK	319	1.7	V	-7.18	61.92	74	-12.08
2500	54.70	AV	319	1.7	V	-7.18	47.52	54	-6.48
4924	66.50	PK	0	1.3	H	-3.16	63.34	74	-10.66
4924	53.32	AV	0	1.3	H	-3.16	50.16	54	-3.84
4924	61.72	PK	242	1.2	V	-3.16	58.56	74	-15.44
4924	47.99	AV	242	1.2	V	-3.16	44.83	54	-9.17

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11N20, Low Channel									
2310	71.93	PK	64	1.6	H	-7.24	64.69	74	-9.31
2310	54.58	AV	64	1.6	H	-7.24	47.34	54	-6.66
2310	67.53	PK	309	1.2	V	-7.24	60.29	74	-13.71
2310	52.71	AV	309	1.2	V	-7.24	45.47	54	-8.53
2390	68.03	PK	310	1.7	H	-7.22	60.81	74	-13.19
2390	54.01	AV	310	1.7	H	-7.22	46.79	54	-7.21
2390	67.66	PK	187	1.5	V	-7.22	60.44	74	-13.56
2390	53.80	AV	187	1.5	V	-7.22	46.58	54	-7.42
4824	64.87	PK	60	1	H	-3.53	61.34	74	-12.66
4824	50.00	AV	60	1	H	-3.53	46.47	54	-7.53
4824	64.64	PK	183	1.2	V	-3.53	61.11	74	-12.89
4824	49.77	AV	183	1.2	V	-3.53	46.24	54	-7.76
802.11 N20, Middle Channel									
4874	66.41	PK	43	2.2	H	-3.41	63	74	-11.00
4874	51.41	AV	43	2.2	H	-3.41	48	54	-6.00
4874	62.52	PK	274	2.1	V	-3.41	59.11	74	-14.89
4874	48.07	AV	244	2.1	V	-3.41	44.66	54	-9.34
802.11 N20, High Channel									
2483.5	71.47	PK	149	1	H	-7.2	64.27	74	-9.73
2483.5	56.31	AV	149	1	H	-7.2	49.11	54	-4.89
2483.5	68.82	PK	217	1.8	V	-7.2	61.62	74	-12.38
2483.5	54.34	AV	217	1.8	V	-7.2	47.14	54	-6.86
2500	69.49	PK	25	2	H	-7.18	62.31	74	-11.69
2500	55.89	AV	25	2	H	-7.18	48.71	54	-5.29
2500	69.09	PK	181	1.5	V	-7.18	61.91	74	-12.09
2500	54.71	AV	181	1.5	V	-7.18	47.53	54	-6.47
4924	66.29	PK	142	1.5	H	-3.16	63.13	74	-10.87
4924	51.61	AV	142	1.5	H	-3.16	48.45	54	-5.55
4924	63.01	PK	10	2.4	V	-3.16	59.85	74	-14.15
4924	47.59	AV	10	2.4	V	-3.16	44.43	54	-9.57

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	PK/QP/AV		Height (m)	Polar (H/V)				
802.11N40, Low Channel									
2310	68.24	PK	103	1.2	H	-7.24	61.00	74	-13.00
2310	54.05	AV	103	1.2	H	-7.24	46.81	54	-7.19
2310	68.48	PK	25	1.6	V	-7.24	61.24	74	-12.76
2310	53.79	AV	25	1.6	V	-7.24	46.55	54	-7.45
2390	68.33	PK	155	2.3	H	-7.22	61.11	74	-12.89
2390	53.67	AV	155	2.3	H	-7.22	46.45	54	-7.55
2390	67.94	PK	279	1.4	V	-7.22	60.72	74	-13.28
2390	53.44	AV	279	1.4	V	-7.22	46.22	54	-7.78
4844	60.65	PK	173	2.2	H	-3.54	57.11	74	-16.89
4844	47.59	AV	173	2.2	H	-3.54	44.05	54	-9.95
4844	57.73	PK	156	1	V	-3.54	54.19	74	-19.81
4844	43.66	AV	156	1	V	-3.54	40.12	54	-13.88
802.11N40, Middle Channel									
4874	60.92	PK	16	2	H	-3.41	57.51	74	-16.49
4874	46.93	AV	16	2	H	-3.41	43.52	54	-10.48
4874	58.42	PK	81	1.1	V	-3.41	55.01	74	-18.99
4874	44.34	AV	244	1.1	V	-3.41	40.93	54	-13.07
802.11N40, High Channel									
2483.5	68.12	PK	306	2.4	H	-7.2	60.92	74	-13.08
2483.5	54.03	AV	306	2.4	H	-7.2	46.83	54	-7.17
2483.5	67.87	PK	164	1.2	V	-7.2	60.67	74	-13.33
2483.5	54.27	AV	164	1.2	V	-7.2	47.07	54	-6.93
2500	68.03	PK	191	2.4	H	-7.18	60.85	74	-13.15
2500	53.96	AV	191	2.4	H	-7.18	46.78	54	-7.22
2500	67.51	PK	86	2	V	-7.18	60.33	74	-13.67
2500	54.00	AV	86	2	V	-7.18	46.82	54	-7.18
4904	60.37	PK	84	2.2	H	-3.26	57.11	74	-16.89
4904	46.44	AV	84	2.2	H	-3.26	43.18	54	-10.82
4904	58.12	PK	41	2	V	-3.26	54.86	74	-19.14
4904	44.10	AV	41	2	V	-3.26	40.84	54	-13.16

**Note:**



Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.

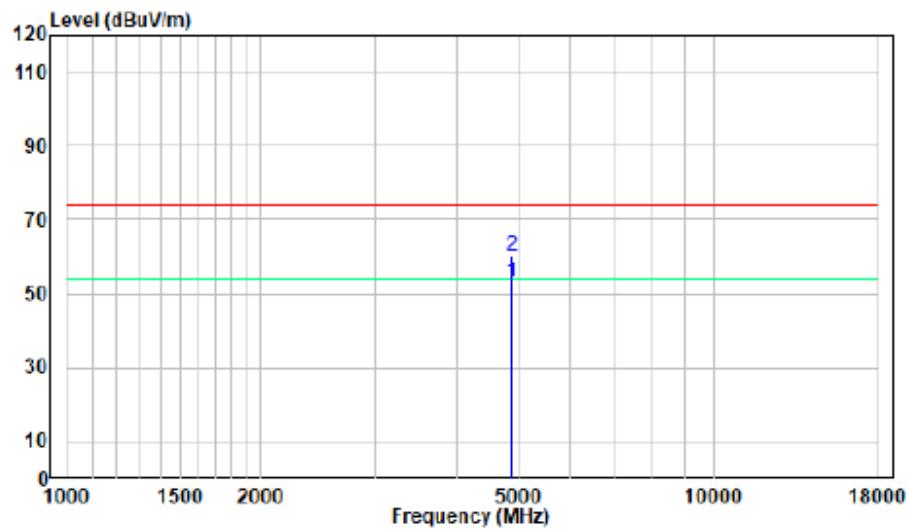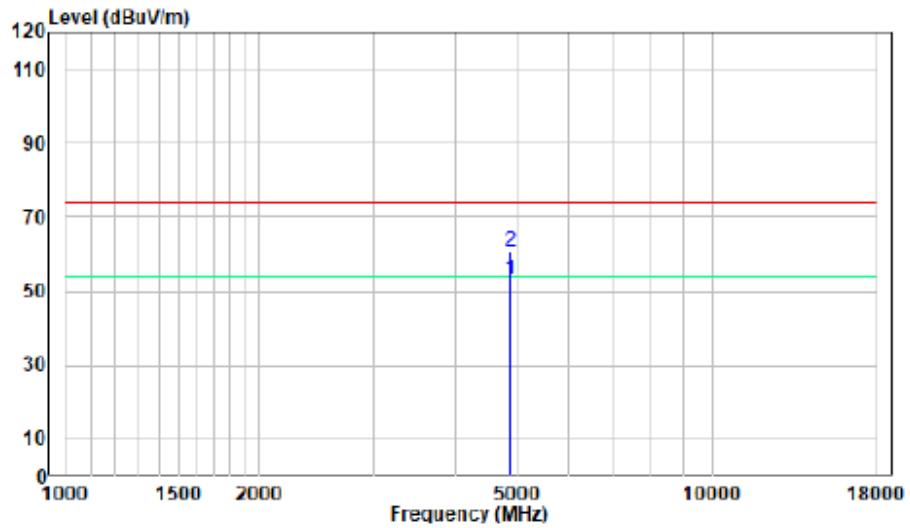**1-18 GHz:****Pre-scan for 802.11b Middle channel****Horizontal****Vertical**

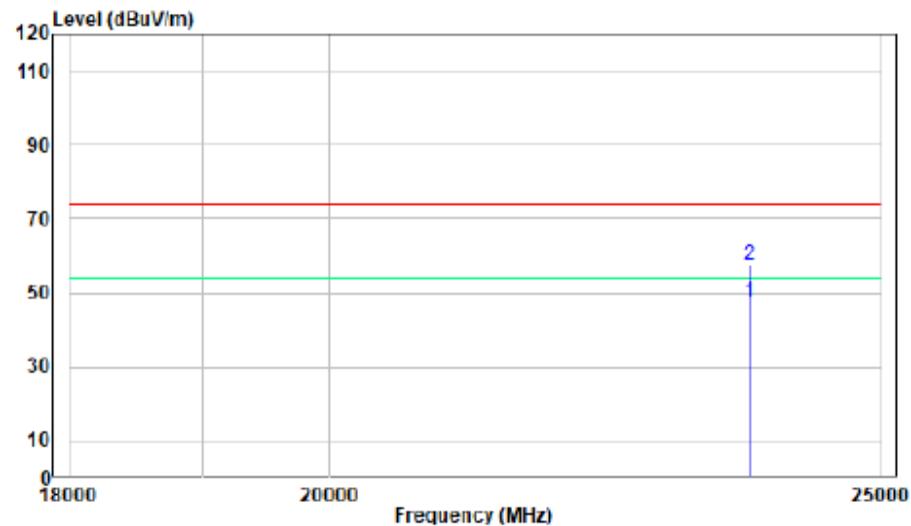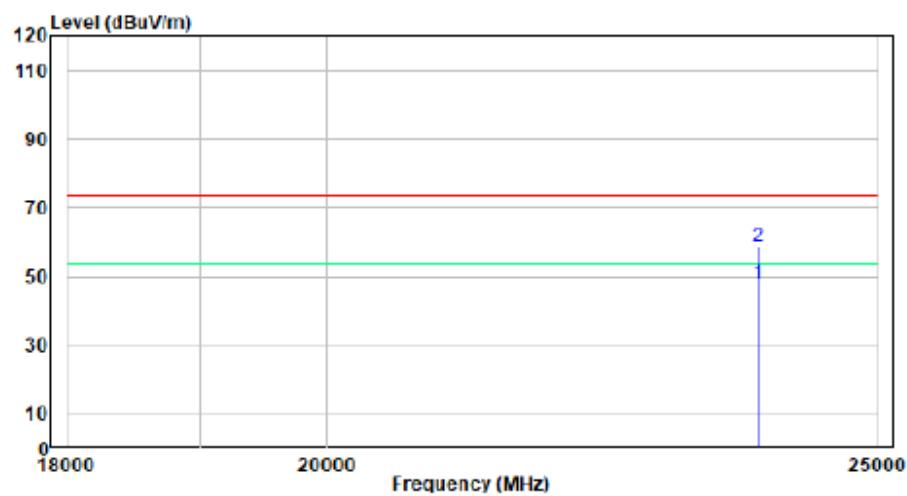**18-25GHz:****Pre-scan for 802.11b Middle channel****Horizontal****Vertical**


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

Temperature:	25~28 °C
Relative Humidity:	52~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu from 2022-04-26 to 2022-07-05.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Note: the RF Control Unit has a built-in power sensor.

### Test Data

#### Environmental Conditions

Temperature:	25~28 °C
Relative Humidity:	52~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu from 2022-04-26 to 2022-07-05.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

Temperature:	25~28 °C
Relative Humidity:	52~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu from 2022-04-26 to 2022-07-05.

EUT operation mode: Transmitting

Test Result: Compliant.

#### Conducted Band Edge Result:

Please refer to the Appendix Wi-Fi and Appendix BLE.

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



### Test Data

#### Environmental Conditions

Temperature:	25~28 °C
Relative Humidity:	52~56 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu from 2022-04-26 to 2022-07-05.


EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


## APPENDIX Wi-Fi


### Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.12	0.5	PASS
		2437	9.12	0.5	PASS
		2462	9.56	0.5	PASS
11G	Ant1	2412	16.40	0.5	PASS
		2437	16.40	0.5	PASS
		2462	16.40	0.5	PASS
11N20SISO	Ant1	2412	17.36	0.5	PASS
		2437	17.36	0.5	PASS
		2462	17.36	0.5	PASS
11N40SISO	Ant1	2422	32.88	0.5	PASS
		2437	32.56	0.5	PASS
		2452	32.88	0.5	PASS

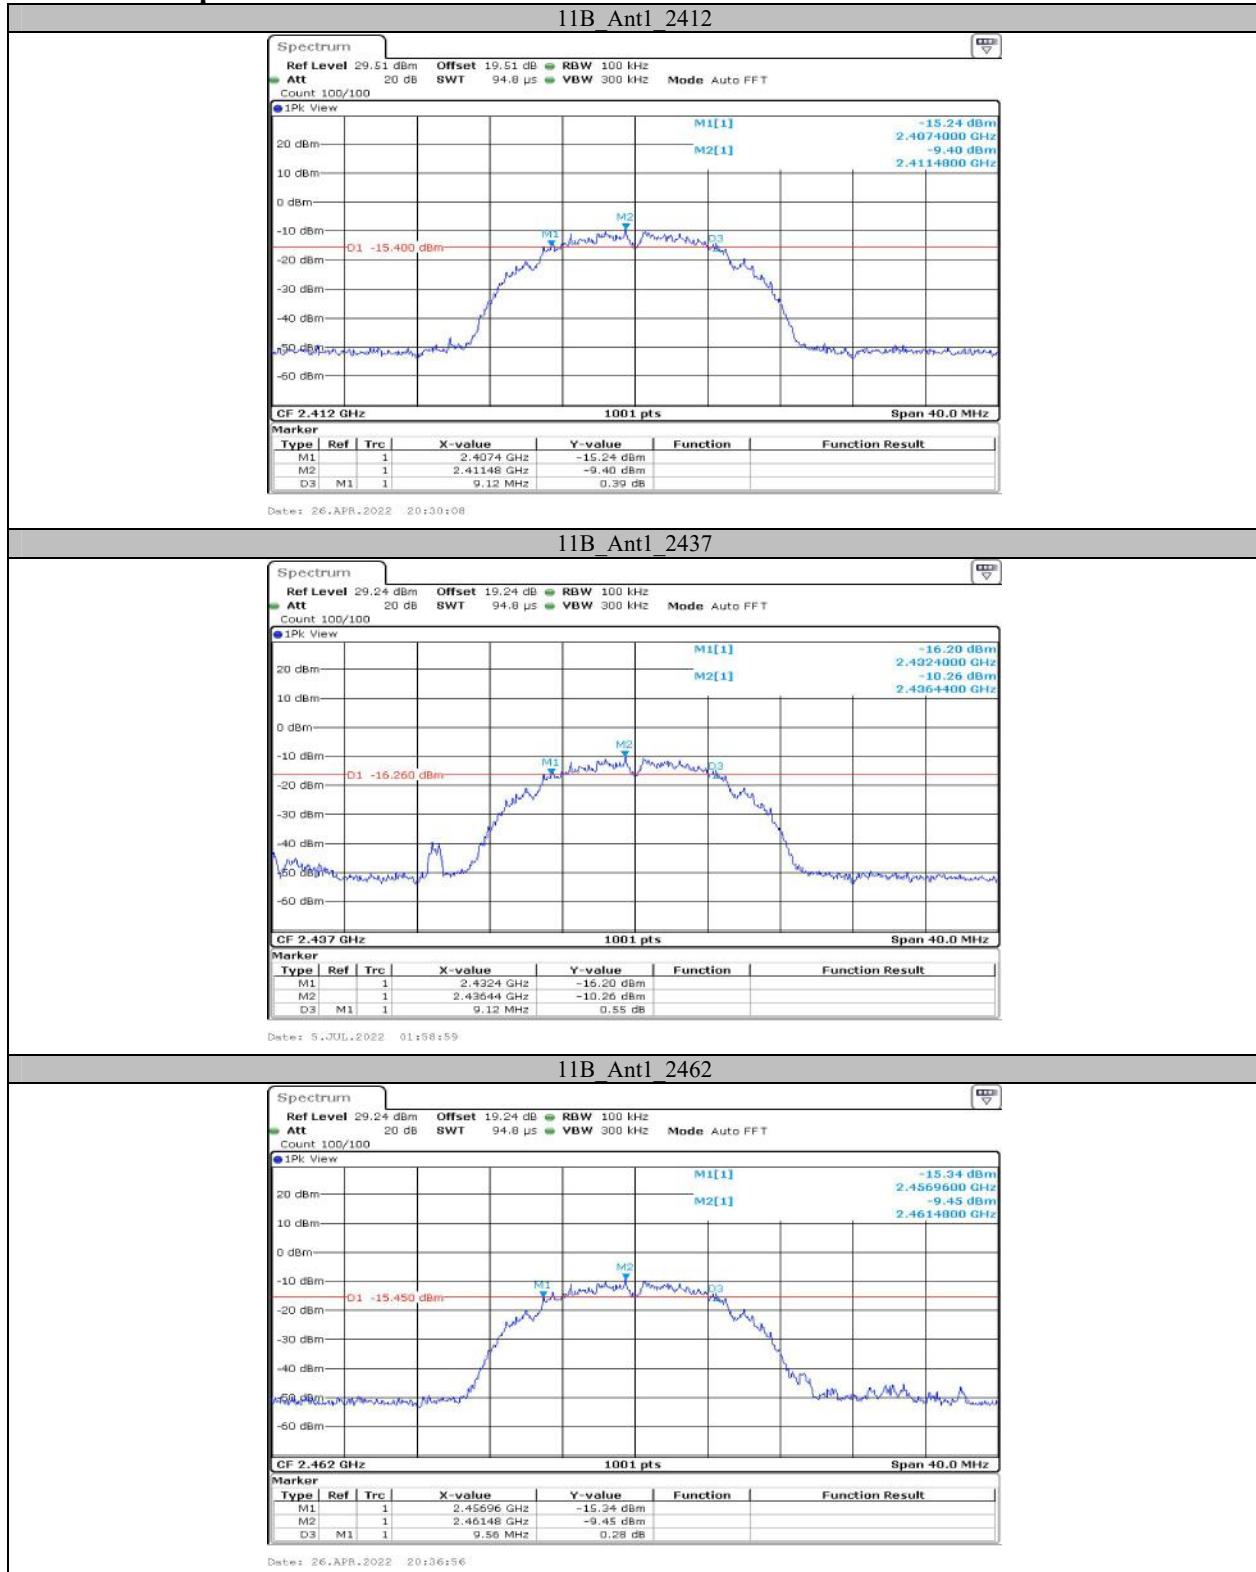**Test Graphs**

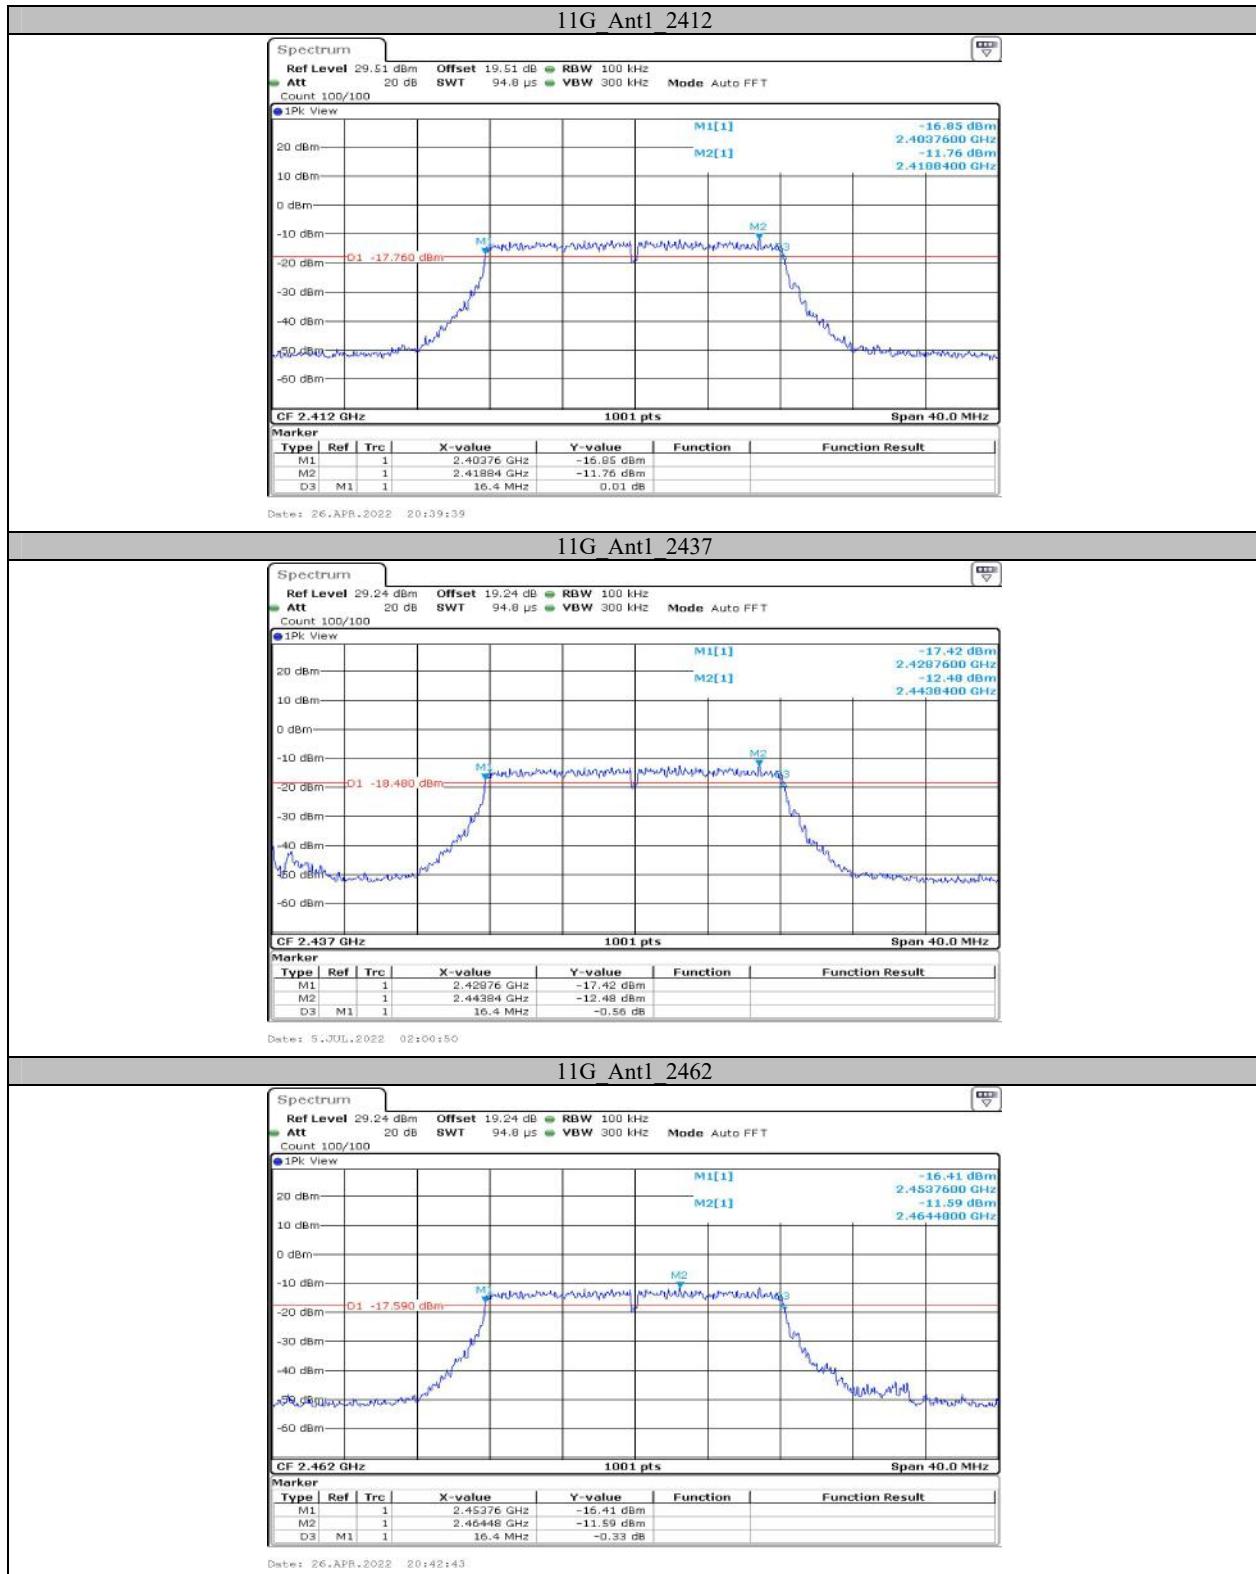


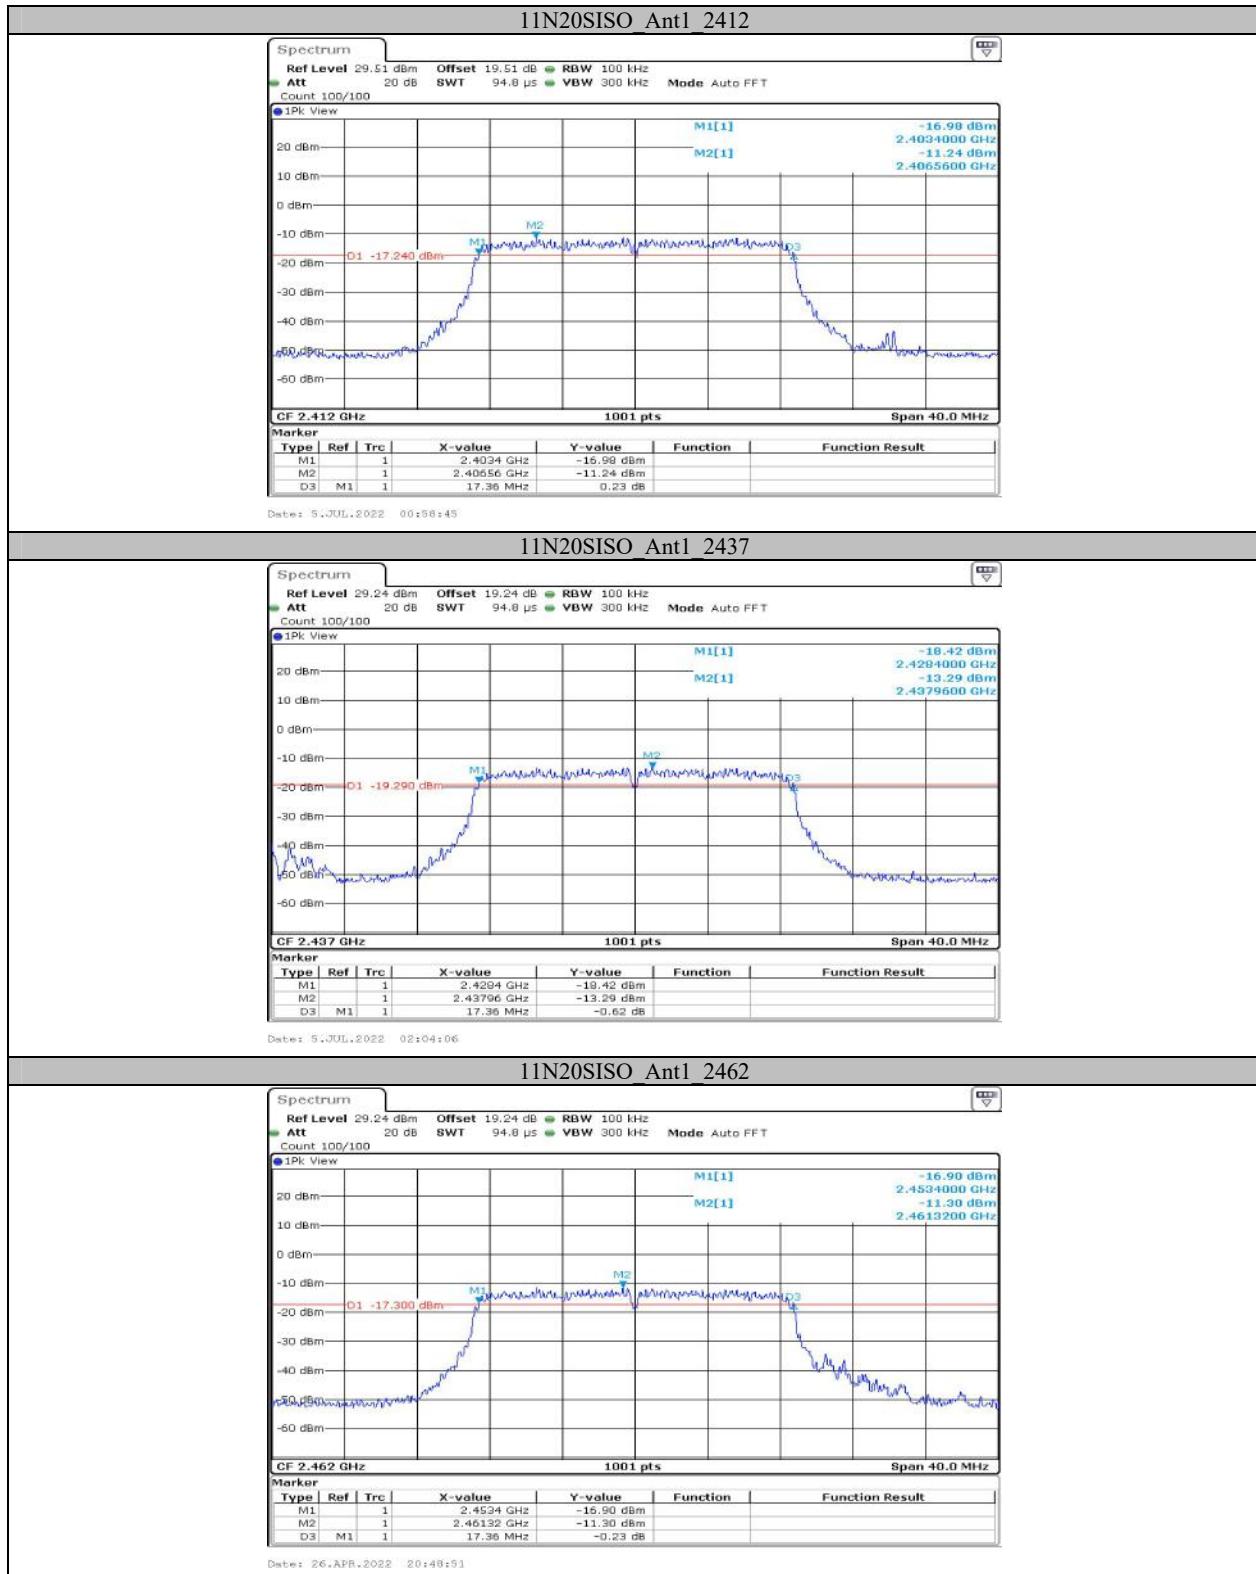


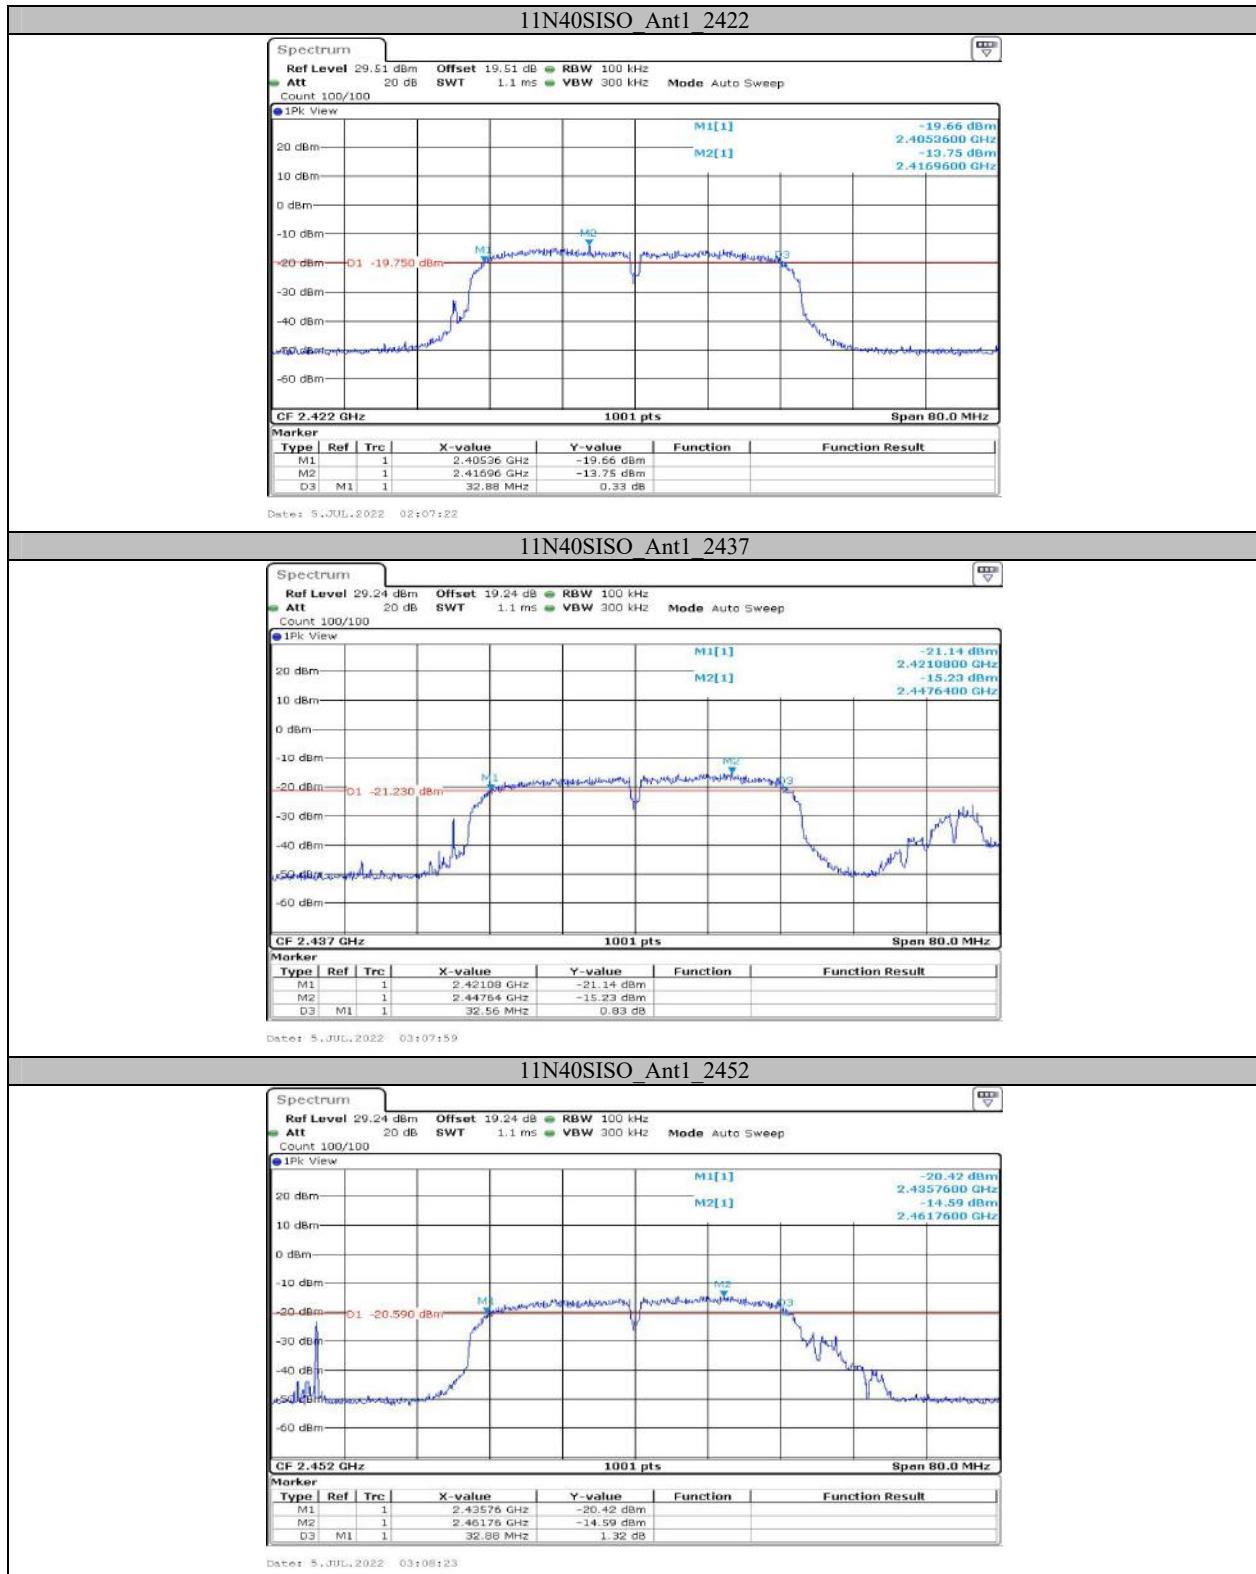



**Appendix B: Occupied Channel Bandwidth  
Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.307	---	---
		2437	13.307	---	---
		2462	13.347	---	---
11G	Ant1	2412	16.783	---	---
		2437	16.743	---	---
		2462	16.783	---	---
11N20SISO	Ant1	2412	17.463	---	---
		2437	17.423	---	---
		2462	17.423	---	---
11N40SISO	Ant1	2422	35.085	---	---
		2437	35.644	---	---
		2452	35.245	---	---

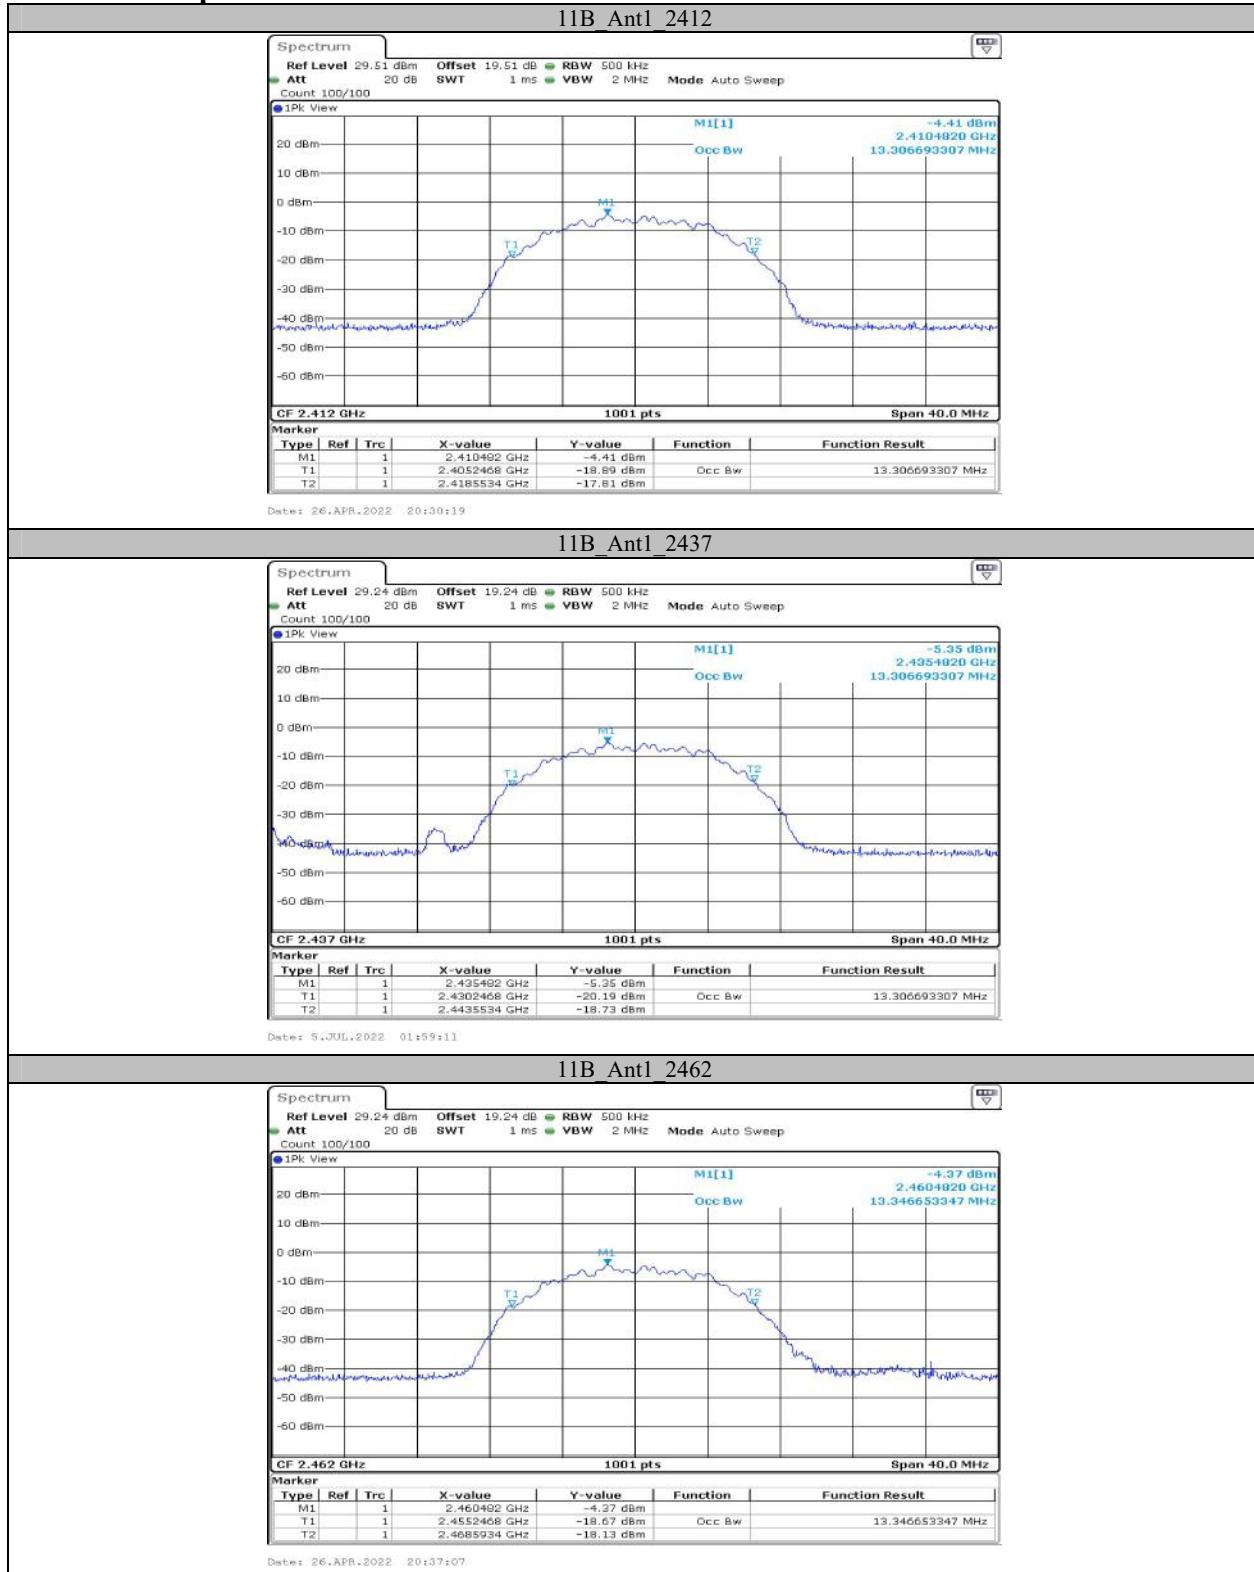**Test Graphs**

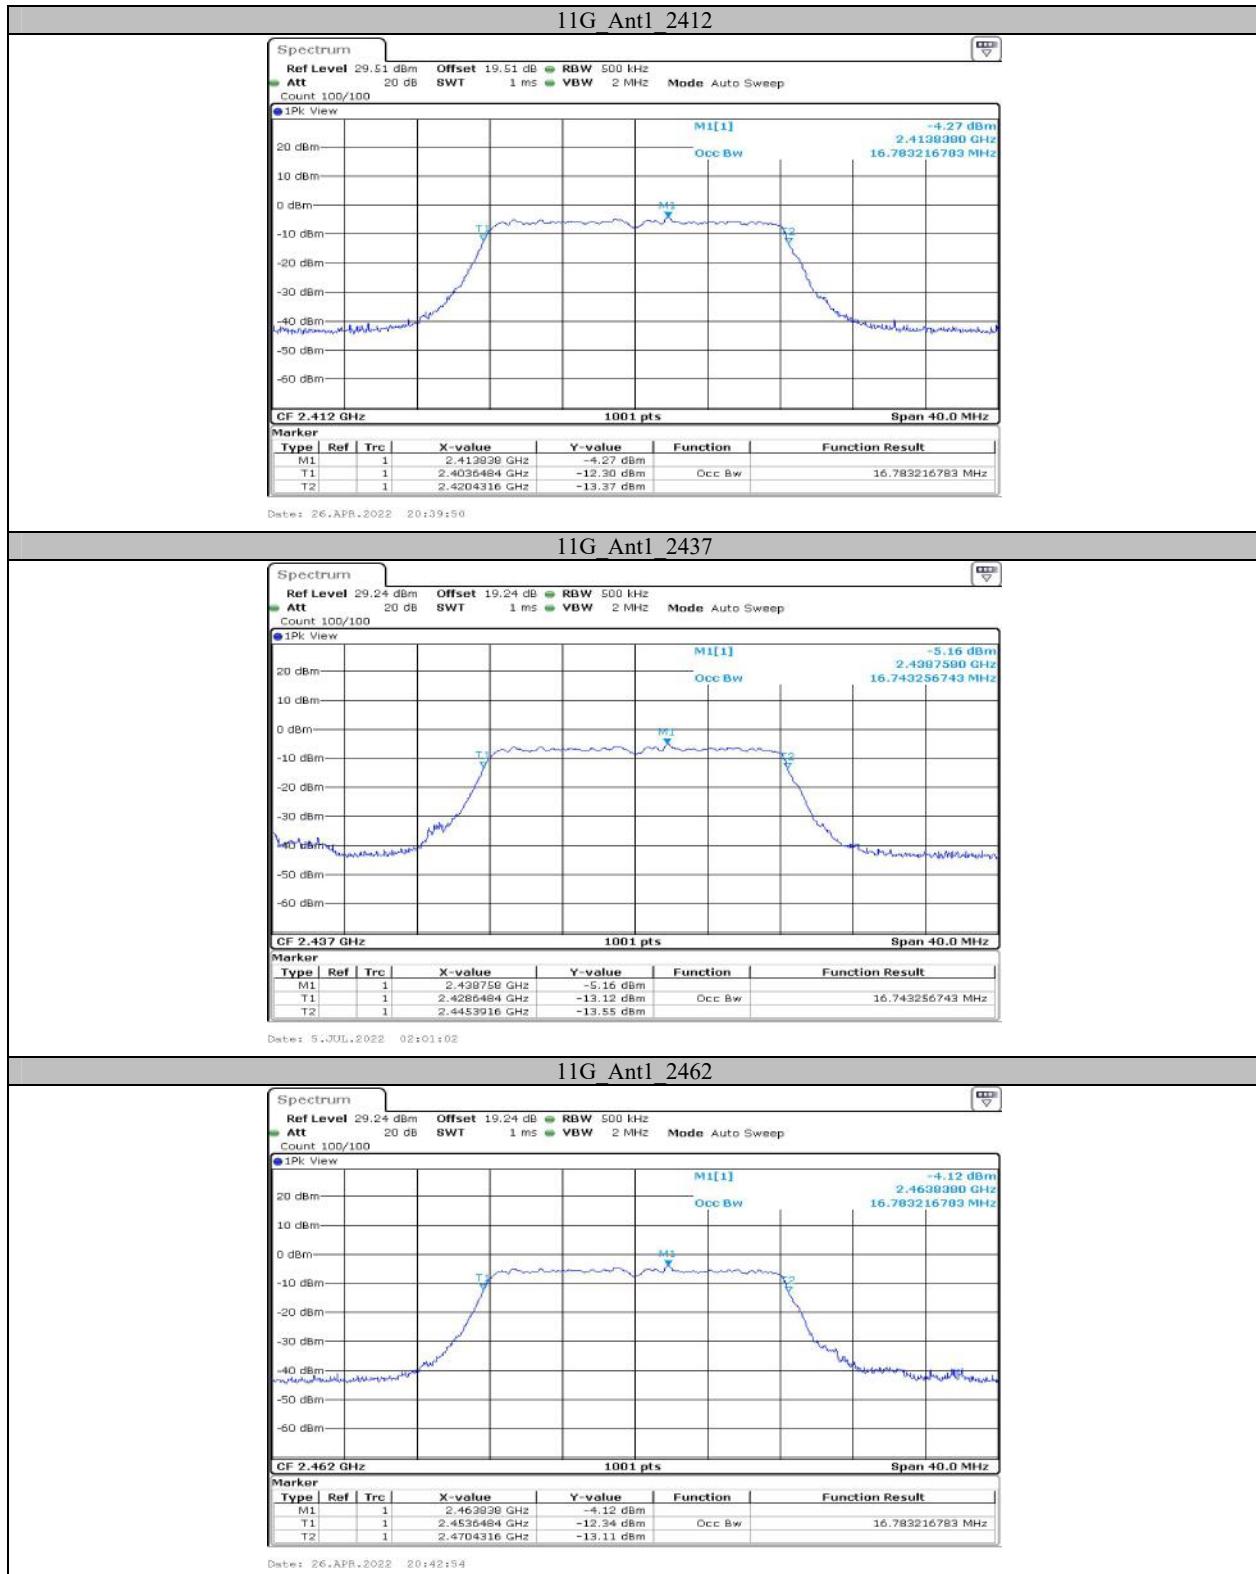

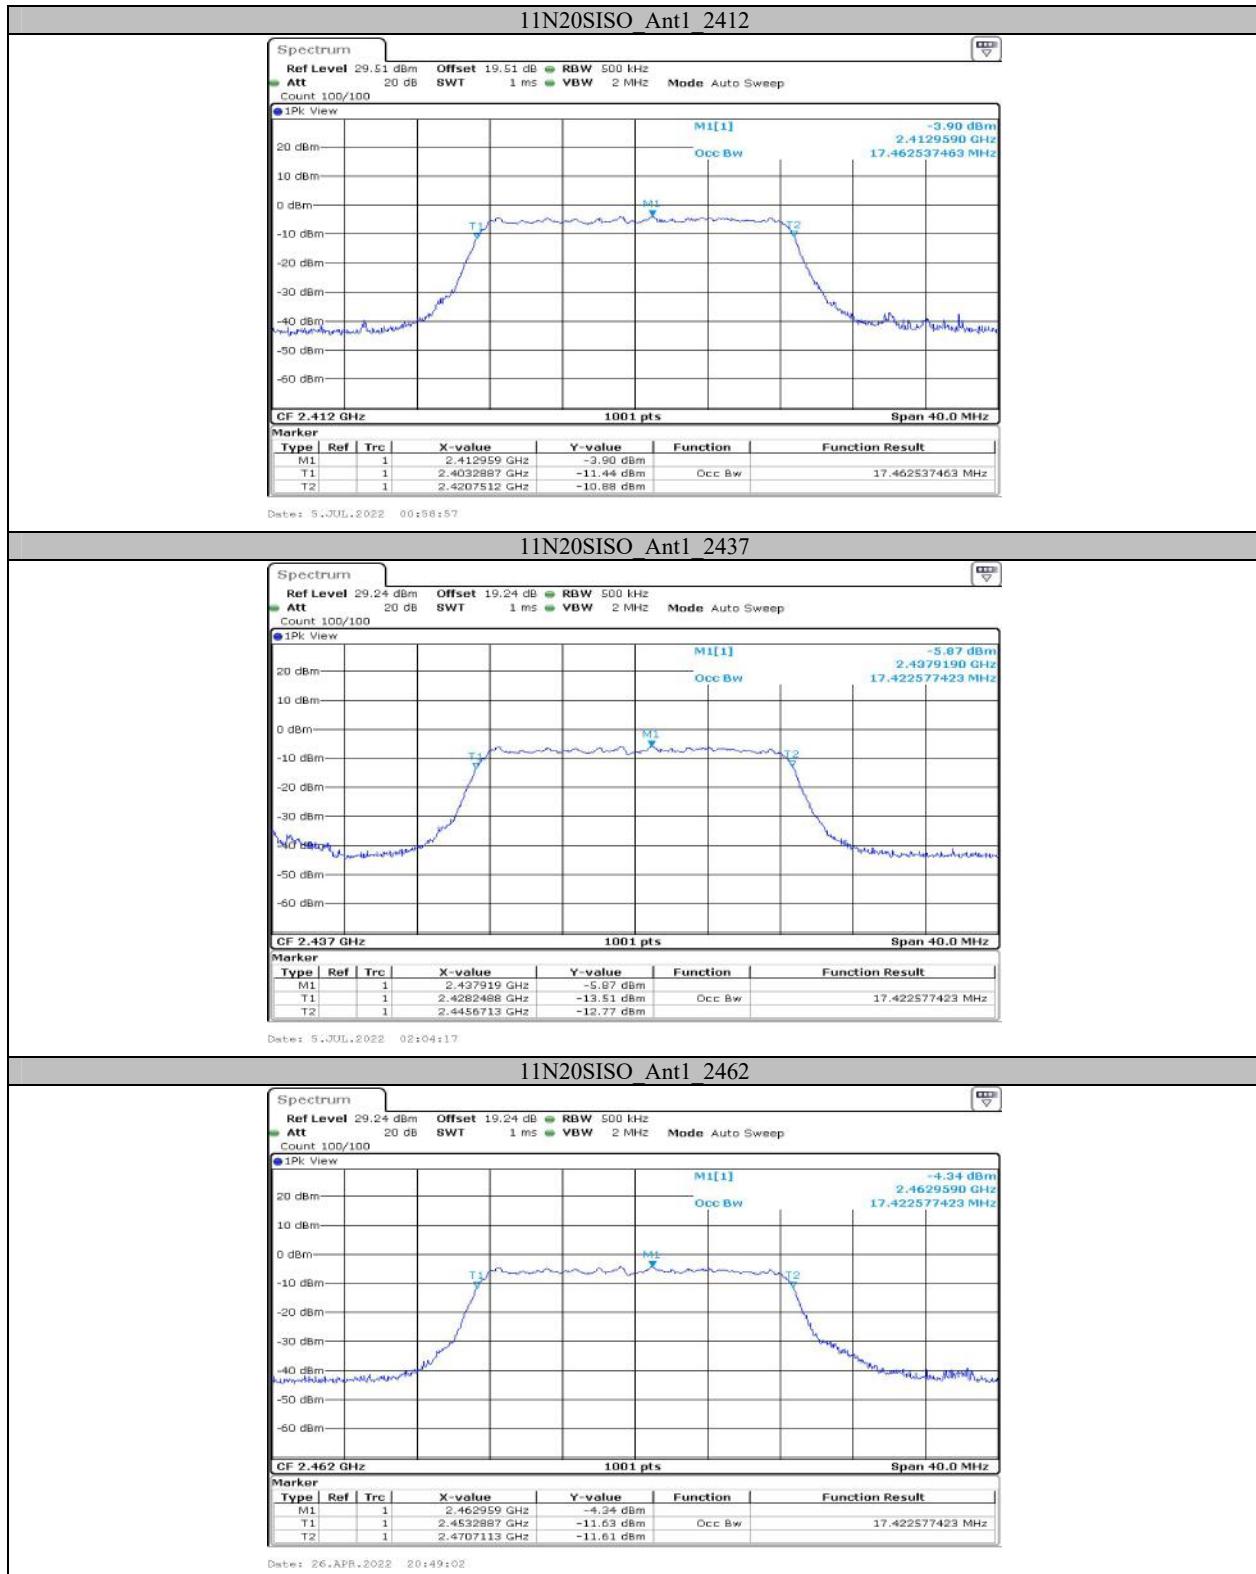

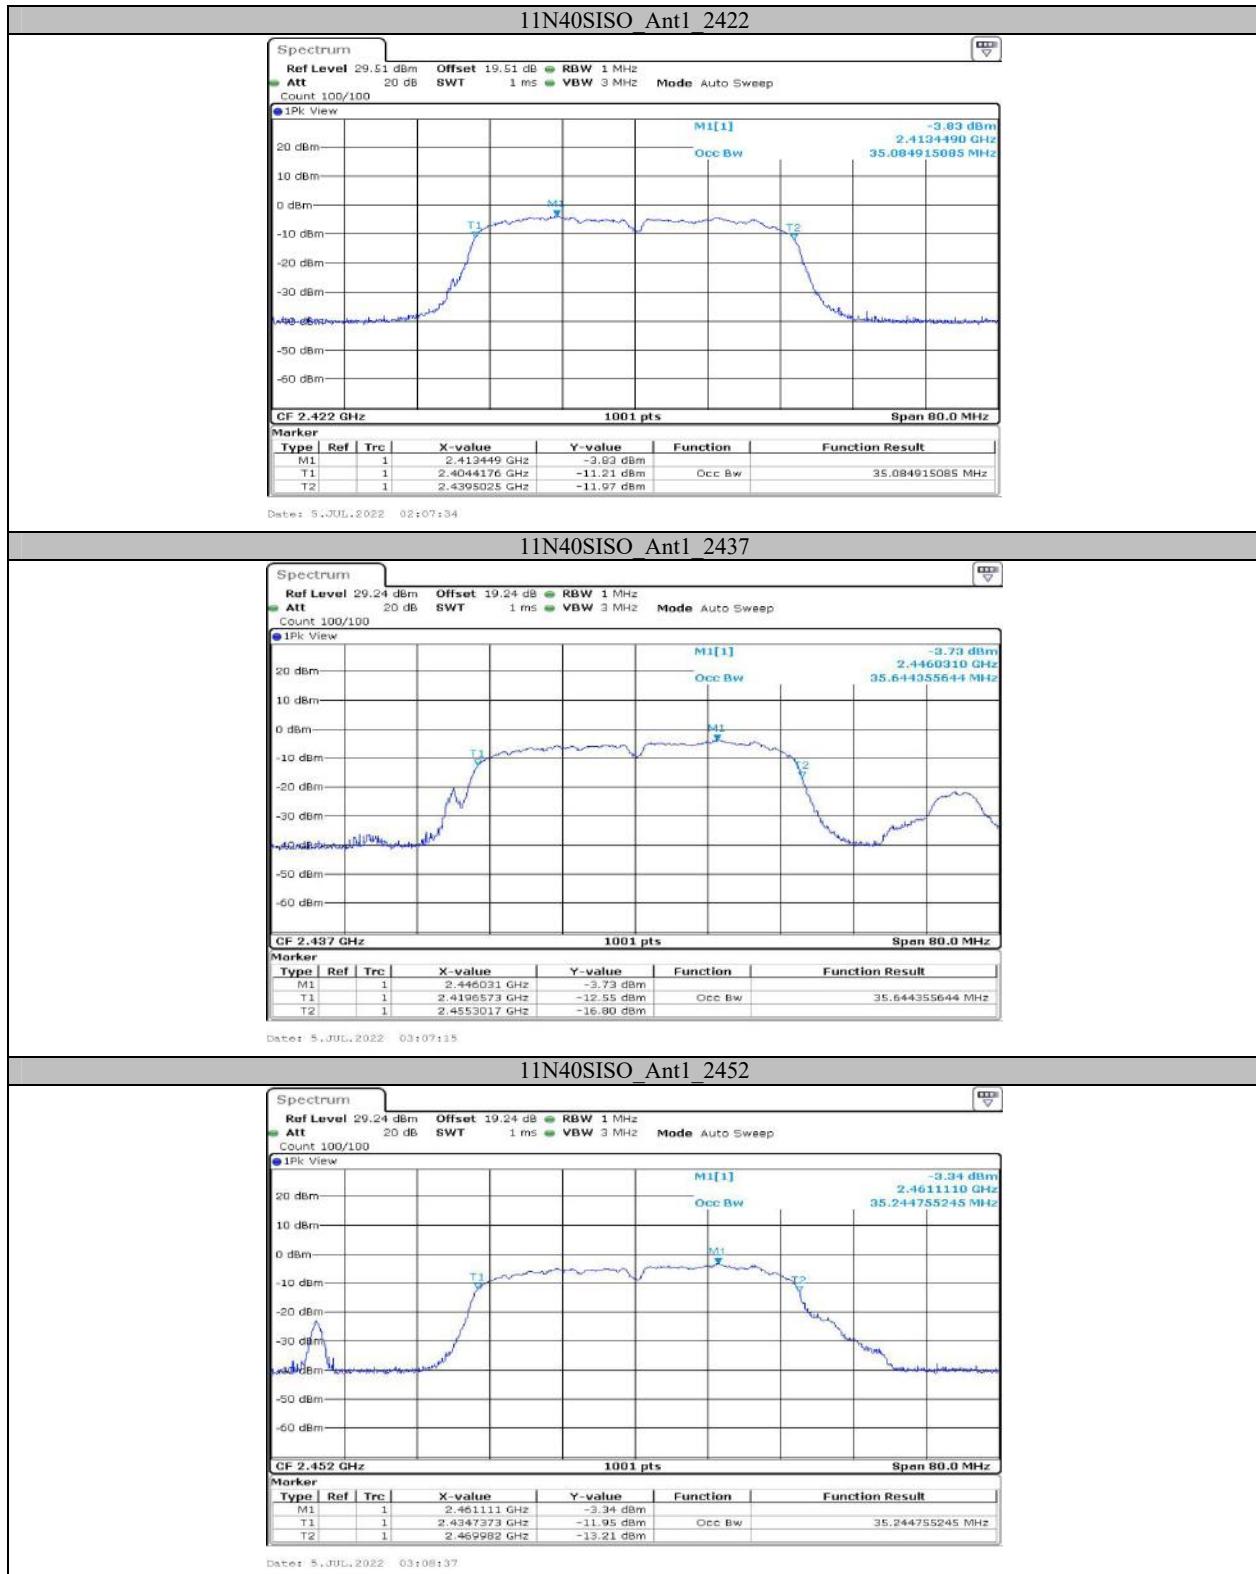



**Appendix C: Maximum conducted peak output power  
Test Result**


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	6.40	≤30.00	PASS
		2437	5.47	≤30.00	PASS
		2462	6.71	≤30.00	PASS
11G	Ant1	2412	8.60	≤30.00	PASS
		2437	7.42	≤30.00	PASS
		2462	8.76	≤30.00	PASS
11N20SISO	Ant1	2412	8.28	≤30.00	PASS
		2437	7.27	≤30.00	PASS
		2462	8.69	≤30.00	PASS
11N40SISO	Ant1	2422	8.07	≤30.00	PASS
		2437	7.67	≤30.00	PASS
		2452	8.20	≤30.00	PASS


**Appendix D: Maximum power spectral density  
Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-25.39	≤8.00	PASS
		2437	-26.30	≤8.00	PASS
		2462	-24.92	≤8.00	PASS
11G	Ant1	2412	-26.94	≤8.00	PASS
		2437	-28.02	≤8.00	PASS
		2462	-26.79	≤8.00	PASS
11N20SISO	Ant1	2412	-26.46	≤8.00	PASS
		2437	-27.85	≤8.00	PASS
		2462	-26.27	≤8.00	PASS
11N40SISO	Ant1	2422	-26.09	≤8.00	PASS
		2437	-28.04	≤8.00	PASS
		2452	-27.48	≤8.00	PASS

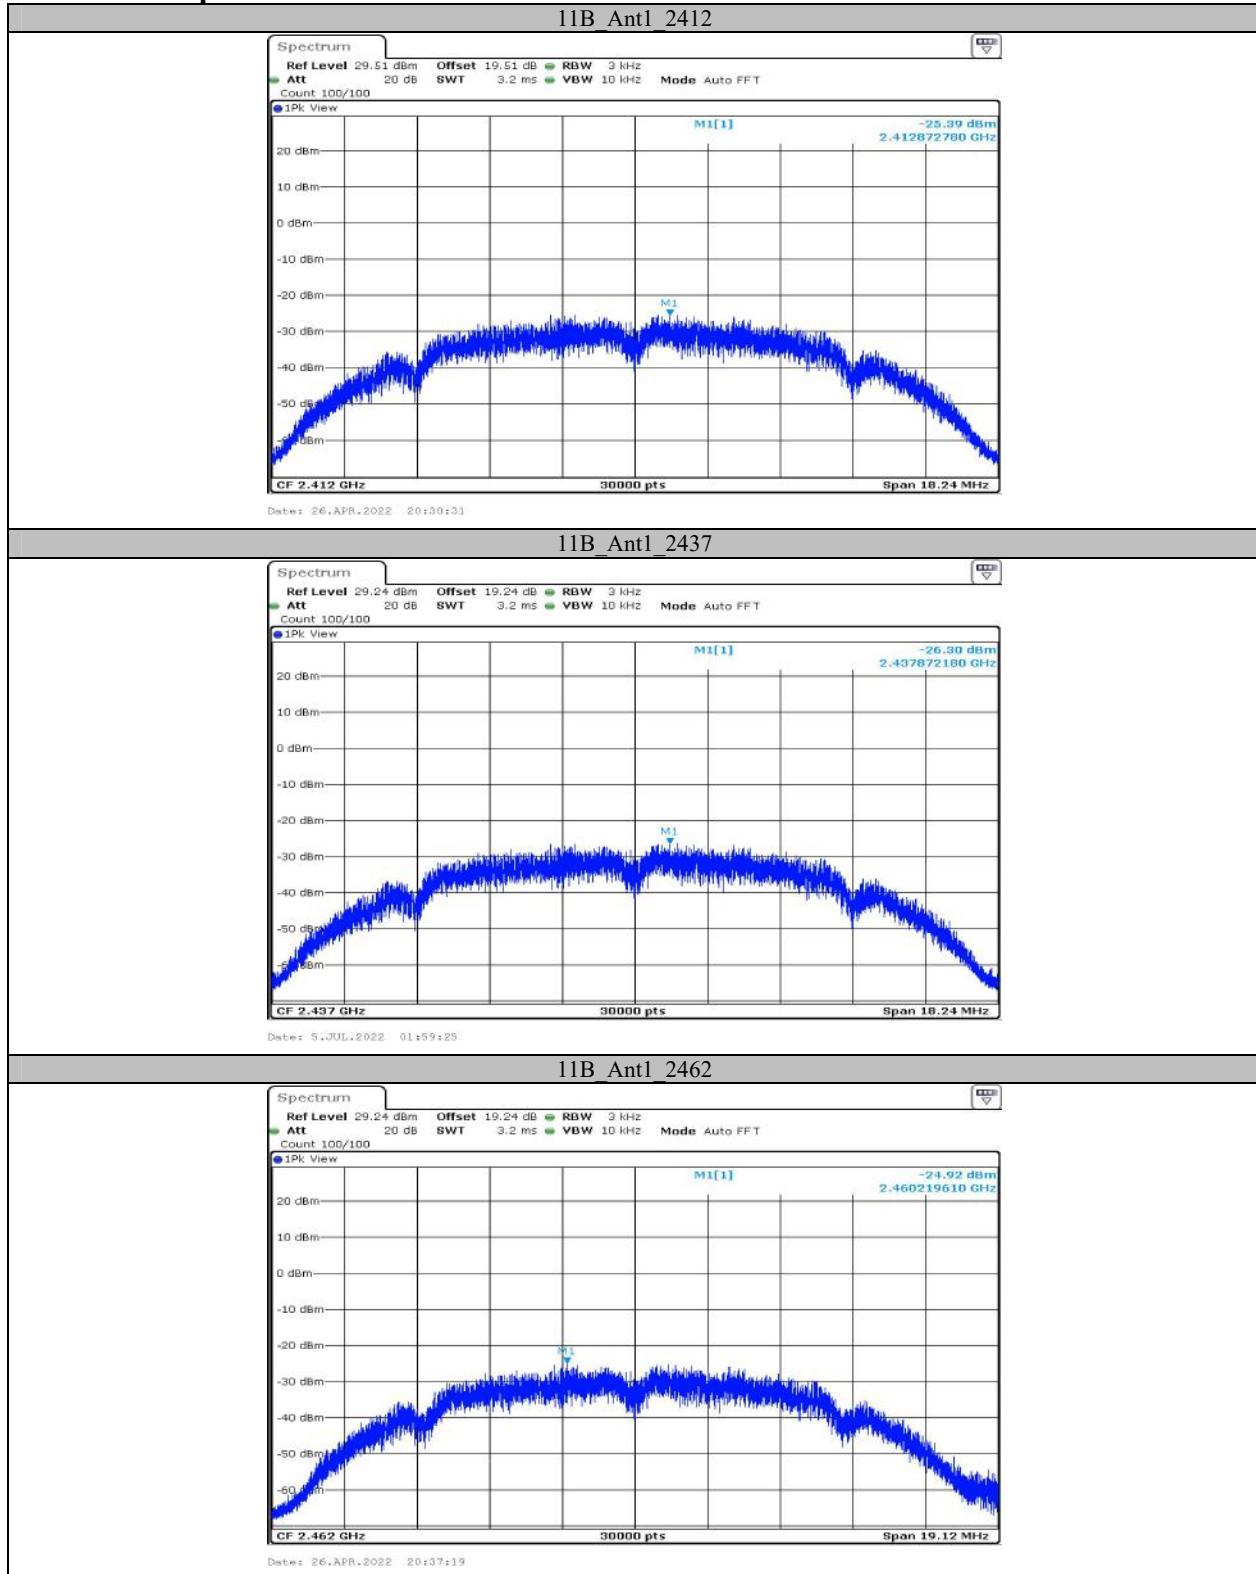**Test Graphs**

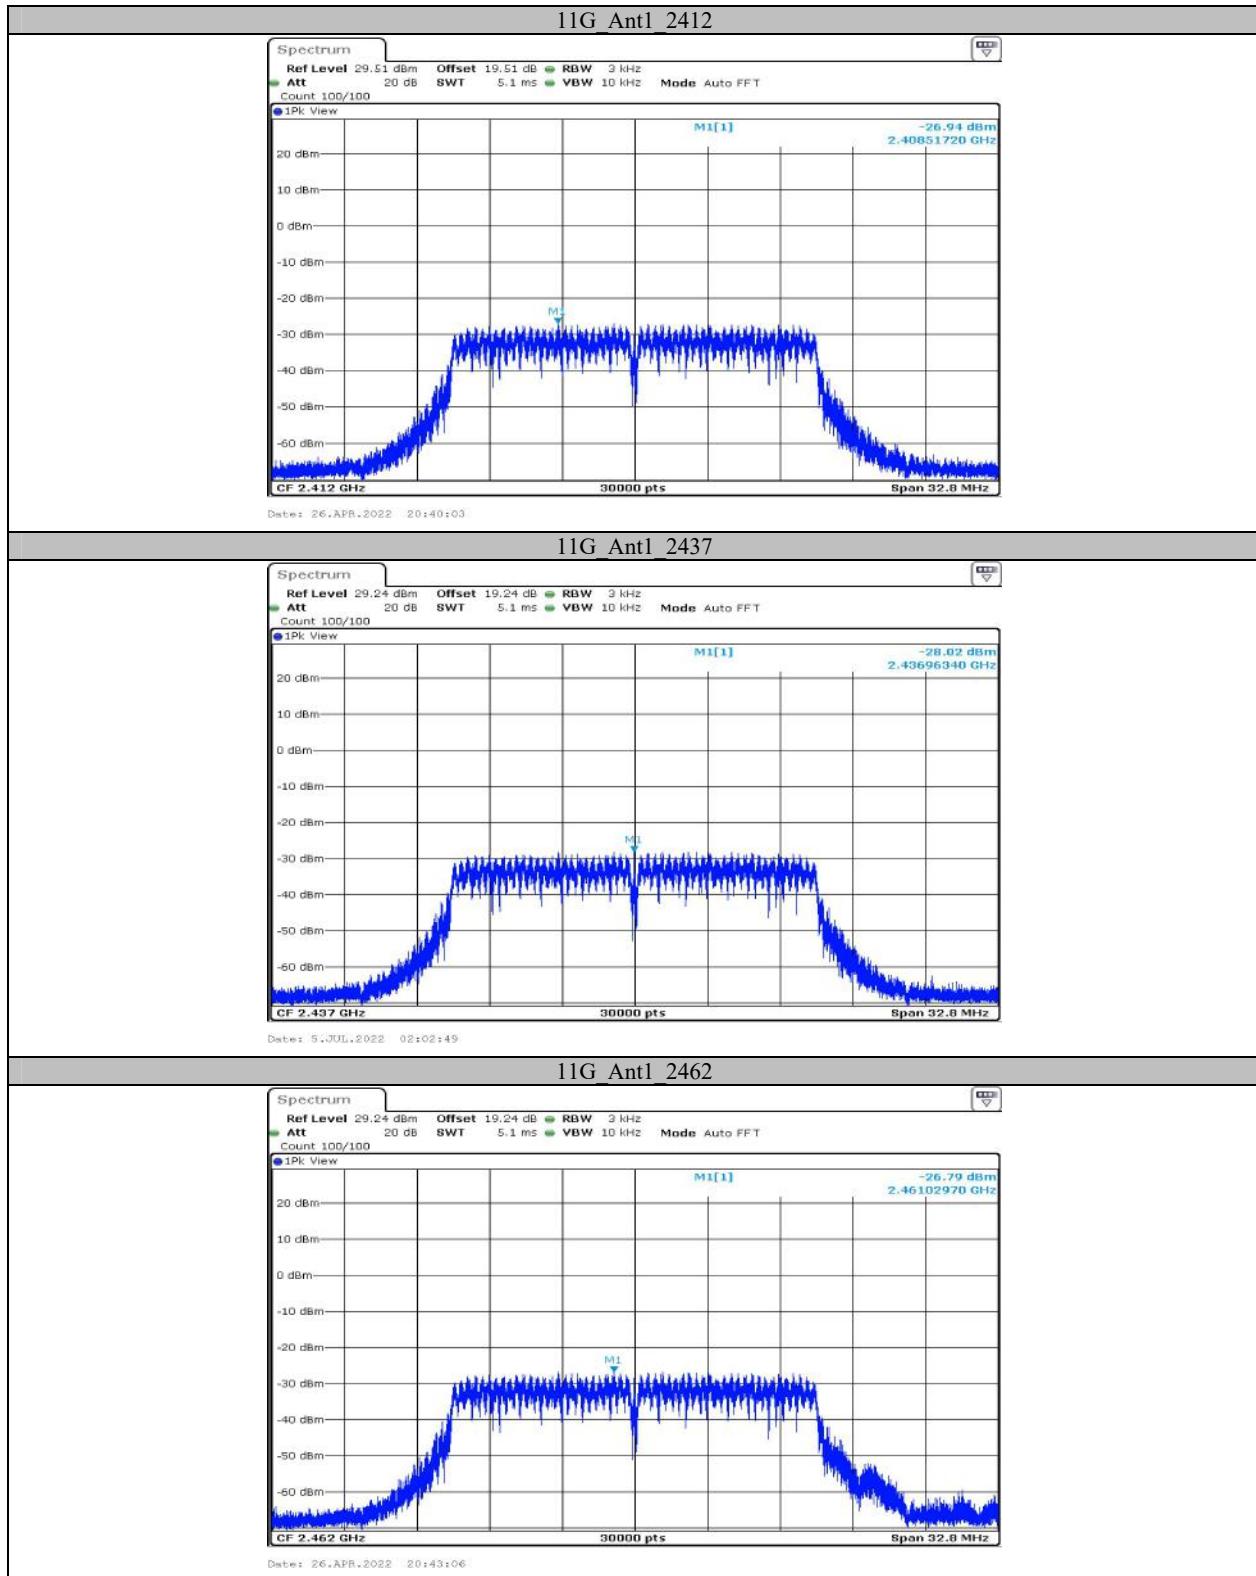


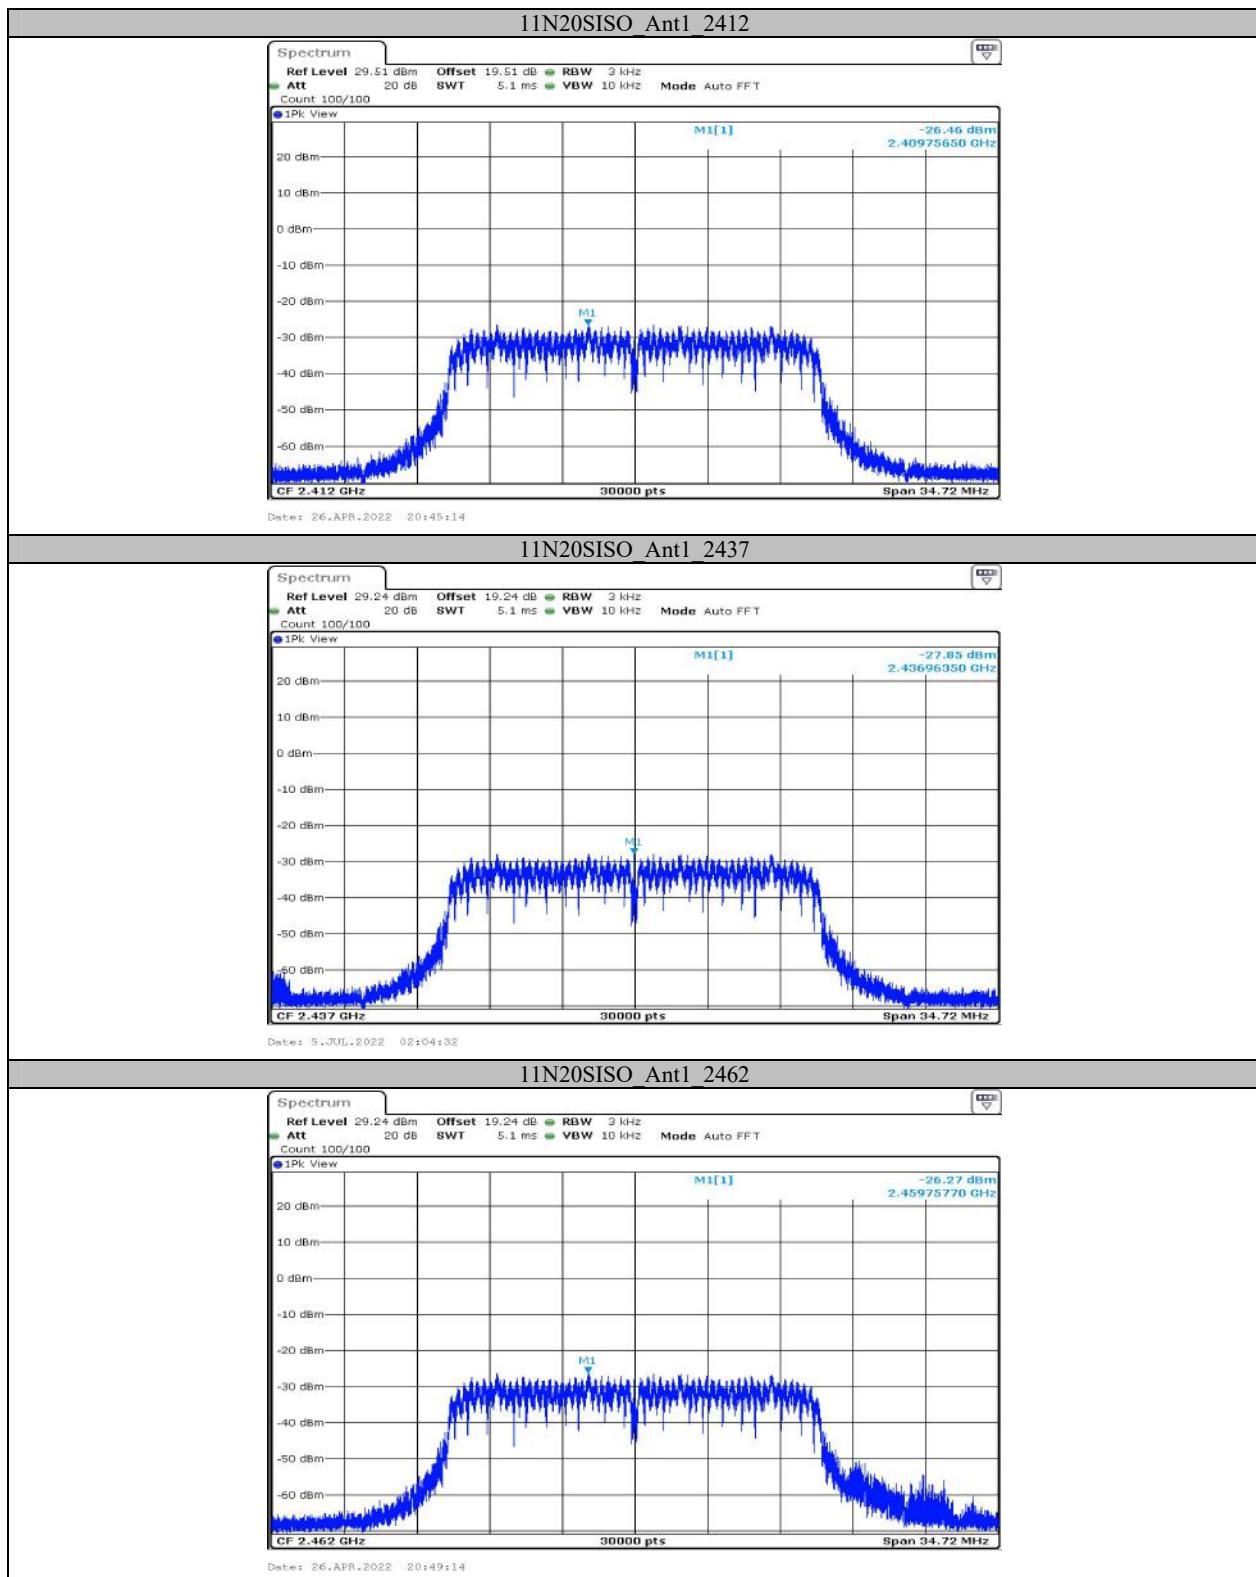

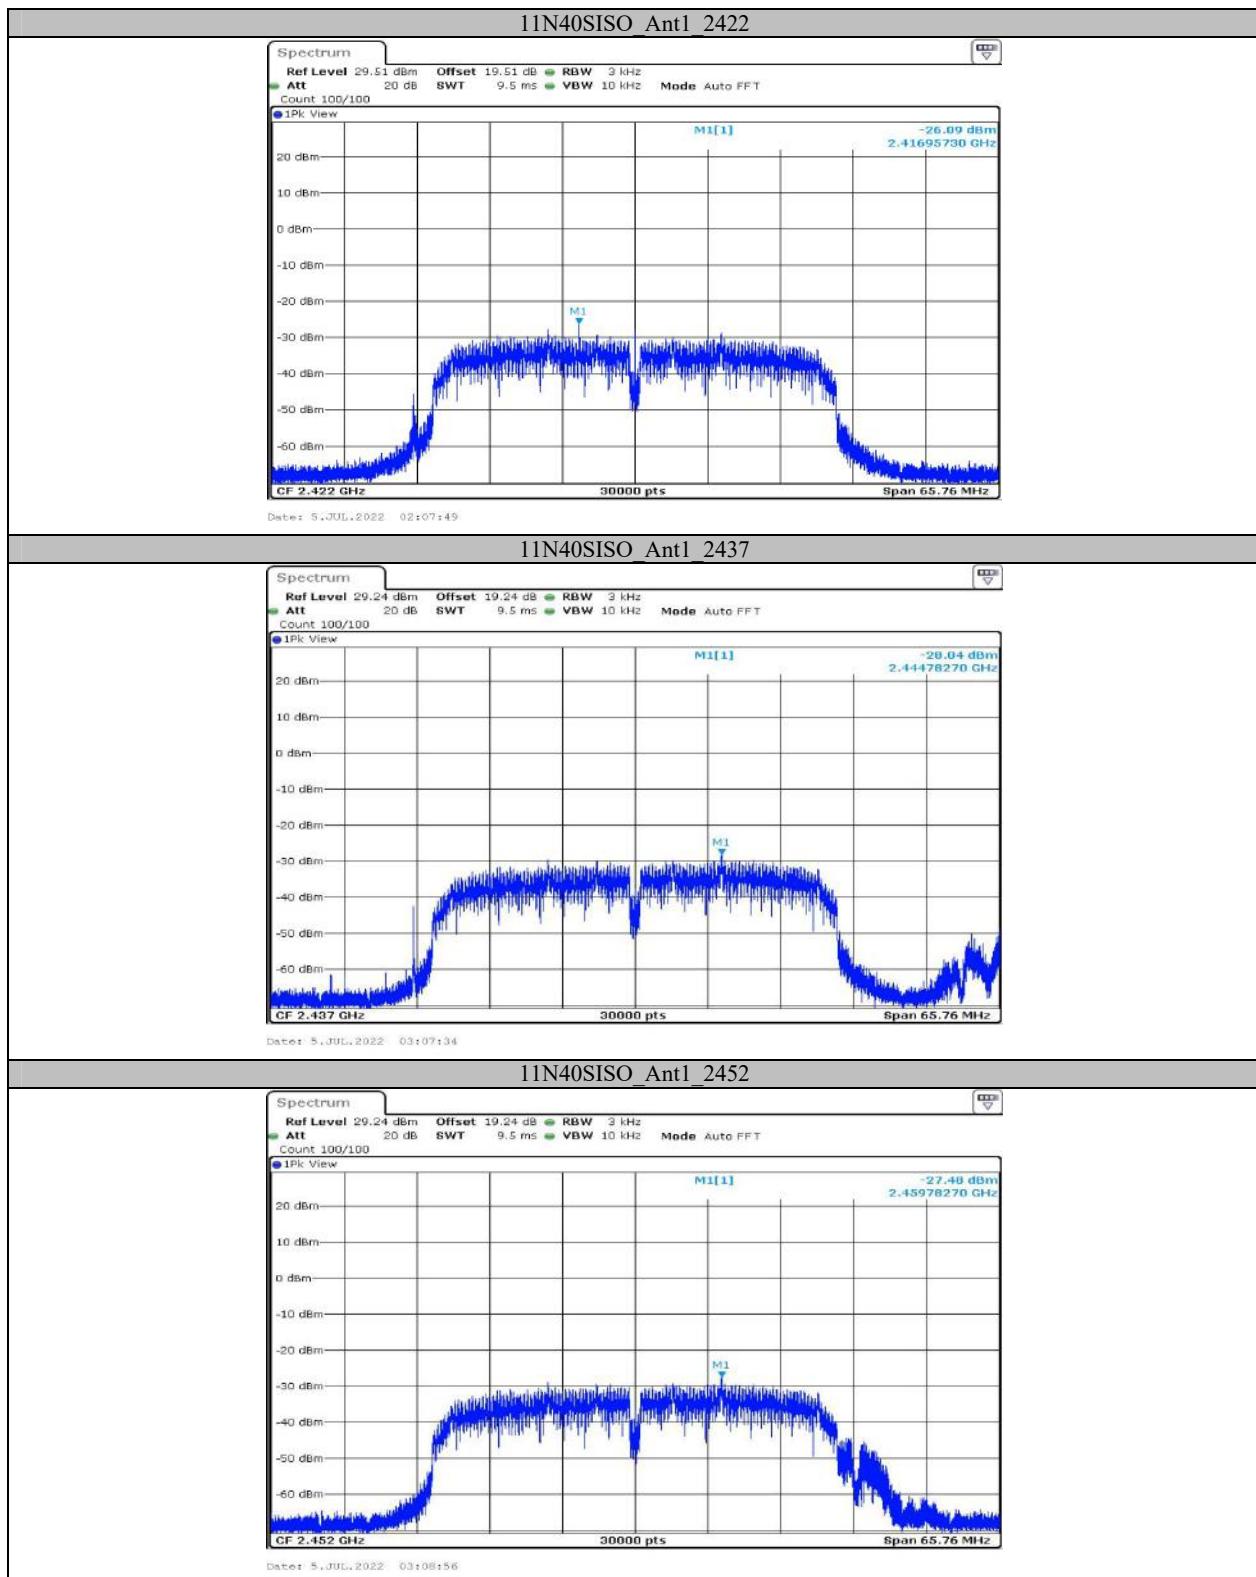


## Appendix E: Band edge measurements

### Test Graphs

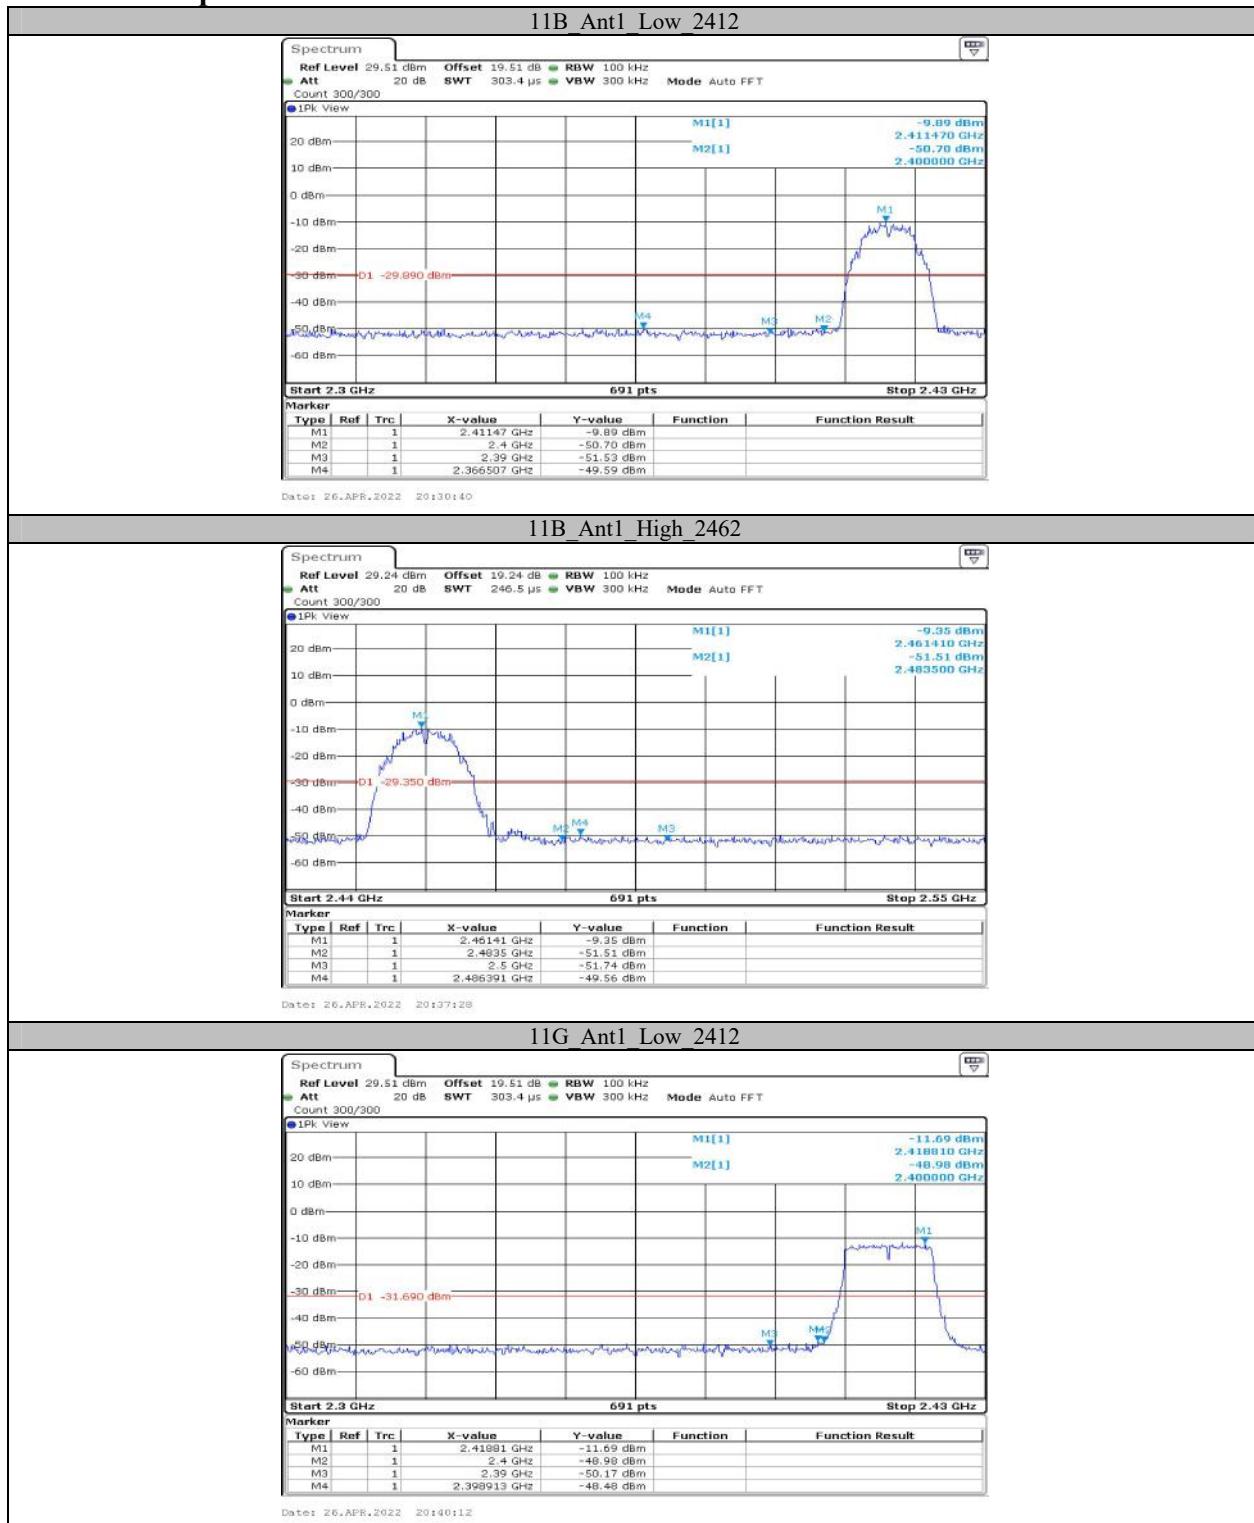




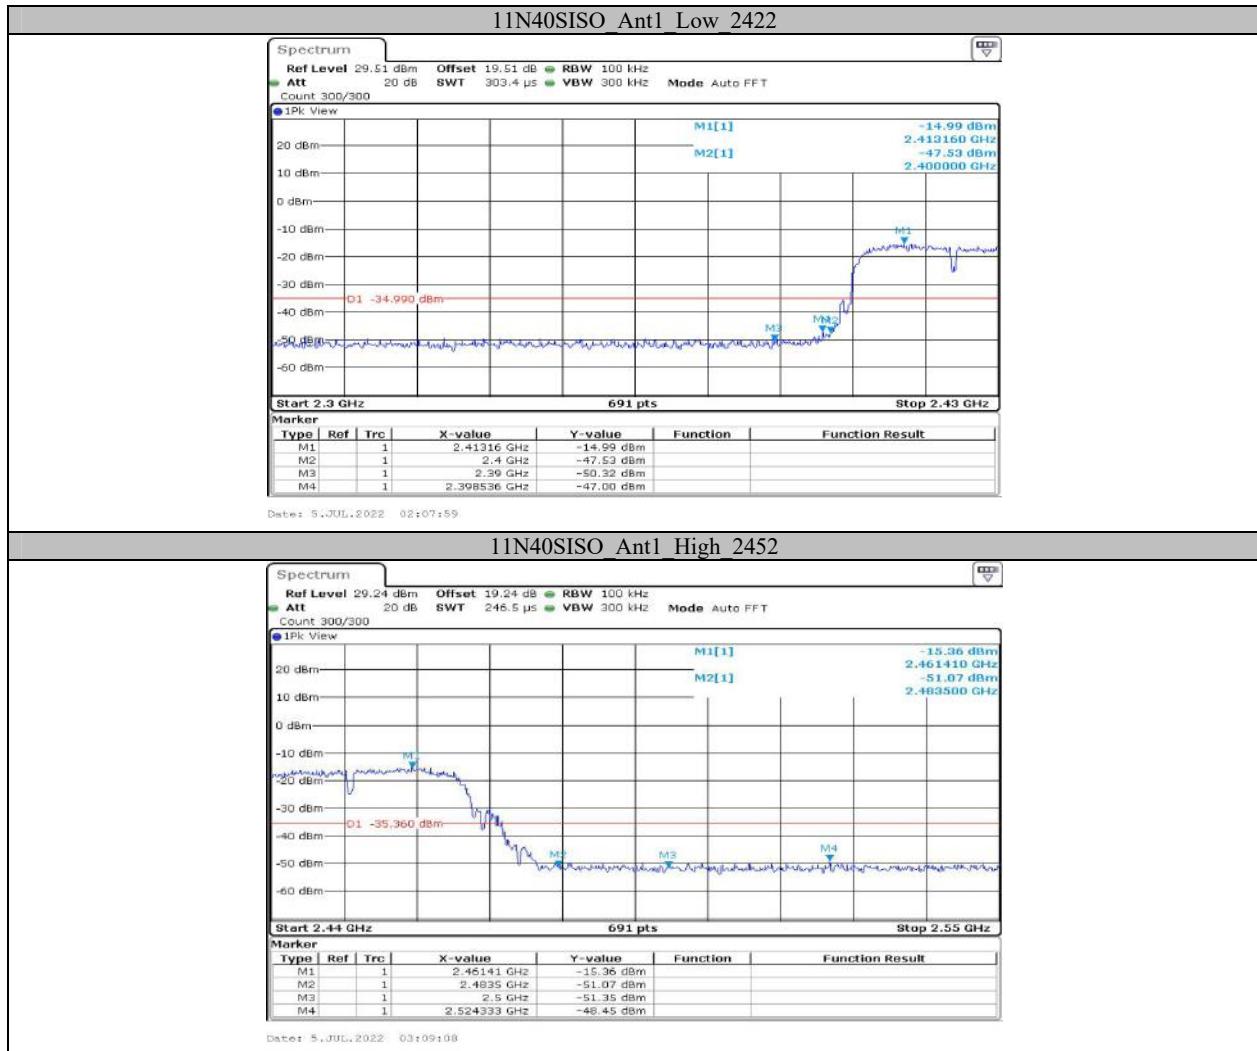


## Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2437	30.00	30.00	100.00
11G	Ant1	2437	30.00	30.00	100.00
11N20SISO	Ant1	2437	30.00	30.00	100.00
11N40SISO	Ant1	2437	30.00	30.00	100.00

### Test Graphs

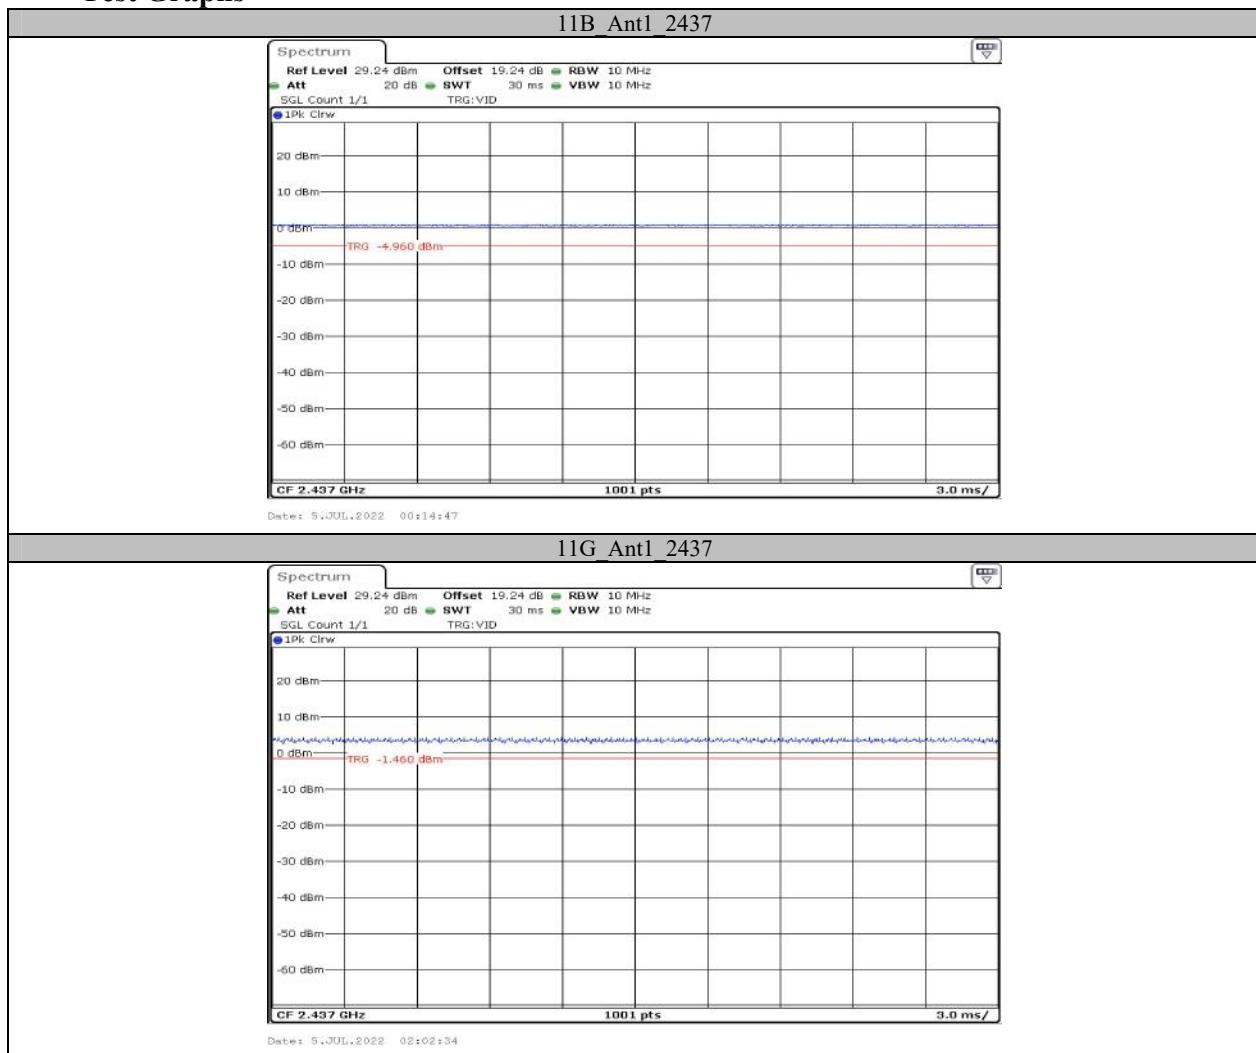

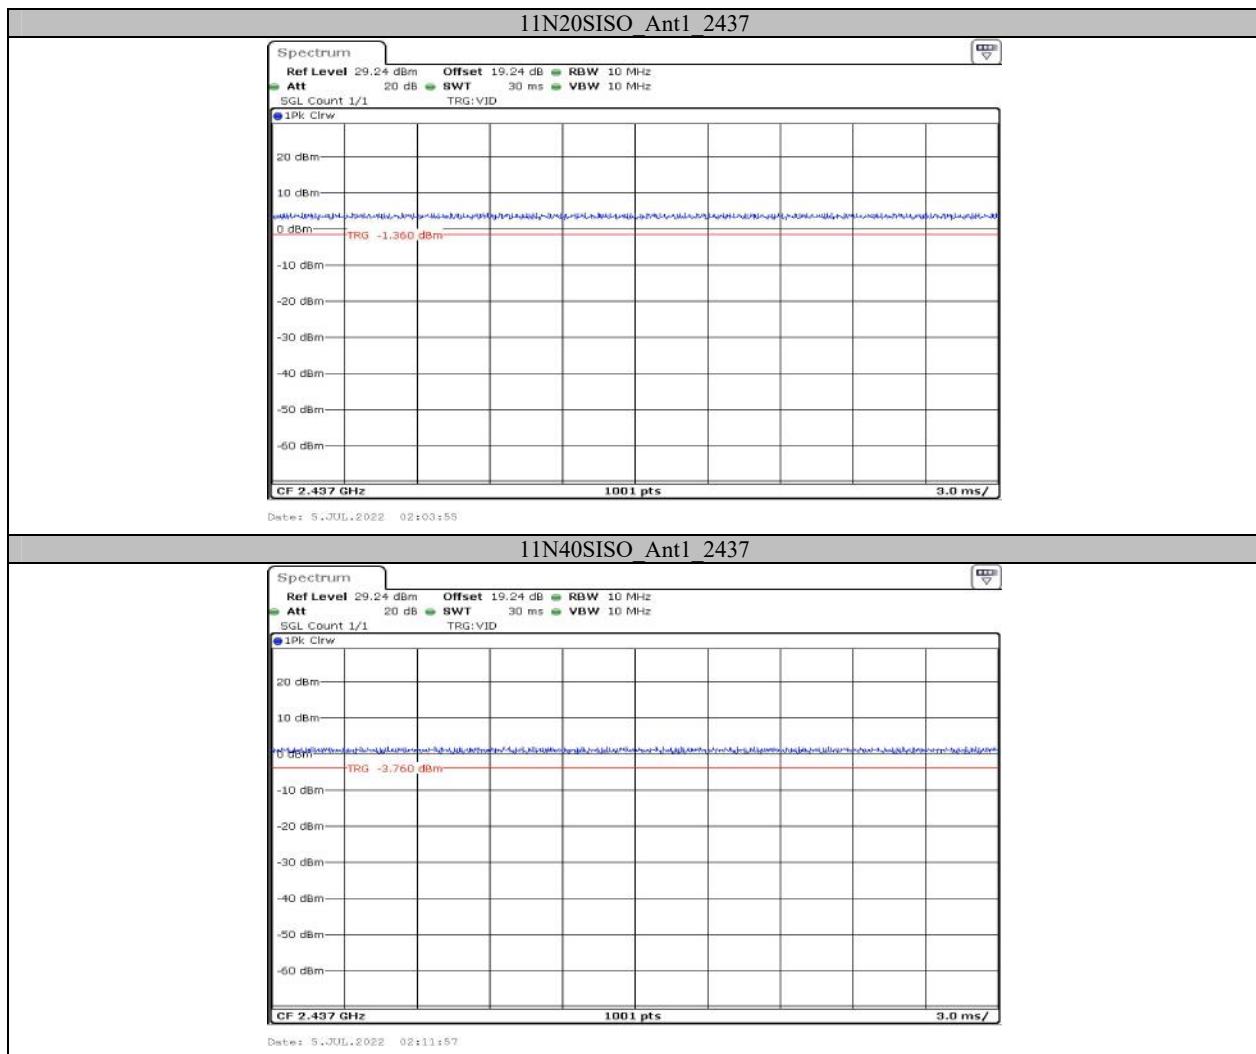


## APPENDIX BLE

### Appendix A: DTS Bandwidth


#### Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.64	0.5	PASS
		2440	0.64	0.5	PASS
		2480	0.64	0.5	PASS

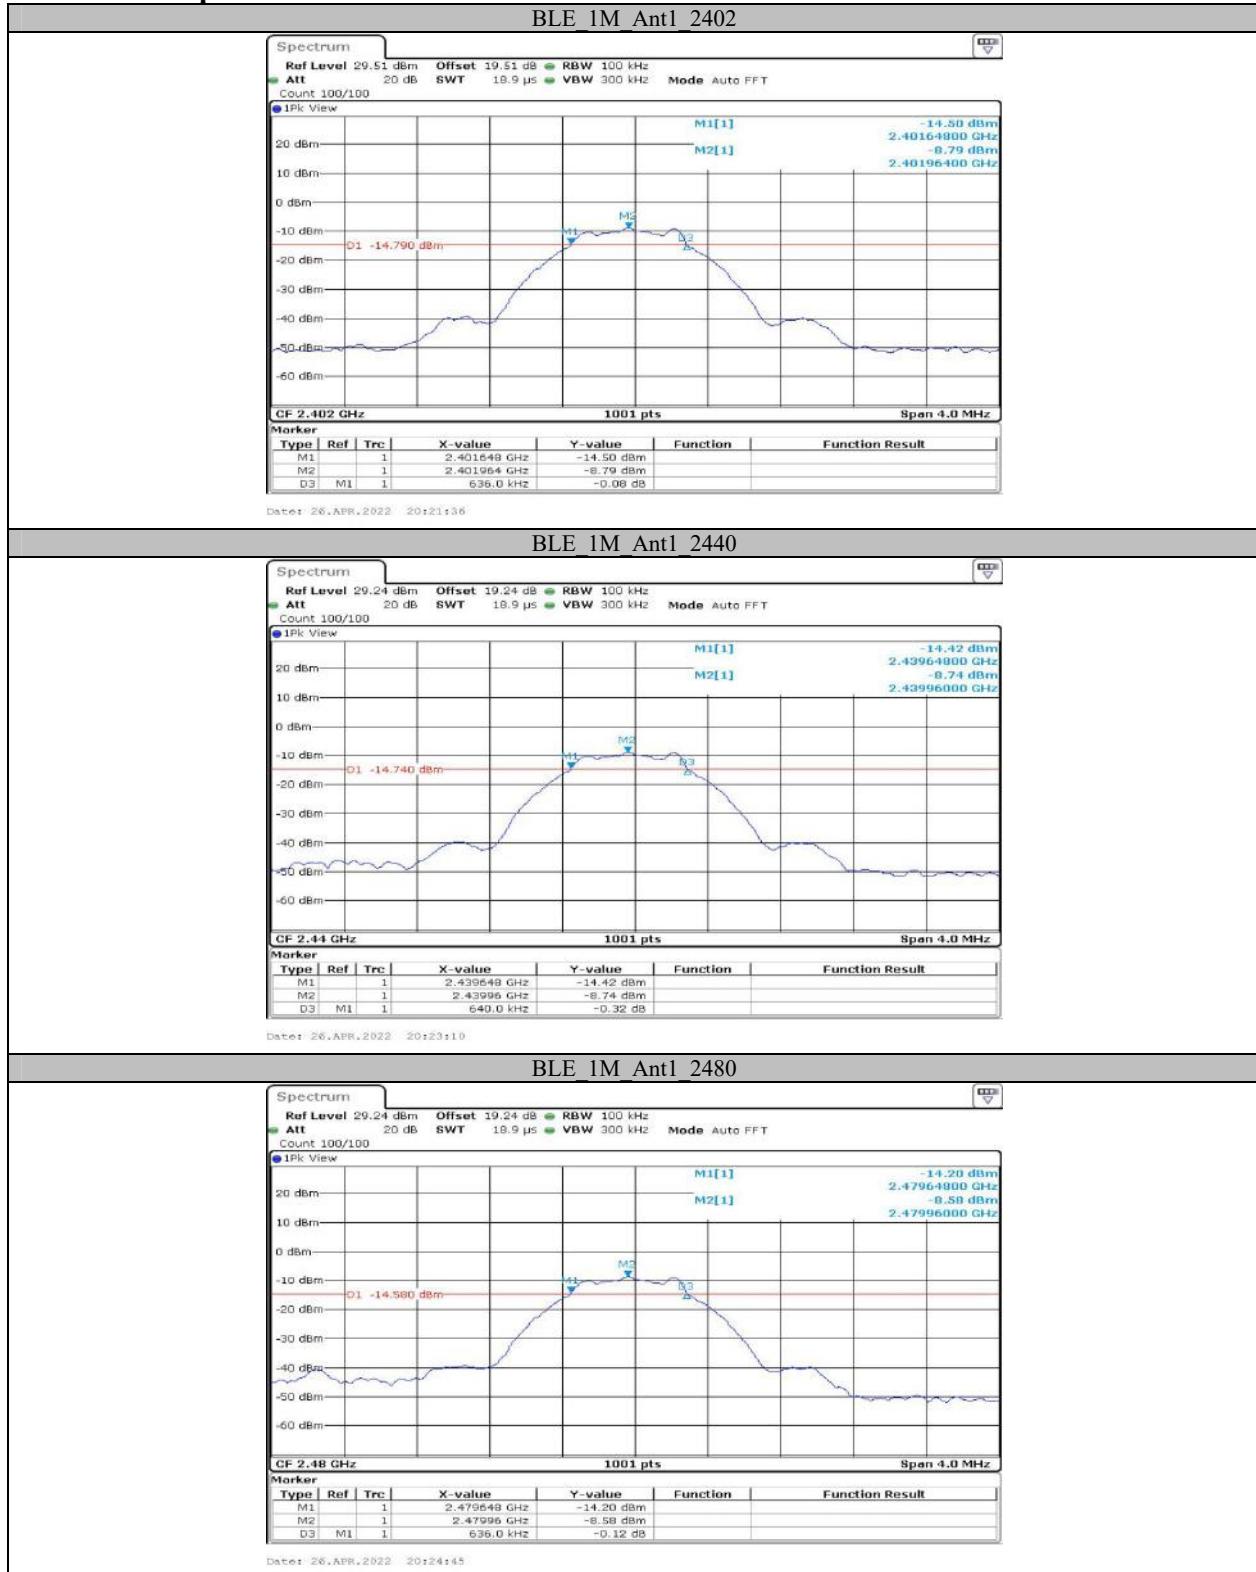**Test Graphs**


**Appendix B: Occupied Channel Bandwidth  
Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.019	2401.461	2402.480	---	---
		2440	1.023	2439.457	2440.480	---	---
		2480	1.023	2479.457	2480.480	---	---

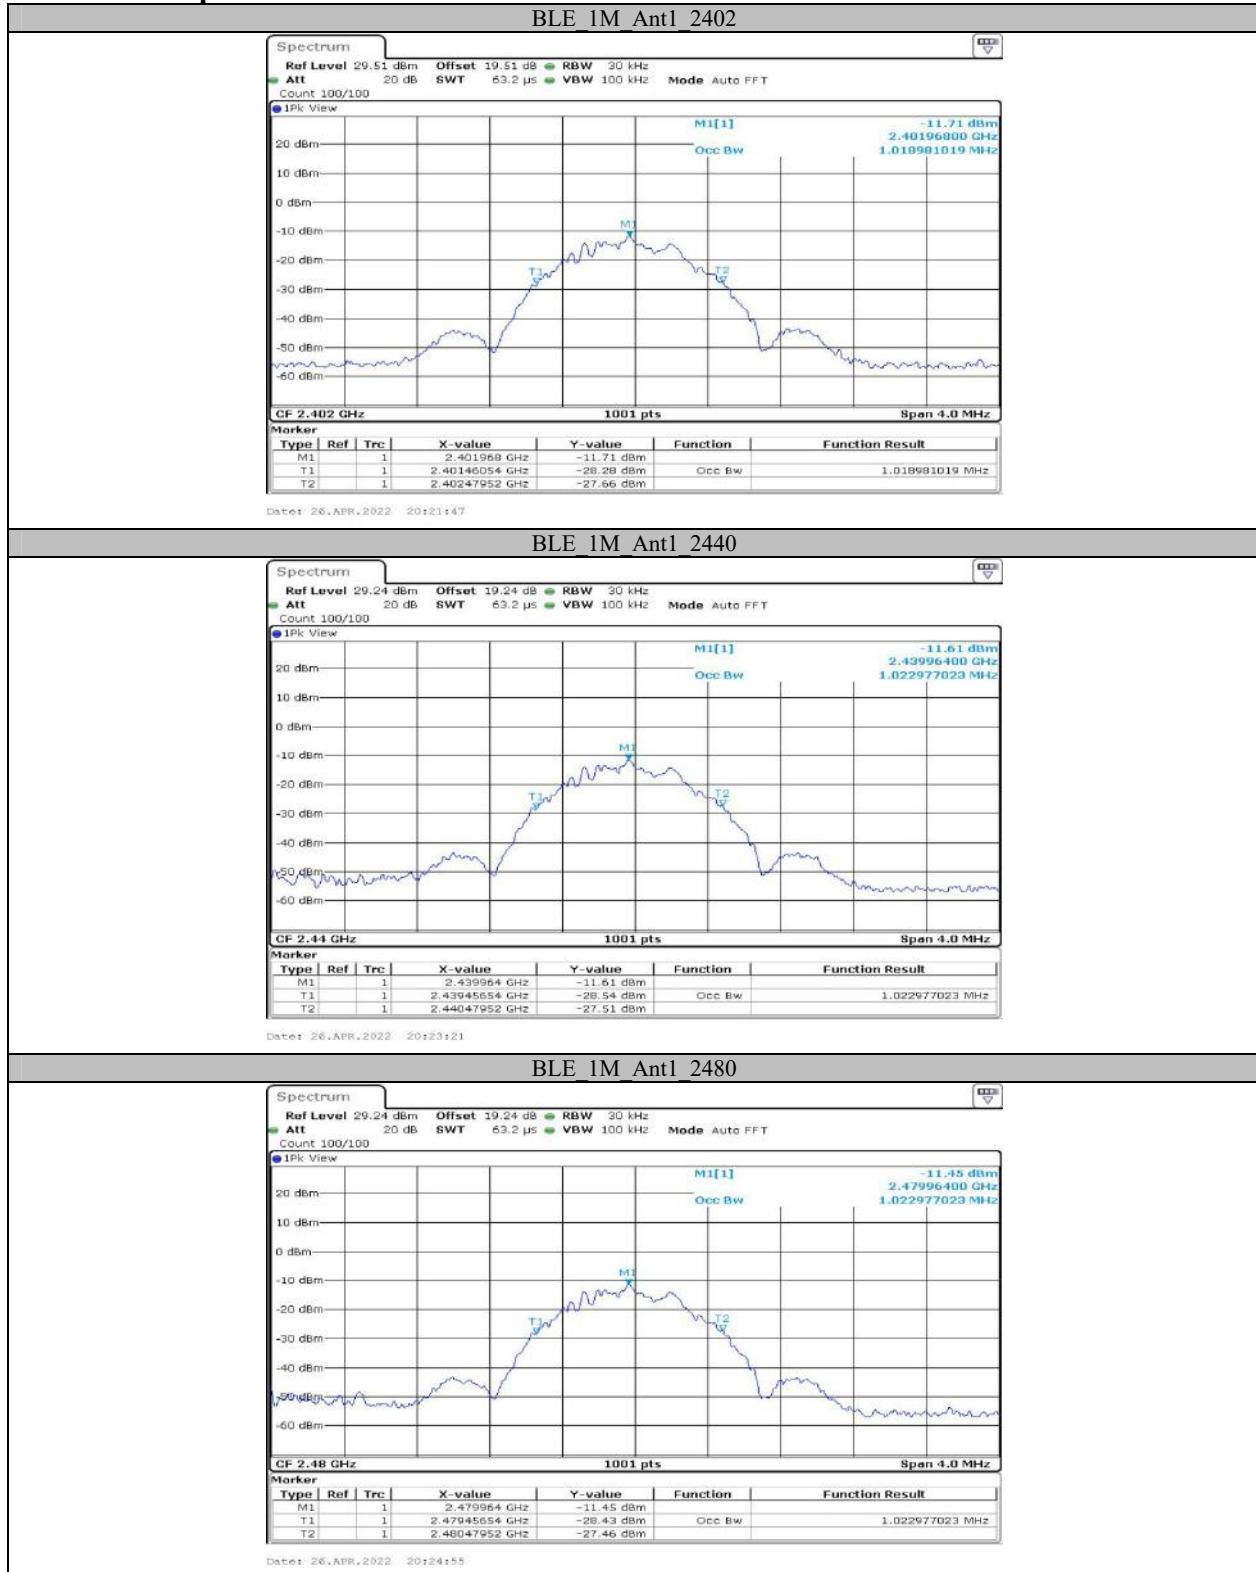**Test Graphs**

**Appendix C: Maximum output power  
Test Result**


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-8.33	≤30	PASS
		2440	-8.21	≤30	PASS
		2480	-7.97	≤30	PASS

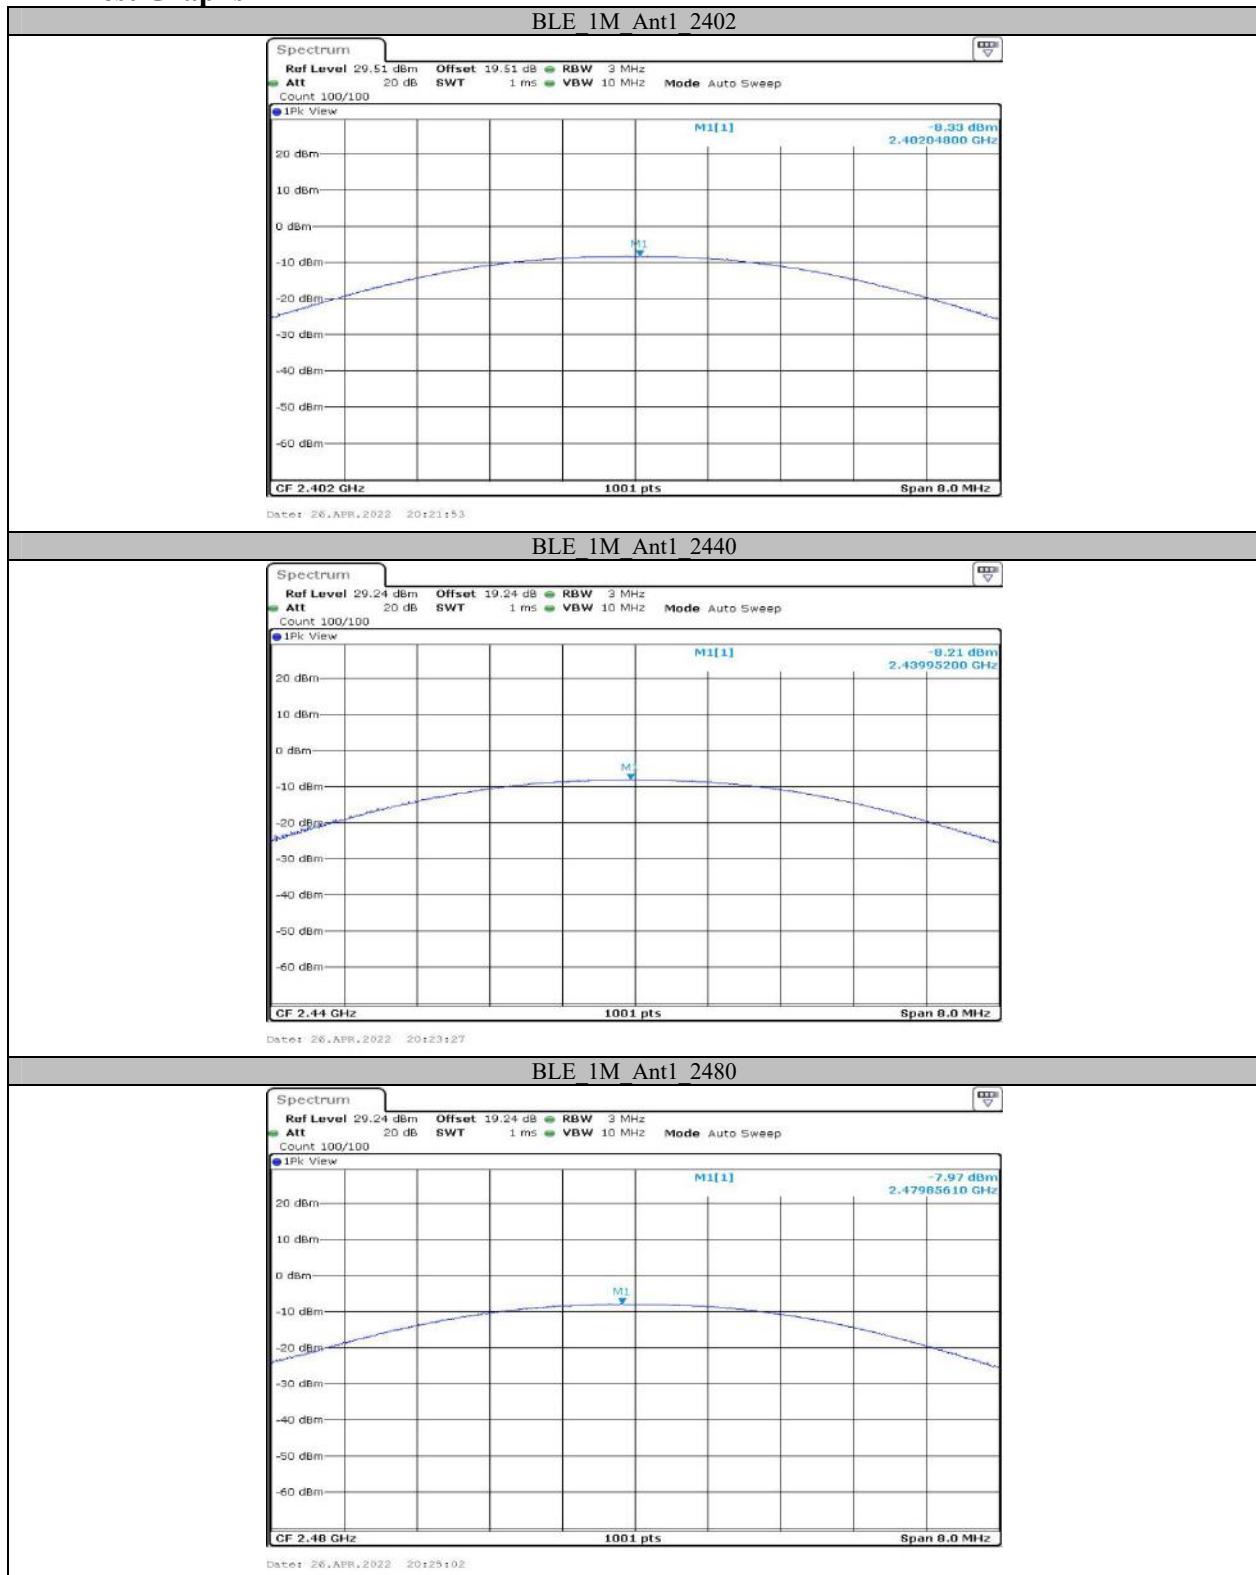**Test Graphs**

**Appendix D: Maximum power spectral density  
Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-25.04	≤8.00	PASS
		2440	-24.88	≤8.00	PASS
		2480	-24.76	≤8.00	PASS

## Test Graphs

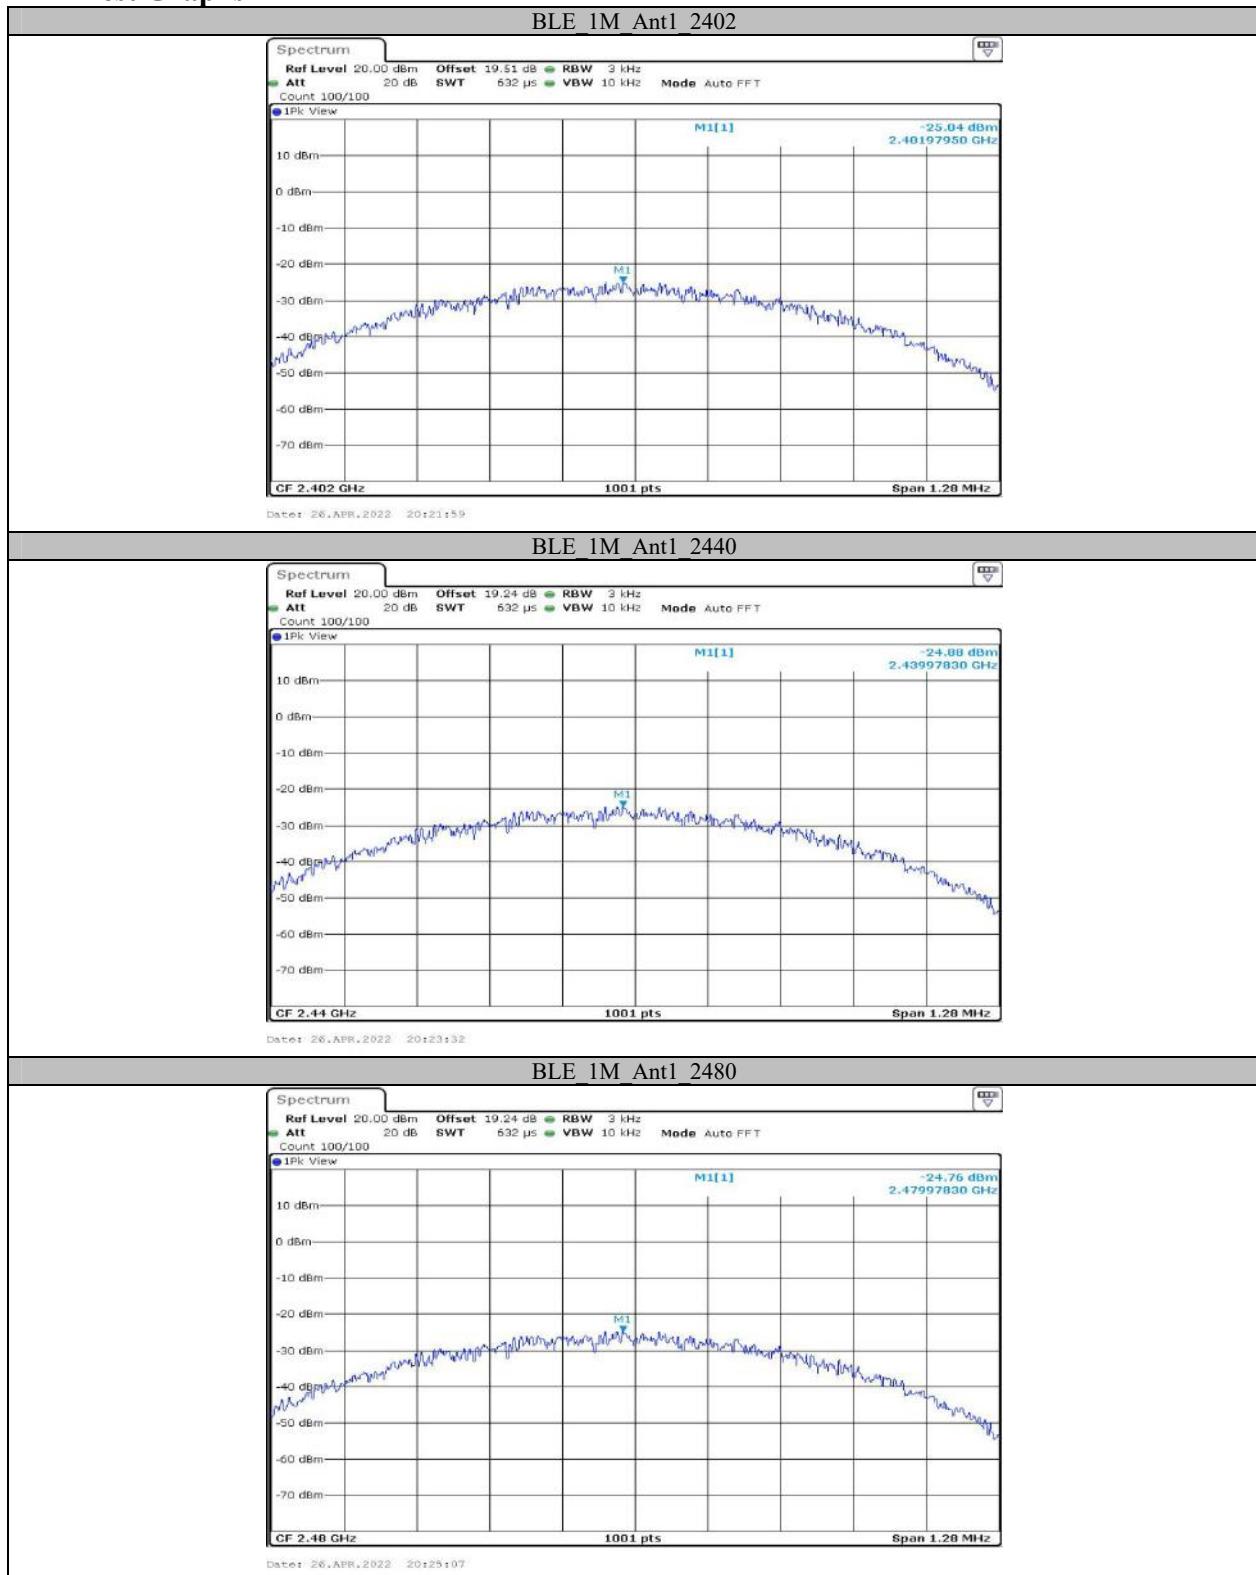

## Appendix E: Band edge measurements


### Test Graphs



## Appendix F: Duty Cycle Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2440	2.09	2.50	83.60

### Test Graphs

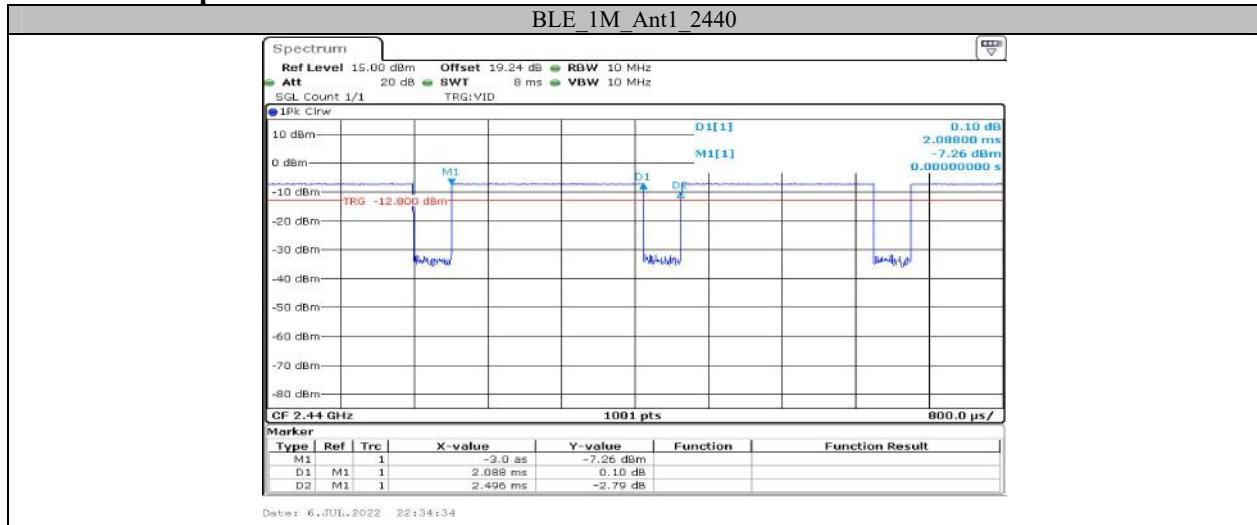

\*\*\*\*\* END OF REPORT \*\*\*\*\*