



FCC TEST REPORT

Test report
On Behalf of
Huizhou hundred electronic technology co.,LTD
For
REMOTE SWITCH
Model No.: MTR86-03,MTR86-01,MTR86-02,MTR118-01,MTR118-02,
MTR118-03
FCC ID:2ASZG-MTR86-03

Prepared for : Huizhou hundred electronic technology co.,LTD .,
6th Floor, Huaritai Factory, Huifeng West 3rd Road, Zhongkai High-tech Zone,
Huizhou City, Guangdong Province, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China



TEST REPORT

Applicant's name.....: **Huizhou hundred electronic technology co.,LTD**
 Address: 6th Floor, Huaritai Factory, Huifeng West 3rd Road, Zhongkai High-tech Zone, Huizhou City, Guangdong Province, China

Manufacture's Name: **Huizhou hundred electronic technology co.,LTD**
 Address: 6th Floor, Huaritai Factory, Huifeng West 3rd Road, Zhongkai High-tech Zone, Huizhou City, Guangdong Province, China

Product description

Trade Mark: /

Product name: REMOTE SWITCH

Model and/or type reference .: MTR86-03,MTR86-01,MTR86-02,MTR118-01,MTR118-02,MTR118-03

Standards.....: 47 CFR FCC Part 15 Subpart C 15.231
 ANSI C63.10: 2013


This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test..... :


Date (s) of performance of tests: Apr.02, 2019 ~. Apr.17, 2019

Date of Issue: Apr.17, 2019

Test Result: **Pass**

Testing Engineer : 
 (Gary Qian)

Technical Manager : 
 (Eden Hu)

Authorized Signatory : 
 (Jason Zhou)



Contents

| | | |
|-----------|---|-----------|
| 1. | <u>..TEST STANDARDS</u> | 4 |
| 2. | <u>..SUMMARY</u> | 5 |
| 2.1. | Product Description | 5 |
| 2.2. | Equipment Under Test | 5 |
| 2.3. | Short description of the Equipment under Test (EUT) | 5 |
| 2.4. | Block Diagram of Test Setup | 5 |
| 2.5. | Modifications | 5 |
| 3. | <u>..TEST ENVIRONMENT</u> | 6 |
| 3.1. | TEST FACILITY | 6 |
| 3.2. | Environmental conditions | 6 |
| 3.3. | Summary of measurement results | 6 |
| 3.4. | Statement of the measurement uncertainty | 6 |
| 3.5. | Equipments Used during the Test | 6 |
| 4. | <u>TEST CONDITIONS AND RESULTS</u> | 8 |
| 4.1. | Conducted Emission (AC Main) | 8 |
| 4.2. | Radiated Emission | 9 |
| 4.3. | 20dB Bandwidth | 14 |
| 4.4. | Transmission Time | 15 |
| 4.5. | Antenna Requirement | 16 |
| 5. | <u>..TEST SETUP PHOTOS OF THE EUT</u> | 17 |
| 6. | <u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u> | 18 |



1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.231: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz



2. SUMMARY

2.1. Product Description

| | |
|----------------------|---|
| Name of EUT | REMOTE SWITCH |
| Trade Mark: | / |
| Model Number | MTR86-03 |
| List Model: | MTR86-01,MTR86-02,MTR118-01,MTR118-02,MTR118-03 |
| Power Rating | DC 3V From Battery |
| FCC ID | 2ASZG-MTR86-03 |
| Modulation: | ASK |
| Operation frequency: | 433.92MHz |
| Channel number: | 1 |
| Antenna type: | PCB antenna |
| Antenna gain: | 0dBi |

2.2. Equipment Under Test

Power supply system utilised

| | | | |
|----------------------|---|---|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz | <input type="radio"/> 120V / 60Hz |
| | | <input type="radio"/> 12 V DC | <input type="radio"/> 24 V DC |
| | | <input checked="" type="radio"/> Other (specified in blank below) | |


DC 3V From Battety

2.3. Short description of the Equipment under Test (EUT)

This is a REMOTE SWITCH.

For more details, refer to the user's manual of the EUT.

2.4. Block Diagram of Test Setup

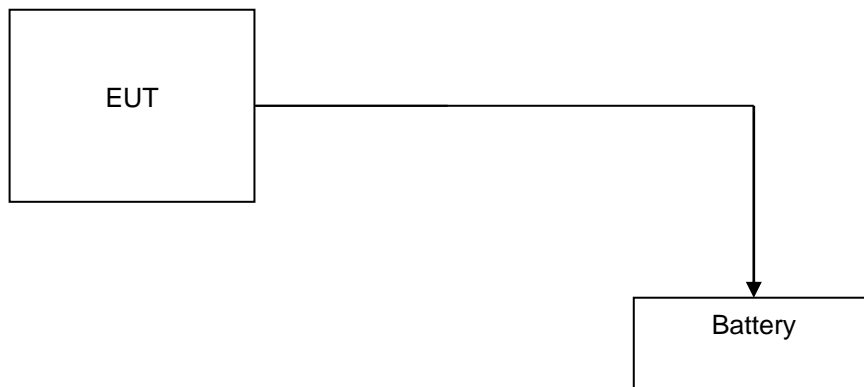

2.5. Modifications

No modifications were implemented to meet testing criteria.



3. TEST ENVIRONMENT

3.1. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

3.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|-----------------------|--------------|
| Temperature: | 15-35 ° C |
| Humidity: | 30-60 % |
| Atmospheric pressure: | 950-1050mbar |

3.3. Summary of measurement results

| FCC and IC Requirements | | |
|--------------------------------------|---|------|
| FCC Part 15.207 | Conducted Emission | N/A |
| FCC Part 15.231(a)(1) | Transmission Time | PASS |
| FCC Part 15.231(b) | Electric Field Strength of Fundamental Emission | PASS |
| FCC Part 15.205 & 15.209 & 15.231(b) | Electric Field Strength of Spurious Emission | PASS |
| FCC Part 15.231(c) | -20dB bandwidth | PASS |

Remark:

- The measurement uncertainty is not included in the test result.
- NA = Not Applicable; NP = Not Performed

3.4. Statement of the measurement uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

3.5. Equipments Used during the Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---|--------------|-----------|------------|---------------|---------------|
| 1. | L.I.S.N. Artificial Mains Network | R&S | ENV216 | HKE-002 | Dec. 27, 2018 | 1 Year |
| 2. | Receiver | R&S | ESCI 7 | HKE-010 | Dec. 27, 2018 | 1 Year |
| 3. | RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Dec. 27, 2018 | 1 Year |
| 4. | Spectrum analyzer | R&S | FSP40 | HKE-025 | Dec. 27, 2018 | 1 Year |
| 5. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 27, 2018 | 1 Year |



| | | | | | | |
|-----|--------------------------|-----------------|------------------|---------|---------------|--------|
| 6. | Preamplifier | Schwarzbeck | BBV 9743 | HKE-006 | Dec. 27, 2018 | 1 Year |
| 7. | EMI Test Receiver | Rohde & Schwarz | ESCI 7 | HKE-010 | Dec. 27, 2018 | 1 Year |
| 8. | Bilog Broadband Antenna | Schwarzbeck | VULB9163 | HKE-012 | Dec. 27, 2018 | 1 Year |
| 9. | Loop Antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Dec. 27, 2018 | 1 Year |
| 10. | Horn Antenna | Schwarzbeck | 9120D | HKE-013 | Dec. 27, 2018 | 1 Year |
| 11. | Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | HKE-017 | Dec. 27, 2018 | 1 Year |
| 12. | Pre-amplifier | EMCI | EMC051845 SE | HKE-015 | Dec. 27, 2018 | 1 Year |
| 13. | Pre-amplifier | Agilent | 83051A | HKE-016 | Dec. 27, 2018 | 1 Year |
| 14. | EMI Test Software EZ-EMC | Tonscend | JS1120-B Version | HKE-083 | Dec. 27, 2018 | N/A |
| 15. | Power REMOTE SWITCH | Agilent | E9300A | HKE-086 | Dec. 27, 2018 | 1 Year |
| 16. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 27, 2018 | 1 Year |
| 17. | Signal generator | Agilent | N5182A | HKE-029 | Dec. 27, 2018 | 1 Year |
| 18. | Signal Generator | Agilent | 83630A | HKE-028 | Dec. 27, 2018 | 1 Year |
| 19. | Shielded room | Shiel Hong | 4*3*3 | HKE-039 | Dec. 27, 2018 | 3 Year |
| 20. | RF Cable(below 1GHz) | HUBER+SUHNER | RG214 | HKE-055 | Dec. 27, 2018 | 1 Year |
| 21. | RF Cable(above 1GHz) | HUBER+SUHNER | RG214 | HKE-056 | Dec. 27, 2018 | 1 Year |

Note: 1. The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

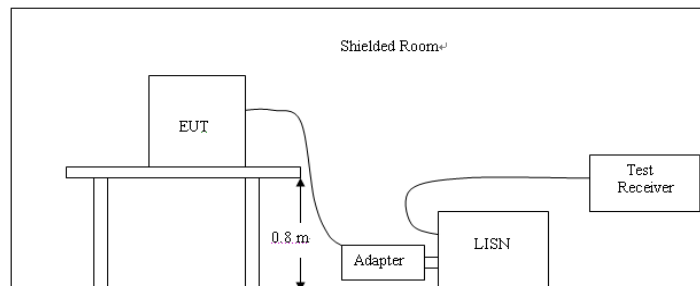

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a flood stand system; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Not applicable for device which is battery supply.

4.2. Radiated Emission

Limit

For intentional device, according to 15.209(a) the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

| Frequency (MHz) | Distance (Meters) | Radiated (dBµV/m) | Radiated (µV/m) |
|-----------------|-------------------|---|-----------------------|
| 0.009-0.49 | 3 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$ |
| 0.49-1.705 | 3 | $20\log(24000/F(\text{KHz}))+ 40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30 | 3 | $20\log(30)+ 40\log(30/3)$ | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

In addition to the provisions of 15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


| Funda-mental fre- quency (MHz) | Field strength of funda- mental (microvolts/ meter) | Field strength of spurious emissions (microvolts/meter) |
|--------------------------------------|---|---|
| 40.66– 40.70. | 2,250 | 225 |
| 70–130 | 1,250 | 125 |
| 130–174 | ¹ 1,250 to 3,750 | ¹ 125 to 375 |
| 174–260 | 3,750 | 375 |
| 260–470 | ¹ 3,750 to 12,500 | ¹ 375 to 1,250 |
| Above 470 | 12,500 | 1,250 |

¹ Linear interpolations.


[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz, µV/m at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

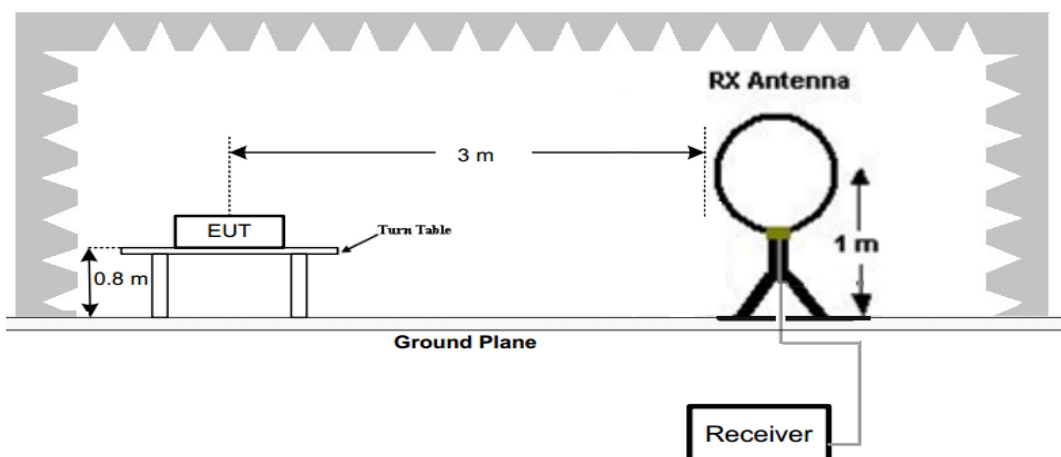

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

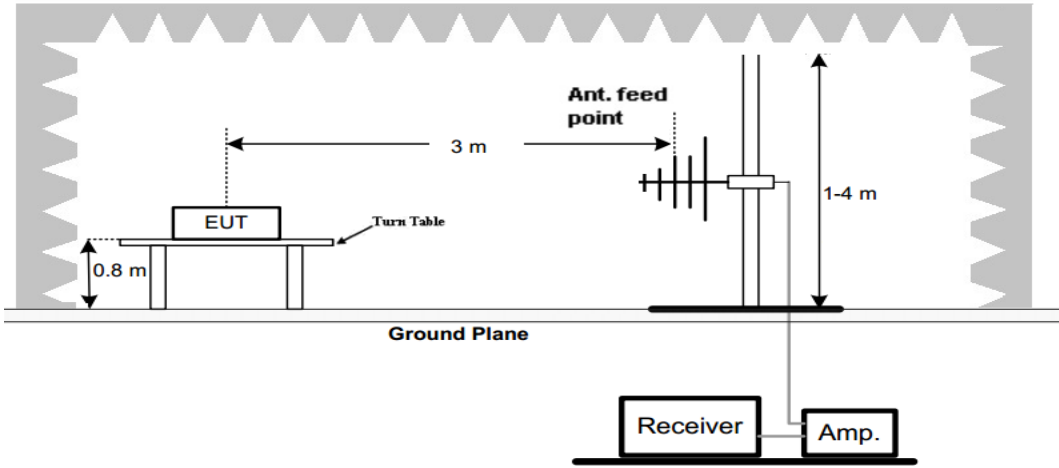

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

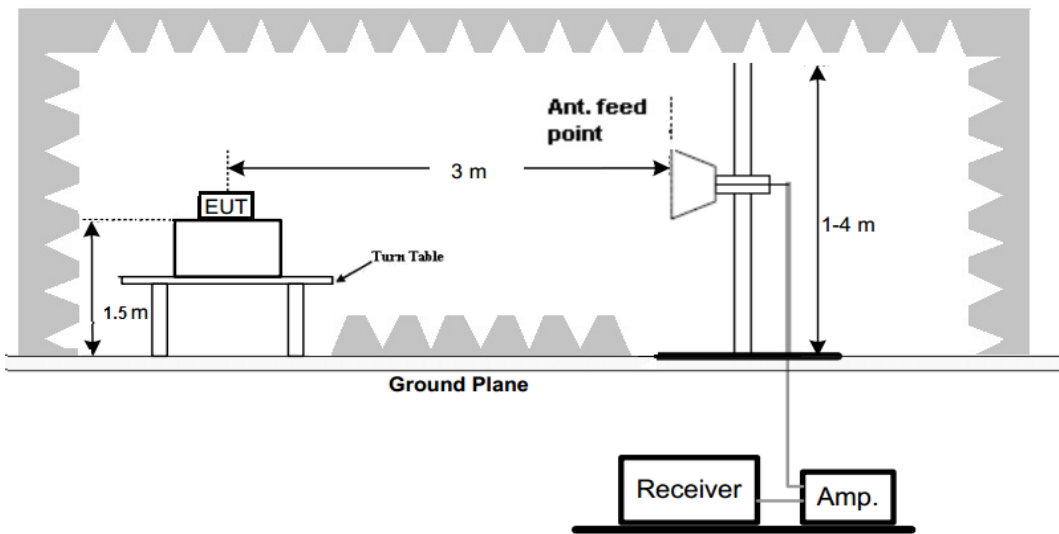

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|---------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Bilog Antenna | 3 |
| 1GHz-18GHz | Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 1 |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|--|----------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz, Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz, Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz, Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Peak |



| | | |
|--|--|--|
| | Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | |
|--|--|--|

TEST RESULTS


The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.

| Emission Styles | Frequency (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Direction (H/V) |
|-----------------|-----------------|------------------|----------------|-------------|----------|-----------------|
| Fundamental | 433.92 | 80.16 | 100.80 | 20.64 | PK | H |
| Spurious | 435.76 | 61.05 | 80.80 | 19.75 | PK | H |
| Harmonics | 867.84 | 61.21 | 80.80 | 19.59 | PK | H |
| Harmonics | 1735.68 | 60.52 | 80.80 | 20.28 | PK | H |
| -- | -- | -- | -- | -- | -- | -- |
| Fundamental | 433.92 | 82.41 | 100.80 | 18.39 | PK | V |
| Spurious | 435.76 | 60.65 | 80.80 | 20.15 | PK | V |
| Harmonics | 867.84 | 61.03 | 80.80 | 19.77 | PK | V |
| Harmonics | 1735.68 | 60.17 | 80.80 | 20.63 | PK | V |
| -- | -- | -- | -- | -- | -- | -- |


| Emission Styles | Frequency (MHz) | PK Level (dBuV/m) | AV Factor (dB/m) | AV Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Direction (H/V) |
|-----------------|-----------------|-------------------|------------------|-------------------|----------------|-------------|-----------------|
| Fundamental | 433.92 | 80.16 | -10.17 | 69.99 | 80.80 | 10.81 | H |
| Spurious | 435.86 | 61.05 | -10.17 | 50.88 | 60.80 | 9.92 | H |
| Harmonics | 867.84 | 61.21 | -10.17 | 51.04 | 60.80 | 9.76 | H |
| Harmonics | 1735.68 | 60.52 | -10.17 | 50.35 | 60.80 | 10.45 | H |
| -- | -- | -- | -- | -- | -- | -- | -- |
| Fundamental | 433.92 | 82.41 | -10.17 | 72.24 | 80.80 | 8.56 | V |
| Spurious | 435.86 | 60.65 | -10.17 | 50.48 | 60.80 | 10.32 | V |
| Harmonics | 867.84 | 61.03 | -10.17 | 50.86 | 60.80 | 9.94 | V |
| Harmonics | 1735.68 | 60.17 | -10.17 | 50.00 | 60.80 | 10.8 | V |
| -- | -- | -- | -- | -- | -- | -- | -- |

Note:


- AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dB)
- In a transmit cycle 34.70ms period found 0.184ms burst 41pcs, the Duty Cycle can calculate as below:
 Duty Cycle= (1.220*7+0.410*18)/51.40=0.310
 AV Factor=20*log(Duty Cycle)=20*log(0.310)=-10.17
 (The plot of Duty Cycle See the follow page)

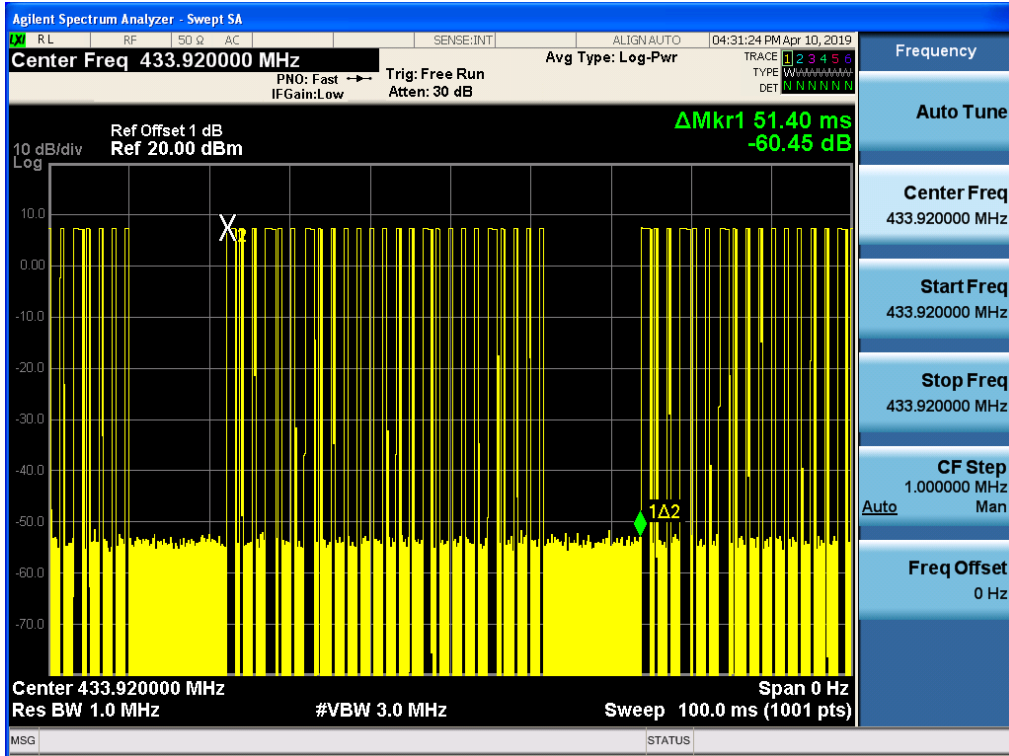


(Transmit cycle 51.40ms)

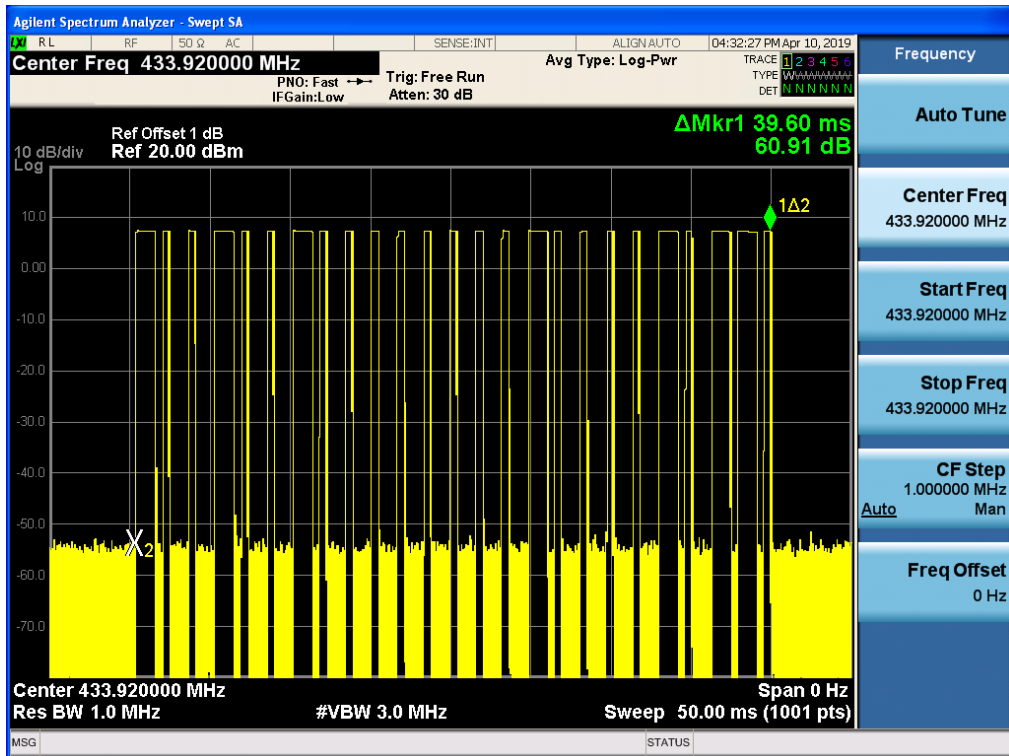

(Total Bursts in a transmit cycle 25pcs)

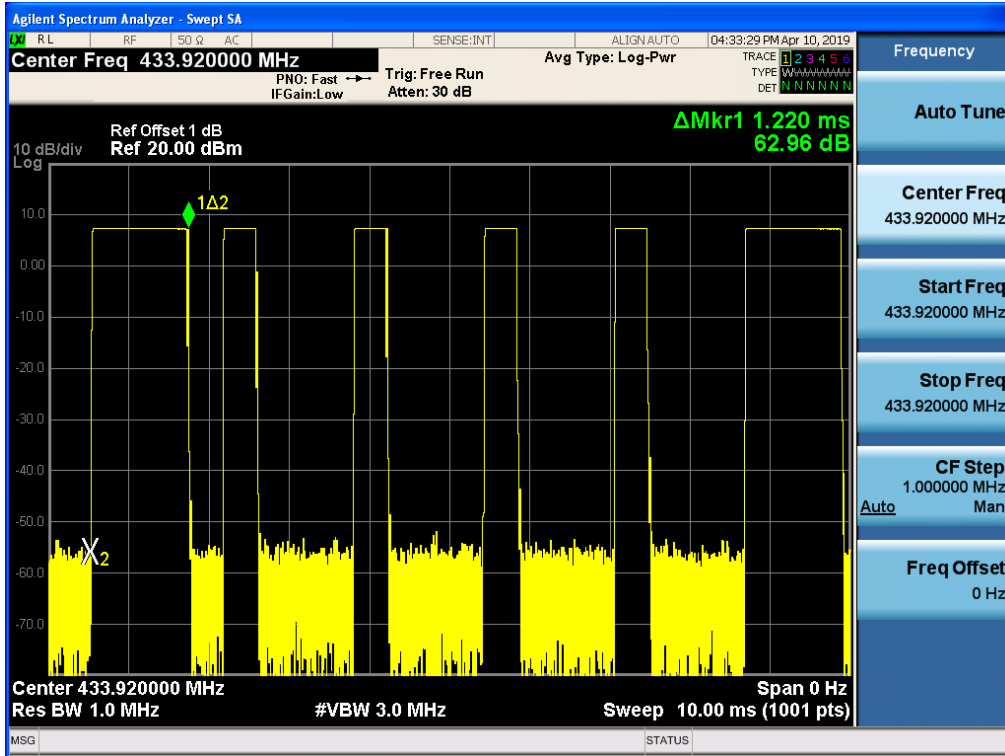

(Time per burst: 1.220msX7pcs)

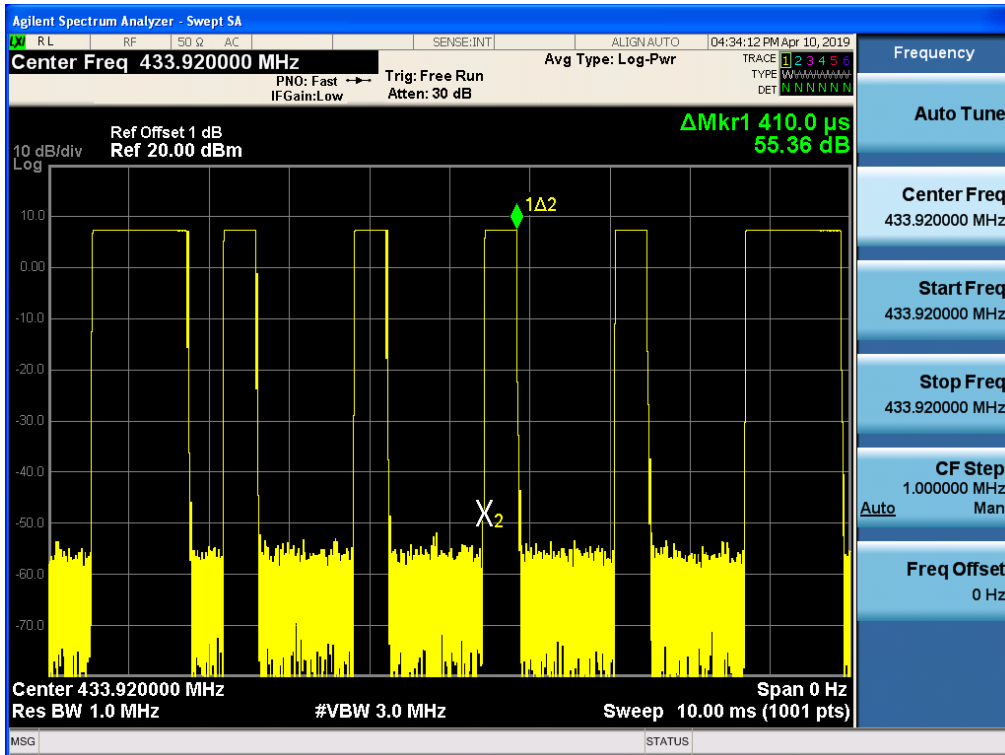

(Time per burst: 0.410msX18pcs)




4.3. 20dB Bandwidth

Limit

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

Test Configuration

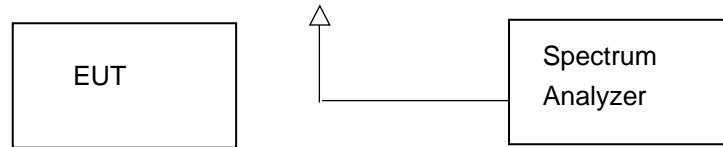

Test Procedure

The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Test Results

| Modulation | Channel Frequency (MHz) | 99% OBW (KHz) | 20dB bandwidth (KHz) | Limit (KHz) | Result |
|------------|-------------------------|---------------|----------------------|----------------------------|--------|
| ASK | 433.92 | 17.177 | 8.029 | $0.25\% * 433.92 = 1084.8$ | Pass |

Test plot as follows:

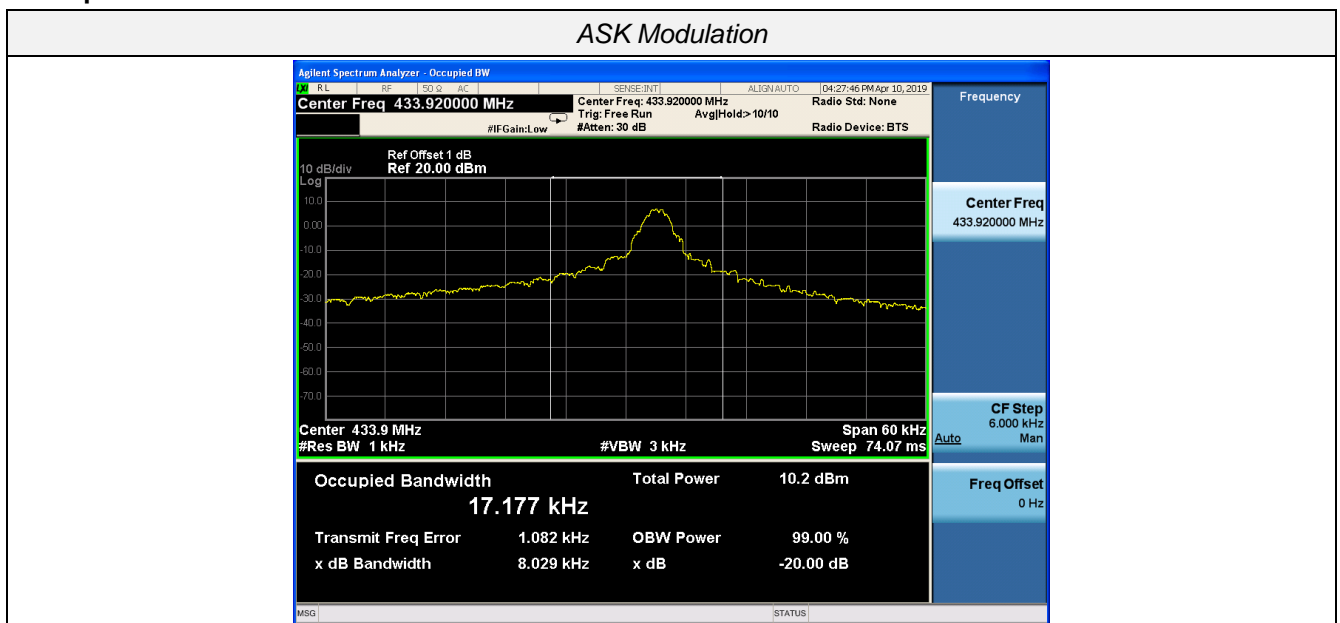




4.4. Transmission Time

Limit

According to FCC §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Test Configuration

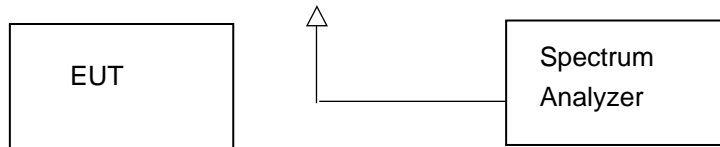


Test Procedure

1. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
2. The spectrum analyzer resolution bandwidth was set to 3 MHz and video bandwidth was set to 3 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

TEST RESULTS

| Frequency (MHz) | Transmission time (S) | Limit (S) | Result |
|-----------------|-----------------------|-----------|--------|
| 433.92 | 0.100 | 5S | Pass |

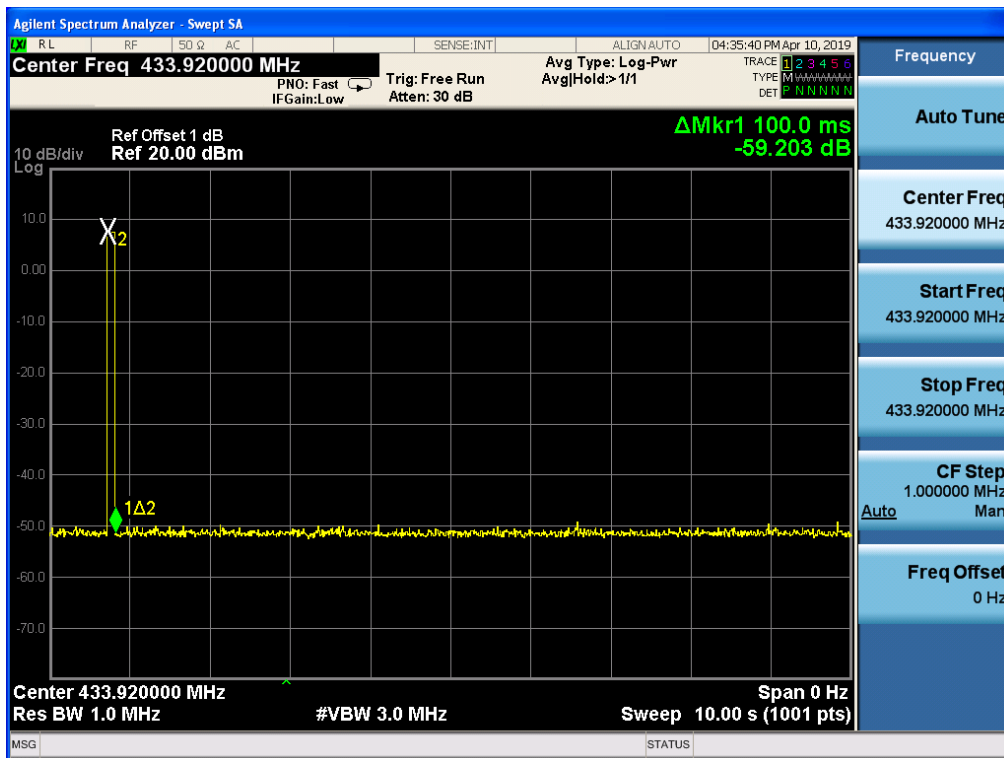



4.5. Antenna Requirement

Standard Applicable

According to FCC Part 15C 15.203

- a) An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b) The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


Antenna Connected Construction



The antenna used in this product is an PCB antenna, The directional gains of antenna used for transmitting is 0 dBi.




5. Test Setup Photos of the EUT



6. External and Internal Photos of the EUT

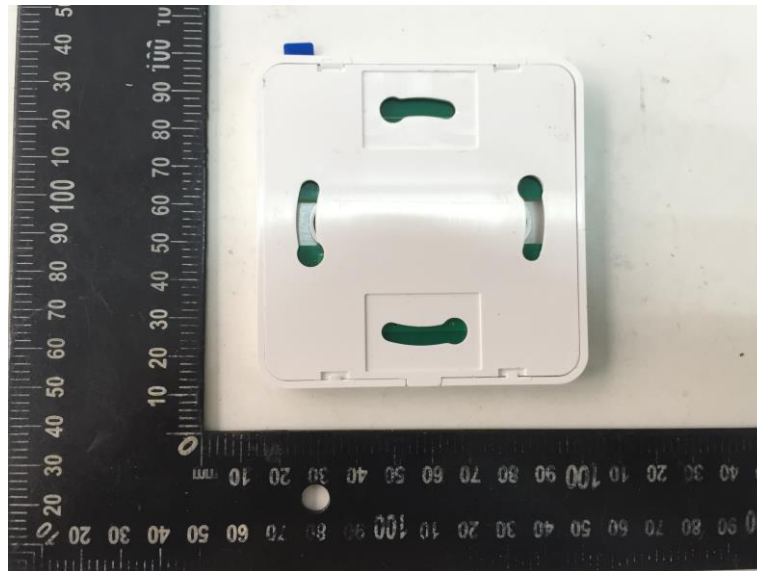

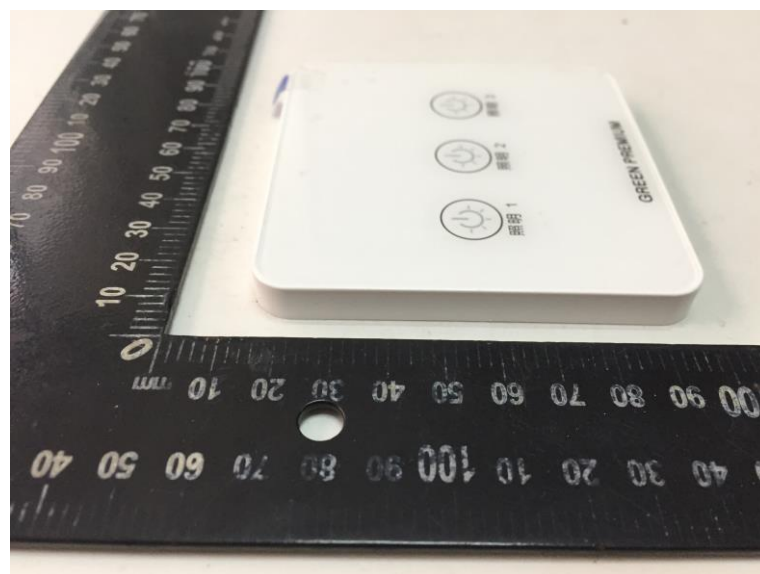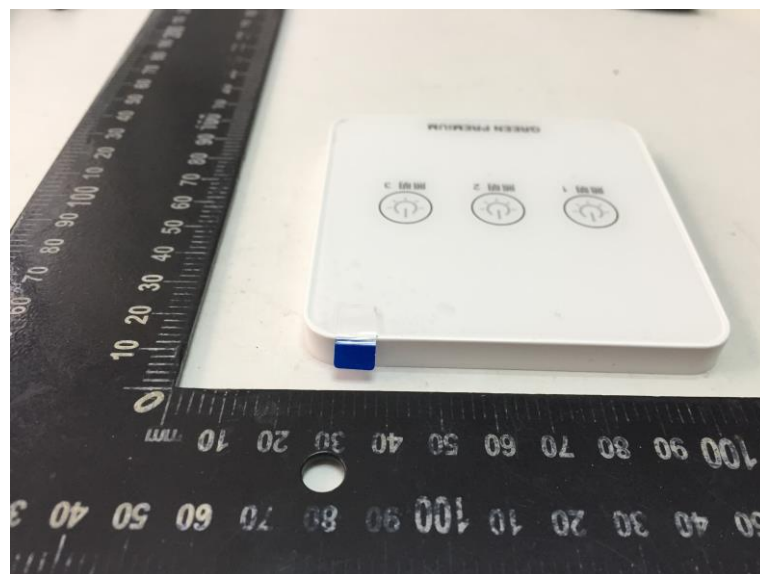

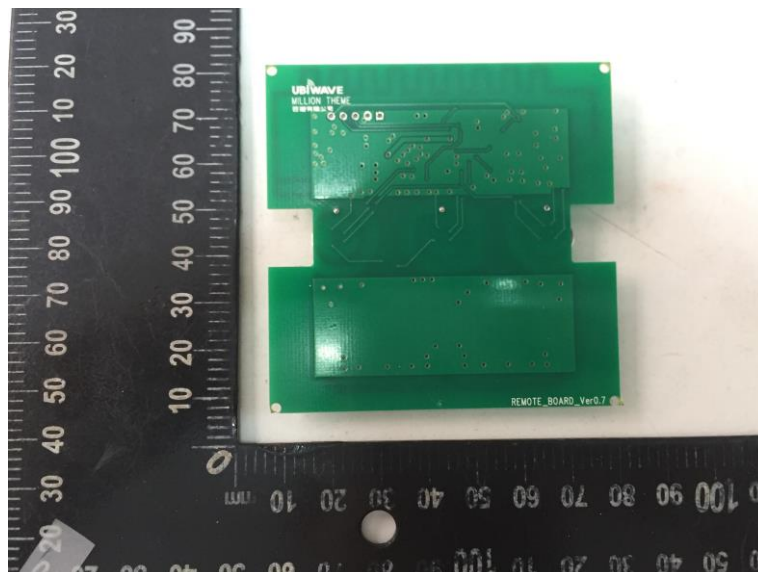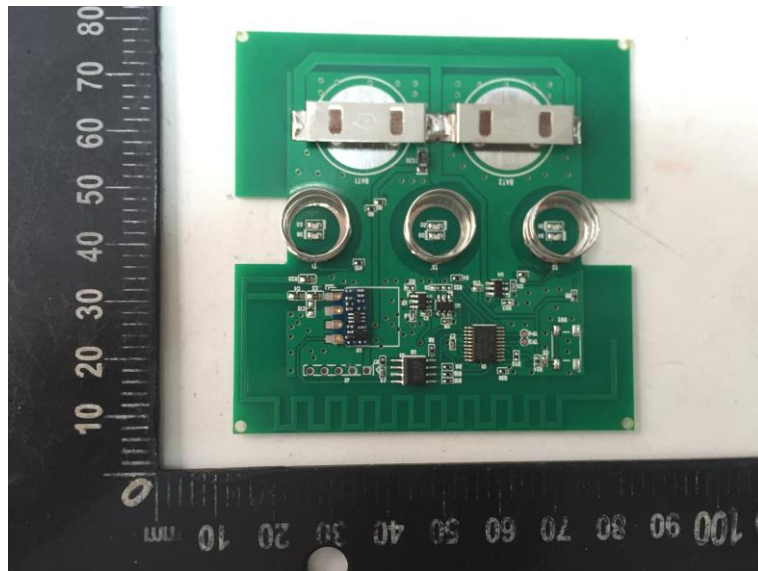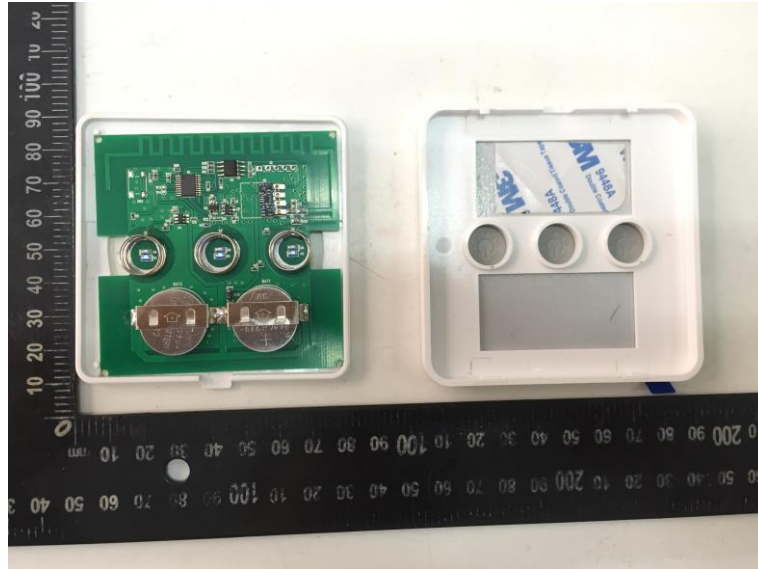

.....End of Report.....