

**DUT: Notebook; Type: P206; Serial: 19060300103**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442$  MHz;  $\sigma = 1.817$  S/m;  $\epsilon_r = 40.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.97, 6.97, 6.97) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Screen Back/WLAN 2.4G 802.11b Mid power level 13/Area Scan (101x101x1):** Interpolated grid:

$dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.795 W/kg

**Body Screen Back/WLAN 2.4G 802.11b Mid power level 13/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.210 V/m; Power Drift = -0.51 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.225 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.725 W/kg

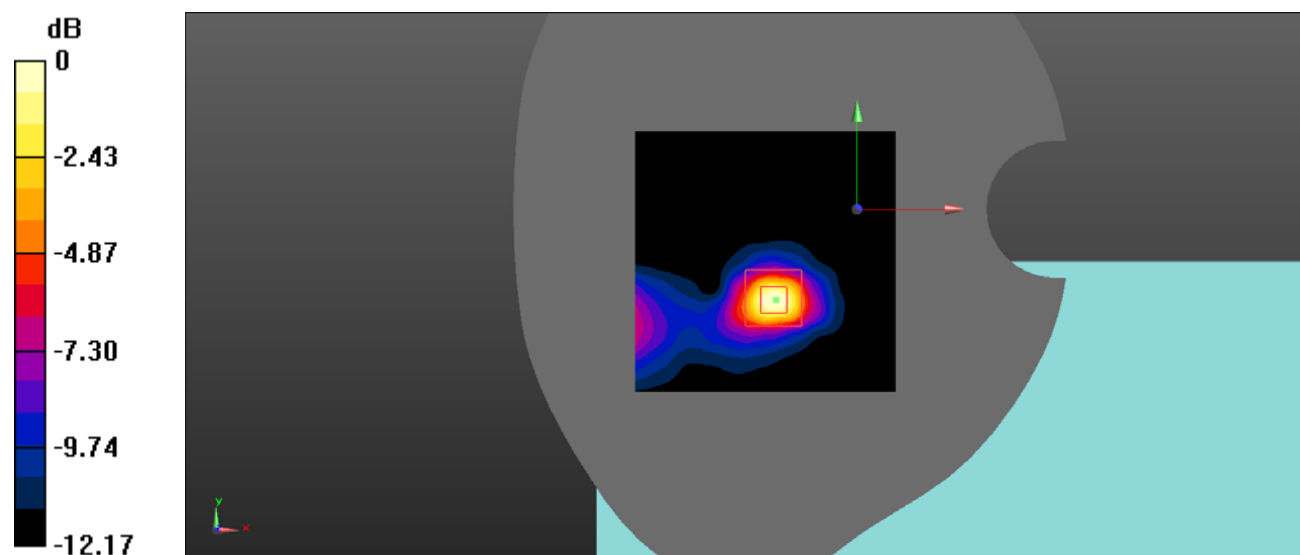

0 dB = 0.725 W/kg = -1.40 dBW/kg

**DUT: Notebook; Type: P206; Serial: 19060300103**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442$  MHz;  $\sigma = 1.817$  S/m;  $\epsilon_r = 40.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(6.97, 6.97, 6.97) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Screen Top/WLAN 2.4G 802.11b Mid power level 13/Area Scan (101x101x1):** Interpolated grid:

$dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.168 W/kg

**Body Screen Top/WLAN 2.4G 802.11b Mid power level 13/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.155 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.362 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.080 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.168 W/kg

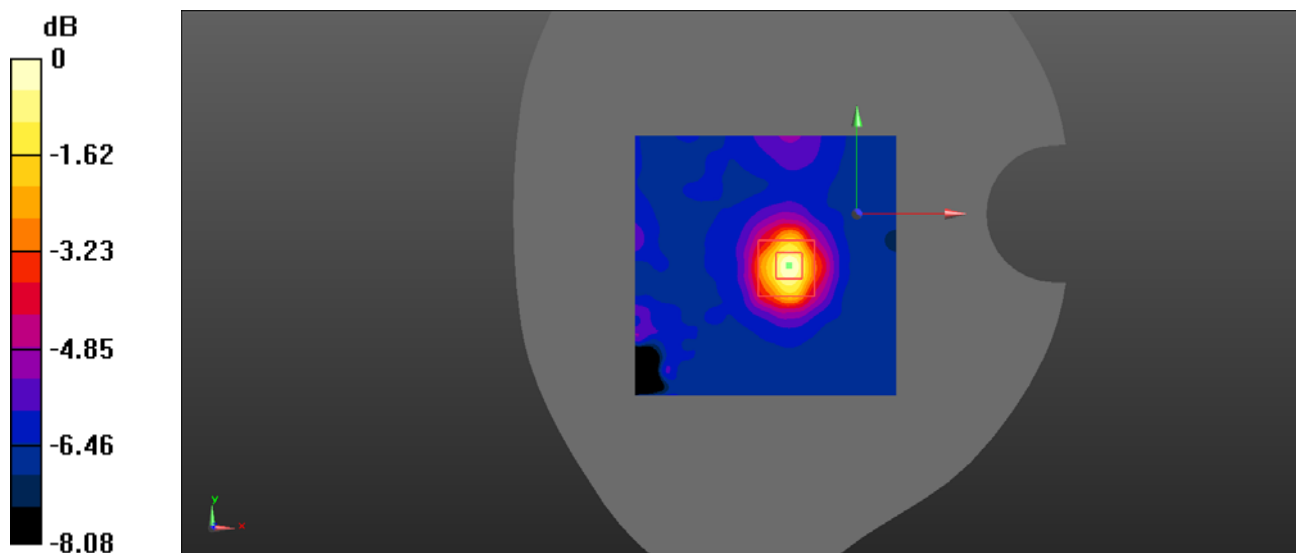

0 dB = 0.168 W/kg = -7.75 dBW/kg

**DUT: Notebook; Type: P206; Serial: 19060300103**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 36.536$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.05, 5.05, 5.05) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Screen Back/WLAN 5.2G 802.11n20 Mid power level 13/Area Scan (101x101x1):** Interpolated grid:  
 $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.944 W/kg

**Body Screen Back/WLAN 5.2G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube**  
**0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.536 V/m; Power Drift = -0.25 dB  
 Peak SAR (extrapolated) = 1.93 W/kg  
**SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.217 W/kg** (SAR corrected for target medium)  
 Maximum value of SAR (measured) = 0.875 W/kg

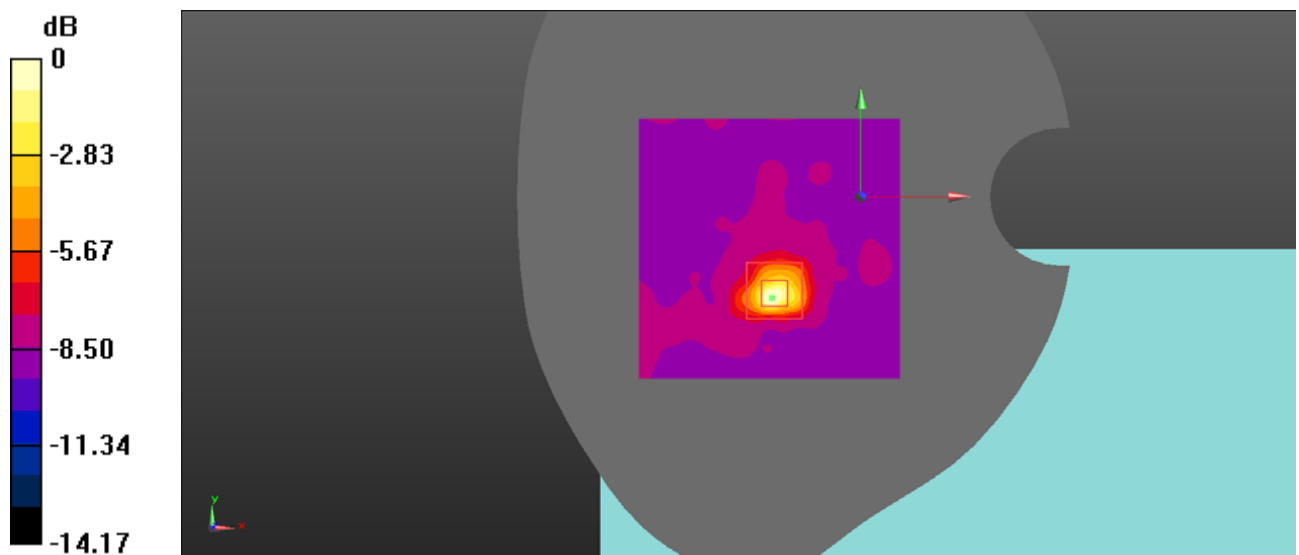

$0 \text{ dB} = 0.875 \text{ W/kg} = -0.58 \text{ dBW/kg}$

**DUT: Notebook; Type: P206; Serial: 19060300103**


Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.675 \text{ S/m}$ ;  $\epsilon_r = 36.536$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.05, 5.05, 5.05) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Screen Top/WLAN 5.2G 802.11n20 Mid power level 13/Area Scan (101x101x1):** Interpolated grid:  
 $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.258 W/kg

**Body Screen Top/WLAN 5.2G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.576 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.610 W/kg  
**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.142 W/kg** (SAR corrected for target medium)  
 Maximum value of SAR (measured) = 0.265 W/kg

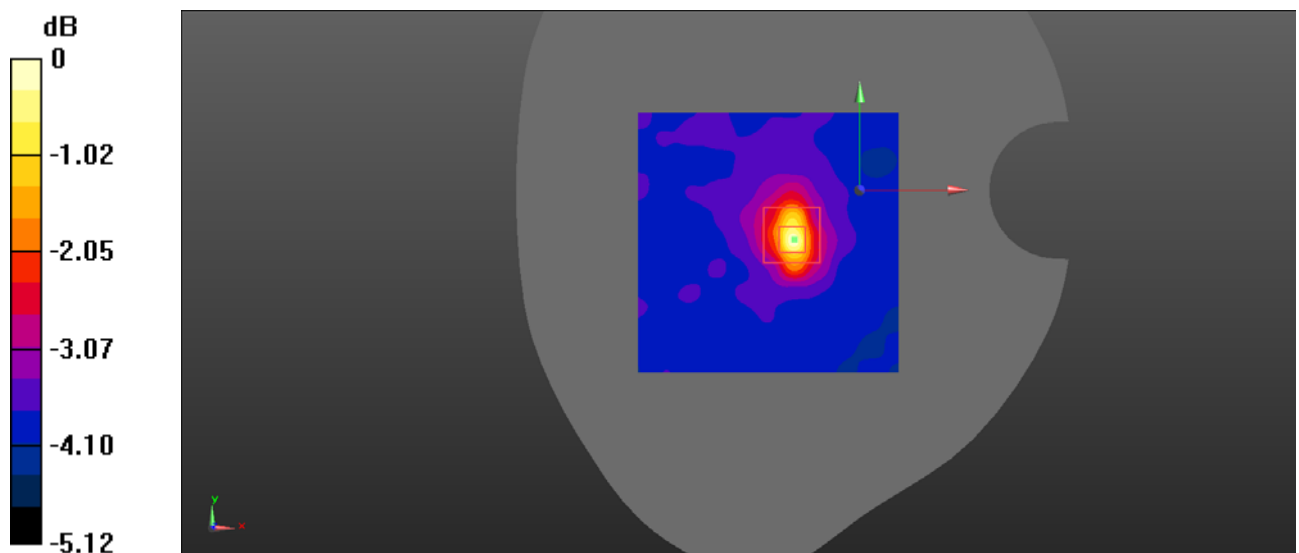

$0 \text{ dB} = 0.265 \text{ W/kg} = -5.77 \text{ dBW/kg}$

**DUT: Notebook; Type: P206; Serial: 19060300103**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.388 \text{ S/m}$ ;  $\epsilon_r = 35.534$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.76, 4.76, 4.76) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Screen Back/WLAN 5.8G 802.11n20 Mid power level 13/Area Scan (101x101x1):** Interpolated grid:  
 $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.739 W/kg

**Body Screen Back/WLAN 5.8G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube**  
**0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.371 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 1.90 W/kg  
**SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.227 W/kg** (SAR corrected for target medium)  
 Maximum value of SAR (measured) = 0.796 W/kg

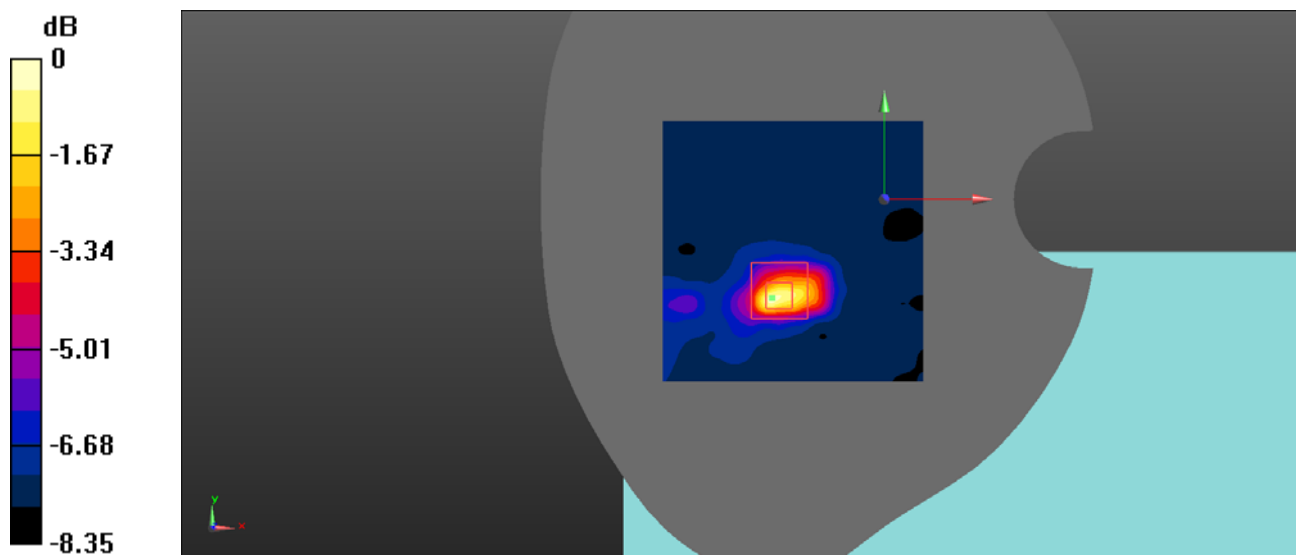

$0 \text{ dB} = 0.796 \text{ W/kg} = -0.99 \text{ dBW/kg}$

**DUT: Notebook; Type: P206; Serial: 19060300103**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.388 \text{ S/m}$ ;  $\epsilon_r = 35.534$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.76, 4.76, 4.76) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Screen Top/WLAN 5.8G 802.11n20 Mid power level 13/Area Scan (101x101x1):** Interpolated grid:

$dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.425 W/kg

**Body Screen Top/WLAN 5.8G 802.11n20 Mid power level 13/Zoom Scan (8x8x12)/Cube**


**0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 7.033 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.187 W/kg** (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.401 W/kg

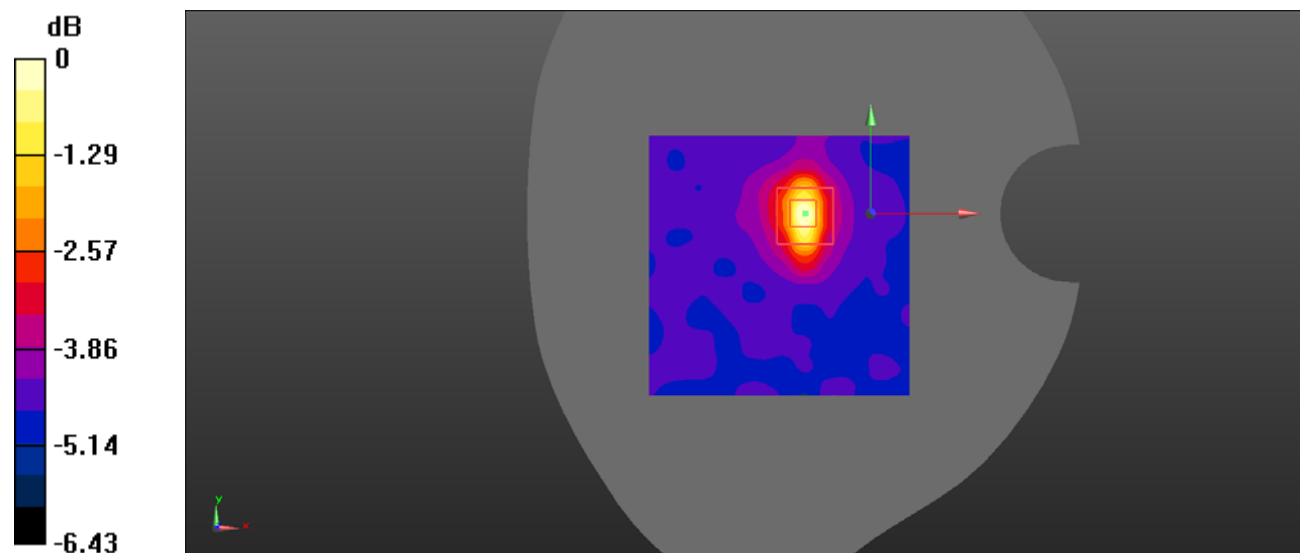

0 dB = 0.401 W/kg = -3.97 dBW/kg