

FCC Measurement/Technical Report on

WLAN transceiver

Porsche Wall Charger Connect

PWCCU192A

FCC ID: 2AT4E-ICCPDG2HIGH
IC: 25258-ICCPDG2HIGH

Test Report Reference: MDE_ESYST_2001_FCC_02

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

| | | |
|-----------|--|-----------|
| 1 | Applied Standards and Test Summary | 3 |
| 1.1 | Applied Standards | 3 |
| 1.2 | FCC-IC Correlation Table | 4 |
| 1.3 | Measurement Summary | 5 |
| 2 | Revision History / Signatures | 6 |
| 3 | Administrative Data | 7 |
| 3.1 | Testing Laboratory | 7 |
| 3.2 | Project Data | 7 |
| 3.3 | Applicant Data | 7 |
| 3.4 | Manufacturer Data | 7 |
| 4 | Test object Data | 8 |
| 4.1 | General EUT Description | 8 |
| 4.2 | EUT Main components | 8 |
| 4.3 | Ancillary Equipment | 9 |
| 4.4 | Auxiliary Equipment | 9 |
| 4.5 | EUT Setups | 9 |
| 4.6 | Test Channels | 9 |
| 4.7 | Product labelling | 9 |
| 5 | Test Results | 10 |
| 5.1 | AC Conducted Emissions | 10 |
| 5.2 | Undesirable Emissions; General Field Strength Limits | 14 |
| 5.3 | Band Edge | 28 |
| 6 | Test Equipment | 37 |
| 7 | Antenna Factors, Cable Loss and Sample Calculations | 40 |
| 7.1 | LISN R&S ESH3-Z5 (150 kHz – 30 MHz) | 40 |
| 7.2 | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz) | 41 |
| 7.3 | Antenna R&S HL562 (30 MHz – 1 GHz) | 42 |
| 7.4 | Antenna R&S HF907 (1 GHz – 18 GHz) | 43 |
| 7.5 | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz) | 44 |
| 7.6 | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz) | 45 |
| 8 | Photo Report | 45 |
| 9 | Measurement Uncertainties | 46 |
| 10 | Annex: Duty Cycle Plots | 47 |

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

Note:

The tests were selected and performed with reference to the FCC Public Notice “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures New Rules v02r01, 2017-12-14”.

ANSI C63.10-2013 is applied.

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment from FCC and IC

UNII equipment

| Measurement | FCC reference | IC reference |
|--|---|---|
| Conducted emissions on AC Mains | § 15.207 | RSS-Gen Issue 5: 8.8 |
| Occupied bandwidth | § 15.403 (i) (26 dB) / § 15.407 (e) (6 dB) | RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1 (99%) RSS-247 Issue 2: 6.2.4.1 (6 dB) |
| Maximum conducted output power | § 15.407 (a) (1),(2),(3),(4) | RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1 |
| Maximum power spectral density | § 15.407 (a) (1),(2),(3),(5) | RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1 |
| Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands | § 15.407 (b) § 15.209 (a) | RSS-Gen Issue 5: 6.13/8.9/8.10; RSS-247 Issue 2: 3.3/6.2 6.2.1.2, 6.2.2.2, 6.2.3.2, 6.2.4.2 |
| Frequency stability | § 15.407 (g) | RSS-Gen Issue 5: 6.11/8.11 |
| Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS) | § 15.407 (h) | RSS-247 Issue 2: 6.2.2.1, 6.2.3.1, 6.3 |
| Antenna requirement | § 15.203 / 15.204 | RSS-Gen Issue 5: 8.3 |
| Receiver spurious emissions | – | - |

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.207

AC Conducted Emissions

The measurement was performed according to ANSI C63.10

OP-Mode

Operating mode

worst case

Setup

S01_AA01

Date

2020-12-09

Final Result

FCC

Passed

IC

Passed

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.407 (b), (1),(2),(3),(4); FCC §15.205, §15.209, §15.407 (b) (5),(6)

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

OP-Mode

Radio Technology, Operating Frequency, Measurement range, Subband

WLAN a, high, 1GHz - 26GHz, U-NII-1

Remark: measurement range: 1-26 GHz

WLAN a, low, 1GHz - 26GHz, U-NII-1

Remark: measurement range: 1-26 GHz

WLAN a, mid, 1GHz - 26GHz, U-NII-1

WLAN a, mid, 26GHz - 40GHz, U-NII-1

WLAN a, mid, 30MHz - 1GHz, U-NII-1

WLAN a, mid, 9kHz - 30MHz, U-NII-1

WLAN ac 40 MHz, high, 1GHz - 26GHz, U-NII-1

WLAN ac 40 MHz, low, 1GHz - 26GHz, U-NII-1

WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-1

WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-1

WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-1

WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-1

WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-1

Setup

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

Date

2020-12-10

2020-12-10

2020-12-10

2020-12-18

2020-12-09

2020-12-09

2020-12-15

2020-12-15

2020-12-14

2020-12-14

2020-12-14

2020-12-14

2020-12-14

Final Result

FCC

Passed ¹⁾

Passed ¹⁾

Passed

Passed

Passed

Passed

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

IC

Passed ¹⁾

Passed ¹⁾

Passed

Passed

Passed

Passed

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

Passed ¹⁾

47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.407 (b), (1),(2),(3),(4)

Band Edge

The measurement was performed according to ANSI C63.10

OP-Mode

Radio Technology, Operating Frequency, Subband

WLAN a, low, U-NII-1 and 2a

WLAN ac 20 MHz, low, U-NII-1 and 2a

WLAN ac 40 MHz, low, U-NII-1 and 2a

WLAN n 20 MHz, low, U-NII-1 and 2a

WLAN n 40 MHz, low, U-NII-1 and 2a

WLAN ac 80 MHz, low, U-NII-1 and 2a

Setup

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

S01_AB01

Date

2020-12-15

2020-12-15

2020-12-15

2020-12-15

2020-12-15

2020-12-15

Final Result

FCC

Passed

Passed

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

Passed

Passed

Remarks:

1) For the radio technology of this test only a limited frequency range is performed.

According to the applicant, the EUT does support U-NII band 1 only.

2 REVISION HISTORY / SIGNATURES

| Report version control | | | |
|------------------------|--------------|--------------------|------------------|
| Version | Release date | Change Description | Version validity |
| initial | 2021-02-05 | -- | valid |
| -- | -- | -- | -- |

COMMENTS:

The EUT is a variant of the previously tested device. According to the information provided by the applicant, the housing is changed and electrical parts not belonging to the radio PCB are changed. The PCB of the WLAN radio is identical, the previous listings at FCC / ISED can and shall be carried forward in same IDs.

Therefore, radiated spurious emissions have been tested for the combinations and measurement ranges listed in sub-clause 1.3.

The nominal RF power is reduced compared to the initial tests, for details please refer to sub-clause 4.1.


Reference to the test report of the previously tested device:

MDE_BEBRO_1501_FCCc_rev01

The device can be connected to 1- or 2-phases AC Mains (120 V~ to ground), providing 40 or 80 A accordingly. For the tests, the radio is operated from 120 V 1-phase AC Mains. Circuits related to the charging function are inactive.



(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall



(responsible for testing and report)
Dipl.-Ing. Andreas Petz



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH

Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01 | -02 | -03

FCC Designation Number: DE0015

FCC Test Firm Registration: 929146

ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall

Report Template Version: 2021-01-13

3.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Andreas Petz

Employees who performed the tests: documented internally at 7Layers

Date of Report: 2021-02-05

Testing Period: 2020-12-09 to 2020-12-18

3.3 APPLICANT DATA

Company Name: eSystems MTG GmbH

Address: Bahnhofstraße 100
73240 Wendlingen
Germany

Contact Person: Mr. Bernd Thalheimer

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

| | |
|---|--|
| Kind of Device product description | WLAN transceiver: AC/DC conversion for charging EVs (electrical vehicles) |
| Product name | Porsche Wall Charger Connect |
| Type | PWCCU192A |
| Declared EUT data by the supplier | |
| Voltage Type | AC |
| Voltage Level | 120/208-240 V / 50 or 60 Hz, tested at 120 V / 60 Hz |
| Tested Modulation Type | DBPSK, OFDM: BPSK |
| General product description | Wall Charger |
| Specific product description | The EUT is a box intended to be wall-mounted that includes an AC/DC power converter which is intended to charge batteries of electrical vehicles. The EUT contains a WLAN transceiver. |
| Ports of the device | Enclosure, AC Mains, DC outlet (to charge vehicles) |
| Antenna / Gain | 5.1 dBi |
| Tested data rates / set nominal RF power | a-mode: 6 Mbps, BPSK / 12 dBm n-mode: MCS0 (20 MHz, 40 MHz) / 12 dBm ac-mode: MCS0 (20 MHz, 40 MHz, 80 MHz) / 12 dBm |
| Special software used for testing | no (the software provided for testing only grants additionally access into development menus but will not be accessible to the end user) |

4.2 EUT MAIN COMPONENTS

| Sample Name | Sample Code | Description |
|-------------------------|------------------------|-----------------|
| Sample#1 | DE1323001aa01 | Standard sample |
| Sample Parameter | Value | |
| Serial No. | 0000013 | |
| HW Version | 003 | |
| SW Version | SW_C: 6010, SW_P: 5110 | |
| Comment | - | |

| Sample Name | Sample Code | Description |
|-------------------------|------------------------|-----------------|
| Sample#2 | DE1323001ab01 | Standard sample |
| Sample Parameter | Value | |
| Serial No. | 0000027 | |
| HW Version | 003 | |
| SW Version | SW_C: 6010, SW_P: 5110 | |
| Comment | - | |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, OUT Code) | Description |
|--------|---|-------------|
| - | - | - |

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, HW, SW, S/N) | Description |
|--------|--|-------------|
| - | - | - |

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup | Combination of EUTs | Description and Rationale |
|----------|----------------------|---------------------------|
| S01_AA01 | Sample DE1323001aa01 | (stand-alone testing) |
| S01_AB01 | Sample DE1323001ab01 | (stand-alone testing) |

4.6 TEST CHANNELS

| U-NII-Subband 1 5150 - 5250 MHz | | | U-NII-Subband 2A 5250 - 5350 MHz | | | U-NII-Subband 2C 5470 - 5725 MHz | | | U-NII-Subband 3 5725 - 5850 MHz | | | Nom. BW |
|------------------------------------|------|------|-------------------------------------|-----|------|-------------------------------------|-----|------|------------------------------------|-----|------|----------------|
| low | mid | high | low | mid | high | low | mid | high | low | mid | high | |
| 36 | 44 | 48 | - | - | - | - | - | - | - | - | - | 20 MHz |
| 5180 | 5220 | 5240 | - | - | - | - | - | - | - | - | - | Ch.-No. MHz |
| low | mid | high | - | - | - | - | - | - | - | - | - | 40 MHz |
| 38 | - | 46 | - | - | - | - | - | - | - | - | - | Ch.-No. |
| low | mid | high | - | - | - | - | - | - | - | - | - | 80 MHz |
| 42 | - | - | - | - | - | - | - | - | - | - | - | Ch.-No. |
| 5210 | - | - | - | - | - | - | - | - | - | - | - | MHz |

4.7 PRODUCT LABELLING

Please refer to the documentation of the applicant.

5 TEST RESULTS


5.1 AC CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

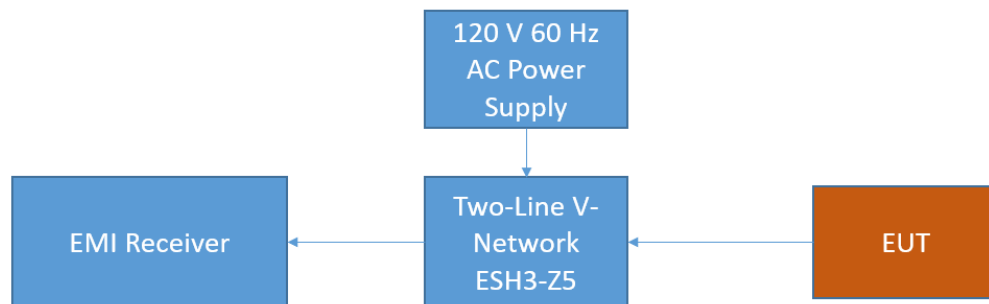

FCC Conducted Emissions on AC

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak & (CISPR) Average
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

| Frequency (MHz) | QP Limits (dB μ V) | AV Limits (dB μ V) |
|-----------------|------------------------|------------------------|
| 0.15 – 0.5 | 66 - 56 | 56 - 46 |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

5.1.3 TEST PROTOCOL

Temperature: 21 °C
 Air Pressure: 1002 hPa
 Humidity: 36 %

| Power line | PE | Frequency [MHz] | Measured value QP [dB μ V] | Measured value AV [dB μ V] | Limit [dB μ V] | Margin [dB] |
|------------|-----|-----------------|--------------------------------|--------------------------------|--------------------|-------------|
| L1 | FLO | 0.27 | --- | 32.4 | 51.1 | 18.8 |
| N | GND | 2.05 | --- | 33.0 | 46.0 | 13.0 |
| N | GND | 2.09 | --- | 29.0 | 46.0 | 17.0 |
| N | GND | 2.13 | --- | 27.6 | 46.0 | 18.4 |
| N | GND | 2.15 | --- | 26.7 | 46.0 | 19.3 |
| L1 | GND | 2.27 | 47.5 | --- | 56.0 | 8.6 |
| L1 | GND | 2.39 | 45.2 | --- | 56.0 | 10.8 |
| L1 | GND | 3.18 | 46.1 | --- | 56.0 | 9.9 |
| L1 | GND | 4.29 | 48.0 | --- | 56.0 | 8.0 |
| N | FLO | 4.93 | 50.3 | --- | 56.0 | 5.7 |
| L1 | GND | 5.88 | 49.8 | --- | 60.0 | 10.2 |
| L1 | GND | 6.30 | 47.7 | --- | 60.0 | 12.3 |
| L1 | GND | 8.40 | 49.2 | --- | 60.0 | 10.8 |
| L1 | GND | 13.67 | 45.6 | --- | 60.0 | 14.4 |
| N | GND | 20.94 | --- | 35.6 | 50.0 | 14.4 |


Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Operating mode = worst case (S01_AA01)

Common Information

| | |
|-----------------------------|--|
| Test Description: | Conducted Emissions |
| Test Standard: | FCC §15.207, ANSI C63.10 |
| EUT / Setup Code: | DE1323001aa01 |
| Operating Conditions: | 120 V 60 Hz, WLAN 5 GHz band, TX CH44 (5220 MHz) |
| Comment: | nominal WLAN power set to 12 dBm, mode a, 6 Mbps |
| Legend: | Trace: blue = QP, green = CISPR AV; Star: red or blue = critical frequency; Rhombus: blue = final QP, green = final CISPR AV |
| Tested Port / used LISN: | AC mains => 1st LISN ESH3-Z5 |
| Termination of other ports: | - |

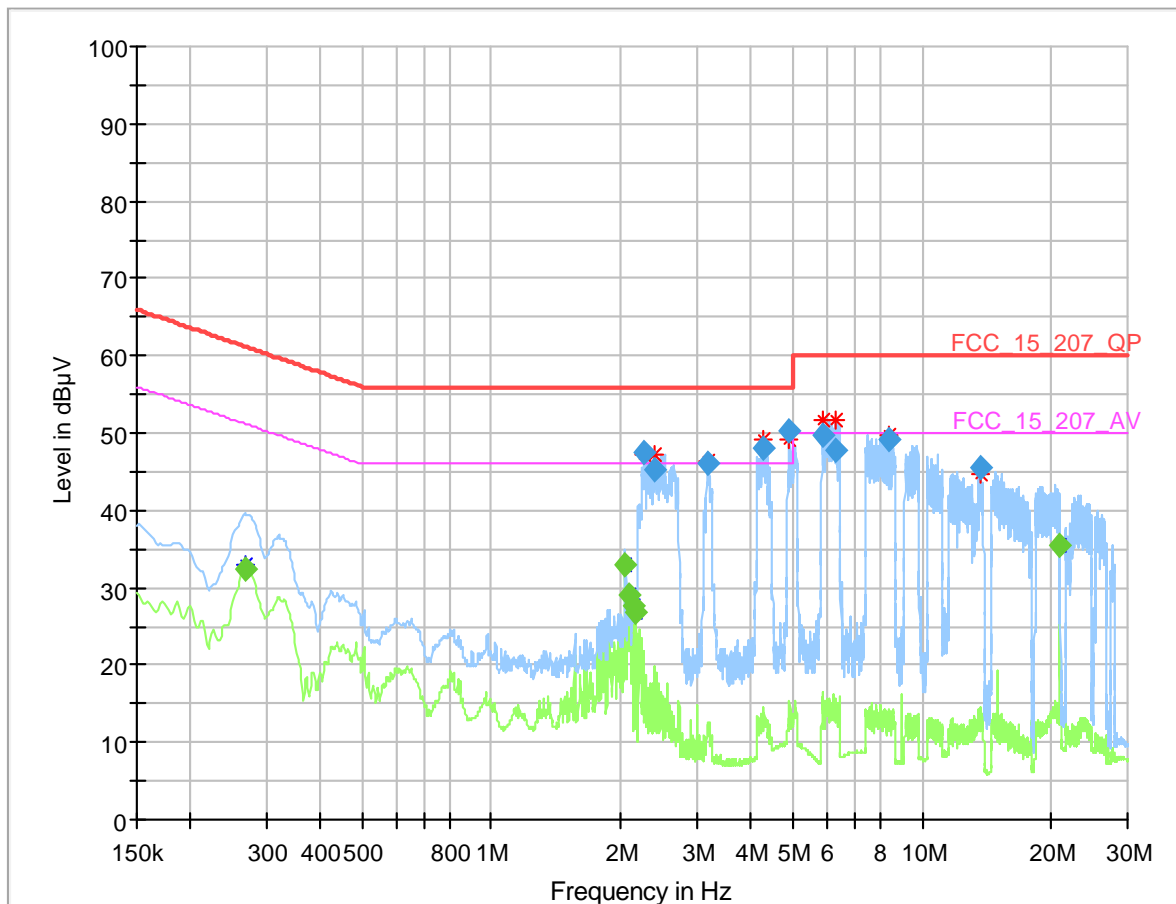

Final_Result

| Frequency (MHz) | QuasiPeak (dB μ V) | CAverage (dB μ V) | Limit (dB μ V) | Margin (dB) | Meas. Time | Bandwidth (kHz) | Line | PE | Corr. (dB) |
|-----------------|------------------------|-----------------------|--------------------|-------------|------------|-----------------|------|-----|------------|
| 0.269250 | --- | 32.37 | 51.14 | 18.77 | 1000.0 | 9.000 | L1 | FLO | 10.1 |
| 2.046750 | --- | 32.99 | 46.00 | 13.01 | 1000.0 | 9.000 | N | GND | 10.2 |
| 2.085000 | --- | 29.04 | 46.00 | 16.96 | 1000.0 | 9.000 | N | GND | 10.2 |
| 2.125500 | --- | 27.64 | 46.00 | 18.36 | 1000.0 | 9.000 | N | GND | 10.2 |
| 2.145750 | --- | 26.72 | 46.00 | 19.28 | 1000.0 | 9.000 | N | GND | 10.2 |
| 2.267250 | 47.45 | --- | 56.00 | 8.55 | 1000.0 | 9.000 | L1 | GND | 10.2 |
| 2.391000 | 45.22 | --- | 56.00 | 10.78 | 1000.0 | 9.000 | L1 | GND | 10.2 |
| 3.176250 | 46.08 | --- | 56.00 | 9.92 | 1000.0 | 9.000 | L1 | GND | 10.3 |
| 4.294500 | 48.03 | --- | 56.00 | 7.97 | 1000.0 | 9.000 | L1 | GND | 10.3 |
| 4.929000 | 50.34 | --- | 56.00 | 5.66 | 1000.0 | 9.000 | N | FLO | 10.4 |
| 5.883000 | 49.80 | --- | 60.00 | 10.20 | 1000.0 | 9.000 | L1 | GND | 10.5 |
| 6.299250 | 47.72 | --- | 60.00 | 12.28 | 1000.0 | 9.000 | L1 | GND | 10.5 |
| 8.398500 | 49.20 | --- | 60.00 | 10.80 | 1000.0 | 9.000 | L1 | GND | 10.6 |
| 13.672500 | 45.56 | --- | 60.00 | 14.44 | 1000.0 | 9.000 | L1 | GND | 10.8 |
| 20.942250 | --- | 35.60 | 50.00 | 14.40 | 1000.0 | 9.000 | N | GND | 11.1 |

5.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

5.2 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.2.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

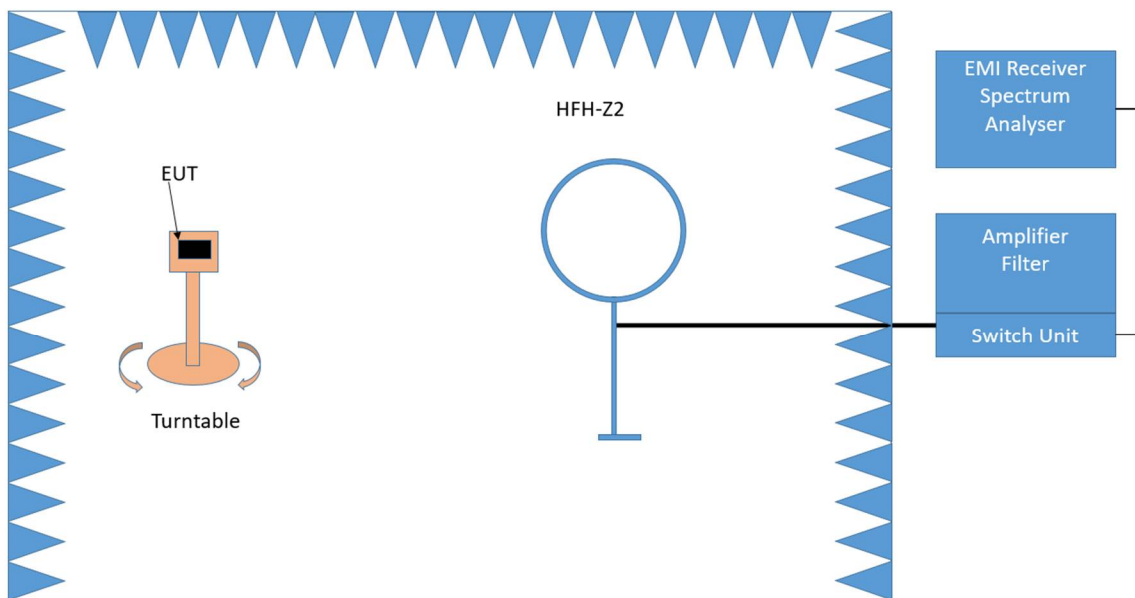

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

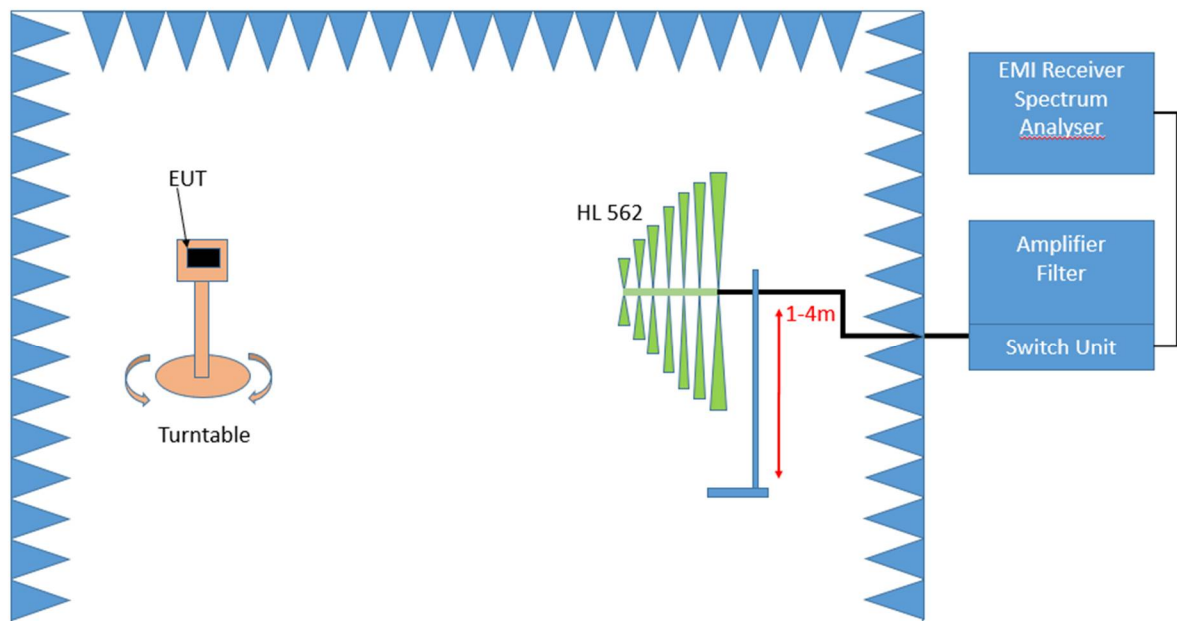

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: –180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 4 m

- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by 360° around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by 1-4 m around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: 360°
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s


After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement 1 GHz up to 26.5 GHz

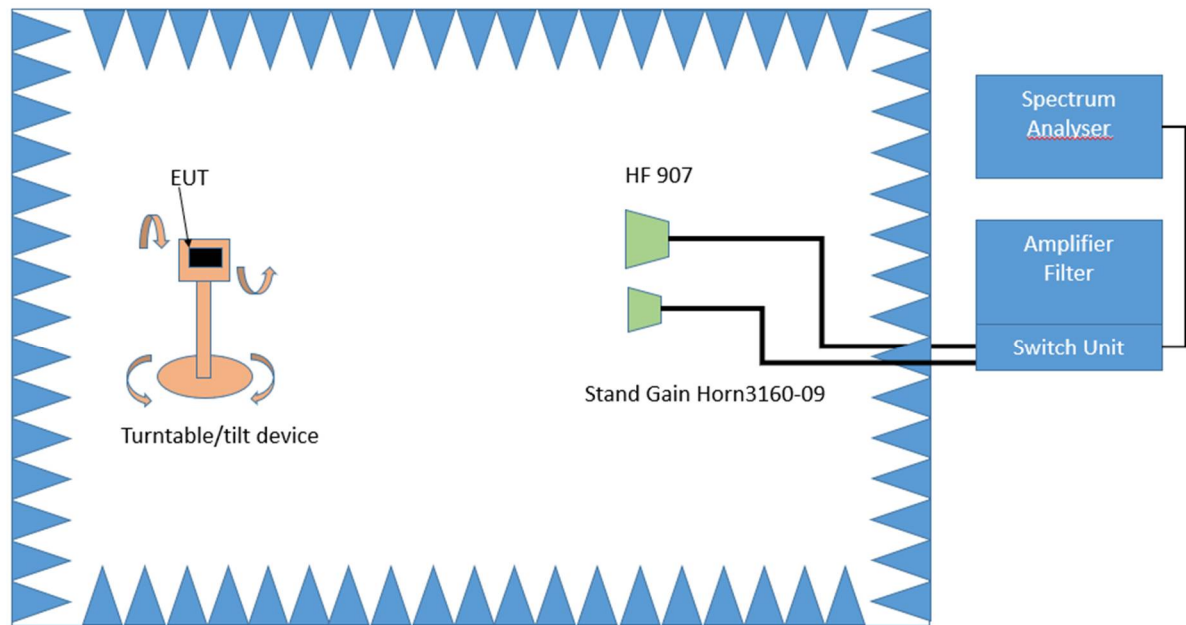

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90° .

The turn table step size (azimuth angle) for the preliminary measurement is 45° .

Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size $\pm 45^\circ$ for the elevation axis is performed.

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 3:


Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

4. Measurement above 26.5 GHz up to 40 GHz

The following modifications, compared to the frequency range 1 GHz – 26.5 GHz, apply to the measurement procedure for the frequency range above 26.5 GHz:

- Measurement distance: 1m

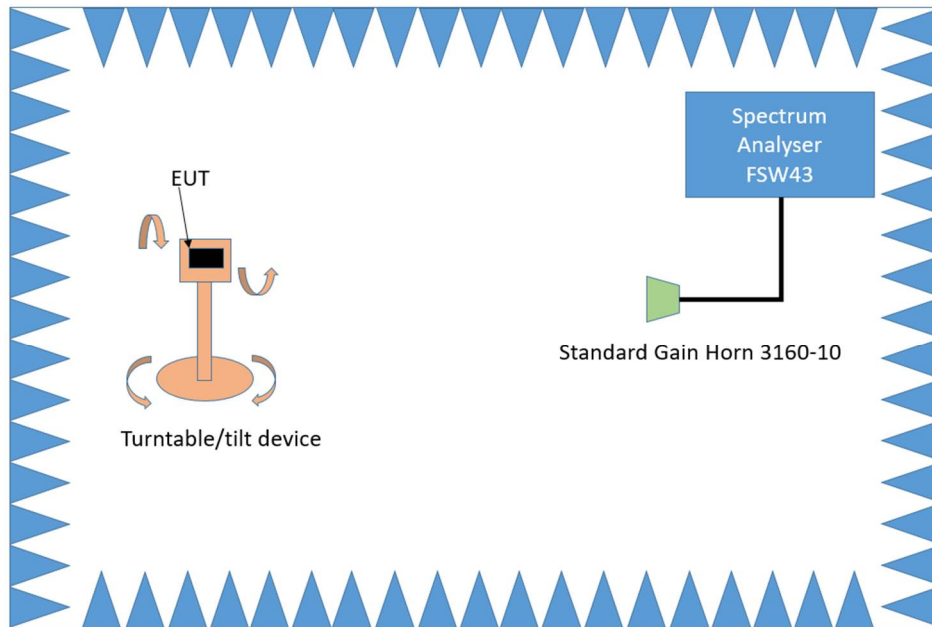

Test Setup; Spurious Emission Radiated (FAC), 26.5 – 40 GHz

5.2.2 TEST REQUIREMENTS / LIMITS

A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz at 75 MHz or more above or below the band edge
 increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge
 increasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edge
 increasing linearly to 27 dBm/MHz at the band edge.

B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1.2, Emissions outside the band 5150-5250 MHz, indoor operation only:
Limit: -27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2.2, Emissions outside the band 5250-5350 MHz:
Limit: -27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3.2, Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:
Limit: -27 dBm/MHz EIRP outside of the band 5470–5725 MHz.
However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p.at 5850 MHz instead of 5725 MHz.
Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4.2, Emissions outside the band 5725-5850 MHz:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|------------------|------------------|--------------------------|--------------------|
| 0.009 – 0.49 | 2400/F(kHz)@300m | 3 | (48.5 – 13.8)@300m |
| 0.49 – 1.705 | 24000/F(kHz)@30m | 3 | (33.8 – 23.0)@30m |
| 1.705 – 30 | 30@30m | 3 | 29.5@30m |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|------------------|--------------|--------------------------|-----------------|
| 30 – 88 | 100@3m | 3 | 40.0@3m |
| 88 – 216 | 150@3m | 3 | 43.5@3m |
| 216 – 960 | 200@3m | 3 | 46.0@3m |
| 960 - 26000 | 500@3m | 3 | 54.0@3m |
| 26000 - 40000 | 500@3m | 1 | 54.0@3m |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a “Restricted Band” according FCC §§15.205 and 15.209 *)

UE – “Undesirable Emission Limit” according FCC §15.407

BE-RB – Band Edge Limit basing on “Restricted Band Limits”

BE-UE – Band Edge Limit basing on “Undesirable Emission Limit”

*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

5.2.3 TEST PROTOCOL

Ambient temperature: 22–24 °C
 Air Pressure: 1000–1015 hPa
 Humidity: 32–37 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 44 | 5220 | - | - | - | - | - | - | - |
| 44 | 5220 | 38.9 | 16.9 | QP | 120 | 68.2 | 51.3 | UE |
| 44 | 5220 | 44.9 | 19.6 | QP | 120 | 68.2 | 48.6 | UE |
| 44 | 5220 | 50.9 | 7.2 | QP | 120 | 68.2 | 61.0 | UE |
| 44 | 5220 | 80.8 | 8.1 | QP | 120 | 68.2 | 60.2 | UE |
| 44 | 5220 | 110.3 | 9.0 | QP | 120 | 43.5 | 34.5 | RB |
| 44 | 5220 | 183.9 | 16.3 | QP | 120 | 68.2 | 51.9 | UE |
| 36 | 5180 | - | - | - | - | - | - | - |
| 48 | 5240 | - | - | - | - | - | - | - |

WLAN n-Mode; 20 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 36 | 5180 | - | - | - | - | - | - | - |
| 44 | 5220 | - | - | - | - | - | - | - |
| 48 | 5240 | - | - | - | - | - | - | - |

WLAN n-Mode; 40 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 38 | 5190 | - | - | - | - | - | - | - |
| 46 | 5230 | - | - | - | - | - | - | - |


WLAN ac-Mode; 40 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 38 | 5190 | - | - | - | - | - | - | - |
| 46 | 5230 | - | - | - | - | - | - | - |

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 9kHz - 30MHz, Subband = U-NII-1 (S01_AB01)

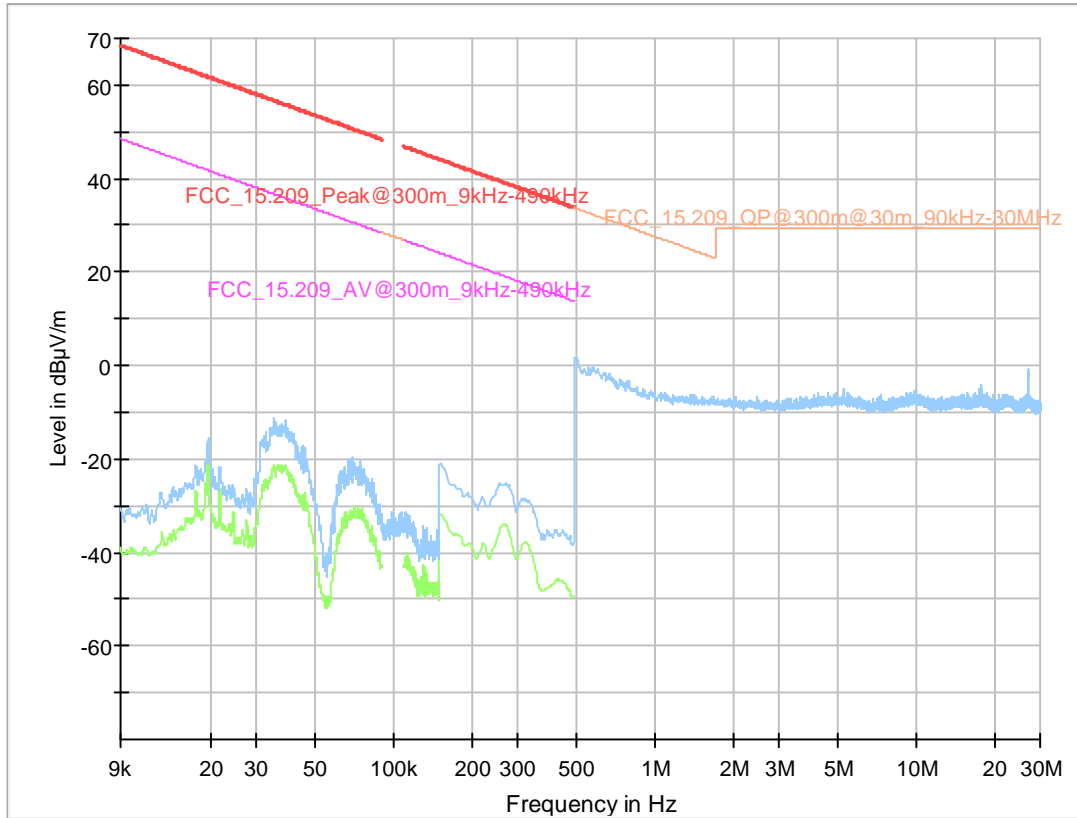

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-----------------|-----------------|-------------|---------------|--------------|
| --- | --- | --- | --- | --- | --- | --- | --- | --- |

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-1 (S01_AB01)

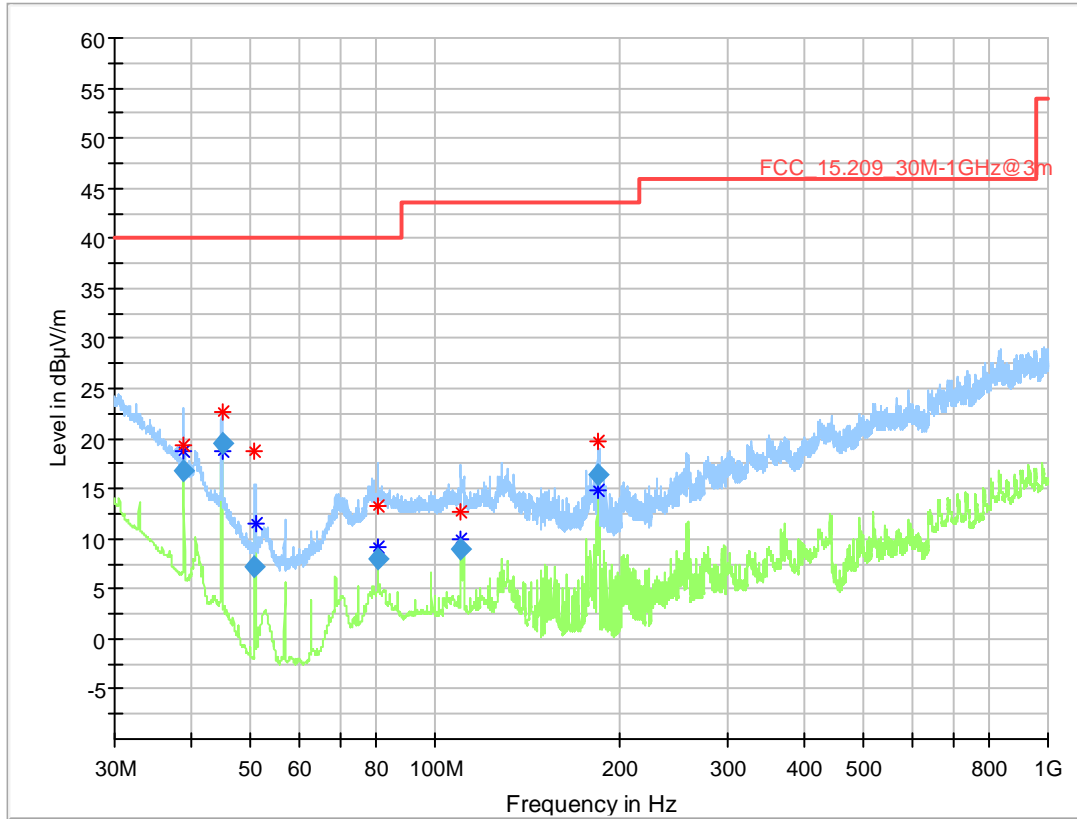


Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 38.910000 | 16.88 | 39.10 | 22.22 | 1000.0 | 120.000 | 100.0 | V | -152.0 | 3.9 |
| 44.880000 | 19.58 | 39.10 | 19.52 | 1000.0 | 120.000 | 100.0 | V | 80.0 | 0.0 |
| 50.850000 | 7.16 | 39.10 | 31.94 | 1000.0 | 120.000 | 103.0 | V | -148.0 | -4.4 |
| 80.820000 | 8.05 | 39.10 | 31.05 | 1000.0 | 120.000 | 125.0 | V | 117.0 | -0.3 |
| 110.340000 | 9.03 | 43.50 | 34.47 | 1000.0 | 120.000 | 172.0 | H | 91.0 | 0.7 |
| 183.870000 | 16.34 | 43.50 | 27.16 | 1000.0 | 120.000 | 132.0 | H | -56.0 | -1.1 |

Note:

The stronger limits of FCC §15.209 have been applied here in this plot, please find the §15.407 related limits and margins in the sub-clause of the results.


Radio Technology = WLAN a, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AB01)

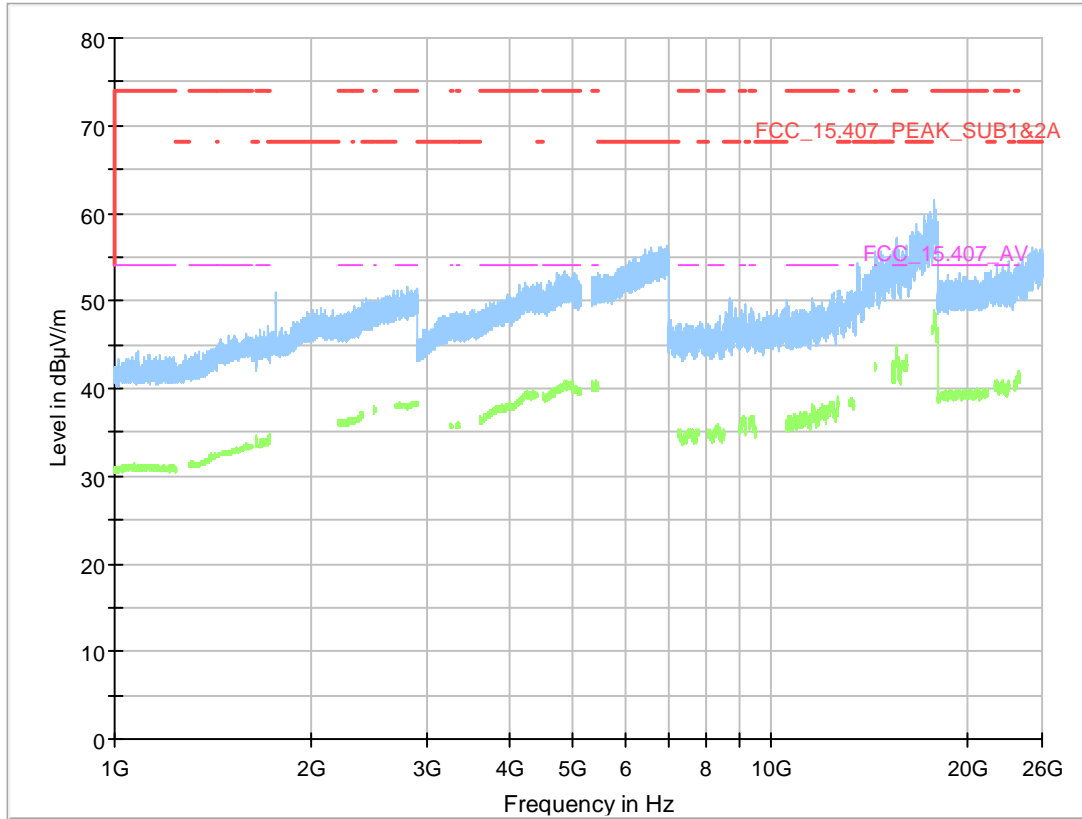


Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| --- | --- | --- | --- | --- | --- | --- | --- | | --- | --- | |

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 26GHz - 40GHz, Subband = U-NII-1 (S01_AB01)

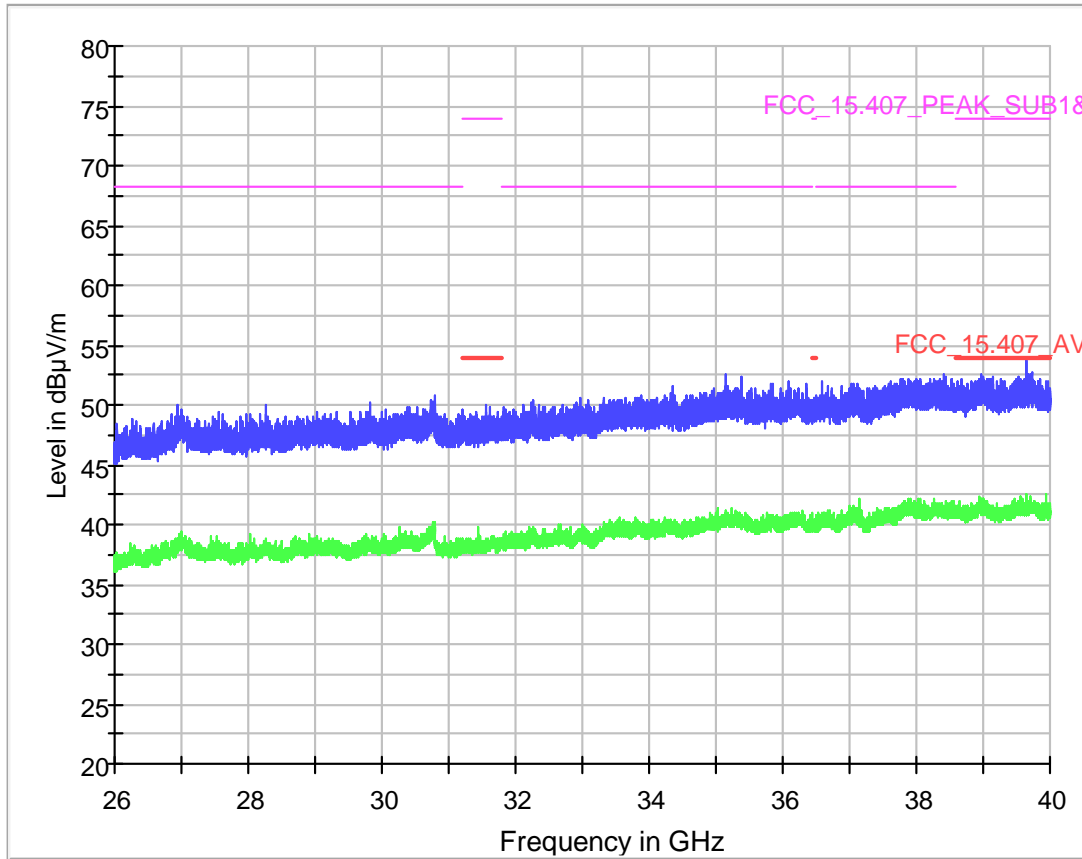


Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AB01)

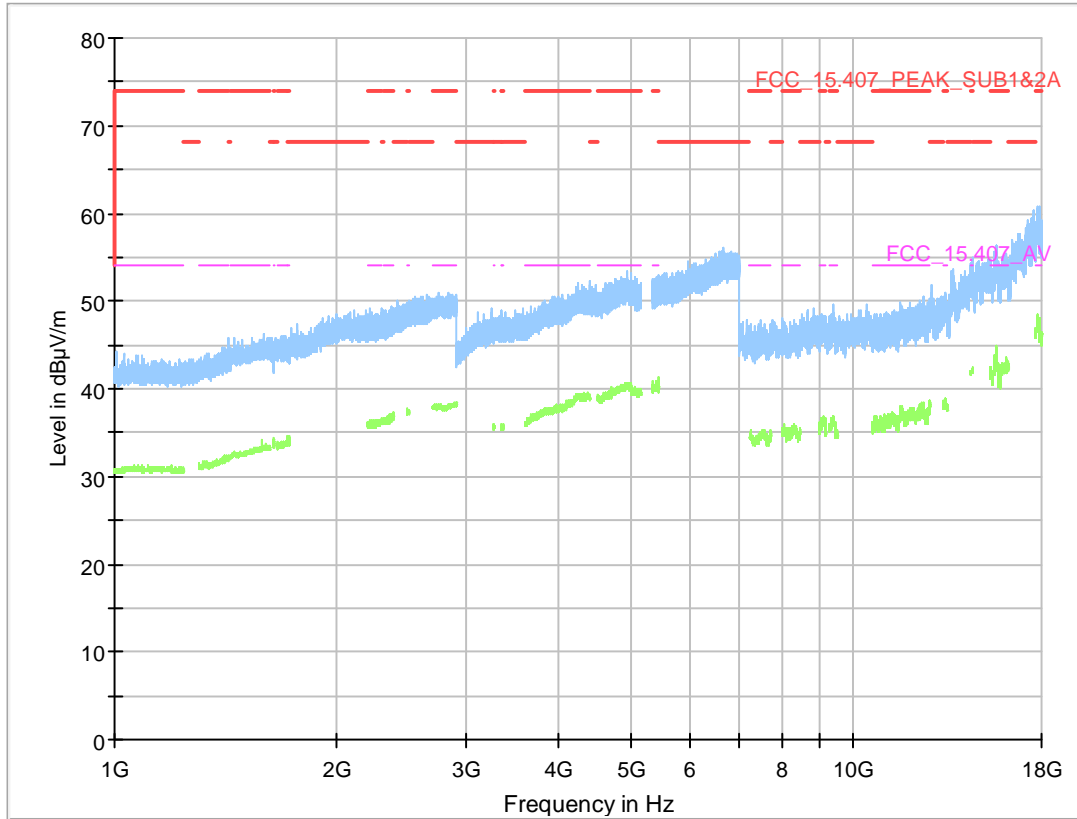

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| --- | --- | --- | --- | --- | --- | --- | --- | | --- | --- | |


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AB01)

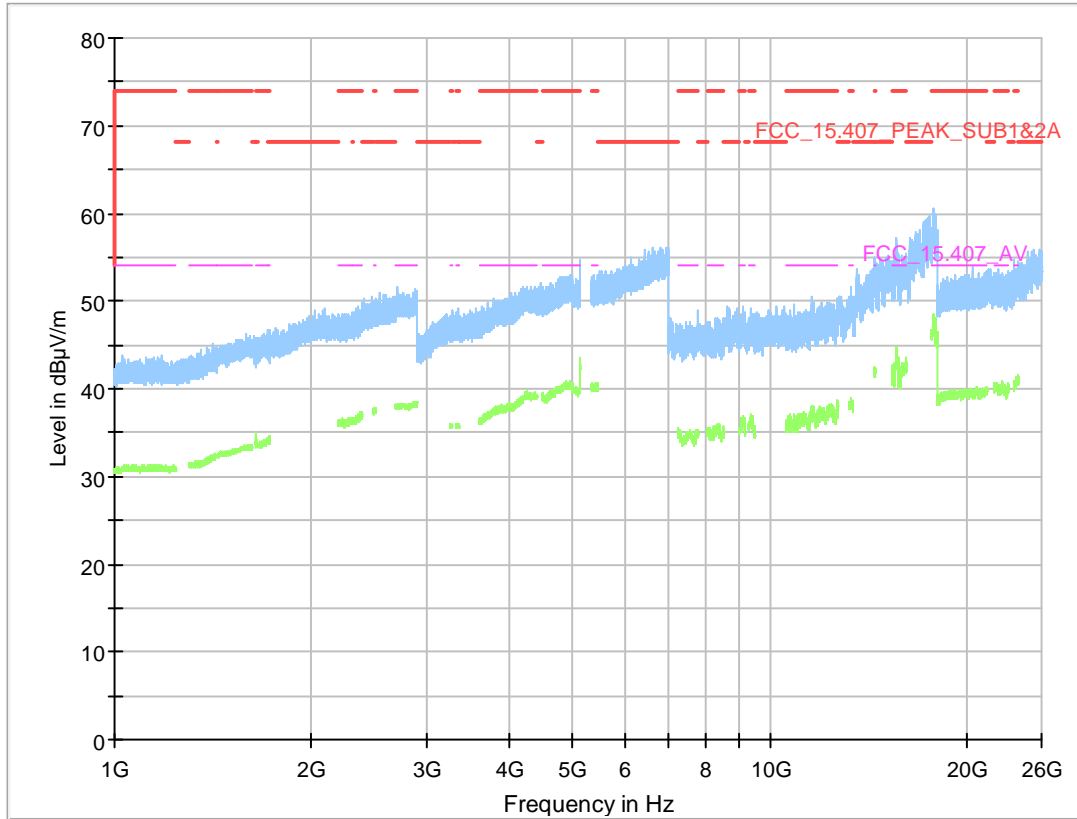

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| --- | --- | --- | --- | --- | --- | --- | --- | | --- | --- | |

Radio Technology = WLAN ac 40 MHz, Operating Frequency = high, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01_AB01)

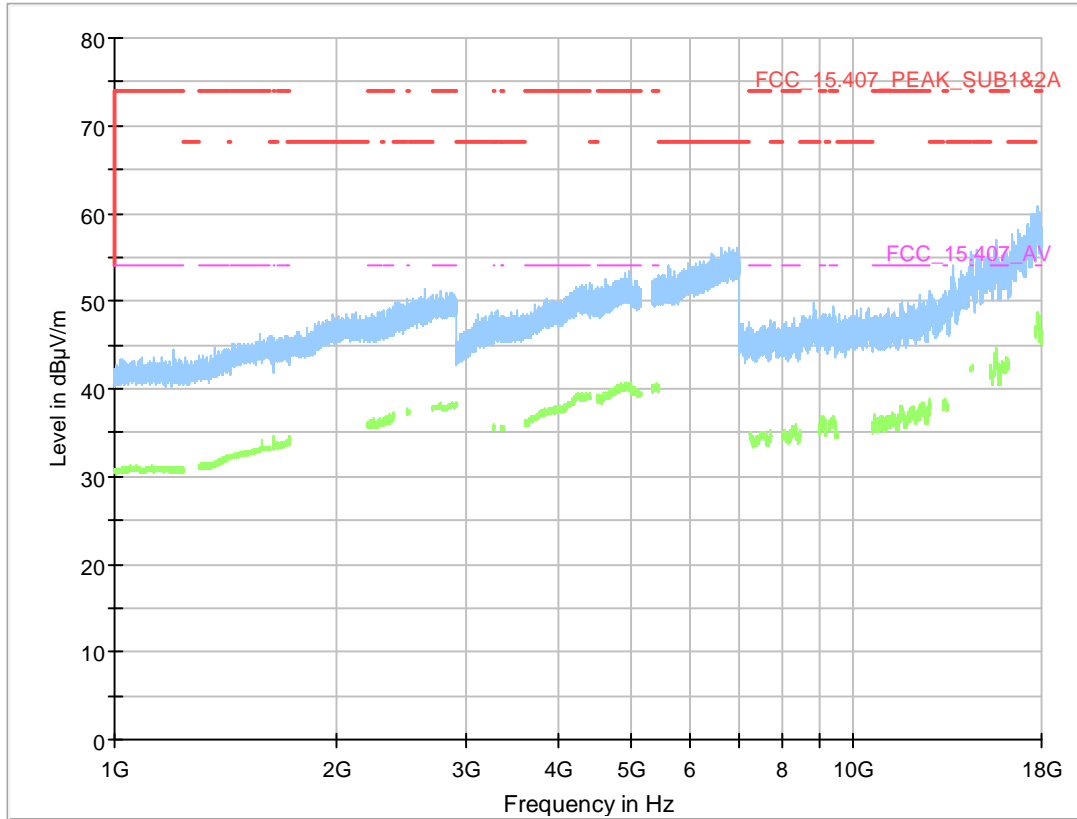

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| --- | --- | --- | --- | --- | --- | --- | --- | | --- | --- | |

5.2.5 TEST EQUIPMENT USED

- Radiated Emissions

5.3 BAND EDGE

Standard **FCC Part 15 Subpart E**

The test was performed according to:
ANSI C63.10

5.3.1 TEST DESCRIPTION


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

Measurement above 1 GHz

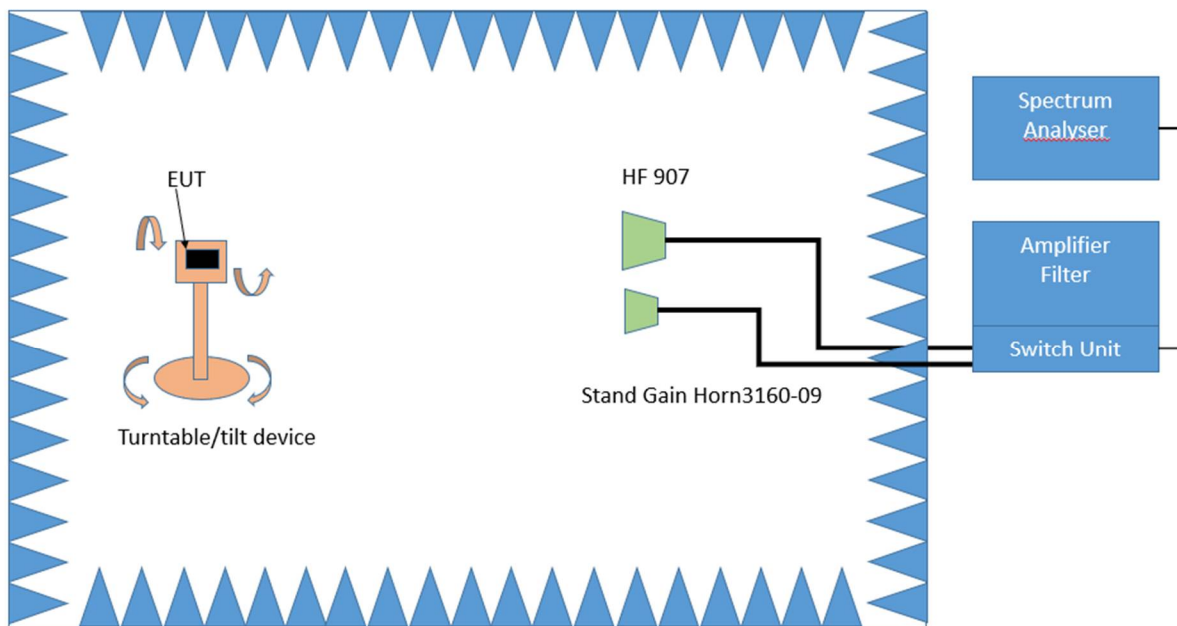

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90°.

The turn table step size (azimuth angle) for the preliminary measurement is 45°.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.3.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit ($\mu\text{V}/\text{m}$) | Measurement distance (m) | Limits ($\text{dB}\mu\text{V}/\text{m}$) |
|------------------|----------------------------------|--------------------------|--|
| 0.009 – 0.49 | 2400/F(kHz)@300m | 3 | (48.5 – 13.8)@300m |
| 0.49 – 1.705 | 24000/F(kHz)@30m | 3 | (33.8 – 23.0)@30m |
| 1.705 – 30 | 30@30m | 3 | 29.5@30m |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit ($\mu\text{V}/\text{m}$) | Measurement distance (m) | Limits ($\text{dB}\mu\text{V}/\text{m}$) |
|------------------|----------------------------------|--------------------------|--|
| 30 – 88 | 100@3m | 3 | 40.0@3m |
| 88 – 216 | 150@3m | 3 | 43.5@3m |
| 216 – 960 | 200@3m | 3 | 46.0@3m |
| 960 - 26000 | 500@3m | 3 | 54.0@3m |
| 26000 - 40000 | 500@3m | 1 | 54.0@3m |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit } (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$

5.3.3 TEST PROTOCOL

Ambient temperature: 23–24 °C
 Air Pressure: 1002–1005 hPa
 Humidity: 33–37 %
 WLAN a-Mode; 20 MHz; 6 Mbit/s
 Applied duty cycle correction (AV): 0.1 dB

| U-NII - Sub-band | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type | FCC /IC? |
|------------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 1 | 36 | 5180 | 5150.0 | 55.4 | PEAK | 1000 | 74.0 | 18.6 | BE-RB | FCC&IC |
| | 36 | 5180 | 5150.0 | 42.9 | AV | 1000 | 54.0 | 11.1 | BE-RB | FCC&IC |

WLAN n-Mode; 20 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| U-NII - Sub-band | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type | FCC /IC? |
|------------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 1 | 36 | 5180 | 5150.0 | 55.4 | PEAK | 1000 | 74.0 | 18.6 | BE-RB | FCC&IC |
| | 36 | 5180 | 5150.0 | 43.5 | AV | 1000 | 54.0 | 10.5 | BE-RB | FCC&IC |

WLAN n-Mode; 40 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| U-NII - Sub-band | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type | FCC /IC? |
|------------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 1 | 38 | 5190 | 5150.0 | 60.8 | PEAK | 1000 | 74.0 | 13.2 | BE-RB | FCC&IC |
| | 38 | 5190 | 5150.0 | 47.0 | AV | 1000 | 54.0 | 7.0 | BE-RB | FCC&IC |

WLAN ac-Mode; 20 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| U-NII - Sub-band | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type | FCC /IC? |
|------------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 1 | 36 | 5180 | 5150.0 | 55.6 | PEAK | 1000 | 74.0 | 18.4 | BE-RB | FCC&IC |
| | 36 | 5180 | 5150.0 | 43.5 | AV | 1000 | 54.0 | 10.5 | BE-RB | FCC&IC |

WLAN ac-Mode; 40 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| U-NII - Sub-band | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type | FCC /IC? |
|------------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 1 | 38 | 5190 | 5150.0 | 61.3 | PEAK | 1000 | 74.0 | 12.7 | BE-RB | FCC&IC |
| | 38 | 5190 | 5150.0 | 47.0 | AV | 1000 | 54.0 | 7.0 | BE-RB | FCC&IC |


WLAN ac-Mode; 80 MHz; x Mbit/s MCSx; SISO
 Applied duty cycle correction (AV): 0.1 dB

| U-NII - Sub-band | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detector | RBW [kHz] | Limit [dBµV/m] | Margin [dB] | Limit Type | FCC /IC? |
|------------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 1 | 42 | 5210 | 5150.0 | 58.9 | PEAK | 1000 | 74.0 | 15.1 | BE-RB | FCC&IC |
| | 42 | 5210 | 5150.0 | 45.2 | AV | 1000 | 54.0 | 8.8 | BE-RB | FCC&IC |

Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-1 (S01_AB01)

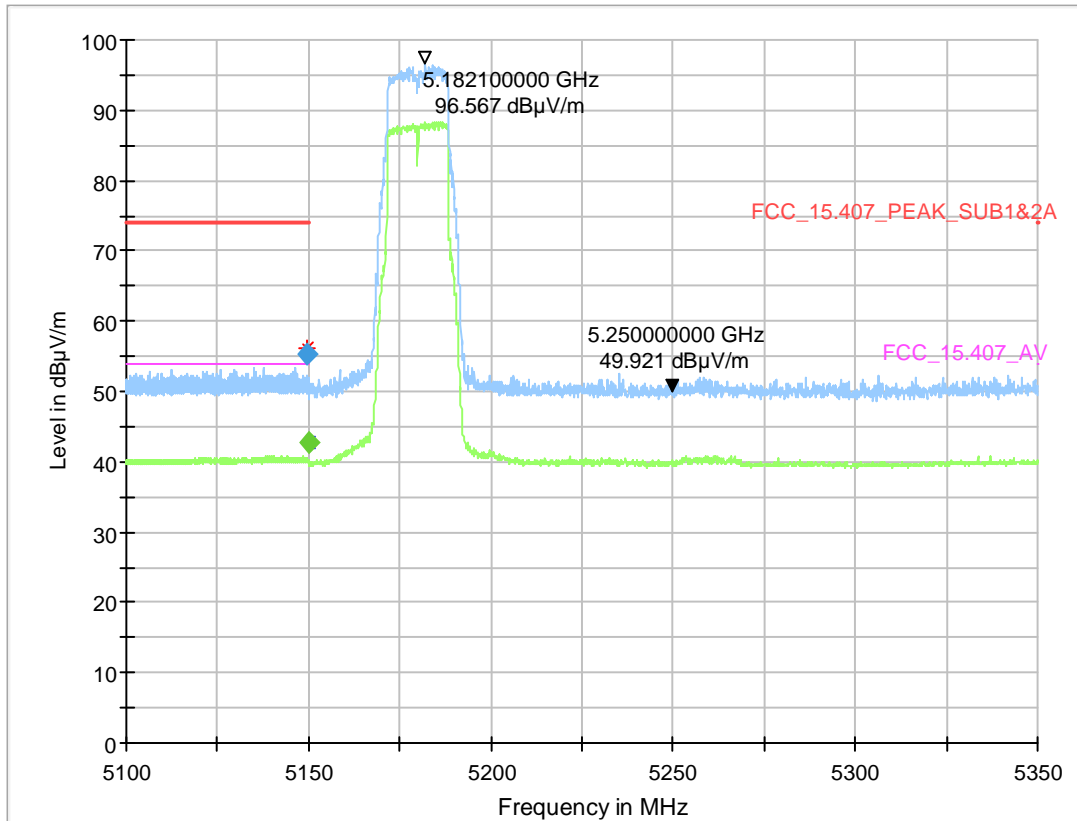

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 5149.813 | 55.4 | --- | 74.00 | 18.57 | 1000.0 | 1000.000 | 150.0 | V | -4.0 | 13.2 |
| 5149.988 | --- | 42.8 | 54.00 | 11.17 | 1000.0 | 1000.000 | 150.0 | H | -92.0 | 13.2 |


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AB01)

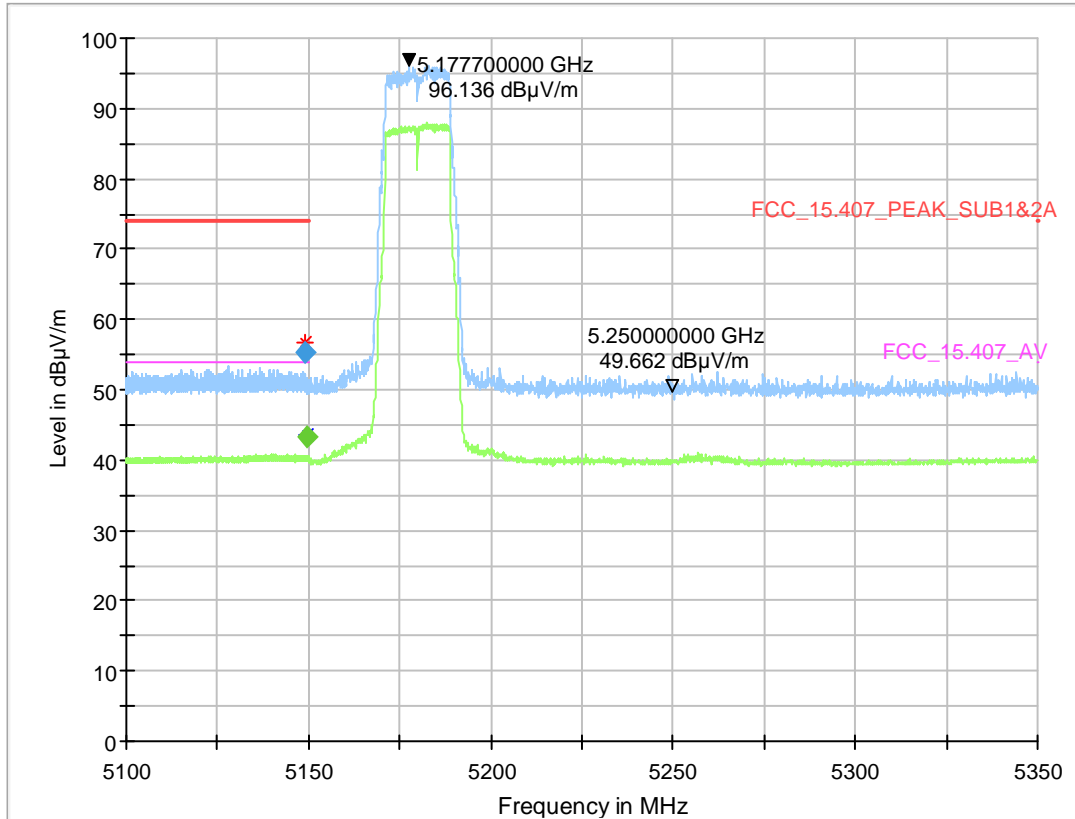

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 5149.225 | 55.4 | --- | 74.00 | 18.63 | 1000.0 | 1000.000 | 150.0 | V | 6.0 | 13.2 |
| 5149.625 | --- | 43.4 | 54.00 | 10.65 | 1000.0 | 1000.000 | 150.0 | V | 46.0 | 13.2 |


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AB01)

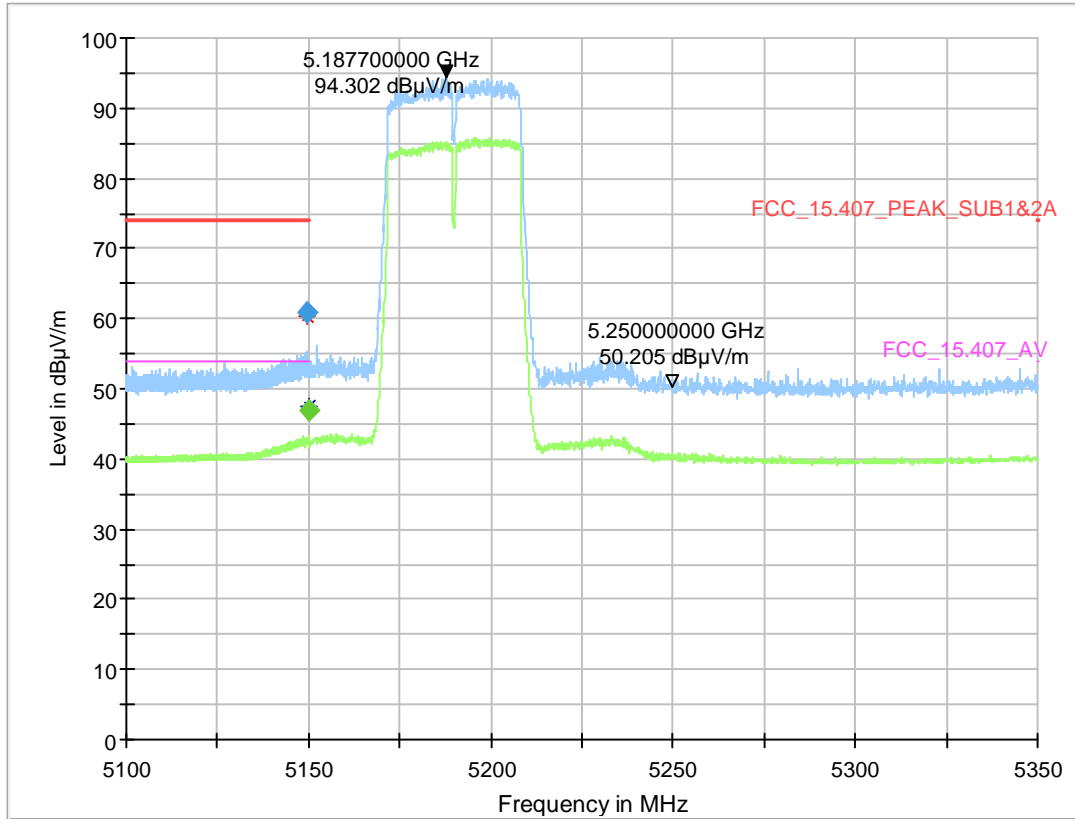

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 5149.363 | 60.8 | --- | 74.00 | 13.23 | 1000.0 | 1000.000 | 150.0 | H | 50.0 | 13.2 |
| 5149.988 | --- | 46.9 | 54.00 | 7.06 | 1000.0 | 1000.000 | 150.0 | V | 46.0 | 13.2 |


Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AB01)

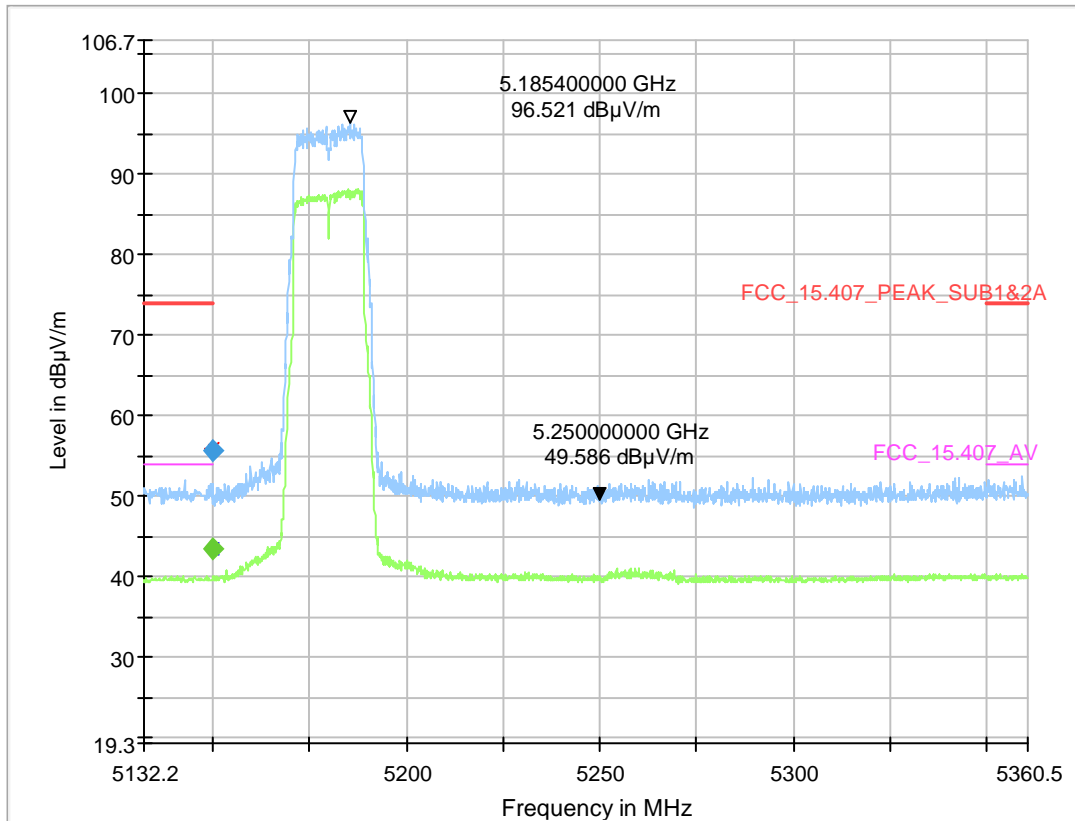

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 5150.100 | 55.6 | --- | --- | --- | 1000.0 | 1000.000 | 150.0 | V | -131.0 | 13.2 |
| 5150.200 | --- | 43.4 | --- | --- | 1000.0 | 1000.000 | 150.0 | V | 46.0 | 13.2 |


Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AB01)

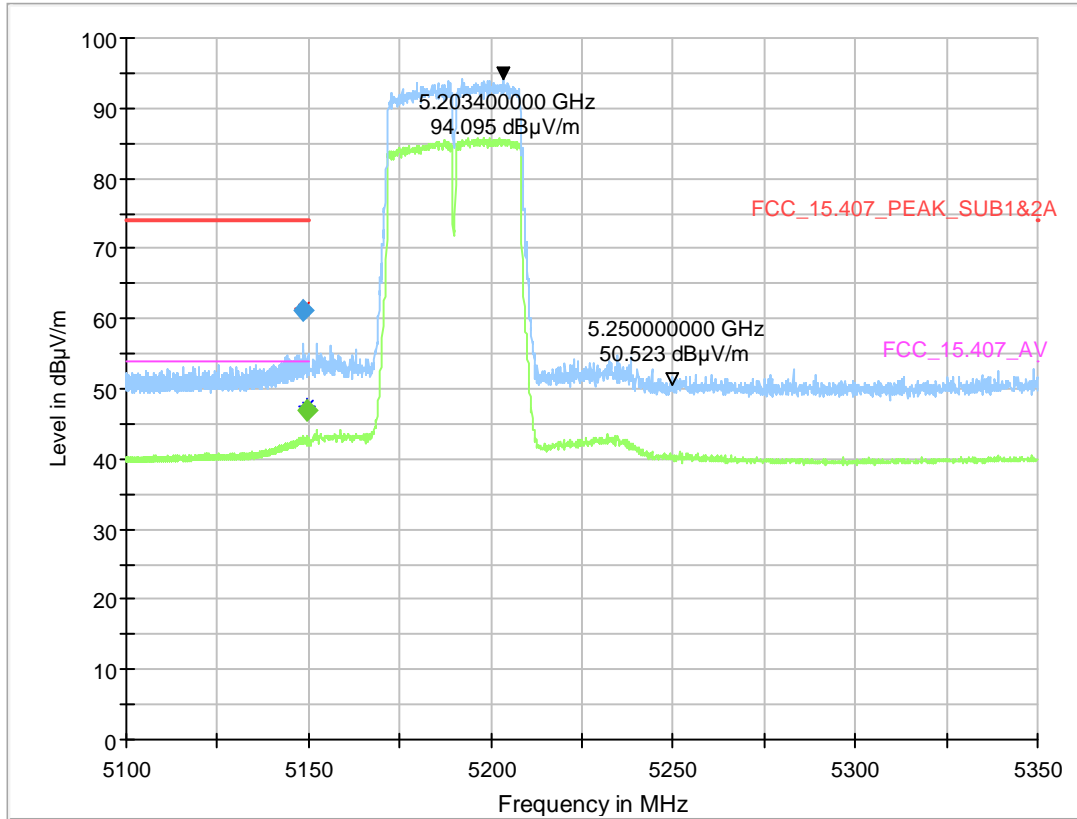

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 5148.525 | 61.3 | --- | 74.00 | 12.74 | 1000.0 | 1000.000 | 150.0 | V | 48.0 | 13.2 |
| 5149.650 | --- | 46.9 | 54.00 | 7.06 | 1000.0 | 1000.000 | 150.0 | V | 46.0 | 13.2 |

Radio Technology = WLAN ac 80 MHz, Operating Frequency = low, Subband = U-NII-1 (S01_AB01)

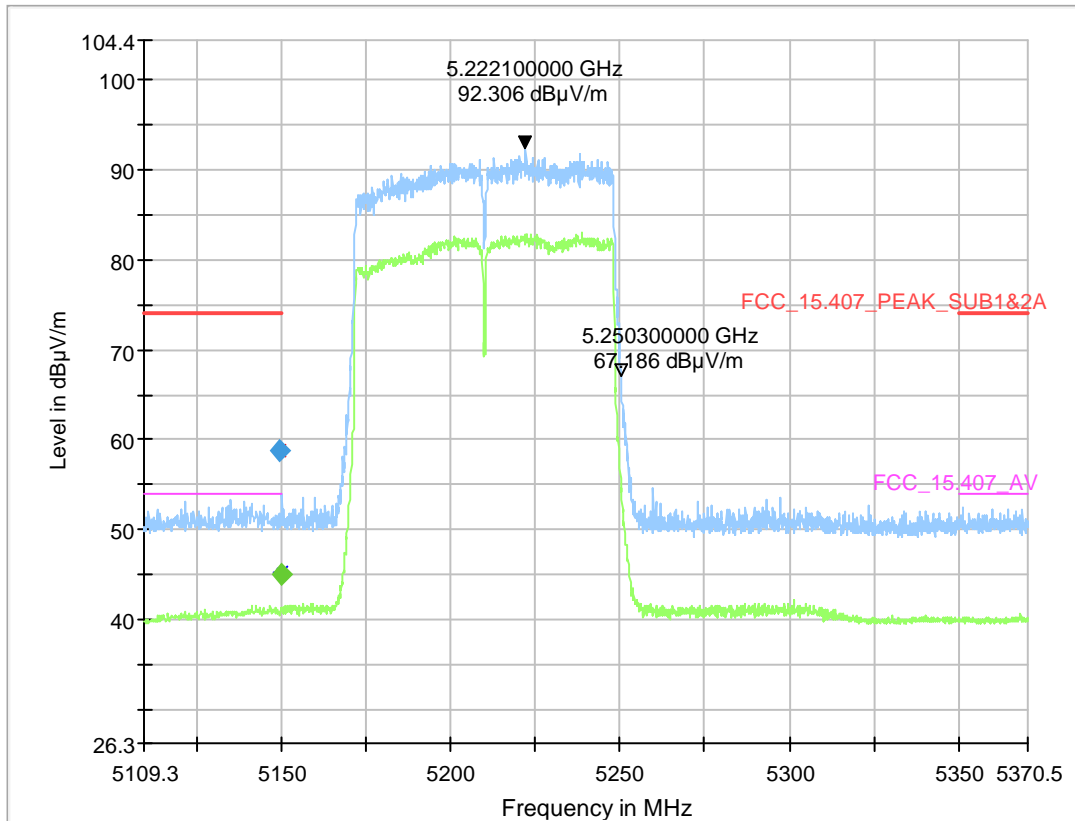

Final_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 5149.188 | 58.9 | --- | 74.00 | 15.13 | 1000.0 | 1000.000 | 150.0 | H | 48.0 | 13.2 |
| 5149.838 | --- | 45.1 | 54.00 | 8.94 | 1000.0 | 1000.000 | 150.0 | H | 46.0 | 13.2 |

5.3.5 TEST EQUIPMENT USED

- Radiated Emissions

6 TEST EQUIPMENT

- 1 Conducted Emissions FCC
Conducted Emissions AC Mains for FCC standards

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|----------------------|--|-------------------------------------|---------------|------------------|-----------------|
| 1.1 | MFS | Rubidium Frequency Normal MFS | Datum GmbH | 002 | 2020-11 | 2021-11 |
| 1.2 | Opus10 TPR (8253.00) | T/P Logger 13 | Lufft Mess- und Regeltechnik GmbH | 13936 | 2019-05 | 2021-05 |
| 1.3 | ESH3-Z5 | Two-Line V-Network (AUX) | Rohde & Schwarz GmbH & Co. KG | 828304/029 | 2019-06 | 2021-06 |
| 1.4 | EP 1200/B, NA/B1 | AC Source, Amplifier with integrated variable Oscillator | Spitzenberger & Spies GmbH & Co. KG | B6278 | | |
| 1.5 | Chroma 6404 | AC Source | Chroma ATE INC. | 64040001304 | | |
| 1.6 | Shielded Room 02 | Shielded Room 4m x 3m | Frankonia Germany EMC Solution GmbH | - | | |
| 1.7 | ESH3-Z5 | Two-Line V-Network (EUT) | Rohde & Schwarz GmbH & Co. KG | 829996/002 | 2019-06 | 2021-06 |
| 1.8 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2019-01 | 2021-01 |
| 1.9 | Opus10 THI (8152.00) | T/H Logger 02 | Lufft Mess- und Regeltechnik GmbH | 7489 | 2019-05 | 2021-05 |

- 2 Radiated Emissions
Lab to perform radiated emission tests

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|-------------------------|--|-----------------------------------|---------------|------------------|-----------------|
| 2.1 | MFS | Rubidium Frequency Normal MFS | Datum GmbH | 002 | 2020-11 | 2021-11 |
| 2.2 | N5000/NP | Filter for EUT, 2 Lines, 250 V, 16 A | ETS-LINDGREN | 241515 | | |
| 2.3 | Opus10 TPR (8253.00) | T/P Logger 13 | Lufft Mess- und Regeltechnik GmbH | 13936 | 2019-05 | 2021-05 |
| 2.4 | ESW44 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz GmbH & Co. KG | 101603 | 2019-12 | 2021-12 |
| 2.5 | Anechoic Chamber 01 | SAC/FAR, 10.58 m x 6.38 m x 6.00 m | Frankonia | none | 2018-06 | 2021-06 |
| 2.6 | HL 562 ULTRALOG | Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals | Rohde & Schwarz GmbH & Co. KG | 830547/003 | 2018-07 | 2021-07 |
| 2.7 | AMF-7D00101800-30-10P-R | Broadband Amplifier 100 MHz - 18 GHz | Miteq | | | |
| 2.8 | 5HC2700/12750-1.5-KK | High Pass Filter | Trilithic | 9942012 | | |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|----------------------|--|-------------------------------------|--------------------|------------------|-----------------|
| 2.9 | ASP 1.2/1.8-10 kg | Antenna Mast | Maturo GmbH | - | | |
| 2.10 | Anechoic Chamber 03 | FAR, 8.80m x 4.60m x 4.05m (l x w x h) | Albatross Projects | P26971-647-001-PRB | | |
| 2.11 | Fluke 177 | Digital Multimeter 03 (Multimeter) | Fluke Europe B.V. | 86670383 | 2020-04 | 2022-04 |
| 2.12 | Opus10 THI (8152.00) | T/H Logger 10 | Lufft Mess- und Regeltechnik GmbH | 12488 | 2019-06 | 2021-06 |
| 2.13 | NRVD | Power Meter | Rohde & Schwarz GmbH & Co. KG | 828110/016 | 2020-08 | 2021-08 |
| 2.14 | HF 906 | Double-ridged horn | Rohde & Schwarz | 357357/002 | 2018-09 | 2021-09 |
| 2.15 | JS4-18002600-32-5P | Broadband Amplifier 18 GHz - 26 GHz | Miteq | 849785 | | |
| 2.16 | FSW 43 | Spectrum Analyzer | Rohde & Schwarz | 103779 | 2019-02 | 2021-02 |
| 2.17 | EP 1200/B, NA/B1 | AC Source, Amplifier with integrated variable Oscillator | Spitzenberger & Spies GmbH & Co. KG | B6278 | | |
| 2.18 | 3160-09 | Standard Gain / Pyramidal Horn Antenna 26.5 GHz | EMCO Elektronik GmbH | 00083069 | | |
| 2.19 | WHKX 7.0/18G-8SS | High Pass Filter | Wainwright Instruments GmbH | 09 | | |
| 2.20 | DS 420S | Turn Table 2 m diameter | HD GmbH | 420/573/99 | | |
| 2.21 | 4HC1600/12750-1.5-KK | High Pass Filter | Trilithic | 9942011 | | |
| 2.22 | SMB100A | Signal Generator 100 kHz - 40 GHz | Rohde & Schwarz Vertriebs-GmbH | 181486 | 2019-11 | 2021-11 |
| 2.23 | JS4-00102600-42-5A | Broadband Amplifier 30 MHz - 26 GHz | Miteq | 619368 | | |
| 2.24 | TT 1.5 WI | Turn Table | Maturo GmbH | - | | |
| 2.25 | HL 562 ULTRALOG | Biconical-log-per Antenna (30 MHz - 3 GHz) | Rohde & Schwarz GmbH & Co. KG | 100609 | 2019-05 | 2022-05 |
| 2.26 | HF 906 | Double-ridged horn | Rohde & Schwarz | 357357/001 | 2018-03 | 2021-03 |
| 2.27 | 3160-10 | Standard Gain / Pyramidal Horn Antenna 40 GHz | EMCO Elektronik GmbH | 00086675 | | |
| 2.28 | MA4985-XP-ET | Bore Sight Antenna Mast | innco systems GmbH | none | | |
| 2.29 | VLFX-650+ | Low Pass Filter DC650 MHz | Mini-Circuits | 15542 | | |
| 2.30 | JUN-AIR Mod. 6-15 | Air Compressor | JUN-AIR Deutschland GmbH | 612582 | | |
| 2.31 | 5HC3500/18000-1.2-KK | High Pass Filter | Trilithic | 200035008 | | |

| Ref.No. | Device Name | Description | Manufacturer | Serial Number | Last Calibration | Calibration Due |
|---------|---------------------------------------|---------------------------------------|-------------------------------|------------------------|------------------|-----------------|
| 2.32 | HFH2-Z2 | Loop Antenna | Rohde & Schwarz GmbH & Co. KG | 829324/006 | 2018-01 | 2021-01 |
| 2.33 | ESR 7 | EMI Receiver / Spectrum Analyzer | Rohde & Schwarz | 101424 | 2019-01 | 2021-01 |
| 2.34 | SB4-100.OLD20-3T/10 Airwin 2 x 1.5 kW | Air compressor (oil-free) | airWin Kompressoren UG | 901/00503 | | |
| 2.35 | JS4-00101800-35-5P | Broadband Amplifier 30 MHz - 18 GHz | Miteq | 896037 | | |
| 2.36 | AS 620 P | Antenna Mast (pneumatic polarisation) | HD GmbH | 620/37 | | |
| 2.37 | TD1.5-10kg | EUT Tilt Device (Rohacell) | Maturo GmbH | TD1.5-10kg/024/3790709 | | |
| 2.38 | Innco Systems CO3000 | Controller for bore sight mast SAC | innco systems GmbH | CO3000/967/39371016/L | | |
| 2.39 | NRV-Z1 | Sensor Head B | Rohde & Schwarz GmbH & Co. KG | 827753/006 | 2020-08 | 2021-08 |
| 2.40 | HF 907-2 | Double-ridged horn | Rohde & Schwarz | 102817 | 2019-04 | 2022-04 |
| 2.41 | PAS 2.5 - 10 kg | Antenna Mast | Maturo GmbH | - | | |
| 2.42 | AFS42-00101800-25-S-42 | Broadband Amplifier 25 MHz - 18 GHz | Miteq | 2035324 | | |
| 2.43 | AM 4.0 | Antenna Mast 4 m | Maturo GmbH | AM4.0/180/11920513 | | |
| 2.44 | HF 907 | Double-ridged horn | Rohde & Schwarz | 102444 | 2018-07 | 2021-07 |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency | | Corr. | LISN insertion loss ESH3-Z5 | cable loss (incl. 10 dB attenuator) |
|-----------|--|-------|-----------------------------|-------------------------------------|
| MHz | | dB | dB | dB |
| 0.15 | | 10.1 | 0.1 | 10.0 |
| 5 | | 10.3 | 0.1 | 10.2 |
| 7 | | 10.5 | 0.2 | 10.3 |
| 10 | | 10.5 | 0.2 | 10.3 |
| 12 | | 10.7 | 0.3 | 10.4 |
| 14 | | 10.7 | 0.3 | 10.4 |
| 16 | | 10.8 | 0.4 | 10.4 |
| 18 | | 10.9 | 0.4 | 10.5 |
| 20 | | 10.9 | 0.4 | 10.5 |
| 22 | | 11.1 | 0.5 | 10.6 |
| 24 | | 11.1 | 0.5 | 10.6 |
| 26 | | 11.2 | 0.5 | 10.7 |
| 28 | | 11.2 | 0.5 | 10.7 |
| 30 | | 11.3 | 0.5 | 10.8 |

Sample calculation

$$U_{LISN} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency MHz | AF HFH-Z2) dB (1/m) | Corr. dB | cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-40 dB/ decade) dB | d _{Limit} (meas. distance (limit) m | d _{used} (meas. distance (used) m |
|------------------|---------------------------|-------------|--|---|---|---|--|--|--|
| 0.009 | 20.50 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.01 | 20.45 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.015 | 20.37 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.02 | 20.36 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.025 | 20.38 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.03 | 20.32 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.05 | 20.35 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.08 | 20.30 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.1 | 20.20 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.2 | 20.17 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.3 | 20.14 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.49 | 20.12 | -79.6 | 0.1 | 0.1 | 0.1 | 0.1 | -80 | 300 | 3 |
| 0.490001 | 20.12 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.5 | 20.11 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 0.8 | 20.10 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 1 | 20.09 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 2 | 20.08 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 3 | 20.06 | -39.6 | 0.1 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 4 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 5 | 20.05 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 6 | 20.02 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 8 | 19.95 | -39.5 | 0.2 | 0.1 | 0.1 | 0.1 | -40 | 30 | 3 |
| 10 | 19.83 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 12 | 19.71 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 14 | 19.54 | -39.4 | 0.2 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 16 | 19.53 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 18 | 19.50 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 20 | 19.57 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 22 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 24 | 19.61 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 26 | 19.54 | -39.3 | 0.3 | 0.1 | 0.2 | 0.1 | -40 | 30 | 3 |
| 28 | 19.46 | -39.2 | 0.3 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |
| 30 | 19.73 | -39.1 | 0.4 | 0.1 | 0.3 | 0.1 | -40 | 30 | 3 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

($d_{Limit} = 3\text{ m}$)

| Frequency MHz | AF R&S HL562 dB (1/m) | Corr. dB |
|------------------|--------------------------------|-------------|
| 30 | 18.6 | 0.6 |
| 50 | 6.0 | 0.9 |
| 100 | 9.7 | 1.2 |
| 150 | 7.9 | 1.6 |
| 200 | 7.6 | 1.9 |
| 250 | 9.5 | 2.1 |
| 300 | 11.0 | 2.3 |
| 350 | 12.4 | 2.6 |
| 400 | 13.6 | 2.9 |
| 450 | 14.7 | 3.1 |
| 500 | 15.6 | 3.2 |
| 550 | 16.3 | 3.5 |
| 600 | 17.2 | 3.5 |
| 650 | 18.1 | 3.6 |
| 700 | 18.5 | 3.6 |
| 750 | 19.1 | 4.1 |
| 800 | 19.6 | 4.1 |
| 850 | 20.1 | 4.4 |
| 900 | 20.8 | 4.7 |
| 950 | 21.1 | 4.8 |
| 1000 | 21.6 | 4.9 |

| cable loss 1 (inside chamber) dB | cable loss 2 (outside chamber) dB | cable loss 3 (switch unit) dB | cable loss 4 (to receiver) dB | distance corr. (-20 dB/ decade) dB | d_{Limit} (meas. distance (limit) m | d_{used} (meas. distance (used) m |
|--|---|---|---|--|---|---|
| 0.29 | 0.04 | 0.23 | 0.02 | 0.0 | 3 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | 0.0 | 3 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | 0.0 | 3 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | 0.0 | 3 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | 0.0 | 3 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | 0.0 | 3 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | 0.0 | 3 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | 0.0 | 3 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | 0.0 | 3 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | 0.0 | 3 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | 0.0 | 3 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | 0.0 | 3 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | 0.0 | 3 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | 0.0 | 3 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | 0.0 | 3 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | 0.0 | 3 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | 0.0 | 3 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | 0.0 | 3 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | 0.0 | 3 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | 0.0 | 3 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | 0.0 | 3 | 3 |

($d_{Limit} = 10\text{ m}$)

| | | |
|------|------|------|
| 30 | 18.6 | -9.9 |
| 50 | 6.0 | -9.6 |
| 100 | 9.7 | -9.2 |
| 150 | 7.9 | -8.8 |
| 200 | 7.6 | -8.6 |
| 250 | 9.5 | -8.3 |
| 300 | 11.0 | -8.1 |
| 350 | 12.4 | -7.9 |
| 400 | 13.6 | -7.6 |
| 450 | 14.7 | -7.4 |
| 500 | 15.6 | -7.2 |
| 550 | 16.3 | -7.0 |
| 600 | 17.2 | -6.9 |
| 650 | 18.1 | -6.9 |
| 700 | 18.5 | -6.8 |
| 750 | 19.1 | -6.3 |
| 800 | 19.6 | -6.3 |
| 850 | 20.1 | -6.0 |
| 900 | 20.8 | -5.8 |
| 950 | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

| | | | | | | |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{Limit} / d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 24.4 | -19.4 |
| 2000 | 28.5 | -17.4 |
| 3000 | 31.0 | -16.1 |
| 4000 | 33.1 | -14.7 |
| 5000 | 34.4 | -13.7 |
| 6000 | 34.7 | -12.7 |
| 7000 | 35.6 | -11.0 |

| cable loss 1 (relay + cable inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit, attenuator & pre-amp) | cable loss 4 (to receiver) |
|---|--------------------------------|--|----------------------------|
| dB | dB | dB | dB |
| 0.99 | 0.31 | -21.51 | 0.79 |
| 1.44 | 0.44 | -20.63 | 1.38 |
| 1.87 | 0.53 | -19.85 | 1.33 |
| 2.41 | 0.67 | -19.13 | 1.31 |
| 2.78 | 0.86 | -18.71 | 1.40 |
| 2.74 | 0.90 | -17.83 | 1.47 |
| 2.82 | 0.86 | -16.19 | 1.46 |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------|-------|
| MHz | dB (1/m) | dB |
| 3000 | 31.0 | -23.4 |
| 4000 | 33.1 | -23.3 |
| 5000 | 34.4 | -21.7 |
| 6000 | 34.7 | -21.2 |
| 7000 | 35.6 | -19.8 |

| cable loss 1 (relay inside chamber) | cable loss 2 (inside chamber) | cable loss 3 (outside chamber) | cable loss 4 (switch unit, attenuator & pre-amp) | cable loss 5 (to receiver) | used for FCC 15.247 |
|-------------------------------------|-------------------------------|--------------------------------|--|----------------------------|---------------------|
| dB | dB | dB | dB | dB | |
| 0.47 | 1.87 | 0.53 | -27.58 | 1.33 | |
| 0.56 | 2.41 | 0.67 | -28.23 | 1.31 | |
| 0.61 | 2.78 | 0.86 | -27.35 | 1.40 | |
| 0.58 | 2.74 | 0.90 | -26.89 | 1.47 | |
| 0.66 | 2.82 | 0.86 | -25.58 | 1.46 | |

| Frequency | AF R&S HF907 | Corr. |
|-----------|--------------|-------|
| MHz | dB (1/m) | dB |
| 7000 | 35.6 | -57.3 |
| 8000 | 36.3 | -56.3 |
| 9000 | 37.1 | -55.3 |
| 10000 | 37.5 | -56.2 |
| 11000 | 37.5 | -55.3 |
| 12000 | 37.6 | -53.7 |
| 13000 | 38.2 | -53.5 |
| 14000 | 39.9 | -56.3 |
| 15000 | 40.9 | -54.1 |
| 16000 | 41.3 | -54.1 |
| 17000 | 42.8 | -54.4 |
| 18000 | 44.2 | -54.7 |

| cable loss 1 (relay inside chamber) | cable loss 2 (High Pass) | cable loss 3 (pre-amp) | cable loss 4 (inside chamber) | cable loss 5 (outside chamber) | cable loss 6 (to receiver) |
|-------------------------------------|--------------------------|------------------------|-------------------------------|--------------------------------|----------------------------|
| dB | dB | dB | dB | dB | dB |
| 0.56 | 1.28 | -62.72 | 2.66 | 0.94 | 1.46 |
| 0.69 | 0.71 | -61.49 | 2.84 | 1.00 | 1.53 |
| 0.68 | 0.65 | -60.80 | 3.06 | 1.09 | 1.60 |
| 0.70 | 0.54 | -61.91 | 3.28 | 1.20 | 1.67 |
| 0.80 | 0.61 | -61.40 | 3.43 | 1.27 | 1.70 |
| 0.84 | 0.42 | -59.70 | 3.53 | 1.26 | 1.73 |
| 0.83 | 0.44 | -59.81 | 3.75 | 1.32 | 1.83 |
| 0.91 | 0.53 | -63.03 | 3.91 | 1.40 | 1.77 |
| 0.98 | 0.54 | -61.05 | 4.02 | 1.44 | 1.83 |
| 1.23 | 0.49 | -61.51 | 4.17 | 1.51 | 1.85 |
| 1.36 | 0.76 | -62.36 | 4.34 | 1.53 | 2.00 |
| 1.70 | 0.53 | -62.88 | 4.41 | 1.55 | 1.91 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency MHz | AF EMCO 3160-09 dB (1/m) | Corr. dB |
|------------------|-----------------------------------|-------------|
| 18000 | 40.2 | -23.5 |
| 18500 | 40.2 | -23.2 |
| 19000 | 40.2 | -22.0 |
| 19500 | 40.3 | -21.3 |
| 20000 | 40.3 | -20.3 |
| 20500 | 40.3 | -19.9 |
| 21000 | 40.3 | -19.1 |
| 21500 | 40.3 | -19.1 |
| 22000 | 40.3 | -18.7 |
| 22500 | 40.4 | -19.0 |
| 23000 | 40.4 | -19.5 |
| 23500 | 40.4 | -19.3 |
| 24000 | 40.4 | -19.8 |
| 24500 | 40.4 | -19.5 |
| 25000 | 40.4 | -19.3 |
| 25500 | 40.5 | -20.4 |
| 26000 | 40.5 | -21.3 |
| 26500 | 40.5 | -21.1 |

| cable loss 1 (inside chamber) dB | cable loss 2 (pre- amp) dB | cable loss 3 (inside chamber) dB | cable loss 4 (switch unit) dB | cable loss 5 (to receiver) dB |
|--|--|--|---|---|
| 0.72 | -35.85 | 6.20 | 2.81 | 2.65 |
| 0.69 | -35.71 | 6.46 | 2.76 | 2.59 |
| 0.76 | -35.44 | 6.69 | 3.15 | 2.79 |
| 0.74 | -35.07 | 7.04 | 3.11 | 2.91 |
| 0.72 | -34.49 | 7.30 | 3.07 | 3.05 |
| 0.78 | -34.46 | 7.48 | 3.12 | 3.15 |
| 0.87 | -34.07 | 7.61 | 3.20 | 3.33 |
| 0.90 | -33.96 | 7.47 | 3.28 | 3.19 |
| 0.89 | -33.57 | 7.34 | 3.35 | 3.28 |
| 0.87 | -33.66 | 7.06 | 3.75 | 2.94 |
| 0.88 | -33.75 | 6.92 | 3.77 | 2.70 |
| 0.90 | -33.35 | 6.99 | 3.52 | 2.66 |
| 0.88 | -33.99 | 6.88 | 3.88 | 2.58 |
| 0.91 | -33.89 | 7.01 | 3.93 | 2.51 |
| 0.88 | -33.00 | 6.72 | 3.96 | 2.14 |
| 0.89 | -34.07 | 6.90 | 3.66 | 2.22 |
| 0.86 | -35.11 | 7.02 | 3.69 | 2.28 |
| 0.90 | -35.20 | 7.15 | 3.91 | 2.36 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency | AF EMCO 3160-10 | Corr. | cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/ decade) | d _{Limit} (meas. distance limit) | d _{used} (meas. distance used) |
|-----------|-----------------------|-------|--|---|-------------------------------------|-------------------------------------|--|--|--|
| GHz | dB (1/m) | dB | dB | dB | dB | dB | dB | m | m |
| 26.5 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 27.0 | 43.4 | -11.2 | 4.4 | | | | -9.5 | 3 | 1.0 |
| 28.0 | 43.4 | -11.1 | 4.5 | | | | -9.5 | 3 | 1.0 |
| 29.0 | 43.5 | -11.0 | 4.6 | | | | -9.5 | 3 | 1.0 |
| 30.0 | 43.5 | -10.9 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 31.0 | 43.5 | -10.8 | 4.7 | | | | -9.5 | 3 | 1.0 |
| 32.0 | 43.5 | -10.7 | 4.8 | | | | -9.5 | 3 | 1.0 |
| 33.0 | 43.6 | -10.7 | 4.9 | | | | -9.5 | 3 | 1.0 |
| 34.0 | 43.6 | -10.6 | 5.0 | | | | -9.5 | 3 | 1.0 |
| 35.0 | 43.6 | -10.5 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 36.0 | 43.6 | -10.4 | 5.1 | | | | -9.5 | 3 | 1.0 |
| 37.0 | 43.7 | -10.3 | 5.2 | | | | -9.5 | 3 | 1.0 |
| 38.0 | 43.7 | -10.2 | 5.3 | | | | -9.5 | 3 | 1.0 |
| 39.0 | 43.7 | -10.2 | 5.4 | | | | -9.5 | 3 | 1.0 |
| 40.0 | 43.8 | -10.1 | 5.5 | | | | -9.5 | 3 | 1.0 |

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.


8 PHOTO REPORT

Please see separate photo report.

9 MEASUREMENT UNCERTAINTIES

| Test Case | Parameter | Uncertainty |
|--------------------------------------|--------------------|------------------------|
| AC Power Line | Power | ± 3.4 dB |
| Field Strength of spurious radiation | Power | ± 5.5 dB |
| 6 dB / 26 dB / 99% Bandwidth | Power Frequency | ± 2.9 dB ± 11.2 kHz |
| Conducted Output Power | Power | ± 2.2 dB |
| Band Edge Compliance | Power Frequency | ± 2.2 dB ± 11.2 kHz |
| Frequency Stability | Frequency | ± 25 Hz |
| Power Spectral Density | Power | ± 2.2 dB |

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

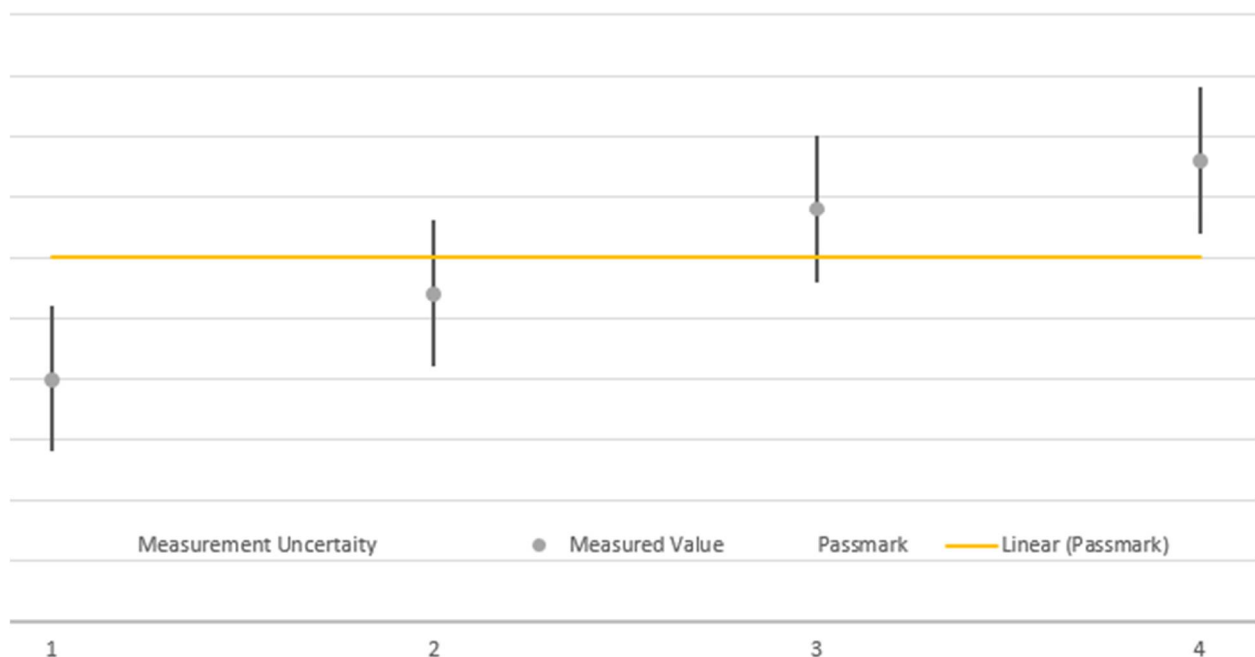


The verdicts in this test report are given according the above diagram:


| Case | Measured Value | Uncertainty Range | Verdict |
|------|-----------------|-------------------|---------|
| 1 | below pass mark | below pass mark | Passed |
| 2 | below pass mark | within pass mark | Passed |
| 3 | above pass mark | within pass mark | Failed |
| 4 | above pass mark | above pass mark | Failed |

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.

10 ANNEX: DUTY CYCLE PLOTS

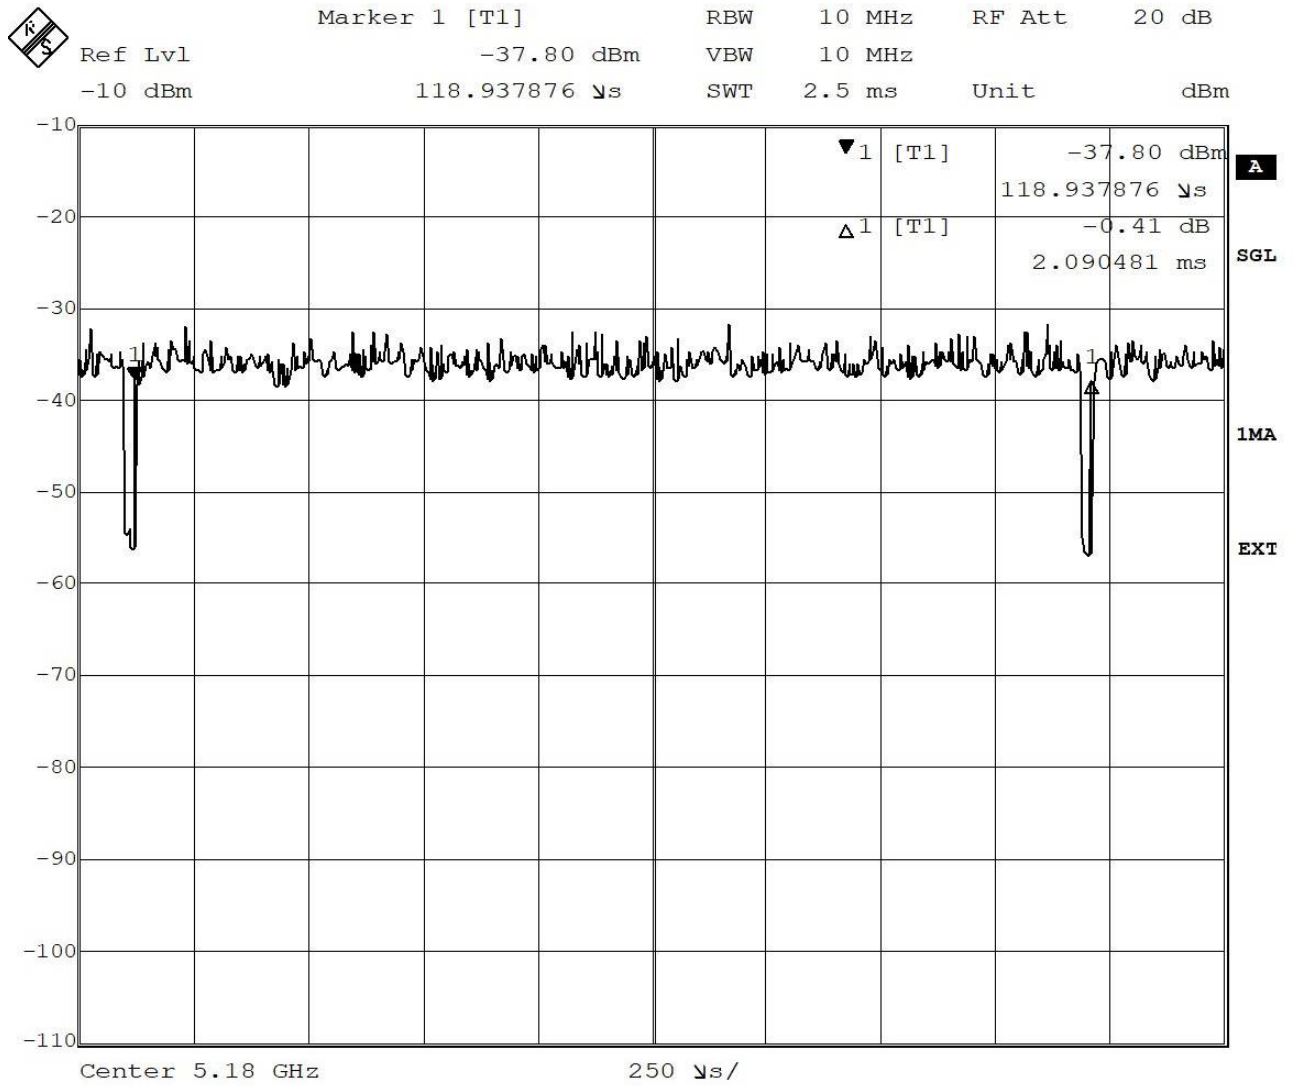

Period: 2.09 ms

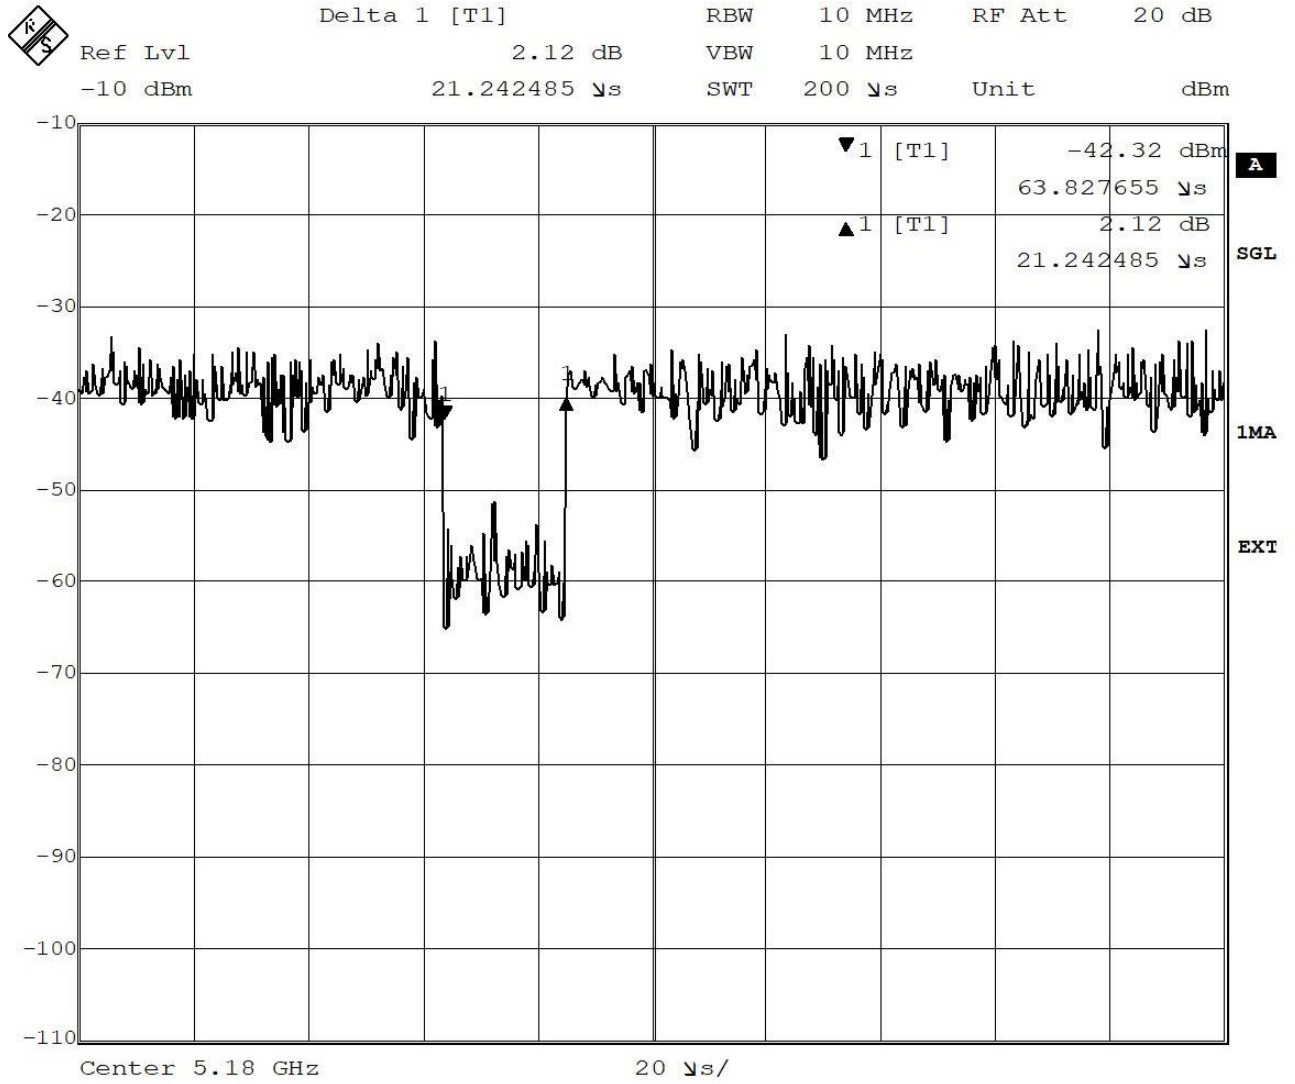

Gap: 21.24 μ s