



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15B

TEST REPORT

For

#electronics hub llc

3560 NW, 72nd Avenue 33122 miami Florida United States

#FCC ID: 2AT5LALLIGATOR

Report Type: Original Report	# Product Type: Mobile Phone
Report Number: RDG190903004-00D	
Report Date: 2019-10-08	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	
Test Laboratory:	

TABLE OF CONTENTS

General Information	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
System Test Configuration	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EQUIPMENT MODIFICATIONS.....	5
EUT EXERCISE SOFTWARE	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS.....	5
BLOCK DIAGRAM OF TEST SETUP	6
TEST EQUIPMENT LIST	7
ENVIRONMENTAL CONDITIONS	8
Summary of Test Results.....	9
Conducted emissions.....	10
EUT SETUP	10
EMI TEST RECEIVER SETUP	10
TEST PROCEDURE.....	10
TEST DATA.....	12
Radiated emissions.....	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	15
TEST PROCEDURE.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
TEST DATA.....	16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

#	EUT Name:	Mobile Phone
#	EUT Model:	alligator
Highest Operation Frequency:	2480 MHz	
Rated Input Voltage:	DC 3.7V from battery or DC 5V from adapter	
# Adapter Information	Model:	JHC-A20UL50100
	Input:	100-240V~50/60Hz 0.3A Max
	Output:	5V 1000mA
External Dimension: 144.5mm(L)*75mm(W)*11mm(H)		
Serial Number: 190903004		
EUT Received Date: 2019/9/6		
EUT Status: The test samples were in good condition.		

Objective

This report is prepared on behalf of electronics hub llc in accordance with FCC Part 15B Part 2, subpart J, and Part 15, Subpart A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E PCE submissions with FCC ID: 2AT5LALLIGATOR

FCC Part 15C DSS submissions with FCC ID: 2AT5LALLIGATOR

FCC Part 15C DTS submissions with FCC ID: 2AT5LALLIGATOR

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1°C
Humidity	±5%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in downloading mode.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software


The software "Winthrax.exe" was used during test.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	293

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	Yes	No	0.8	USB Port of Laptop	EUT
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	Yes	Yes	1.8	USB Port of Laptop	Keyboard

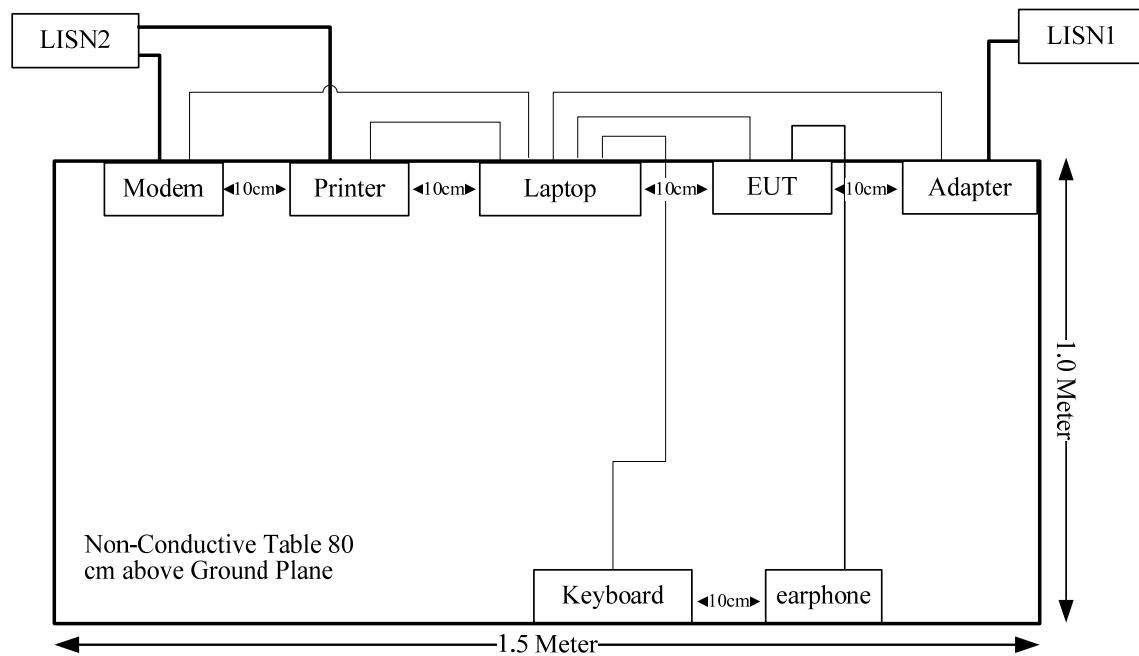Block Diagram of Test Setup

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emissions					
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2018-09-19	2019-09-19
Radiated emissions Below 1GHz					
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Radiated emissions Above 1GHz					
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2019-09-05	2020-09-05

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions


Test Item:	Conducted emissions	Radiated emissions Below 1GHz	Radiated emissions Above 1GHz
Test Date:	2019-09-10	2019-10-01	2019-09-11
Tester:	Sem Xing	Vern Shen	Lucy Lu
Temperature:	27.2°C	27.1°C	27.3°C
Relative Humidity:	64%	47%	58%
ATM Pressure:	100.1kPa	100.8kPa	100.3kPa

SUMMARY OF TEST RESULTS

Rule and Clause	Description of Test	Test Result
FCC §15.107	Conducted emissions	Compliance
FCC §15.109	Radiated emissions	Compliance

CONDUCTED EMISSIONS

EUT Setup

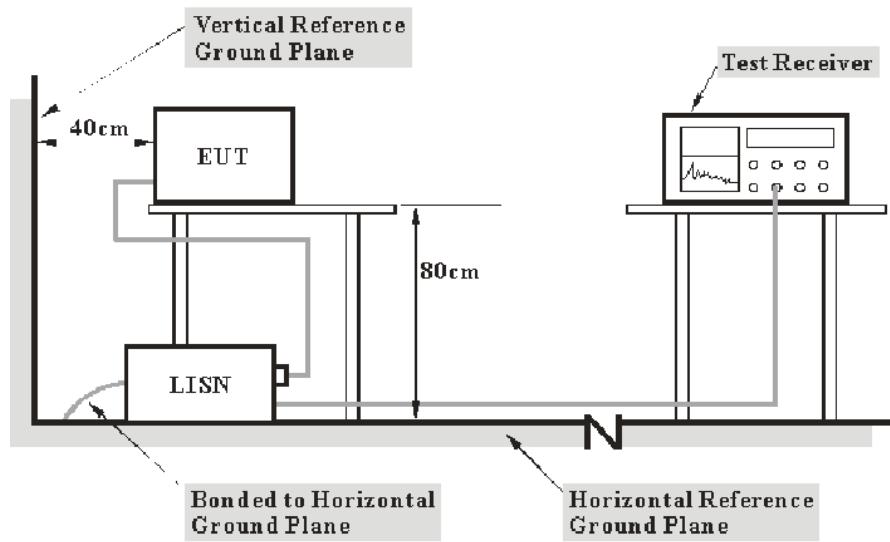

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the Main LISN with 120V/60Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the Adapter of Laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_c + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN


The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Please refer to following table and plots:

Port: L
 Test Mode: Downloading
 Power Source: AC120V/60Hz

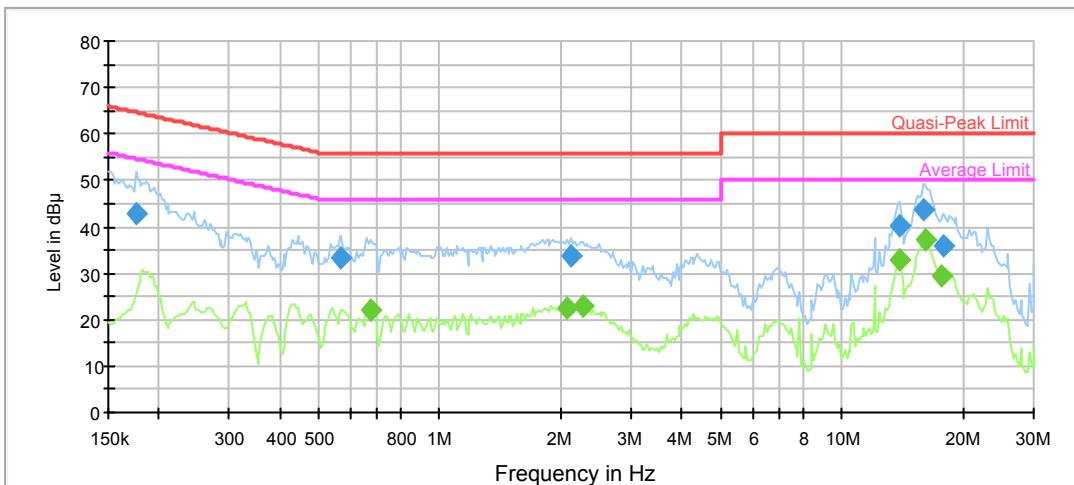


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.175887	42.8	9.000	L1	10.8	21.9	64.7
0.569057	33.3	9.000	L1	9.8	22.7	56.0
2.116299	33.5	9.000	L1	9.7	22.5	56.0
13.877672	40.1	9.000	L1	9.9	19.9	60.0
15.952026	43.5	9.000	L1	9.9	16.5	60.0
17.975142	36.1	9.000	L1	10.0	23.9	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.673937	22.1	9.000	L1	9.8	23.9	46.0
2.074599	22.6	9.000	L1	9.7	23.4	46.0
2.268959	22.7	9.000	L1	9.8	23.3	46.0
13.877672	32.8	9.000	L1	9.9	17.2	50.0
16.111546	37.1	9.000	L1	10.0	12.9	50.0
17.797171	29.3	9.000	L1	10.0	20.7	50.0

Port: N
 Test Mode: Downloading
 Power Source: AC120V/60Hz

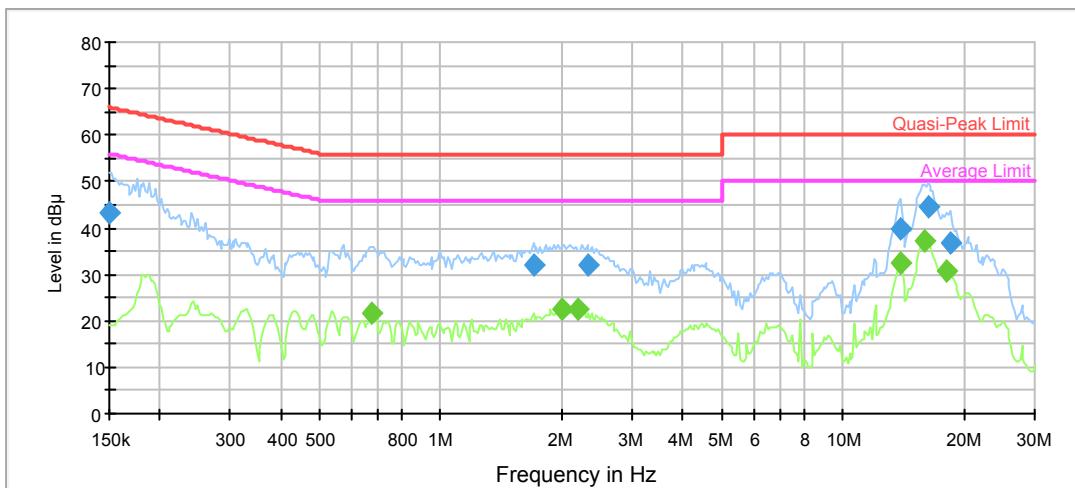

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	43.2	9.000	N	11.2	22.8	66.0
1.700226	32.1	9.000	N	9.8	23.9	56.0
2.314565	32.2	9.000	N	9.8	23.8	56.0
13.877672	39.8	9.000	N	9.9	20.2	60.0
16.272662	44.7	9.000	N	9.9	15.3	60.0
18.519807	37.0	9.000	N	10.0	23.0	60.0


Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.673937	21.7	9.000	N	9.8	24.3	46.0
2.013586	22.6	9.000	N	9.8	23.4	46.0
2.202229	22.6	9.000	N	9.8	23.4	46.0
13.877672	32.6	9.000	N	9.9	17.4	50.0
15.952026	37.3	9.000	N	9.9	12.7	50.0
18.154894	30.8	9.000	N	10.0	19.2	50.0


RADIATED EMISSIONS

EUT Setup

Below 1GHz:

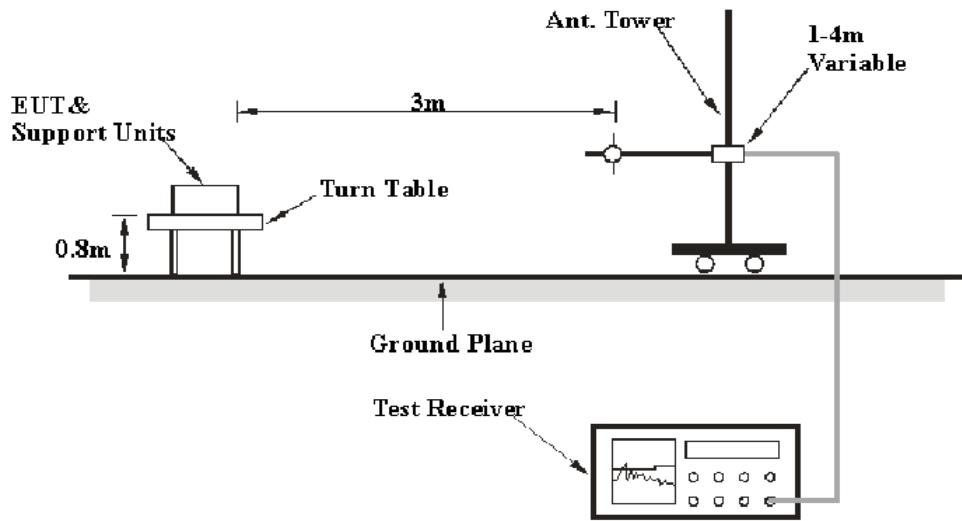

Above 1GHz:

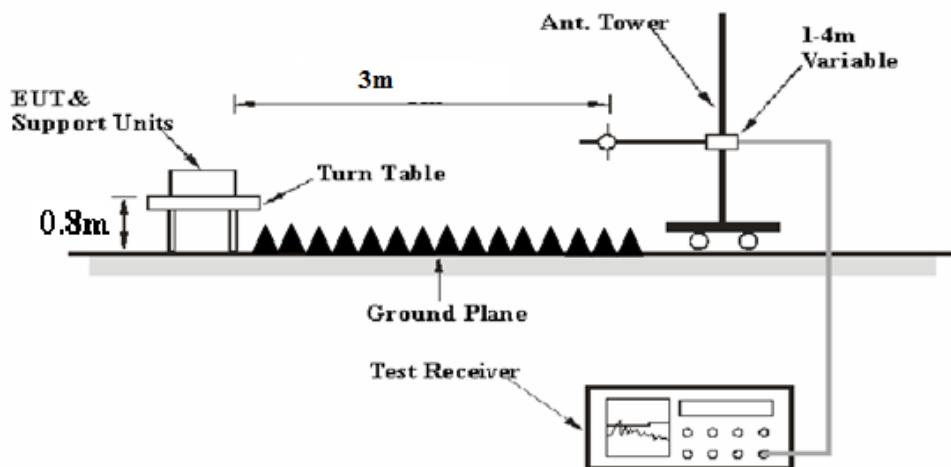

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emissions, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Meter Reading + Corrected

Note:

Corrected = Antenna Factor + Cable Loss - Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Limit} - \text{Result}$$

Test Data

Please refer to following table and plots:

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Test Mode: Downloading


Polarization: Horizontal
Power: AC 120V/60Hz
Distance: 3m

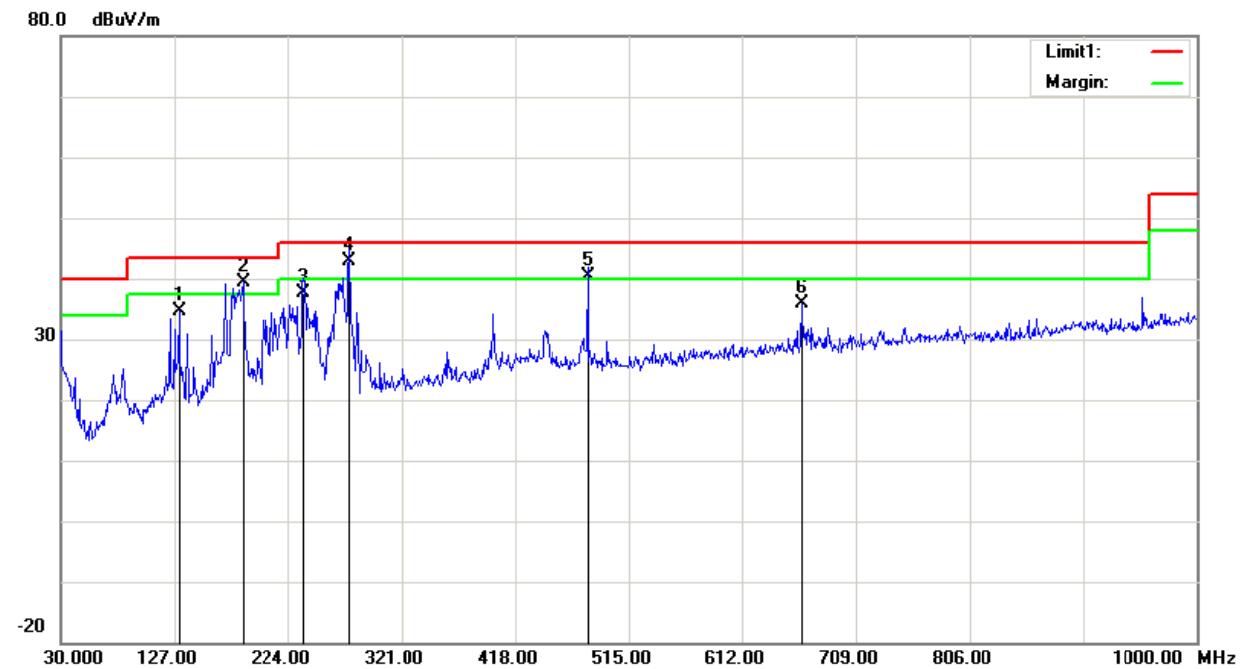

Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
130.8800	39.55	peak	-4.85	34.70	43.50	8.80
185.2000	46.70	QP	-7.40	39.30	43.50	4.20
237.5800	43.70	QP	-6.14	37.56	46.00	8.44
276.3800	46.97	QP	-4.14	42.83	46.00	3.17
480.0800	40.70	QP	-0.27	40.43	46.00	5.57
662.4400	33.63	peak	2.20	35.83	46.00	10.17

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Test Mode: Downloading


Polarization: Vertical
Power: AC 120V/60Hz
Distance: 3m

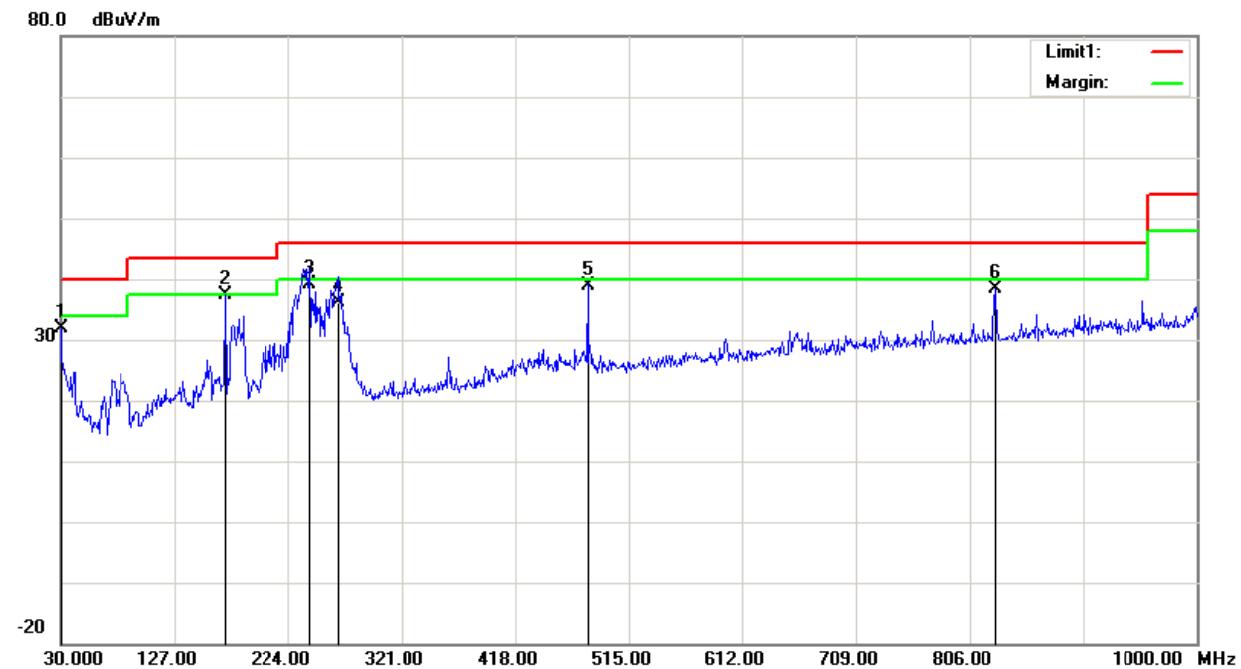

Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.000	30.23	peak	1.72	31.95	40.00	8.05
170.6500	44.10	peak	-6.63	37.47	43.50	6.03
242.4300	45.00	QP	-5.97	39.03	46.00	6.97
266.6800	40.70	QP	-4.46	36.24	46.00	9.76
480.0800	39.27	peak	-0.27	39.00	46.00	7.00
828.3100	33.31	peak	5.06	38.37	46.00	7.63

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Test Mode: Downloading


Polarization: Horizontal
Power: AC 120V/60Hz
Distance: 3m

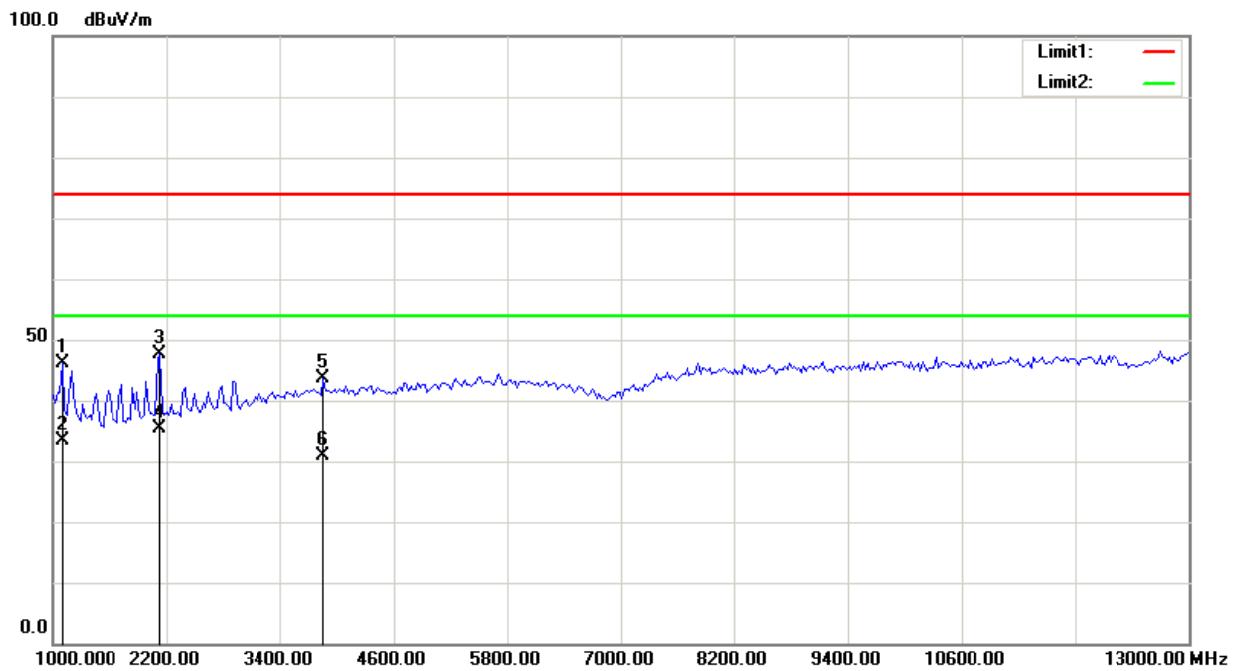

Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1096.192	58.05	peak	-11.83	46.22	74.00	27.78
1096.192	45.25	AVG	-11.83	33.42	54.00	20.58
2130.260	56.22	peak	-8.65	47.57	74.00	26.43
2130.260	44.12	AVG	-8.65	35.47	54.00	18.53
3861.723	48.41	peak	-4.86	43.55	74.00	30.45
3861.723	35.84	AVG	-4.86	30.98	54.00	23.02

Condition: FCC Part 15B Class B
EUT: Mobile Phone
Test Mode: Downloading

Polarization: Vertical
Power: AC 120V/60Hz
Distance: 3m

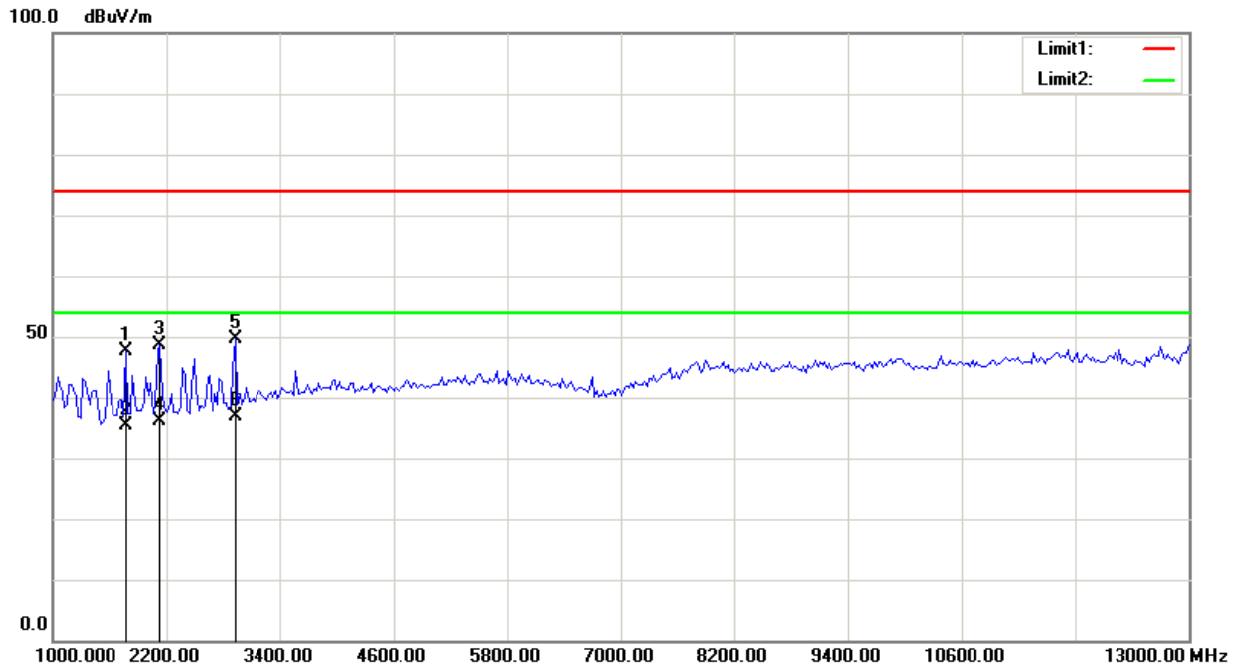

Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1769.539	57.17	peak	-9.64	47.53	74.00	26.47
1769.539	45.12	AVG	-9.64	35.48	54.00	18.52
2130.260	57.39	peak	-8.65	48.74	74.00	25.26
2130.260	44.78	AVG	-8.65	36.13	54.00	17.87
2923.848	56.98	peak	-7.26	49.72	74.00	24.28
2923.848	44.25	AVG	-7.26	36.99	54.00	17.01

Directions

1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This [report](#) cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
7. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.
8. This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★” .

*****END OF REPORT*****