



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E, PART 27 MEASUREMENT AND TEST REPORT

For

electronics hub llc

3560 NW, 72nd Avenue 33122 miami Florida United States

FCC ID: 2AT5LL283G

Report Type: Original Report	Product Type: Mobile Phone
Report Number: RDG191016001-00C	
Report Date: 2019-10-25	
Reviewed By: Jerry Zhang EMC Manager <i>Jerry Zhang</i>	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	6
SYSTEM TEST CONFIGURATION.....	7
JUSTIFICATION	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §1.1310 & §2.1093- RF EXPOSURE	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §2.1047 - MODULATION CHARACTERISTIC	11
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50- RF OUTPUT POWER.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS ...	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....49
 APPLICABLE STANDARD49
 TEST PROCEDURE49
 TEST EQUIPMENT LIST AND DETAILS.....50
 TEST DATA50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile Phone
EUT Model:		L28
Operation modes:		GSM Voice, GPRS Data, WCDMA(R99 (Voice+Data), HSDPA/HSUPA/HSPA+)
Operation Frequency:		GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 4: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX)
Maximum Output Power: (Conducted)		GSM 850 : 31.55dBm; PCS 1900: 30.21 dBm WCDMA Band 2: 22.88 dBm; WCDMA Band 4: 22.71 dBm; WCDMA Band 5: 22.37 dBm
Modulation Type:		GMSK, QPSK, 16QAM
Rated Input Voltage:		3.8V DC from battery or 5V DC from adapter
Adapter Information	Model:	JHC-A20UL50100
	Input:	100-240V 50/60Hz 0.3A Max
	Output:	5.0Vdc 1000mA
External Dimension:		132mm(L) * 63mm(W) * 21mm(H)
Serial Number:		191016001
EUT Received Date:		2019.10.16
EUT Status:		Good

Objective

This report is prepared on behalf of **electronics hub llc** in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E, Part 27 of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2AT5LL283G
FCC Part 15C DSS submissions with FCC ID: 2AT5LL283G

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz:5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	106 891
Un-Known	ANTENNA	Un-Known	Un-Known

Configuration of Test Setup

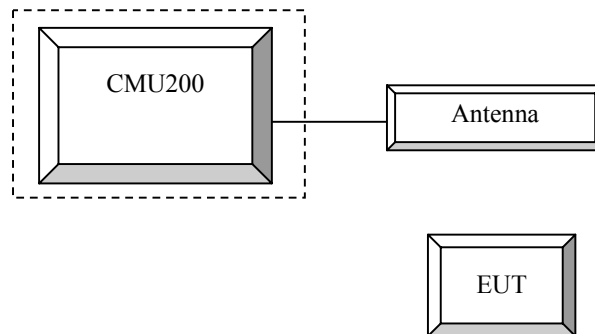

Block Diagram of Test Setup

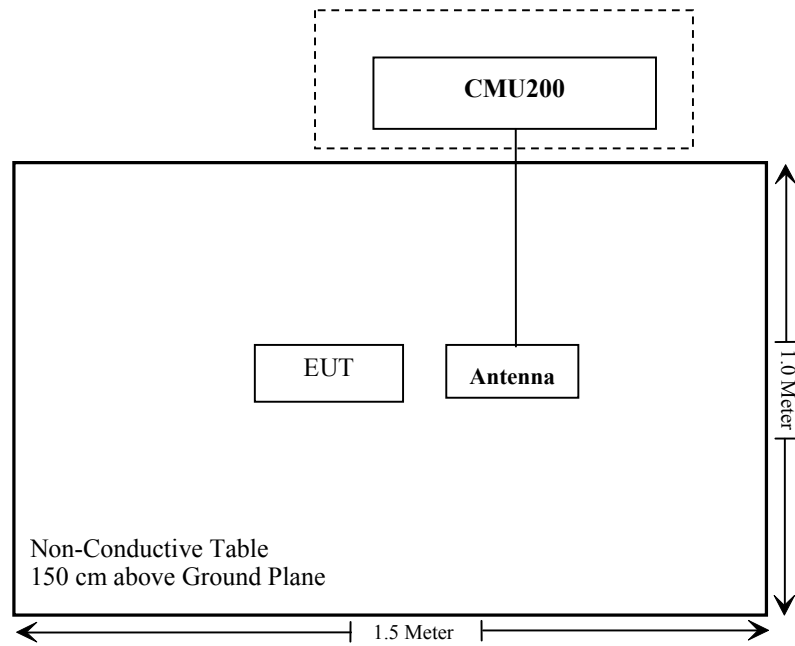

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§1.1310, §2.1093	RF Exposure	Compliance
FCC§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
FCC§ 22.917 (a); § 24.238 (a); §27.53;	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RDG191016001-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50- RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test Items:	Radiation Below 1GHz	Radiation Above 1GHz	Conducted Output Power
Temperature:	26.5 °C	26.6 °C	25.1 °C
Relative Humidity:	47%	48 %	58 %
ATM Pressure:	100.2 kPa	100.2 kPa	100.9 kPa
Tester:	Neil Liao	Lucy Lu	Severn Zhu
Test Date:	2019-10-23	2019-10-23	2019-10-18

Test Result: Compliance

Conducted Output Power**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)				
		GSM	GPRS 1 uplink slot	GPRS 2 uplink slot	GPRS 3 uplink slot	GPRS 4 uplink slot
Cellular	128	31.1	31.32	29.71	25.92	25.47
	190	31.5	31.48	29.73	27.61	25.59
	251	31.5	31.55	29.82	27.67	25.58
PCS	512	29.6	29.56	27.39	25.67	23.49
	661	29.7	29.64	27.41	25.78	23.77
	810	30.2	30.21	27.69	25.86	23.92

WCDMA Band 2

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.77	3.08	22.88	3.24	22.87	2.98
HSDPA	1	22.36	3.91	22.41	4.42	22.54	4.07
	2	22.19	3.87	22.37	4.38	22.49	4.05
	3	22.22	3.85	22.42	4.34	22.53	4.09
	4	22.34	3.92	22.39	4.43	22.42	4.06
HSUPA	1	22.12	4.17	22.14	4.42	22.28	4.04
	2	22.09	4.15	22.13	4.42	22.24	4.03
	3	22.24	4.19	22.17	4.37	22.19	4.04
	4	22.15	4.13	22.07	4.41	22.21	4.06
	5	22.27	4.11	22.08	4.39	22.27	4.01
HSPA+ (16QAM)	1	22.13	4.12	22.21	4.43	22.32	4.11

WCDMA Band 4

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.71	2.15	22.07	2.44	21.64	2.31
HSDPA	1	21.41	3.43	21.23	4.04	20.48	3.72
	2	22.37	3.41	21.21	4.01	20.39	3.69
	3	22.34	3.47	21.14	4.03	20.42	3.74
	4	22.42	3.44	21.17	4.05	20.45	3.71
HSUPA	1	21.11	3.69	20.91	4.01	20.23	3.85
	2	22.12	3.67	20.88	3.98	20.24	3.84
	3	22.07	3.72	20.85	3.86	20.21	3.82
	4	22.11	3.65	20.92	4.06	20.19	3.91
	5	22.06	3.69	20.84	4.02	20.17	3.88
HSPA+ (16QAM)	1	22.12	3.51	21.05	4.07	20.34	3.94

WCDMA Band 5

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.28	2.56	22.37	2.21	22.16	2.37
HSDPA	1	20.68	3.88	20.73	3.59	20.79	3.94
	2	20.65	3.83	20.67	3.54	20.72	3.92
	3	20.63	3.87	20.64	3.55	20.77	3.94
	4	20.67	3.88	20.72	3.59	20.69	3.91
HSUPA	1	20.31	4.01	20.42	3.85	20.49	3.81
	2	20.28	4.03	20.37	3.85	20.52	3.83
	3	20.19	3.87	20.41	3.89	20.47	3.79
	4	20.24	3.92	20.35	3.81	20.44	3.77
	5	20.21	3.99	20.37	3.84	20.53	3.84
HSPA+ (16QAM)	1	20.27	4.05	20.39	3.88	20.59	3.89

ERP & EIRP

Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Middle Channel								
836.60	H	90.21	15.29	0.00	0.97	14.32	38.45	24.13
836.60	V	102.38	30.59	0.00	0.97	29.62	38.45	8.83
WCDMA R99 Band 5 middle channel								
836.60	H	81.57	6.65	0.00	0.97	5.68	38.45	32.77
836.60	V	95.49	23.70	0.00	0.97	22.73	38.45	15.72

Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900 Middle Channel								
1880.00	H	91.91	19.30	11.66	2.66	28.30	33.00	4.70
1880.00	V	89.46	16.99	11.66	2.66	25.99	33.00	7.01
WCDMA R99 Band 2 middle channel								
1880.00	H	87.55	14.94	11.66	2.66	23.94	33.00	9.06
1880.00	V	87.70	15.23	11.66	2.66	24.23	33.00	8.77

Part 27

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA R99 Band 4 middle channel								
1732.60	H	85.20	11.15	10.90	2.51	19.54	30.00	10.46
1732.60	V	88.34	13.97	10.90	2.51	22.36	30.00	7.64

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

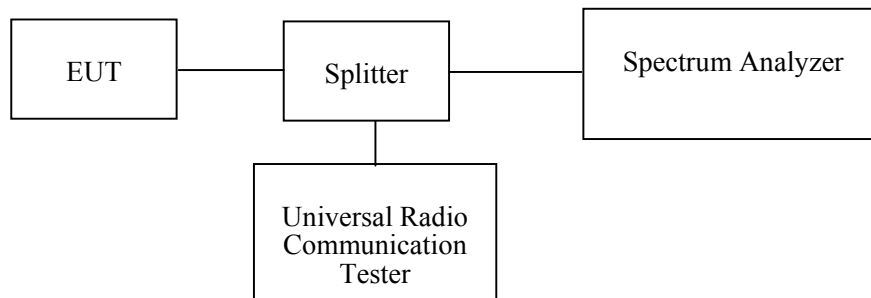**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	23.5~25.1 °C
Relative Humidity:	47~58 %
ATM Pressure:	100.9~101.6 kPa
Tester:	Severn Zhu
Test Date:	2019-10-17~2019-10-19

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	Middle	GSM	0.244	0.319
PCS		GSM	0.248	0.317
WCDMA Band 2		Rel 99	4.100	4.679
		HSDPA	4.100	4.678
		HSUPA	4.100	4.696
WCDMA Band 4		Rel 99	4.100	4.712
		HSDPA	4.102	4.679
		HSUPA	4.103	4.696
WCDMA Band 5		Rel 99	4.119	4.760
		HSDPA	4.119	4.744
		HSUPA	4.119	4.760

GSM Cellular 850

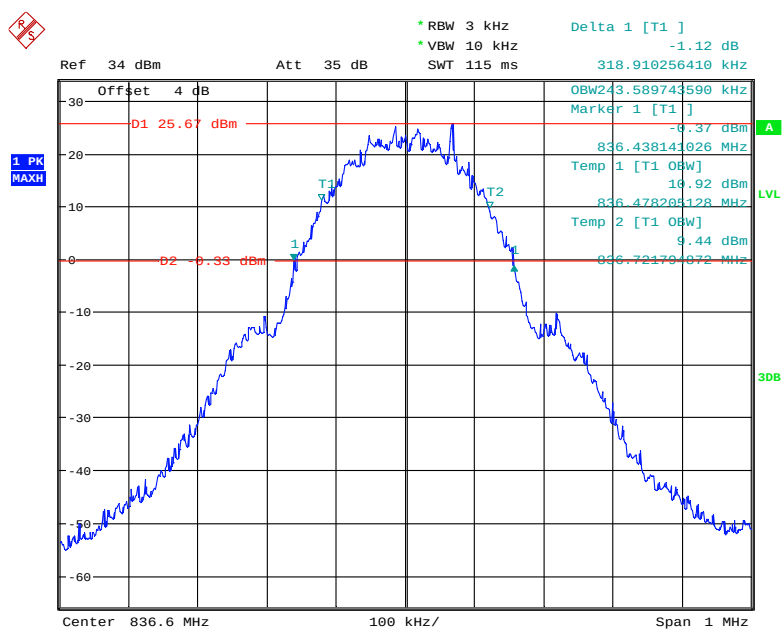


Date: 17.OCT.2019 23:19:33

GSM PCS 1900

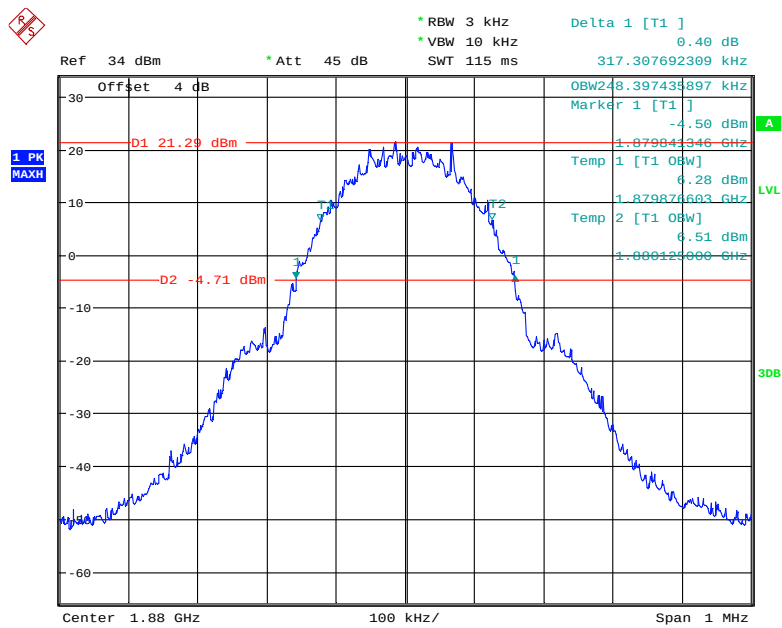


Date: 17.OCT.2019 23:33:53

WCDMA Band 2 Rel 99

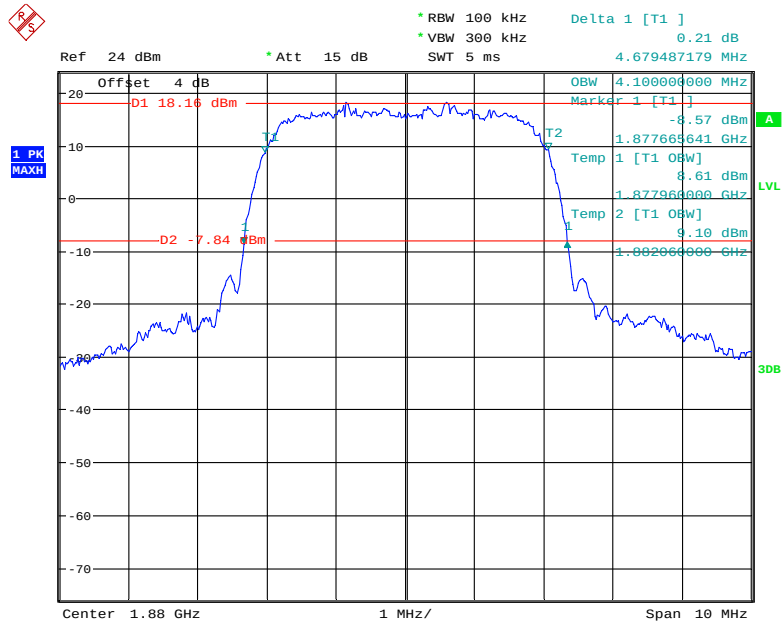


Date: 18.OCT.2019 00:48:46

WCDMA Band 2 HSDPA

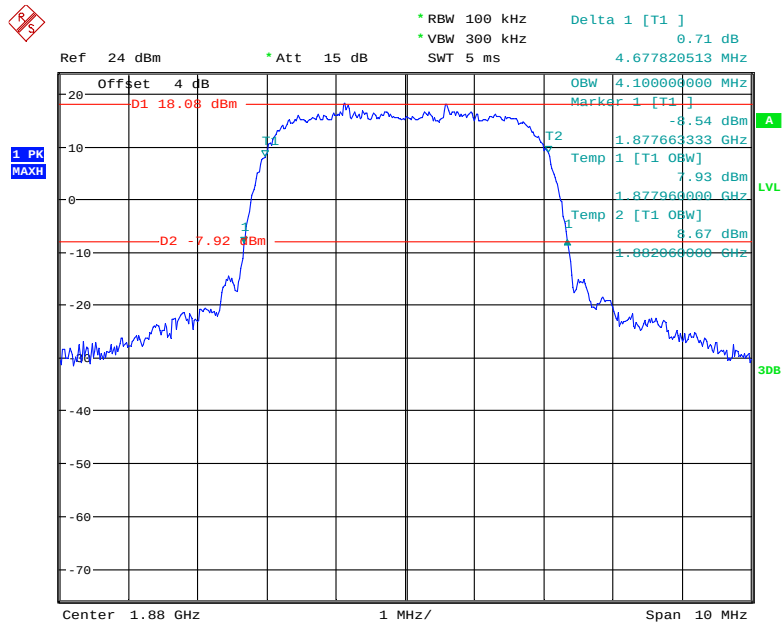


Date: 18.OCT.2019 01:00:16

WCDMA Band 2 HSUPA

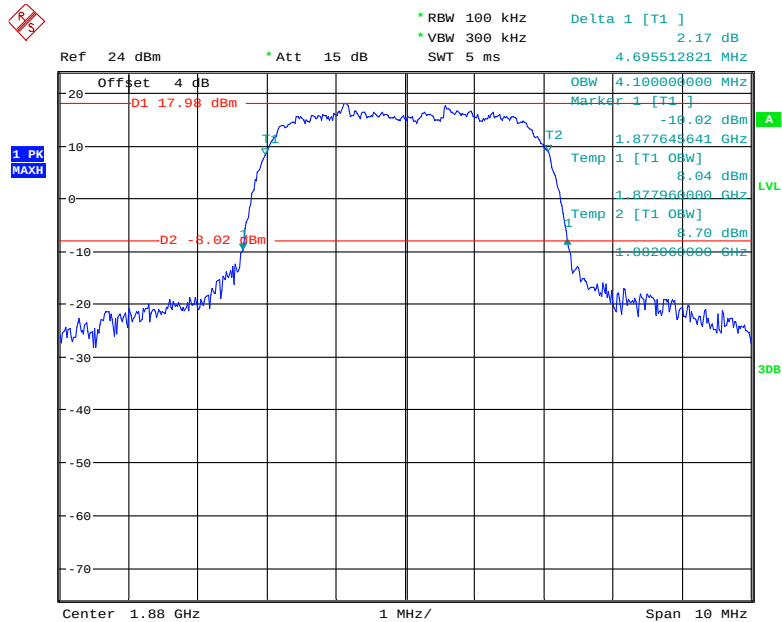


Date: 18.OCT.2019 01:17:19

WCDMA Band 4 Rel 99

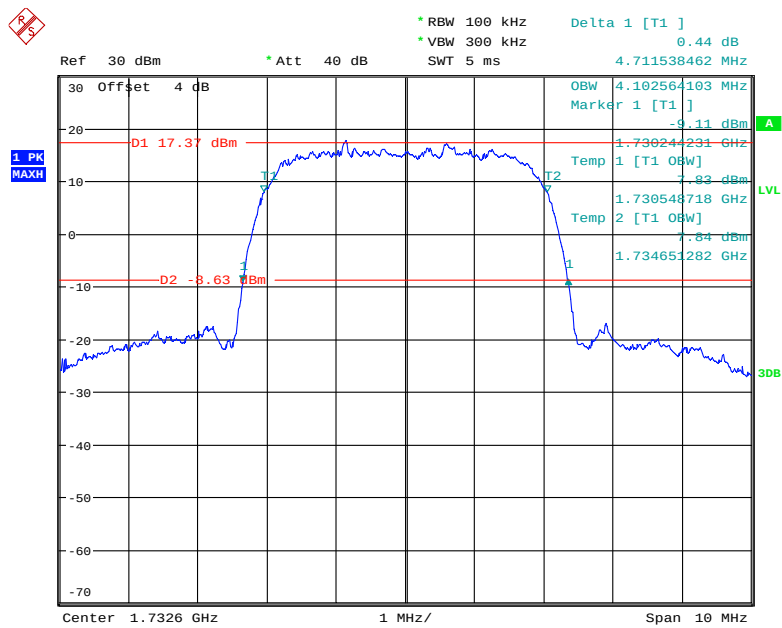


Date: 19.OCT.2019 00:59:36

WCDMA Band 4 HSDPA

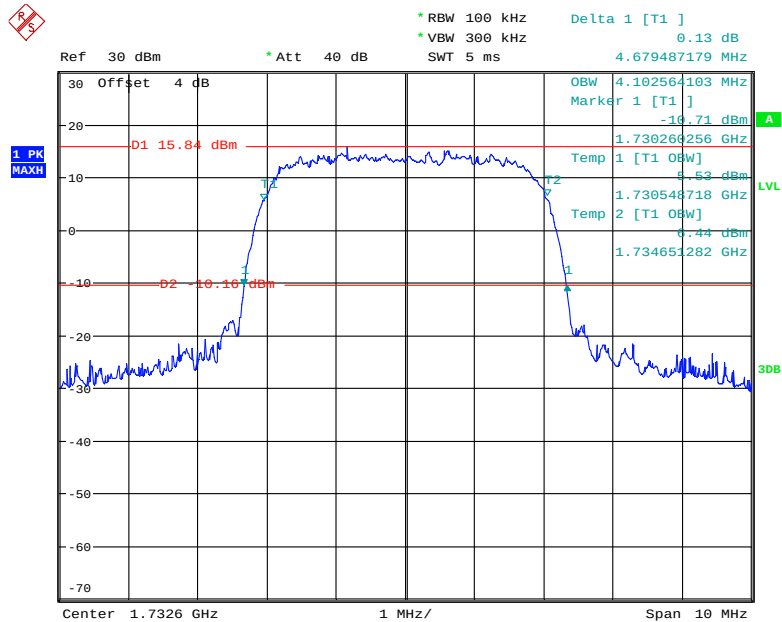


Date: 19.OCT.2019 01:13:45

WCDMA Band 4 HSUPA

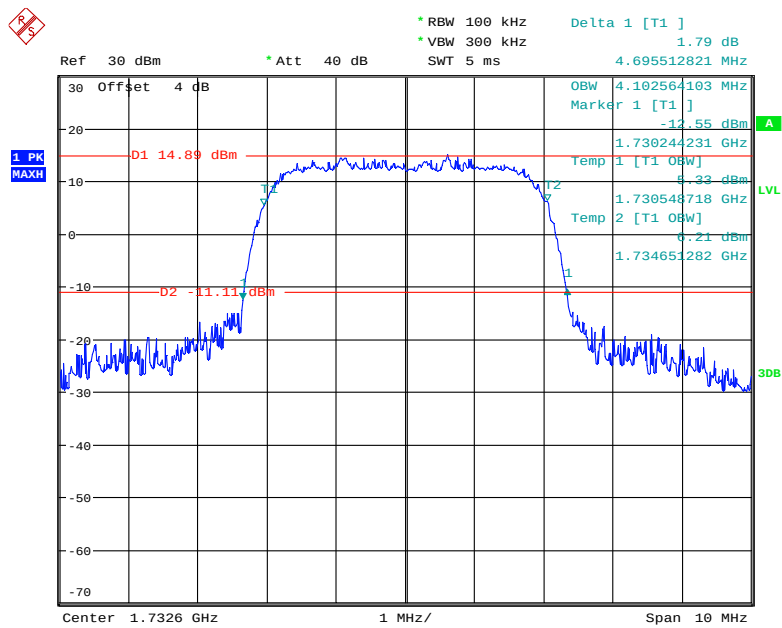


Date: 19.OCT.2019 01:15:22

WCDMA Band 5 Rel 99

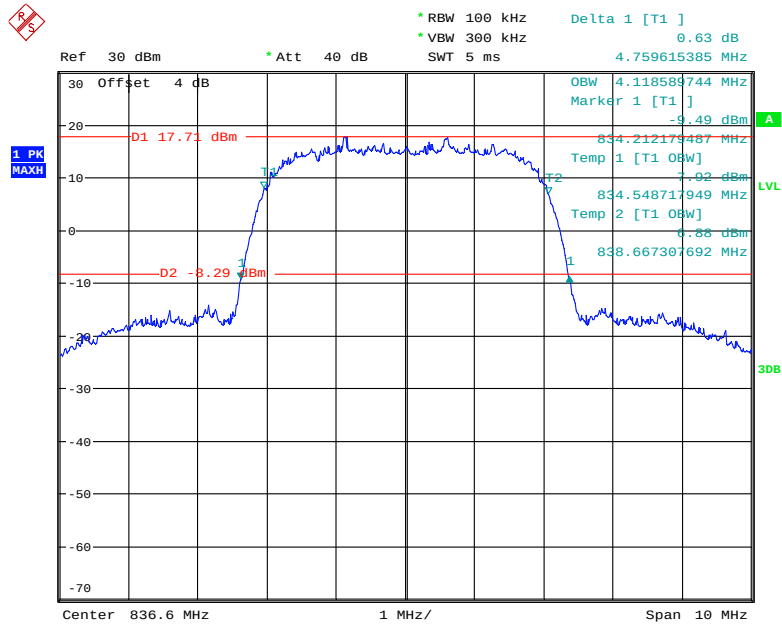


Date: 19.OCT.2019 01:38:29

WCDMA Band 5 HSDPA

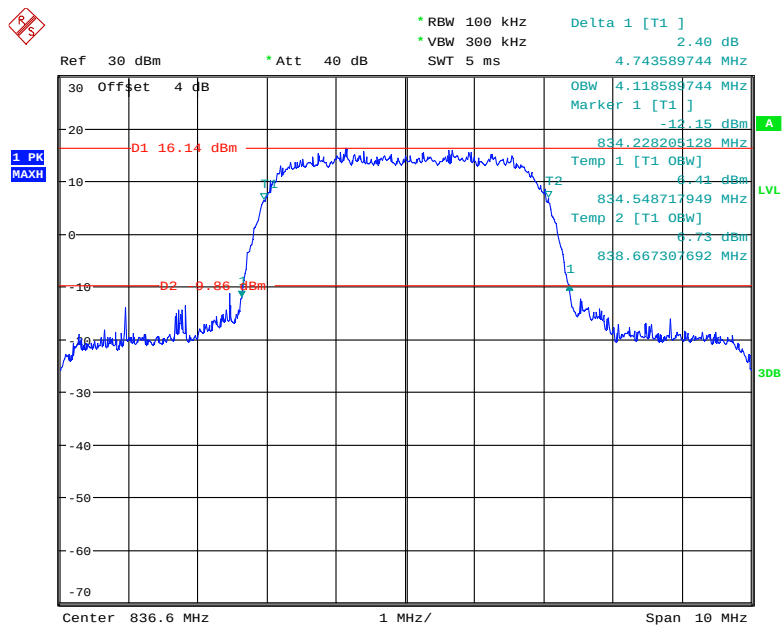

Date: 19.OCT.2019 01:41:46

WCDMA Band 5 HSUPA

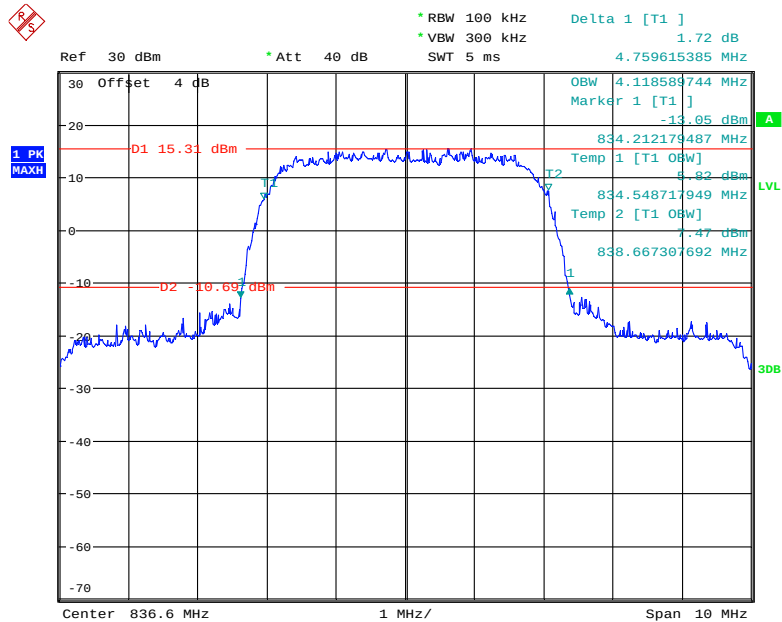

Date: 19.OCT.2019 01:40:00

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

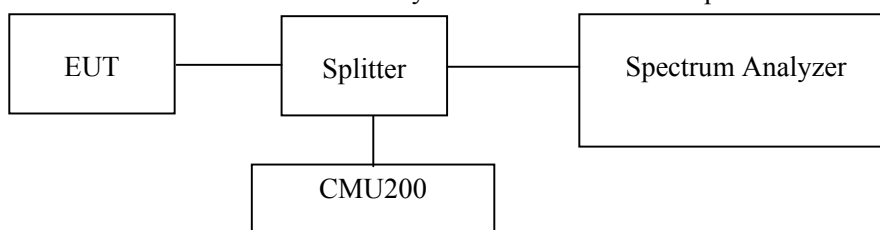

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions


Temperature:	23.5~25.1 °C
Relative Humidity:	47~58 %
ATM Pressure:	100.9~101.6 kPa
Tester:	Severn Zhu
Test Date:	2019-10-17~2019-10-19

Test Result: Compliance. Please refer to the following plots.

GSM850 Middle Channel

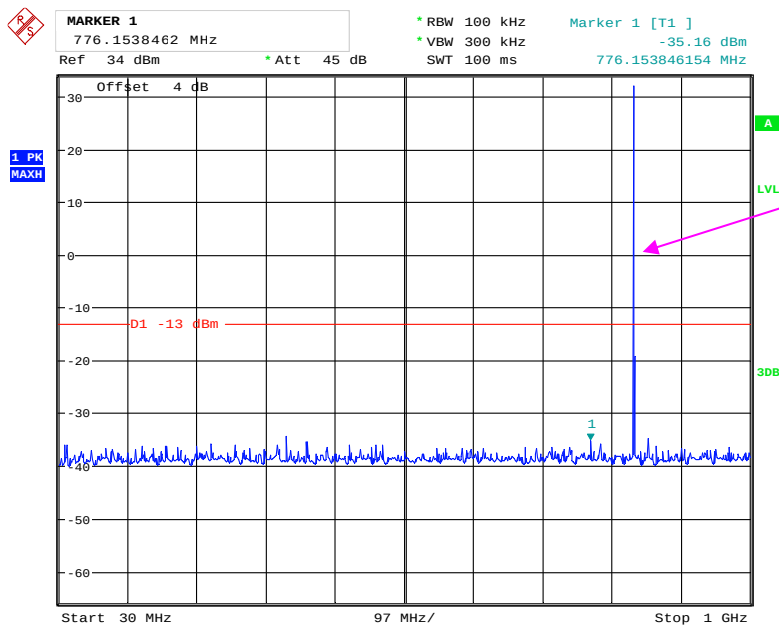


Date: 17.OCT.2019 23:22:08

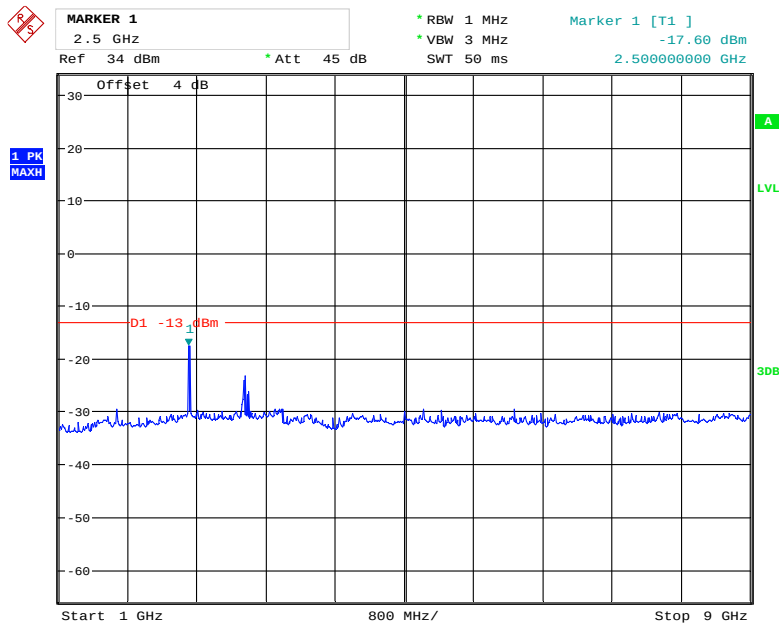


Date: 17.OCT.2019 23:22:51

PCS 1900 Middle Channel

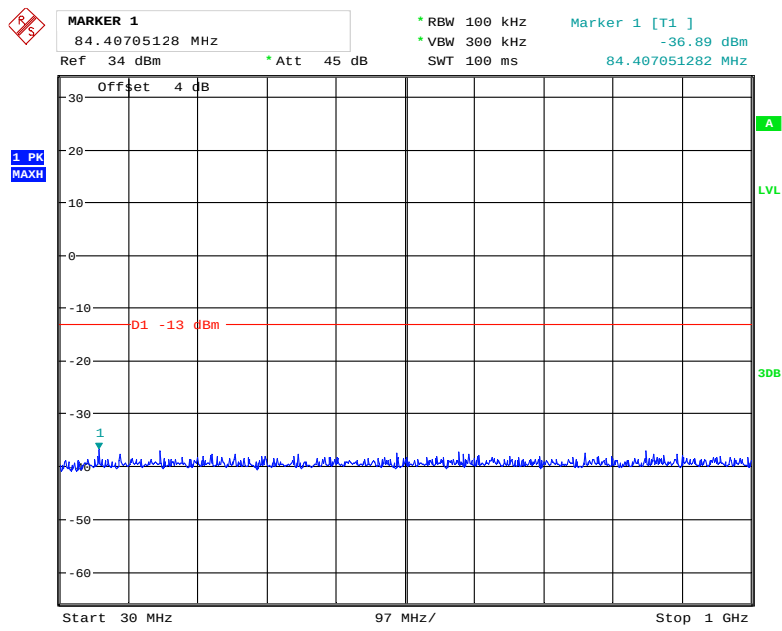


Date: 17.OCT.2019 23:31:03

Fundamental

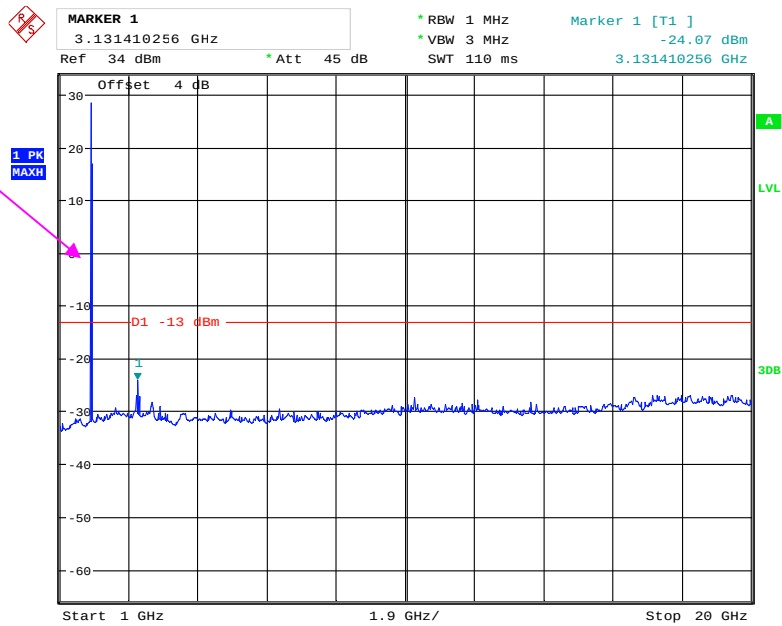


Date: 17.OCT.2019 23:29:22

WCDMA Band 2 Rel 99 Middle Channel

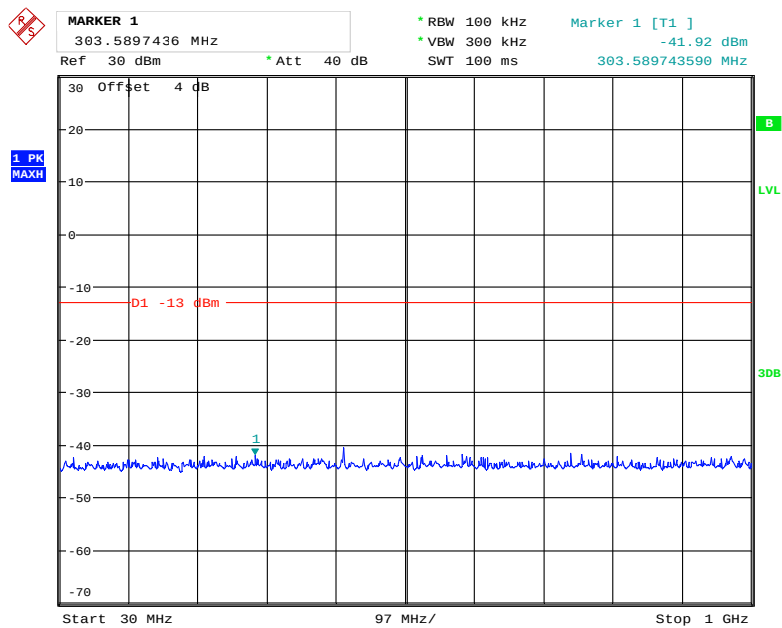


Date: 18.OCT.2019 00:45:45

Fundamental

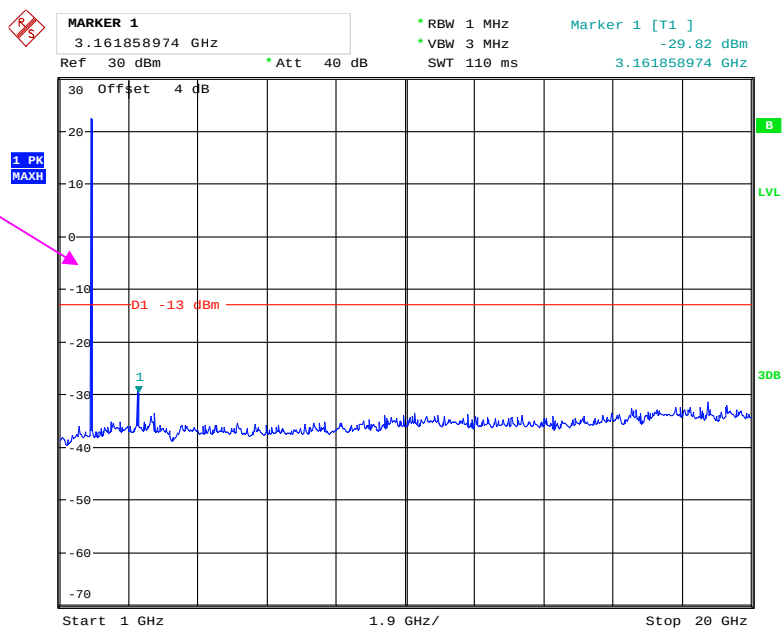


Date: 18.OCT.2019 00:46:19

WCDMA Band 4 Rel 99 Middle Channel

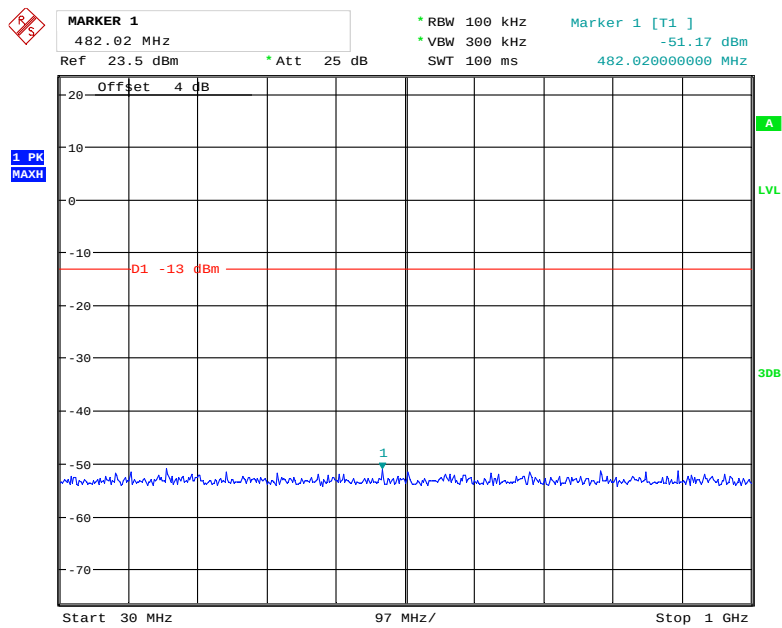


Date: 19.OCT.2019 00:23:19

Fundamental

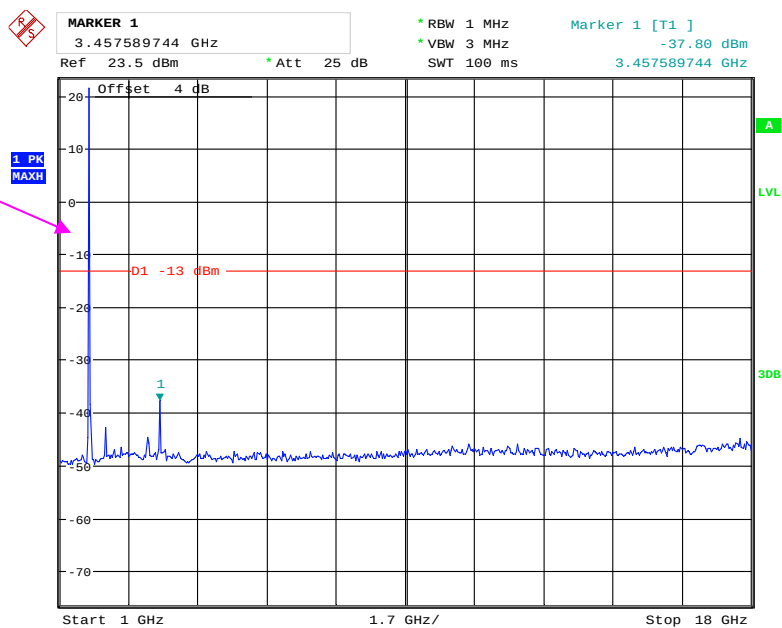


Date: 19.OCT.2019 00:24:06

WCDMA Band 5 Rel 99 Middle Channel

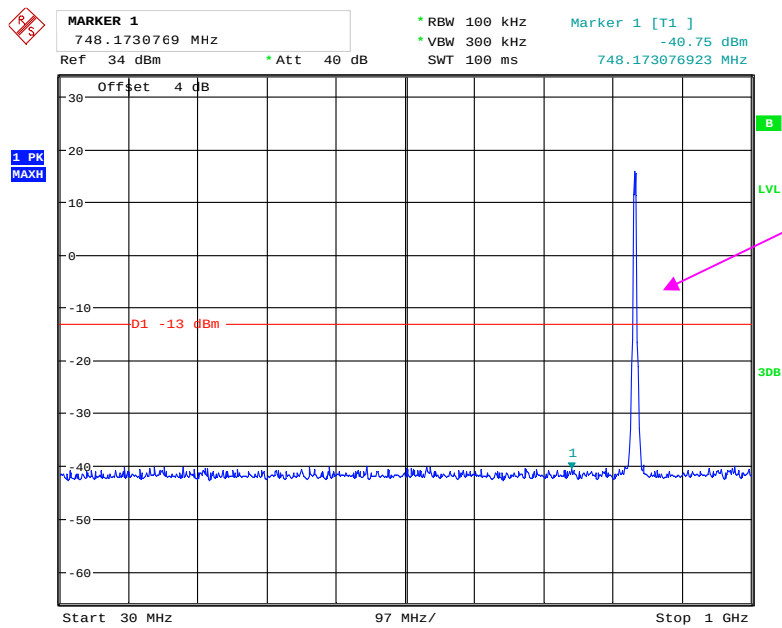

Date: 19.OCT.2019 01:35:25

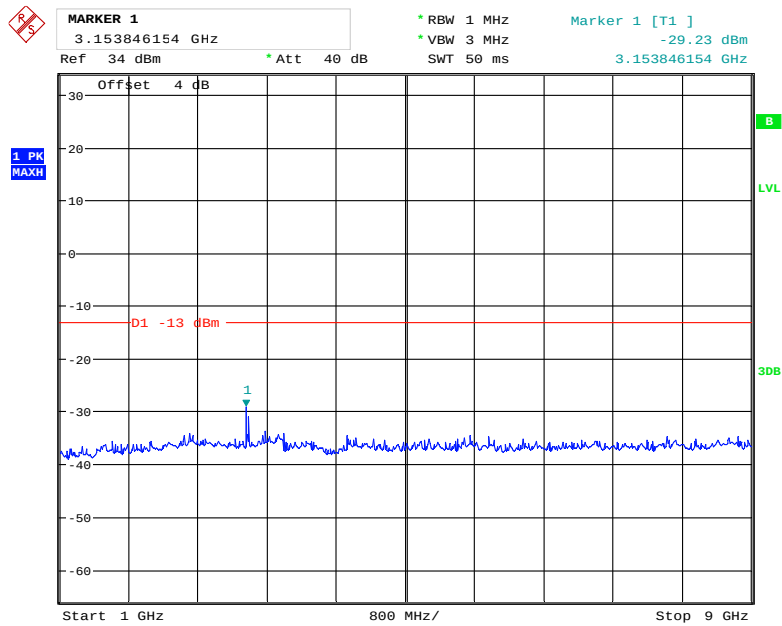

Date: 19.OCT.2019 01:36:01

FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53;

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	Not Required	/
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2019-09-05	2020-09-05
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2019-09-05	2020-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
Sinoscite	Band-stop filter	BSF1710-1785MN-0383-003	0383003	2019-06-16	2020-06-16
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2019-06-16	2020-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	26.5 °C	26.6 °C
Relative Humidity:	47%	48 %
ATM Pressure:	100.2 kPa	100.2 kPa
Tester:	Neil Liao	Lucy Lu
Test Date:	2019-10-23	2019-10-23

Test Result: Compliance.

*EUT Operation Mode: Transmitting***Cellular Band (PART 22H)****30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850, Frequency:836.600 MHz								
1673.200	H	57.53	-56.68	10.6	0.73	-46.8	-13.0	33.8
1673.200	V	55.75	-59.06	10.6	0.73	-49.2	-13.0	36.2
2509.800	H	57.49	-55.53	13.1	1.25	-43.7	-13.0	30.7
2509.800	V	58.21	-54.84	13.1	1.25	-43.0	-13.0	30.0
3346.400	H	44.25	-66.41	13.8	1.61	-54.2	-13.0	41.2
3346.400	V	45.34	-65.37	13.8	1.61	-53.2	-13.0	40.2
767.700	H	36.54	-63.01	0.0	0.93	-63.9	-13.0	50.9
767.700	V	38.15	-64.74	0.0	0.93	-65.7	-13.0	52.7
WCDMA Band V, Frequency:836.600 MHz								
1673.200	H	49.94	-64.27	10.6	0.73	-54.4	-13.0	41.4
1673.200	V	46.57	-68.24	10.6	0.73	-58.4	-13.0	45.4
2509.800	H	47.82	-65.2	13.1	1.25	-53.3	-13.0	40.3
2509.800	V	49.79	-63.26	13.1	1.25	-51.4	-13.0	38.4
3346.400	H	45.13	-65.53	13.8	1.61	-53.3	-13.0	40.3
3346.400	V	45.24	-65.47	13.8	1.61	-53.3	-13.0	40.3
767.700	H	36.47	-63.08	0.0	0.93	-64.0	-13.0	51.0
767.700	V	38.59	-64.3	0.0	0.93	-65.2	-13.0	52.2

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Frequency:1880.000 MHz								
3760.000	H	54.76	-54.04	13.8	1.63	-41.9	-13.0	28.9
3760.000	V	54.16	-54.51	13.8	1.63	-42.4	-13.0	29.4
5640.000	H	52.67	-53.36	14.0	1.31	-40.7	-13.0	27.7
5640.000	V	56.15	-49.76	14.0	1.31	-37.1	-13.0	24.1
767.700	H	35.81	-63.74	0.0	0.93	-64.7	-13.0	51.7
767.700	V	38.78	-64.11	0.0	0.93	-65.0	-13.0	52.0
WCDMA Band II, Frequency:1880.000 MHz								
3760.000	H	61.56	-47.24	13.8	1.63	-35.1	-13.0	22.1
3760.000	V	65.92	-42.75	13.8	1.63	-30.6	-13.0	17.6
5640.000	H	57.21	-48.82	14.0	1.31	-36.1	-13.0	23.1
5640.000	V	60.73	-45.18	14.0	1.31	-32.5	-13.0	19.5
767.700	H	36.33	-63.22	0.0	0.93	-64.2	-13.0	51.2
767.700	V	39.70	-63.19	0.0	0.93	-64.1	-13.0	51.1

AWS Band (PART 27)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band IV, Frequency:1732.600 MHz								
3465.200	H	52.62	-57.62	13.9	1.62	-45.3	-13.0	32.3
3465.200	V	52.54	-57.73	13.9	1.62	-45.5	-13.0	32.5
5197.800	H	55.63	-50.79	14.0	1.52	-38.3	-13.0	25.3
5197.800	V	54.99	-51.5	14.0	1.52	-39.0	-13.0	26.0
767.700	H	35.97	-63.58	0.0	0.93	-64.5	-13.0	51.5
767.700	V	38.45	-64.44	0.0	0.93	-65.4	-13.0	52.4

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES


Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

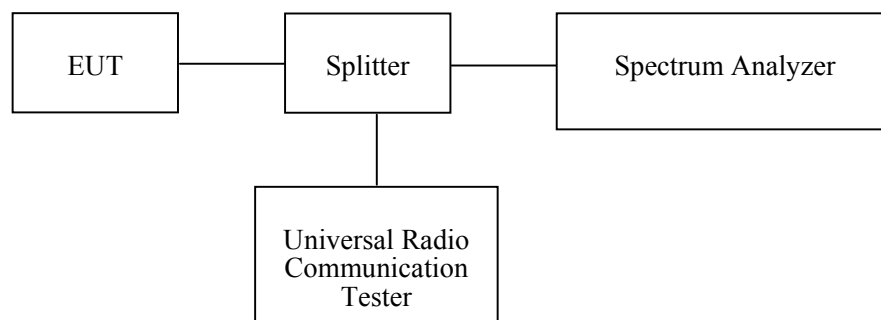

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010013	Each time	/
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	/
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	23.5~25.1 °C
Relative Humidity:	47~58 %
ATM Pressure:	100.9~101.6 kPa
Tester:	Severn Zhu
Test Date:	2019-10-17~2019-10-19

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

GSM 850, Left Band Edge

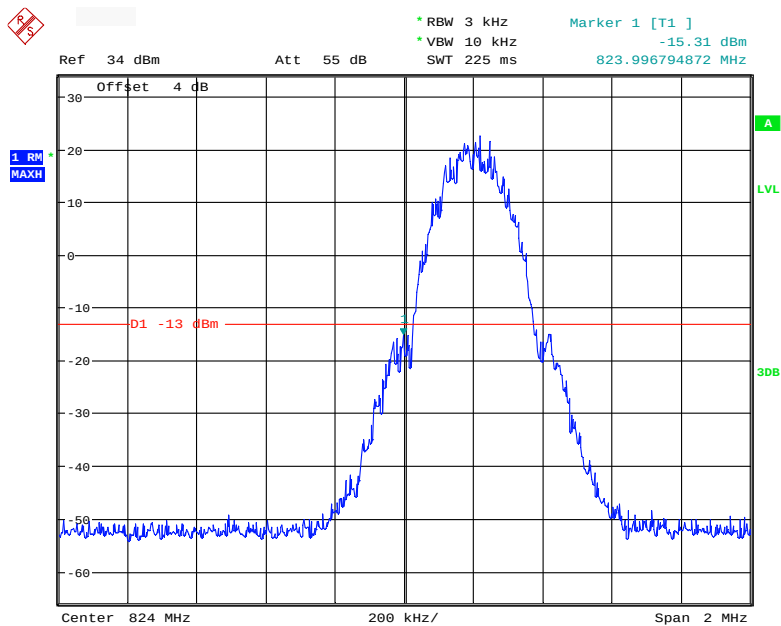


Date: 17.OCT.2019 23:15:50

GSM 850, Right Band Edge

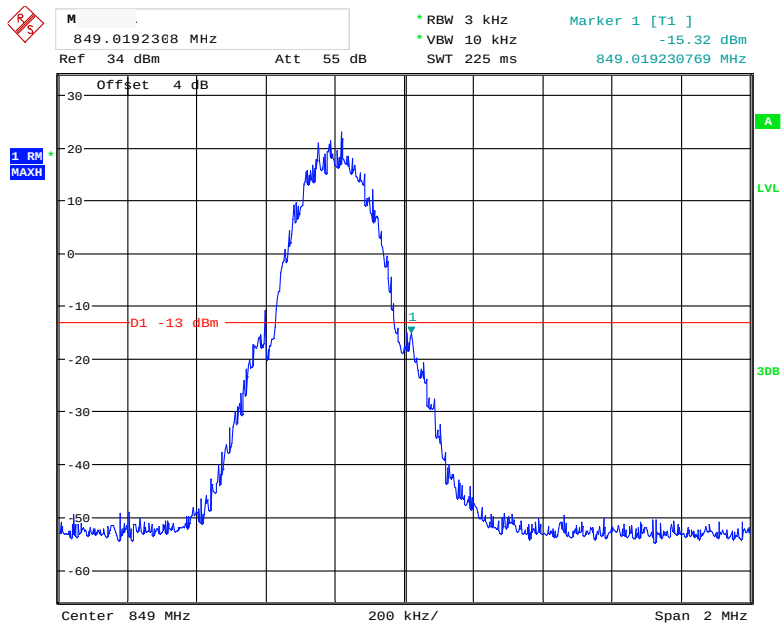


Date: 17.OCT.2019 23:16:42

GSM 1900, Left Band Edge

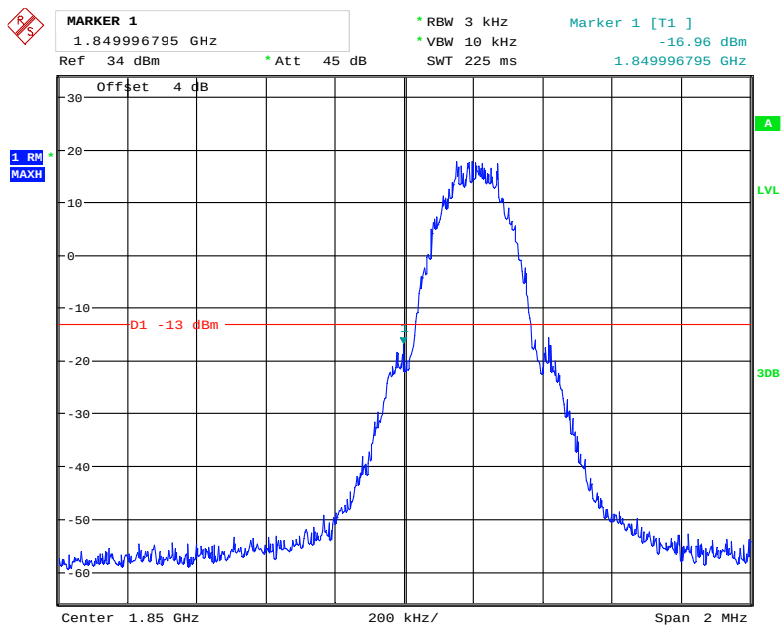


Date: 17.OCT.2019 23:37:22

GSM 1900, Right Band Edge

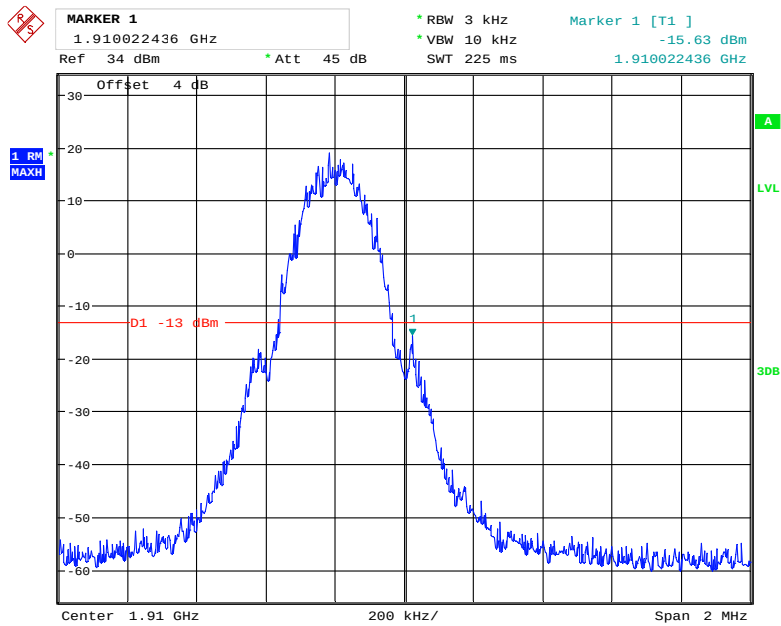


Date: 17.OCT.2019 23:38:55

WCDMA Band 2 Rel 99, Left Band Edge

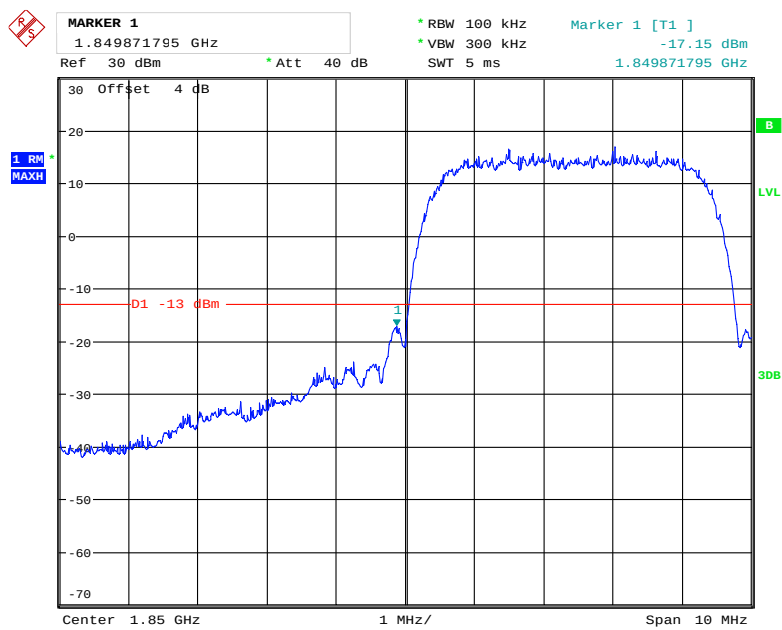


Date: 18.OCT.2019 00:41:48

WCDMA Band 2 Rel 99, Right Band Edge

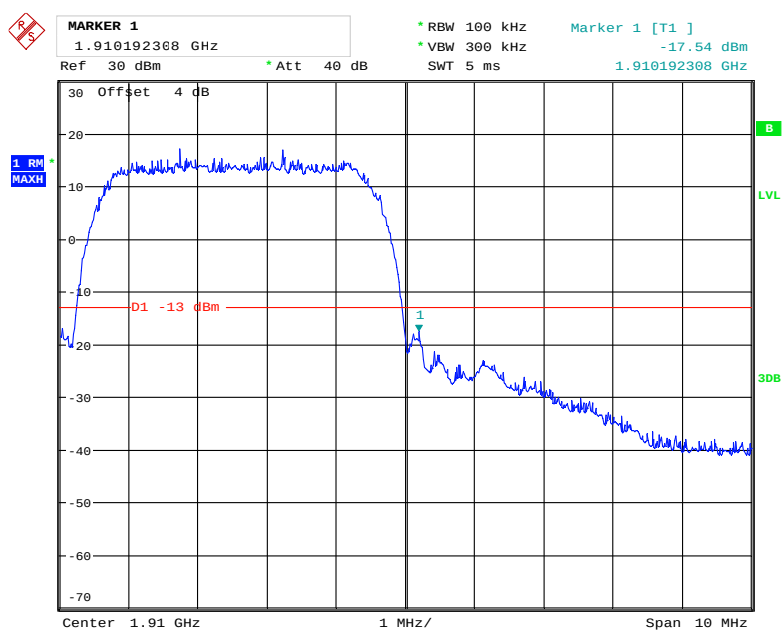


Date: 18.OCT.2019 00:42:46

WCDMA Band 2 HSDPA, Left Band Edge

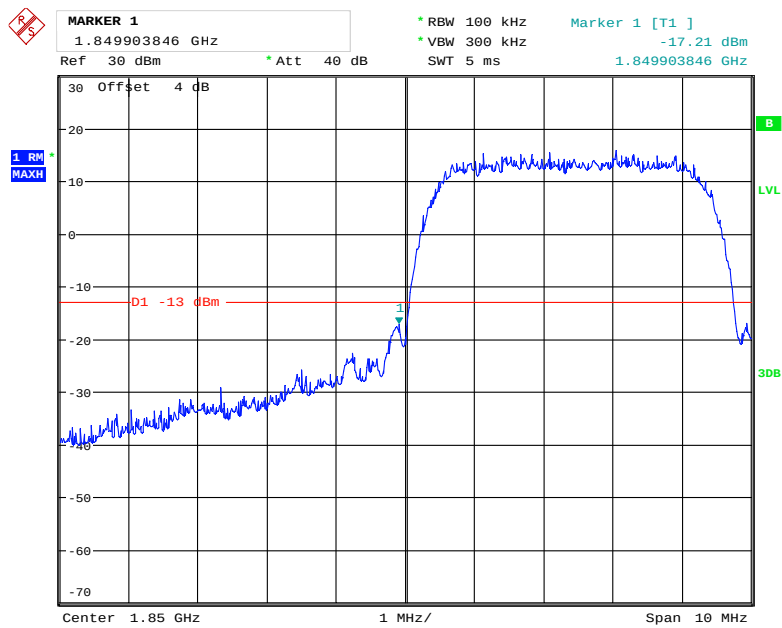


Date: 18.OCT.2019 01:06:13

WCDMA Band 2 HSDPA, Right Band Edge

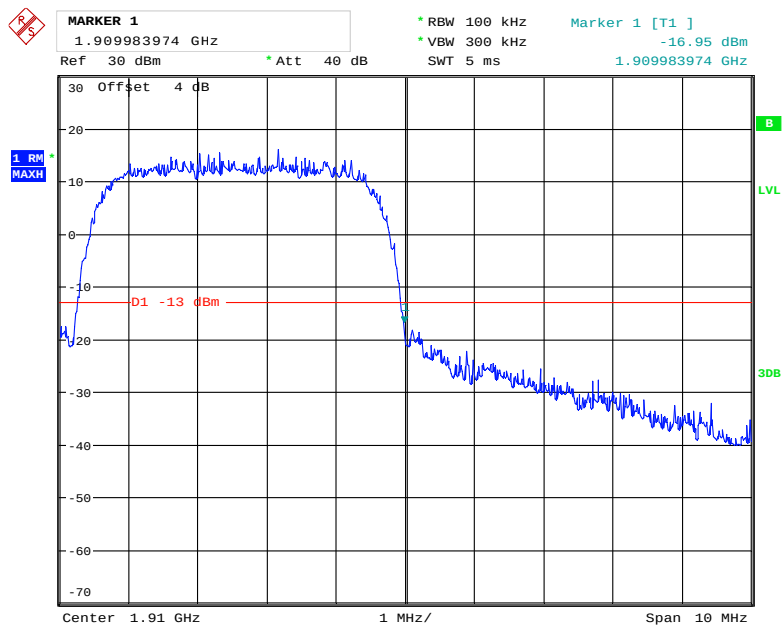


Date: 18.OCT.2019 01:06:55

WCDMA Band 2 HSUPA, Left Band Edge

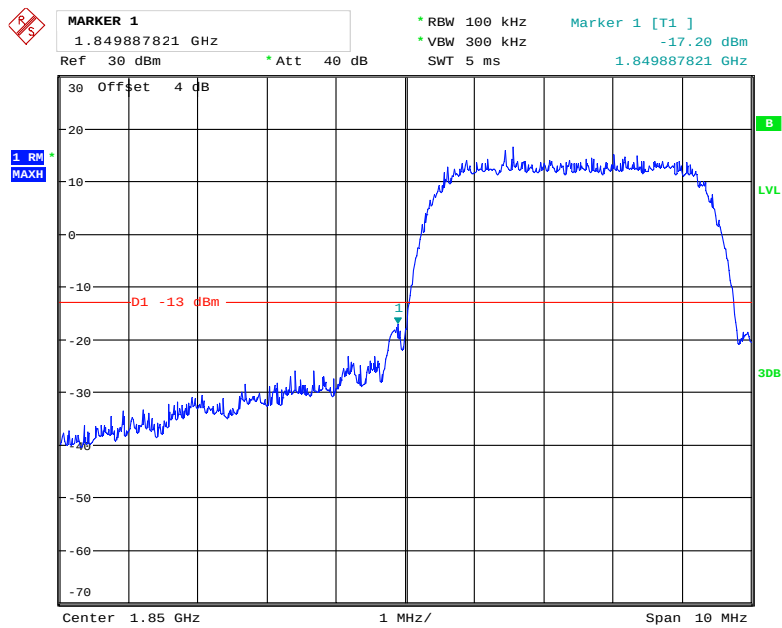


Date: 18.OCT.2019 01:11:50

WCDMA Band 2 HSUPA, Right Band Edge

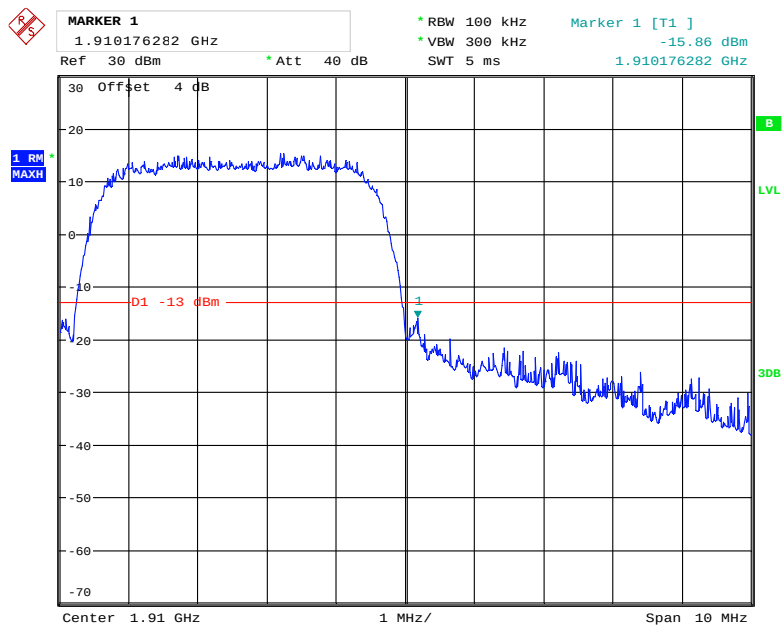


Date: 18.OCT.2019 01:11:10

WCDMA Band 4 Rel 99, Left Band Edge

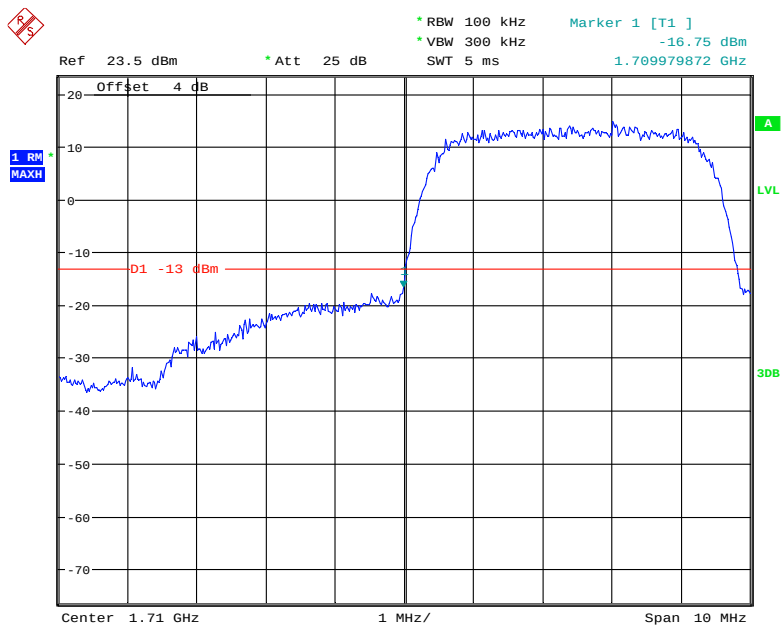


Date: 19.OCT.2019 00:19:56

WCDMA Band 4 Rel 99, Right Band Edge

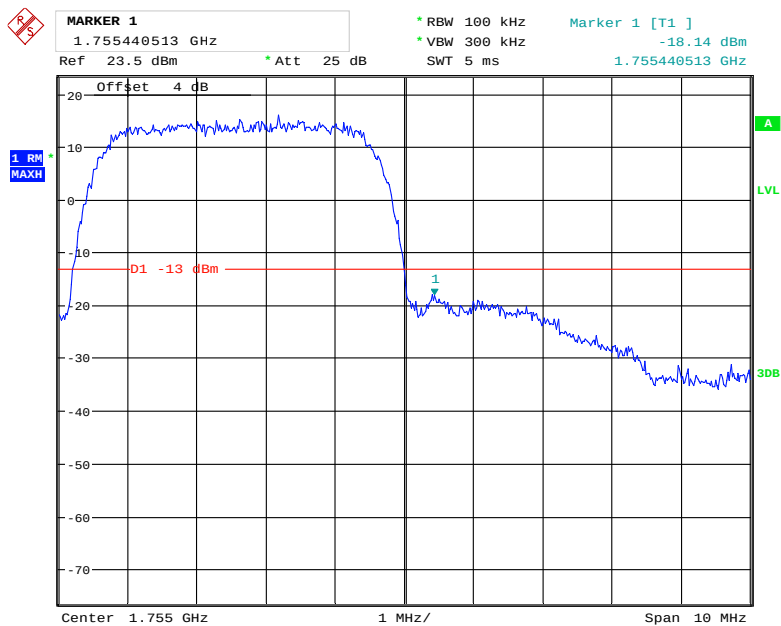


Date: 19.OCT.2019 00:20:47

WCDMA Band 4 HSDPA, Left Band Edge

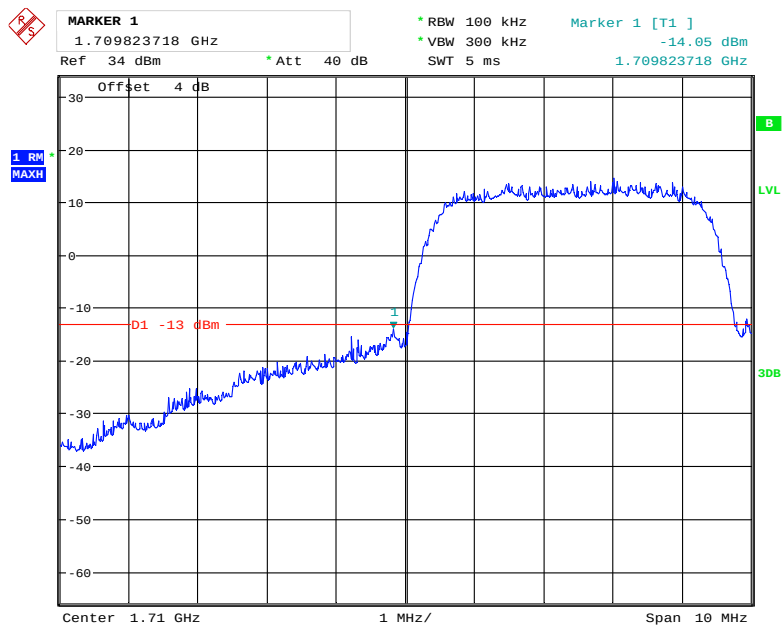

Date: 19.OCT.2019 01:10:50

WCDMA Band 4 HSDPA, Right Band Edge

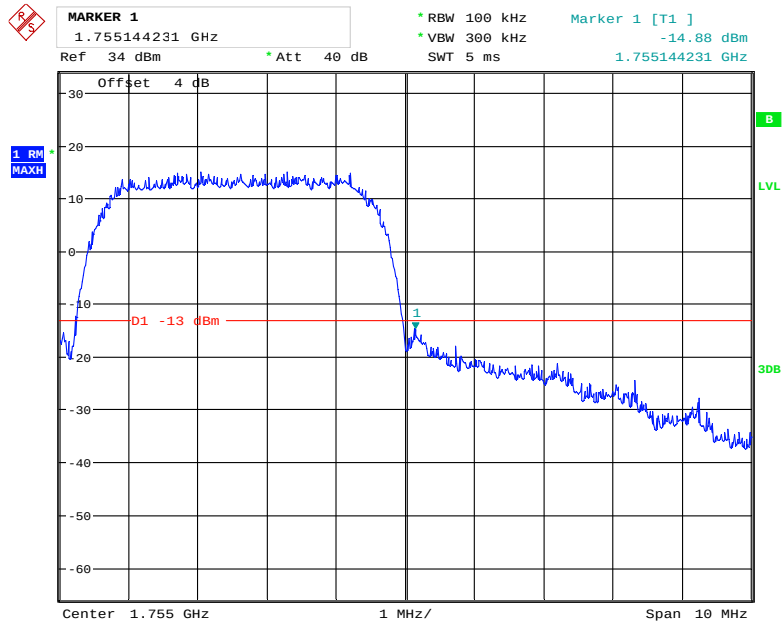

Date: 19.OCT.2019 01:09:50

MARKER 1
1.70974359 GHz

Ref 34 dBm * Att 40 dB

RBW 100 kHz VBW 300 kHz SWT 5 ms

Marker 1 [T1]
-16.27 dBm
1.70974359 GHz

Offset 4 dB

1 RM
MAXH

D1 -13 dBm

1


Center 1.71 GHz 1 MHz/ Span 10 MHz

30dB


LVL

B

WCDMA Band 4 HSUPA, Right Band Edge




WCDMA Band 5 Rel 99, Left Band Edge

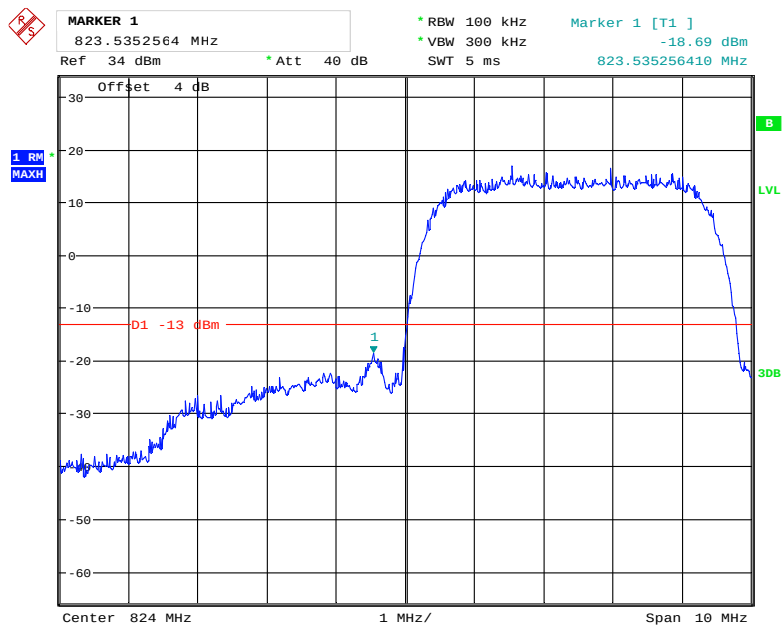


Date: 19.OCT.2019 01:32:28

WCDMA Band 5 Rel 99, Right Band Edge

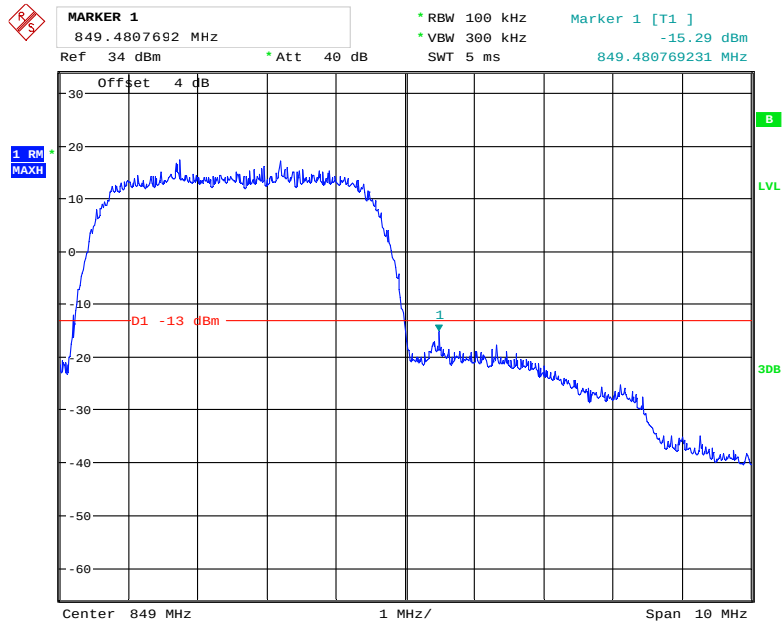


Date: 19.OCT.2019 01:33:49

WCDMA Band 5 HSDPA, Left Band Edge

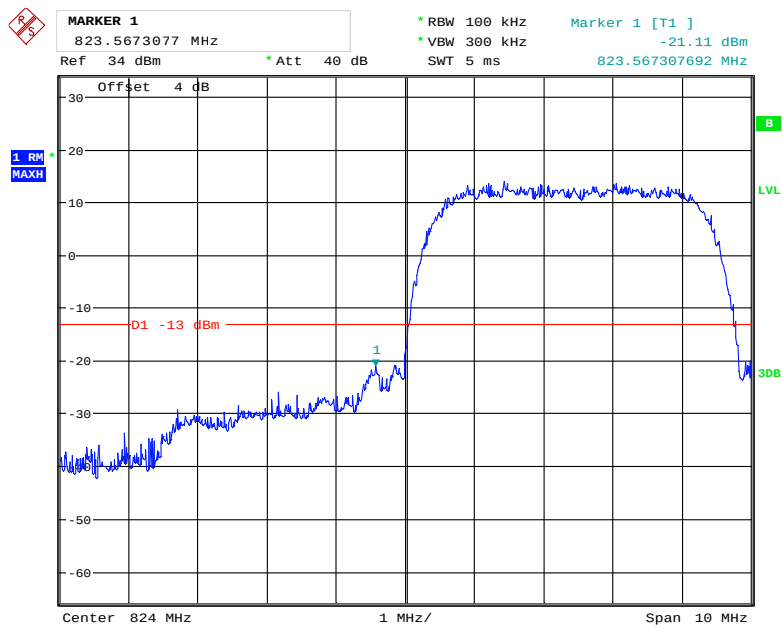


Date: 19.OCT.2019 01:29:18

WCDMA Band 5 HSDPA, Right Band Edge

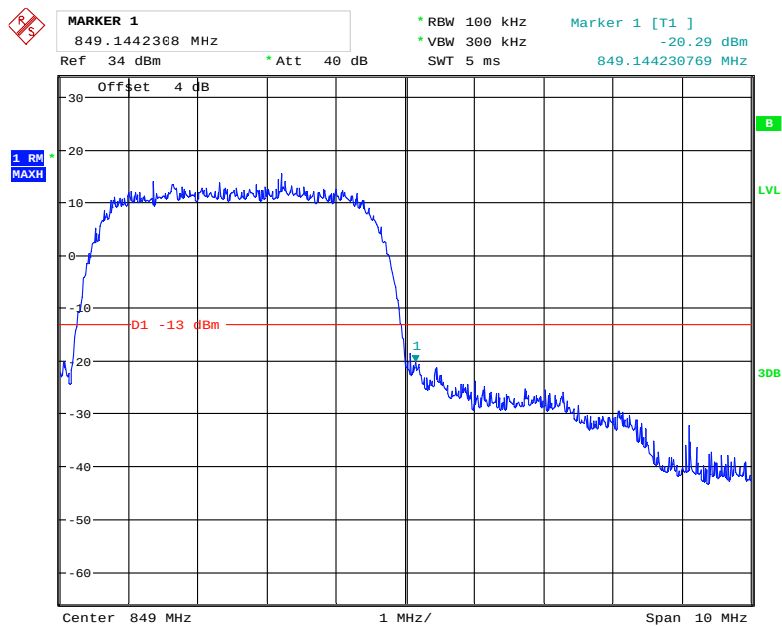


Date: 19.OCT.2019 01:29:58

WCDMA Band 5 HSUPA, Left Band Edge

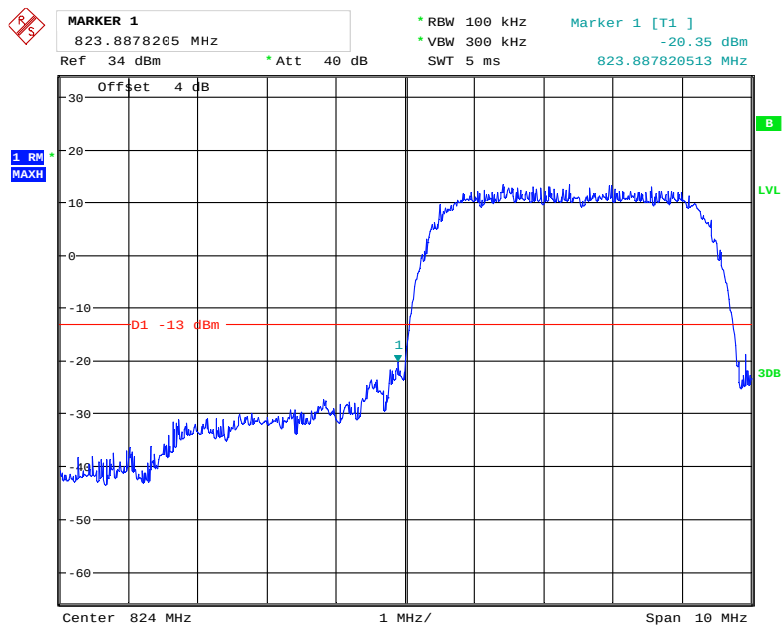

Date: 19.OCT.2019 01:31:41

WCDMA Band 5 HSUPA, Right Band Edge

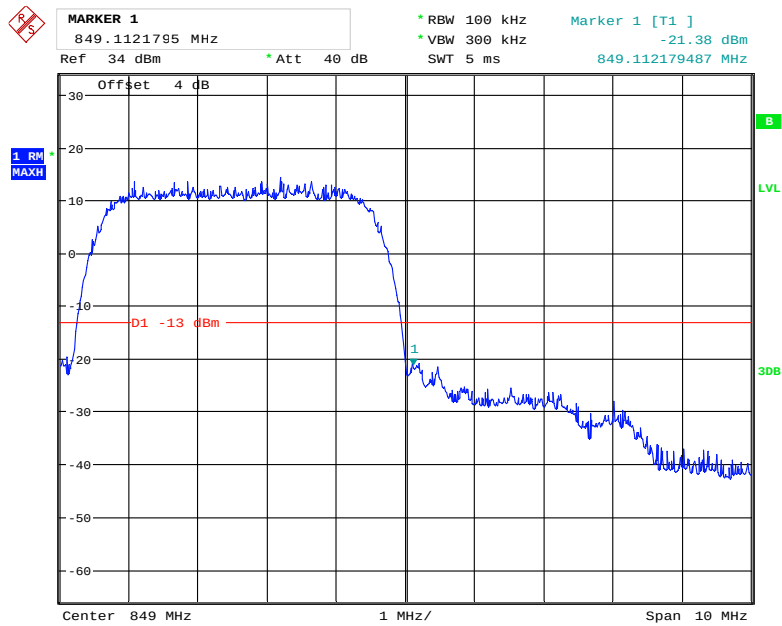

Date: 19.OCT.2019 01:30:59

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY

Applicable Standard


FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

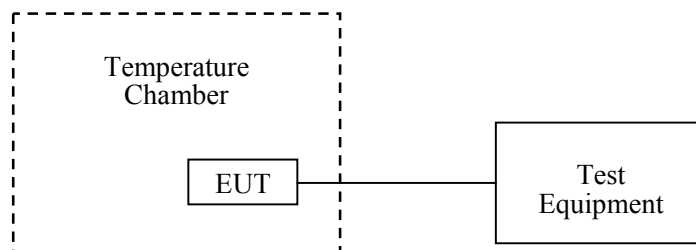

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-05-09	2020-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	2019-05-06	2020-05-06
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2019-09-06	2020-09-06
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2019-07-24	2020-07-24
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.1 °C
Relative Humidity:	58 %
ATM Pressure:	100.9 kPa
Tester:	Severn Zhu
Test Date:	2019-10-18

Test Result: Compliance.

Cellular Band

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	22	0.02630	2.5
-20		23	0.02749	
-10		23	0.02749	
0		24	0.02869	
10		25	0.02988	
20		25	0.02988	
30		24	0.02869	
40		25	0.02988	
50		25	0.02988	
20	3.6	23	0.02749	
20	4.35	24	0.02869	

PCS Band

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.8	18	0.00957	Pass
-20		18	0.00957	
-10		19	0.01011	
0		20	0.01064	
10		19	0.01011	
20		20	0.01064	
30		20	0.01064	
40		21	0.01117	
50		19	0.01011	
20	3.6	18	0.00957	
20	4.35	20	0.01064	

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	7	0.00372	Pass
-20		7	0.00372	
-10		9	0.00479	
0		8	0.00426	
10		9	0.00479	
20		9	0.00479	
30		9	0.00479	
40		7	0.00372	
50		7	0.00372	
20	3.6	8	0.00426	
20	4.35	8	0.00426	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-1	-0.00120	2.5
-20		0	0.00000	
-10		-1	-0.00120	
0		-2	-0.00239	
10		-3	-0.00359	
20		-1	-0.00120	
30		-2	-0.00239	
40		-3	-0.00359	
50		-1	-0.00120	
20	3.6	-3	-0.00359	
20	4.35	-1	-0.00120	

WCDMA Band IV:

WCDMA Band IV Rel 99					
Temperature	Voltage	Test Result (MHz)		Limit (MHz)	
°C	V _{DC}	F _L	F _H	F _L	F _H
-30	3.7	1710.621	1754.247	1710	1755
-20		1710.722	1754.235	1710	1755
-10		1710.671	1754.245	1710	1755
0		1710.682	1754.233	1710	1755
10		1710.621	1754.212	1710	1755
20		1710.681	1754.220	1710	1755
30		1710.542	1754.224	1710	1755
40		1710.612	1754.224	1710	1755
50		1710.651	1754.232	1710	1755
20	3.5	1710.633	1754.213	1710	1755
20	4.2	1710.612	1754.242	1710	1755

***** END OF REPORT *****