

Testing Tomorrow's Technology

Application

For

Title 47 USC Part 2, Subpart J, Paragraph 2.907, 2.1043 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, Paragraphs 15.207, 15.209 and 15.249

And

Industry Canada RSS-Gen, Issue 5 and RSS-210, Issue 10

For

**Cort Business Services dba Tapdn (FCC)
Cort Business Services Inc (ISED)
Model: TAPDN-PIR-0002
FCC ID: 2AT6B-0002
IC: 26085-PIR0002**

**UST Project: 19-0320
Issue Date: August 22, 2019**

Total Pages in This Report: 31

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Consulting Engineer – President

Date: August 22, 2019



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Model:

FCC Part 15.209/249
2AT6B-0002
26085-PIR0002
19-0320
August 22, 2019
TAPDN-PIR-0002

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Cort Business Services dba Tapdn (FCC)
Cort Business Services Inc. (ISED)
15000 Conference Center Dr. Suite 440
Chantilly, VA 20151

MODEL: TAPDN-PIR-0002

FCC ID: 2AT6B-0002

IC: 26085-PIR0002

DATE: August 22, 2019

This report concerns (check one): Original <input checked="" type="checkbox"/> Class II Change <input type="checkbox"/>
Equipment type: Low Power 2.4 GHz Radio transceiver
Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes_____ No <u>X</u>
If yes, defer until: _____ date <u>N/A</u>
agrees to notify the Commission by _____ date <u>N/A</u>
of the intended date of announcement of the product so that the grant can be issued on that date.
Report prepared by: US Tech 3505 Francis Circle Alpharetta, GA30004 Phone Number: (770) 740-0717 Fax Number: (770) 740-1508

Table of Contents

<u>Paragraph Title</u>	<u>Page</u>
1 General Information.....	7
1.1 Purpose of this Report	7
1.2 Characterization of Test Sample.....	7
1.3 Product Description	7
1.4 Configuration of Tested System.....	7
1.5 Test Facility.....	8
2 Tests and Measurements	9
2.1 Test Equipment.....	9
2.2 Modifications to EUT Hardware	10
2.3 Number of Measurements for Intentional Radiators (15.31(m)).....	10
2.4 Frequency Range of Radiated Measurements (Part 15.33).....	10
2.4.1 Intentional Radiator.....	10
2.4.2 Unintentional Radiator	Error! Bookmark not defined.
2.5 Measurement Detector Function and Bandwidth (CFR 15.35)	11
2.5.1 Detector Function and Associated Bandwidth	11
2.5.2 Corresponding Peak and Average Requirements.....	11
2.5.3 Pulsed Transmitter Averaging.....	11
2.6 Transmitter Duty Cycle (CFR 15.35 (c)).....	12
2.7 EUT Antenna Requirements (CFR 15.203)	12
2.8 Restricted Bands of Operation (CFR 15.205)	14
2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207).....	14
2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)(c)) (IC RSS 210, A2.9 (a))	14
2.11 Band Edge Measurements – (CFR 15.249 (d))	17
2.12 Occupied Bandwidth (CFR 2.1049).....	22
2.13 Unintentional Radiator, Powerline Emissions (CFR 15.107)	26
2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109).....	27
2.15 Measurement Uncertainty	31
2.15.1 Conducted Emissions Measurement Uncertainty	31
2.15.2 Radiated Emissions Measurement Uncertainty	31

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration	13
Figure 2.	Band Edge Compliance, Low Channel Delta – Peak.....	18
Figure 3.	Radiated Restricted Band 2310 MHz to 2390 MHz, Peak	19
Figure 4.	Band Edge Compliance, High Channel Delta, Peak	20
Figure 5.	Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak	21
Figure 6.	99% Occupied Bandwidth Low Channel	23
Figure 7.	99% Occupied Bandwidth Mid Channel.....	24
Figure 8.	99% Occupied Bandwidth High Channel	25
Figure 9.	Unintentional Radiated Emissions, 30 MHz – 1000 MHz (Horizontal) Error! Bookmark not defined.	
Figure 10.	Unintentional Radiated Emissions, 30 MHz – 1000 MHz (Vertical) .. Error! Bookmark not defined.	

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	8
Table 2.	Test Instruments	9
Table 3.	Number of Test Frequencies for Intentional Radiators.....	10
Table 4.	Allowed Antenna(s)	12
Table 5.	Peak Radiated Fundamental & Harmonic Emissions.....	15
Table 6.	Average Radiated Fundamental & Harmonic Emissions	16
Table 7.	Radiated Restricted Band 2310 MHz to 2390 MHz, Peak	19
Table 8.	Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak.....	21
Table 9.	Occupied Bandwidth	22
Table 10.	Transmitter Power Line Conducted Emissions Test Data, Part 15.107 ...	26
Table 11.	Unintentional Radiator, Peak Radiated Emissions (CFR 15.109)	29
Table 12.	Unintentional Radiator, Peak Radiated Emissions (CFR 15.109)	30

List of Attachments

FCC Agency Agreement
Application Forms
Letter of Confidentiality
Test Configuration Photographs
External Photographs
Internal Photographs
Permissive Change Letter
Confidential Schematics
Copy of Original FCC Certificate

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 249.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on August 6, 2019 in good operating condition.

1.3 Product Description

The Equipment under Test (EUT) is the Cort Business Services, model TAPDN-PIR-0002. It is a passive infrared sensor that is used to detect motion within a short range of the device. This motion detection is then sent via LoRaWAN to a local gateway, which is then transmitted to the cloud. Multiple sensors are typically used in an environment and the data is aggregated together in the cloud to provide information via an application about how spaces are utilized within the environment. The devices also advertise a BLE beacon, allowing for a proximity connection to perform diagnostics and OTA updates.

This report is an evaluation of the BLE radio features. The LoRaWAN radio has been evaluated in a separate test report.

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2014 and ANSI C63.4:2013, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* for FCC subpart A Digital equipment Verification requirements and per *ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for FCC subpart C Intentional Radiators.

A list of EUT and Peripherals is found in Table 1. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally this site has also been fully described and submitted to Industry Canada (ISED), and has been approved under file number 9900A-1.

1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.207 and 15.209 as a transmitter.
- b) Verification under 15.101 as a digital device.

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (Parts 15.107 and 15.109) for the EUT is included herein.

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID/IC:	CABLES P/D
EUT Cort Business Services	TAPDN-PIR-0002	Engineering Sample	2AT6B-0002/ 26085-PIR0002	N/A
Antenna See antenna details	--	--	--	--

U= Unshielded S= Shielded P= Power D= Data

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 2. Test Instruments

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT- PACKARD	1937A02980	5/07/2020
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT- PACKARD	3008A00480	4/08/2020
LOOP ANTENNA	SAA- 200/562	A.H. SYSTEMS	142	1/22/2020
BICONICAL ANTENNA	3110B	EMCO	9306-1708	6/27/2021 2yr cal
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	2/01/2021 2yr cal
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2 yr.
HIGH PASS FILTER	H3R020G2	MICROWAVE CIRCUITS	001DC9528	4/02/2020

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2402 MHz to 2480 MHz, 3 test frequencies were used.

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the parameters outlined following.

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

2.5.3 Pulsed Transmitter Averaging

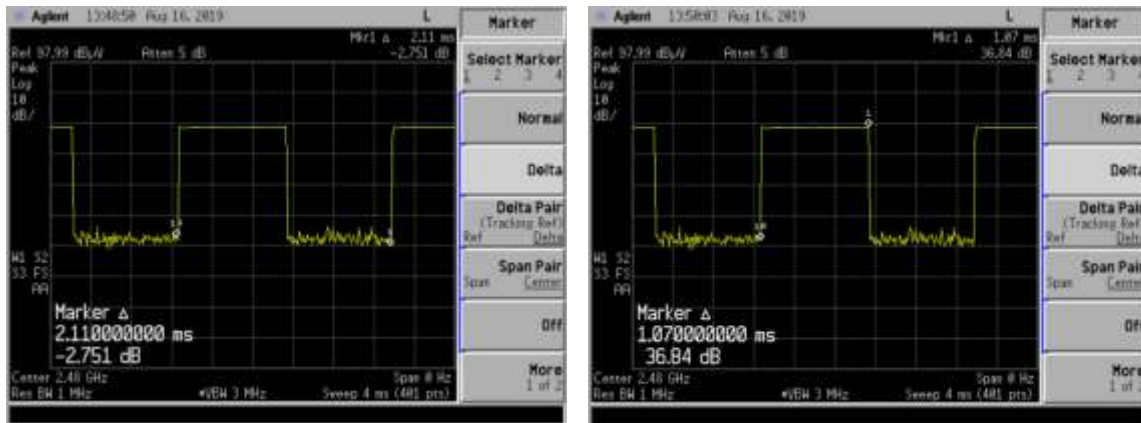
When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG), the duty cycle factor calculated will be applied.

2.6 Transmitter Duty Cycle (CFR 15.35 (c))

The operating duty cycle of the transmitter under normal operation was calculated at 50 percent.

Pulse transmitter averaging as detailed in clause 2.5.3 above is considered whenever the EUT operation involves pulse transmission signals.



$T_{X_{full\ period}} = 2.11\text{ ms}$, $T_{X_{on}} = 1.07\text{ ms}$

Duty Cycle = $20\text{ Log} (T_{X_{on}} / (T_{X_{on}} + T_{X_{off}})) = 20\text{ Log} (1.07/2.11) = -5.89$

In this case a duty cycle correction factor of -5.89 dB was used to correct Peak values to AVG values.

2.7 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dBi	TYPE OF CONNECTOR
Antenna 1	TDK	Chip	ANT016008L CS2442MA1	1.6	SMD

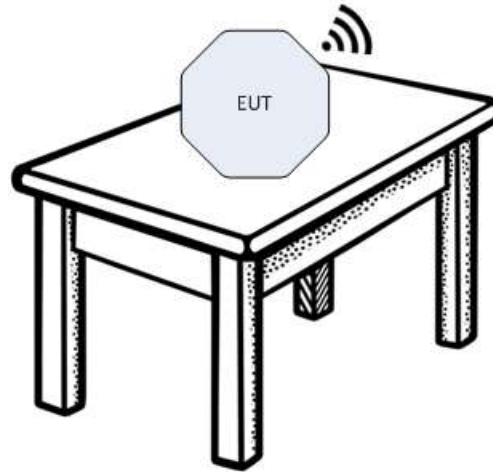


Figure 1. Block Diagram of Test Configuration

2.8 Restricted Bands of Operation (CFR 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious emissions cannot exceed the limits of 15.209. Radiated Harmonics and other Spurious Emissions are examined for this requirement; see paragraph 2.1.

2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

The EUT is powered by two AA Lithium batteries; therefore, this test is not applicable. Additional details are presented in section 2.13 below.

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a)(c)) (IC RSS 210, A2.9 (a))

Radiated Radio measurements: the EUT was placed into a continuous transmit mode of operation and a preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the product. To obtain the worst case results, the EUT was placed on a table top of a non-conductive table, 80 cm or 150 cm above the ground floor depending on the frequency band of investigation. The EUT was positioned 3 meters away from the receiving antenna during testing (1 meter at frequencies above 6 GHz and if the emissions were less than 6 dB from the noise floor). The EUT was tested in X, Y and Z axes or the position of normal operation to determine the worst case orientation. Radiated measurements below 30 MHz were tested with a RBW = 9 kHz; emissions below 1 GHz were tested with a RBW = 120 kHz and radiated measurements above 1 GHz were measured using a RBW = 1 MHz. VBW was set to three times the RBW value.

The data below is the test results collected on the Fundamental and harmonics. The remaining spurious emissions measurements are presented in section 2.14 of this test report.

Table 5. Peak Radiated Fundamental & Harmonic Emissions

Test: FCC Part 15, Para 15.209, 15.249(a)					Client: Cort Business Services dba Tapdn				
Project: 19-0320					Model: TAPDN-PIR-0002				
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode	
Low - Channel									
2402.00	91.80	--	-3.13	88.67	114.0	3.0m./HORZ	25.33	PK	
No harmonics were detected.									
Mid - Channel									
2440.00	85.41	--	-3.01	82.40	114.0	3.0m./HORZ	31.60	PK	
No harmonics were detected.									
High - Channel									
2480.00	77.00	--	-3.68	73.32	114.0	3.0m./HORZ	40.68	PK	
No harmonics were detected.									

Notes:

- (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
- No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
- (-) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
- The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.00 MHz:

Magnitude of Measured Frequency	91.80	dBuV
+Antenna Factor + Cable Loss - Amplifier Gain	-3.13	dB/m
Corrected Result	88.67	dBuV/m

Test Date: August 16, 2019

Tested By
 Signature:



Name: Mark Afroozi

Table 6. Average Radiated Fundamental & Harmonic Emissions

Test: FCC Part 15, Para 15.209, 15.249(a)					Client: Cort Business Services dba Tapdn				
Project: 19-0320					Model: TAPDN-PIR-0002				
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector Mode	
Low - Channel									
2402.00	66.92	--	-3.13	63.79	94.0	3.0m./HORZ	30.21	AVG	
No harmonics were detected.									
Mid - Channel									
2440.00	61.61	--	-3.01	58.60	94.0	3.0m./HORZ	35.40	AVG	
No harmonics were detected.									
High - Channel									
2480.00	55.53	--	-3.68	51.85	94.0	3.0m./HORZ	42.15	AVG	
No harmonics were detected.									

Notes:

- (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
- No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
- (~) Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
- The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.
- Duty Cycle factor of -20 dB is added to the additional factor column.

Sample Calculation at 2402.0 MHz:

Magnitude of Measured Frequency	66.92	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-3.13	dB/m
Corrected Result	63.79	dBuV/m

Test Date: August 16, 2019

Tested By
 Signature: 

Name: Mark Afroози

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Model:

FCC Part 15.209/249
2AT6B-0002
26085-PIR0002
19-0320
August 22, 2019
TAPDN-PIR-0002

2.11 Band Edge Measurements – (CFR 15.249 (d))

Band Edge measurements are made following the guidelines in FCC KDB Publication No. 558074 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed to demonstrate compliance with the requirement of 15.249(d) that all emissions outside of the band edges be attenuated by at least 50 dB or 15.209 limits, when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge, set the Spectrum Analyzer frequency span set to 2 MHz to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. See figure and calculations below for more detail.

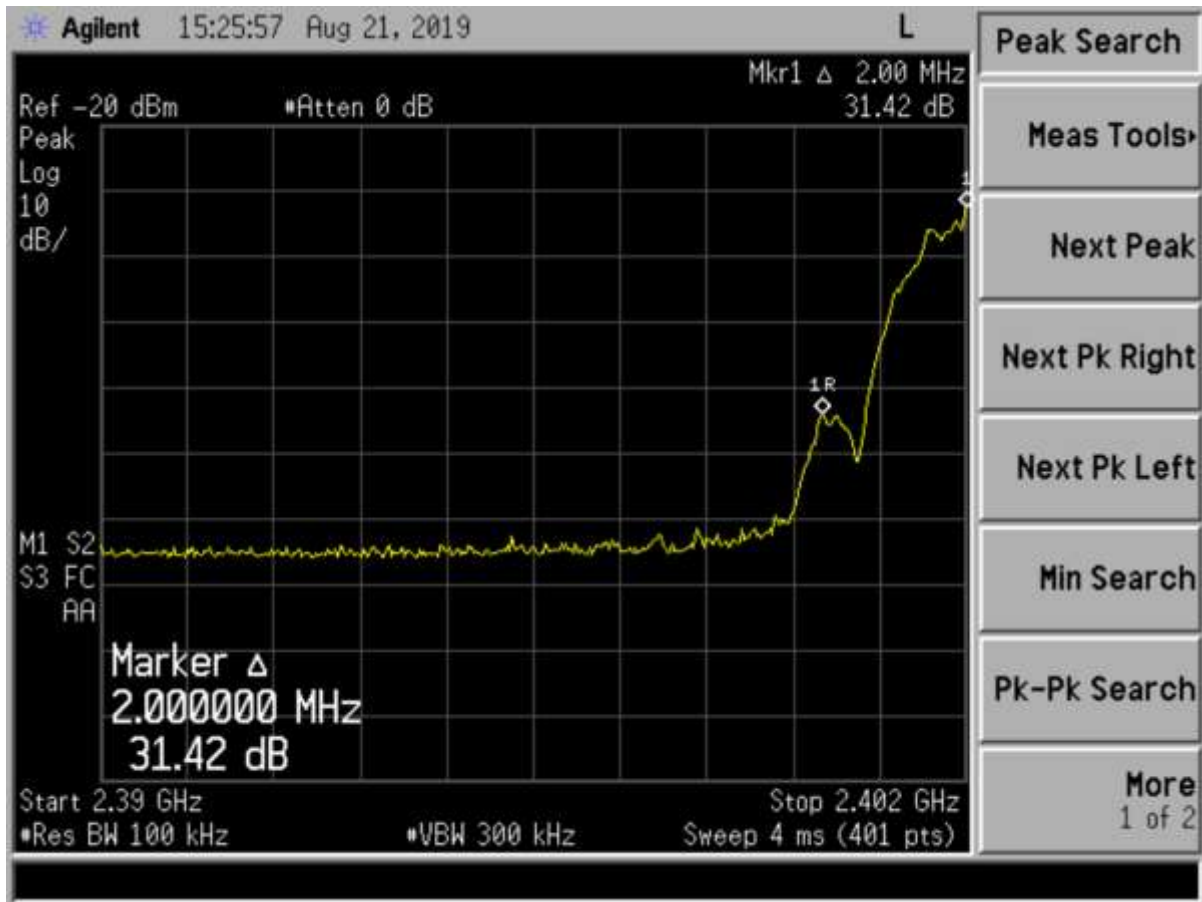


Figure 2. Band Edge Compliance, Low Channel Delta – Peak

Low Channel Corrected Measured Value from Table 6	88.67	dBuV
Low Channel Band Edge Delta from Figure 4	-31.42	dB
Calculated Result (PEAK)	57.25	dBuV/m
Band Edge Limit (PEAK)	74.00	dBuV/m
Calculated Result (PEAK)	-57.25	dBuV/m
Band Edge Margin	16.75	dBuV/m
Band Edge Limit (AVG)	54.00	dBuV/m
Calculated Result (PEAK)	-57.25	dBuV/m
Duty Cycle Factor	-6.00	
Band Edge Margin	2.75	dBuV/m

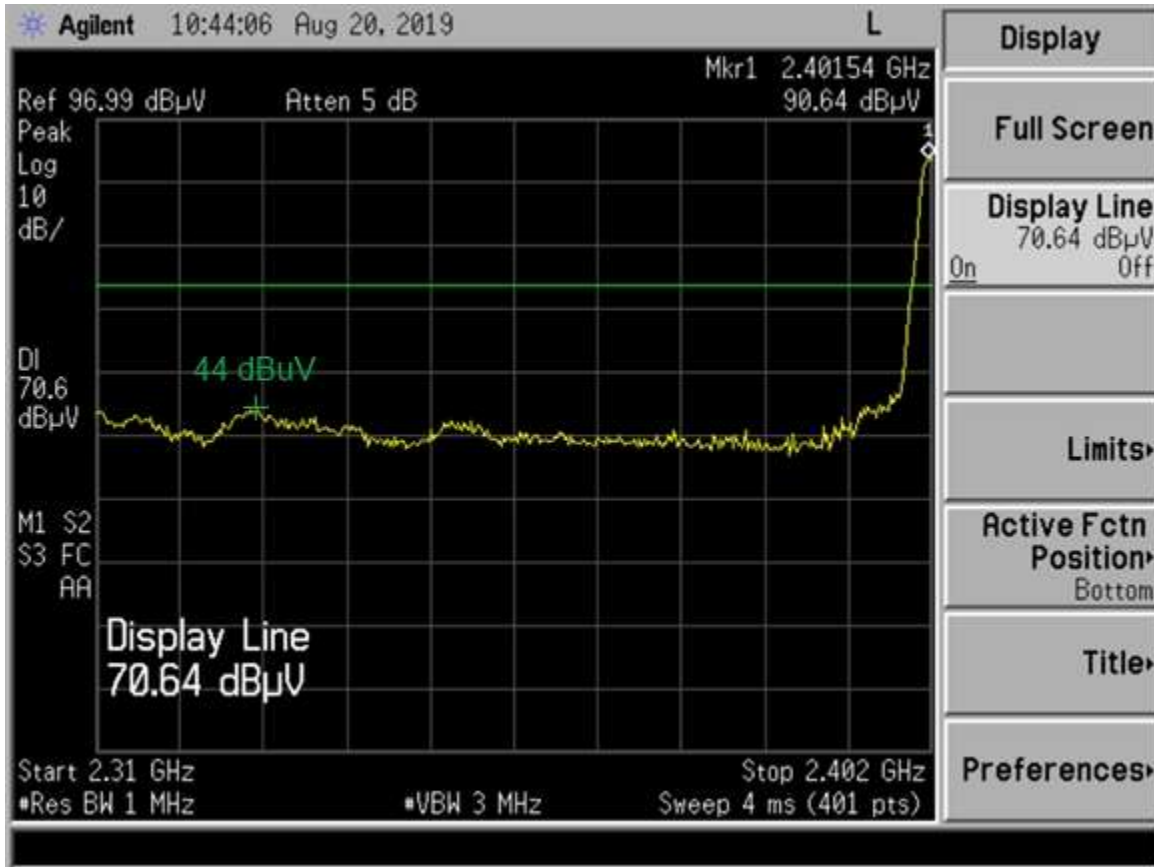


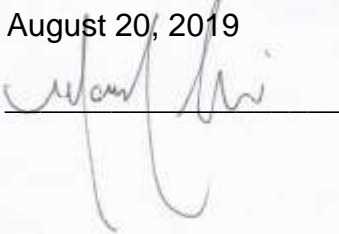
Figure 3. Radiated Restricted Band 2310 MHz to 2390 MHz, Peak

Table 7. Radiated Restricted Band 2310 MHz to 2390 MHz, Peak

2310 MHz to 2390 MHz Restricted Band Peak Measurements							
Test: Radiated Emissions				Client: Cort Business Services			
Project: 19-0320				Model: TAPDN-PIR-0002			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
PEAK value vs. PK limit							
2328	44	-2.96	41.04	74.0	3.0m./HORZ	33.0	PK
PEAK value vs. AVG limit							
2328	44	-2.96	41.04	54.0	3.0m./HORZ	13.0	PK

Test Date: August 20, 2019

Tested By

Signature: 

Name: Mark Afroози

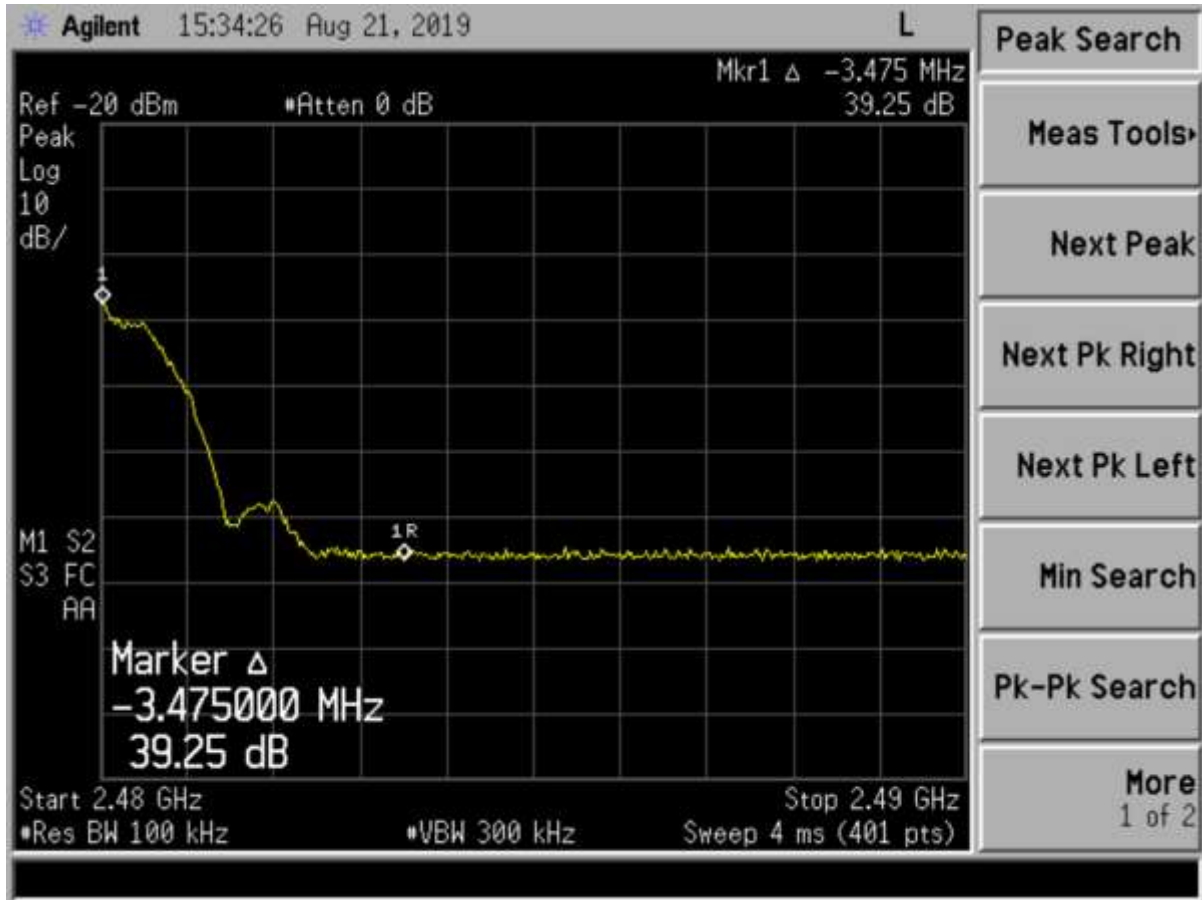


Figure 4. Band Edge Compliance, High Channel Delta, Peak

High Channel Corrected Measured Value from Table 6	77.00	dBuV
High Channel Band Edge Delta from Figure 6	-39.25	dB
Calculated Result (PEAK)	37.75	dBuV/m
Band Edge Limit (AVG)	54.00	dBuV/m
Calculated Result (PEAK)	-37.75	dBuV/m
Band Edge Margin	16.25	dBuV/m

Note: Peak meets AVG limits

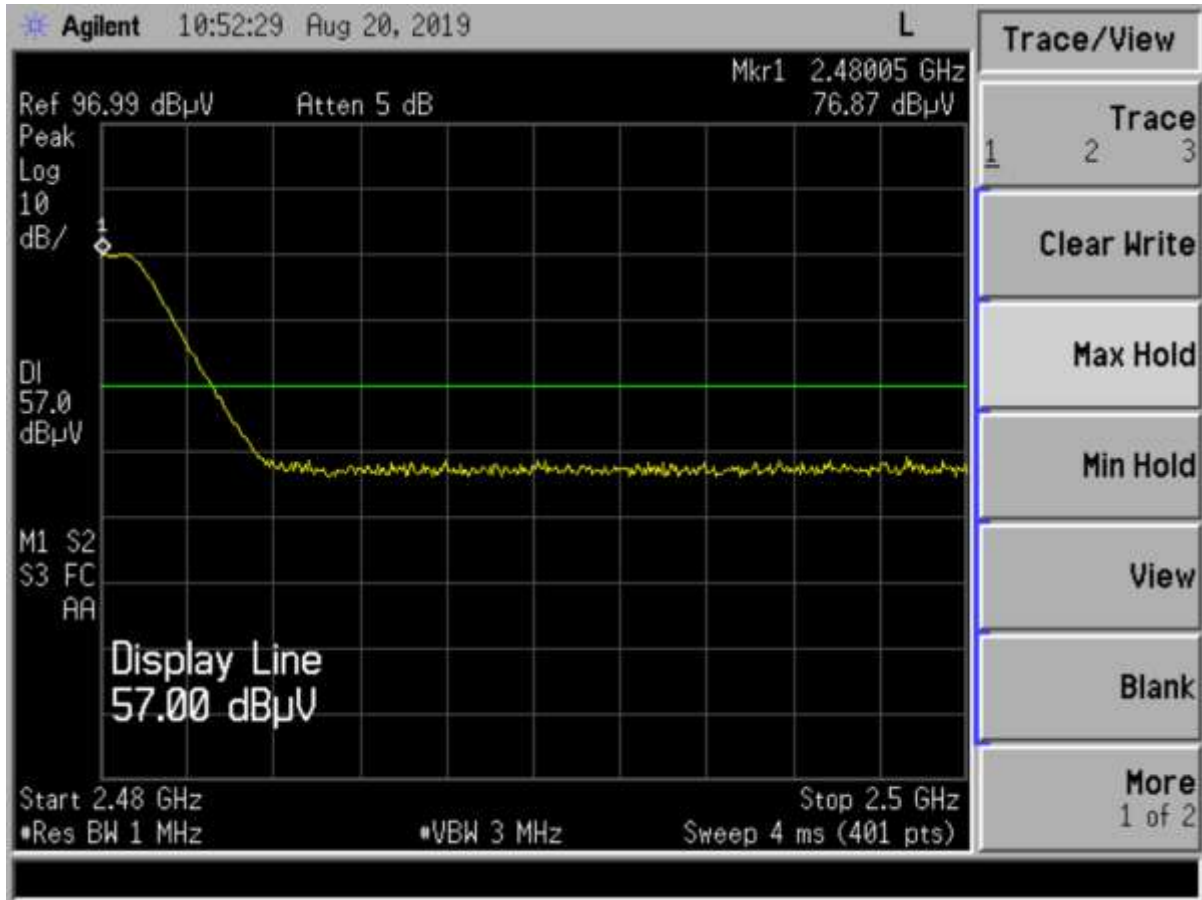


Figure 5. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak

Table 8. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak

2483.5 MHz to 2500 MHz Restricted Band Peak Measurements							
Test: Radiated Emissions				Client: Cort Business Services			
Project: 19-0320				Model: TAPDN-PIR-0002			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	PK Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
Noise Floor							

Test Date: August 20, 2019

Tested By
 Signature:

Name: Mark Afroози

2.12 Occupied Bandwidth (CFR 2.1049)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

The changes do not affect the emissions bandwidth therefore the originally recorded measurements are presented herein.

Table 9. Occupied Bandwidth

Frequency (MHz)	Occupied Bandwidth (MHz)
2402	2.0800
2440	2.1229
2480	2.2043

Test Date: August 16, 2019

Tested By

Signature: 

Name: Mark Afroози

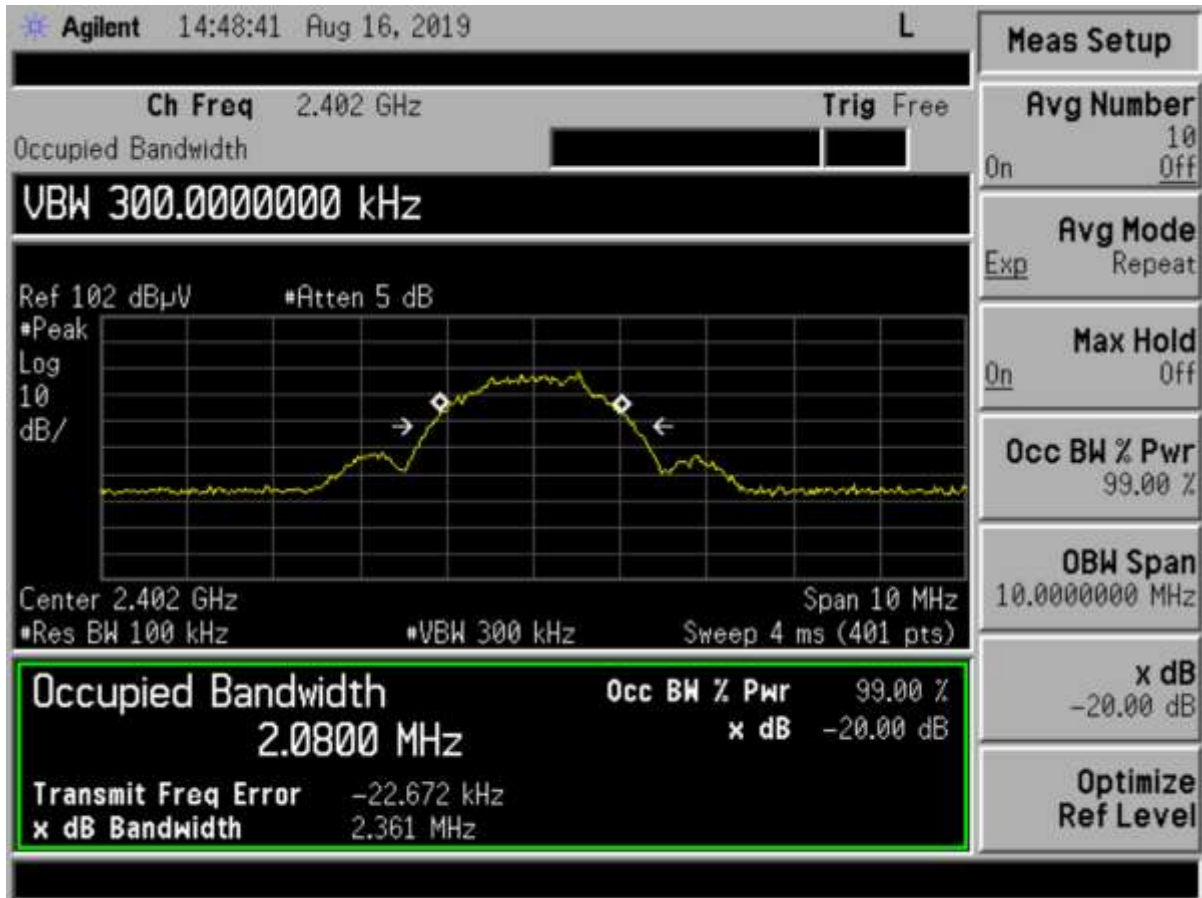


Figure 6. 99% Occupied Bandwidth Low Channel

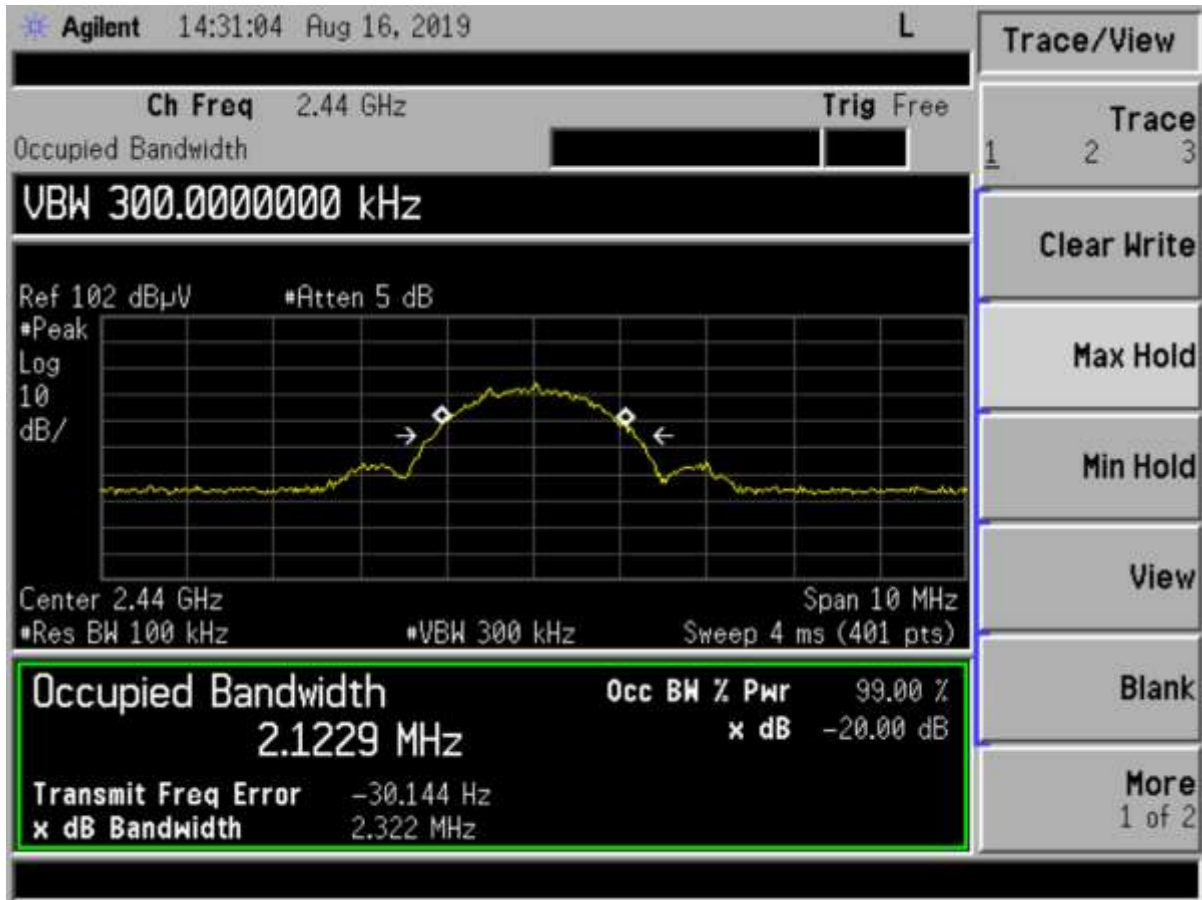


Figure 7. 99% Occupied Bandwidth Mid Channel

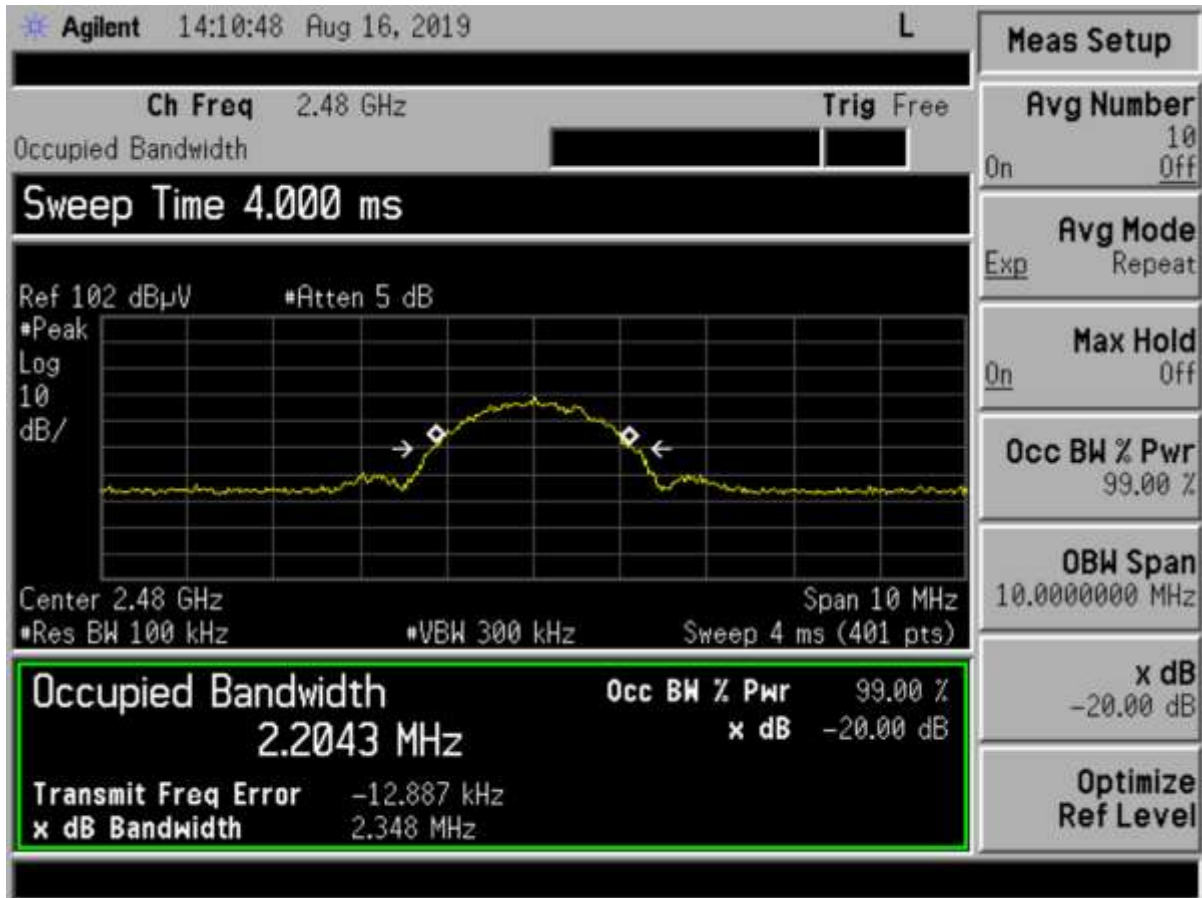


Figure 8. 99% Occupied Bandwidth High Channel

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Model:

FCC Part 15.209/249
 2AT6B-0002
 26085-PIR0002
 19-0320
 August 22, 2019
 TAPDN-PIR-0002

2.13 Intentional Radiator, Powerline Emissions (CFR 15.207)

Since the EUT is battery powered, this test was not applied. The EUT is powered by two AA Lithium batteries.

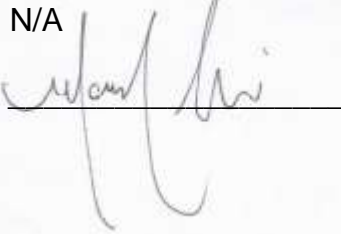
Table 10. Transmitter Power Line Conducted Emissions Test Data, Part 15.107

9kHz to 30 MHz with Class B Limits						
Test: Radiated Emissions				Client: Cort Business Services dba Tapdn		
Project: 19-0320				Model: TAPDN-PIR-0002		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
The EUT is battery powered; therefore, this test is not applicable.						

SAMPLE CALCULATION: N/A

Test Date: N/A

Tested By

Signature: 

Name: Mark Afroozi

2.14 Intentional Radiator, Radiated Emissions (CFR 15.209)

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 30 MHz to 1 GHz and peak and average detectors over the frequency range of 1 GHz to 25 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit unless noted otherwise.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emissions in the range of 30 MHz to 25 GHz are reported in the tables below.

Table 11. Part 15.209 Limits

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (meters)	Measurement Distance Correction Factor
0.009-0.490	$20 \cdot \log(2400/F(\text{kHz}))$	300	+80
0.490-1.705	$20 \cdot \log(24000/F(\text{kHz}))$	30	+40
1.705-30.0	29.5	30	+40
30-88	40	3	+0
88-216	43.5	3	+0
216-960	46.0	3	+0
Above 960	54.0	3	+0

Measurements are PK or QP unless the following: frequencies in the band 9-90 kHz, 110-490 kHz and above 1000 MHz are performed using PK or AVG detection.

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Model:

FCC Part 15.209/249
 2AT6B-0002
 26085-PIR0002
 19-0320
 August 22, 2019
 TAPDN-PIR-0002

**Table 12. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209)
 9 kHz to 30 MHz**

9 kHz to 30 MHz							
Test: Radiated Emissions				Client: Cort Business Services dba Tapdn.			
Project: 19-0478				Model: TAPDN- PIR -0002			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
No emissions seen at 9 kHz to 30 MHz above the noise floor levels. The evaluation was performed with the spectrum analyzer in Peak detection mode. The limits applied during testing were Part 15.209 limits as presented in the table above.							

Tested from 30 kHz to 30 MHz

SAMPLE CALCULATION: N/A

Test Date: December 27, 2019

Tested By
 Signature: *Afzal Fazal*

Name: Afzal Fazal

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Model:

FCC Part 15.209/249
 2AT6B-0002
 26085-PIR0002
 19-0320
 August 22, 2019
 TAPDN-PIR-0002

Table 13. Unintentional Radiator, Peak Radiated Emissions (CFR 15.209)

30 MHz to 1000 MHz							
Test: Radiated Emissions				Client: Cort Business Services dba Tapdn			
Project: 19-0320				Model: TAPDN-PIR-0002			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK or QP
30.43	39.30	-11.81	27.49	40.0	3m./VERT	12.5	PK
No other emissions seen more than 20 dB from the applicable limit.							

Tested from 30 MHz to 1 GHz

SAMPLE CALCULATION at 30.43 MHz:

Magnitude of Measured Frequency	39.30	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-11.81	dB/m
Corrected Result	27.49	dBuV/m

Test Date: August 13, 2019

Tested By
 Signature:



Name: Mark Afroozi

US Tech Test Report
 FCC ID:
 IC:
 Test Report Number:
 Issue date:
 Model:

FCC Part 15.209/249
 2AT6B-0002
 26085-PIR0002
 19-0320
 August 22, 2019
 TAPDN-PIR-0002

Table 14. Unintentional Radiator, Peak Radiated Emissions (CFR 15.209)

1 GHz to 25 GHz							
Test: Radiated Emissions				Client: Cort Business Services dba Tapdn			
Project: 19-0320				Model: TAPDN-PIR-0002			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK or AVG
No spurious emissions were detected.							

Tested from 1 GHz to 12.5 GHz

SAMPLE CALCULATION at: N/A

Test Date: August 13, 2019

Tested By
 Signature: _____



Name: Mark Afroozi

US Tech Test Report
FCC ID:
IC:
Test Report Number:
Issue date:
Model:

FCC Part 15.209/249
2AT6B-0002
26085-PIR0002
19-0320
August 22, 2019
TAPDN-PIR-0002

2.15 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2: 2011. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.15.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.85 dB.

This EUT is battery powered; therefore this tested was deemed not applicable.

2.15.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.40 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.19 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.08 dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

END REPORT