

TEST REPORT

Applicant: Sinocan International Technologies Co., Ltd

Address of Applicant: 4F,Building B,Peking University Founder Science Park,
SongBai Road North , Longteng Community, Shiyan Street ,
Baoan District, Shenzhen, China

Manufacturer: Sinocan International Technologies Co., Ltd

Address of Manufacturer: 4F,Building B,Peking University Founder Science Park,
SongBai Road North , Longteng Community, Shiyan Street ,
Baoan District, Shenzhen, China

Factory: Sinocan International Technologies Co., Ltd

Address of Factory: 4F,Building B,Peking University Founder Science Park,
SongBai Road North , Longteng Community, Shiyan Street ,
Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Integrated Video Conference Terminal

Model No.: S5VB1, S5VS1、 S5MS10、 S5VB2、 S5VB5、 S5VB8

Trade Mark: 

FCC ID: 2AT6L- S5VB1

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: Apr.12, 2021


Date of Test: Apr.13, 2021-May. 06, 2021

Date of report issued: May. 12, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	May. 12, 2021	Original

Prepared By:




Date:

May. 11, 2021

Project Engineer

Check By:



Date:

May. 11, 2021

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 DUTY CYCLE	14
7.4 CONDUCTED PEAK OUTPUT POWER	15
7.5 CHANNEL BANDWIDTH	17
7.6 POWER SPECTRAL DENSITY	24
7.7 BAND EDGE	33
7.7.1 Radiated Emission Method	33
7.8 SPURIOUS EMISSION	40
7.8.1 Radiated Emission Method	40
7.9 FREQUENCY STABILITY	49
8 TEST SETUP PHOTO	51
9 EUT CONSTRUCTIONAL DETAILS	51

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Integrated Video Conference Terminal
Model No.:	S5VB1, S5VS1、 S5MS10、 S5VB2、 S5VB5、 S5VB8
Test Model No:	S5VB1
Remark: All models differences are only naming method, which represents different customer codes and sales markets, and others are the same	
Serial No.:	N/A
Hardware Version:	T.RK3399.75B
Software Version:	MS10B_Monitor_GENERAL_MS10B_maintain_3399_SRRC_V2_20210224 1617_5.0.3.01
Test sample(s) ID:	GTSL202105000104-1
Sample(s) Status:	Engineer sample
Operation Frequency:	802.11a/802.11n(HT20)/802.11ac(HT20): 5745MHz ~ 5825MHz 802.11n(HT40)/ 802.11ac(HT40): 5755MHz ~ 5795MHz 802.11ac(HT80): 5775MHz
Channel numbers:	802.11a/802.11n(HT20)/802.11ac(HT20): 5 802.11n(HT40)/ 802.11ac(HT40): 2 802.11ac(HT80): 1
Channel bandwidth:	802.11a/802.11n(HT20)/802.11ac(HT20) : 20MHz 802.11n(HT40)/802.11ac(HT40) : 40MHz 802.11ac(HT80): 80MHz
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral Antenna
Antenna gain:	Antenna 1: 3.5dBi (Max) Antenna 2: 3.5dBi(Max)
Power supply:	DC 12V From adapter with ac 100-240V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	163	5815MHz
165	5825MHz						

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11 a/n/ac(HT20)	802.11 n/ac(HT40)	802.11ac(HT80)
Lowest channel	5745	5755	
Middle channel	5785		5775
Highest channel	5825	5795	

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode EUT was test with 100% duty cycle at its maximum power control level.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6Mbps
802.11n/ac(HT20)	6.5Mbps
802.11n/ac(HT40)	13Mbps
802.11ac(HT80)	29.3Mbps

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default
Version	Ver 1.0

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
The antennas are integral antenna, the best case gain of the antenna is 3.5dBi. Two antennas simultaneously transmitting, the Directional Gain is 6.5dBi, reference to the appendix II for details.	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data

Line:

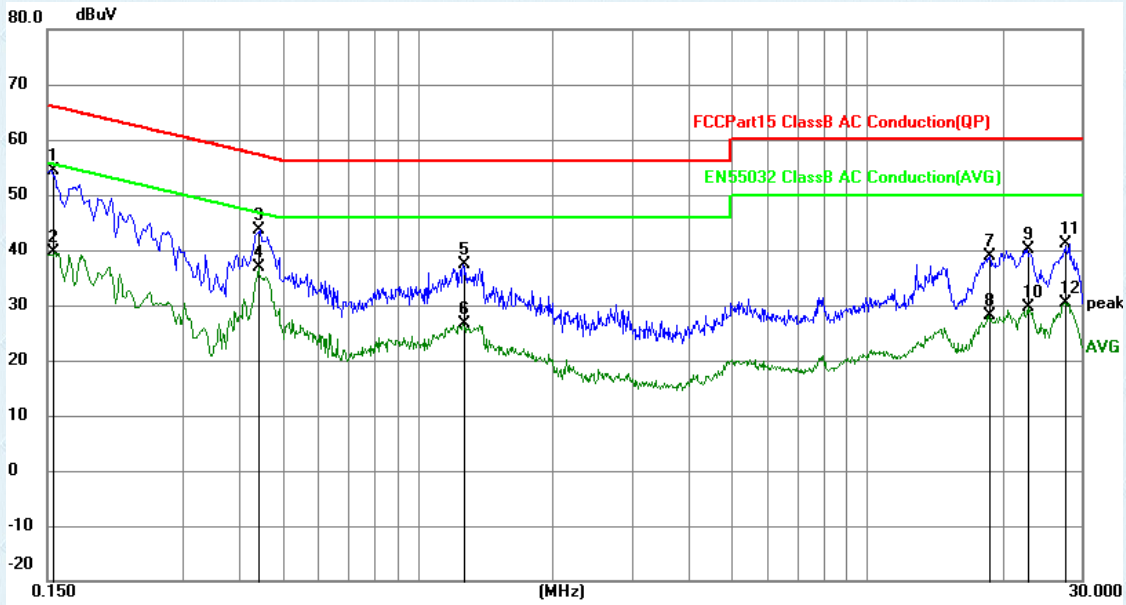

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1544	43.83	10.49	54.32	65.76	-11.44	QP
2	0.1544	29.10	10.49	39.59	55.76	-16.17	AVG
3	0.4425	33.18	10.37	43.55	57.01	-13.46	QP
4	0.4425	26.46	10.37	36.83	47.01	-10.18	AVG
5	1.2659	27.06	10.29	37.35	56.00	-18.65	QP
6	1.2659	16.40	10.29	26.69	46.00	-19.31	AVG
7	18.6630	28.47	10.52	38.99	60.00	-21.01	QP
8	18.6630	17.50	10.52	28.02	50.00	-21.98	AVG
9	22.8429	29.54	10.60	40.14	60.00	-19.86	QP
10	22.8429	19.14	10.60	29.74	50.00	-20.26	AVG
11	27.6810	30.37	10.67	41.04	60.00	-18.96	QP
12	27.6810	19.75	10.67	30.42	50.00	-19.58	AVG

Neutral:

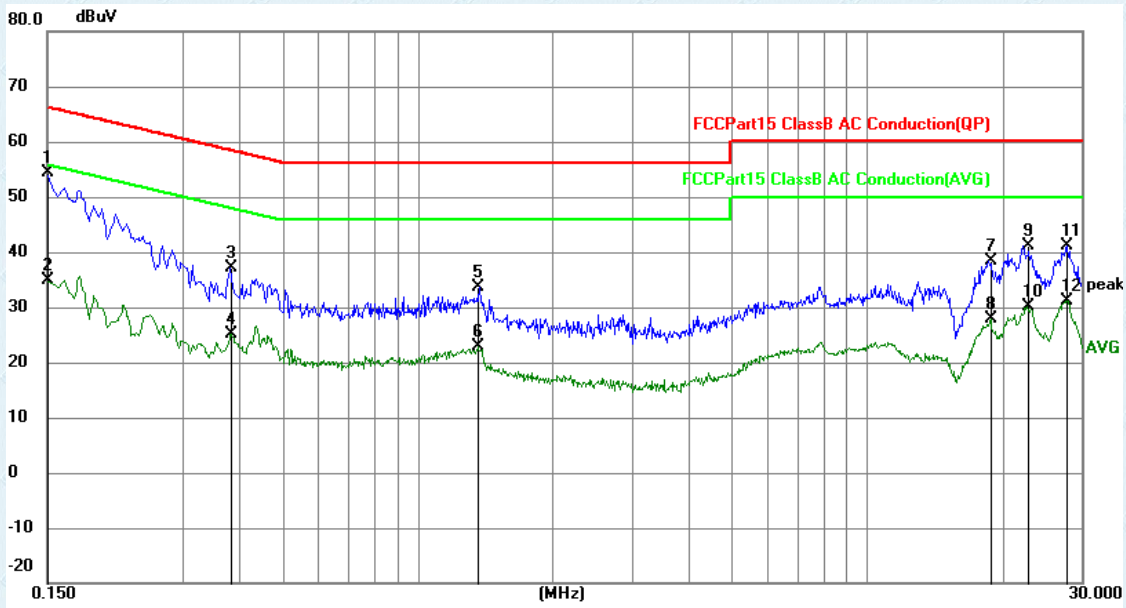


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	43.85	10.49	54.34	66.00	-11.66	QP
2	0.1500	24.33	10.49	34.82	56.00	-21.18	AVG
3	0.3840	26.68	10.38	37.06	58.19	-21.13	QP
4	0.3840	14.83	10.38	25.21	48.19	-22.98	AVG
5	1.3649	23.35	10.29	33.64	56.00	-22.36	QP
6	1.3649	12.67	10.29	22.96	46.00	-23.04	AVG
7	18.8338	27.91	10.53	38.44	60.00	-21.56	QP
8	18.8338	17.26	10.53	27.79	50.00	-22.21	AVG
9	22.7130	30.43	10.60	41.03	60.00	-18.97	QP
10	22.7130	19.43	10.60	30.03	50.00	-19.97	AVG
11	27.7935	30.46	10.67	41.13	60.00	-18.87	QP
12	27.7935	20.56	10.67	31.23	50.00	-18.77	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both *limits and measurement with the average detector receiver is unnecessary.*

7.3 Duty Cycle

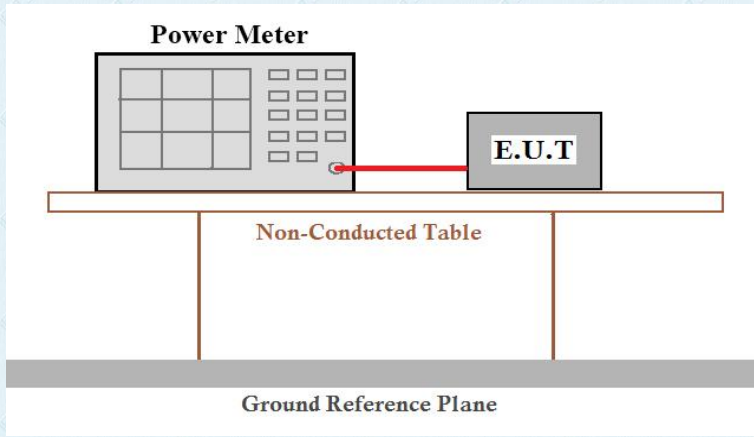Test Requirement:	FCC Part15 E Section 15.407
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	/
Test setup:	 <p>The diagram illustrates the test setup. A Power Meter is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


ANT 1(Module RTL8821CU):

Modulation	Duty cycle	Duty Factor
802.11a	100%	0
802.11n(HT20)	100%	0
802.11n(HT40)	100%	0
802.11ac(HT20)	100%	0
802.11ac(HT40)	100%	0
802.11ac(HT80)	100%	0

ANT 2(Module RTL8822CU):

Modulation	Duty cycle	Duty Factor
802.11a	100%	0
802.11n(HT20)	100%	0
802.11n(HT40)	100%	0
802.11ac(HT20)	100%	0
802.11ac(HT40)	100%	0
802.11ac(HT80)	100%	0

7.4 Conducted Peak Output Power

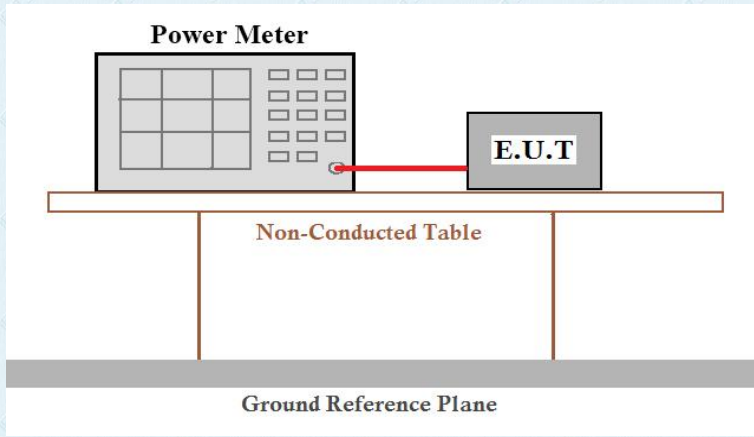Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

ANT 1(Module RTL8821CU):

Test CH	Peak Output Power (dBm)						Limit(dBm)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	10.22	9.12	9.71	9.02	8.87	---	30.00	Pass
Middle	10.70	9.76	9.81	---	---	9.41		
Highest	10.79	10.44	9.94	9.88	9.81	---		

ANT 2(Module RTL8822CU):

Test CH	Peak Output Power (dBm)						Limit(dBm)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	8.66	8.65	8.61	6.56	8.37	---	30.00	Pass
Middle	8.22	7.84	8.30	---	---	5.94		
Highest	8.15	7.98	7.95	7.66	7.67	---		


Remark: “---“is not applicable

ANT1+ANT2:

Modulation	Test CH	Peak Output Power (dBm)		Sum Output Power (dBm)	Limit (dBm)	Result
802.11a	149	ANT 1	10.22	12.52	29.50	Pass
		ANT 2	8.66			
	157	ANT 1	10.70	12.64		
		ANT 2	8.22			
	165	ANT 1	10.79	12.68		
		ANT 2	8.15			
802.11n(HT20)	149	ANT 1	9.12	11.90	29.50	Pass
		ANT 2	8.65			
	157	ANT 1	9.76	11.92		
		ANT 2	7.84			
	165	ANT 1	10.44	12.39		
		ANT 2	7.98			
802.11ac(HT20)	149	ANT 1	9.71	12.21	29.50	Pass
		ANT 2	8.61			
	157	ANT 1	9.81	12.13		
		ANT 2	8.30			
	165	ANT 1	9.94	12.07		
		ANT 2	7.95			
802.11n(HT40)	151	ANT 1	9.02	11.40	29.50	Pass
		ANT 2	7.66			
	159	ANT 1	9.88	11.54		
		ANT 2	6.56			
802.11ac(HT40)	151	ANT 1	8.87	11.64	29.50	Pass
		ANT 2	8.37			
	159	ANT 1	9.81	11.88		
		ANT 2	7.67			
802.11ac(HT80)	155	ANT 1	9.41	11.02	29.50	Pass
		ANT 2	5.94			

Note: GANT =3.5dBi, Array Gain=10log(NANT/NSS)=3.0dBi, Directional Gain=GANT + Array Gain=6.5dBi, limit=30-(6.5-6)=29.50dBm

7.5 Channel Bandwidth

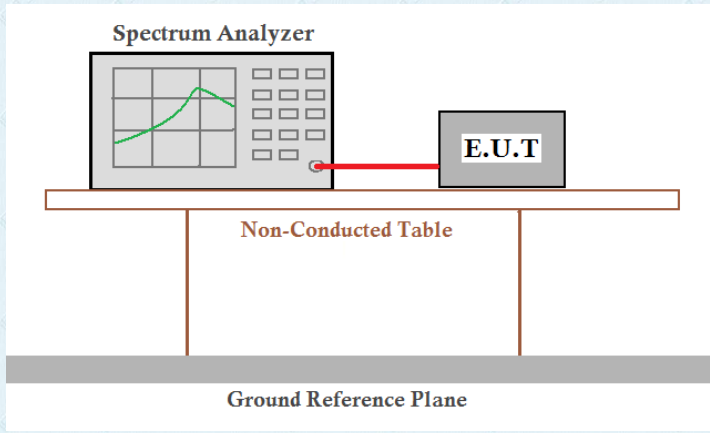Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

ANT 1(Module RTL8821CU):


Test CH	Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.54	17.66	17.64	36.42	36.39	---	>500	Pass
Middle	16.52	17.66	17.60	---	---	75.84		
Highest	16.45	17.71	17.63	36.40	36.37	---		


ANT 2(Module RTL8822CU):

Test CH	Channel Bandwidth (MHz)						Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (HT20)	802.11n (HT40)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	16.32	17.55	17.54	35.10	35.02	---	>500	Pass
Middle	16.33	17.58	17.54	---	---	73.87		
Highest	16.31	17.55	17.54	35.10	35.05	---		

Remark: "---" is not applicable

Test plot as follows:

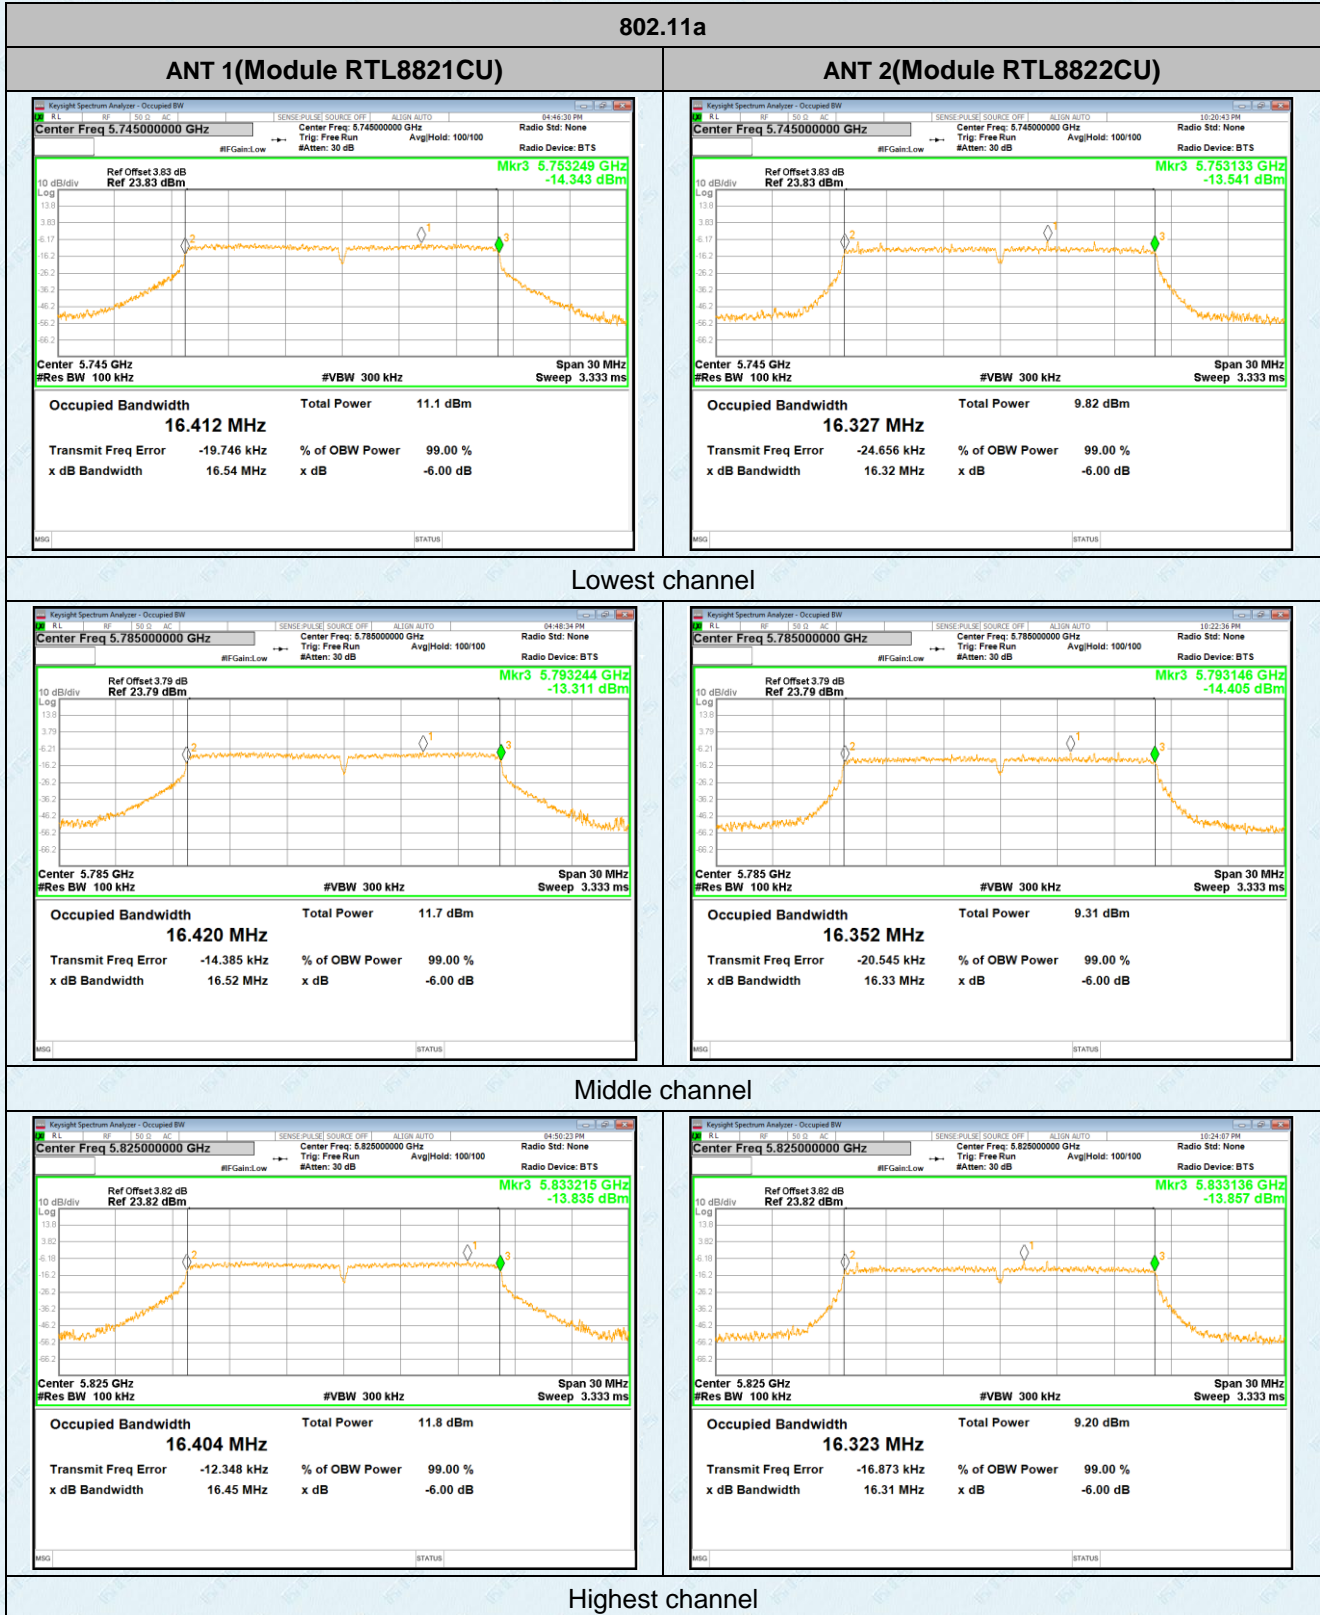


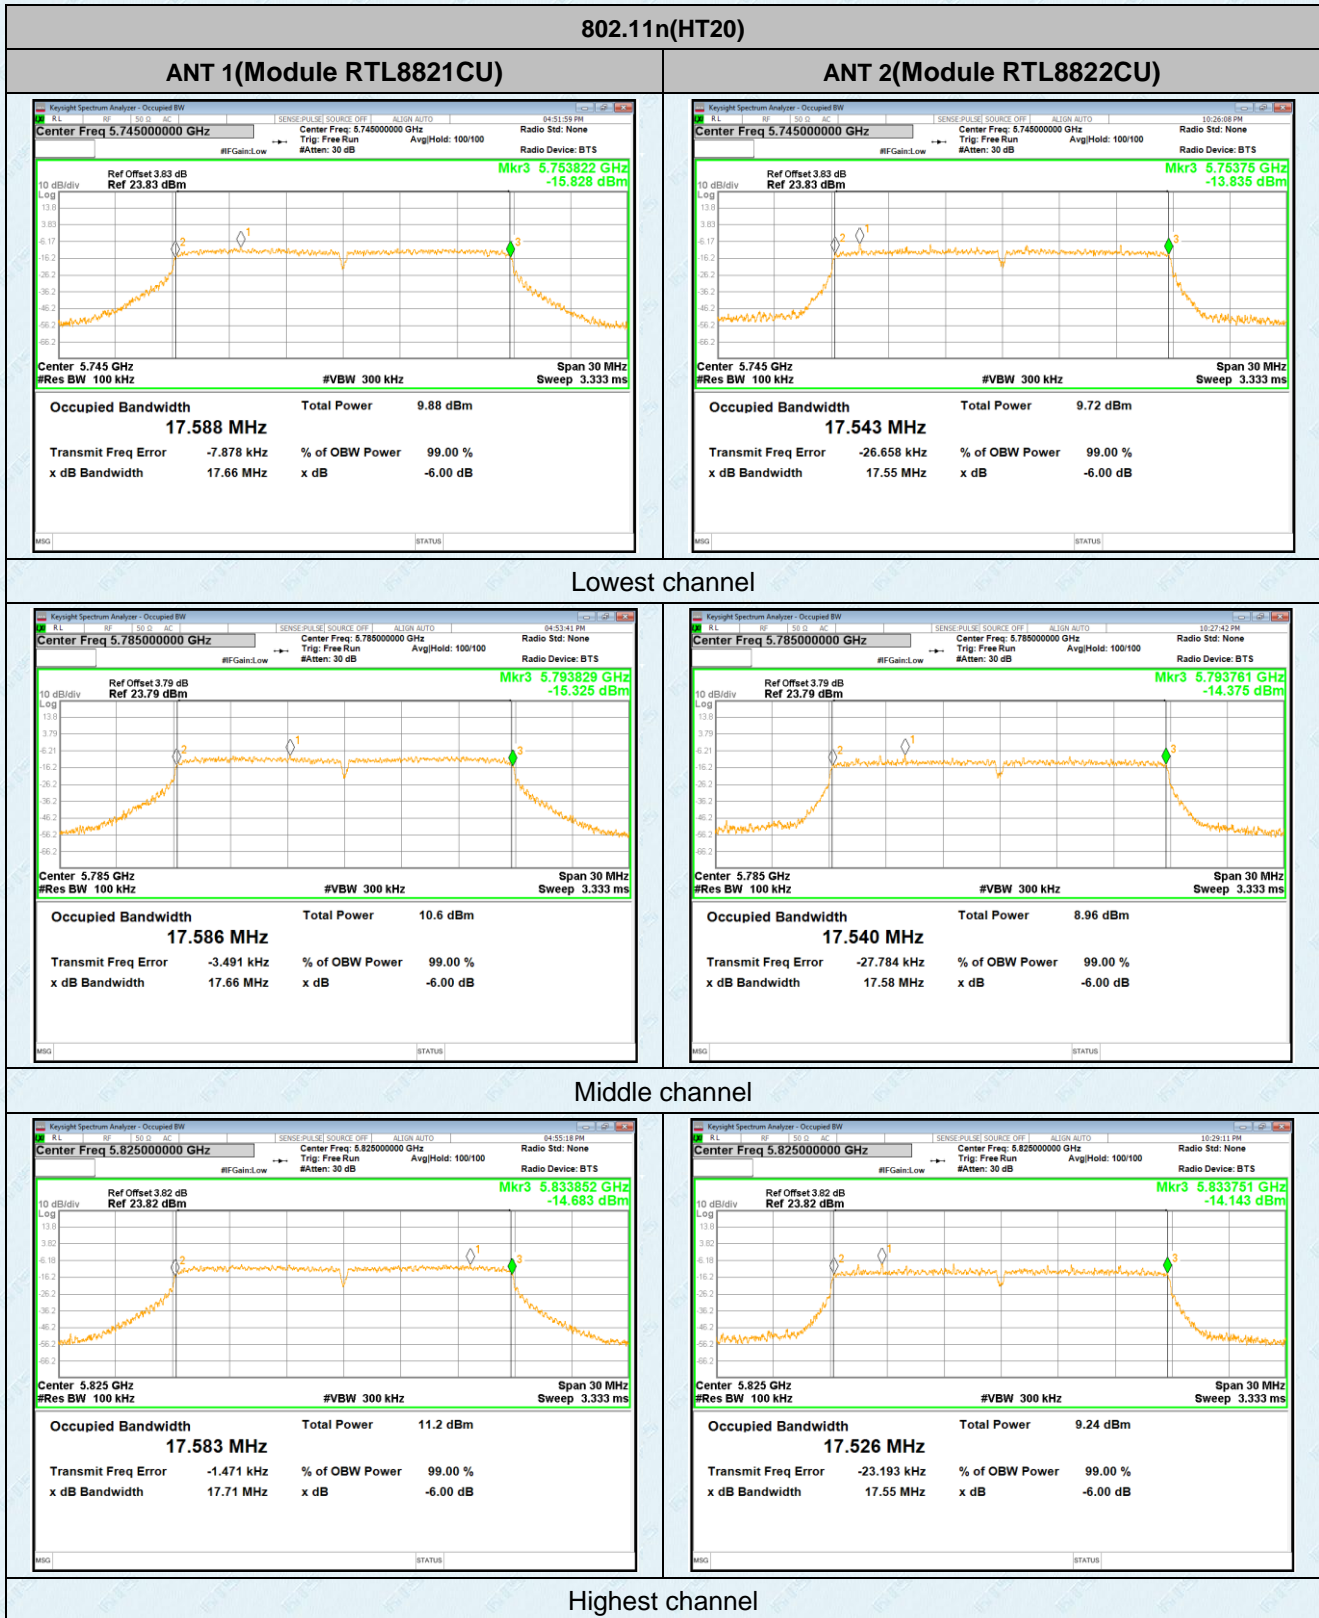




802.11n(HT40)



ANT 1(Module RTL8821CU)

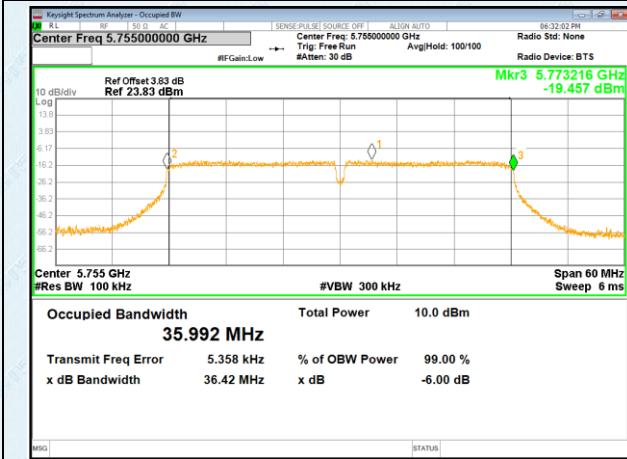


ANT 2(Module RTL8822CU)

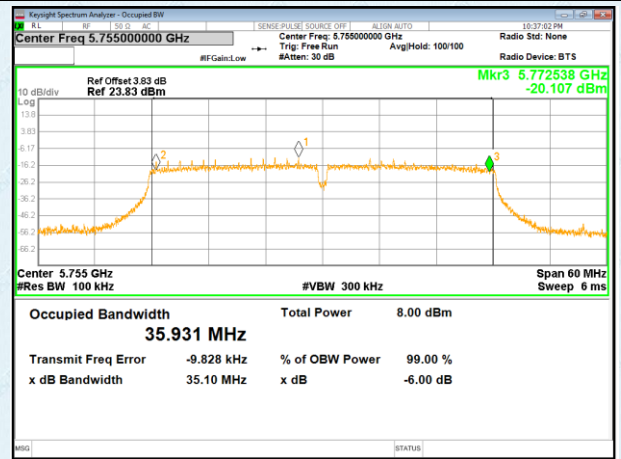


Lowest channel

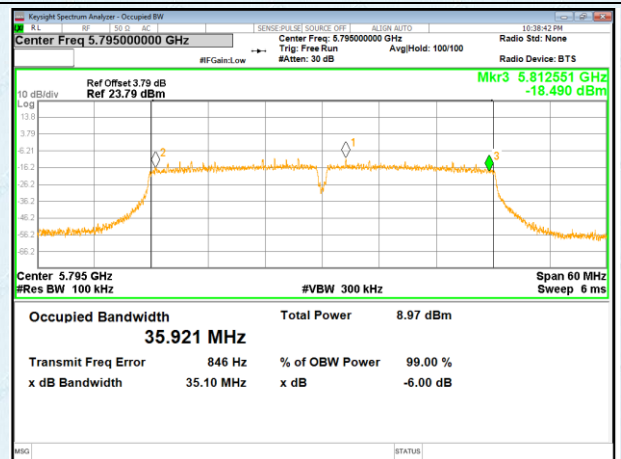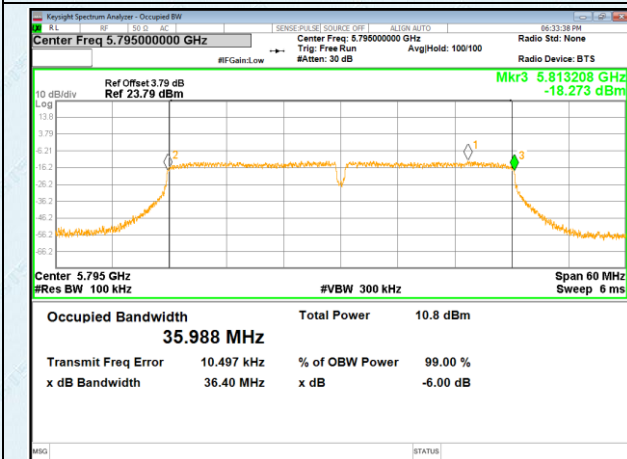


Highest channel

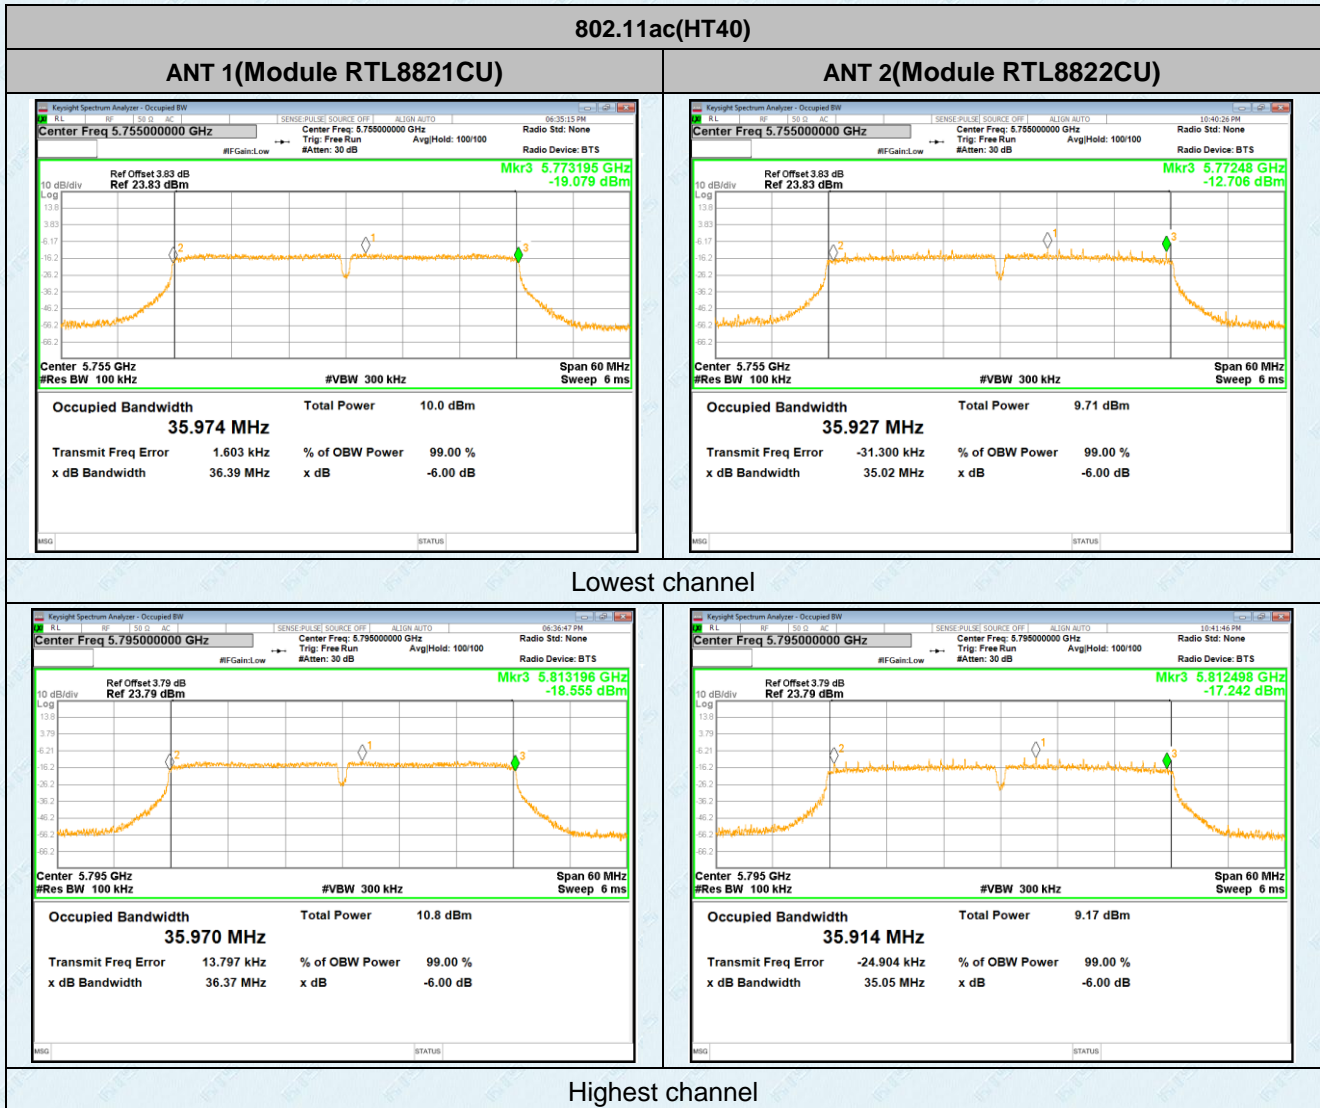

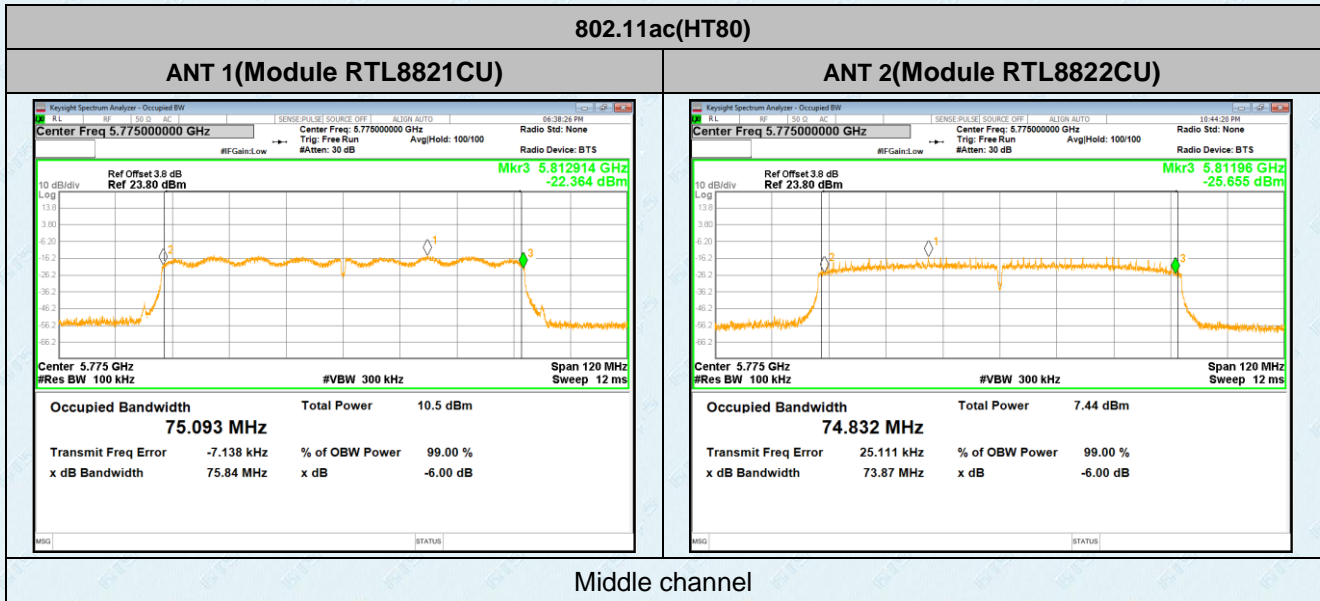

7.6 Power Spectral Density

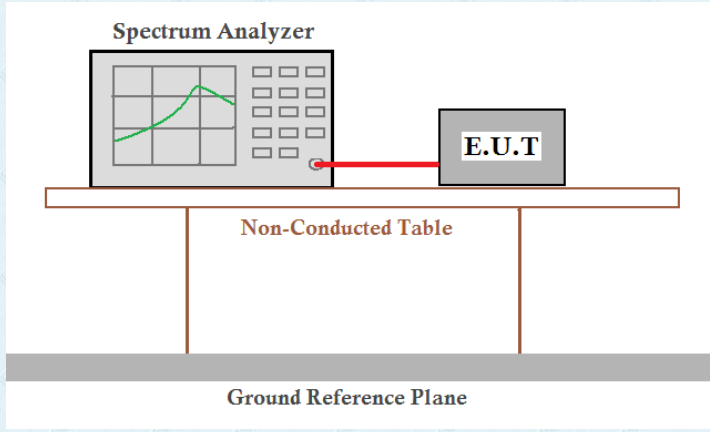Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Note: If the measurement is X dBm/510kHz, thus $X \text{ dBm}/510\text{kHz} = (10^{X/10}) * (500 / 510) \text{ dBm}/500\text{kHz}$

ANT 1(Module RTL8821CU):

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11a	802.11n (HT20)	802.11n (HT40)		
Lowest	-1.183	-2.255	-5.646	-1.269	-2.341	-5.732	30.00	Pass
Middle	-0.535	-1.369	--	-0.621	-1.455	--		
Highest	-0.785	-0.611	-4.976	-0.871	-0.697	-5.062		

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	-1.910	-5.311	---	-1.996	-5.397	---	30.00	Pass
Middle	-1.630	---	-7.171	-1.716	---	-7.257		
Highest	-1.215	-4.993	---	-1.301	-5.079	---		

ANT 2(Module RTL8822CU):

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11a	802.11n (HT20)	802.11n (HT40)	802.11a	802.11n (HT20)	802.11n (HT40)		
Lowest	-2.363	-2.981	-7.166	-2.449	-3.067	-7.252	30.00	Pass
Middle	-3.263	-3.536	---	-3.349	-3.622	---		
Highest	-3.273	-3.086	-6.345	-3.359	-3.172	-6.431		

Test CH	Power Spectral Density (dBm/510kHz)			Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)	Result
	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)	802.11ac (HT20)	802.11ac (HT40)	802.11ac (HT80)		
Lowest	-3.103	-5.920	---	-3.189	-6.006	---	30.00	Pass
Middle	-3.237	---	-11.621	-3.323	---	-11.707		
Highest	-2.782	-6.476	---	-2.868	-6.562	---		

Remark: "---"is not applicable


ANT1+ANT2


Modulation	Test CH	Power Spectral Density (dBm/500kHz)		Sum Output Power(dBm)	Limit (dBm/500kHz)	Result
802.11a	149	ANT 1	-1.269	1.19	29.5	Pass
		ANT 2	-2.449			
	157	ANT 1	-0.621	1.24		
		ANT 2	-3.349			
	165	ANT 1	-0.871	1.07		
		ANT 2	-3.359			
802.11n(HT20)	149	ANT 1	-2.341	0.321	29.5	Pass
		ANT 2	-3.067			
	157	ANT 1	-1.455	0.606		
		ANT 2	-3.622			
	165	ANT 1	-0.697	1.250		
		ANT 2	-3.172			
802.11ac(HT20)	149	ANT 1	-1.996	0.459	29.5	Pass
		ANT 2	-3.189			
	157	ANT 1	-1.716	0.565		
		ANT 2	-3.323			
	165	ANT 1	-1.301	0.996		
		ANT 2	-2.868			
802.11n(HT40)	151	ANT 1	-5.732	-3.416	29.5	Pass
		ANT 2	-7.252			
	159	ANT 1	-5.062	-2.682		
		ANT 2	-6.431			
802.11ac(HT40)	151	ANT 1	-5.397	-2.681	29.5	Pass
		ANT 2	-6.006			
	159	ANT 1	-5.079	-2.747		
		ANT 2	-6.562			
802.11ac(HT80)	155	ANT 1	-7.257	-4.225	29.5	Pass
		ANT 2	-11.707			


Note: GANT =3.5dBi, Array Gain=10log(NANT/NSS)=3.0dBi, Directional Gain=GANT + Array Gain=6.5dBi, Limit =30-(6.5-6) =29.5dBm


Test plot as follows:




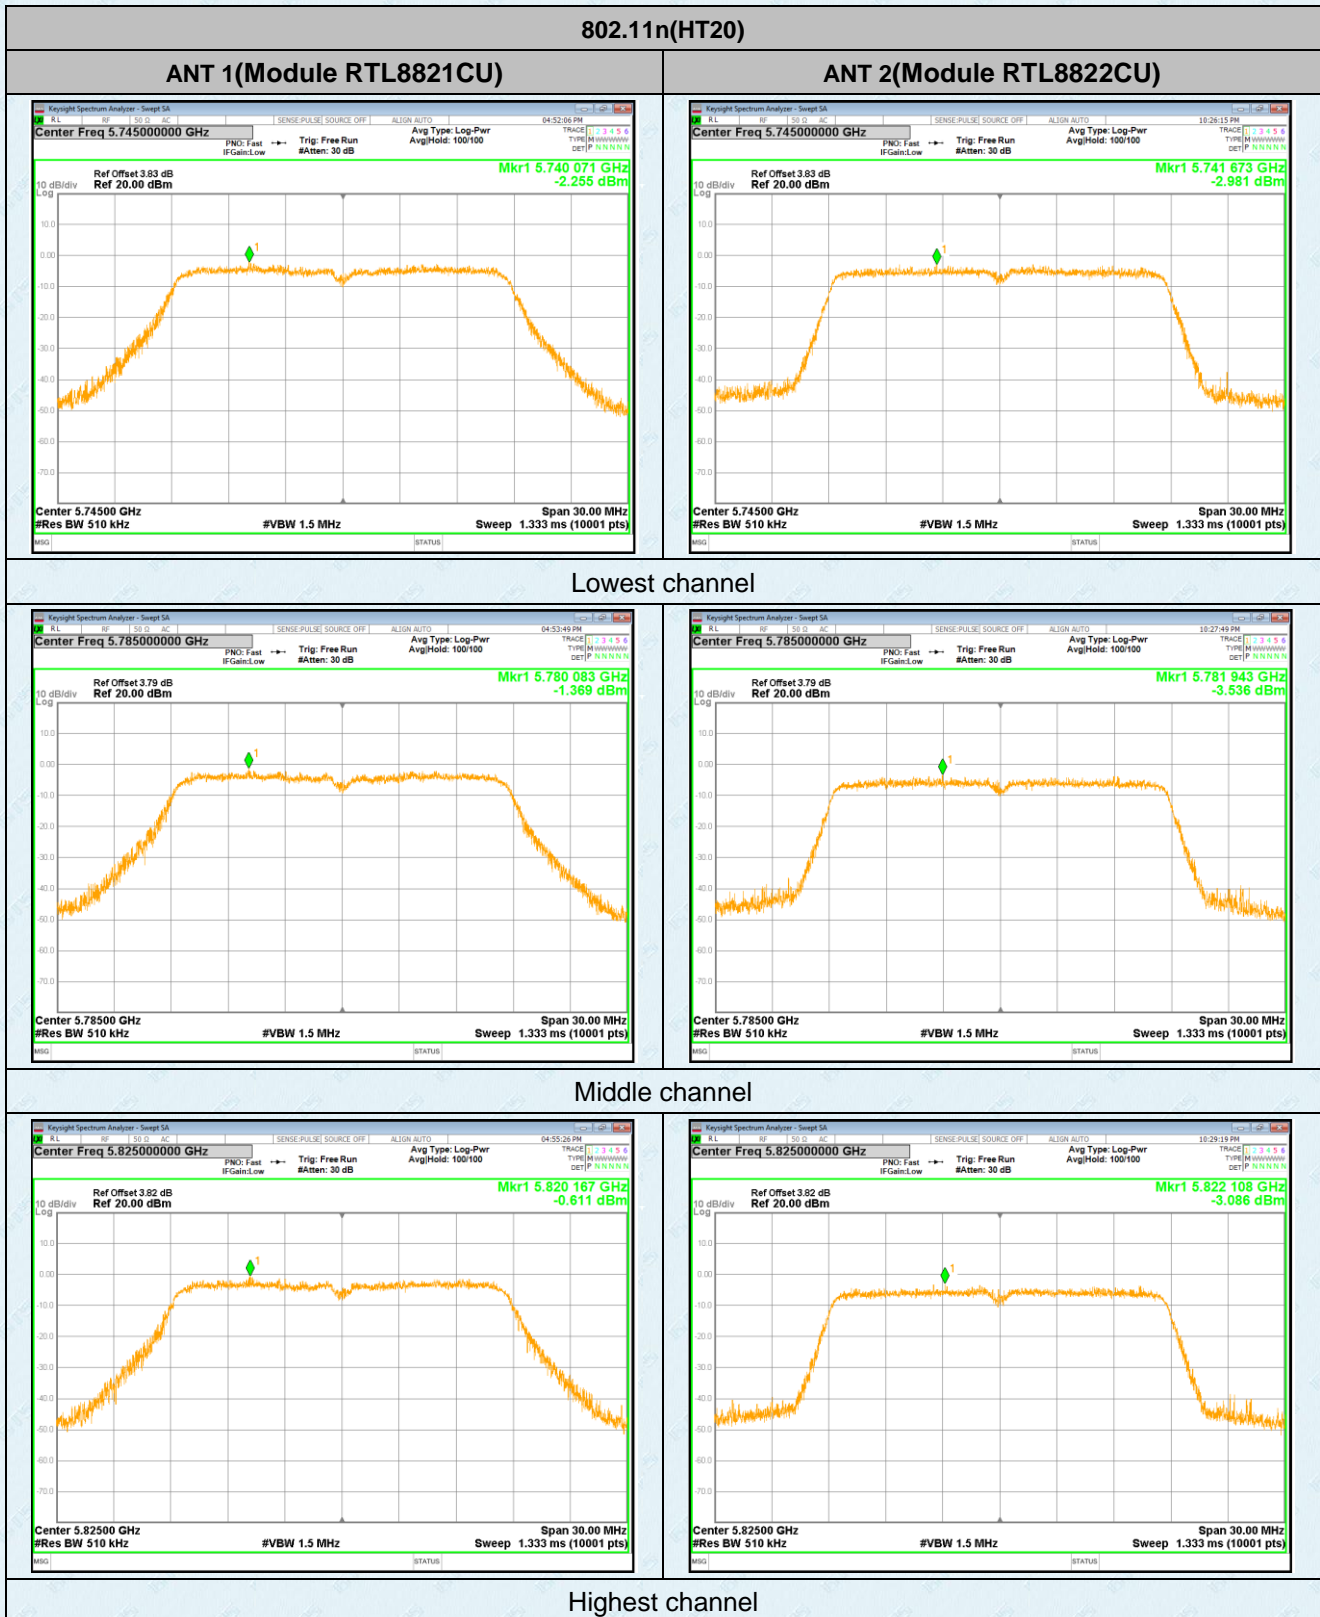

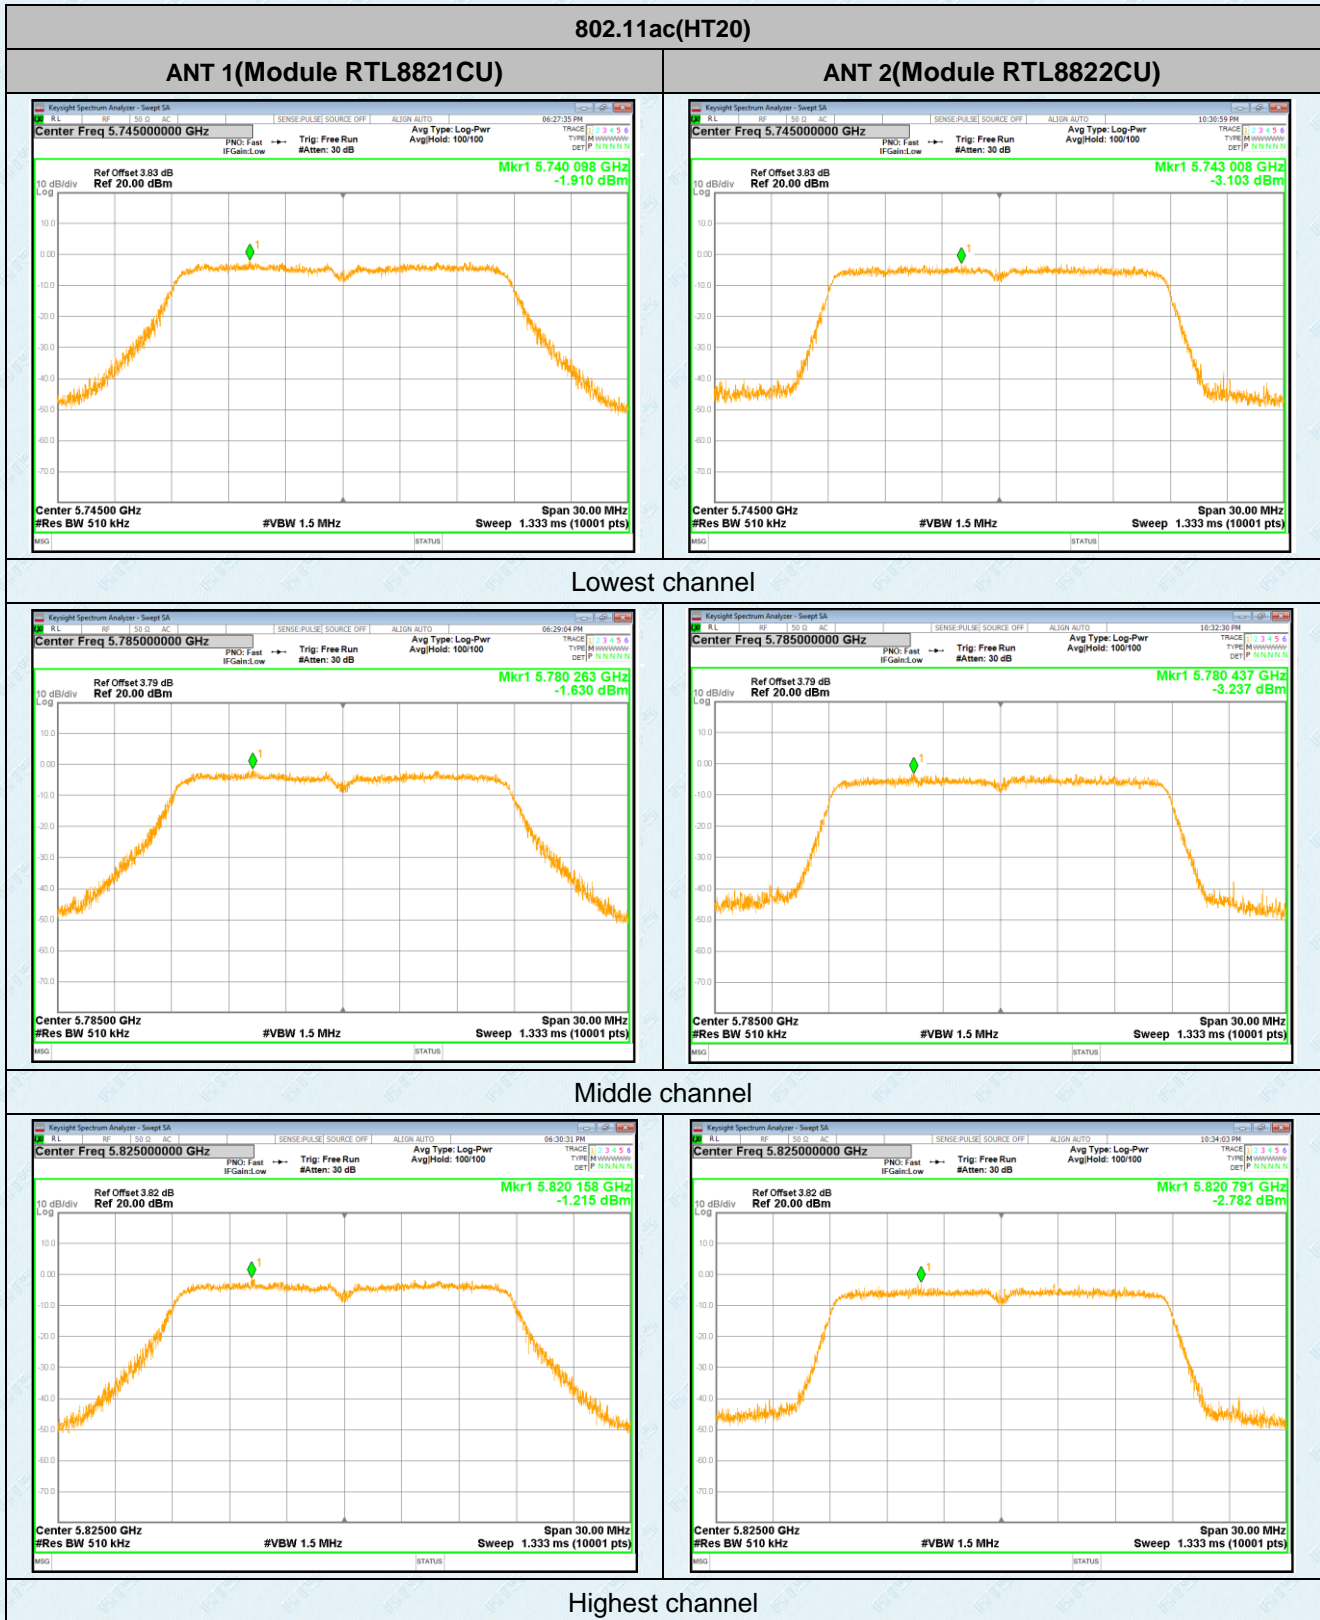

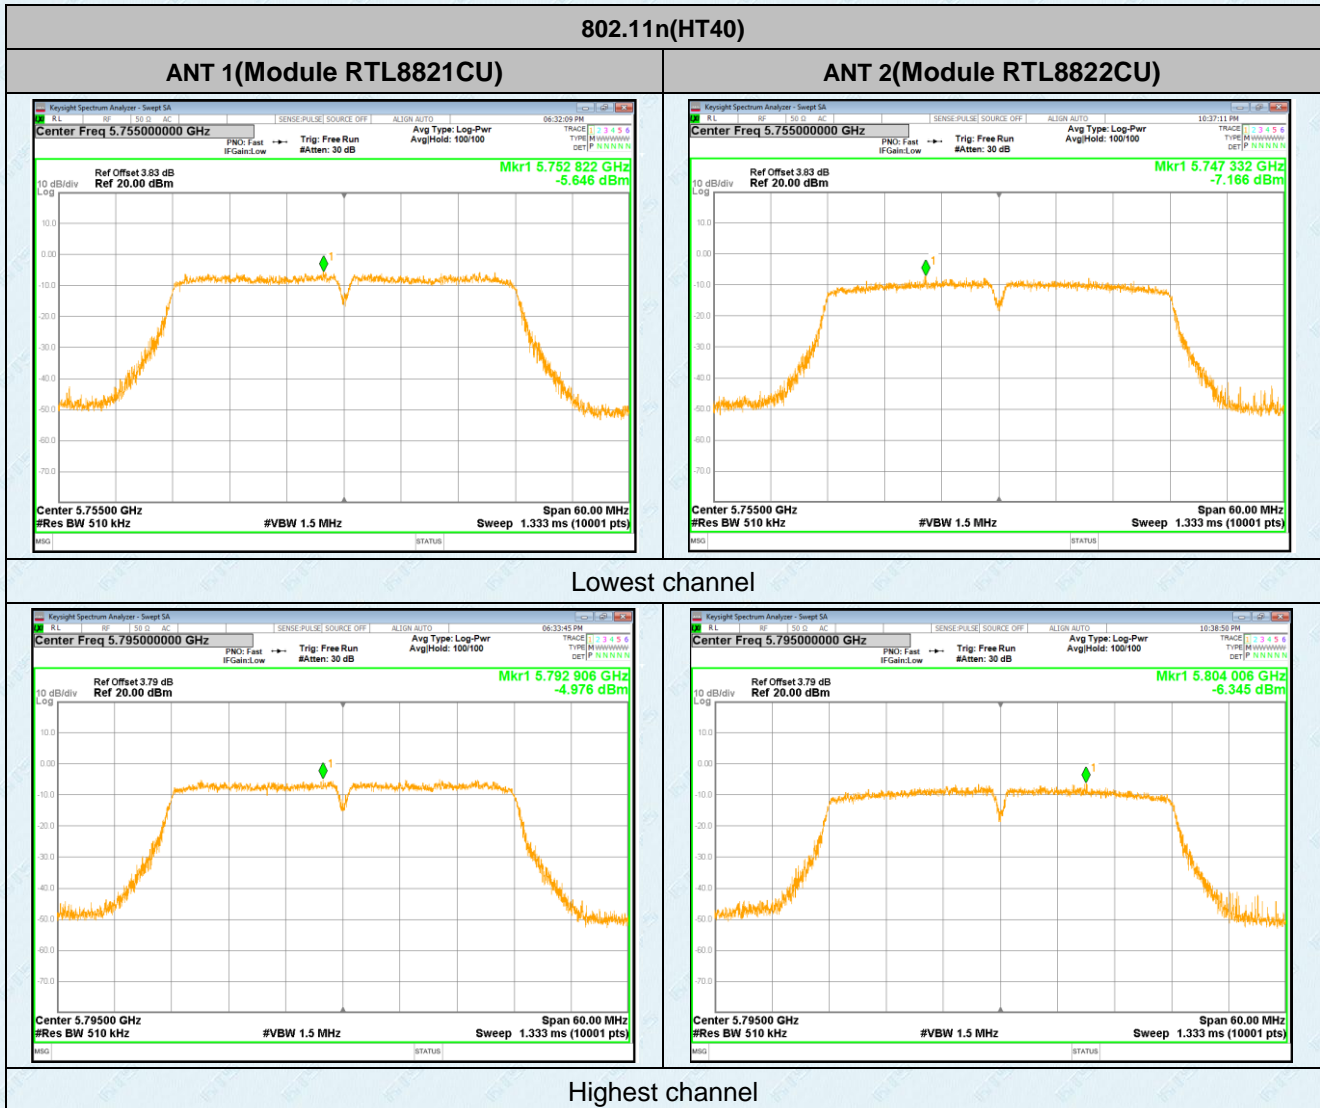

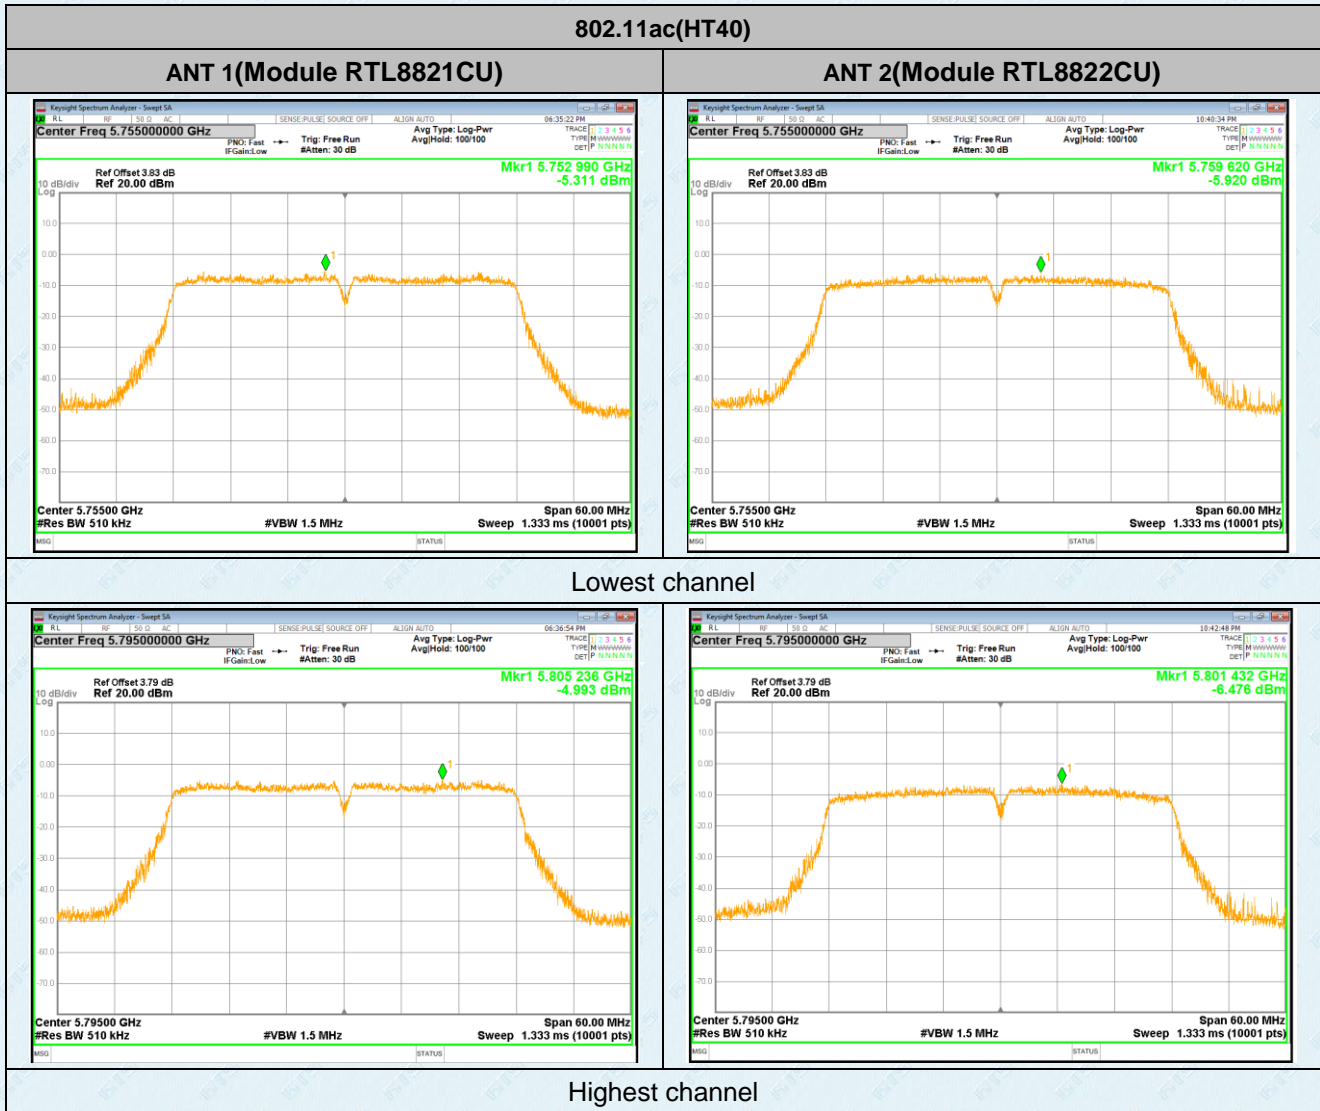

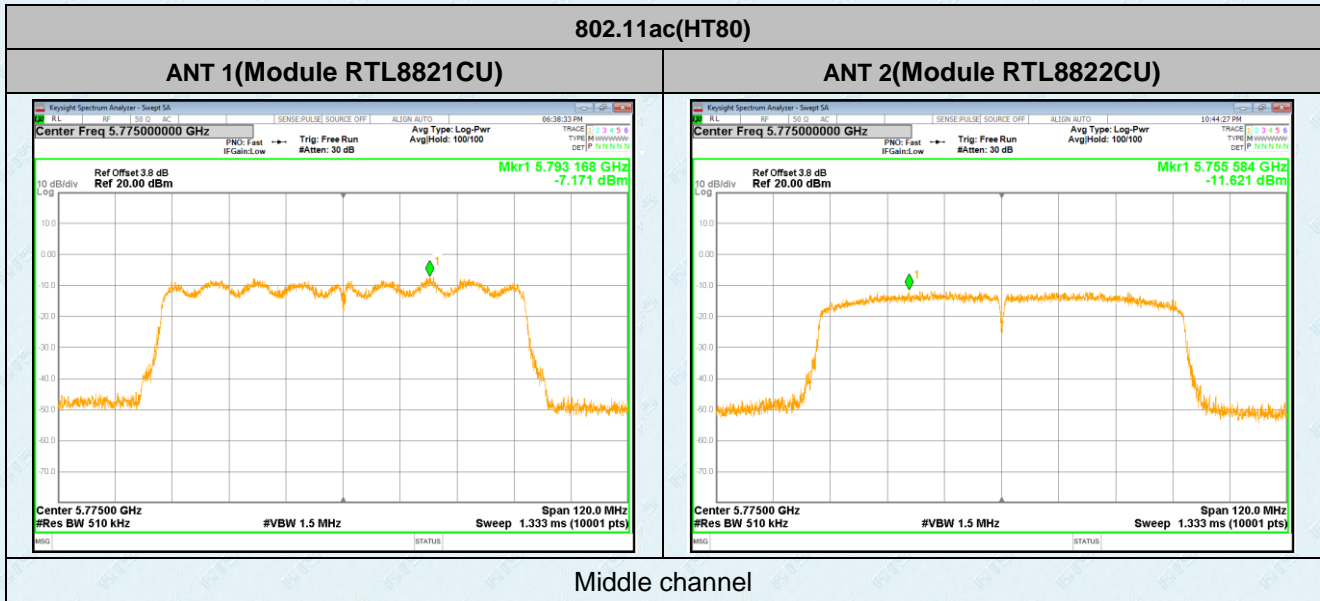

7.7 Band edge

7.7.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Remarks:

1. Only the worst case ANT 1 (Module RTL8821CU) test data.
2. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02v02r01 section G) 1) d), for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$$

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m.}$$

$$E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m.}$$

$$E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m.}$$

$$E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$$

Measurement data:

IEEE 802.11a								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	30.53	32.36	9.72	23.83	48.78	68.20	-19.42	Horizontal
5700.00	29.09	32.50	9.79	23.84	47.54	105.20	-57.66	Horizontal
5720.00	31.94	32.53	9.81	23.85	50.43	110.80	-60.37	Horizontal
5725.00	32.13	32.53	9.83	23.86	50.63	122.20	-71.57	Horizontal
5850.00	30.93	32.70	9.99	23.87	49.75	122.20	-72.45	Horizontal
5855.00	30.01	32.72	9.99	23.88	48.84	110.80	-61.96	Horizontal
5875.00	33.05	32.74	10.04	23.89	51.94	105.20	-53.26	Horizontal
5925.00	37.36	32.80	10.11	23.90	56.37	68.20	-11.83	Horizontal
5650.00	33.21	32.36	9.72	23.83	51.46	68.20	-16.74	Vertical
5700.00	37.17	32.50	9.79	23.84	55.62	105.20	-49.58	Vertical
5720.00	33.94	32.53	9.81	23.85	52.43	110.80	-58.37	Vertical
5725.00	32.39	32.53	9.83	23.86	50.89	122.20	-71.31	Vertical
5850.00	37.91	32.70	9.99	23.87	56.73	122.20	-65.47	Vertical
5855.00	35.69	32.72	9.99	23.88	54.52	110.80	-56.28	Vertical
5875.00	32.64	32.74	10.04	23.89	51.53	105.20	-53.67	Vertical
5925.00	31.47	32.80	10.11	23.90	50.48	68.20	-17.72	Vertical

IEEE 802.11n HT20								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	33.51	32.36	9.72	23.83	51.76	68.20	-16.44	Horizontal
5700.00	32.14	32.50	9.79	23.84	50.59	105.20	-54.61	Horizontal
5720.00	35.99	32.53	9.81	23.85	54.48	110.80	-56.32	Horizontal
5725.00	37.21	32.53	9.83	23.86	55.71	122.20	-66.49	Horizontal
5850.00	35.8	32.70	9.99	23.87	54.62	122.20	-67.58	Horizontal
5855.00	35.03	32.72	9.99	23.88	53.86	110.80	-56.94	Horizontal
5875.00	37.26	32.74	10.04	23.89	56.15	105.20	-49.05	Horizontal
5925.00	36.61	32.80	10.11	23.90	55.62	68.20	-12.58	Horizontal
5650.00	34.58	32.36	9.72	23.83	52.83	68.20	-15.37	Vertical
5700.00	37.72	32.50	9.79	23.84	56.17	105.20	-49.03	Vertical
5720.00	33.4	32.53	9.81	23.85	51.89	110.80	-58.91	Vertical
5725.00	33.47	32.53	9.83	23.86	51.97	122.20	-70.23	Vertical
5850.00	36.92	32.70	9.99	23.87	55.74	122.20	-66.46	Vertical
5855.00	35.54	32.72	9.99	23.88	54.37	110.80	-56.43	Vertical
5875.00	37.47	32.74	10.04	23.89	56.36	105.20	-48.84	Vertical
5925.00	33.72	32.80	10.11	23.90	52.73	68.20	-15.47	Vertical

IEEE 802.11ac HT20								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.23	32.36	9.72	23.83	54.48	68.20	-13.72	Horizontal
5700.00	34.74	32.50	9.79	23.84	53.19	105.20	-52.01	Horizontal
5720.00	35.99	32.53	9.81	23.85	54.48	110.80	-56.32	Horizontal
5725.00	37.69	32.53	9.83	23.86	56.19	122.20	-66.01	Horizontal
5850.00	37.00	32.70	9.99	23.87	55.82	122.20	-66.38	Horizontal
5855.00	35.90	32.72	9.99	23.88	54.73	110.80	-56.07	Horizontal
5875.00	36.72	32.74	10.04	23.89	55.61	105.20	-49.59	Horizontal
5925.00	37.91	32.80	10.11	23.90	56.92	68.20	-11.28	Horizontal
5650.00	33.13	32.36	9.72	23.83	51.38	68.20	-16.82	Vertical
5700.00	37.03	32.50	9.79	23.84	55.48	105.20	-49.72	Vertical
5720.00	37.45	32.53	9.81	23.85	55.94	110.80	-54.86	Vertical
5725.00	31.98	32.53	9.83	23.86	50.48	122.20	-71.72	Vertical
5850.00	36.93	32.70	9.99	23.87	55.75	122.20	-66.45	Vertical
5855.00	33.54	32.72	9.99	23.88	52.37	110.80	-58.43	Vertical
5875.00	34.94	32.74	10.04	23.89	53.83	105.20	-51.37	Vertical
5925.00	36.38	32.80	10.11	23.90	55.39	68.20	-12.81	Vertical

IEEE 802.11n HT40								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	35.32	32.36	9.72	23.83	53.57	68.20	-14.63	Horizontal
5700.00	31.47	32.50	9.79	23.84	49.92	105.20	-55.28	Horizontal
5720.00	38.33	32.53	9.81	23.85	56.82	110.80	-53.98	Horizontal
5725.00	37.43	32.53	9.83	23.86	55.93	122.20	-66.27	Horizontal
5850.00	36.99	32.70	9.99	23.87	55.81	122.20	-66.39	Horizontal
5855.00	37.8	32.72	9.99	23.88	56.63	110.80	-54.17	Horizontal
5875.00	32.79	32.74	10.04	23.89	51.68	105.20	-53.52	Horizontal
5925.00	36.61	32.80	10.11	23.90	55.62	68.20	-12.58	Horizontal
5650.00	33.12	32.36	9.72	23.83	51.37	68.20	-16.83	Vertical
5700.00	32.17	32.50	9.79	23.84	50.62	105.20	-54.58	Vertical
5720.00	34.44	32.53	9.81	23.85	52.93	110.80	-57.87	Vertical
5725.00	34.01	32.53	9.83	23.86	52.51	122.20	-69.69	Vertical
5850.00	35.27	32.70	9.99	23.87	54.09	122.20	-68.11	Vertical
5855.00	33.81	32.72	9.99	23.88	52.64	110.80	-58.16	Vertical
5875.00	33.59	32.74	10.04	23.89	52.48	105.20	-52.72	Vertical
5925.00	34.36	32.80	10.11	23.90	53.37	68.20	-14.83	Vertical

IEEE 802.11ac HT40								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.23	32.36	9.72	23.83	54.48	68.20	-13.72	Horizontal
5700.00	34.92	32.50	9.79	23.84	53.37	105.20	-51.83	Horizontal
5720.00	36.97	32.53	9.81	23.85	55.46	110.80	-55.34	Horizontal
5725.00	33.84	32.53	9.83	23.86	52.34	122.20	-69.86	Horizontal
5850.00	38.61	32.70	9.99	23.87	57.43	122.20	-64.77	Horizontal
5855.00	39.49	32.72	9.99	23.88	58.32	110.80	-52.48	Horizontal
5875.00	37.82	32.74	10.04	23.89	56.71	105.20	-48.49	Horizontal
5925.00	33.72	32.80	10.11	23.90	52.73	68.20	-15.47	Horizontal
5650.00	33.23	32.36	9.72	23.83	51.48	68.20	-16.72	Vertical
5700.00	37.04	32.50	9.79	23.84	55.49	105.20	-49.71	Vertical
5720.00	35.16	32.53	9.81	23.85	53.65	110.80	-57.15	Vertical
5725.00	33.79	32.53	9.83	23.86	52.29	122.20	-69.91	Vertical
5850.00	34.79	32.70	9.99	23.87	53.61	122.20	-68.59	Vertical
5855.00	33.02	32.72	9.99	23.88	51.85	110.80	-58.95	Vertical
5875.00	33.99	32.74	10.04	23.89	52.88	105.20	-52.32	Vertical
5925.00	34.46	32.80	10.11	23.90	53.47	68.20	-14.73	Vertical


IEEE 802.11ac HT80								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	36.62	32.36	9.72	23.83	54.87	68.20	-13.33	Horizontal
5700.00	34.79	32.50	9.79	23.84	53.24	105.20	-51.96	Horizontal
5720.00	36.99	32.53	9.81	23.85	55.48	110.80	-55.32	Horizontal
5725.00	33.65	32.53	9.83	23.86	52.15	122.20	-70.05	Horizontal
5850.00	37.65	32.70	9.99	23.87	56.47	122.20	-65.73	Horizontal
5855.00	38.26	32.72	9.99	23.88	57.09	110.80	-53.71	Horizontal
5875.00	36.59	32.74	10.04	23.89	55.48	105.20	-49.72	Horizontal
5925.00	32.62	32.80	10.11	23.90	51.63	68.20	-16.57	Horizontal
5650.00	32.14	32.36	9.72	23.83	50.39	68.20	-17.81	Vertical
5700.00	36.23	32.50	9.79	23.84	54.68	105.20	-50.52	Vertical
5720.00	35.2	32.53	9.81	23.85	53.69	110.80	-57.11	Vertical
5725.00	32.82	32.53	9.83	23.86	51.32	122.20	-70.88	Vertical
5850.00	33.61	32.70	9.99	23.87	52.43	122.20	-69.77	Vertical
5855.00	31.85	32.72	9.99	23.88	50.68	110.80	-60.12	Vertical
5875.00	32.54	32.74	10.04	23.89	51.43	105.20	-53.77	Vertical
5925.00	33.87	32.80	10.11	23.90	52.88	68.20	-15.32	Vertical



Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*

7.8 Spurious Emission

7.8.1 Radiated Emission Method

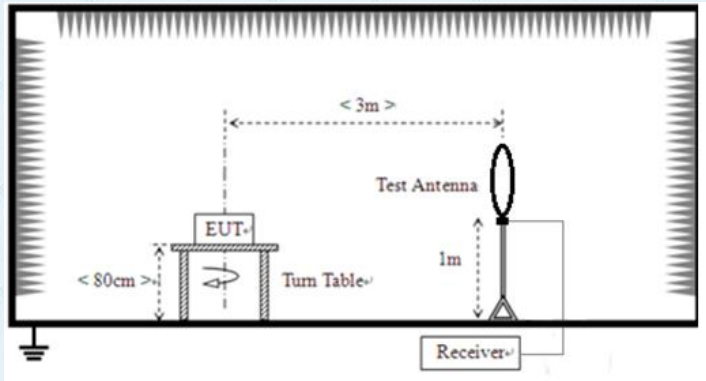Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Frequency	Limit (dBm/MHz)	Remark		
	Above 1GHz	-27.0	Peak Value		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to 1GHz					

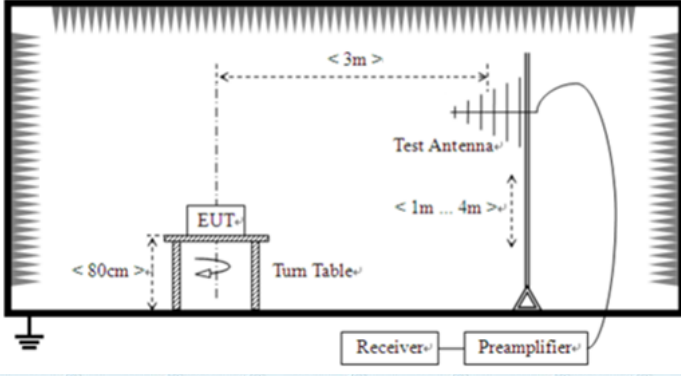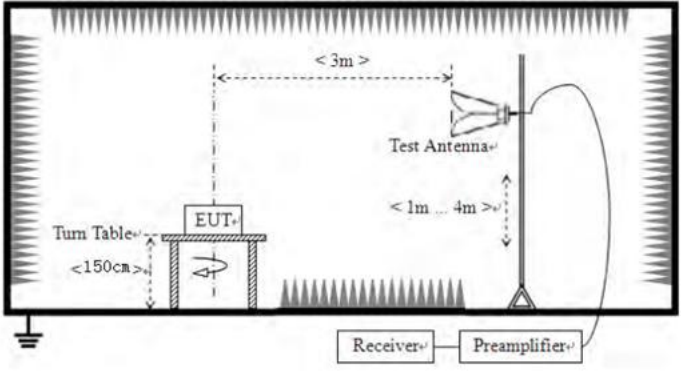	 <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test

	worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

1. *Only the worst case Main Antenna test data.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

Measurement Data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Below 1GHz


Pre-scan all test modes, found worst case at 802.11ac(HT20), and so only show the test result of 802.11ac(HT20)

Horizontal:

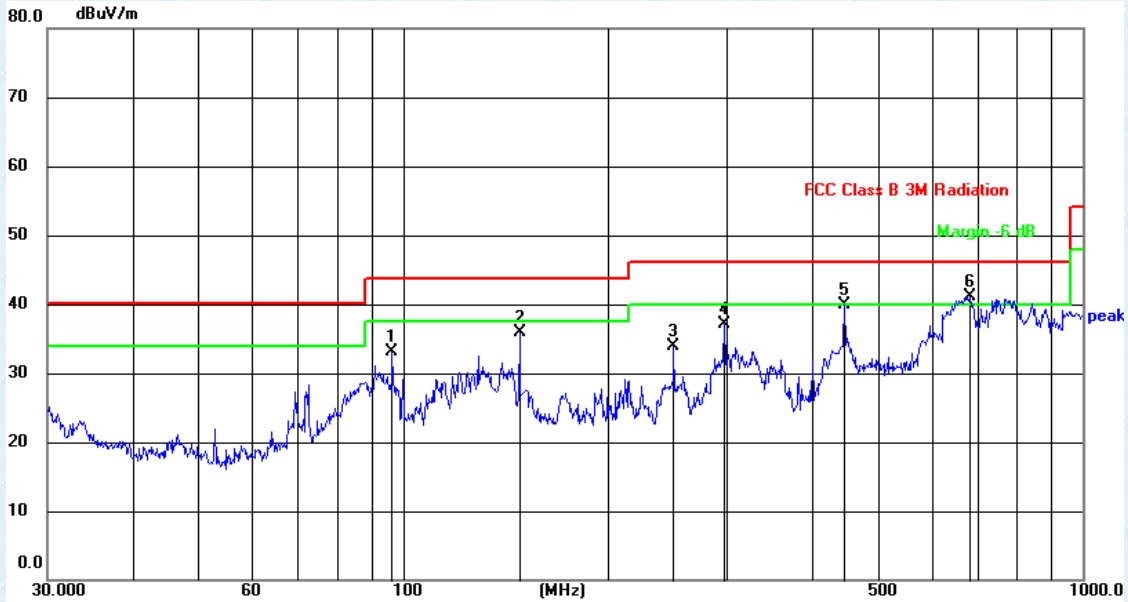

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	96.4360	53.22	-20.14	33.08	43.50	-10.42	QP
2	148.4410	54.48	-18.67	35.81	43.50	-7.69	QP
3	250.3009	52.11	-18.20	33.91	46.00	-12.09	QP
4	297.2238	55.58	-18.50	37.08	46.00	-8.92	QP
5	446.4139	54.82	-14.87	39.95	46.00	-6.05	QP
6	682.3482	50.52	-9.42	41.10	46.00	-4.90	QP

Vertical:

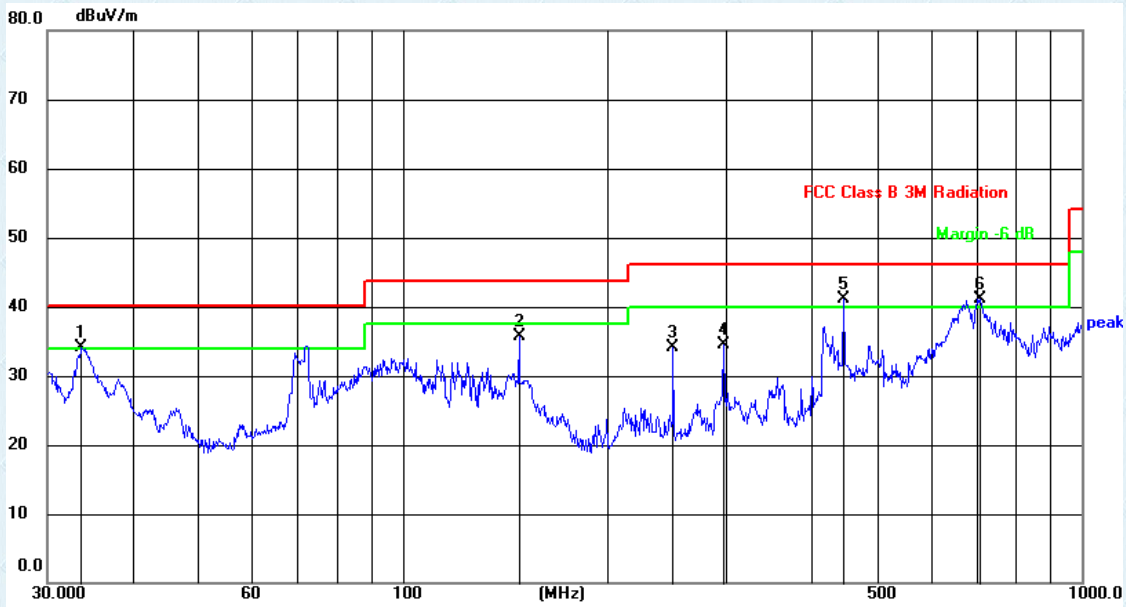

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	33.6802	55.42	-21.35	34.07	40.00	-5.93	QP
2	148.4410	54.66	-18.95	35.71	43.50	-7.79	QP
3	250.3009	52.25	-18.20	34.05	46.00	-11.95	QP
4	297.2238	52.41	-17.99	34.42	46.00	-11.58	QP
5	446.4139	56.02	-14.88	41.14	46.00	-4.86	QP
6	709.1820	49.85	-8.81	41.04	46.00	-4.96	QP

Above 1GHz:

All antennas have been tested, Only the data of worst case ANT 1+ANT2 at each channel plan report

Test mode:		802.11a		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490.00	25.23	21.64	46.87	54(Note3)	-7.13	PK
V	17235.00	22.58	21.80	44.38	54(Note3)	-9.62	PK
H	11490.00	23.86	21.83	45.69	54(Note3)	-8.31	PK
H	17235.00	20.70	21.67	42.37	54(Note3)	-11.63	PK

Test mode:		802.11a		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570.00	25.98	21.64	47.62	54(Note3)	-6.38	PK
V	17355.00	23.73	21.80	45.53	54(Note3)	-8.47	PK
H	11570.00	26.45	21.83	48.28	54(Note3)	-5.72	PK
H	17355.00	25.44	21.67	47.11	54(Note3)	-6.89	PK

Test mode:		802.11a		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650.00	25.08	21.64	46.72	54(Note3)	-7.28	PK
V	17475.00	23.52	21.80	45.32	54(Note3)	-8.68	PK
H	11650.00	21.64	21.83	43.47	54(Note3)	-10.53	PK
H	17475.00	20.52	21.67	42.19	54(Note3)	-11.81	PK

Test mode:		802.11n(HT20)		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490.00	24.73	21.64	46.37	54(Note3)	-7.63	PK
V	17235.00	21.33	21.80	43.13	54(Note3)	-10.87	PK
H	11490.00	21.81	21.83	43.64	54(Note3)	-10.36	PK
H	17235.00	20.95	21.67	42.62	54(Note3)	-11.38	PK

Test mode:		802.11n(HT20)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570.00	24.61	21.64	46.25	54(Note3)	-7.75	PK
V	17355.00	24.57	21.80	46.37	54(Note3)	-7.63	PK
H	11570.00	23.93	21.83	45.76	54(Note3)	-8.24	PK
H	17355.00	21.78	21.67	43.45	54(Note3)	-10.55	PK

Test mode:		802.11n(HT20)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650.00	26.44	21.64	48.08	54(Note3)	-5.92	PK
V	17475.00	22.35	21.80	44.15	54(Note3)	-9.85	PK
H	11650.00	21.45	21.83	43.28	54(Note3)	-10.72	PK
H	17475.00	19.76	21.67	41.43	54(Note3)	-12.57	PK

Test mode:		802.11n(HT40)		Test channel:		Lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11510.00	23.17	21.67	44.84	54(Note3)	-9.16	PK
V	17265.00	23.33	21.83	45.16	54(Note3)	-8.84	PK
H	11510.00	20.74	21.67	42.41	54(Note3)	-11.59	PK
H	17265.00	21.75	21.83	43.58	54(Note3)	-10.42	PK

Test mode:		802.11n(HT40)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11590.00	23.65	21.67	45.32	54(Note3)	-8.68	PK
V	17385.00	26.30	21.83	48.13	54(Note3)	-5.87	PK
H	11590.00	23.77	21.67	45.44	54(Note3)	-8.56	PK
H	17385.00	18.55	21.83	40.38	54(Note3)	-13.62	PK

Test mode:		802.11ac(HT20)		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490.00	24.50	21.64	46.14	54(Note3)	-7.86	PK
V	17235.00	20.74	21.80	42.54	54(Note3)	-11.46	PK
H	11490.00	23.29	21.83	45.12	54(Note3)	-8.88	PK
H	17235.00	21.92	21.67	43.59	54(Note3)	-10.41	PK

Test mode:		802.11ac(HT20)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570.00	24.27	21.64	45.91	54(Note3)	-8.09	PK
V	17355.00	21.89	21.80	43.69	54(Note3)	-10.31	PK
H	11570.00	25.42	21.83	47.25	54(Note3)	-6.75	PK
H	17355.00	23.76	21.67	45.43	54(Note3)	-8.57	PK

Test mode:		802.11ac(HT20)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650.00	21.51	21.64	43.15	54(Note3)	-10.85	PK
V	17475.00	24.64	21.80	46.44	54(Note3)	-7.56	PK
H	11650.00	23.66	21.83	45.49	54(Note3)	-8.51	PK
H	17475.00	19.39	21.67	41.06	54(Note3)	-12.94	PK

Test mode:		802.11ac(HT40)		Test channel:		Lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11510.00	25.05	21.67	46.72	54(Note3)	-7.28	PK
V	17265.00	22.60	21.83	44.43	54(Note3)	-9.57	PK
H	11510.00	24.61	21.67	46.28	54(Note3)	-7.72	PK
H	17265.00	21.32	21.83	43.15	54(Note3)	-10.85	PK


Test mode:		802.11ac(HT40)		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11590.00	26.07	21.67	47.74	54(Note3)	-6.26	PK
V	17385.00	21.26	21.83	43.09	54(Note3)	-10.91	PK
H	11590.00	24.47	21.67	46.14	54(Note3)	-7.86	PK
H	17385.00	22.71	21.83	44.54	54(Note3)	-9.46	PK

Test mode:		802.11ac(HT80)		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11550.00	20.50	21.67	42.17	54(Note3)	-11.83	PK
V	17325.00	24.01	21.83	45.84	54(Note3)	-8.16	PK
H	11550.00	25.05	21.67	46.72	54(Note3)	-7.28	PK
H	17325.00	23.08	21.83	44.91	54(Note3)	-9.09	PK

Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

7.9 Frequency stability

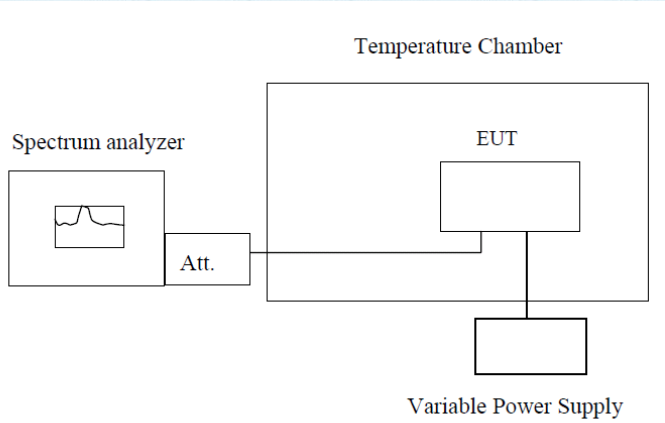Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p>Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Frequency stability versus Temp.					
Power Supply: AC 120V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5775	5774.98	5774.99	5774.96	5774.99
	5795	5794.96	5794.94	5794.99	5794.98
	5825	5824.94	5824.99	5824.97	5824.99
-20	5775	5774.99	5774.94	5774.95	5774.97
	5795	5794.98	5794.95	5794.99	5794.99
	5825	5824.96	5824.97	5824.99	5824.98
-10	5775	5774.97	5774.99	5774.98	5774.99
	5795	5794.98	5794.98	5794.99	5794.99
	5825	5824.97	5824.97	5824.99	5824.97
0	5775	5774.99	5774.98	5774.98	5774.99
	5795	5794.96	5794.94	5794.99	5794.98
	5825	5824.96	5824.97	5824.97	5824.96
10	5775	5774.98	5774.98	5774.94	5774.96
	5795	5794.96	5794.97	5794.99	5794.94
	5825	5824.98	5824.99	5824.96	5824.99
20	5775	5774.98	5774.99	5774.96	5774.97
	5795	5794.95	5794.96	5794.98	5794.98
	5825	5824.96	5824.97	5824.99	5824.99
30	5775	5774.98	5774.99	5774.96	5774.99
	5795	5794.96	5794.98	5794.94	5794.94
	5825	5824.94	5824.99	5824.97	5824.99
40	5775	5774.99	5774.96	5774.98	5774.96
	5795	5794.94	5794.98	5794.99	5794.98
	5825	5824.94	5824.99	5824.97	5824.99
50	5775	5774.97	5774.98	5774.98	5774.98
	5795	5794.98	5794.98	5794.97	5794.99
	5825	5824.98	5824.97	5824.98	5824.98

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
108	5775	5774.99	5774.95	5774.98	5774.99
	5795	5794.96	5794.97	5794.98	5794.96
	5825	5824.98	5824.98	5824.98	5824.99
120	5775	5774.96	5774.97	5774.98	5774.97
	5795	5794.98	5794.94	5794.97	5794.94
	5825	5824.98	5824.99	5824.98	5824.96
132	5775	5774.96	5774.99	5774.96	5774.99
	5795	5794.98	5794.94	5794.97	5794.98
	5825	5824.96	5824.99	5824.99	5824.96

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----