



FCC PART 15.249
TEST REPORT

For

Shenzhen Baida Moxing Co.,Ltd.

806, Bldg. B, Hulian E Shidai, Bantian street, Longgang District, Shenzhen, Guangdong, China

FCC ID: 2AT6X85X

Report Type: Original Report	Product Type: Beta85X Whoop Quadcopter
Report Number:	RSZ190621811-00
Report Date:	2019-11-01
Reviewed By:	Kieron Luo <i>Kieron Luo</i> RF Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY.....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION.....	5
EUT EXERCISE SOFTWARE.....	5
EQUIPMENT MODIFICATIONS.....	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	5
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	6
SUMMARY OF TEST RESULTS.....	7
TEST EQUIPMENT LIST.....	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION.....	9
FCC §15.207 – AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD.....	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE.....	10
CORRECTED FACTOR & MARGIN CALCULATION.....	11
TEST RESULTS SUMMARY.....	11
TEST DATA.....	11
FCC§15.205, §15.209 & §15.249(D) - RADIATED EMISSIONS.....	14
APPLICABLE STANDARD.....	14
TEST EQUIPMENT SETUP.....	14
EUT SETUP.....	15
TEST PROCEDURE.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
TEST RESULTS SUMMARY.....	16
TEST DATA.....	16
FCC§15.215(C) - 20DB EMISSION BANDWIDTH.....	24
APPLICABLE STANDARD.....	24
TEST PROCEDURE.....	24
TEST DATA.....	24

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Beta85X Whoop Quadcopter
Model	Beta85X Brushless Whoop Quadcopter
Frequency Range	5745-5825 MHz
Modulation Technique	FM
Antenna Specification	2dBi
Voltage Range	DC 5V
Date of Test	2019/10/30
Sample serial number	190621811RF-01 (Assigned by BACL, Shenzhen)
Received date	2019/06/21
Sample/EUT Status	Good condition

Objective

This type approval report is prepared on behalf of *Shenzhen Baida Moxing Co.,Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1°C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

15 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	5745	8	5790
1	5752	9	5800
2	5760	10	5805
3	5765	11	5806
4	5769	12	5809
5	5771	13	5820
6	5780	14	5825
7	5785	/	/

Channel 0, Channel 7 and Channel 14 were selected for testing.

EUT Exercise Software

Exercise software “betaflight.exe” was used, and the power level was set as default.

Equipment Modifications

No modifications were made to the unit tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Baida	AC/DC ADAPTER	JCY-ZG-1230	Unknown
Toshiba	Laptop	Satellite C600	PSCZNQ-00G006
TOSHIBA	Laptop Adapter	PA3715E-1AC3	Unknown
N/A	Module	B3603	Unknown

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Un-Detachable DC Cable	1.0	Module	Adapter
Unshielded Un-Detachable DC Cable	0.2	EUT	Module
Unshielded Detachable USB Cable	0.8	EUT	Laptop
Unshielded Un-Detachable DC Cable	1.5	Laptop	Laptop Adapter
Unshielded Detachable AC Cable	1.4	Laptop Adapter	LISN 2
Unshielded Un-detachable AC Cable	1.0	Socket	LISN 1

Block Diagram of Test Setup

For conducted emission:

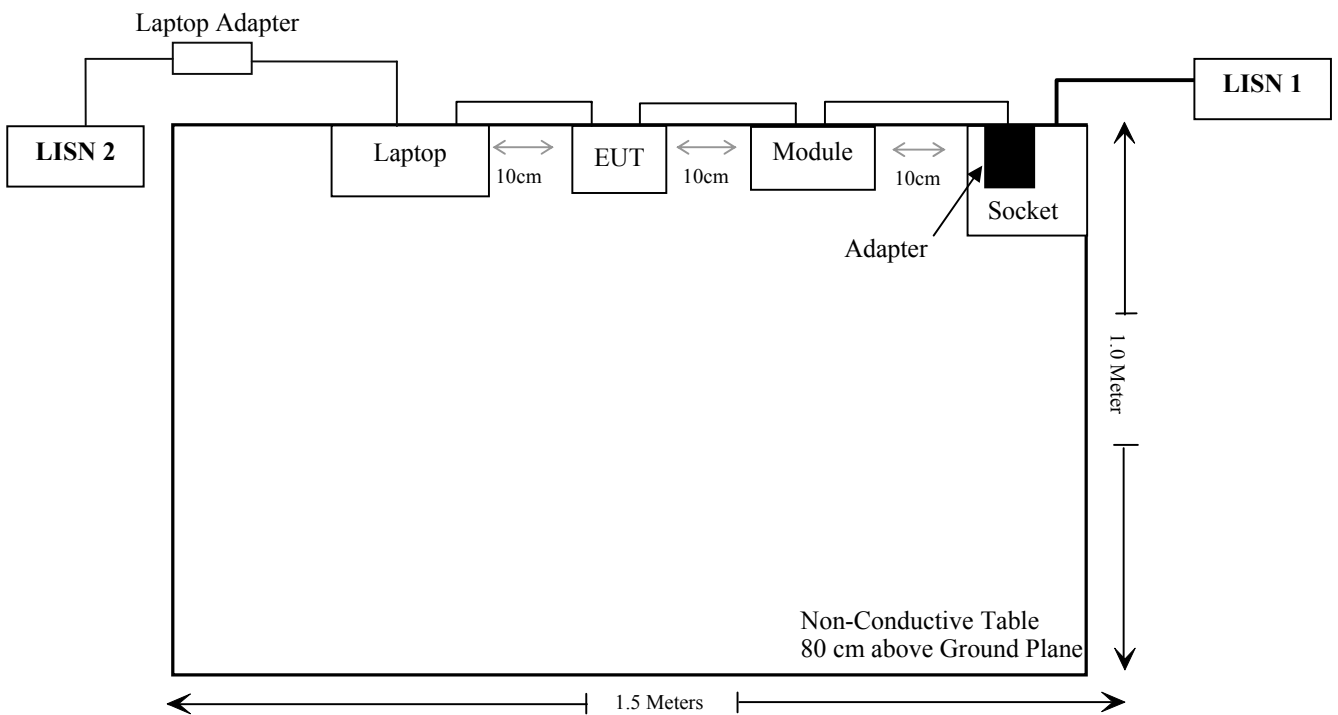

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Compliance
15.205, §15.209, §15.249(d)	Radiated Emissions& Outside of Band Emission	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2019-07-11	2020-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-01
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test					
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639231029-003	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	1	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-04	2016-11-18	2019-11-18
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for 5G, which was permanently attached and the antenna gain is 2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.207

EUT Setup

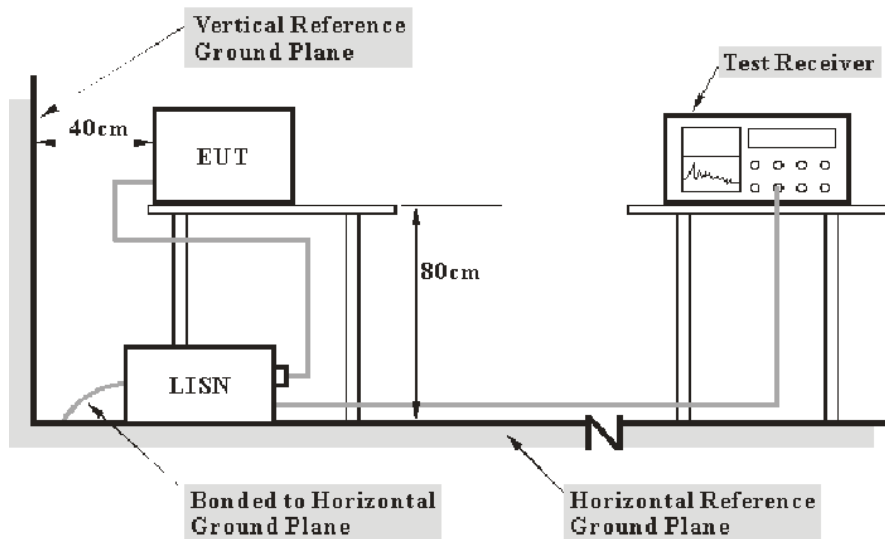

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Kiki Kong on 2019-10-30.


EUT Operation Mode: Transmitting

AC 120V/60 Hz, Line

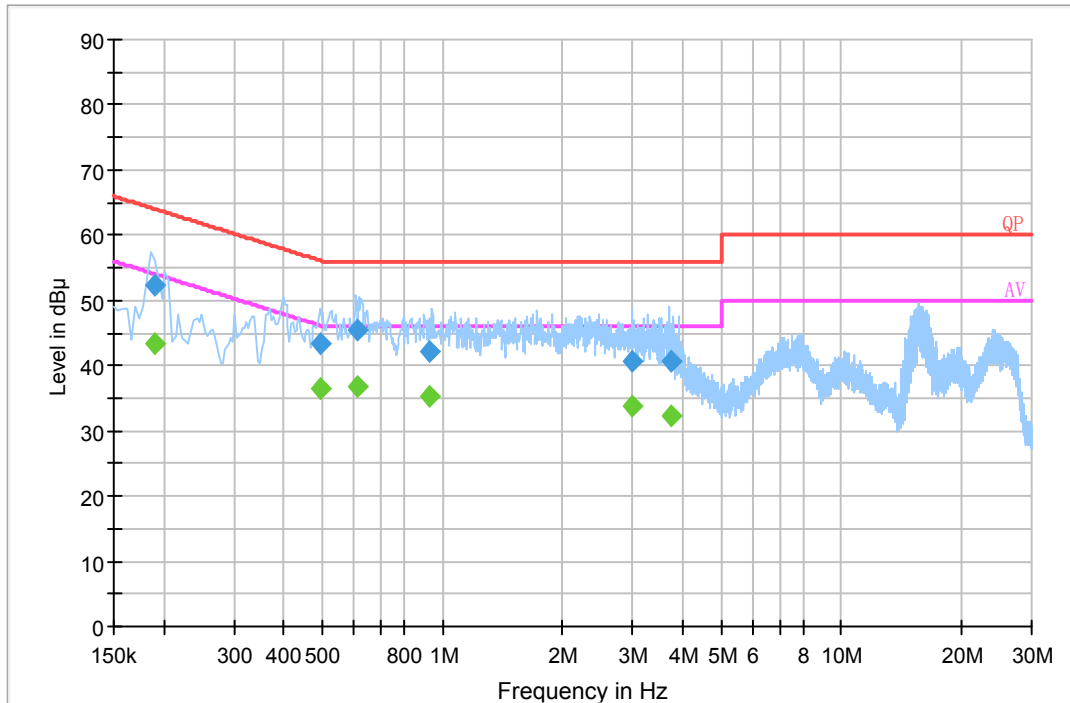

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
0.190501	52.3	19.8	64.0	11.7	QP
0.494590	43.4	19.8	56.1	12.7	QP
0.612910	45.5	19.8	56.0	10.5	QP
0.931870	42.2	19.8	56.0	13.8	QP
2.973210	40.7	19.9	56.0	15.3	QP
3.738290	40.6	19.9	56.0	15.4	QP
0.190501	43.3	19.8	54.0	10.7	Ave.
0.494590	36.5	19.8	46.1	9.6	Ave.
0.612910	36.8	19.8	46.0	9.2	Ave.
0.931870	35.2	19.8	46.0	10.8	Ave.
2.973210	33.9	19.9	46.0	12.1	Ave.
3.738290	32.2	19.9	46.0	13.8	Ave.

AC 120V/60 Hz, Neutral

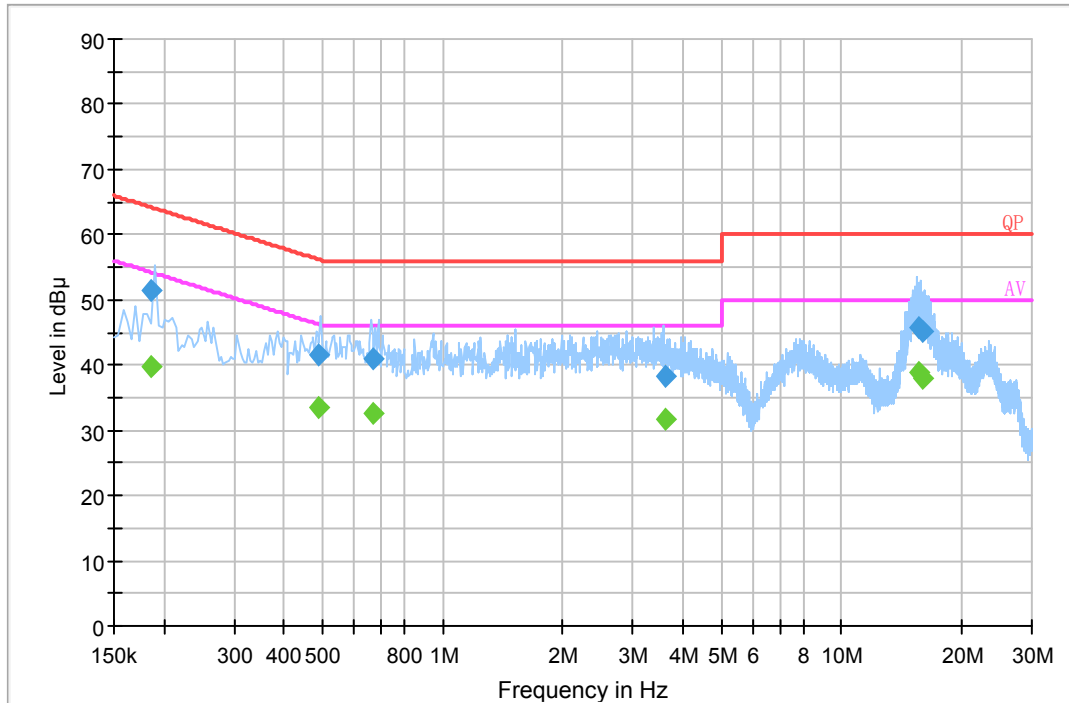

Frequency (MHz)	Corrected Amplitude (dBµV)	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave.)
0.185500	51.3	19.8	64.2	12.9	QP
0.486590	41.7	19.8	56.2	14.5	QP
0.668070	41.0	19.8	56.0	15.0	QP
3.608390	38.3	19.9	56.0	17.7	QP
15.618610	45.8	20.0	60.0	14.2	QP
16.051030	45.2	20.0	60.0	14.8	QP
0.185500	39.9	19.8	54.2	14.3	Ave.
0.486590	33.5	19.8	46.2	12.7	Ave.
0.668070	32.5	19.8	46.0	13.5	Ave.
3.608390	31.8	19.9	46.0	14.2	Ave.
15.618610	38.7	20.0	50.0	11.3	Ave.
16.051030	37.9	20.0	50.0	12.1	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC§15.205, §15.209 & §15.249(d) - RADIATED EMISSIONS**Applicable Standard**

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

As per FCC§15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test Equipment Setup

The spectrum analyzer or receiver is set as:

Below 1000MHz:


$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000MHz:


$$\begin{aligned} \text{Peak: RBW} &= 1\text{MHz} / \text{VBW} = 1\text{MHz} / \text{Sweep} = \text{Auto} \\ \text{Average: RBW} &= 1\text{MHz} / \text{VBW} = 10\text{Hz} / \text{Sweep} = \text{Auto} \end{aligned}$$

EUT Setup

Below 1GHz:

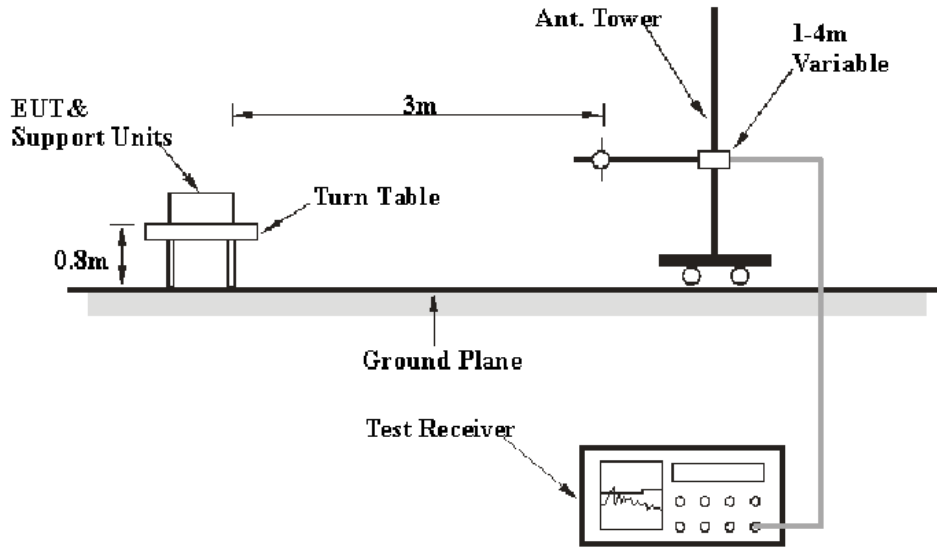

Above 1GHz:

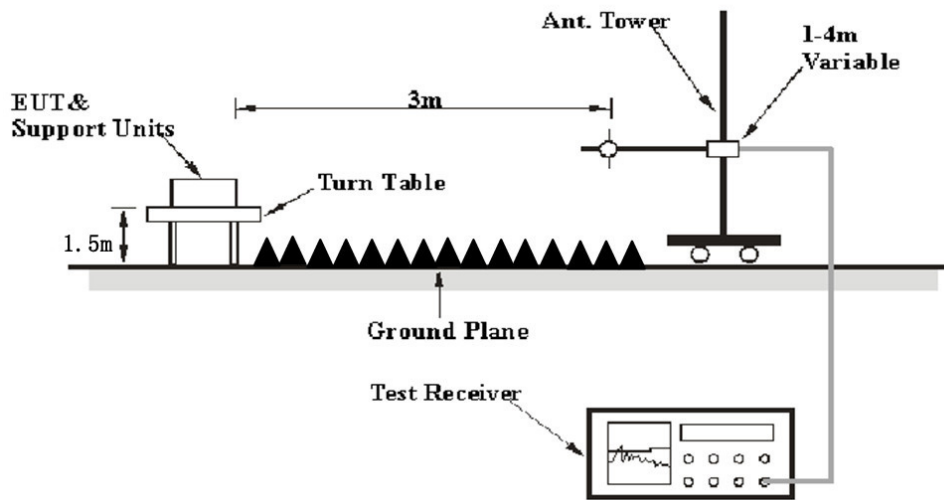

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane for below 1GHz or 1.5 meter for above 1GHz, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.205, 15.209 & §15.249

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Zero Yan and Curry Xiang on 2019-10-30.

Test Mode: Transmitting

30 MHz – 1 GHz:

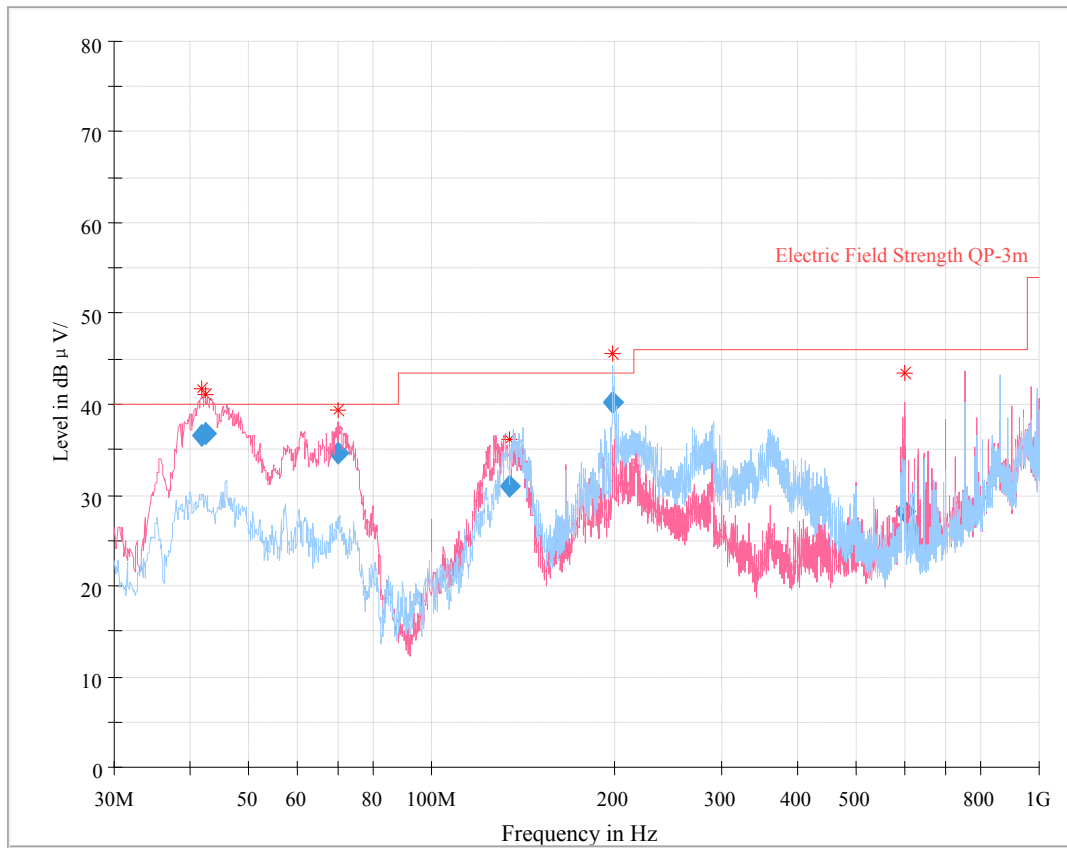

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
41.771250	36.60	108.0	V	258.0	-15.0	40.00	3.40
42.338875	36.79	107.0	V	273.0	-15.4	40.00	3.21
69.928375	34.63	112.0	V	192.0	-20.6	40.00	5.37
134.177875	31.05	105.0	V	356.0	-13.9	43.50	12.45
199.239625	40.20	149.0	H	284.0	-13.9	43.50	3.30
599.594250	28.17	105.0	V	74.0	-1.6	46.00	17.83

Above 1 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.249&15.209	
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (5745 MHz)									
5745.00	69.28	PK	256	1.8	H	39.49	108.77	114	5.23
5745.00	53.61	Ave.	256	1.8	H	39.49	93.10	94	0.90
5745.00	65.29	PK	124	2.5	V	39.49	104.78	114	9.22
5745.00	50.14	Ave.	124	2.5	V	39.49	89.63	94	4.37
5722.44	29.55	PK	341	1.6	H	39.49	69.04	74	4.96
5722.44	13.41	Ave.	341	1.6	H	39.49	52.90	54	1.10
5851.28	28.41	PK	316	1.7	H	39.87	68.28	74	5.72
5851.28	13.04	Ave.	316	1.7	H	39.87	52.91	54	1.09
11490.00	46.33	PK	109	2.5	H	17.47	63.80	74	10.20
11490.00	31.99	Ave.	109	2.5	H	17.47	49.46	54	4.54
Middle Channel (5785 MHz)									
5785.00	68.55	PK	94	1.4	H	39.61	108.16	114	5.84
5785.00	53.63	Ave.	94	1.4	H	39.61	93.24	94	0.76
5785.00	65.39	PK	72	2.2	V	39.61	105.00	114	9.00
5785.00	49.58	Ave.	72	2.2	V	39.61	89.19	94	4.81
11570.00	45.81	PK	90	1.1	H	17.51	63.32	74	10.68
11570.00	30.24	Ave.	90	1.1	H	17.51	47.75	54	6.25
High Channel (5825 MHz)									
5825.00	68.71	PK	252	2.4	H	39.61	108.32	114	5.68
5825.00	53.29	Ave.	252	2.4	H	39.61	92.90	94	1.10
5825.00	64.73	PK	17	2.1	V	39.61	104.34	114	9.66
5825.00	50.26	Ave.	17	2.1	V	39.61	89.87	94	4.13
5720.17	29.49	PK	18	1.2	H	39.49	68.98	74	5.02
5720.17	13.32	Ave.	18	1.2	H	39.49	52.81	54	1.19
5852.14	29.65	PK	54	1.8	H	39.87	69.52	74	4.48
5852.14	13.13	Ave.	54	1.8	H	39.87	53.00	54	1.00
11650.00	47.13	PK	215	2.0	H	16.18	63.31	74	10.69
11650.00	32.24	Ave.	215	2.0	H	16.18	48.42	54	5.58

Note:


Corrected Amplitude = Corrected Factor + Reading

Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor


Margin = Limit- Corr. Amplitude

The emission more than 20dB below the limit was not required to be recorded.


Pre-scan with Low Channel for Peak
Horizontal

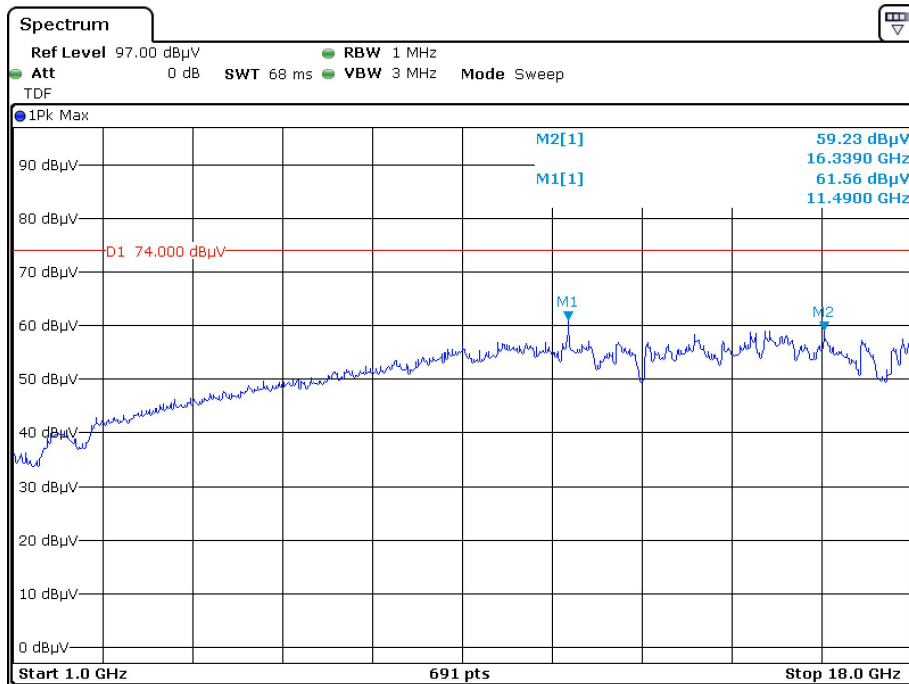


Date: 30.OCT.2019 16:26:10

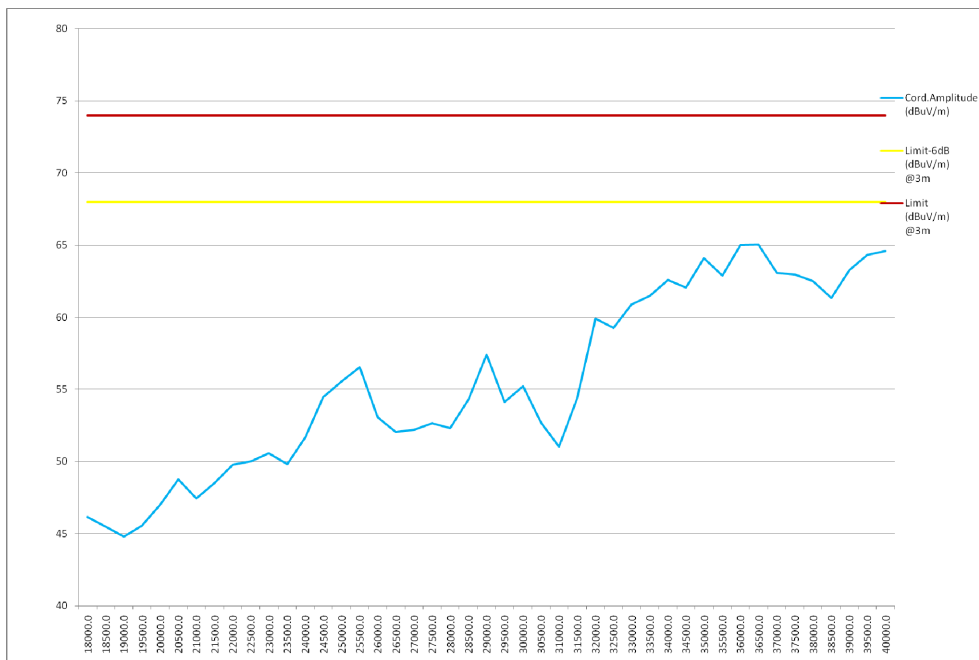

Vertical

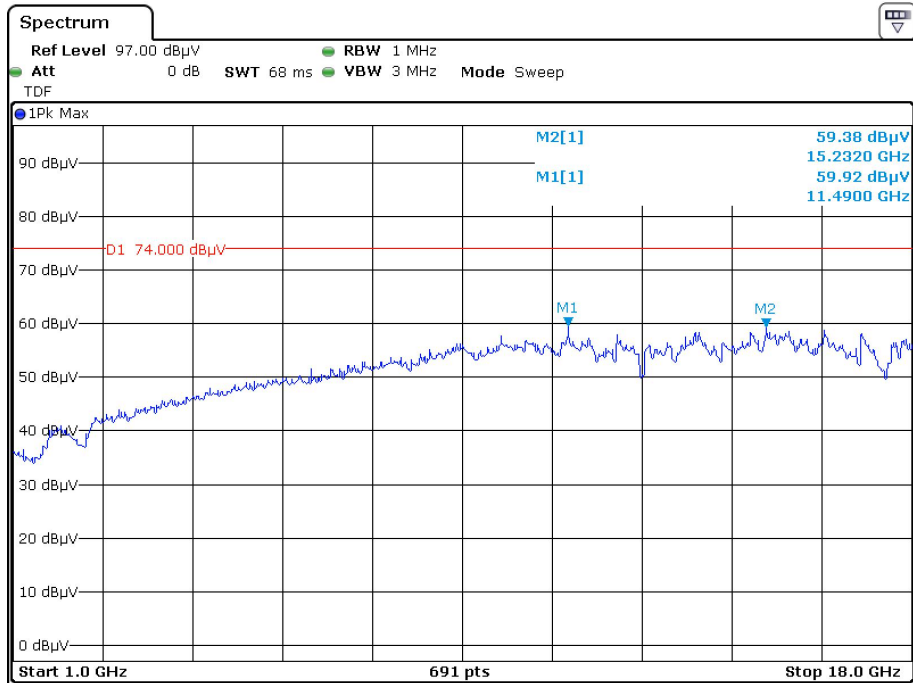


Date: 30.OCT.2019 16:34:38

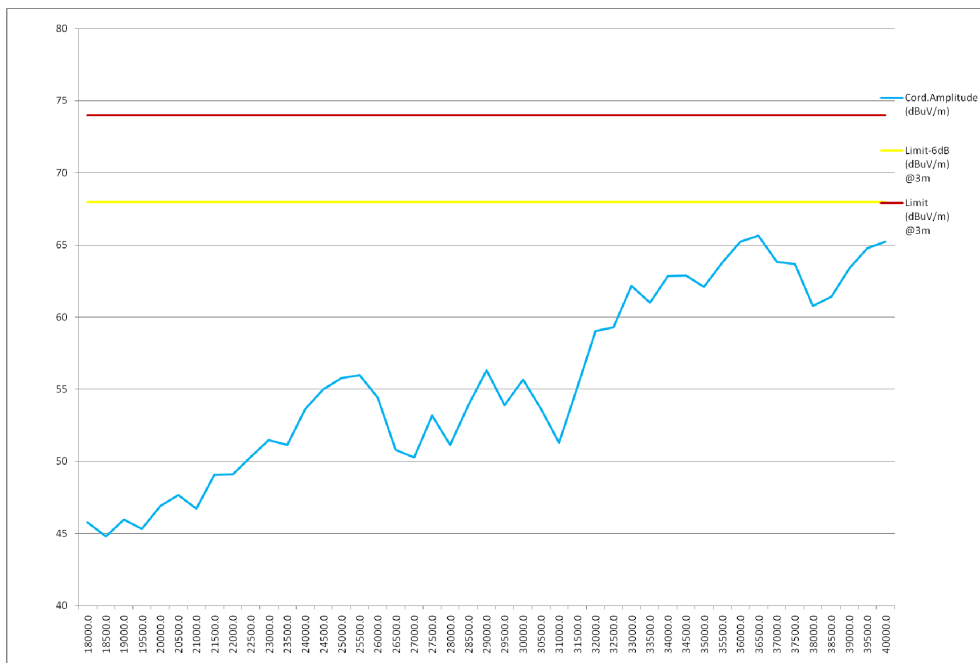



Pre-scan with Low Channel for Average

Horizontal

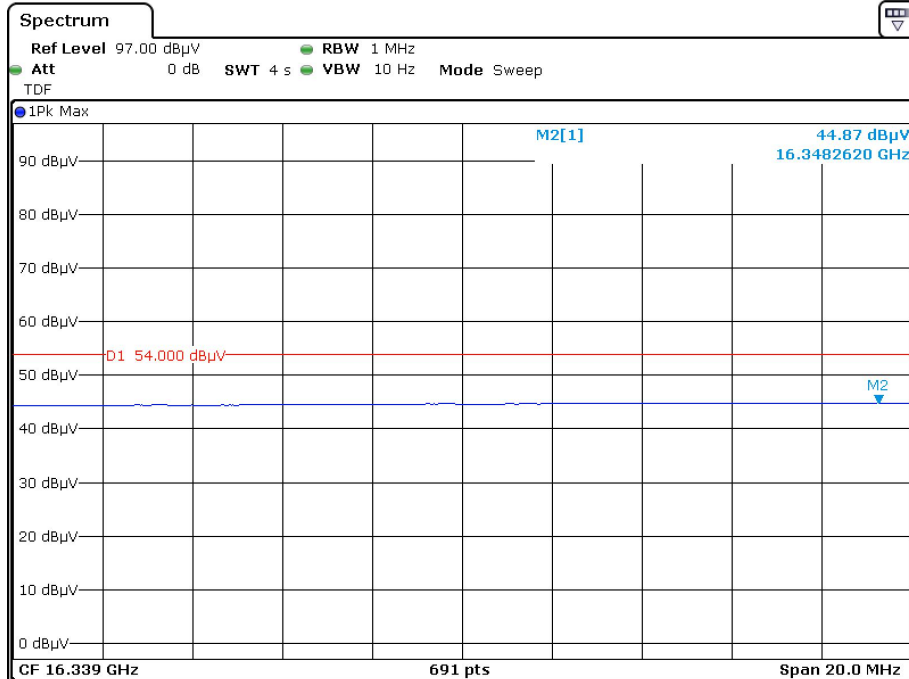


Date: 30.OCT.2019 16:29:42

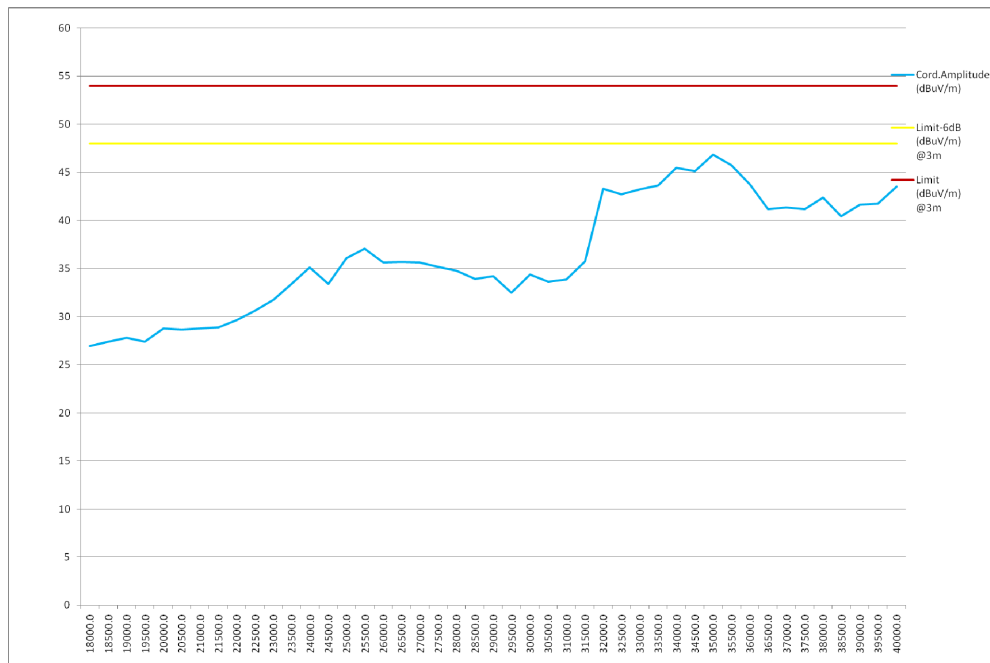


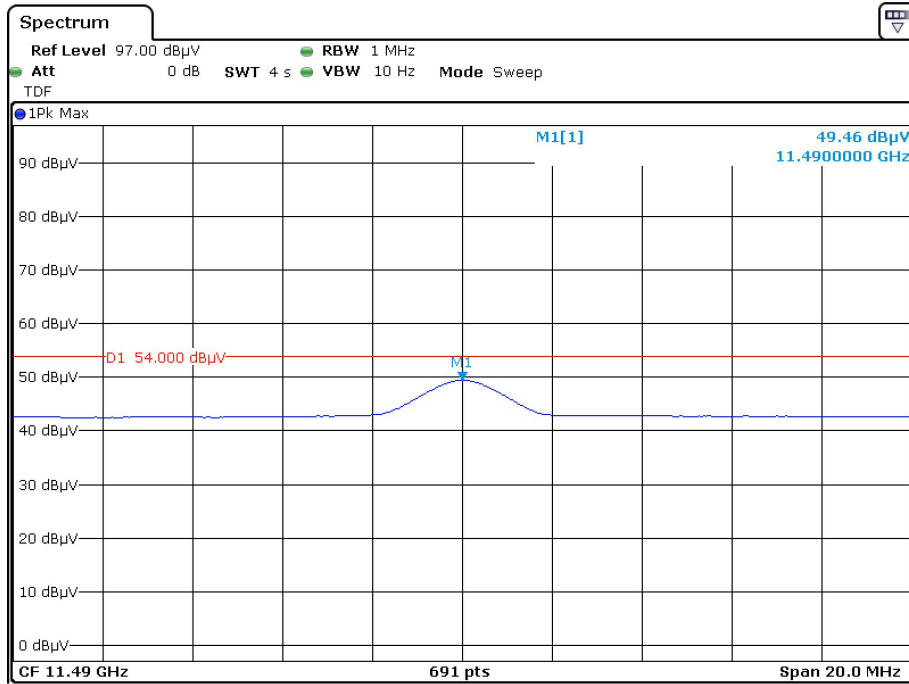


Date: 30.OCT.2019 16:43:36

Vertical

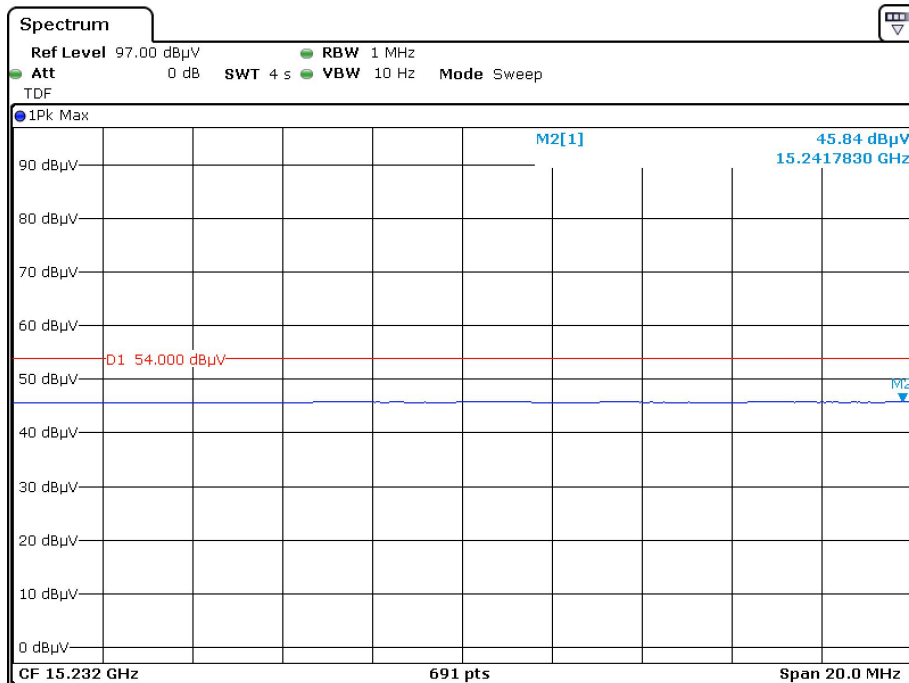

Date: 30.OCT.2019 16:38:08

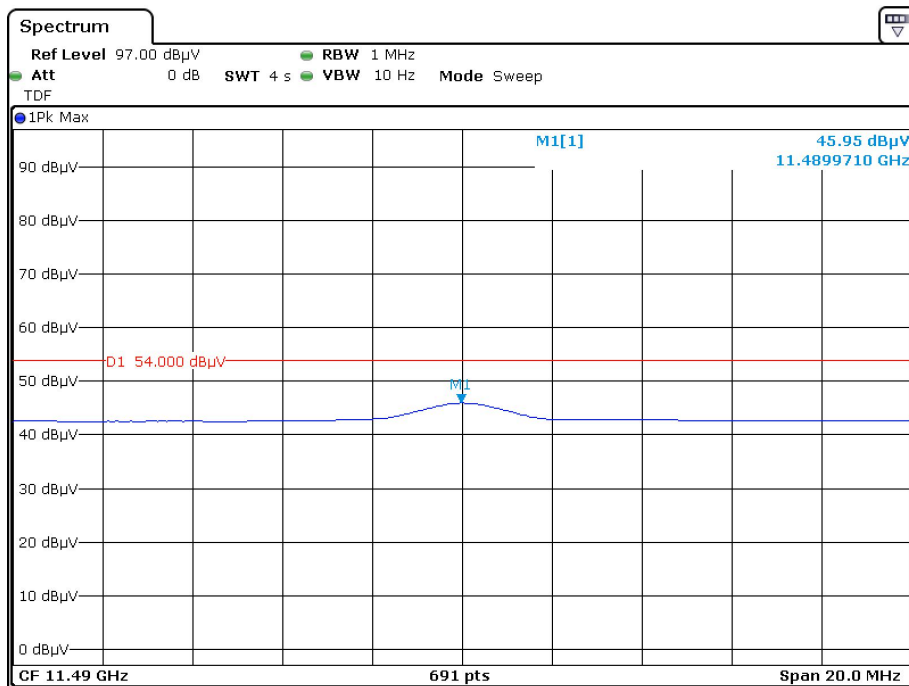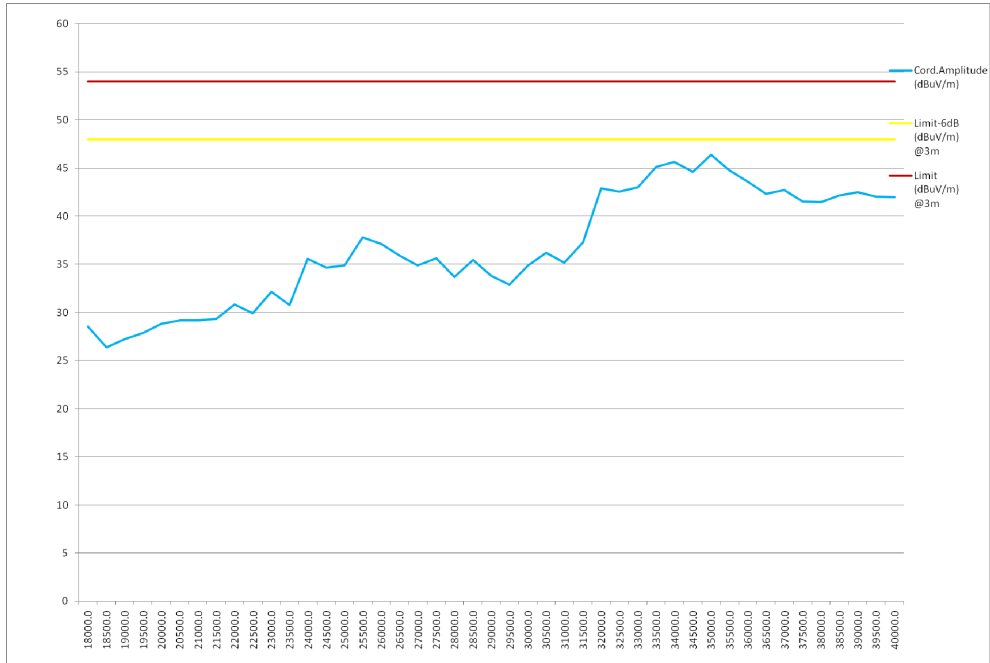

Date: 30.OCT.2019 16:47:18

FCC§15.215(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that indicated 20dB bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Leo Huang on 2019-10-30.

Test Mode: Transmitting

Please refer to the following table and plots.


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	5745	6.61
Middle	5785	6.72
High	5825	6.97

Low Channel

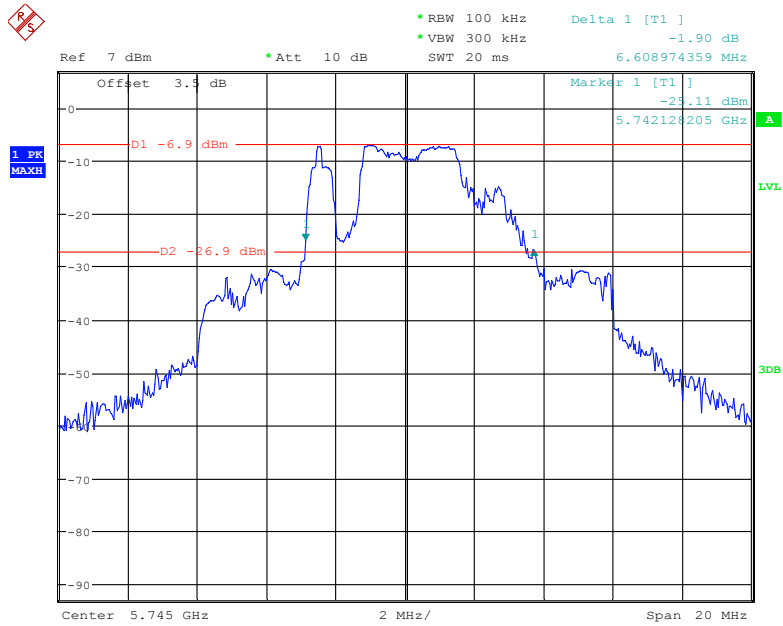


Date: 30.OCT.2019 10:44:25

Middle Channel

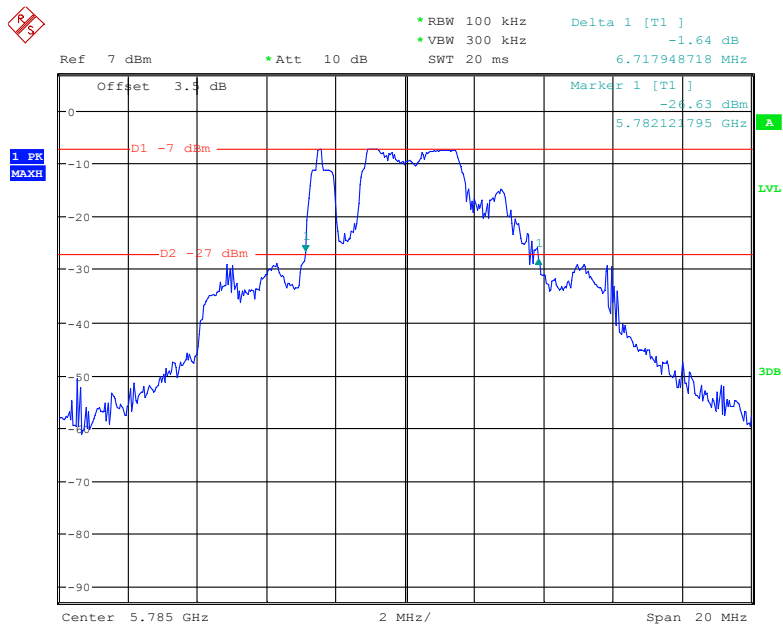

Date: 30.OCT.2019 10:48:40

High Channel

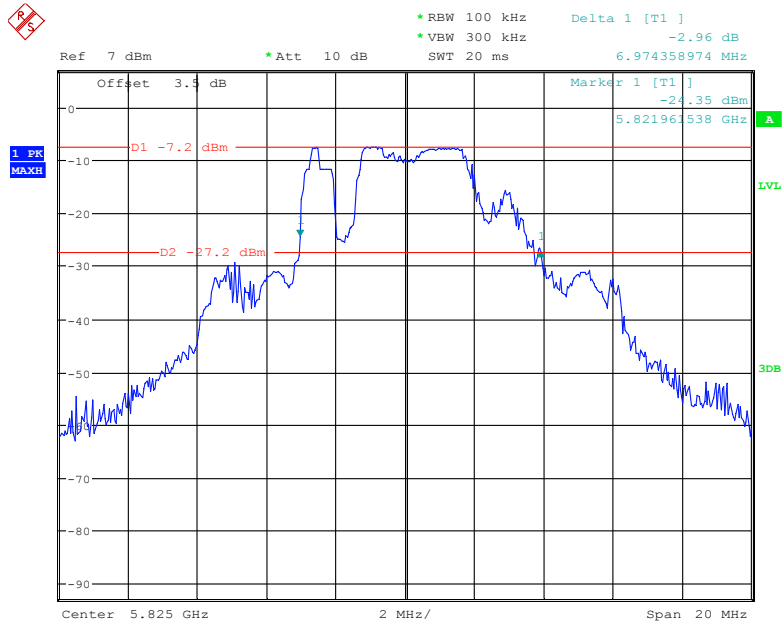

Date: 30.OCT.2019 10:50:50

***** END OF REPORT *****