

FCC TEST REPORT

FCC ID:2AT8P-WS-SR-US-T**Report Number**..... : ZKT-221212L9259-2

Date of Test..... : Dec.10, 2022 -- Dec.15, 2022

Date of issue..... : Dec.15, 2022

Total number of pages..... : 70

Test Result..... : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Wenzhou Morning Electronics Co.,Ltd.

Address : NO.238, Wei 11 Road, Yueqing Economic Development Zone, Yueqing City, Zhejiang, China

Manufacturer's name : Wenzhou NOVA New Energy CO.,LTD

Address : NO.238, Wei 11 Road, Economic Development Zone, Yueqing City, Wenzhou City · Zhejiang Province, China

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure..... : ANSI C63.10:2013
KDB558074 D0115.247 Meas Guidance v 05r02

Non-standard test method : N/A

Test Report Form No..... : TRF-EL-110_V0**Test Report Form(s) Originator**..... : ZKT Testing**Master TRF** : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Smart Switch

Trademark : MOES、MOESGO

Model/Type reference..... : WS-SR-US-T、WS-SR-US、WS-SR-US-ABI、WS-SR-US-L、
ZS-SR-US、ZS-SR-US-T、ZS-SR-US-L、BS-SR-US、BS-SR-US-T、
BS-SR-US-L、ZS-SR-US-L-T、WS-SR-USD、WS-SR-USD-T、
WS-SR-USD-L、WS-SR-USC、WS-SR-USF、WS-SR-USFL、
ZS-SR-USD、ZS-SR-USD-T、ZS-SR-USC、ZS-SR-USF、
ZS-SR-USFL、WS-TG-US-T、WS-TG-US、ZS-TG-US-T、ZS-TG-US、
WS-SR-US-PIR、WS-B-US、WS-B-US-L、ZS-B-US、BS-B-US、
WS-B-USD、ZS-B-USD、ZS-B-US-L、ZT-SR-EU、ZT-SR、ZT-SR-US、
ZT-YK01、ZT-YK02、ZT-YK03、BT-YK01、BT-YK02、BT-YK03、

Ratings..... : 100-245V AC 50/60HZ

Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

**Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China**

Tested by (name + signature).....: Alen He

Alen He

Reviewer (name + signature).....: Joe Liu

Joe Liu

Approved (name + signature).....: Lake Xie



Table of Contents

	Page
1. VERSION	6
2. SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 TEST SETUP CONFIGURATION	9
3.3 SUPPORT EQUIPMENT	10
3.4 TEST MODE	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	18
5.RADIATED BAND EMISSIONMEASUREMENT	26
5.1 TEST REQUIREMENT:	26
5.2 TEST PROCEDURE	26
5.3 DEVIATION FROM TEST STANDARD	26
5.4 TEST SETUP	27
5.5 EUT OPERATING CONDITIONS	27
5.6 TEST RESULT	28
6.POWER SPECTRAL DENSITY TEST	30
6.1 APPLIED PROCEDURES / LIMIT	30
6.2 TEST PROCEDURE	30
6.3 DEVIATION FROM STANDARD	30
6.4 TEST SETUP	30
6.5 EUT OPERATION CONDITIONS	30

6.6 TEST RESULT	31
7. CHANNEL BANDWIDTH	32
7.1 APPLIED PROCEDURES / LIMIT	32
7.2 TEST PROCEDURE	32
7.3 DEVIATION FROM STANDARD	32
7.4 TEST SETUP	32
7.5 EUT OPERATION CONDITIONS	32
7.6 TEST RESULT	33
8. OUTPUT POWER TEST	34
8.1 APPLIED PROCEDURES/LIMIT	34
8.2 TEST PROCEDURE	34
8.3 DEVIATION FROM STANDARD	34
8.4 TEST SETUP	34
8.5 EUT OPERATION CONDITIONS	34
8.6 TEST RESULT	34
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	35
9.1 APPLICABLE STANDARD	35
9.2 TEST PROCEDURE	35
9.3 DEVIATION FROM STANDARD	35
9.4 TEST SETUP	35
9.5 EUT OPERATION CONDITIONS	35
9.6 TEST RESULTS	35
10. ANTENNA REQUIREMENT	36
11.1. -6DB BANDWIDTH	37
11.2. BANEDGE	43
11.3. MAX. OUTPUT POWER	51
11.4. POWER SPECTRAL DENSITY	52
11.5. SPURIOUS EMISSION	58
12. TEST SETUP PHOTO	70
13. EUT CONSTRUCTIONAL DETAILS	70

1. VERSION

Report No.	Version	Description	Approved
ZKT-221212L9259-2	Rev.01	Initial issue of report	Dec.15, 2022

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION**3.1 GENERAL DESCRIPTION OF EUT**

Product Name:	Smart Switch
Model No.:	WS-SR-US-T
Serial No.:	WS-SR-US、WS-SR-US-ABI、WS-SR-US-L、ZS-SR-US、ZS-SR-US-T、ZS-SR-US-L、BS-SR-US、BS-SR-US-T、BS-SR-US-L、ZS-SR-US-L-T、WS-SR-USD、WS-SR-USD-T、WS-SR-USD-L、WS-SR-USC、WS-SR-USF、WS-SR-USFL、ZS-SR-USD、ZS-SR-USD-T、ZS-SR-USC、ZS-SR-USF、ZS-SR-USFL、WS-TG-US-T、WS-TG-US、ZS-TG-US-T、ZS-TG-US、WS-SR-US-PIR、WS-B-US、WS-B-US-L、ZS-B-US、BS-B-US、WS-B-USD、ZS-B-USD、ZS-B-US-L、ZT-SR-EU、ZT-SR、ZT-SR-US、ZT-YK01、ZT-YK02、ZT-YK03、BT-YK01、BT-YK02、BT-YK03、
Model difference:	The product has many models, only the model name is different, and the other parts such as the circuit principle, pcb and electrical structure are the same.
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Frequency range:	802.11b/802.11g /802.11n(HT20): 2412MHz -2462MHz 802.11n(HT40): 2422MHz -2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	PCB antenna
Antenna gain:	1.37dBi
Power supply:	100-245V AC 50/60HZ

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	X	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g /802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

3.2 Test Setup Configuration

Conducted Emission



Radiated Emission



Conducted Spurious



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note
/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2022	Oct. 17, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2022	Oct. 16, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Oct. 18, 2022	Oct. 17, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2022	Oct. 16, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2022	Oct. 16, 2023
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2022	Oct. 16, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 17, 2022	Oct. 16, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2022	Oct. 17, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2022	Oct. 17, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2022	Oct. 17, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2022	Oct. 21, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2022	Oct. 16, 2023
15	MWRF Power Meter Test system	MW	MW100-RPC B	N/A	Oct. 22, 2022	Oct. 21, 2023
16	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	N/A	\	\
20	Antenna tower	MF	MF-7802BS	N/A	\	\
21	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
22	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
23	RF Software	MW	MTS8310	V2.0.0.0	\	\
24	Turntable	MF	MF-7802BS	N/A	\	\
25	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2022	Oct. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2022	Oct. 21, 2023
3	Test Cable	N/A	C01	N/A	Oct. 18, 2022	Oct. 17, 2023
4	Test Cable	N/A	C02	N/A	Oct. 18, 2022	Oct. 17, 2023
5	EMI Test Receiver	R&S	ESCI3	101393	Oct. 17, 2022	Oct. 16, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.e.
8. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

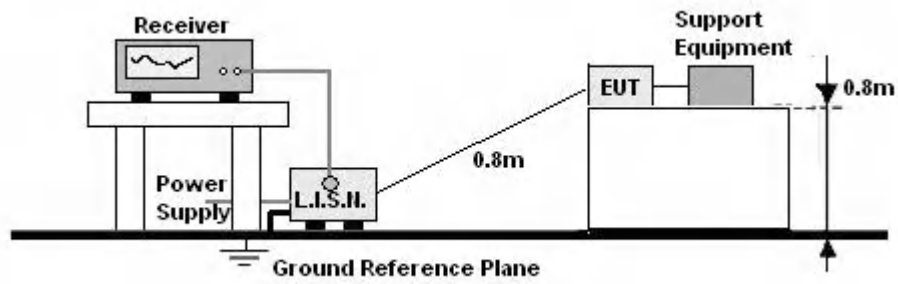


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase	L
Test Voltage :	AC 120V/60Hz	Test Mode	802.11b-middle channel

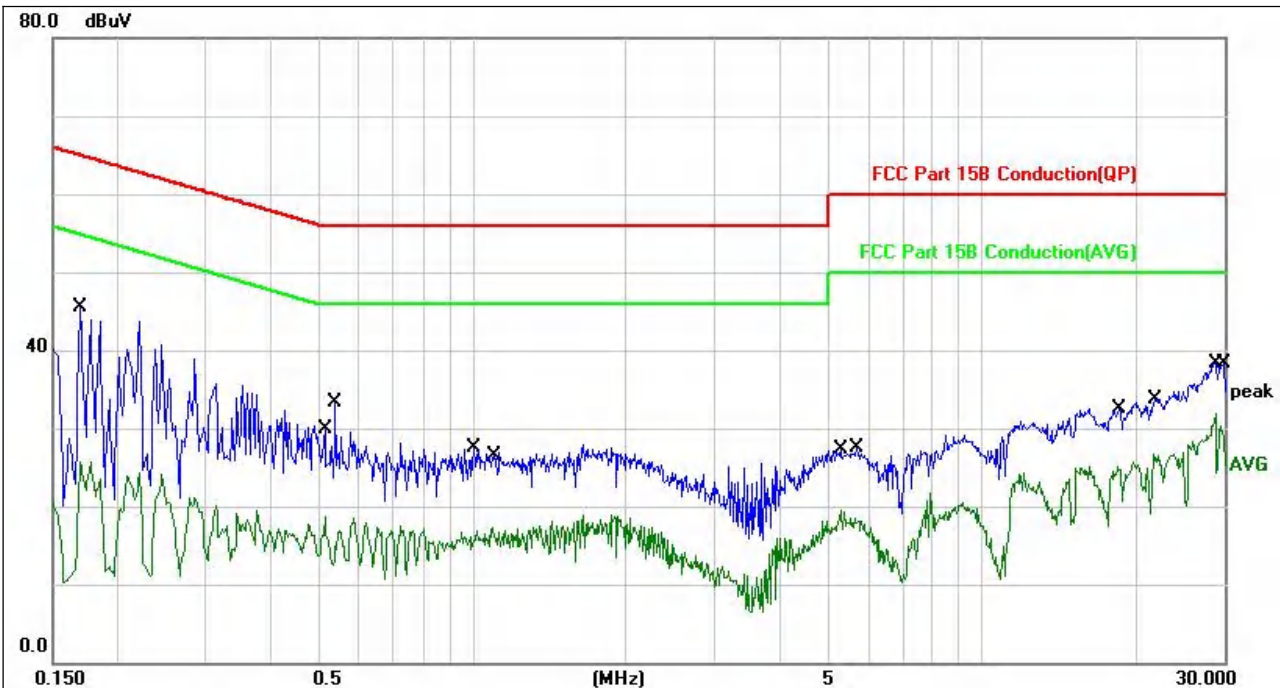


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1693	35.44	10.07	45.51	64.99	-19.48	QP	
2		0.1693	15.56	10.07	25.63	54.99	-29.36	AVG	
3		0.5128	8.41	10.20	18.61	46.00	-27.39	AVG	
4		0.5377	23.01	10.20	33.21	56.00	-22.79	QP	
5		1.0048	17.27	10.17	27.44	56.00	-28.56	QP	
6		1.0939	7.07	10.16	17.23	46.00	-28.77	AVG	
7		5.2770	9.62	9.95	19.57	50.00	-30.43	AVG	
8		5.6833	17.50	9.94	27.44	60.00	-32.56	QP	
9		18.6220	22.71	9.82	32.53	60.00	-27.47	QP	
10		21.7149	16.85	9.77	26.62	50.00	-23.38	AVG	
11	*	28.7549	22.13	9.79	31.92	50.00	-18.08	AVG	
12		29.8414	28.54	9.77	38.31	60.00	-21.69	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode	802.11b-middle channel

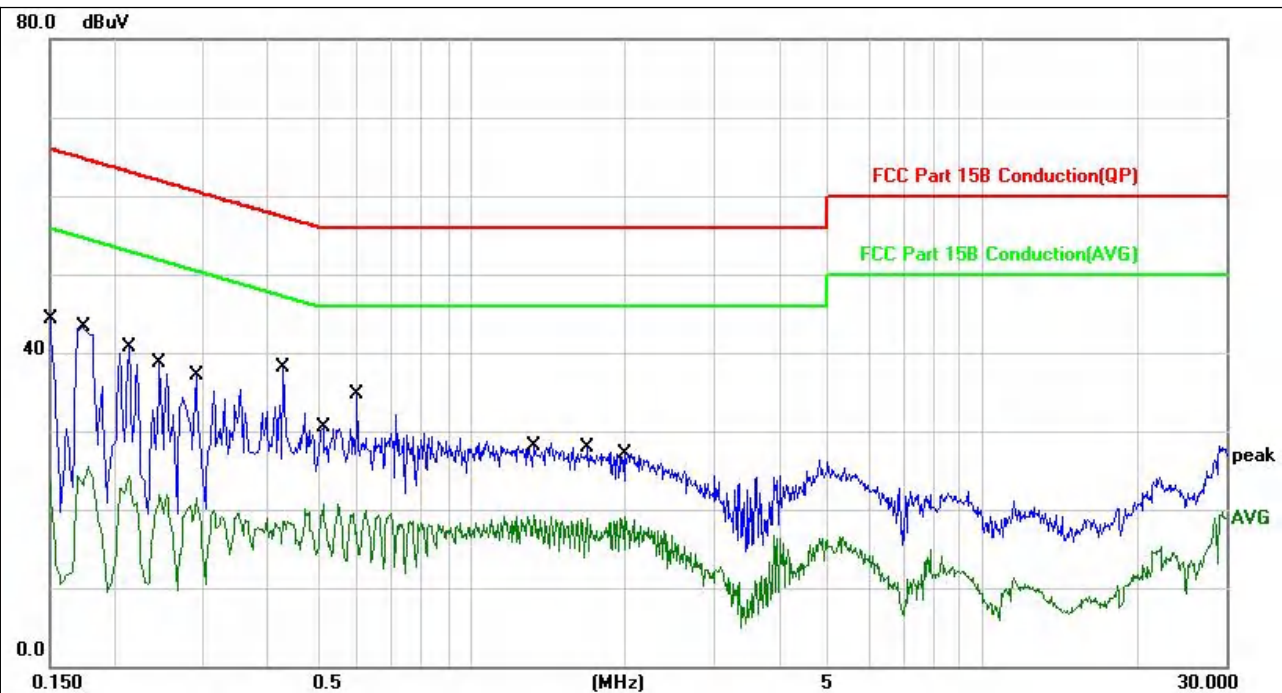

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	34.20	10.05	44.25	65.99	-21.74	QP	
2		0.1740	33.19	10.07	43.26	64.76	-21.50	QP	
3		0.2139	30.66	10.08	40.74	63.05	-22.31	QP	
4		0.2139	14.30	10.08	24.38	53.05	-28.67	AVG	
5		0.2455	28.63	10.09	38.72	61.90	-23.18	QP	
6		0.2893	11.23	10.19	21.42	50.54	-29.12	AVG	
7	*	0.4282	27.94	10.20	38.14	57.29	-19.15	QP	
8		0.5128	10.53	10.20	20.73	46.00	-25.27	AVG	
9		0.5979	24.45	10.21	34.66	56.00	-21.34	QP	
10		1.3238	9.19	10.13	19.32	46.00	-26.68	AVG	
11		1.6891	8.88	10.08	18.96	46.00	-27.04	AVG	
12		2.0011	9.03	10.04	19.07	46.00	-26.93	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

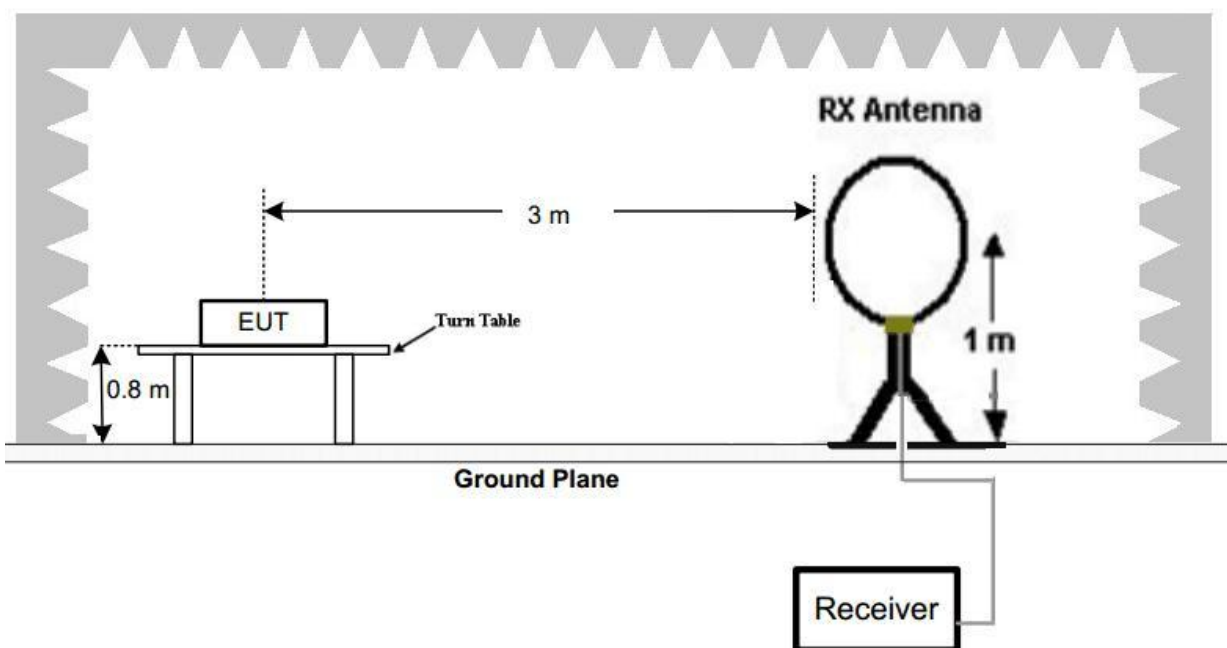

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

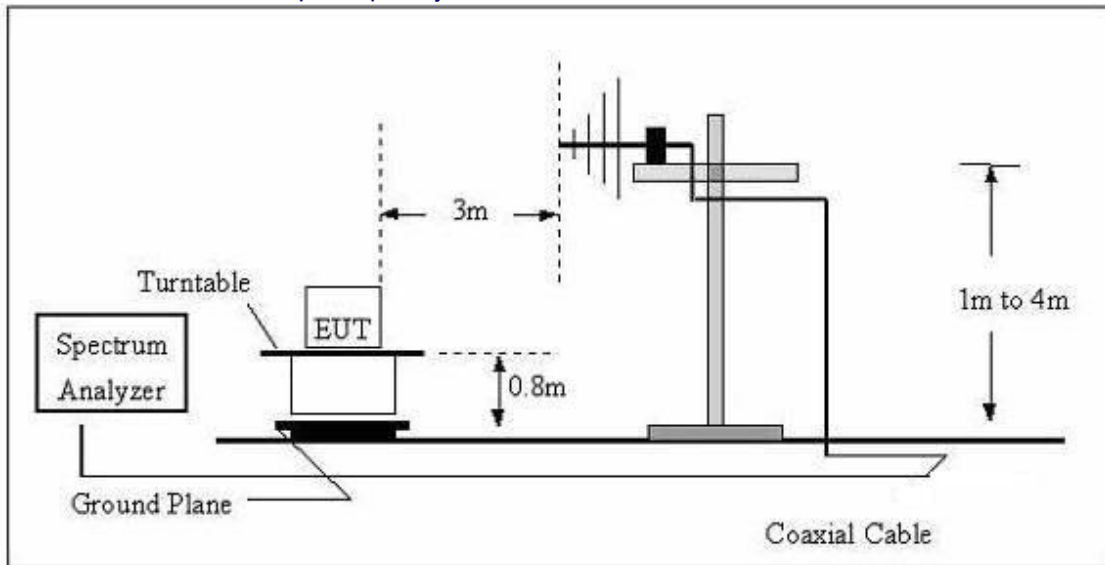

(C) Radiated Emission Test-Up Frequency Above 1GHz

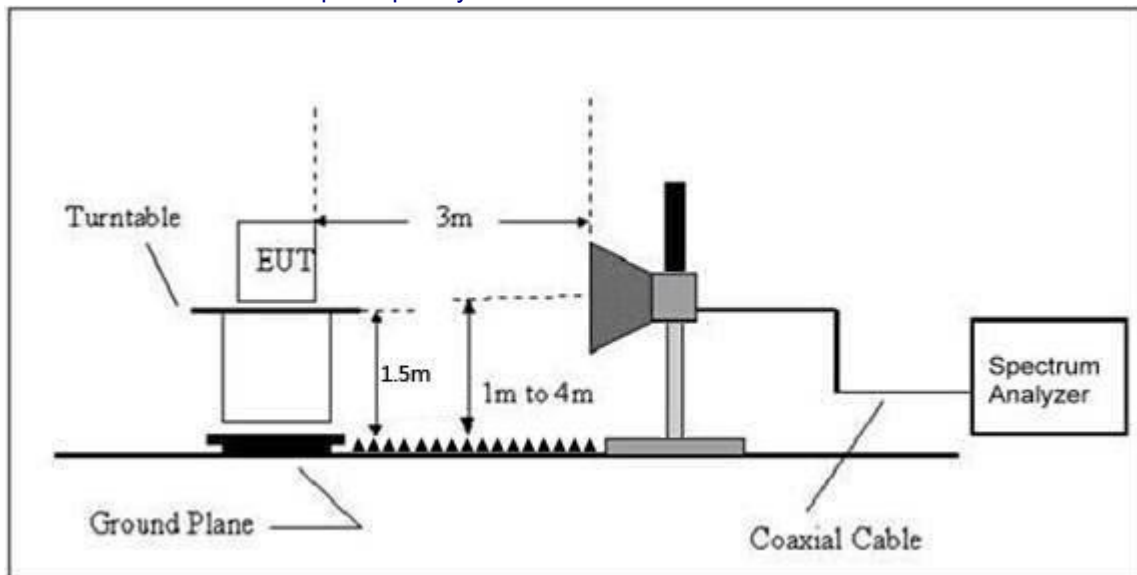

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b-middle channel

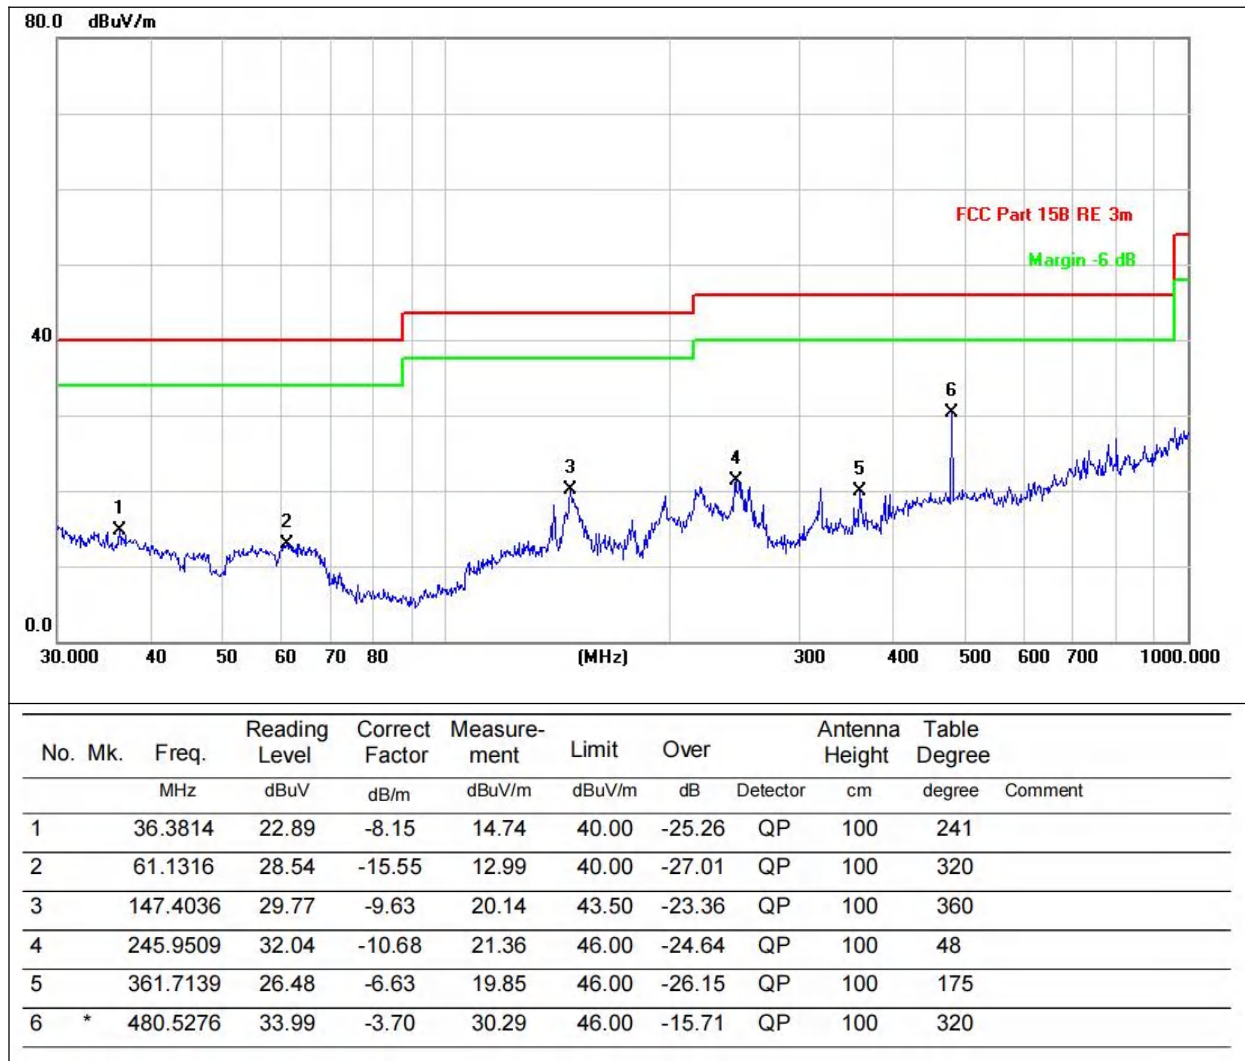

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b-middle channel

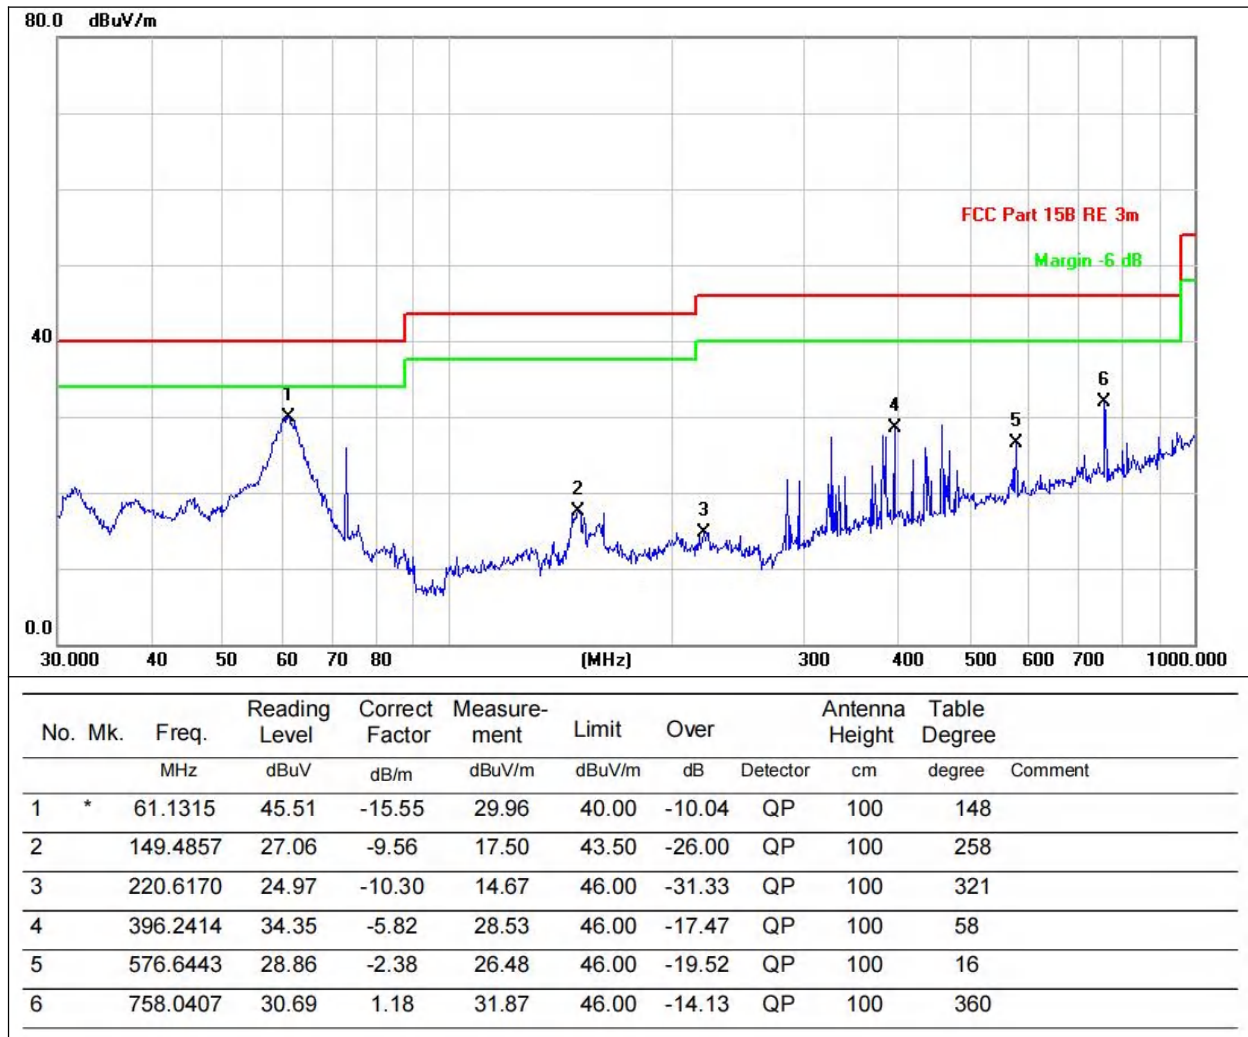

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	55.75	30.55	5.77	24.66	55.63	74.00	-18.37	PK
V	4824	40.83	30.55	5.77	24.66	40.71	54.00	-13.29	AV
V	7236	54.19	30.33	6.32	24.55	54.73	74.00	-19.27	PK
V	7236	41.14	30.33	6.32	24.55	41.68	54.00	-12.32	AV
V	9648	50.78	30.85	7.45	24.69	52.07	74.00	-21.93	PK
V	9648	38.62	30.85	7.45	24.69	39.91	54.00	-14.09	AV
H	4824	54.12	30.55	5.77	24.66	54.00	74.00	-20.00	PK
H	4824	39.64	30.55	5.77	24.66	39.52	54.00	-14.48	AV
H	7236	54.47	30.33	6.32	24.55	55.01	74.00	-18.99	PK
H	7236	41.30	30.33	6.32	24.55	41.84	54.00	-12.16	AV
H	9648	50.80	30.85	7.45	24.69	52.09	74.00	-21.91	PK
H	9648	38.40	30.85	7.45	24.69	39.69	54.00	-14.31	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	54.48	30.55	5.77	24.66	54.36	74.00	-19.64	PK
V	4874	42.22	30.55	5.77	24.66	42.10	54.00	-11.90	AV
V	7311	53.95	30.33	6.32	24.55	54.49	74.00	-19.51	PK
V	7311	42.07	30.33	6.32	24.55	42.61	54.00	-11.39	AV
V	9748	52.42	30.85	7.45	24.69	53.71	74.00	-20.29	PK
V	9748	36.52	30.85	7.45	24.69	37.81	54.00	-16.19	AV
H	4874	54.47	30.55	5.77	24.66	54.35	74.00	-19.65	PK
H	4874	40.46	30.55	5.77	24.66	40.34	54.00	-13.66	AV
H	7311	54.05	30.33	6.32	24.55	54.59	74.00	-19.41	PK
H	7311	41.60	30.33	6.32	24.55	42.14	54.00	-11.86	AV
H	9748	52.49	30.85	7.45	24.69	53.78	74.00	-20.22	PK
H	9748	37.69	30.85	7.45	24.69	38.98	54.00	-15.02	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	55.86	30.55	5.77	24.66	55.74	74.00	-18.26	PK
V	4924	40.44	30.55	5.77	24.66	40.32	54.00	-13.68	AV
V	7386	53.12	30.33	6.32	24.55	53.66	74.00	-20.34	PK
V	7386	41.77	30.33	6.32	24.55	42.31	54.00	-11.69	AV
V	9848	50.62	30.85	7.45	24.69	51.91	74.00	-22.09	PK
V	9848	38.44	30.85	7.45	24.69	39.73	54.00	-14.27	AV
H	4924	55.99	30.55	5.77	24.66	55.87	74.00	-18.13	PK
H	4924	41.73	30.55	5.77	24.66	41.61	54.00	-12.39	AV
H	7386	54.27	30.33	6.32	24.55	54.81	74.00	-19.19	PK
H	7386	41.66	30.33	6.32	24.55	42.20	54.00	-11.80	AV
H	9848	50.04	30.85	7.45	24.69	51.33	74.00	-22.67	PK
H	9848	38.83	30.85	7.45	24.69	40.12	54.00	-13.88	AV

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	54.58	30.55	5.77	24.66	54.46	74.00	-19.54	PK
V	4824	39.75	30.55	5.77	24.66	39.63	54.00	-14.37	AV
V	7236	53.32	30.33	6.32	24.55	53.86	74.00	-20.14	PK
V	7236	41.36	30.33	6.32	24.55	41.90	54.00	-12.10	AV
V	9648	51.12	30.85	7.45	24.69	52.41	74.00	-21.59	PK
V	9648	36.34	30.85	7.45	24.69	37.63	54.00	-16.37	AV
H	4824	54.19	30.55	5.77	24.66	54.07	74.00	-19.93	PK
H	4824	41.75	30.55	5.77	24.66	41.63	54.00	-12.37	AV
H	7236	53.13	30.33	6.32	24.55	53.67	74.00	-20.33	PK
H	7236	40.87	30.33	6.32	24.55	41.41	54.00	-12.59	AV
H	9648	50.52	30.85	7.45	24.69	51.81	74.00	-22.19	PK
H	9648	36.99	30.85	7.45	24.69	38.28	54.00	-15.72	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	55.98	30.55	5.77	24.66	55.86	74.00	-18.14	PK
V	4874	41.17	30.55	5.77	24.66	41.05	54.00	-12.95	AV
V	7311	54.61	30.33	6.32	24.55	55.15	74.00	-18.85	PK
V	7311	41.60	30.33	6.32	24.55	42.14	54.00	-11.86	AV
V	9748	50.96	30.85	7.45	24.69	52.25	74.00	-21.75	PK
V	9748	38.56	30.85	7.45	24.69	39.85	54.00	-14.15	AV
H	4874	55.86	30.55	5.77	24.66	55.74	74.00	-18.26	PK
H	4874	39.24	30.55	5.77	24.66	39.12	54.00	-14.88	AV
H	7311	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
H	7311	40.26	30.33	6.32	24.55	40.80	54.00	-13.20	AV
H	9748	49.88	30.85	7.45	24.69	51.17	74.00	-22.83	PK
H	9748	38.13	30.85	7.45	24.69	39.42	54.00	-14.58	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	54.15	30.55	5.77	24.66	54.03	74.00	-19.97	PK
V	4924	40.48	30.55	5.77	24.66	40.36	54.00	-13.64	AV
V	7386	53.65	30.33	6.32	24.55	54.19	74.00	-19.81	PK
V	7386	39.73	30.33	6.32	24.55	40.27	54.00	-13.73	AV
V	9848	51.09	30.85	7.45	24.69	52.38	74.00	-21.62	PK
V	9848	37.36	30.85	7.45	24.69	38.65	54.00	-15.35	AV
H	4924	55.08	30.55	5.77	24.66	54.96	74.00	-19.04	PK
H	4924	39.37	30.55	5.77	24.66	39.25	54.00	-14.75	AV
H	7386	54.08	30.33	6.32	24.55	54.62	74.00	-19.38	PK
H	7386	40.80	30.33	6.32	24.55	41.34	54.00	-12.66	AV
H	9848	51.44	30.85	7.45	24.69	52.73	74.00	-21.27	PK
H	9848	38.52	30.85	7.45	24.69	39.81	54.00	-14.19	AV

802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824	56.68	30.55	5.77	24.66	56.56	74.00	-17.44	PK
V	4824	41.93	30.55	5.77	24.66	41.81	54.00	-12.19	AV
V	7236	54.67	30.33	6.32	24.55	55.21	74.00	-18.79	PK
V	7236	39.27	30.33	6.32	24.55	39.81	54.00	-14.19	AV
V	9648	51.09	30.85	7.45	24.69	52.38	74.00	-21.62	PK
V	9648	36.82	30.85	7.45	24.69	38.11	54.00	-15.89	AV
H	4824	55.46	30.55	5.77	24.66	55.34	74.00	-18.66	PK
H	4824	39.69	30.55	5.77	24.66	39.57	54.00	-14.43	AV
H	7236	53.07	30.33	6.32	24.55	53.61	74.00	-20.39	PK
H	7236	38.79	30.33	6.32	24.55	39.33	54.00	-14.67	AV
H	9648	50.48	30.85	7.45	24.69	51.77	74.00	-22.23	PK
H	9648	36.66	30.85	7.45	24.69	37.95	54.00	-16.05	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	56.25	30.55	5.77	24.66	56.13	74.00	-17.87	PK
V	4874	42.09	30.55	5.77	24.66	41.97	54.00	-12.03	AV
V	7311	53.71	30.33	6.32	24.55	54.25	74.00	-19.75	PK
V	7311	41.09	30.33	6.32	24.55	41.63	54.00	-12.37	AV
V	9748	50.13	30.85	7.45	24.69	51.42	74.00	-22.58	PK
V	9748	38.41	30.85	7.45	24.69	39.70	54.00	-14.30	AV
H	4874	53.80	30.55	5.77	24.66	53.68	74.00	-20.32	PK
H	4874	41.08	30.55	5.77	24.66	40.96	54.00	-13.04	AV
H	7311	53.44	30.33	6.32	24.55	53.98	74.00	-20.02	PK
H	7311	41.08	30.33	6.32	24.55	41.62	54.00	-12.38	AV
H	9748	52.65	30.85	7.45	24.69	53.94	74.00	-20.06	PK
H	9748	36.85	30.85	7.45	24.69	38.14	54.00	-15.86	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924	56.27	30.55	5.77	24.66	56.15	74.00	-17.85	PK
V	4924	40.73	30.55	5.77	24.66	40.61	54.00	-13.39	AV
V	7386	54.49	30.33	6.32	24.55	55.03	74.00	-18.97	PK
V	7386	39.90	30.33	6.32	24.55	40.44	54.00	-13.56	AV
V	9848	52.41	30.85	7.45	24.69	53.70	74.00	-20.30	PK
V	9848	38.29	30.85	7.45	24.69	39.58	54.00	-14.42	AV
H	4924	55.90	30.55	5.77	24.66	55.78	74.00	-18.22	PK
H	4924	40.68	30.55	5.77	24.66	40.56	54.00	-13.44	AV
H	7386	53.68	30.33	6.32	24.55	54.22	74.00	-19.78	PK
H	7386	39.63	30.33	6.32	24.55	40.17	54.00	-13.83	AV
H	9848	50.49	30.85	7.45	24.69	51.78	74.00	-22.22	PK
H	9848	38.93	30.85	7.45	24.69	40.22	54.00	-13.78	AV

802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2422MHz									
V	4844	56.66	30.55	5.77	24.66	56.54	74.00	-17.46	PK
V	4844	39.44	30.55	5.77	24.66	39.32	54.00	-14.68	AV
V	7266	53.61	30.33	6.32	24.55	54.15	74.00	-19.85	PK
V	7266	39.47	30.33	6.32	24.55	40.01	54.00	-13.99	AV
V	9688	51.45	30.85	7.45	24.69	52.74	74.00	-21.26	PK
V	9688	37.78	30.85	7.45	24.69	39.07	54.00	-14.93	AV
H	4844	56.21	30.55	5.77	24.66	56.09	74.00	-17.91	PK
H	4844	39.46	30.55	5.77	24.66	39.34	54.00	-14.66	AV
H	7266	52.82	30.33	6.32	24.55	53.36	74.00	-20.64	PK
H	7266	40.45	30.33	6.32	24.55	40.99	54.00	-13.01	AV
H	9688	51.00	30.85	7.45	24.69	52.29	74.00	-21.71	PK
H	9688	38.08	30.85	7.45	24.69	39.37	54.00	-14.63	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874	53.90	30.55	5.77	24.66	53.78	74.00	-20.22	PK
V	4874	41.45	30.55	5.77	24.66	41.33	54.00	-12.67	AV
V	7311	53.25	30.33	6.32	24.55	53.79	74.00	-20.21	PK
V	7311	41.67	30.33	6.32	24.55	42.21	54.00	-11.79	AV
V	9748	49.81	30.85	7.45	24.69	51.10	74.00	-22.90	PK
V	9748	38.79	30.85	7.45	24.69	40.08	54.00	-13.92	AV
H	4874	55.04	30.55	5.77	24.66	54.92	74.00	-19.08	PK
H	4874	40.53	30.55	5.77	24.66	40.41	54.00	-13.59	AV
H	7311	53.97	30.33	6.32	24.55	54.51	74.00	-19.49	PK
H	7311	40.76	30.33	6.32	24.55	41.30	54.00	-12.70	AV
H	9748	51.82	30.85	7.45	24.69	53.11	74.00	-20.89	PK
H	9748	36.51	30.85	7.45	24.69	37.80	54.00	-16.20	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2452MHz									
V	4904	55.99	30.55	5.77	24.66	55.87	74.00	-18.13	PK
V	4904	39.66	30.55	5.77	24.66	39.54	54.00	-14.46	AV
V	7356	53.26	30.33	6.32	24.55	53.80	74.00	-20.20	PK
V	7356	39.71	30.33	6.32	24.55	40.25	54.00	-13.75	AV
V	9808	51.01	30.85	7.45	24.69	52.30	74.00	-21.70	PK
V	9808	39.00	30.85	7.45	24.69	40.29	54.00	-13.71	AV
H	4904	54.73	30.55	5.77	24.66	54.61	74.00	-19.39	PK
H	4904	40.63	30.55	5.77	24.66	40.51	54.00	-13.49	AV
H	7356	53.79	30.33	6.32	24.55	54.33	74.00	-19.67	PK
H	7356	39.35	30.33	6.32	24.55	39.89	54.00	-14.11	AV
H	9808	52.25	30.85	7.45	24.69	53.54	74.00	-20.46	PK
H	9808	36.29	30.85	7.45	24.69	37.58	54.00	-16.42	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.RADIATED BAND EMISSIONMEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

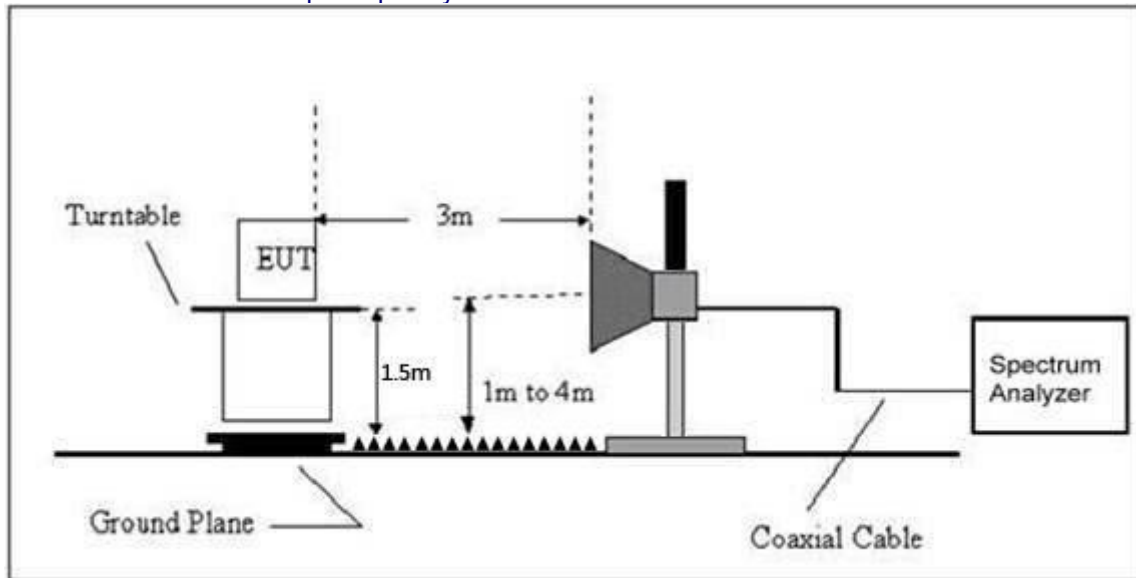

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dB)	Dete ctor Type	Result
802.11 b	Low Channel 2412MHz										
	H	2390.00	55.98	30.22	4.85	23.98	54.59	74	-19.41	PK	PASS
	H	2390.00	37.39	30.22	4.85	23.98	36.00	54	-18.00	AV	PASS
	H	2400.00	52.90	30.22	4.85	23.98	51.51	74	-22.49	PK	PASS
	H	2400.00	38.26	30.22	4.85	23.98	36.87	54	-17.13	AV	PASS
	V	2390.00	53.00	30.22	4.85	23.98	51.61	74	-22.39	PK	PASS
	V	2390.00	40.54	30.22	4.85	23.98	39.15	54	-14.85	AV	PASS
	V	2400.00	51.67	30.22	4.85	23.98	50.28	74	-23.72	PK	PASS
	V	2400.00	38.98	30.22	4.85	23.98	37.59	54	-16.41	AV	PASS
	High Channel 2462MHz										
	H	2483.50	55.23	30.22	4.85	23.98	53.84	74	-20.16	PK	PASS
	H	2485.50	38.17	30.22	4.85	23.98	36.78	54	-17.22	AV	PASS
	H	2500.00	51.91	30.22	4.85	23.98	50.52	74	-23.48	PK	PASS
	H	2500.00	39.41	30.22	4.85	23.98	38.02	54	-15.98	AV	PASS
	V	2483.50	52.51	30.22	4.85	23.98	51.12	74	-22.88	PK	PASS
	V	2485.50	40.86	30.22	4.85	23.98	39.47	54	-14.53	AV	PASS
	V	2500.00	52.48	30.22	4.85	23.98	51.09	74	-22.91	PK	PASS
	V	2500.00	38.95	30.22	4.85	23.98	37.56	54	-16.44	AV	PASS

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dB)	Dete ctor Type	Result
802.11 g	Low Channel 2412MHz										
	H	2390.00	56.63	30.22	4.85	23.98	55.24	74	-18.76	PK	PASS
	H	2390.00	35.95	30.22	4.85	23.98	34.56	54	-19.44	AV	PASS
	H	2400.00	54.04	30.22	4.85	23.98	52.65	74	-21.35	PK	PASS
	H	2400.00	39.39	30.22	4.85	23.98	38.00	54	-16.00	AV	PASS
	V	2390.00	51.75	30.22	4.85	23.98	50.36	74	-23.64	PK	PASS
	V	2390.00	42.01	30.22	4.85	23.98	40.62	54	-13.38	AV	PASS
	V	2400.00	52.72	30.22	4.85	23.98	51.33	74	-22.67	PK	PASS
	V	2400.00	39.17	30.22	4.85	23.98	37.78	54	-16.22	AV	PASS
	High Channel 2462MHz										
	H	2483.50	54.74	30.22	4.85	23.98	53.35	74	-20.65	PK	PASS
	H	2485.50	37.82	30.22	4.85	23.98	36.43	54	-17.57	AV	PASS
	H	2500.00	54.08	30.22	4.85	23.98	52.69	74	-21.31	PK	PASS
	H	2500.00	39.20	30.22	4.85	23.98	37.81	54	-16.19	AV	PASS
	V	2483.50	52.43	30.22	4.85	23.98	51.04	74	-22.96	PK	PASS
	V	2485.50	41.20	30.22	4.85	23.98	39.81	54	-14.19	AV	PASS
	V	2500.00	51.38	30.22	4.85	23.98	49.99	74	-24.01	PK	PASS
	V	2500.00	37.90	30.22	4.85	23.98	36.51	54	-17.49	AV	PASS

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margin (dB)	Dete ctor Type	Result
802.11 n20	Low Channel 2412MHz										
	H	2390.00	54.93	30.22	4.85	23.98	53.54	74	-20.46	PK	PASS
	H	2390.00	36.31	30.22	4.85	23.98	34.92	54	-19.08	AV	PASS
	H	2400.00	53.18	30.22	4.85	23.98	51.79	74	-22.21	PK	PASS
	H	2400.00	38.04	30.22	4.85	23.98	36.65	54	-17.35	AV	PASS
	V	2390.00	53.33	30.22	4.85	23.98	51.94	74	-22.06	PK	PASS
	V	2390.00	41.27	30.22	4.85	23.98	39.88	54	-14.12	AV	PASS
	V	2400.00	52.82	30.22	4.85	23.98	51.43	74	-22.57	PK	PASS

	V	2400.00	37.51	30.22	4.85	23.98	36.12	54	-17.88	AV	PASS
	High Channel 2462MHz										
	H	2483.50	56.41	30.22	4.85	23.98	55.02	74	-18.98	PK	PASS
	H	2485.50	36.44	30.22	4.85	23.98	35.05	54	-18.95	AV	PASS
	H	2500.00	53.25	30.22	4.85	23.98	51.86	74	-22.14	PK	PASS
	H	2500.00	38.60	30.22	4.85	23.98	37.21	54	-16.79	AV	PASS
	V	2483.50	52.31	30.22	4.85	23.98	50.92	74	-23.08	PK	PASS
	V	2485.50	41.66	30.22	4.85	23.98	40.27	54	-13.73	AV	PASS
	V	2500.00	51.85	30.22	4.85	23.98	50.46	74	-23.54	PK	PASS
	V	2500.00	39.12	30.22	4.85	23.98	37.73	54	-16.27	AV	PASS

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
802.11 n40	Low Channel 2422MHz										
	H	2390.00	53.96	30.22	4.85	23.98	52.57	74	-21.43	PK	PASS
	H	2390.00	35.81	30.22	4.85	23.98	34.42	54	-19.58	AV	PASS
	H	2400.00	53.21	30.22	4.85	23.98	51.82	74	-22.18	PK	PASS
	H	2400.00	39.76	30.22	4.85	23.98	38.37	54	-15.63	AV	PASS
	V	2390.00	50.04	30.22	4.85	23.98	48.65	74	-25.35	PK	PASS
	V	2390.00	42.07	30.22	4.85	23.98	40.68	54	-13.32	AV	PASS
	V	2400.00	52.72	30.22	4.85	23.98	51.33	74	-22.67	PK	PASS
	V	2400.00	37.68	30.22	4.85	23.98	36.29	54	-17.71	AV	PASS
	High Channel 2452MHz										
	H	2483.50	55.31	30.22	4.85	23.98	53.92	74	-20.08	PK	PASS
	H	2485.50	36.35	30.22	4.85	23.98	34.96	54	-19.04	AV	PASS
	H	2500.00	52.16	30.22	4.85	23.98	50.77	74	-23.23	PK	PASS
	H	2500.00	38.03	30.22	4.85	23.98	36.64	54	-17.36	AV	PASS
	V	2483.50	50.83	30.22	4.85	23.98	49.44	74	-24.56	PK	PASS
	V	2485.50	41.83	30.22	4.85	23.98	40.44	54	-13.56	AV	PASS
	V	2500.00	53.15	30.22	4.85	23.98	51.76	74	-22.24	PK	PASS
	V	2500.00	38.14	30.22	4.85	23.98	36.75	54	-17.25	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

8. OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

PASS: PLEASE REFER TO APPENDIX: APPENDIX1 FOR DETAILS



10. ANTENNA REQUIREMENT


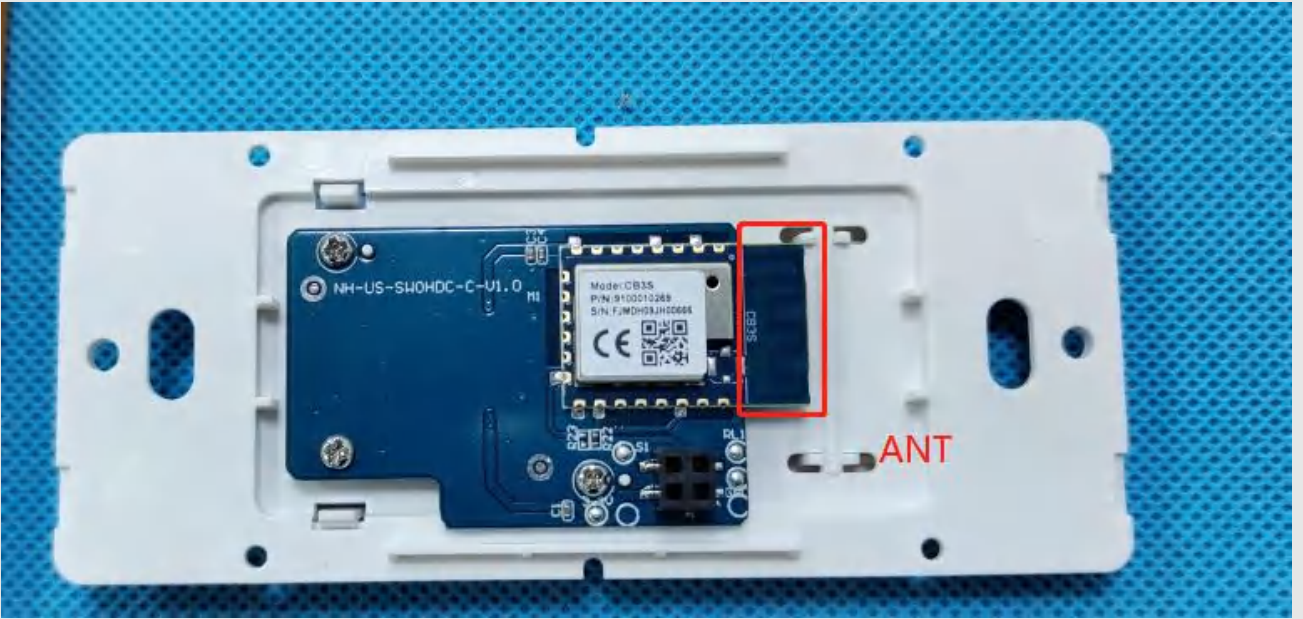
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Refer to statement below for compliance. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed. Antenna Connected Construction The antenna is PCB antenna, the best case gain of the antennas are 1.37dBi, reference to the below photo for detailsANT for 2.4G WIFI	
	



11. Appendix1



11.1. -6DB BANDWIDTH



Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	11.61	500	Pass
NVNT	ANT1	802.11b	2437.00	11.56	500	Pass
NVNT	ANT1	802.11b	2462.00	12.20	500	Pass
NVNT	ANT1	802.11g	2412.00	16.32	500	Pass
NVNT	ANT1	802.11g	2437.00	16.32	500	Pass
NVNT	ANT1	802.11g	2462.00	16.32	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	16.93	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	16.60	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	16.78	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	35.21	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	35.22	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	35.18	500	Pass

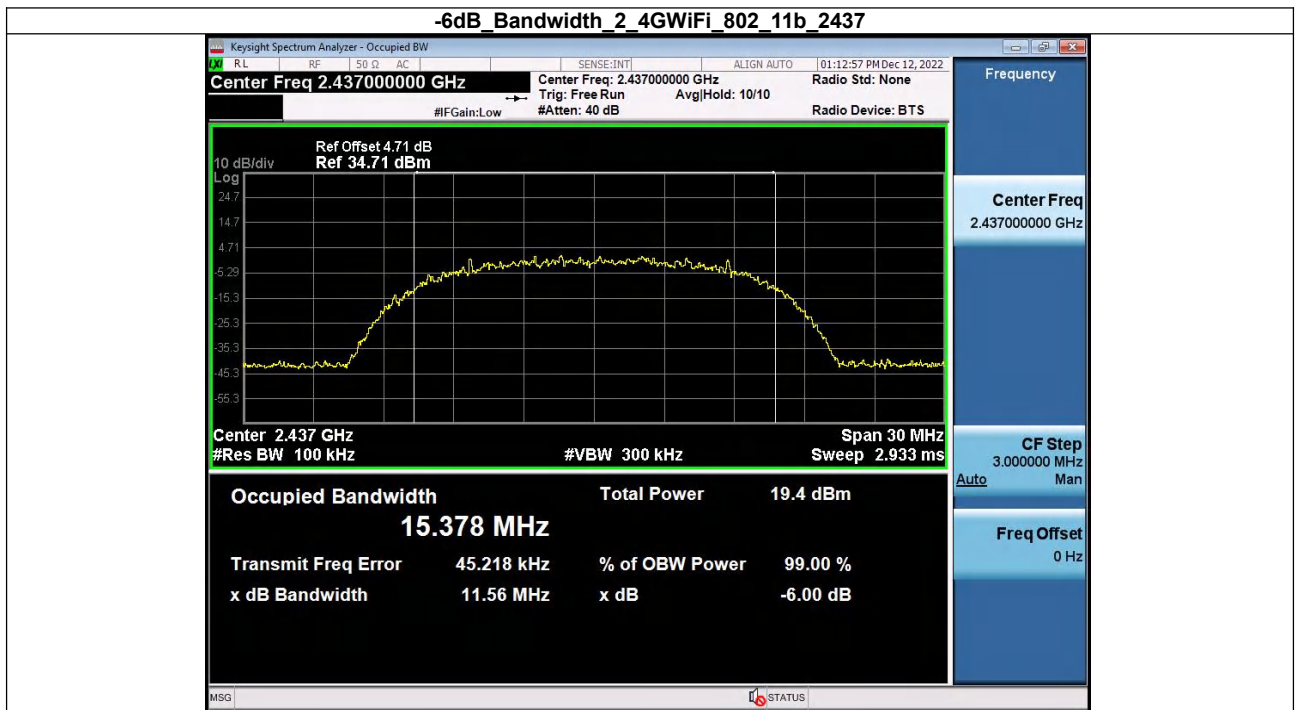
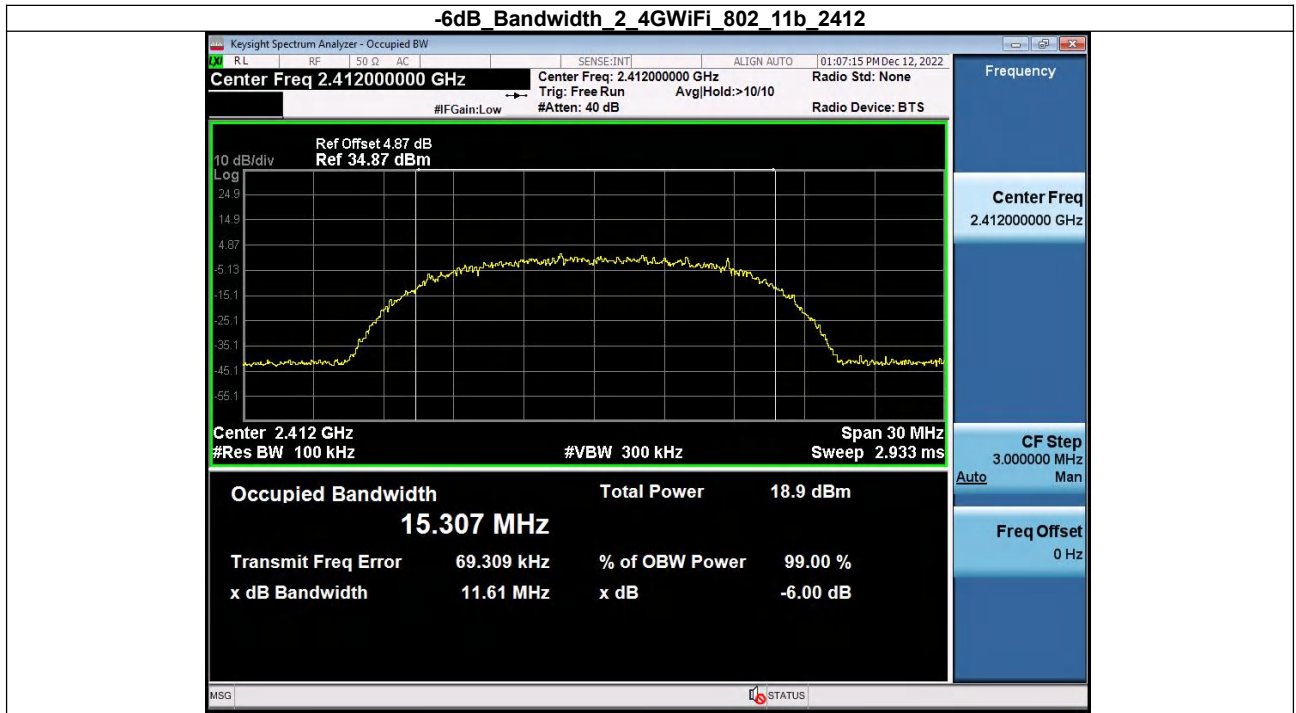


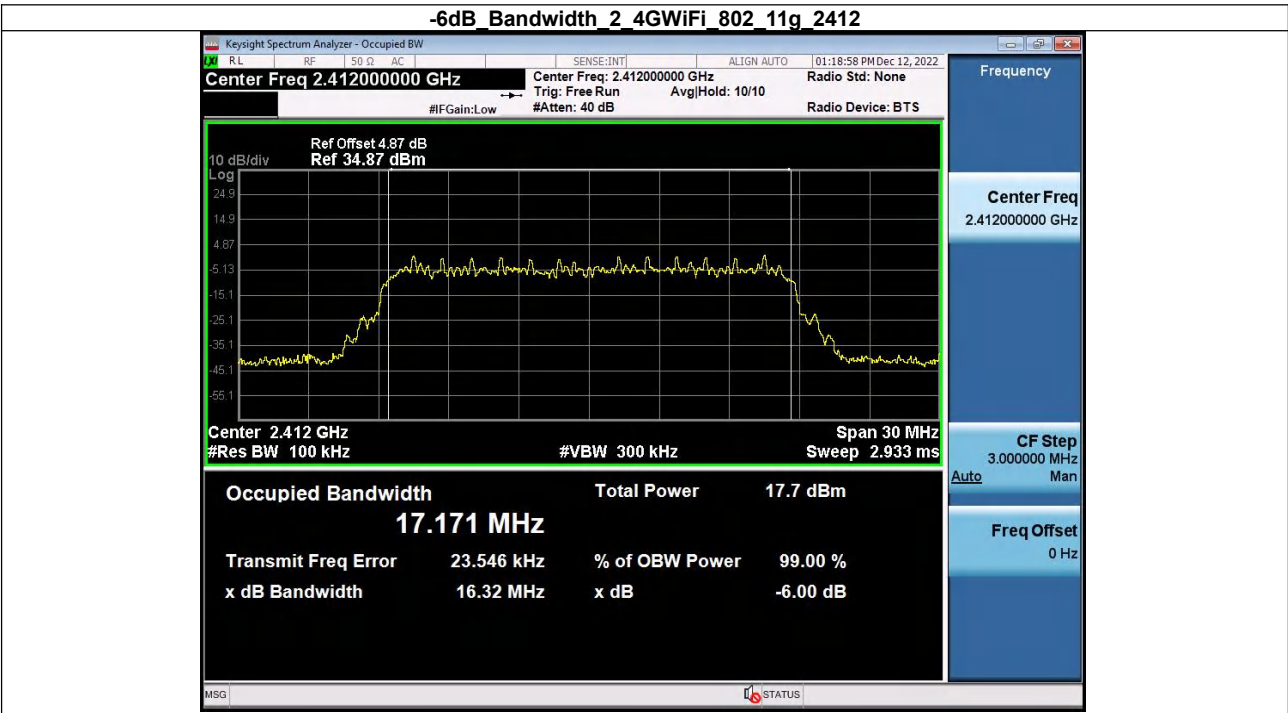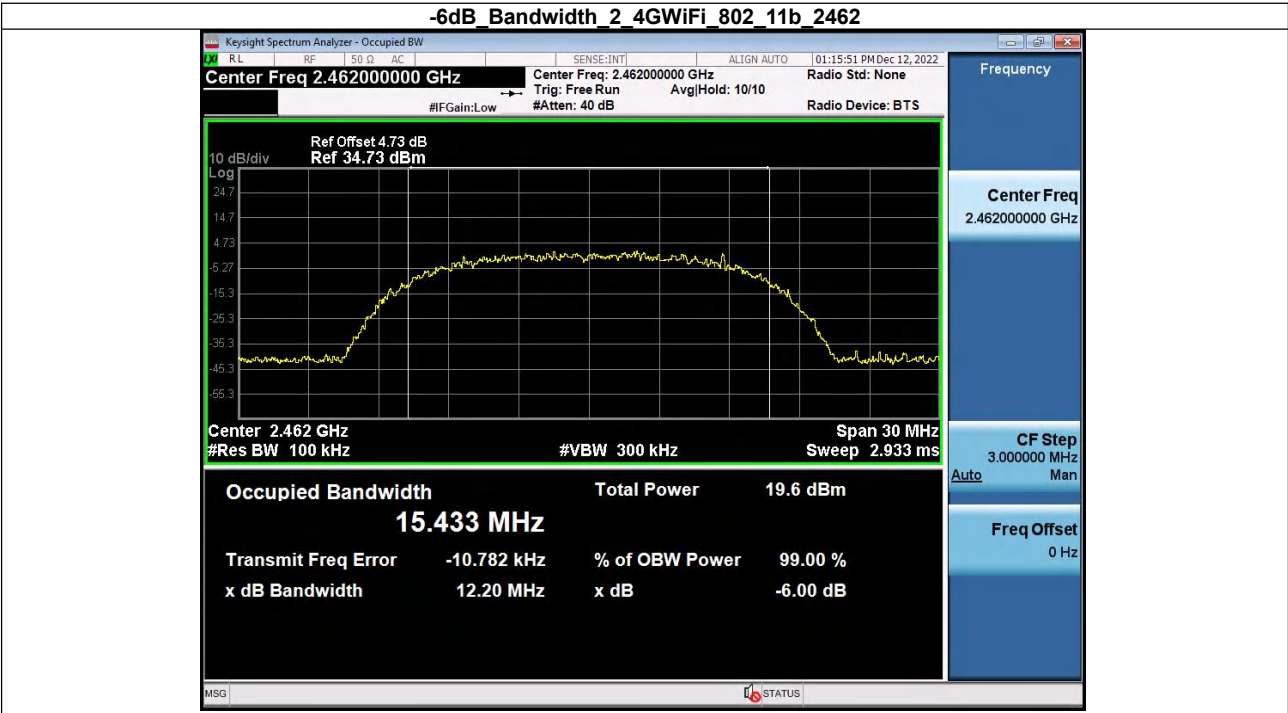

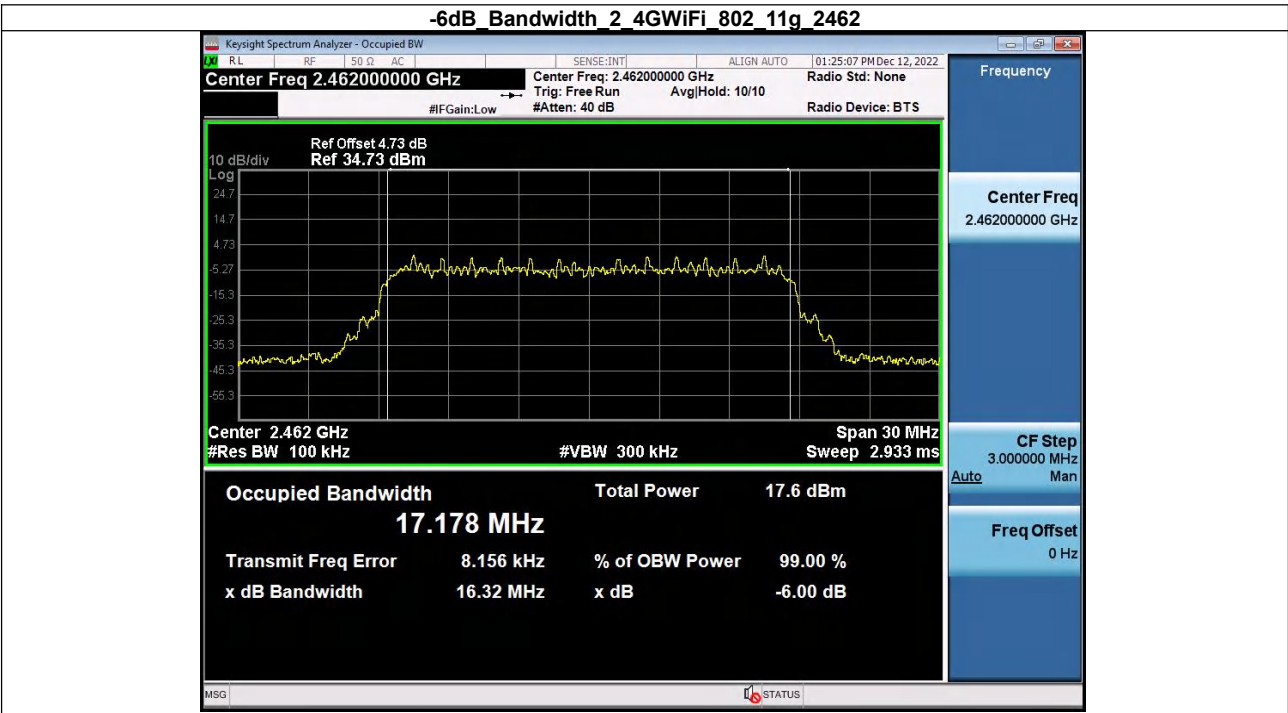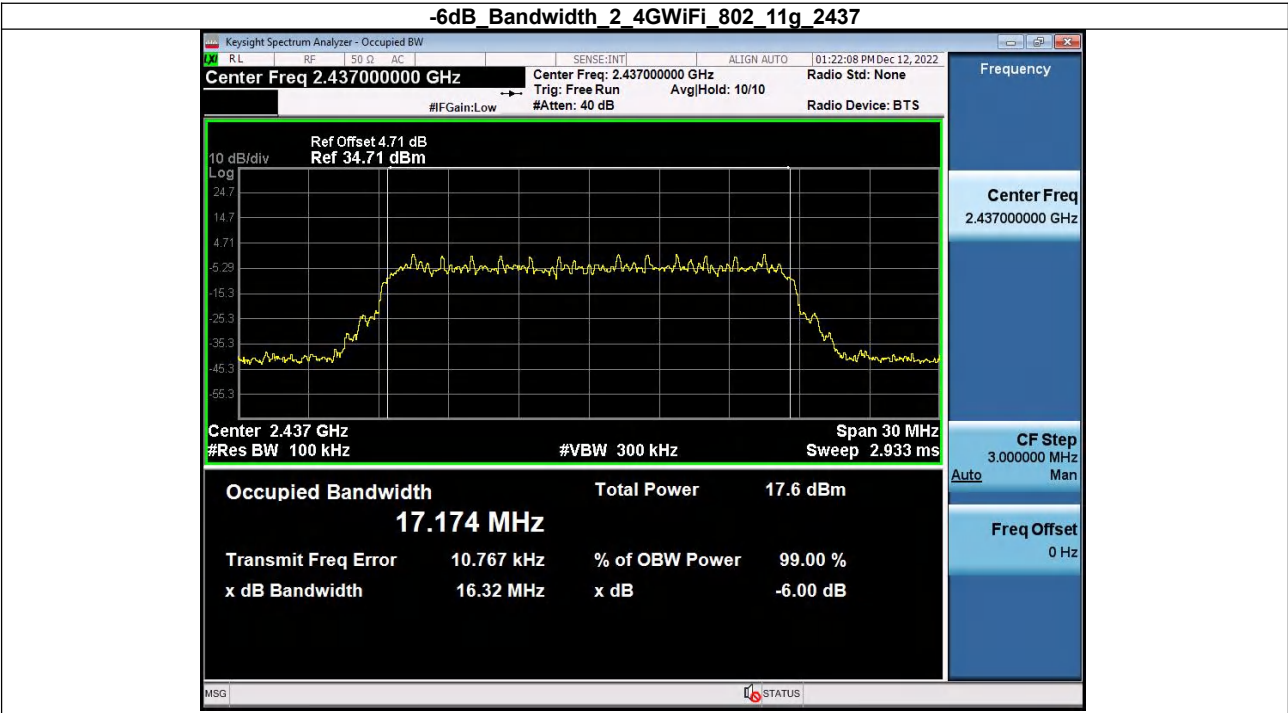

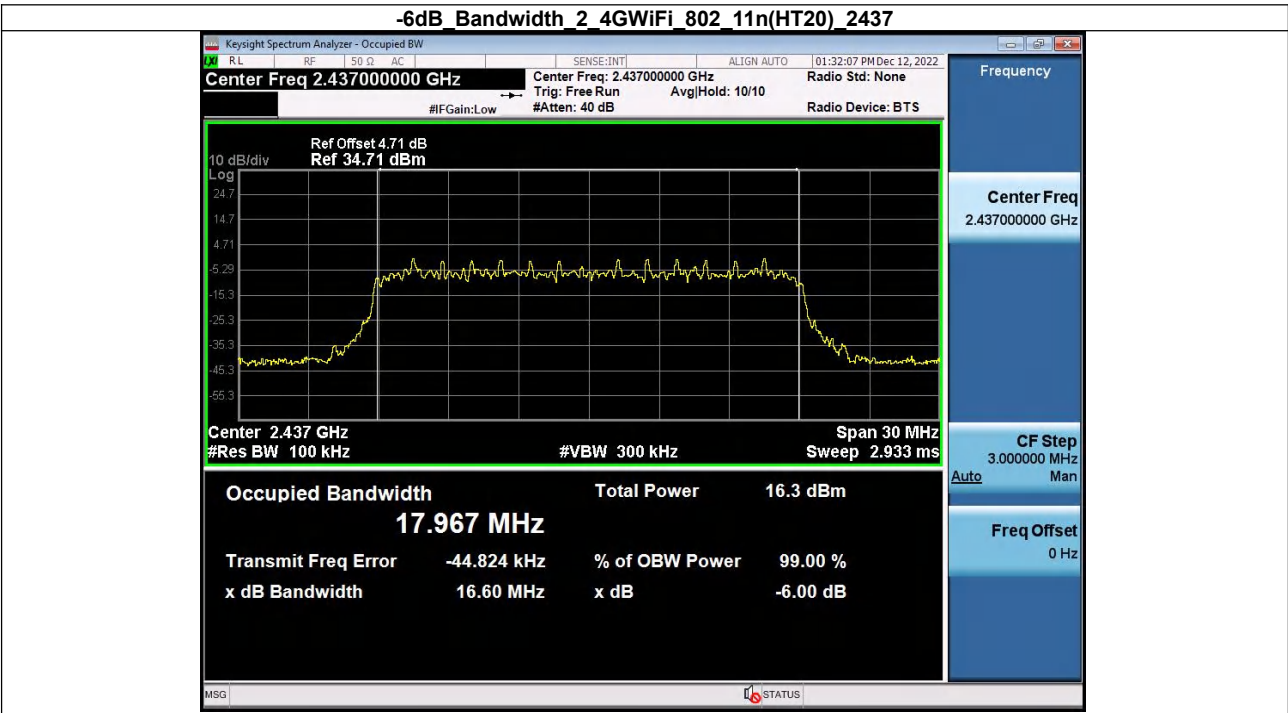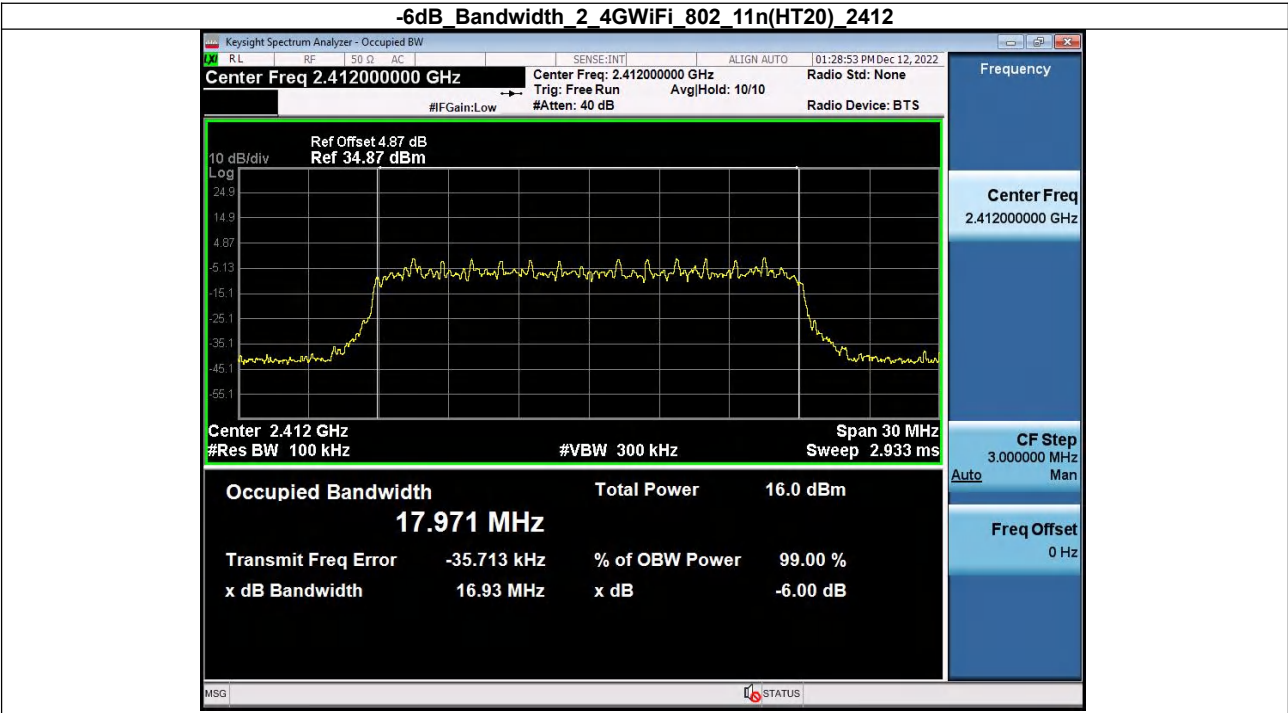

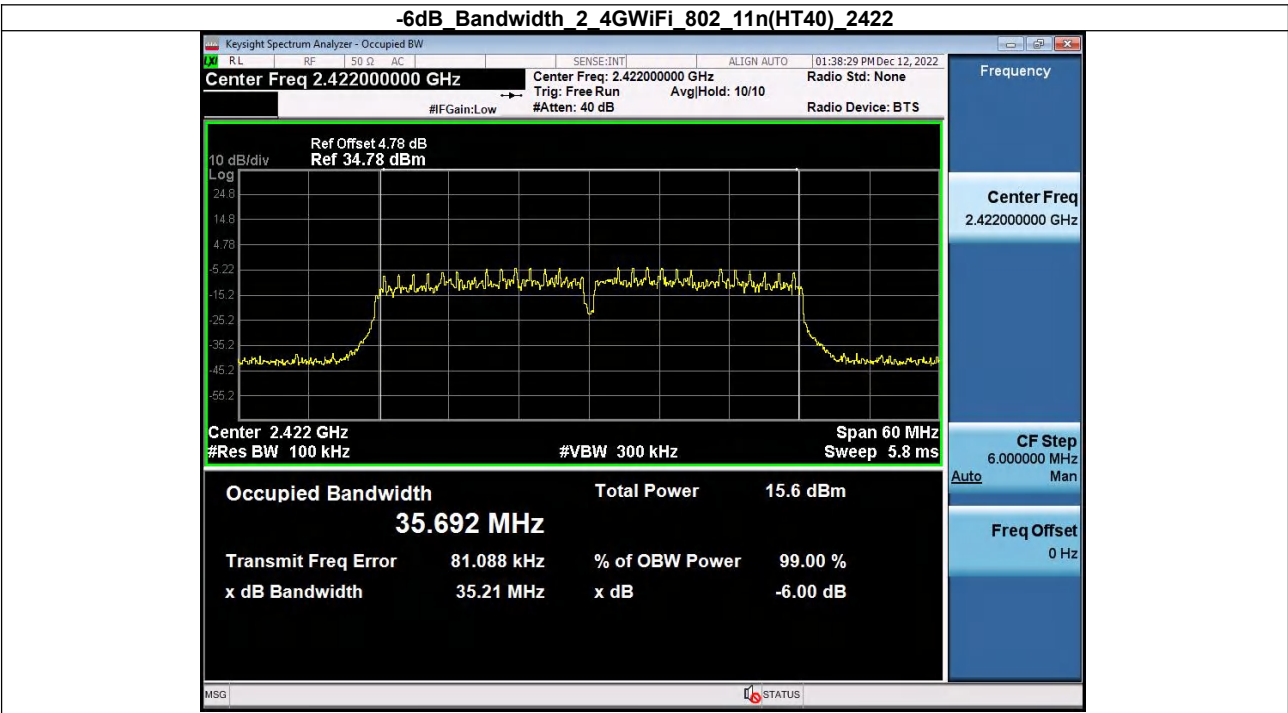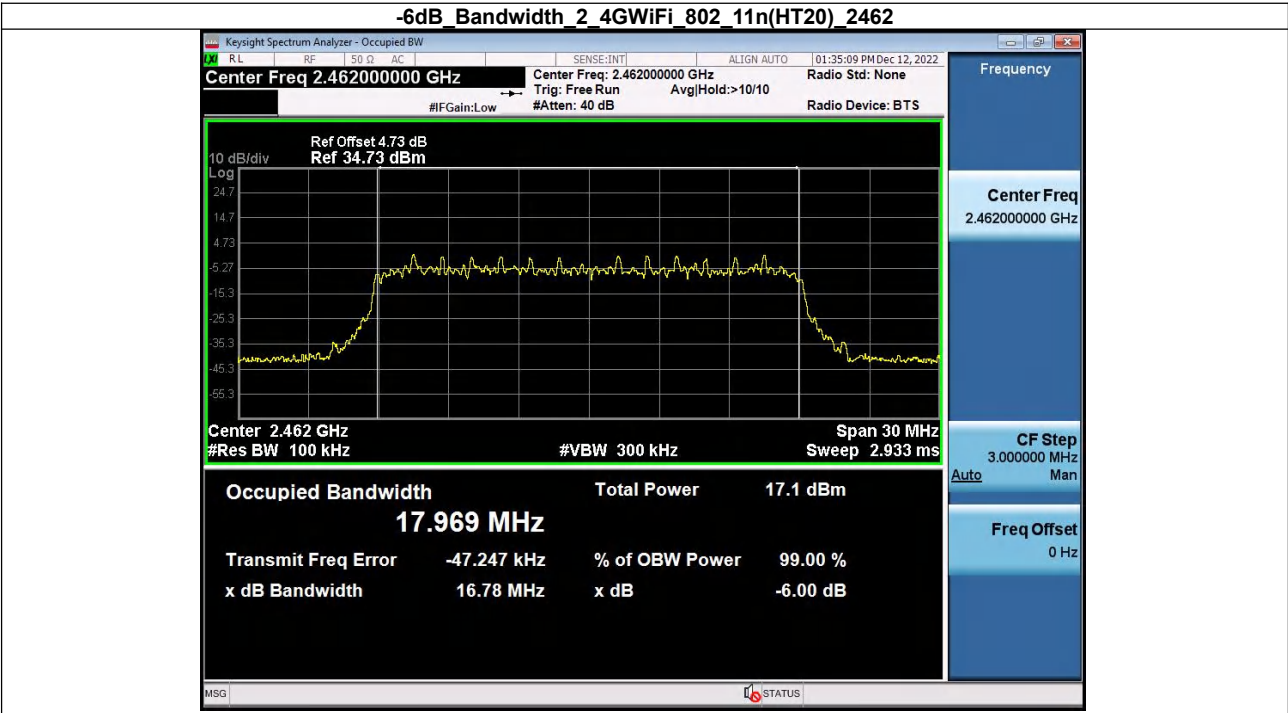


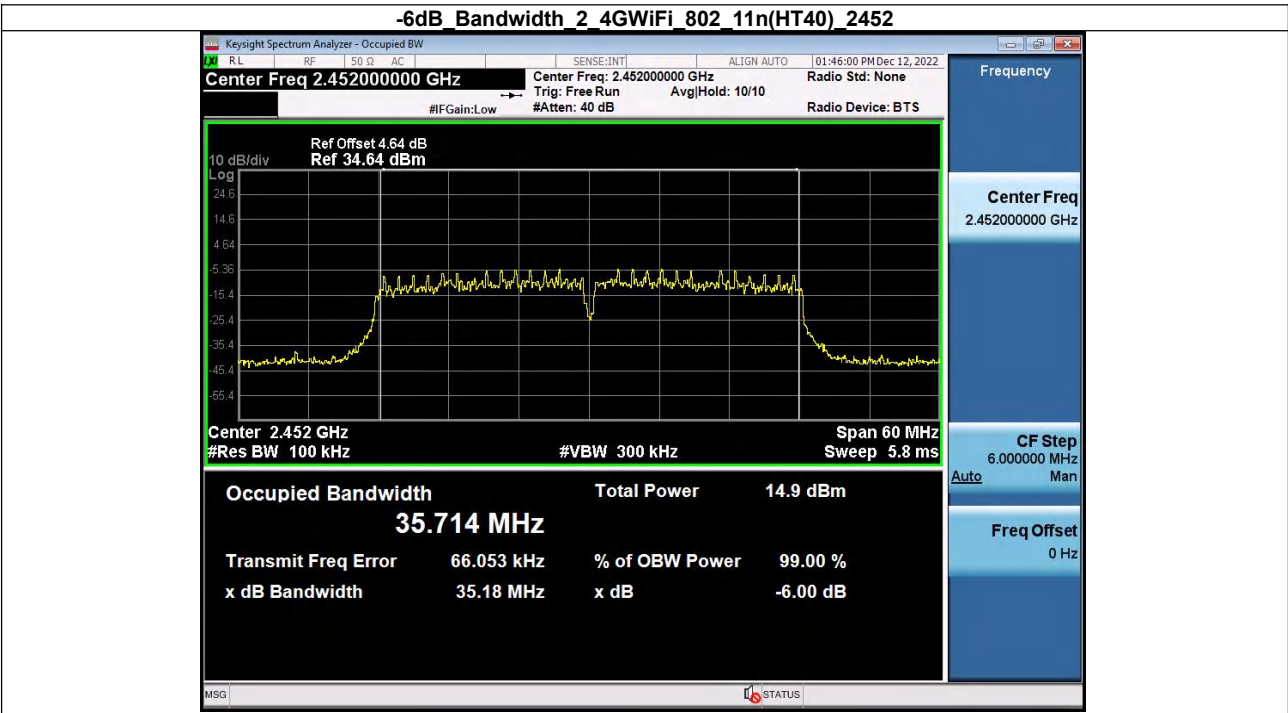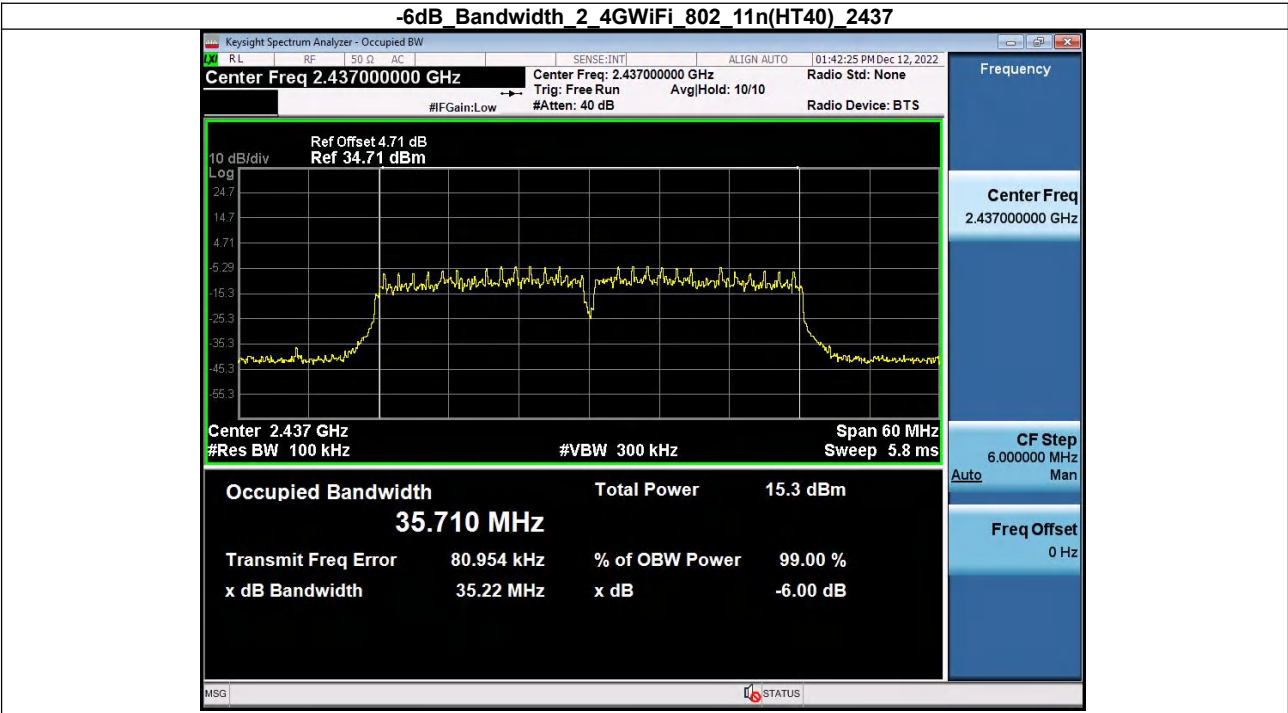


11.2. BANDEDGE

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	2354.02	-39.21	-19.07	Pass
NVNT	ANT1	802.11b	2462.00	2494.67	-38.87	-18.09	Pass
NVNT	ANT1	802.11g	2412.00	2397.02	-38.47	-19.44	Pass
NVNT	ANT1	802.11g	2462.00	2484.50	-39.48	-19.01	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	2337.33	-38.81	-20.63	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	2497.94	-39.54	-19.94	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	2396.99	-37.30	-24.94	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	2493.20	-39.35	-24.82	Pass

1 Reference Level 2_4GWiFi 802_11b 2412

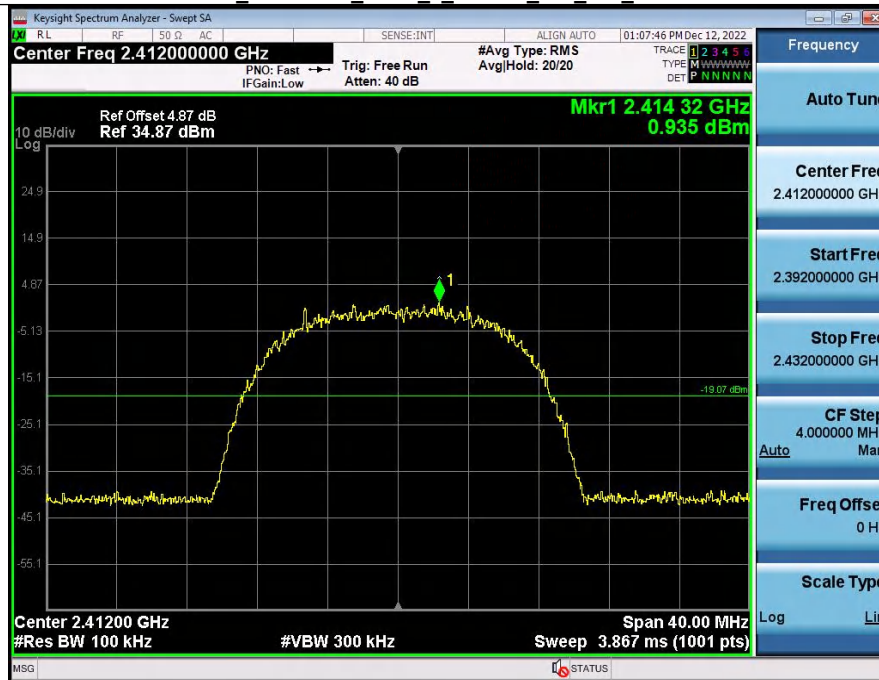

2 Bandedge 2_4GWiFi NVNT ANT1 802_11b 2412

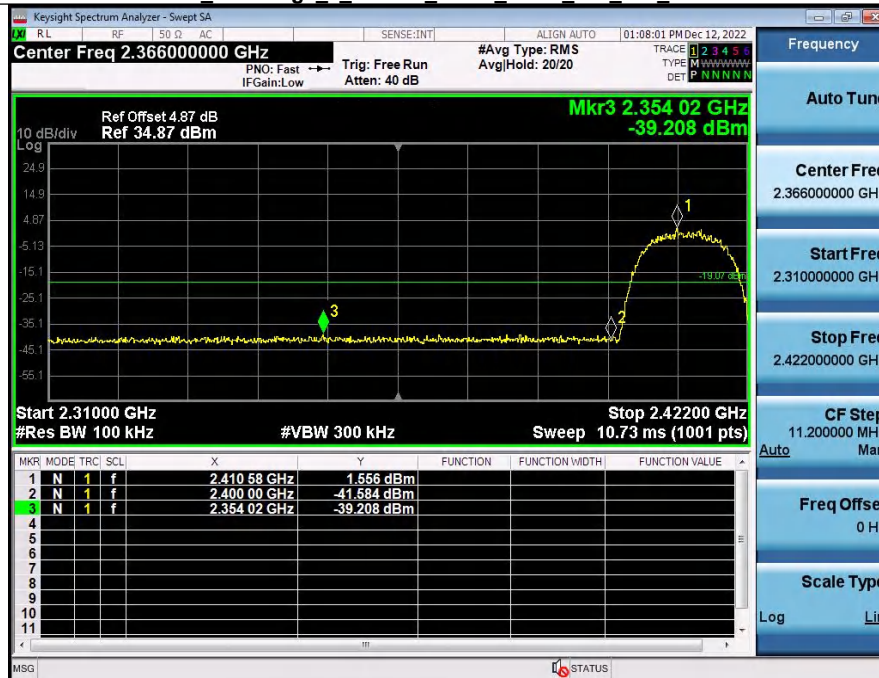

1	Reference	Level 2	4GWiFi	802	11b	2462
---	-----------	---------	--------	-----	-----	------




2 Bandedge 2 4GWiFi NVNT ANT1 802 11b 2462




The screenshot displays the Keysight Spectrum Analyzer interface. The main display shows a signal trace with a prominent peak at 2.452 GHz, labeled 'Mkr1 2.452 GHz' and '0.993 dBm'. The trace is centered at 2.462 GHz. The frequency range is 2.442 GHz to 2.482 GHz. The span is 40.0 MHz. The resolution bandwidth (RBW) is 100 kHz. The video bandwidth (VBW) is 300 kHz. The sweep time is 3.867 ms (1001 pts). The trace is set to 'Log' scale. The peak is marked with a green arrow and '1'. The trace is labeled 'Mkr1 2.452 GHz' and '0.993 dBm'. The center frequency is 2.462 GHz. The span is 40.0 MHz. The resolution bandwidth (RBW) is 100 kHz. The video bandwidth (VBW) is 300 kHz. The sweep time is 3.867 ms (1001 pts). The trace is set to 'Log' scale. The peak is marked with a green arrow and '1'. The trace is labeled 'Mkr1 2.452 GHz' and '0.993 dBm'.

[illegible]


1 Reference Level 2 4GWiFi 802 11n(HT20) 2412

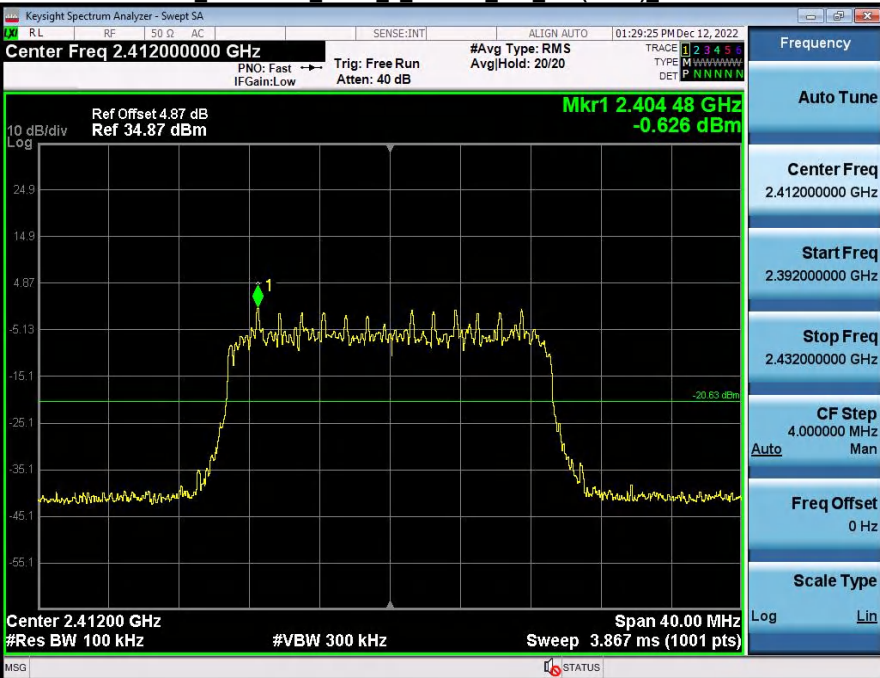


2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2412

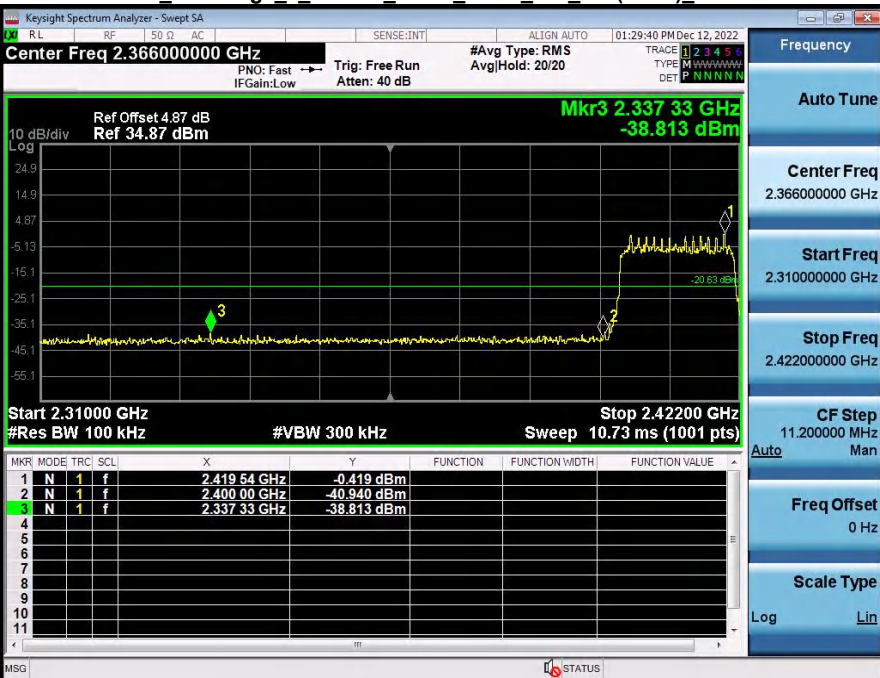


1 Reference Level 2 4GWiFi 802 11n(HT20) 2462

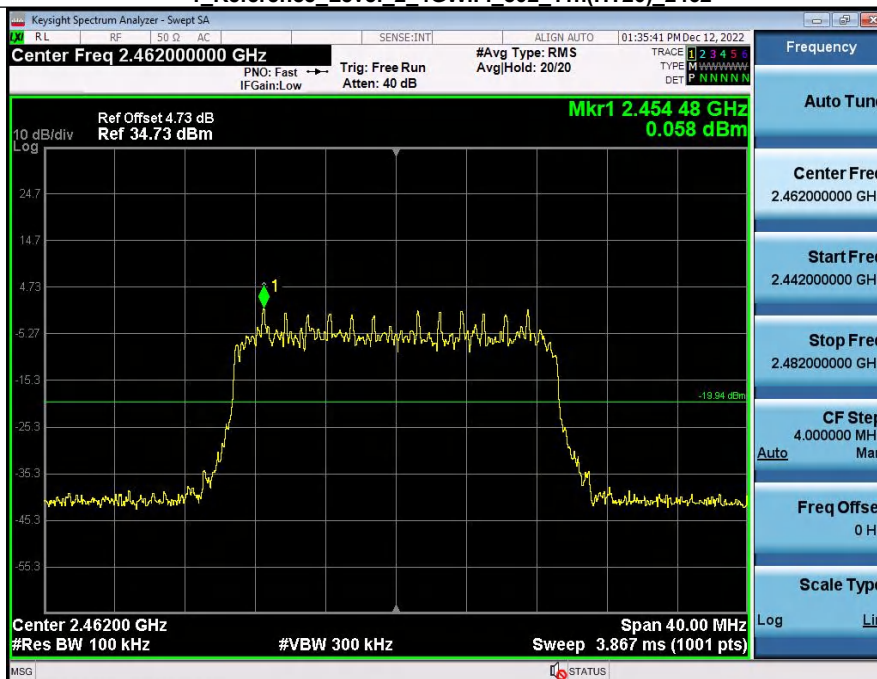


2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2462

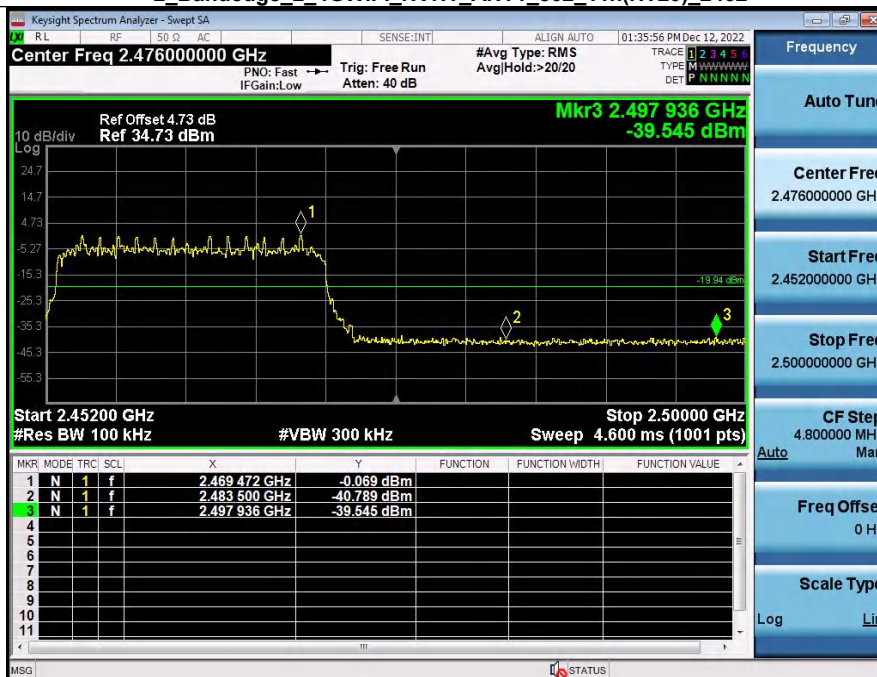

1 Reference Level 2_4GWiFi_802_11n(HT40)_2422

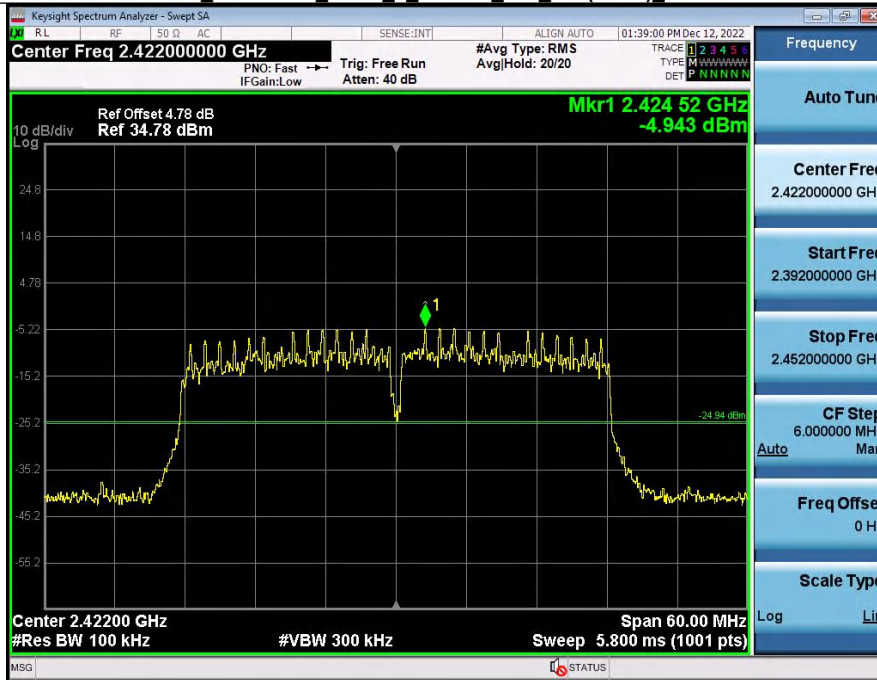

2_Bandedge_2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2422

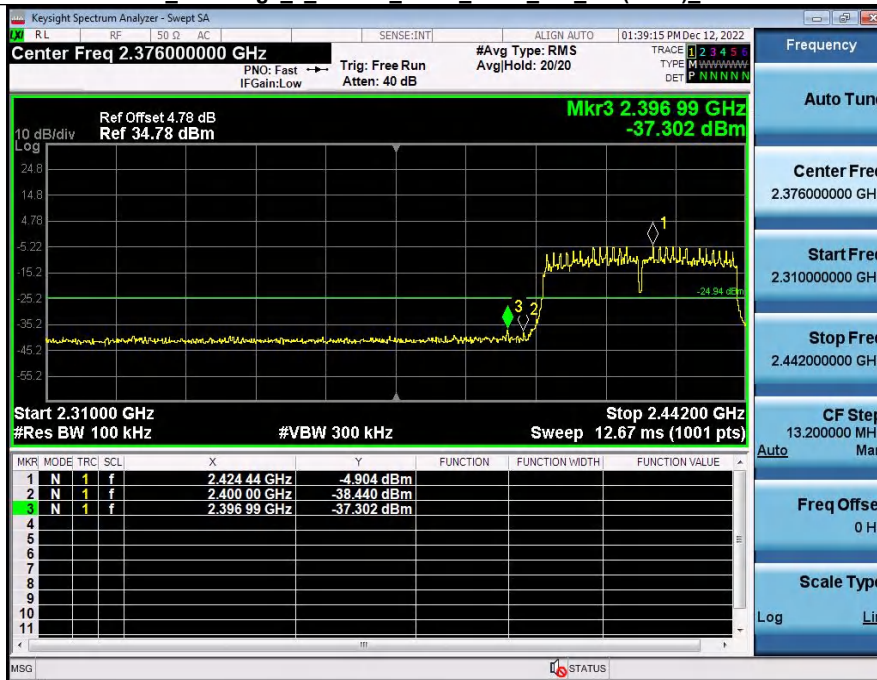

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.45200000 GHz

Ref Offset 4.64 dB
Ref 34.64 dBm

Mkr1 2.44576 GHz
-4.825 dBm

Center 2.452000 GHz
#Res BW 100 kHz
#VBW 300 kHz

Span 60.00 MHz
Sweep 5.800 ms (1001 pts)

Keysight Spectrum Analyzer - Sweep F

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 01:46:47 PM Dec 12, 2022

Center Freq 2.466000000 GHz #Avg Type: RMS AvgHold: 20/20

PNO: Fast IFGain:Low Trig: Free Run Atten: 40 dB

TRACE 1 2 3 4 5
TYPE M M M M M
DET P N N N N N

Ref Offset 4.64 dB
Ref 34.64 dBm

Mkr3 2.493 200 GHz -39.353 dBm

10 dB/div
Log

Start 2.43200 GHz Stop 2.50000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 6.533 ms (1001 pts)

MKR	MODE	TRC1	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.467 024 GHz	-4.681 dBm			
2	N	1	f	2.483 500 GHz	-42.222 dBm			
3	N	1	f	2.493 200 GHz	-39.353 dBm			
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tun

Center Freq
2.466000000 GHz

Start Freq
2.432000000 GHz

Stop Freq
2.500000000 GHz

CF Step
6.800000 MHz

Auto

Freq Offset
0 Hz

Scale Type
Lin

Log


11.3. MAX. OUTPUT POWER

Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	17.24	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	18.65	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	17.52	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	16.54	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	16.54	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	16.24	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	14.24	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	14.28	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	14.87	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	12.68	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	12.14	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	13.69	30	Pass

11.4. POWER SPECTRAL DENSITY

Condition	Antenna	Modulation	Frequency (MHz)	PSD(dBm/3kHz)	limit(dBm/3kHz)	Result
NVNT	ANT1	802.11b	2412.00	-14.14	8	Pass
NVNT	ANT1	802.11b	2437.00	-14.82	8	Pass
NVNT	ANT1	802.11b	2462.00	-13.43	8	Pass
NVNT	ANT1	802.11g	2412.00	-16.23	8	Pass
NVNT	ANT1	802.11g	2437.00	-16.23	8	Pass
NVNT	ANT1	802.11g	2462.00	-16.42	8	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	-17.99	8	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	-17.66	8	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	-16.44	8	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	-22.22	8	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	-22.67	8	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	-22.24	8	Pass


Power Spectral Density 2_4GWiFi_802_11b_2412

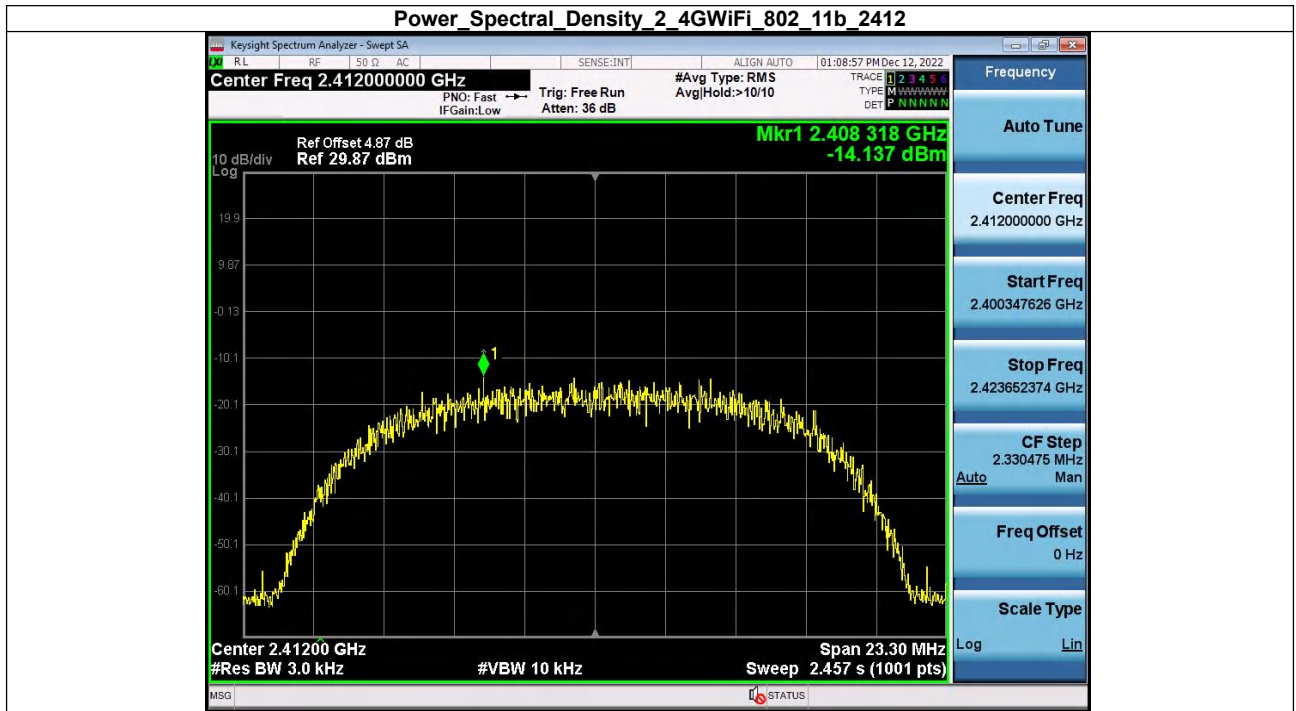


Power Spectral Density 2_4GWiFi_802_11b_2437




Power Spectral Density 2_4GWiFi_802_11b_2462

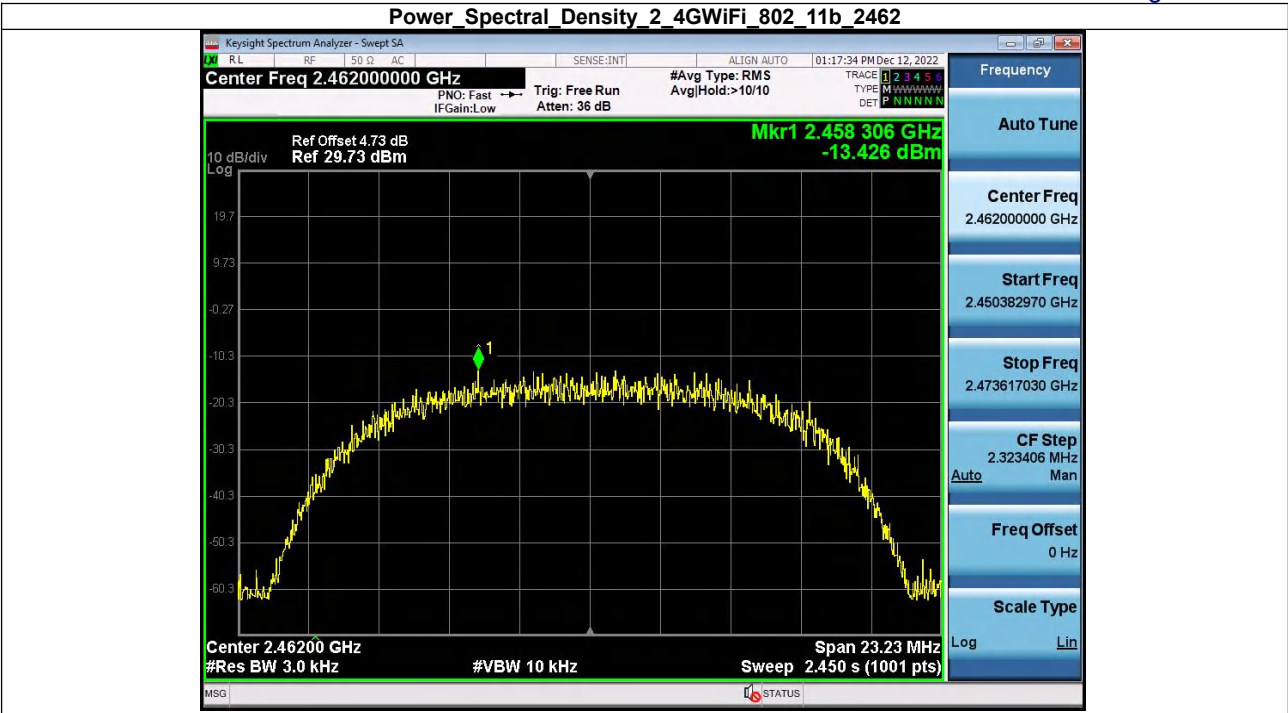


Power Spectral Density 2_4GWiFi_802_11g_2412

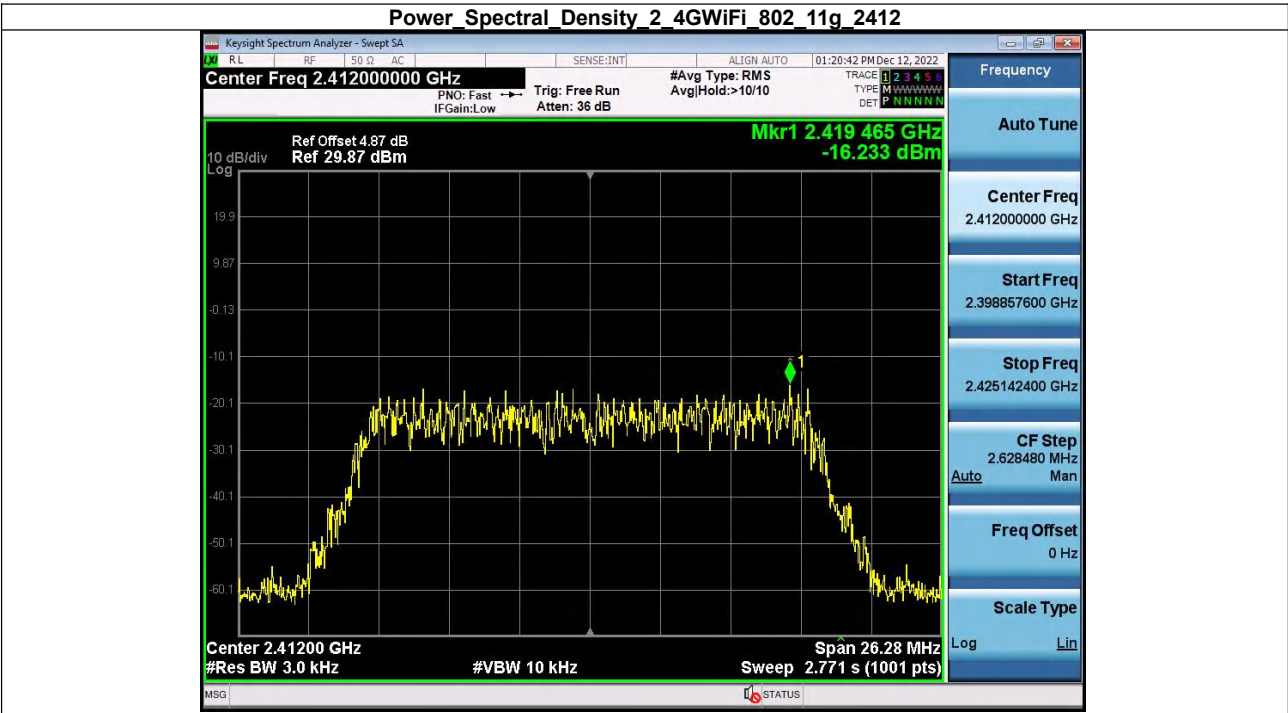


Power Spectral Density 2 4GWiFi 802_11g_2437

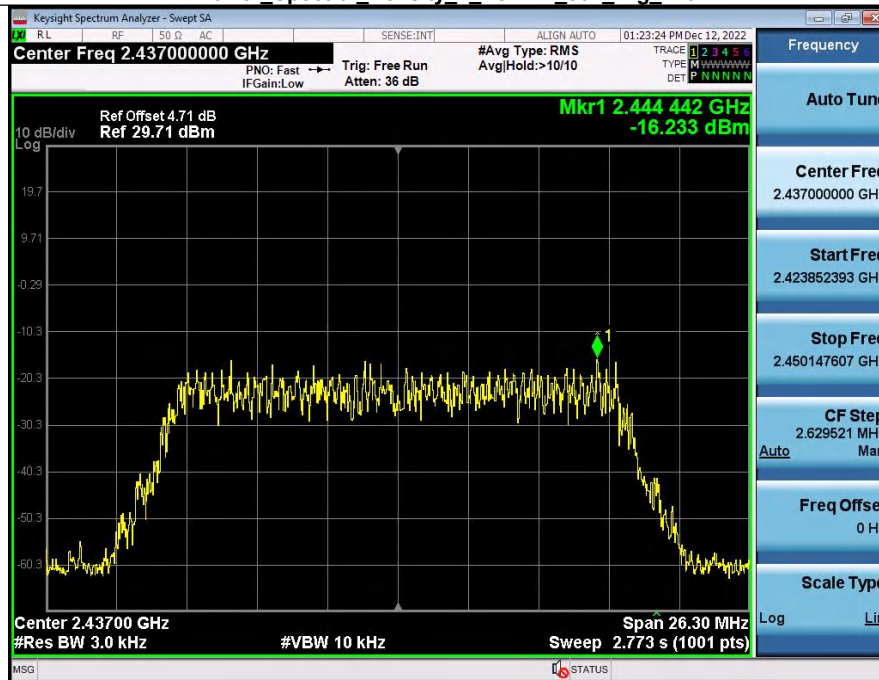


Power Spectral Density 2 4GWiFi 802_11g_2462

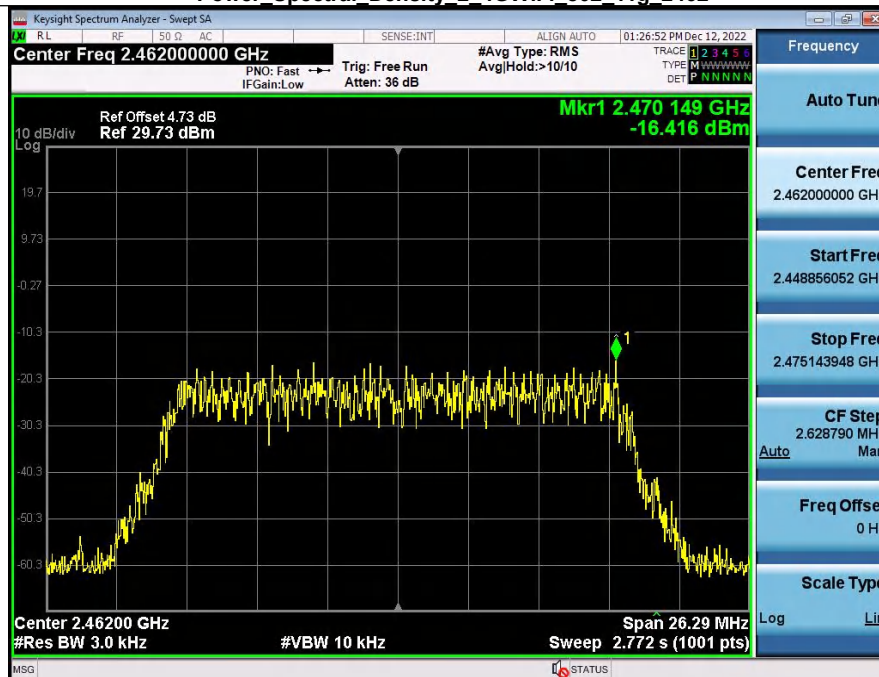


Power Spectral Density 2 4GWiFi 802_11n(HT20) 2412

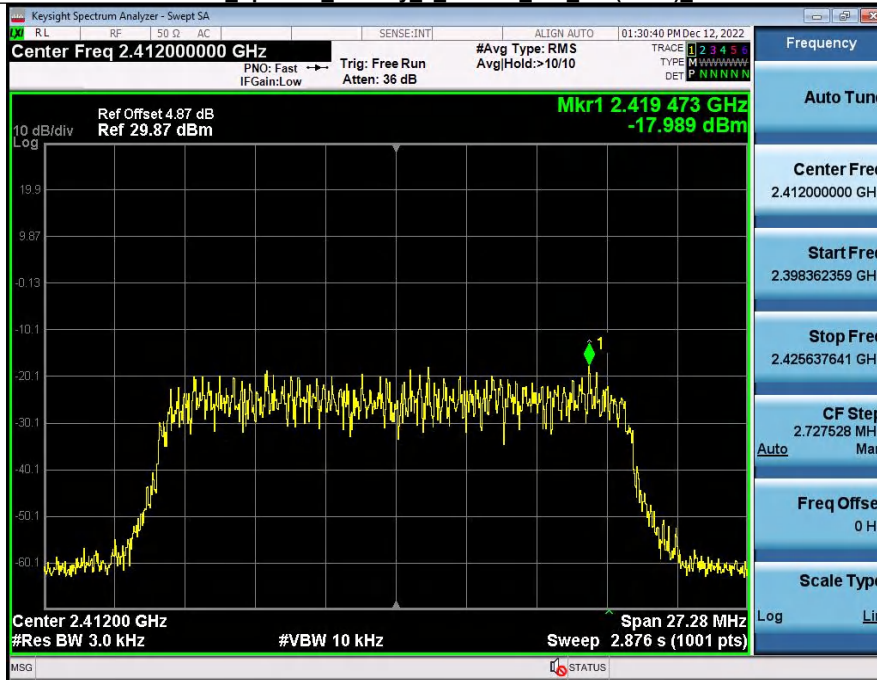


Power Spectral Density 2 4GWiFi 802_11n(HT20) 2437


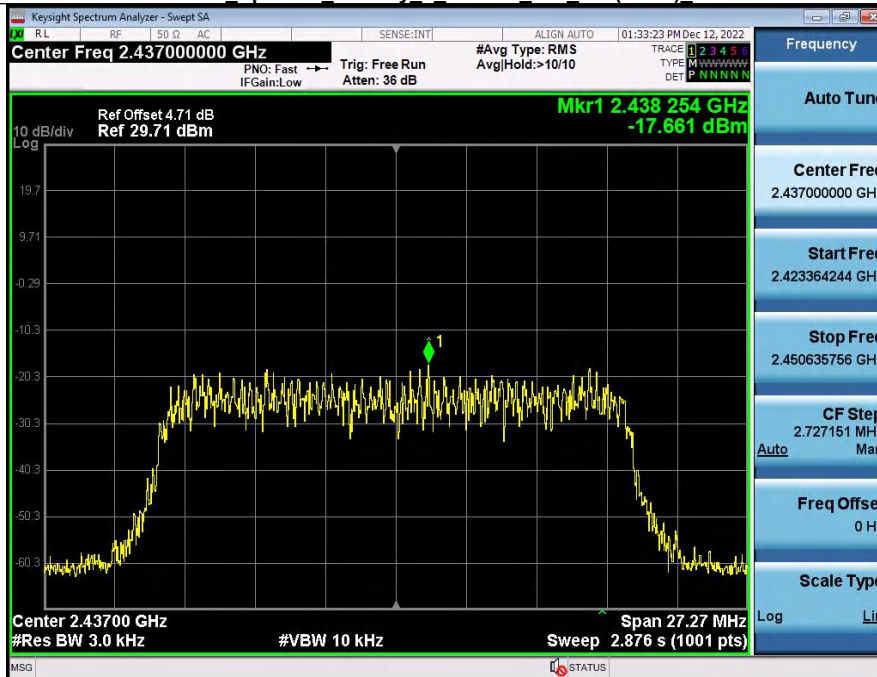


Power Spectral Density 2 4GWiFi 802_11n(HT20) 2462

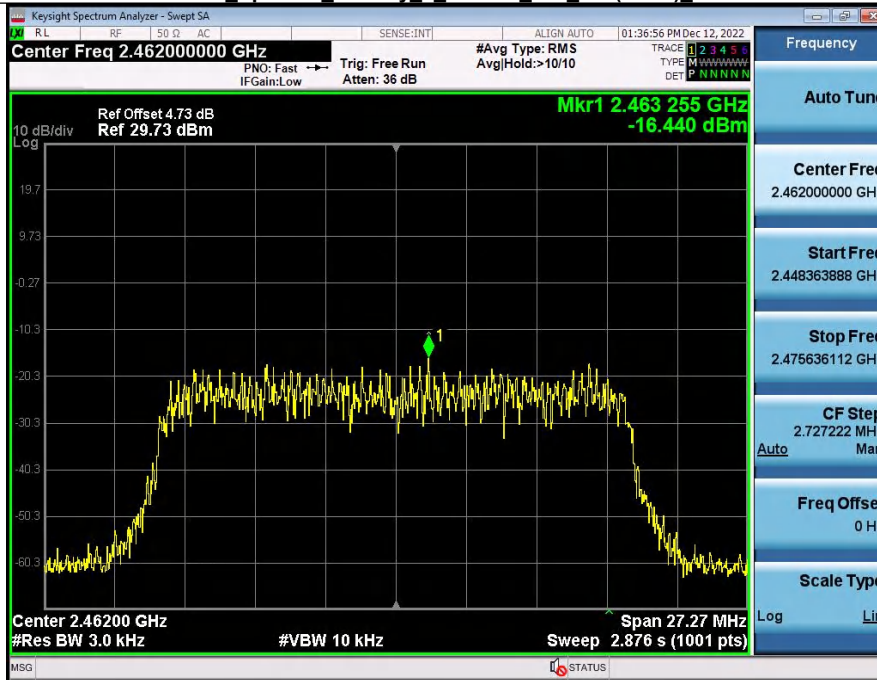

Power Spectral Density 2 4GWiFi 802_11n(HT40) 2422

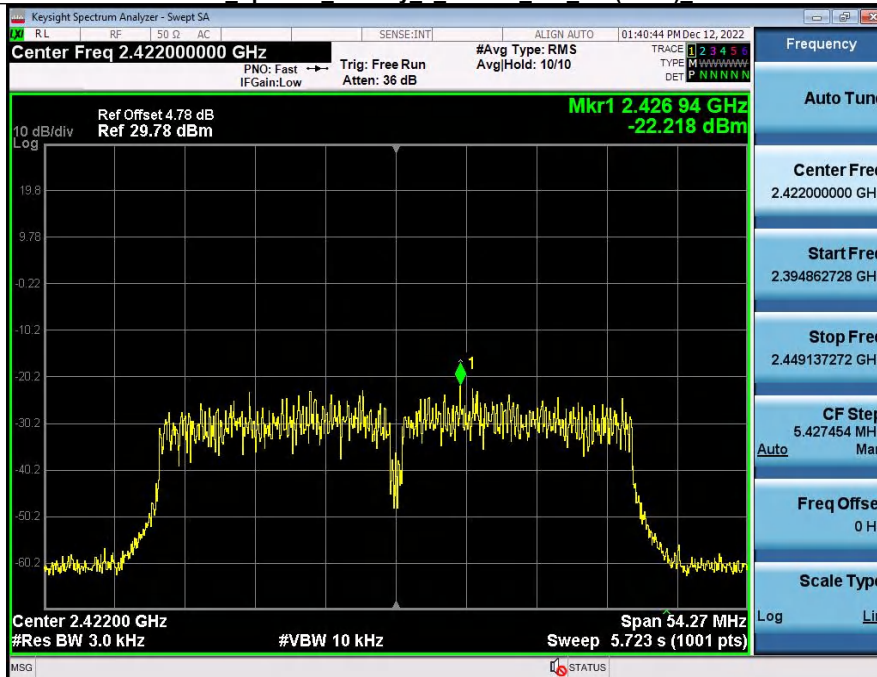


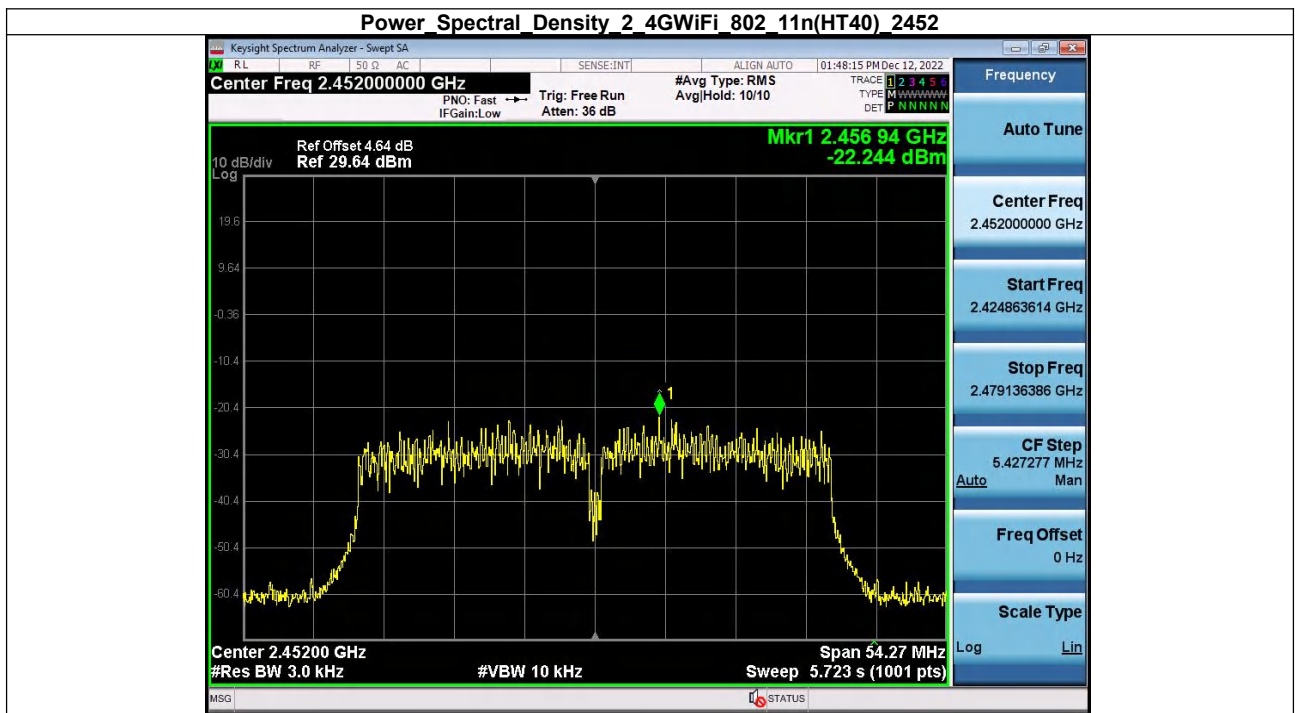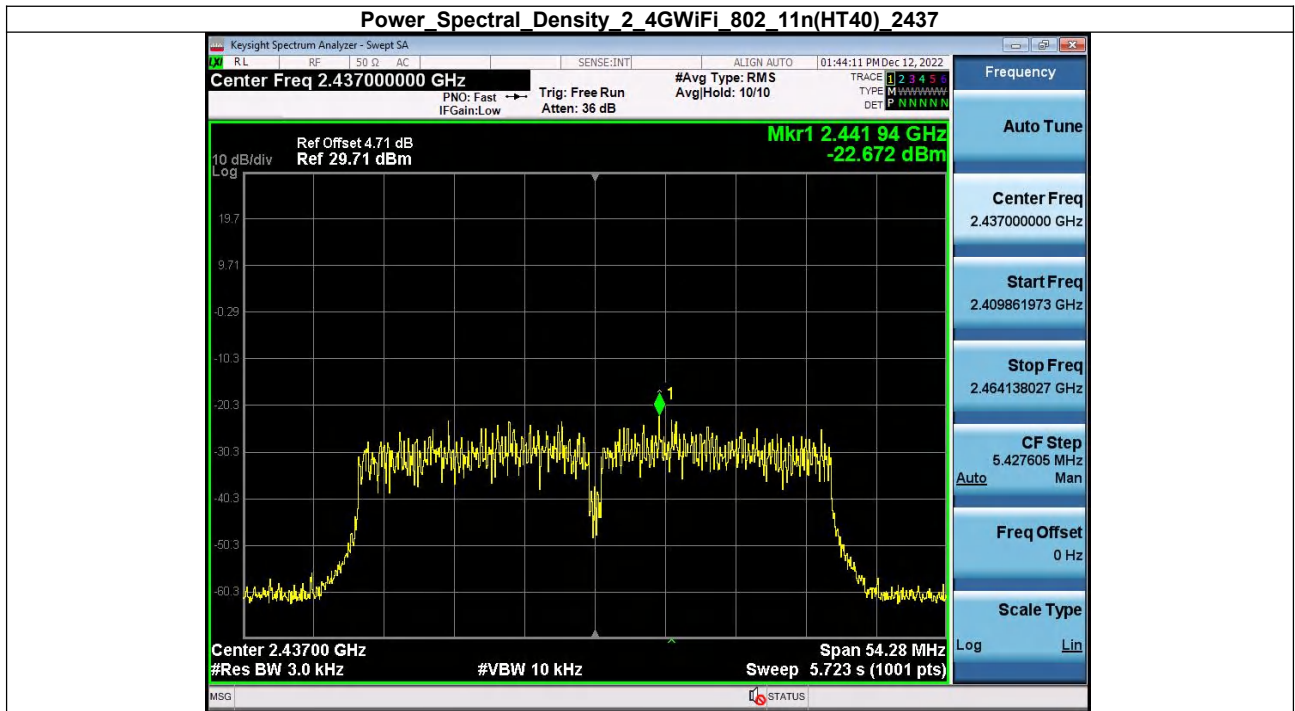


11.5. SPURIOUS EMISSION

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	24950.06	-34.31	-19.07	Pass
NVNT	ANT1	802.11b	2437.00	24980.02	-30.62	-18.66	Pass
NVNT	ANT1	802.11b	2462.00	24990.01	-30.61	-17.98	Pass
NVNT	ANT1	802.11g	2412.00	24503.10	-33.94	-19.44	Pass
NVNT	ANT1	802.11g	2437.00	24535.56	-30.19	-20.20	Pass
NVNT	ANT1	802.11g	2462.00	24942.57	-33.88	-19.01	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	24907.61	-34.04	-20.63	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	24950.06	-30.40	-20.52	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	24550.54	-33.59	-19.94	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	23993.71	-34.36	-24.94	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	24917.60	-29.27	-25.09	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	24573.01	-34.44	-24.82	Pass


1 Reference Level 2 4GWiFi 802 11b 2412

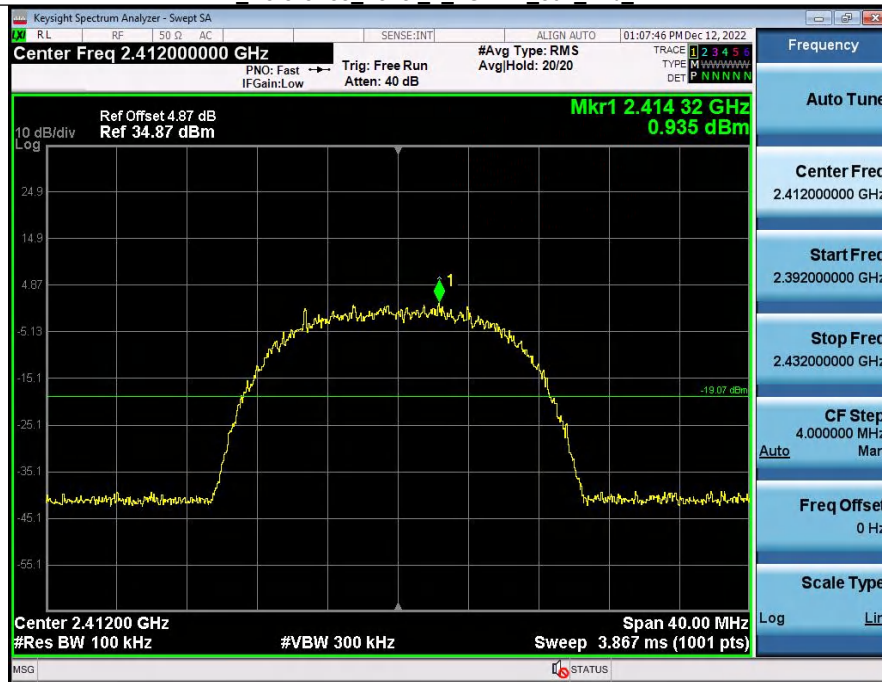


2 Spurious Emission 2 4GWiFi NVNT_ANT1 802 11b 2412

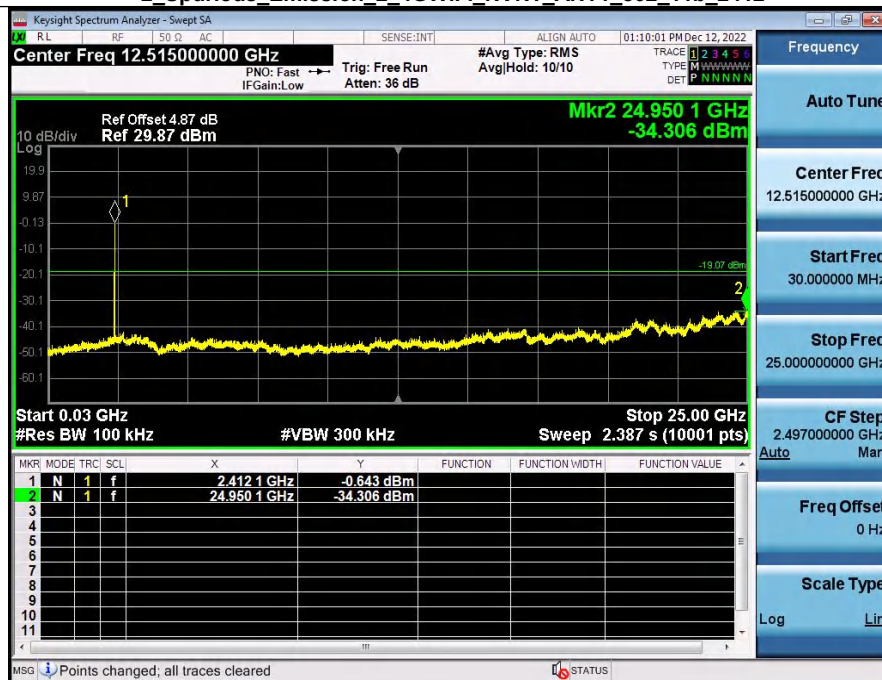


1 Reference Level 2_4GWiFi 802_11b_2437

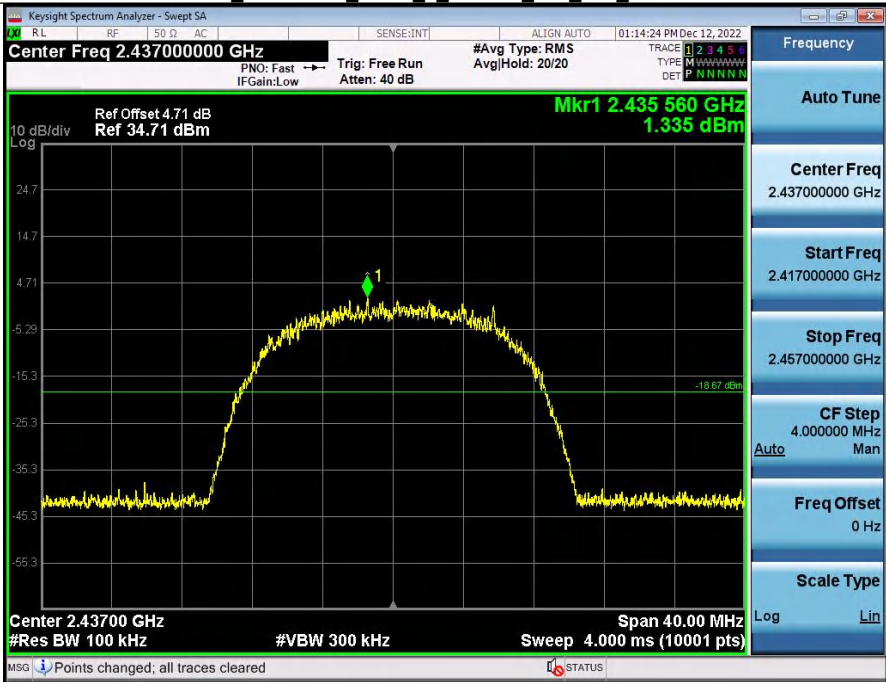


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11b_2437

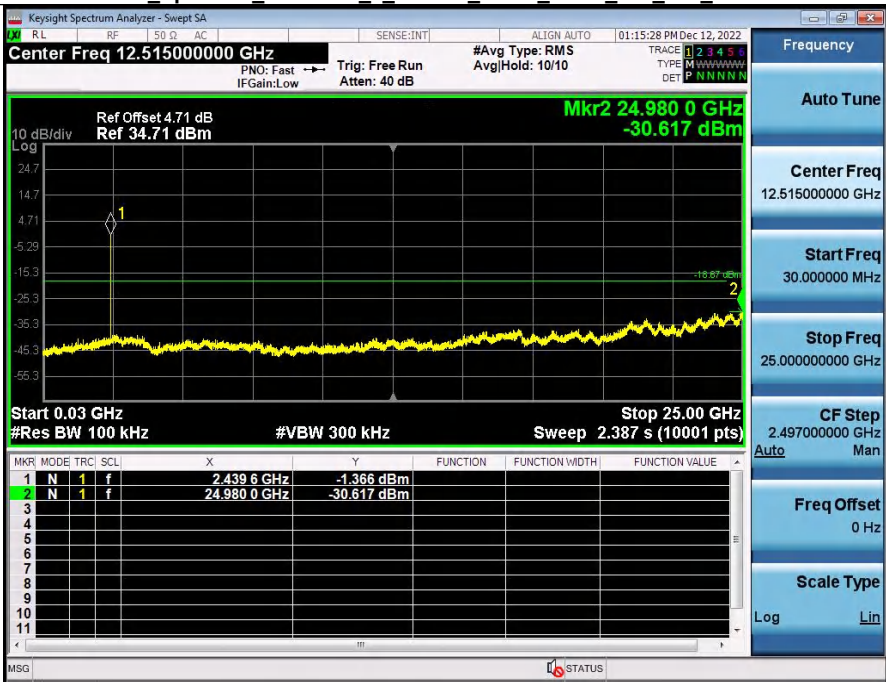


1 Reference Level 2_4GWiFi 802_11g_2412

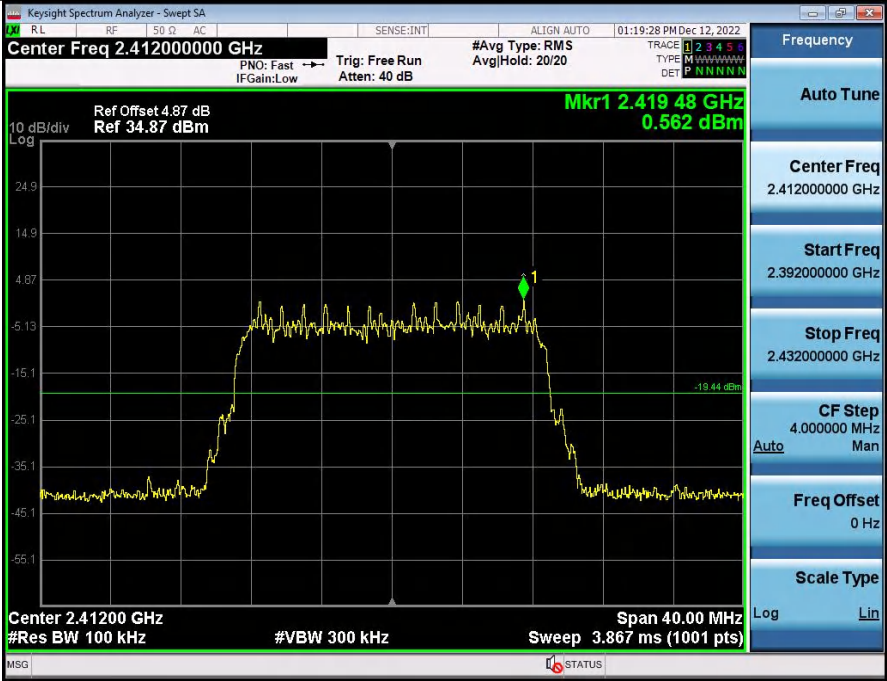


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11g_2412

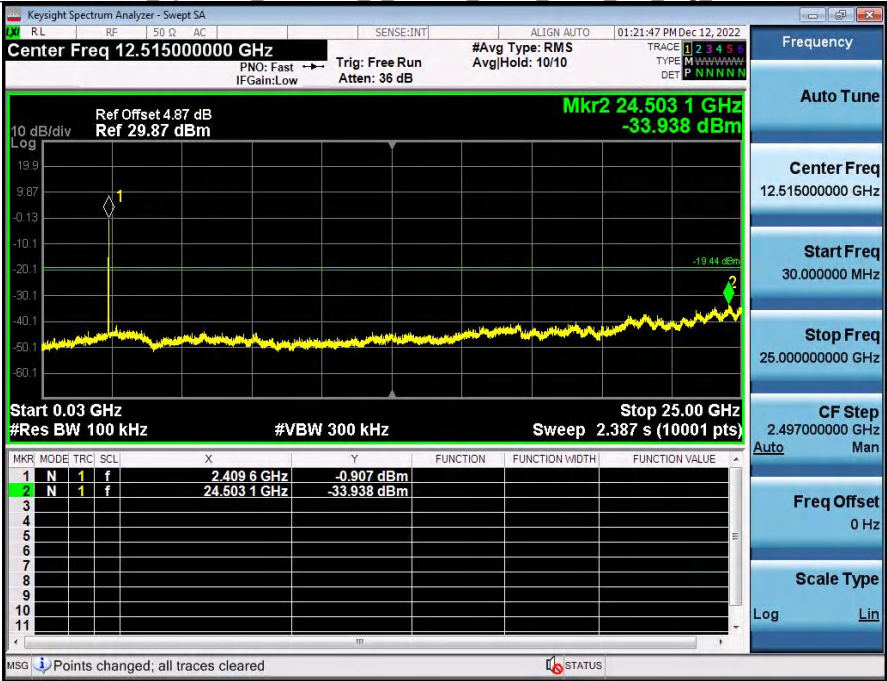


1 Reference Level 2_4GWiFi 802_11g_2437

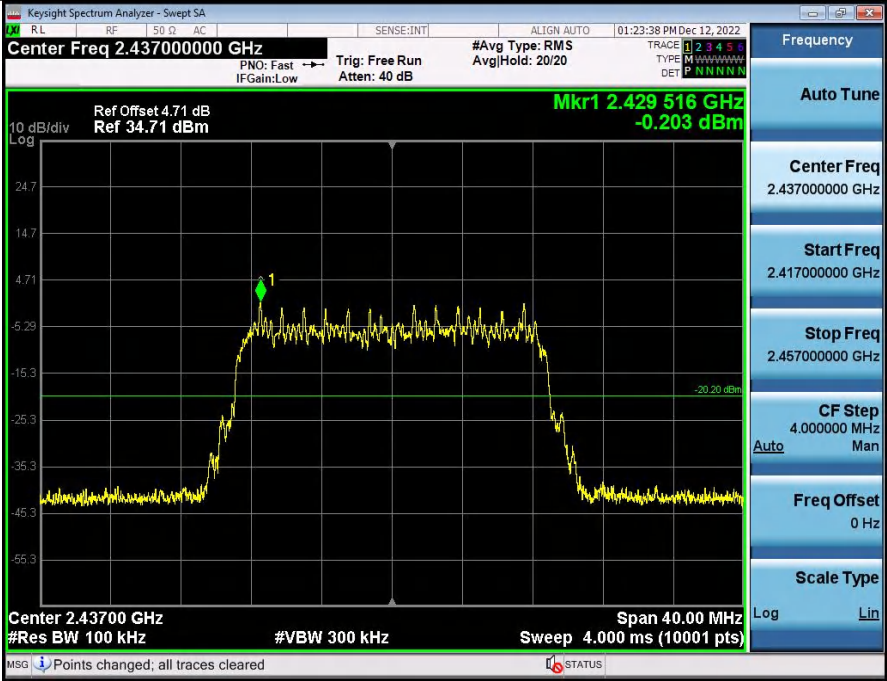


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11g_2437

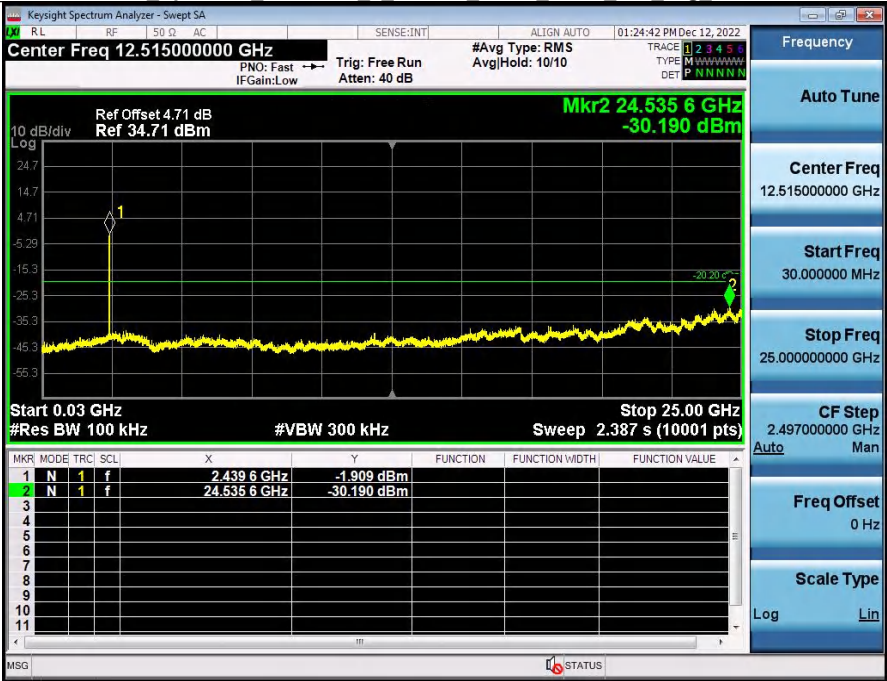

1 Reference Level 2 4GWiFi 802 11g 2462

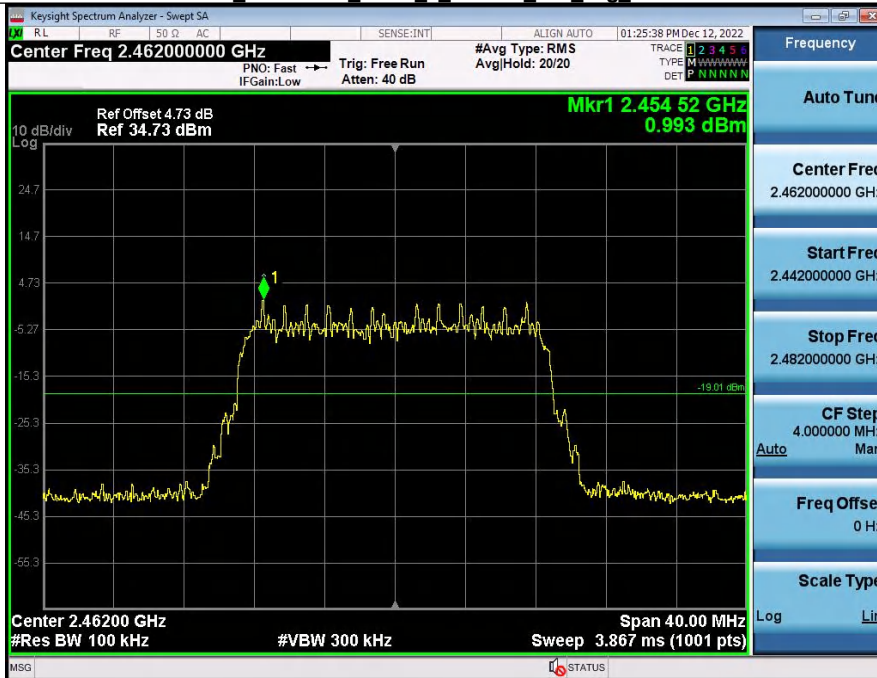

2_Spurious_Emission_2_4WiFi_NVNT_ANT1_802_11g_2462

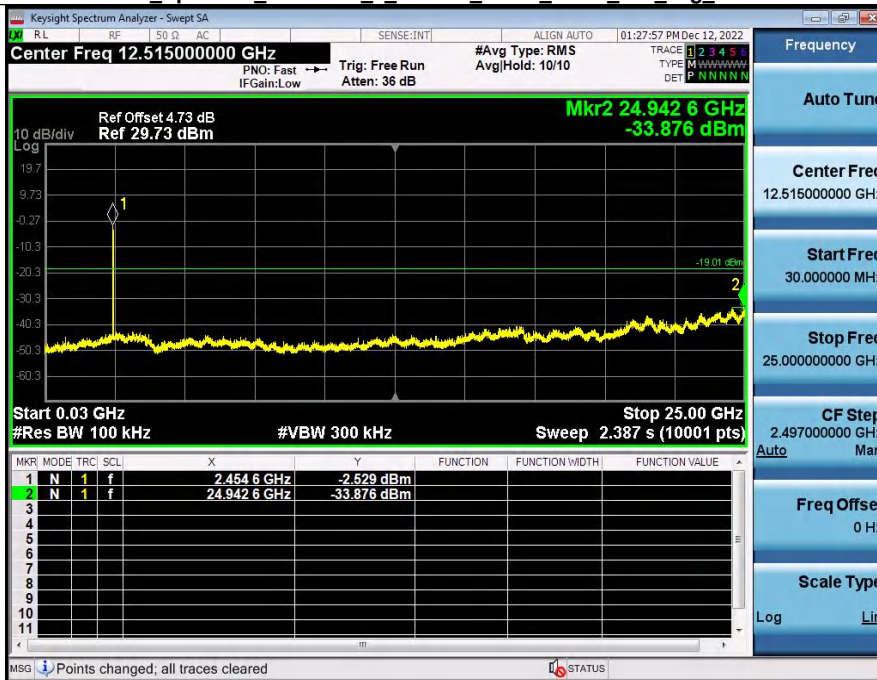

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.412000000 GHz

Span 40.00 MHz

Res BW 100 kHz

#VBW 300 kHz

Sweep 3.867 ms (1001 pts)

Ref Offset 4.87 dB

Ref 34.87 dBm

Mkr1 2.404 48 GHz

-0.626 dBm

Log

Frequency

Auto Tune

Center Freq

2.412000000 GHz

Start Freq

2.392000000 GHz

Stop Freq

2.432000000 GHz

CF Step

4.000000 MHz

Auto

Freq Offset

0 Hz

Scale Type

Log

Keysight Spectrum Analyzer - Sweep SA

RL RF 50 Ω AC SENSE:INT ALIGN: AUTO 01:31:45 PM Dec 12, 2022

Center Freq 12.515000000 GHz #Avg Type: RMS Avg/Hold: 10/10

PNO: Fast IFGain:Low Trig: Free Run Atten: 36 dB

TRACE 1 2 3 4 5 6
TYPE Noise Floor
DET P NNNNN

Ref Offset 4.87 dB
Ref 29.87 dBm

Mkr2 24.907 6 GHz
-34.040 dBm

10 dB/div
Log

Start 0.03 GHz
#Res BW 100 kHz

Stop 25.00 GHz
Sweep 2.387 s (10001 pts)

#VBW 300 kHz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.417 1 GHz	-3.158 dBm			
2	N	1	f	24.907 6 GHz	-34.040 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

Auto

CF Stop 2.497000000 GHz

Frequency

Auto Tune

Center Freq 12.515000000 GHz

Start Freq 30.000000 MHz

Stop Freq 25.000000000 GHz

CF Stop 2.497000000 GHz


Frequency Offset 0 Hz

Scale Type Log


Points changed; all traces cleared

STATUS

1 Reference Level 2_4GWiFi_802_11n(HT20)_2437

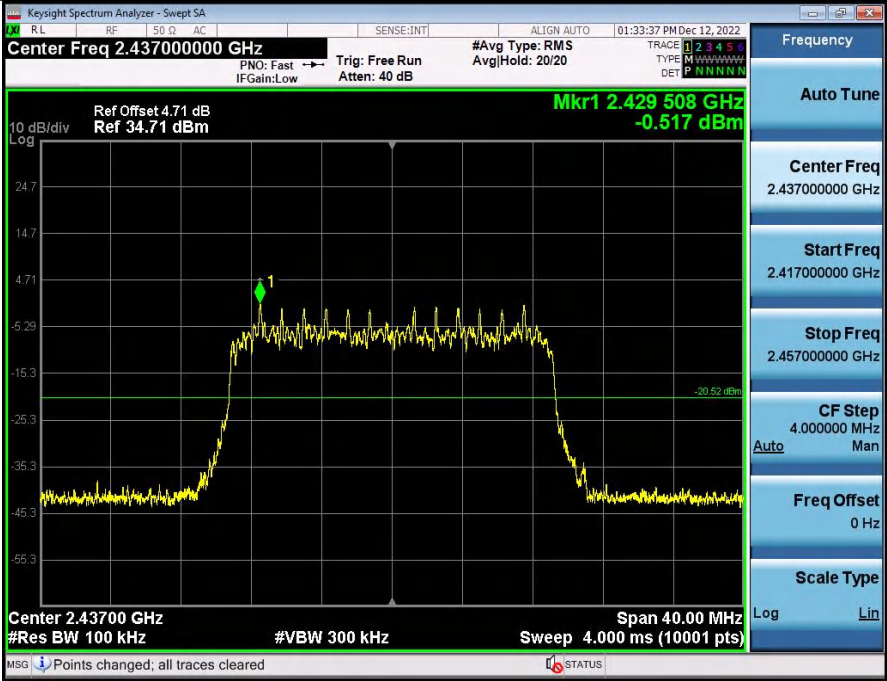

2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT20)_2437

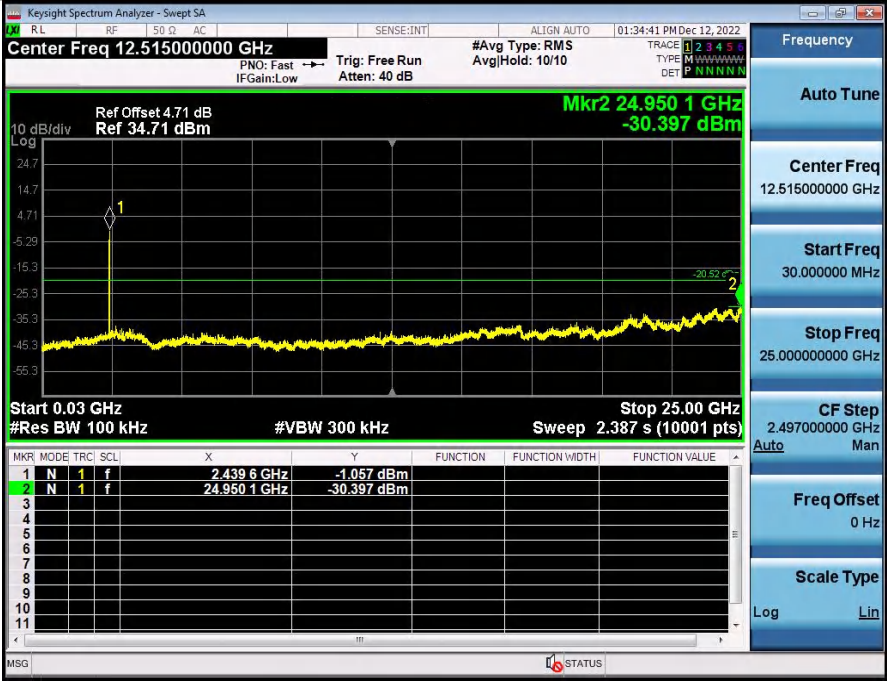

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:INT ALIGN: AUTO 01:35:41 PM Dec 12, 2022

Center Freq 2.46200000 GHz #Avg Type: RMS
 PNO: Fast Trg: Free Run Avg|Hold: 20/20
 IFGain:Low Atten: 40 dB

TRACE 1 2 3 4 5 6
 TYPE Max Hold
 DET P NNNNN

Ref Offset 4.73 dB
 Ref 34.73 dBm

Mkr1 2.454 48 GHz
0.058 dBm

10 dB/div
 Log

Center 2.46200 GHz
 #Res BW 100 kHz
 #VBW 300 kHz
 Span 40.00 MHz
 Sweep 3.867 ms (1001 pts)

Frequency
 Auto Tune
 Center Freq
 2.46200000 GHz
 Start Freq
 2.44200000 GHz
 Stop Freq
 2.48200000 GHz
 CF Step
 4.000000 MHz
 Auto
 Freq Offset
 0 Hz
 Scale Type

Keysight Spectrum Analyzer - Sweep SA

RL RF 50 Ω AC SENSE:INT ALIGN: AUTO 01:38:01 PM Dec 12, 2022

Center Freq 12.515000000 GHz #Avg Type: RMS Avg/Hold: 10/10

PNO: Fast IFGain:Low Trig: Free Run Atten: 36 dB

TRACE 1 2 3 4 5 6 TYPE Noise Floor DET P NNNNN

Ref Offset 4.73 dB Ref 29.73 dBm

Mkr2 24.550 5 GHz -33.592 dBm

10 dB/div Log

19.7
9.73
-0.27
-10.3
-20.3
-30.3
-40.3
-50.3
-60.3

-19.94 dBm

Start 0.03 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.387 s (10001 pts) Stop 25.00 GHz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	24.67 1 GHz	-1.530 dBm			
2	N	1	f	24.550 5 GHz	-33.592 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG Points changed; all traces cleared

STATUS

Frequency

Auto Tune

Center Freq
12.51500000 GHz

Start Freq
30.000000 MHz

Stop Freq
25.00000000 GHz

CF Step
2.497000000 GHz

Auto


Mar

Freq Offset
0 Hz


Scale Type
Log

Lin


1 Reference Level 2_4GWiFi_802_11n(HT40)_2437

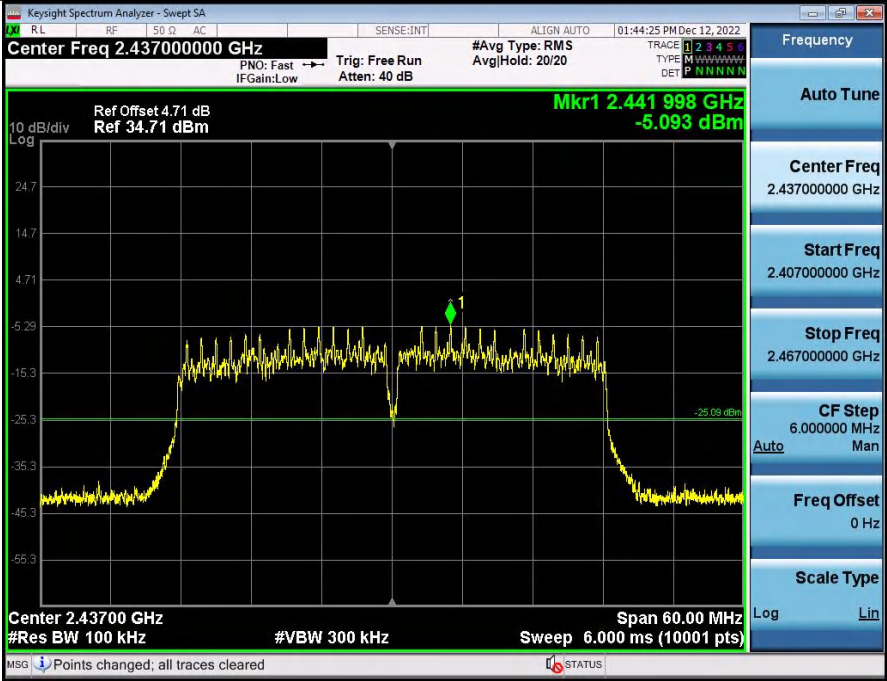


2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2437

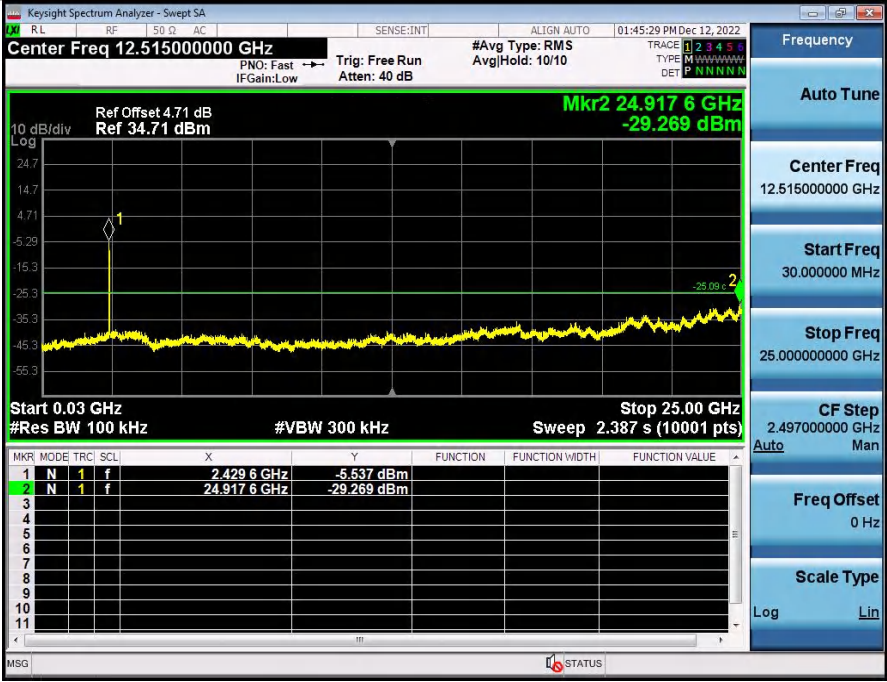

1 Reference Level 2_4GWiFi_802_11n(HT40)_2452

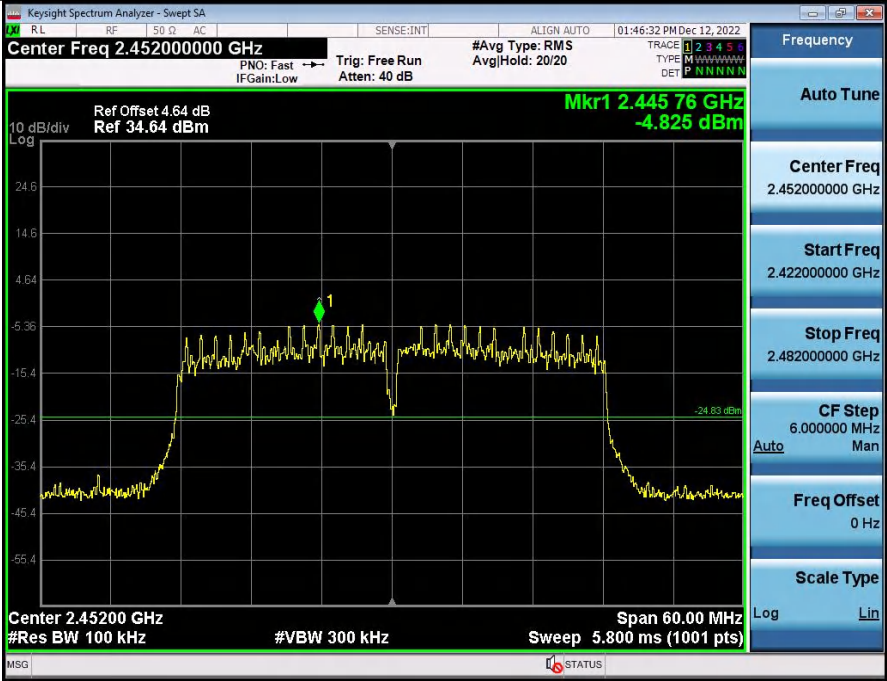

2 Spurious Emission 2_4GWiFi_NVNT_ANT1_802_11n(HT40)_2452

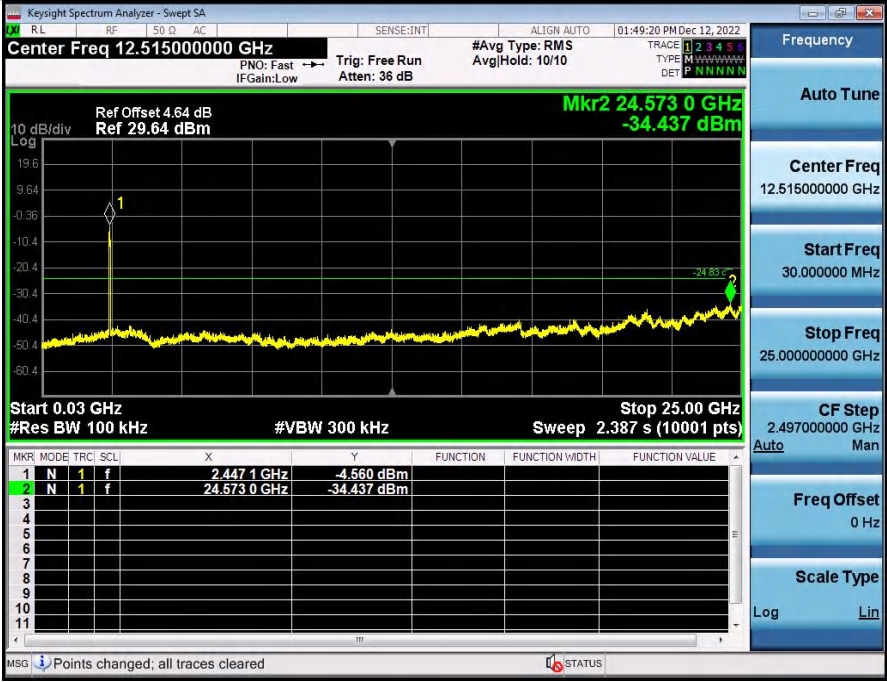

12. TEST SETUP PHOTO

Reference to the Test setup file for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the external photos file and internal photos file for details.

******* END OF REPORT *******