

	<p align="center">HP-2080M-R 天线</p>	 
<p>Date of Issue: 2023-06-13</p>		<p align="center">ESD Sensitive</p>
<p>Page (1) of (10)</p>	<p align="center">iTD Drawing # 20230613</p>	<p align="center">Revision #: Initial Release</p>

Source Control Drawing

Part Description:	Bluetooth TWS headset
客户料号:	
客户规格描述:	
iTD Part Number:	HP-2080M R 天线
iTD Software version	
iTD Hardware version	HP-2080M -R-V4.0

Customer Approval

(Please return this copy as a certification of your approval)

Approved by:	
Approval Date:	
Company Seal:	

PROPRIETARY NOTICE

These documents, and the contained information herein, are proprietary and are not to be reproduced, used or disclosed to others for manufacture or for any other purpose, except as specifically authorized, in writing, by iTD Corporation.

iTD Contact Information:

Eric Lin 林先生

Mb: 15060807099





Email: ljw@itdtek.com

Add:605, Building 2, Gaoxin Industrial ParkPhase II,
Longchang Road, Xin 'anStreet, Bao 'an District,
Shenzhen






Number	Effective date	Change record
V4.0	2023-6-13	Initial release

编制	工程	审核

	<p>HP-2080M-R 天线</p>	 
<p>Date of Issue: 2023-06-13</p>		 <p>ESD Sensitive</p>
<p>Page (3) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>

一、The basic parameters:

A. Electrical Characteristics	
Frequency	2400MHZ~2500MHZ
VSWR	< 3
Avg Efficiency	>15%
Impedance	50 ± 25 Ohm
Polarization	Linear
Peak Gain	2.4G:-1.04dBi
B. Material & Mechanical Characteristics	
Material of Radiator	FPC black
Cable Type	/
Connector Type	/
Dimension	/
C. Environmental	
Operation Temperature	- 20 °C ~ + 60 °C
Storage Temperature	- 30 °C ~ + 70 °C

	<p>HP-2080M-R 天线</p>	 <p>RoHS Compliant</p>
<p>Date of Issue: 2023-06-13</p>		 <p>ESD Sensitive</p>
<p>Page (4) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>

二、Electrical Specification :

Those specifications were specially defined for 顶设 HP-2080M model.


三、VSWR





1 Measuring Method

1.A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR

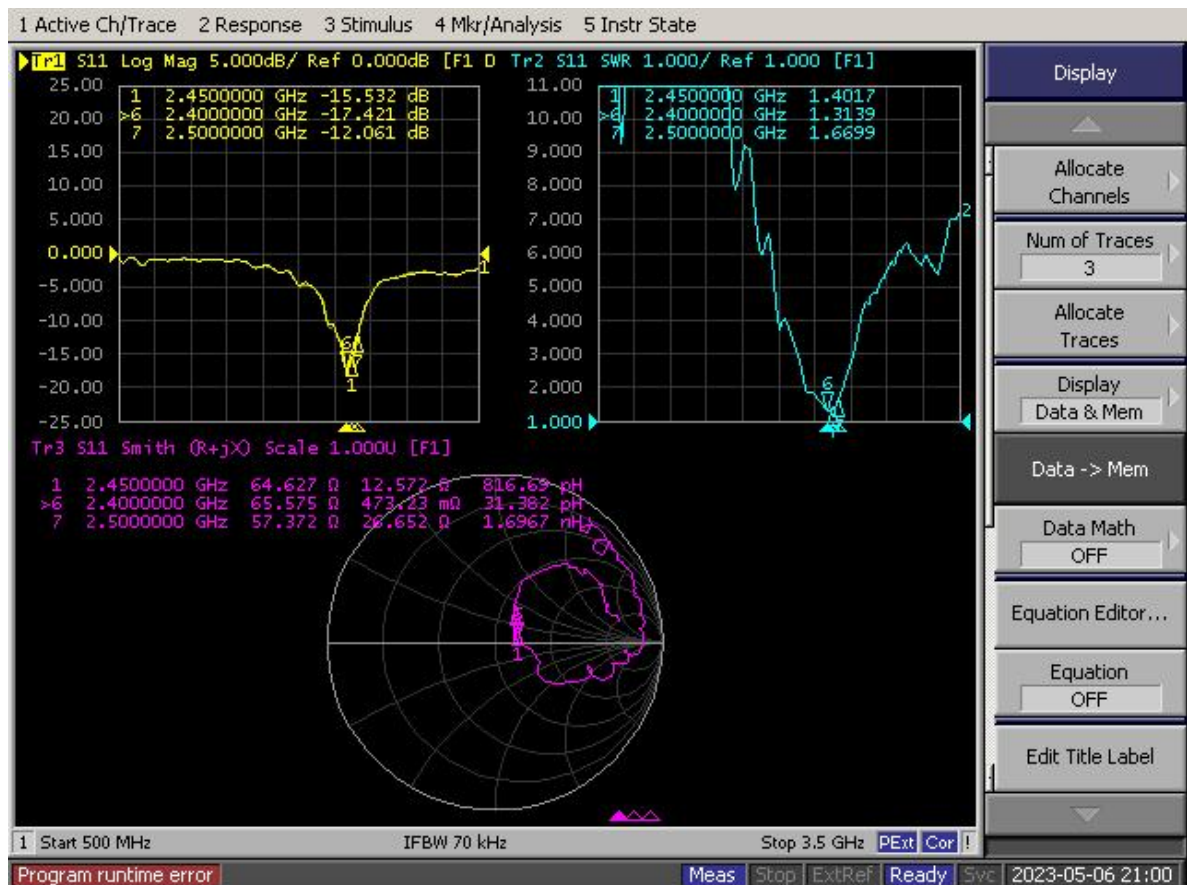2.Keeping this jig away from metal at least 20cm

2 Measurement frequency points and VSWR value



	<p>HP-2080M-R 天线</p>	 
<p>Date of Issue: 2023-06-13</p>		 <p>ESD Sensitive</p>
<p>Page (5) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>

四、 Anechoic chamber


Introduction:




Microwave darkroom and no reflection chamber, absorbing short wave darkroom dark room. Microwave darkroom by electromagnetic shielding room, filtering and isolation, grounding device, the ventilation duct, indoor distribution system, monitoring system, ceiling wave material part. It is based on the wave absorbing material as the lining of the shield room, it can absorb the most of the electromagnetic energy into the six wall is a better simulation of the free space conditions.

The main working principle of microwave anechoic chamber is according to the electromagnetic wave in the medium from the low magnetic guide magnetic direction of propagation rules, absorbing materials to guide the electromagnetic wave using high permeability, through resonance, a substantial absorption of electromagnetic wave radiation energy, by coupling the electromagnetic energy into heat energy.

main performance :

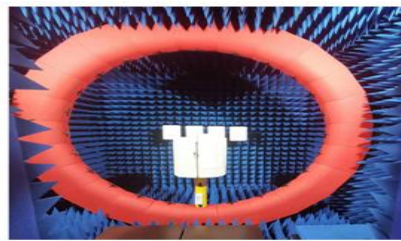
Frequency range:400MHz ~ 6GHz ceiling reflected wave loss materials: 400MHz ~ 6GHz is equal to or more than 15dB (microwave absorbing material by composite wave absorbing materials, namely tapered containing carbon sponge suction wave material paste in ferrite)



	<p align="center">HP-2080M-R 天线</p>	 <p align="right">RoHS Compliant</p>
<p>Date of Issue: 2023-06-13</p>		 <p align="right">ESD Sensitive</p>
<p>Page (6) of (10)</p>	<p align="center">iT D Drawing # 20230613</p>	<p align="right">Revision #: Initial Release</p>



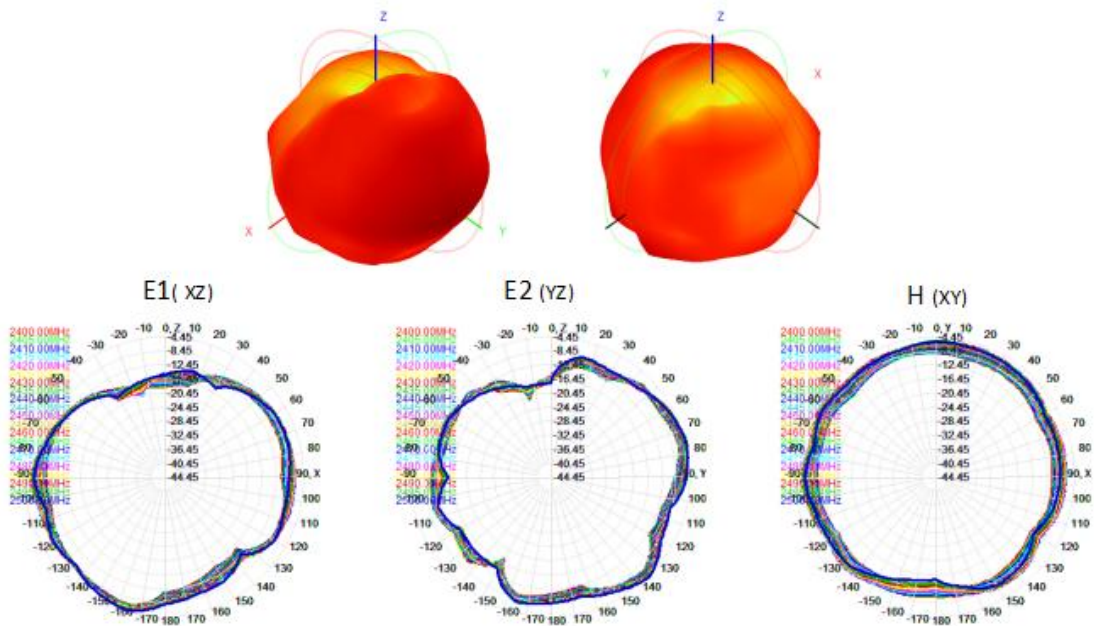


五、Gain table of Antenna

无源场型图-R






无源效率增益

R		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	17.34	-1.79
2410	17.76	-1.80
2420	18.93	-1.77
2430	19.04	-1.75
2440	19.77	-1.48
2450	19.34	-1.33
2460	18.97	-1.13
2470	18.46	-1.88
2480	17.49	-1.70
2490	17.27	-1.52
2500	17.05	-1.45

	<p>HP-2080M-R 天线</p>	 
<p>Date of Issue: 2023-06-13</p>		 
<p>Page (7) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>




OTA 有源

自由空间			二代头模	
BAND	R		R	
	TRP (dBm)	TIS (dBm)	TRP (dBm)	TIS (dBm)
0	1.83	-86.24	1.59	-86.18
39	0.55	-84.21	-0.41	-83.84
78	1.22	-86.29	-0.88	-84.21


	<p>HP-2080M-R 天线</p>	 <p>RoHS Compliant</p>
<p>Date of Issue: 2023-06-13</p>		 <p>ESD Sensitive</p>
<p>Page (8) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>






六、AntennaDimensions

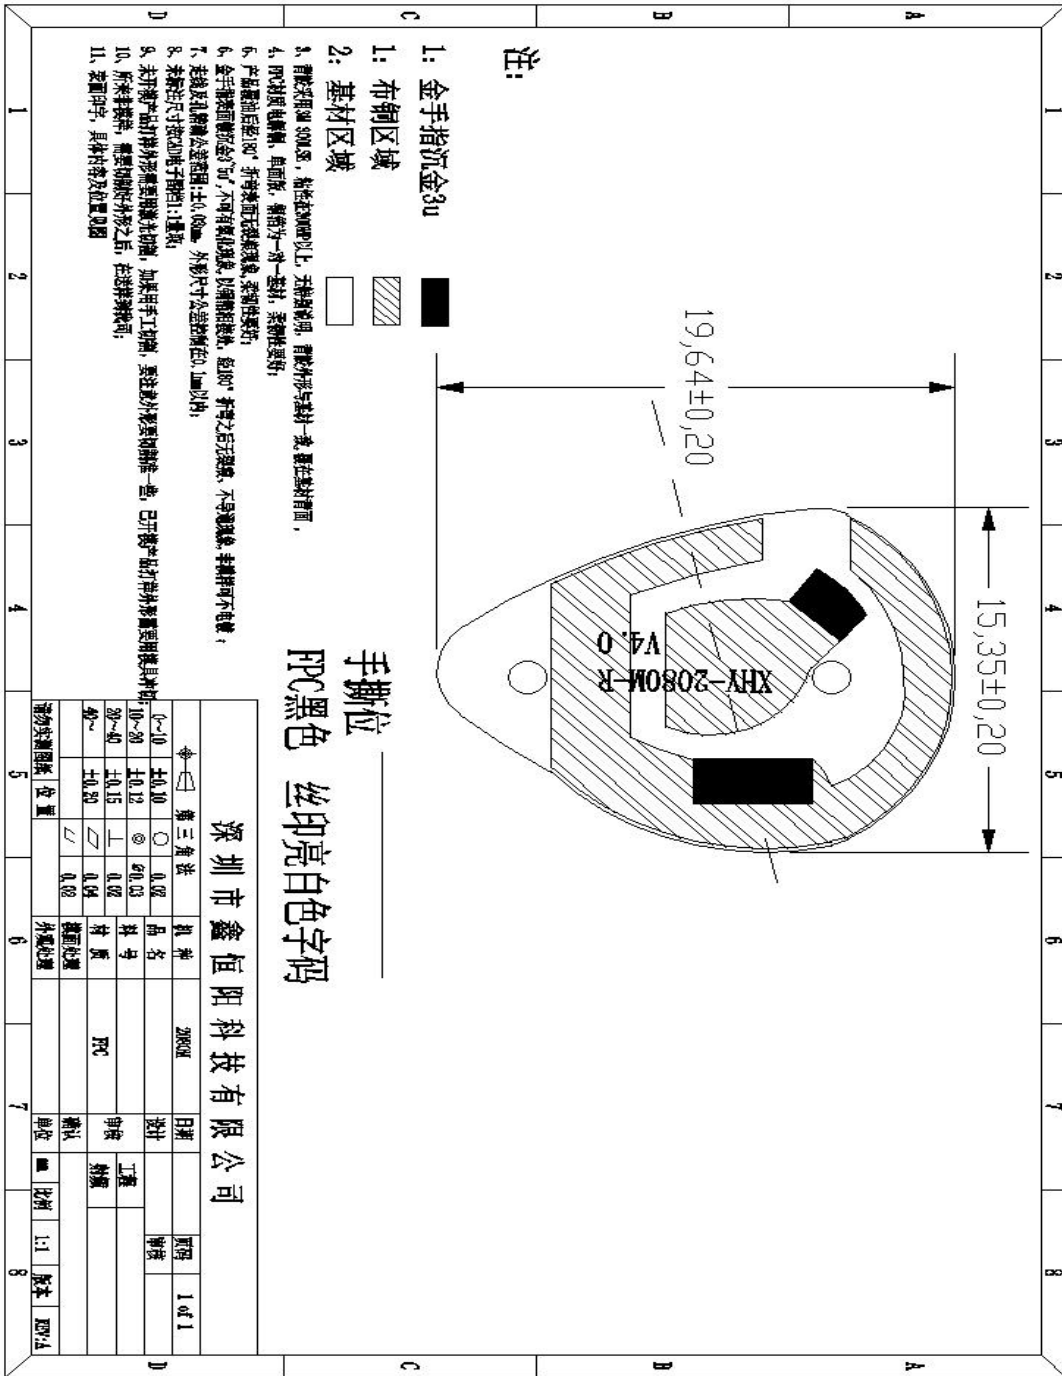

	<p>HP-2080M-R 天线</p>	 <p>RoHS Compliant</p>
<p>Date of Issue: 2023-06-13</p>		 <p>ESD Sensitive</p>
<p>Page (9) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>

七、AntennaDimensions



	<p>HP-2080M-R 天线</p>	 
<p>Date of Issue: 2023-06-13</p>		 
<p>Page (10) of (10)</p>	<p>iTD Drawing # 20230613</p>	<p>Revision #: Initial Release</p>

八、ROHS:

Antenna EJ. 02-0251. HP-2080M meets RoHS requirements.

九、 Product packaging instructions:

A. packing should meet the moistureproof, vibration, pressure and mildew proof, etc.

B. the smallest packing unit logo must have the manufacturer trademarks, product model, name, code and quantity.

C. in the attached packing list, certificate of approval, and the factory inspection report.

*****END*****