



# TEST REPORT

**APPLICANT** : Nanjing Juplink Intelligent Technologies Co., Ltd.

**PRODUCT NAME** : Dual-band Gigabit Wi-Fi extender

**MODEL NAME** : EC3-750

**BRAND NAME** : JupLink

**FCC ID** : 2AT9Z-EC3-750

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2020-06-18

**TEST DATE** : 2020-06-18 to 2020-07-03

**ISSUE DATE** : 2020-07-23

Edited by : Bowers Zeng  
Bowers Zeng(Test engineer)

Review by: Elvis  
Elvis Wang(Auditor)

Approved by: Anne Liu  
Anne Liu ( Supervisor )

**NOTE:** 1.The report is invalid when there is no the approver signature and the special stamp for test report. 2.The test report shall not be reproduced except in full without prior written permission of the company. 3.The report copy is invalid when there is no the special stamp for test repor. 4.The altered report is invalid. 5.The entrust test is responsibility for the received sample only.



# DIRECTORY

- 1. Technical Information.....3**
- 1.1. Applicant and Manufacturer Information.....3**
- 1.2. Equipment Under Test (EUT) Description..... 3**
- 1.3. Modulation Type and Data Rate of EUT..... 4**
- 1.4. Test Standards and Results..... 5**
- 1.5. Environmental Conditions..... 5**
- 2. 47 CFR Part 15C Requirements..... 6**
- 2.1. Antenna requirement.....6**
- 2.2. Output Power.....7**
- 2.3. Bandwidth..... 10**
- 2.4. Conducted Spurious Emissions and Band Edge..... 19**
- 2.5. Power spectral density (PSD)..... 30**
- 2.6. Restricted Frequency Bands..... 46**
- 2.7. Conducted Emission..... 64**
- 2.8. Radiated Emission..... 68**
- Annex A Test Uncertainty..... 145**
- Annex B Testing Laboratory Information..... 146**

Change History		
Version	Date	Reason for change
1.0	2020-07-23	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Nanjing Juplink Intelligent Technologies Co., Ltd.
<b>Applicant Address:</b>	No. 757, Dixiu Road, Binjiang Economic Development Zone, Jiangning District, Nanjing
<b>Manufacturer:</b>	Sichuan Tianyi Comheart Telecom Co., Ltd.
<b>Manufacturer Address:</b>	No. 198, Section 1, Xueshan Avenue, Dayi County, Chengdu, Sichuan, China

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Dual-band Gigabit Wi-Fi extender
<b>Serial No:</b>	(N/A, marked #1 by test site)
<b>Hardware Version:</b>	V1.0.1
<b>Software Version:</b>	V1.0.0
<b>Modulation Type:</b>	DSSS, OFDM
<b>Operating Frequency Range:</b>	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
<b>Channel Number:</b>	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
<b>Antenna Type:</b>	Dipole Antenna
<b>Antenna Gain:</b>	Ant 2 dBi

**Note 1:** The EUT is operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 * (n - 1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 * (n - 1)$  ( $3 \leq n \leq 9$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

**Note 2:** During test, the duty cycle of the EUT was setting to 100%.

**Note 3:** The EUT has two antennas and supports a MIMO function.



Modulation Mode:	TX Function
802.11b	1TX
802.11g	1TX
802.11n20	2TX
802.11n40	2TX

**Note 4:** The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

**Note 5:** For conducted test item Maximum conducted output Power and Peak Power spectral density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result(Ant 0) in this report.

**Note 6:**All radiation test items for 802.11n modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT0) in this report.

**Note 7:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) <sup>Note1</sup>
DSSS (802.11b)	DBPSK	<b>1</b>
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	<b>6 / 9</b>
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n-20/40MHz)	BPSK	<b>6.5</b>
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

**Note1:** The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Output Power	Jun 22, 2020	Stefan Sun	<u>PASS</u>
3	15.247(a)	Bandwidth	Jun 22, 2020	Stefan Sun	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Jun 22, 2020	Stefan Sun	<u>PASS</u>
5	15.247(e)	Power spectral density (PSD)	Jun 22, 2020	Stefan Sun	<u>PASS</u>
6	15.247(d)	Restricted Frequency Bands	Jun 24, 2020 Jun 29, 2020	Yaming Luo	<u>PASS</u>
7	15.207	Conducted Emission	Jul 3, 2020	Yaming Luo	<u>PASS</u>
8	15.209, 15.247(d)	Radiated Emission	Jun 28, 2020	Yaming Luo	<u>PASS</u>

**Note:** The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013 and KDB558074 D01 v04.

## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

## 2.2. Output Power

### 2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.2.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### A. Test Setup:



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

#### B. Equipments List:

Please refer ANNEX B(4).

### 2.2.3. Test Result

#### Duty Cycle Factor

Mode	Channel	Frequency (MHz)	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty Cycle (%)	Duty Cycle Factor
802.11b	6	2437	100	100	100	0
802.11g	6	2437	100	100	100	0
802.11n-20MHz	6	2437	100	100	100	0
802.11n-40MHz	6	2437	100	100	100	0



**Output Average Power ANT0**

Mode	Channel	Frequency (MHz)	Output Average Power		Limit		Verdict
			dBm	W	dBm	W	
802.11 b	1	2412	16.52	0.045	30	1	PASS
	6	2437	17.00	0.050			PASS
	11	2462	17.14	0.052			PASS
802.11 g	1	2412	15.16	0.033			PASS
	6	2437	15.62	0.036			PASS
	11	2462	15.87	0.039			PASS
802.11 HT20	1	2412	15.49	0.035			PASS
	6	2437	15.85	0.038			PASS
	11	2462	16.09	0.041			PASS
802.11 HT40	3	2422	15.85	0.038			PASS
	6	2437	16.19	0.042			PASS
	9	2452	16.21	0.042			PASS

**Output Average Power ANT1**

Mode	Channel	Frequency (MHz)	Output Average Power		Limit		Verdict
			dBm	W	dBm	W	
802.11 b	1	2412	16.76	0.047	30	1	PASS
	6	2437	17.21	0.053			PASS
	11	2462	17.04	0.051			PASS
802.11 g	1	2412	15.95	0.039			PASS
	6	2437	16.25	0.042			PASS
	11	2462	16.23	0.042			PASS
802.11 HT20	1	2412	16.29	0.043			PASS
	6	2437	16.42	0.044			PASS
	11	2462	16.30	0.043			PASS
802.11 HT40	3	2422	16.36	0.043			PASS
	6	2437	16.43	0.044			PASS
	9	2452	16.10	0.041			PASS



**Total Average Power (ANT0+ANT1)**

Mode	Channel	Frequency (MHz)	Output Average Power		Limit		Verdict
			dBm	W	dBm	W	
802.11 HT20	1	2412	18.92	0.078			<b>PASS</b>
	6	2437	19.15	0.082			<b>PASS</b>
	11	2462	19.20	0.083			<b>PASS</b>
802.11 HT40	3	2422	19.12	0.082			<b>PASS</b>
	6	2437	19.32	0.086			<b>PASS</b>
	9	2452	19.17	0.083			<b>PASS</b>

**Note:** The duty cycle factor has been compensated into the test result

## 2.3. Bandwidth

### 2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2. Test Description

#### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

#### B. Equipments List:

Please refer ANNEX B(4).




2.3.3. Test Result

802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT0 6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	10.01	≥500	<b>PASS</b>
6	2437	9.50	≥500	<b>PASS</b>
11	2462	9.69	≥500	<b>PASS</b>


B. Test Plots

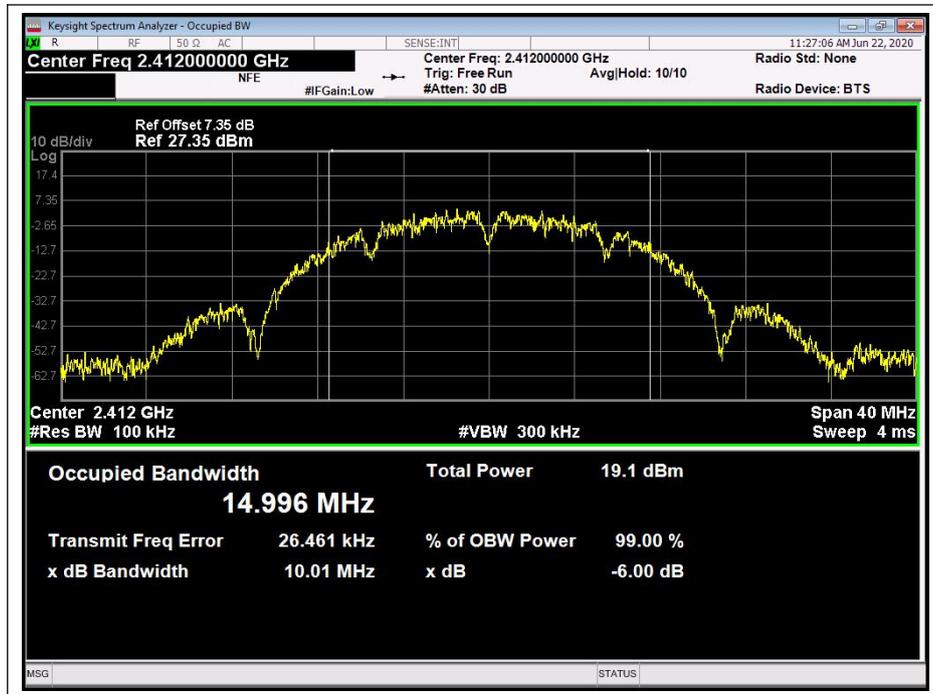

(Channel 1, 2412MHz, 802.11b)

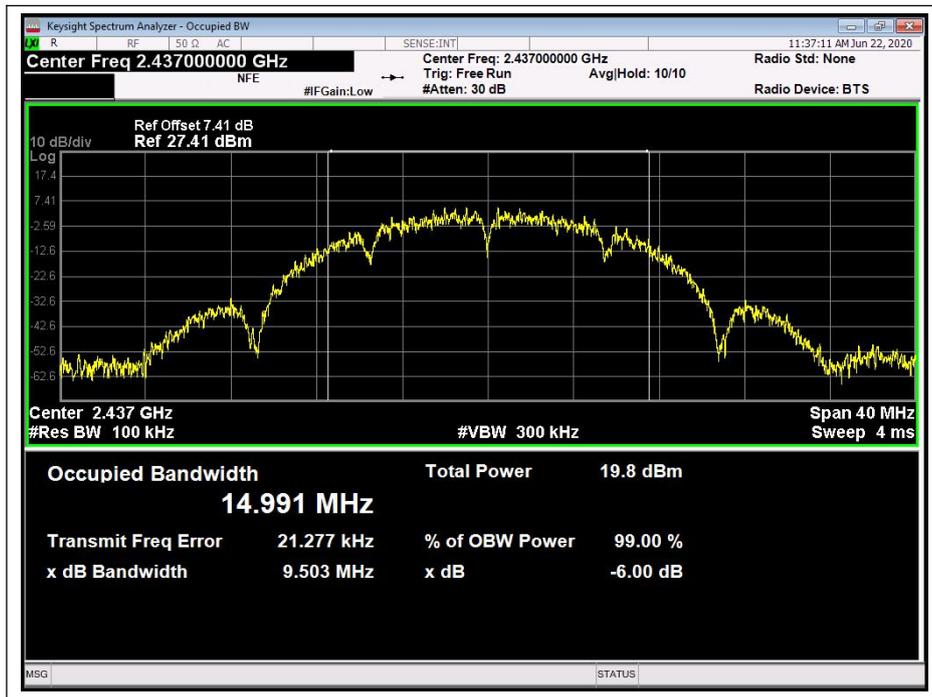

(Channel 6, 2437 MHz, 802.11b)

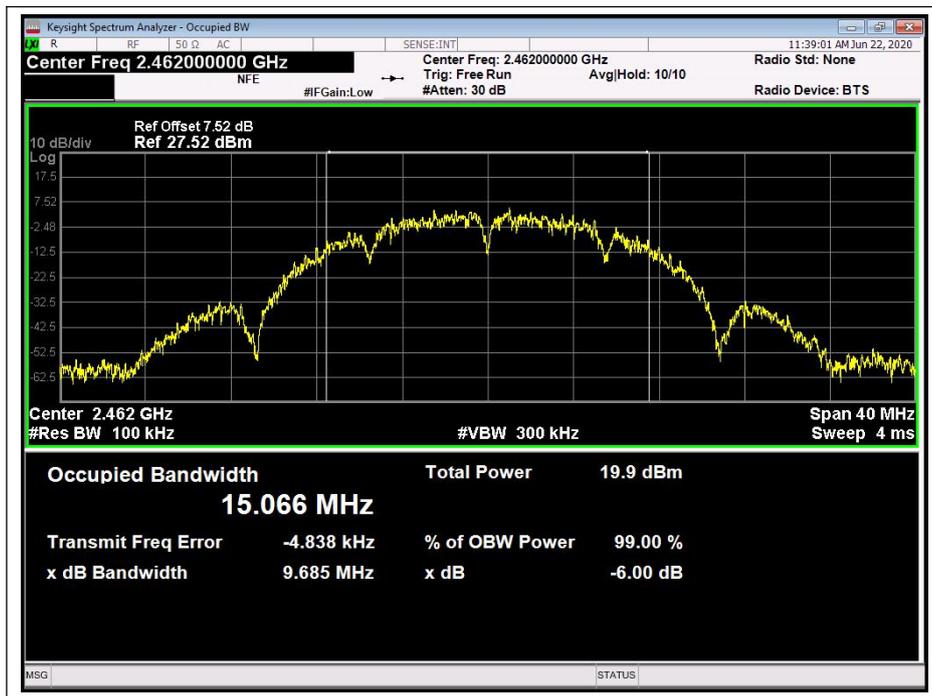

(Channel 11, 2462MHz, 802.11b)




**802.11g Test mode**


**A. Test Verdict:**

Channel	Frequency (MHz)	ANT0 6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.55	≥500	<b>PASS</b>
6	2437	16.54	≥500	<b>PASS</b>
11	2462	16.47	≥500	<b>PASS</b>


**B. Test Plots:**

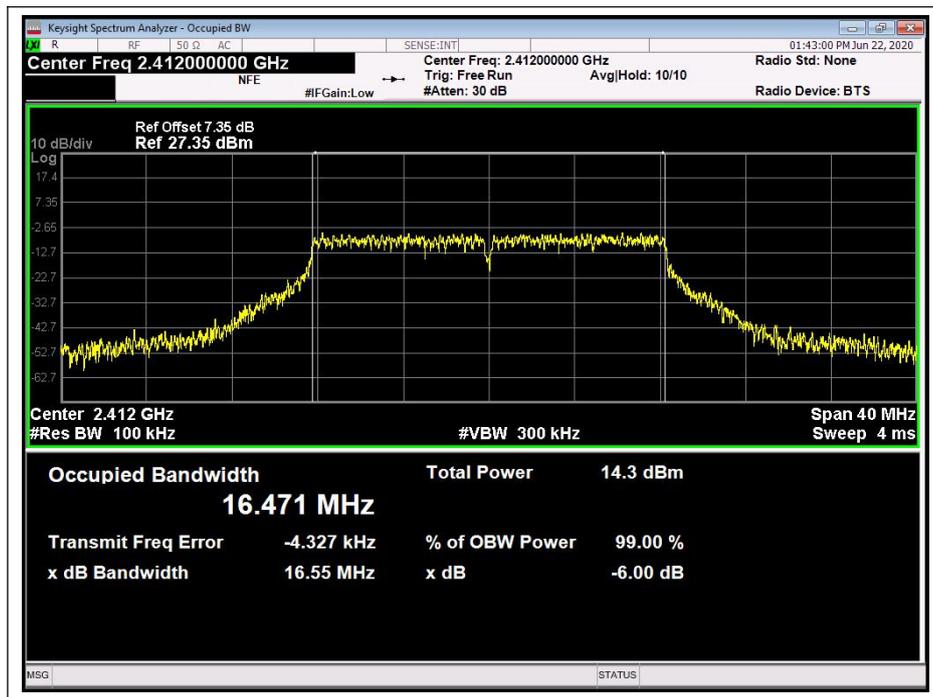

(Channel 1, 2412MHz, 802.11g)

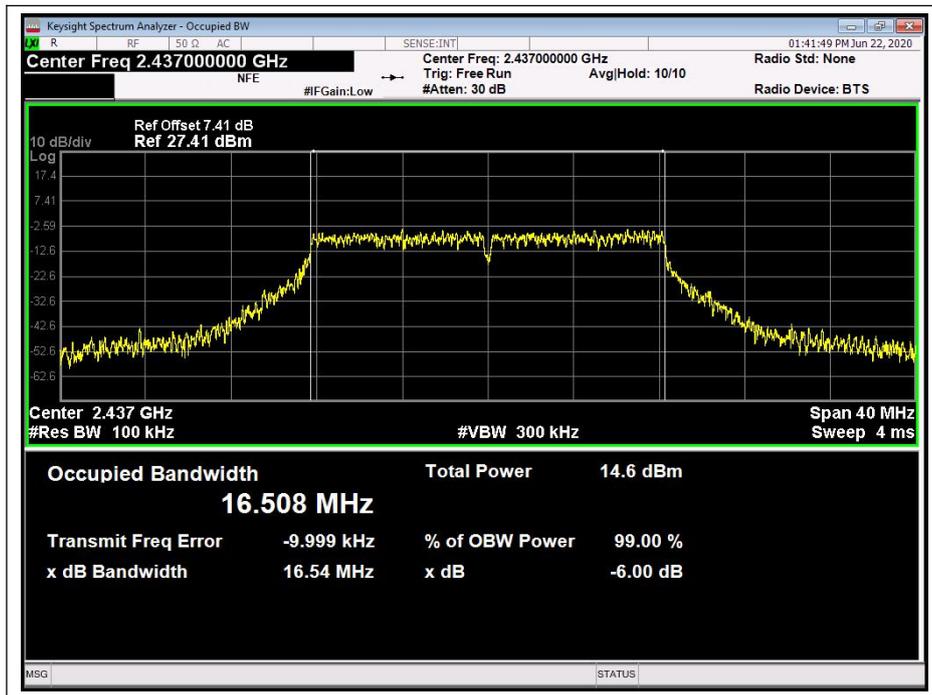

(Channel 6, 2437MHz, 802.11g)

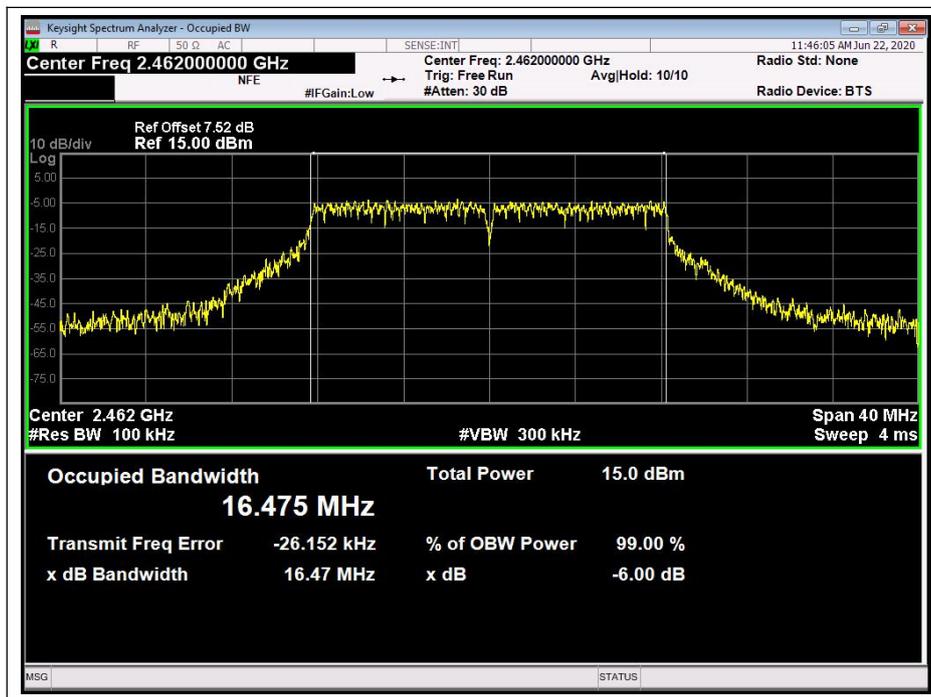

(Channel 11, 2462MHz, 802.11g)




**802.11n-20 Test mode**


**A. Test Verdict:**

Channel	Frequency (MHz)	ANT0 6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.72	≥500	<b>PASS</b>
6	2437	17.62	≥500	<b>PASS</b>
11	2462	17.74	≥500	<b>PASS</b>


**B. Test Plots:**

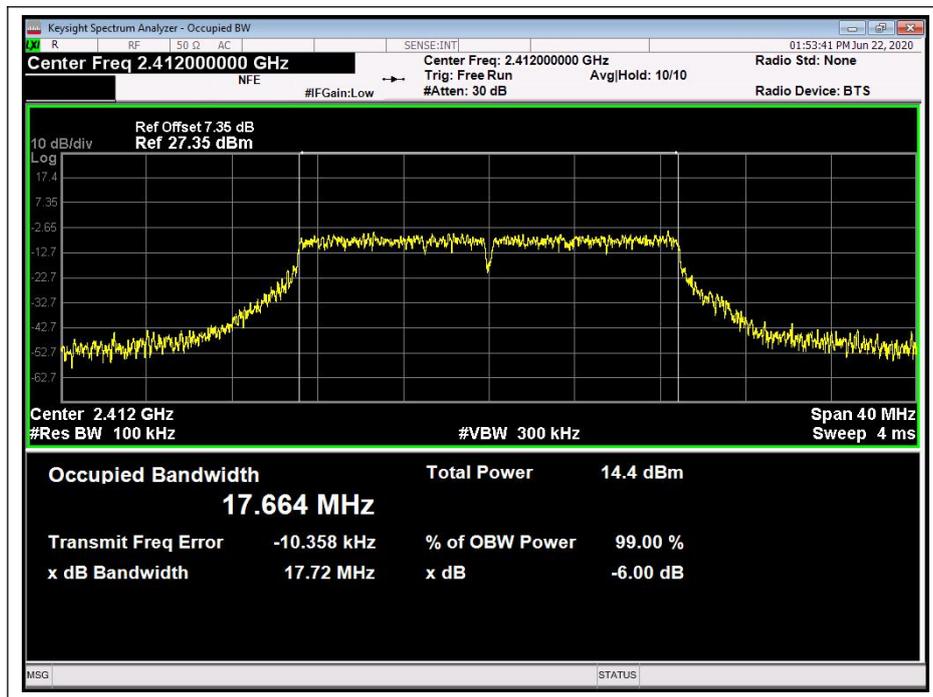

(Channel 1, 2412MHz, 802.11n-20)

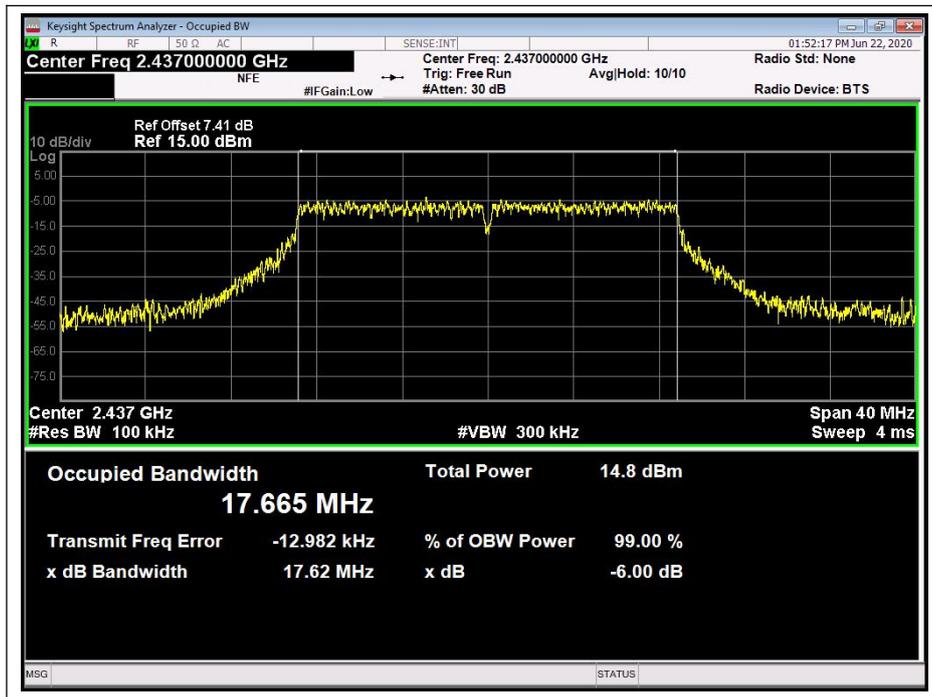

(Channel 6, 2437MHz, 802.11n-20)

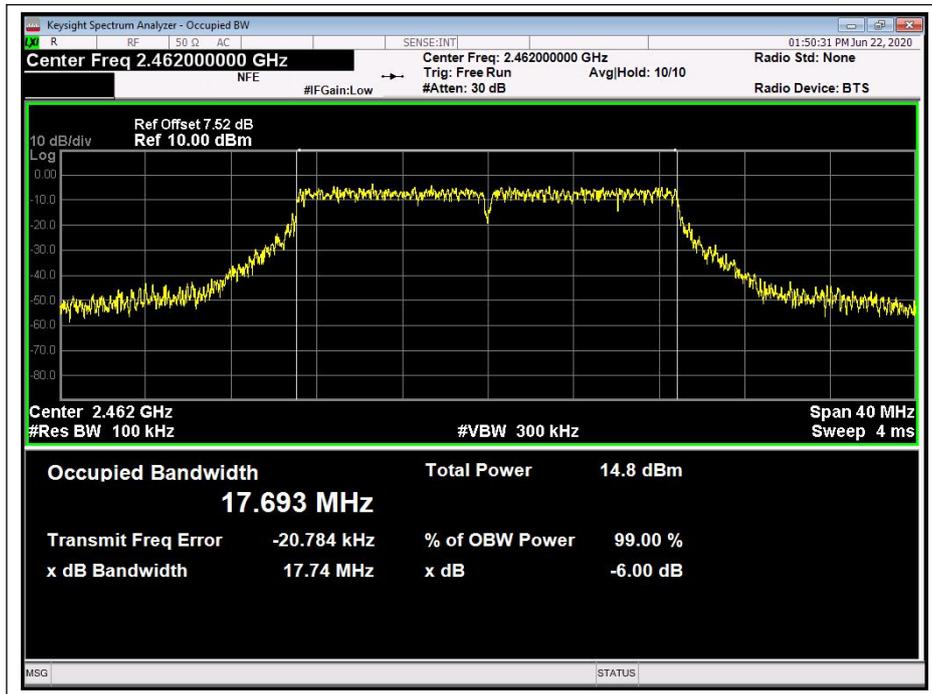

(Channel 11, 2462MHz, 802.11n-20)




**802.11n-40 Test mode**


**A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	36.43	≥500	<b>PASS</b>
6	2437	36.39	≥500	<b>PASS</b>
9	2452	36.38	≥500	<b>PASS</b>


**B. Test Plots:**

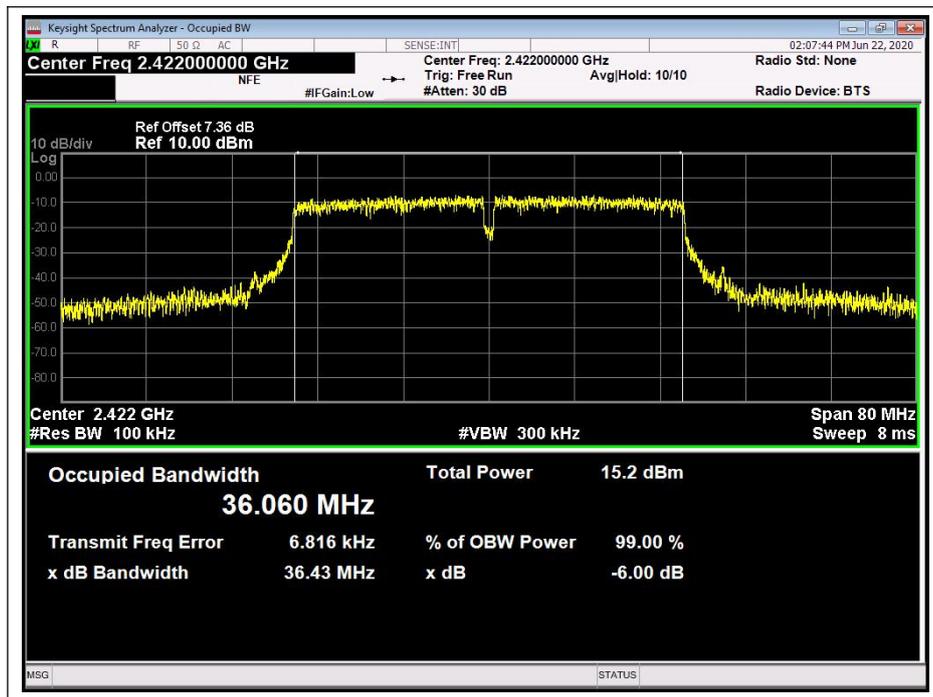

(Channel 3, 2422Mz, 802.11n-40)

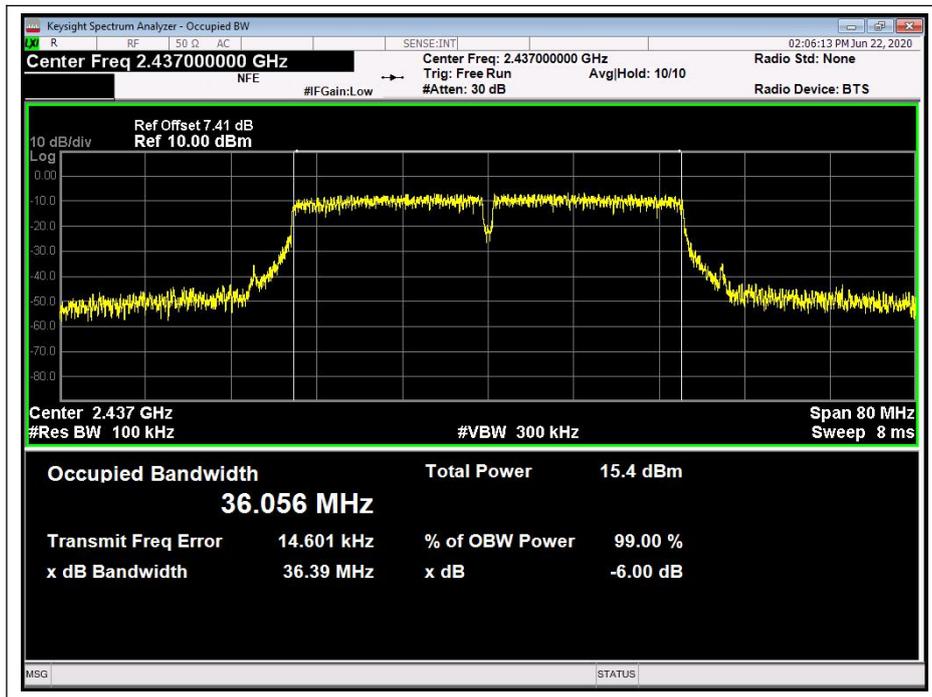

(Channel 6, 2437MHz, 802.11n-40)

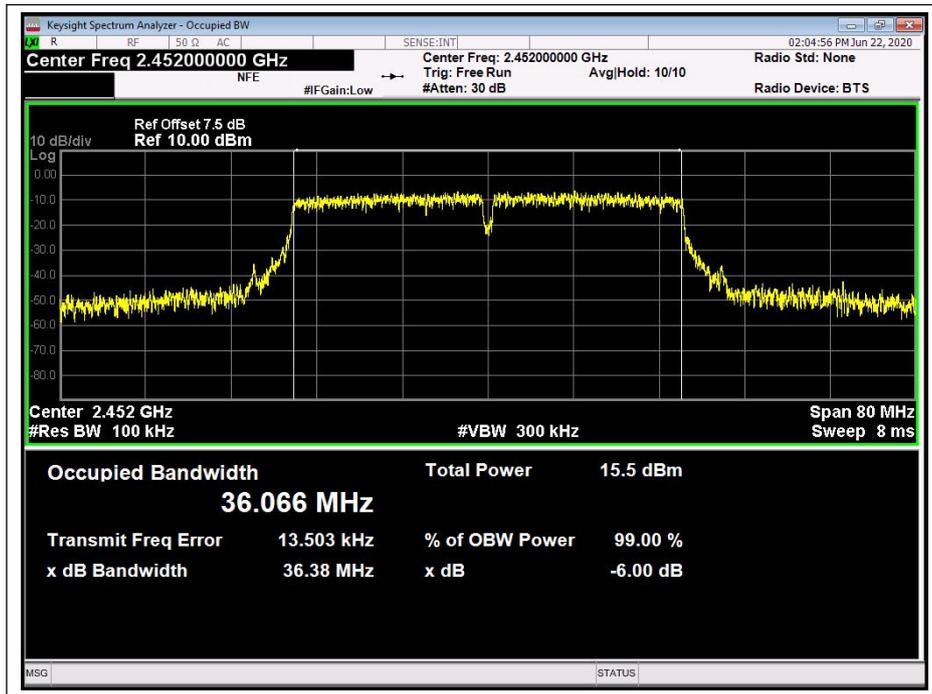

(Channel 9, 2452MHz, 802.11n-40)

## 2.4. Conducted Spurious Emissions and Band Edge

### 2.4.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2. Test Description

#### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.


KDB 558074 Section 11.0 was used in order to prove compliance.

#### B. Equipments List:


Please refer ANNEX B(4).




2.4.3. Test Result

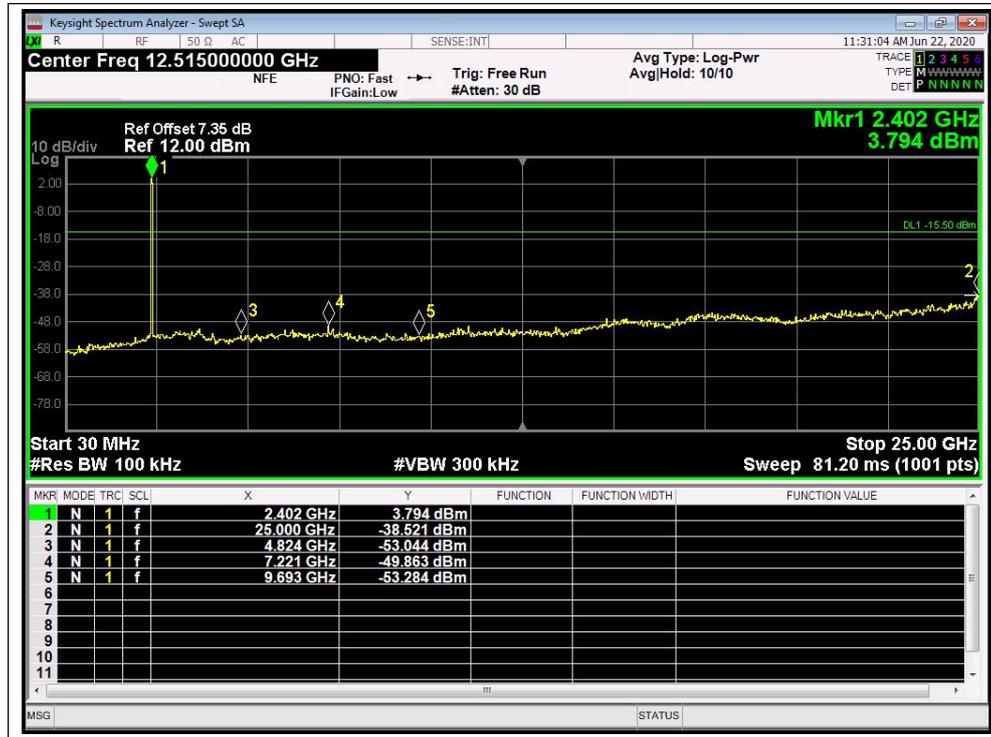


(802.11 b, Channel = 1, 30MHz to 25GHz)

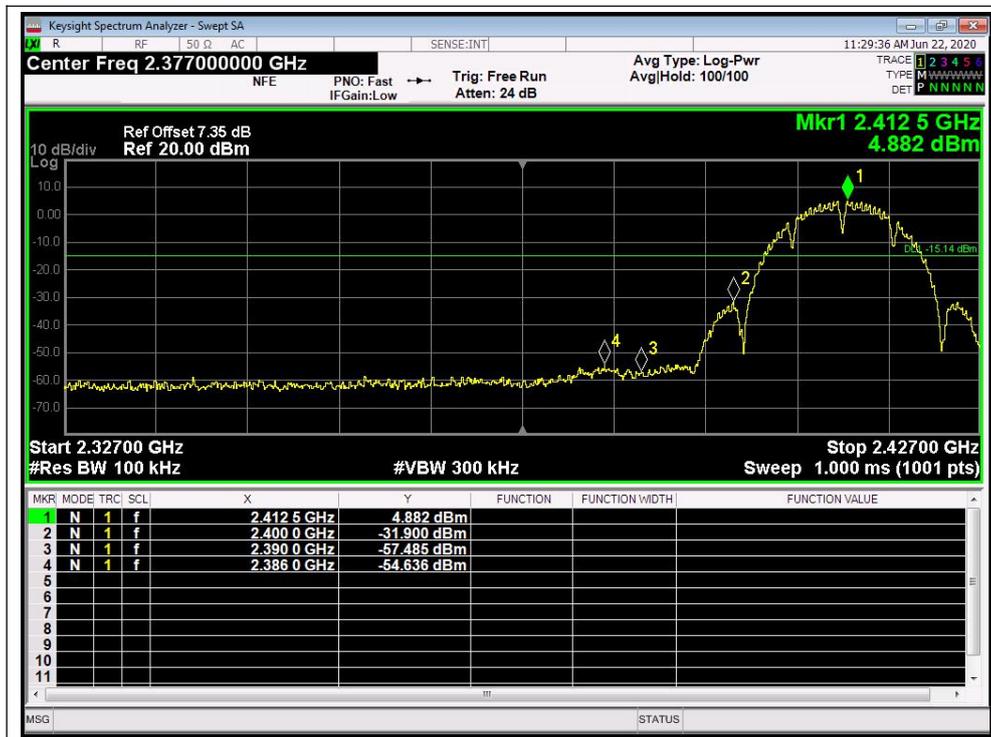


(802.11 b, Band Edge @ Channel = 1)

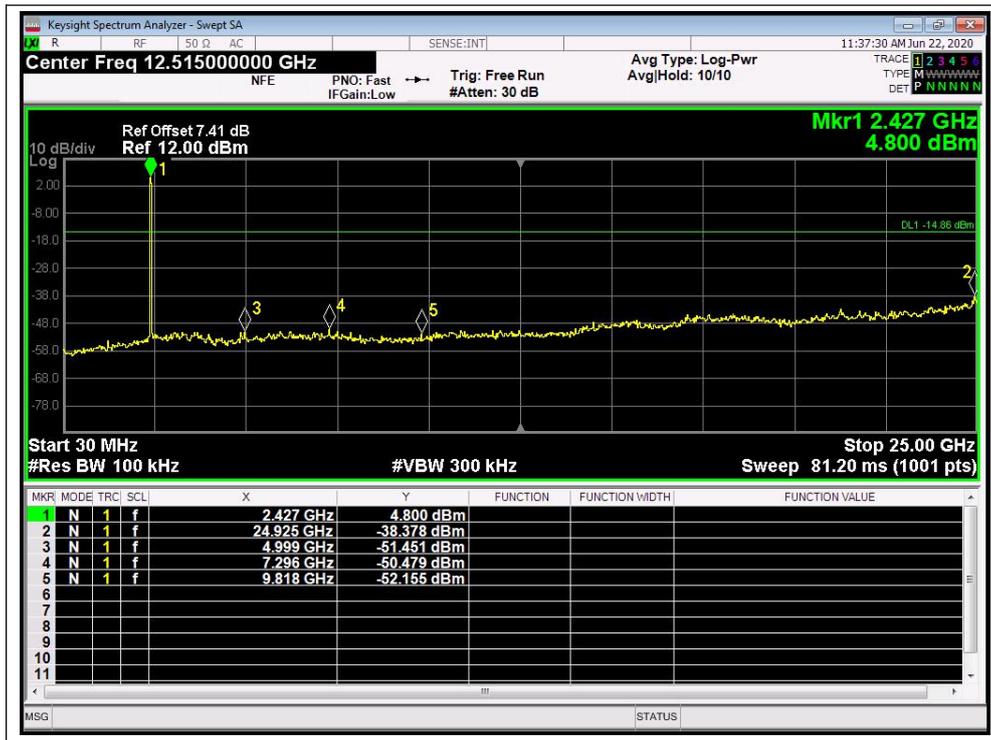


(802.11 b, Channel = 6, 30MHz to 25GHz)

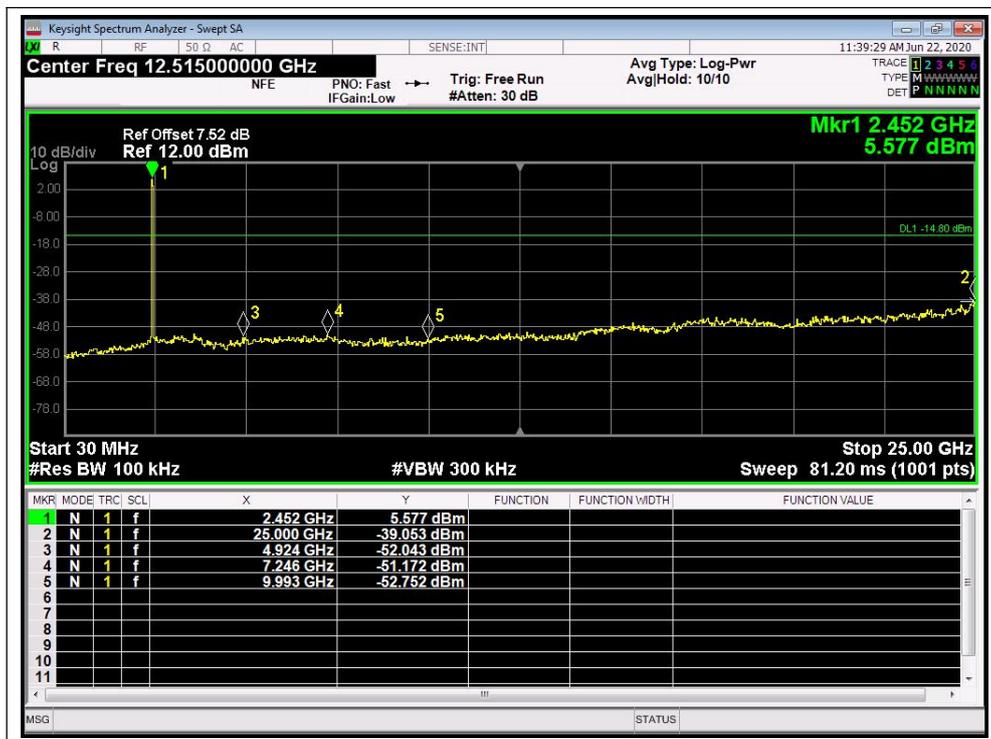

(802.11 b, Channel = 11, 30MHz to 25GHz)

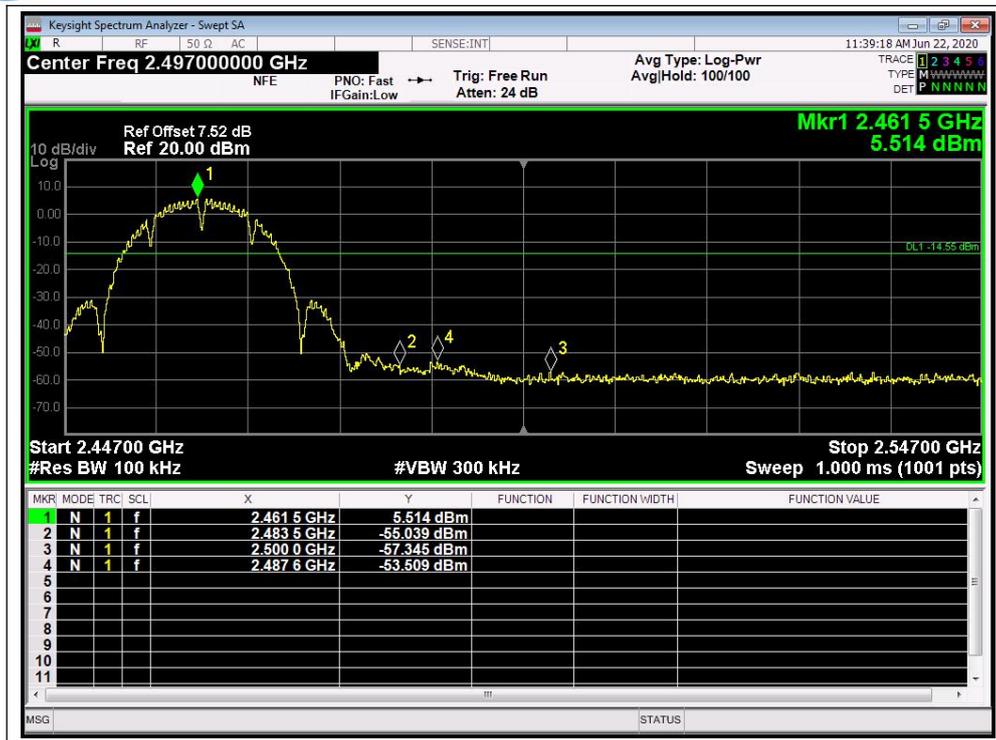


(802.11 b, Band Edge @ Channel = 11)

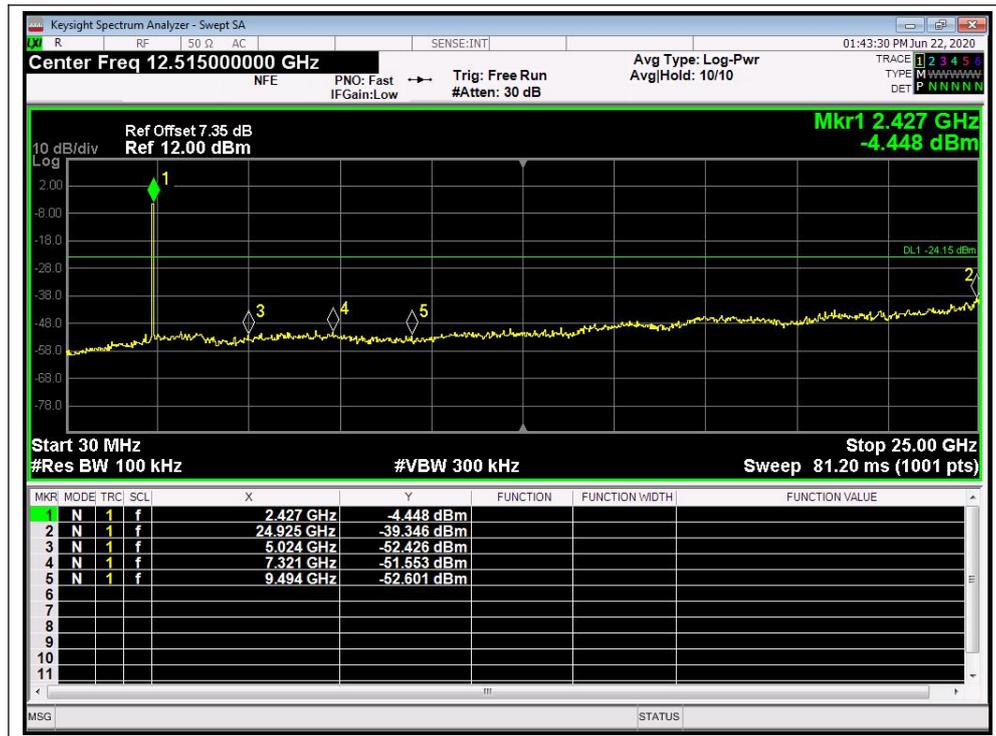


(802.11 g, Channel = 1, 30MHz to 25GHz)



(802.11 g, Band Edge @ Channel = 1)

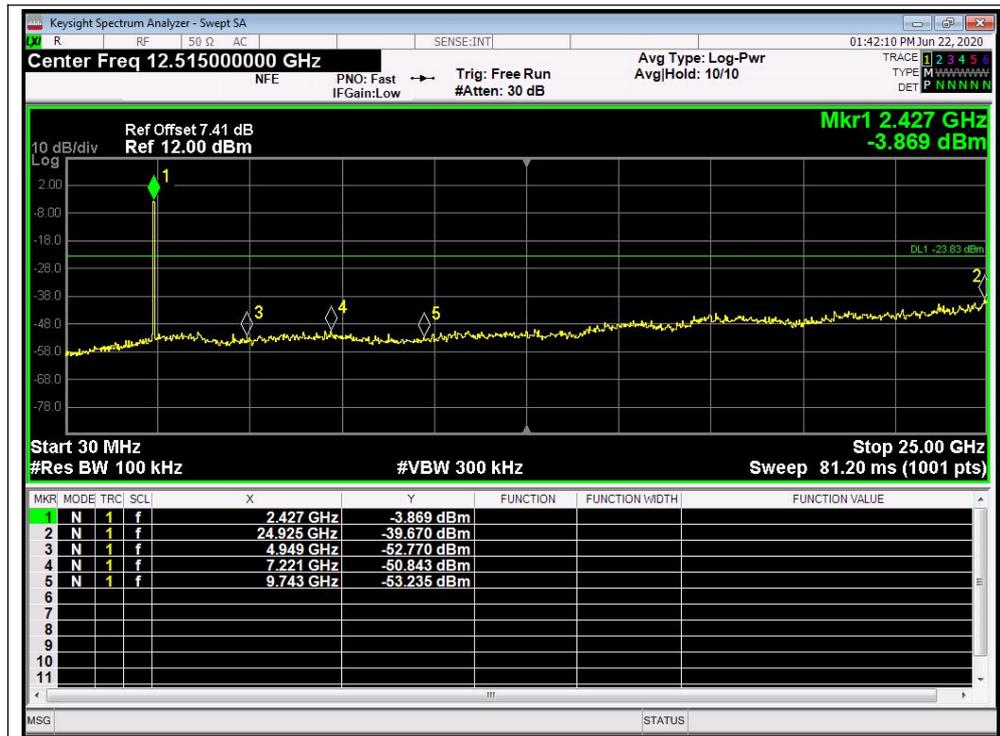


(802.11 g, Channel = 6, 30MHz to 25GHz)

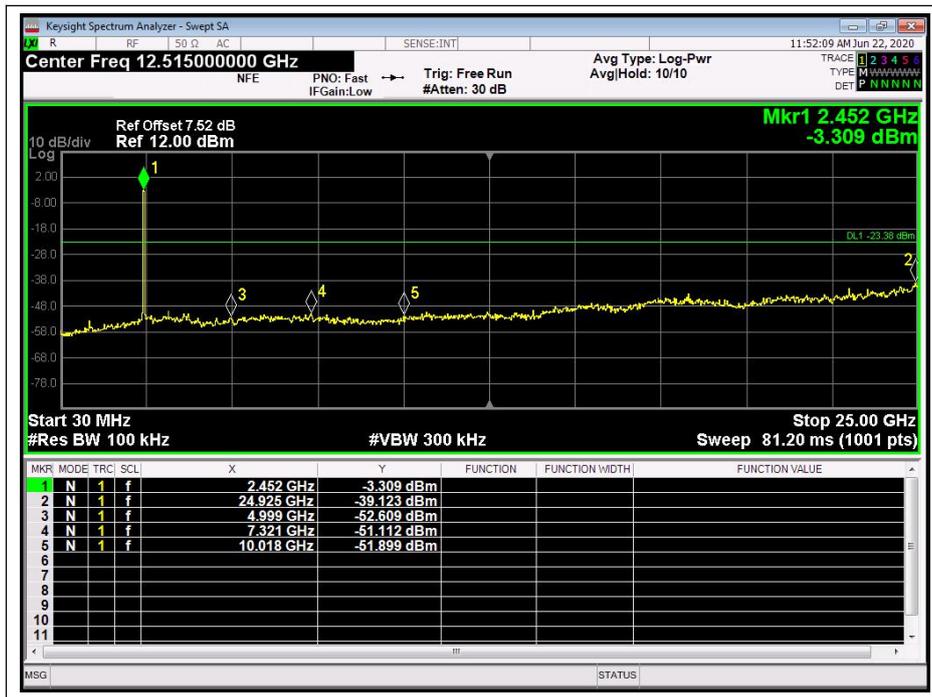

(802.11 g, Channel = 11, 30MHz to 25GHz)




(802.11 g, Band Edge @ Channel = 11)

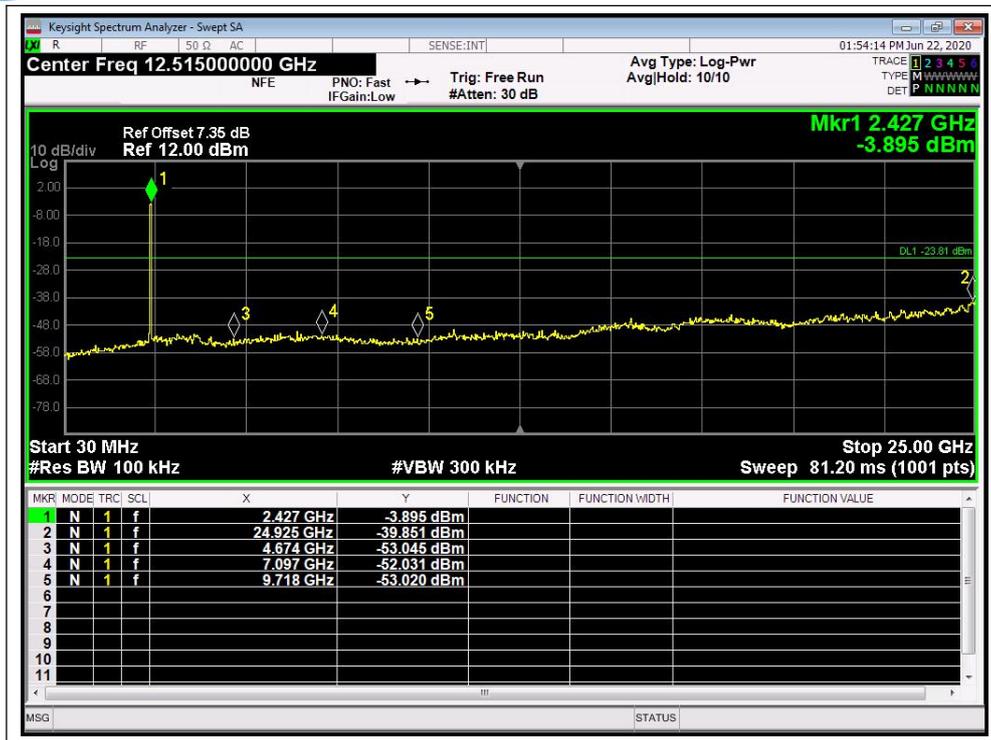


(802.11 HT20, Channel = 1, 30MHz to 25GHz)



(802.11 HT20, Band Edge @ Channel = 1)

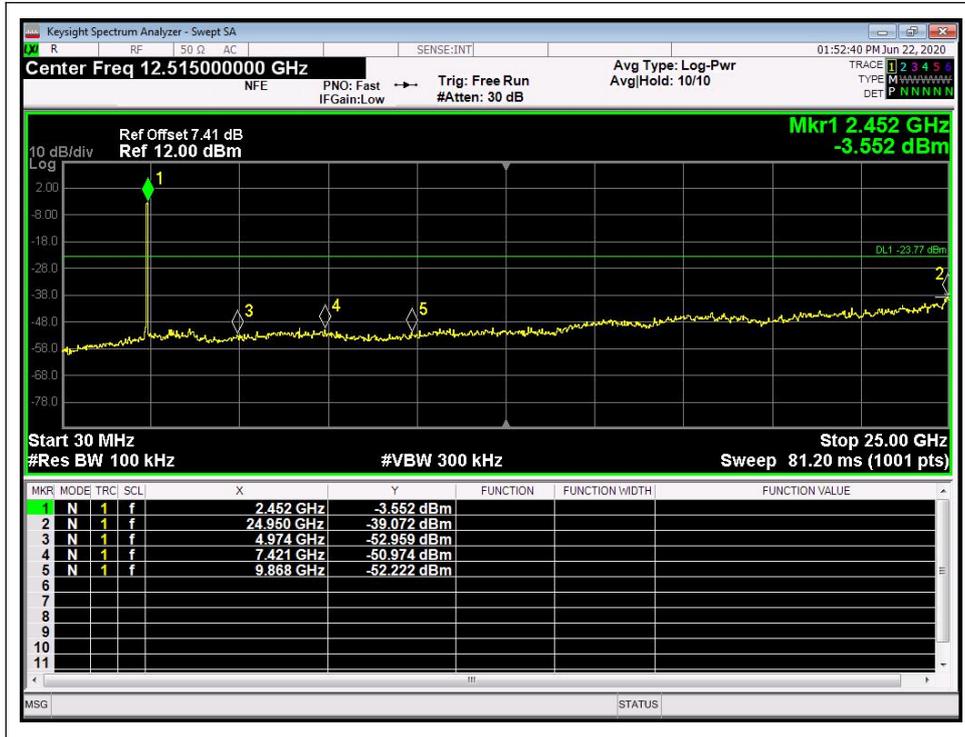


(802.11 HT20, Channel = 6, 30MHz to 25GHz)

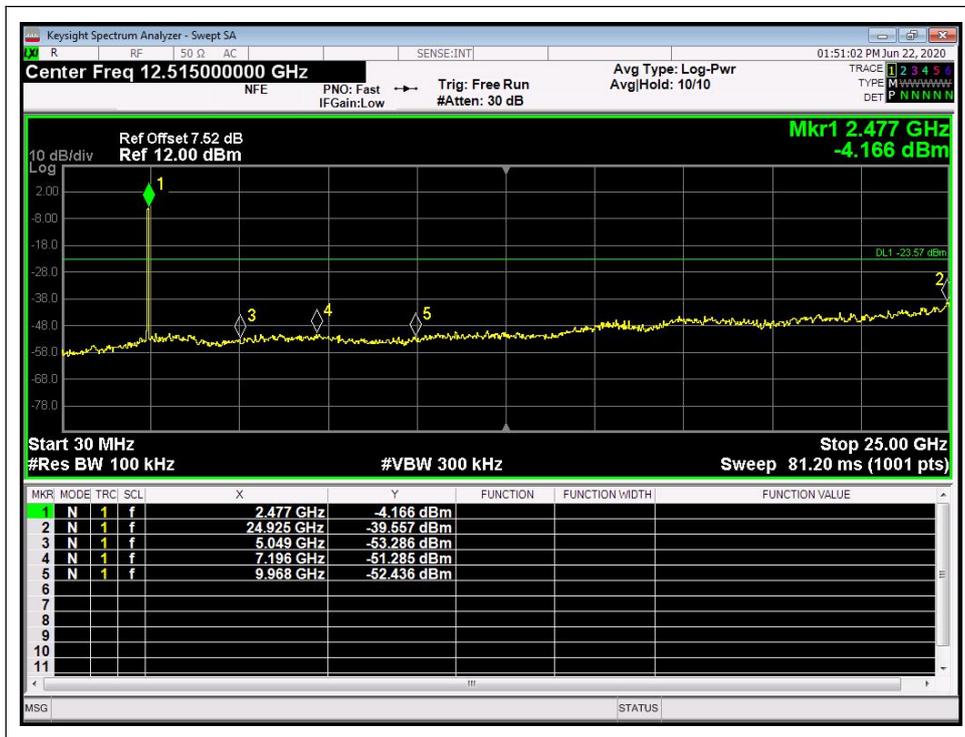


(802.11 HT20, Channel = 11, 30MHz to 25GHz)




(802.11 HT20, Band Edge @ Channel = 11)

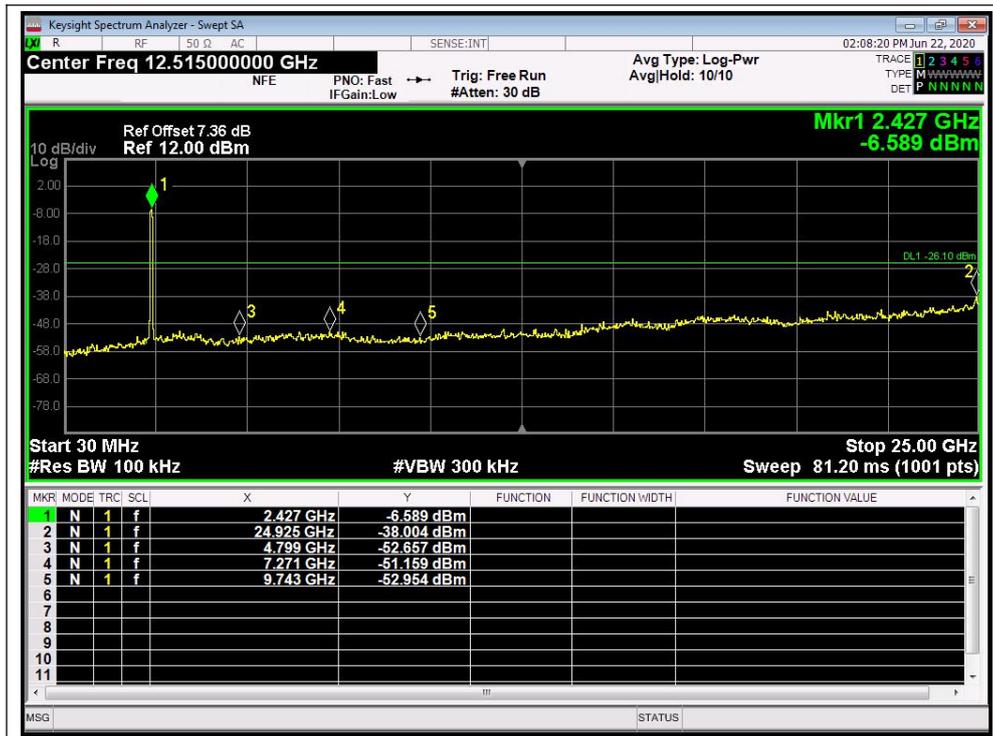


(802.11 HT40, Channel = 3, 30MHz to 25GHz)

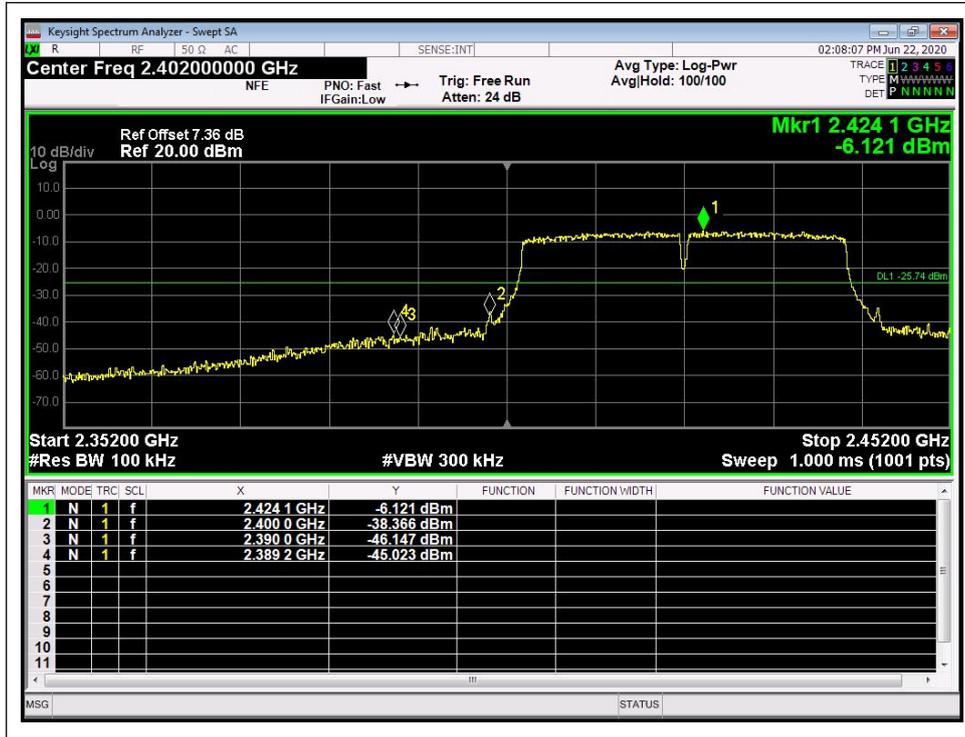

(802.11 HT40, Band Edge @ Channel = 3)

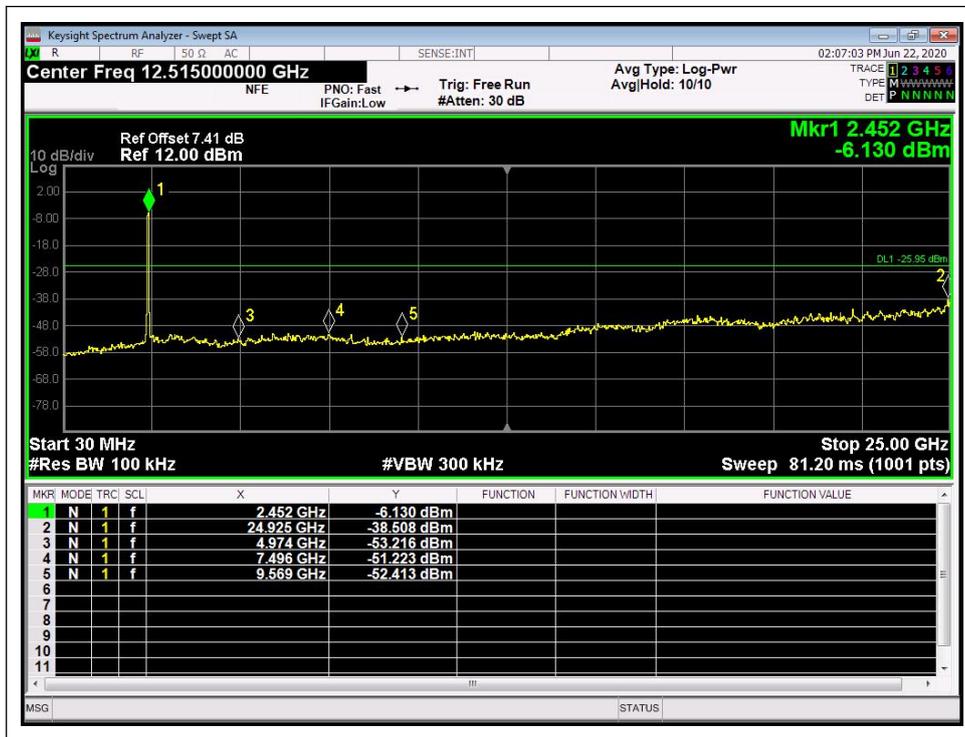

802.11 HT40, Channel = 6, 30MHz to 25GHz)

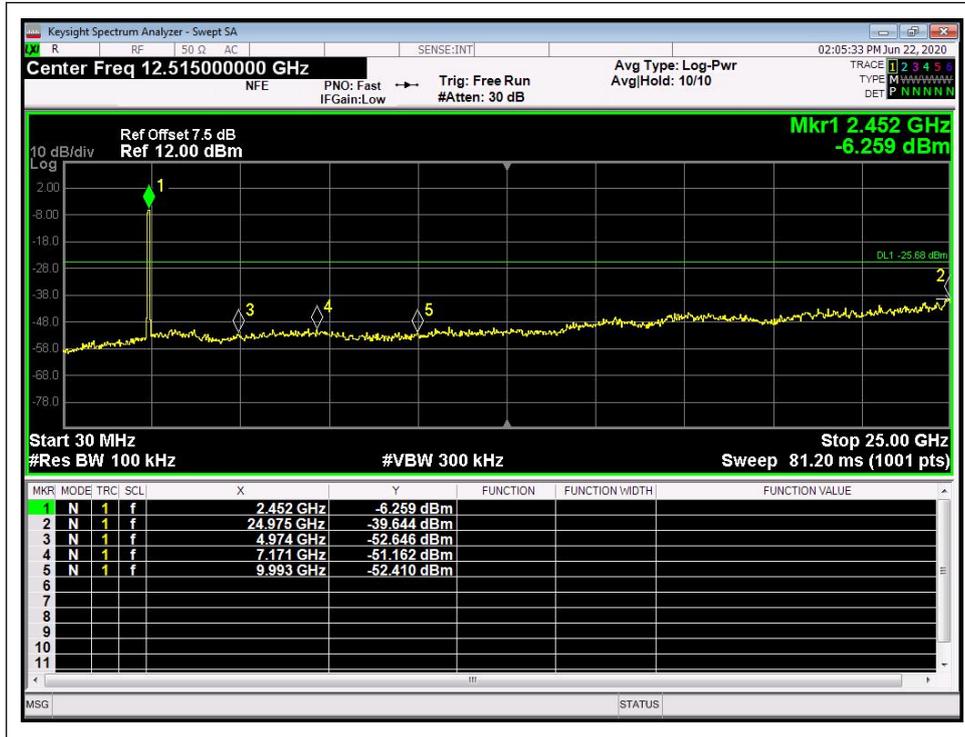

(802.11 HT40, Channel = 9, 30MHz to 25GHz)



(802.11 HT40, Band Edge @ Channel = 9)

## 2.5. Power spectral density (PSD)

### 2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.5.2. Test Description

#### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

#### B. Equipments List:

Please refer ANNEX B(4).



2.5.3. Test Result

802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1		
1	2412	-15.267	-15.136	8	PASS
6	2437	-14.707	-14.759	8	PASS
11	2462	-14.734	-14.970	8	PASS

B. Test Plots:



(Channel = 1, 802.11b;ANT0)