

TEST REPORT

Reference No..... : WTF19S04026180W
FCC ID : 2ATB5-T301A
Applicant..... : Tarzan Technology Co.,Ltd.
Address..... : 2F, Build 4, No 111 Jintong Rd, Tangxia Town, Pengjiang District,
Jiangmen Guangdong, China
Manufacturer : The same as above
Address..... : The same as above
Product..... : Remote Control Transmitter
Model(s)..... : T301A
Standards..... : FCC CFR47 Part 15 Section 15.231
Date of Receipt sample : 2019-04-26
Date of Test : 2019-04-27 to 2019-05-13
Date of Issue..... : 2019-05-14
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Test Engineer

Approved by:




Philos Zhang

Philos Zhang / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.

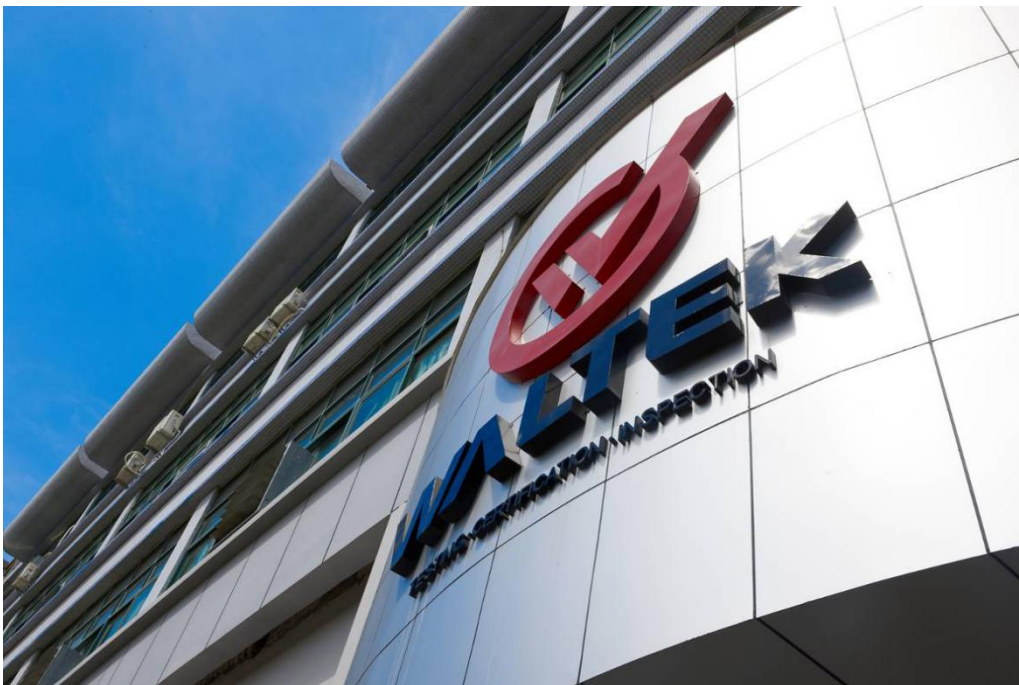

Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. ISED CAB identifier: CN0013			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE	1
2 LABORATORIES INTRODUCTION	2
3 CONTENTS	4
4 REVISION HISTORY	5
5 GENERAL INFORMATION	6
5.1 GENERAL DESCRIPTION OF E.U.T.....	6
5.2 DETAILS OF E.U.T.....	6
6 EQUIPMENT USED DURING TEST	7
6.1 EQUIPMENTS LIST	7
6.2 MEASUREMENT UNCERTAINTY.....	7
6.3 SUBCONTRACTED.....	7
7 TEST SUMMARY	8
8 CONDUCTED EMISSION	9
8.1 E.U.T. OPERATION	9
8.2 EUT SETUP.....	9
8.3 MEASUREMENT DESCRIPTION	10
8.4 CONDUCTED EMISSION TEST RESULT.....	10
9 RADIATED SPURIOUS EMISSIONS	11
9.1 EUT OPERATION.....	11
9.2 TEST SETUP	12
9.3 SPECTRUM ANALYZER SETUP	13
9.4 TEST PROCEDURE.....	14
9.5 SUMMARY OF TEST RESULTS	15
10 PERIODIC OPERATION	16
11 20DB BANDWIDTH	19
11.1 TEST PROCEDURE.....	19
11.2 TEST RESULT	19
12 ANTENNA REQUIREMENT	20
12 PHOTOGRAPHS OF TEST SETUP AND EUT	21

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF19S04026180W	2019-04-26	2019-04-27 to 2019-05-13	2019-05-14	original	-	Valid

5 General Information

5.1 General Description of E.U.T

Product:	Remote Control Transmitter
Model(s):	T301A
Model Difference:	N/A
Type of Modulation:	ASK
Frequency Range:	433.92MHz
The Lowest Oscillator:	433MHz
Antenna installation:	Integrated Antenna

5.2 Details of E.U.T

Technical Data:	DC 12V 60mah by battery
-----------------	-------------------------

6 Equipment Used during Test

6.1 Equipments List

3m Semi-anechoic Chamber for Radiated Spurious Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2019-04-07	2020-04-06
2	Active Loop Antenna	Laplace	RF300	9057	2018-09-15	2019-09-14
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-05-18	2019-05-17
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-10-15	2019-10-14
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-05-18	2019-05-17
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-10-25	2019-10-24
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-04-07	2020-04-06
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	EW02014-7	2019-04-07	2020-04-06

6.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.3 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

7 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Radiated Spurious Emissions	15.205(a) 15.209 15.231(a)	PASS
Periodic Operation	15.231(a)	PASS
20dB Bandwidth	15.231(c)	PASS
Antenna Requirement	15.203	PASS
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Qsi-peak	Average
0.15 to 0.5	66 t 56*	6 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	0

*Decreases with the logarithm of the frequency.

8.1 E.U.T. Operation

Operating Environment :

Temperature: 24.6 °C

Humidity: 56.2 % RH

Atmospheric Pressure: 102.5kPa


Test Voltage: AC 120V, 60Hz

EUT Operation :

The test was performed in Transmitting mode, the worst test data (GFSK modulation Low channel) were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

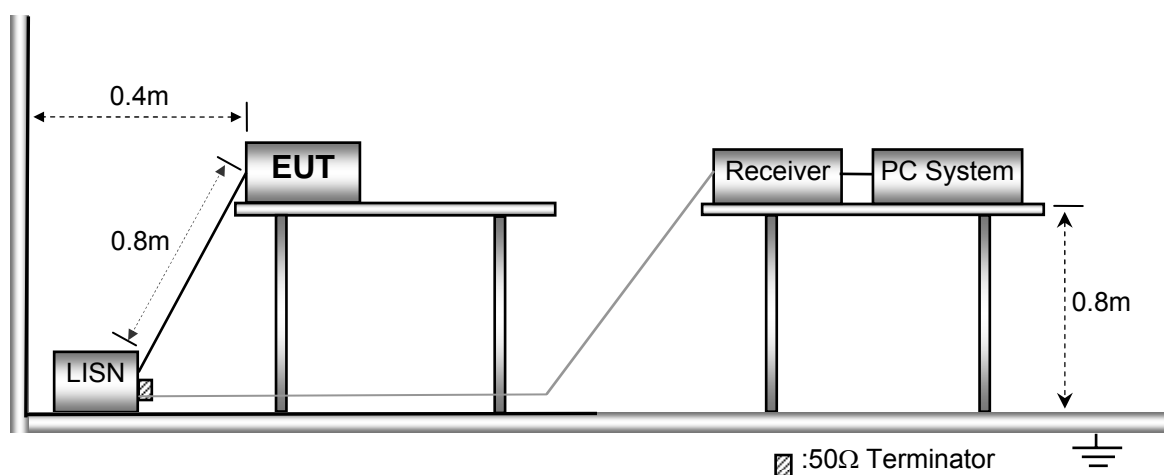

8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

Remark: The device is powered by battery, it is not application for this test.

9 Radiated Spurious Emissions

Test Requirement: FCC Part15 Paragraph 15.231(a)

Test Method: ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Fundamental Frequency (MHz)	Field Strength of Fundamental (uV/m)	Field Strength of Fundamental (dBuV/m)	Field Strength of Spurious Emission (uV/m)	Field Strength of Spurious Emission (dBuV/m)
44.66-40.70	2250	67	225	47
70-130	1250	62	125	42
130-174	1250 to 3750	62 to 71.48	125 to 375	42 to 51.48
174-260	3750	71.48	375	51.48
260-470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94
** linear interpolations				

9.1 EUT Operation

Operating Environment :

Temperature: 24.1 °C

Humidity: 53.7 % RH

Atmospheric Pressure: 102.4kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2014.


The test setup for emission measurement below 30MHz.

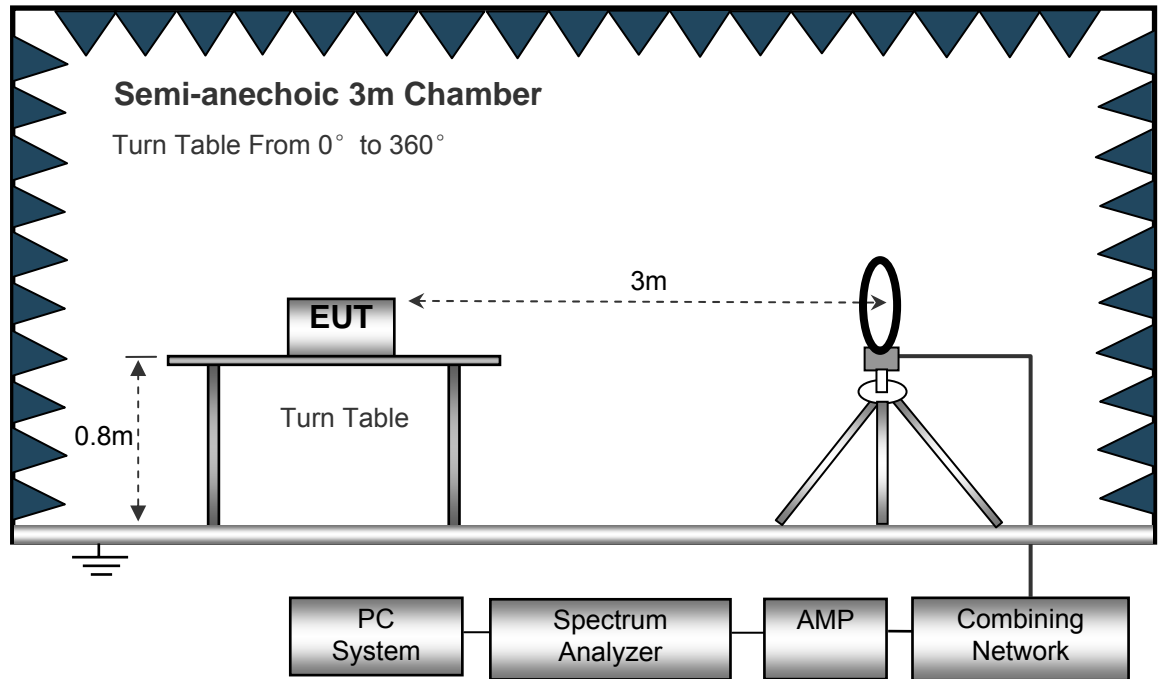

The test setup for emission measurement from 30 MHz to 1 GHz.

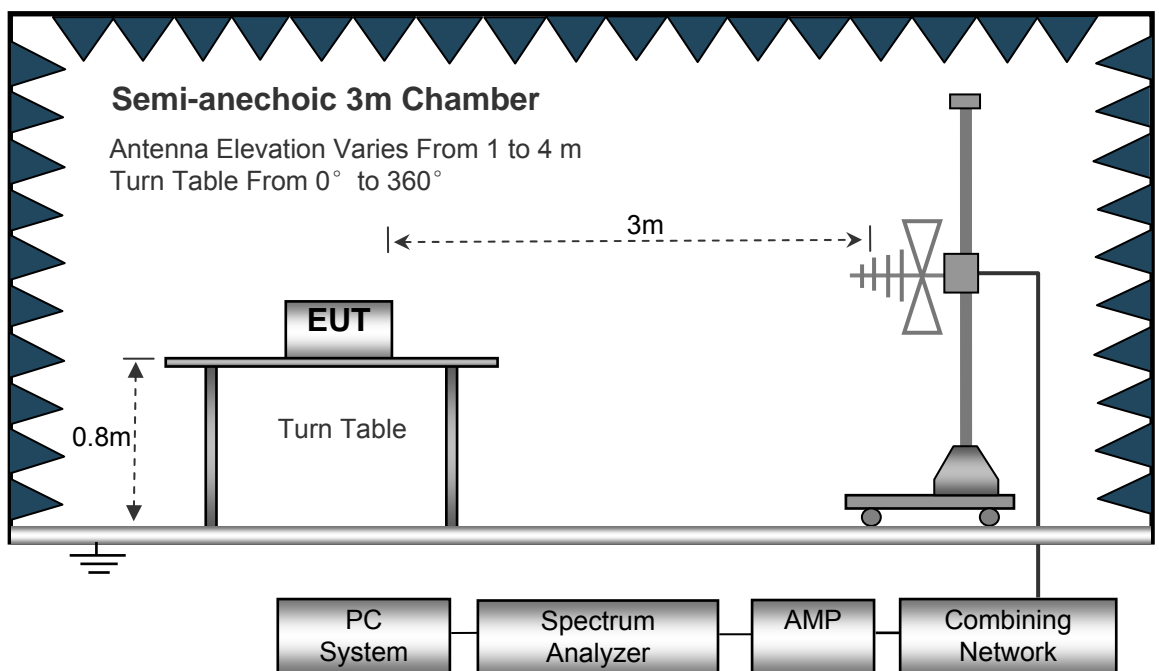

The test setup for emission measurement above 1 GHz.

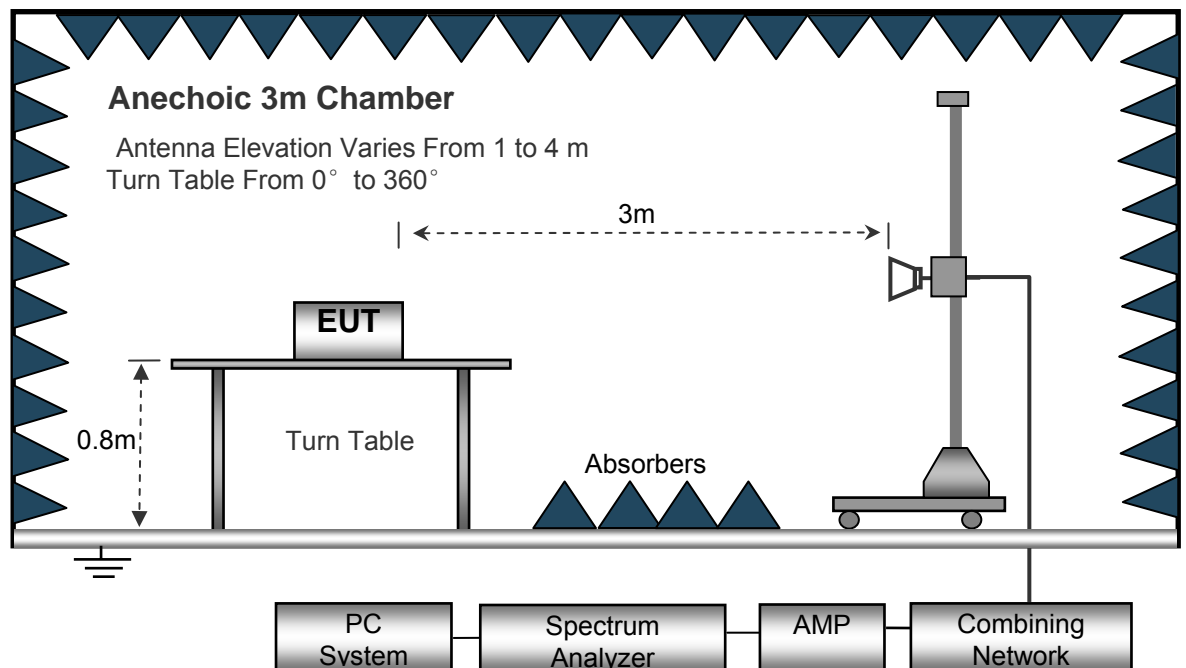

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep SpeedAuto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand). After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

9.5 Summary of Test Results

AV = Peak +20Log₁₀(duty cycle)

Test Frequency: Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 5GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.231/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
433.92	80.56	PK	94	1.8	H	-7.28	81.84	100.82	-18.98
433.92	77.36	PK	137	1.6	V	-7.28	86.50	100.82	-14.32
867.84	26.54	PK	288	1.9	H	0.04	23.21	80.82	-57.61
867.84	23.41	PK	209	1.6	V	0.04	23.54	80.82	-57.28
1816.80	45.36	PK	25	1.5	H	-14.38	35.21	74.00	-38.79
1816.80	40.26	PK	204	1.7	V	-14.38	35.18	74.00	-38.82
2725.20	42.39	PK	345	1.5	H	-12.87	34.65	74.00	-39.35
2725.20	39.59	PK	196	1.8	V	-12.87	34.29	74.00	-39.71

Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	FCC Part 15.231/209/205	
			Height	Polar			Limit	Margin
(MHz)	(dBμV/m)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
433.92	81.84	317	1.8	H	-12.33	69.51	80.82	-11.31
433.92	86.50	147	1.6	V	-12.33	74.17	80.82	-6.65
867.84	23.21	71	1.9	H	-12.33	10.88	60.82	-49.94
867.84	23.54	76	1.6	V	-12.33	11.21	60.82	-49.61
1816.80	35.21	79	1.5	H	-12.33	22.88	54.00	-31.12
1816.80	35.18	316	1.7	V	-12.33	22.85	54.00	-31.15
2725.20	34.65	325	1.5	H	-12.33	22.32	54.00	-31.68
2725.20	34.29	159	1.8	V	-12.33	21.96	54.00	-32.04

10 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, The duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

$$\text{Duty Cycle(\%)} = \frac{\text{Total On interval in a complete pulse train}}{\text{Length of a complete pulse train}} * 100 \%$$


$$\text{Duty Cycle Correction Factor(dB)} = 20 * \text{Log}_{10}(\text{Duty Cycle(\%)})$$

Total transmission time(ms)	11*0.24+9*0.84=10.2
Length of a complete transmission period(ms)	42.2
Duty Cycle(%)	24.17
Duty Cycle Correction Factor(dB)	-12.33


Refer to the duty cycle plot (as below), This device meets the FCC requirement.

Length of a complete pulse train:


Remark: FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

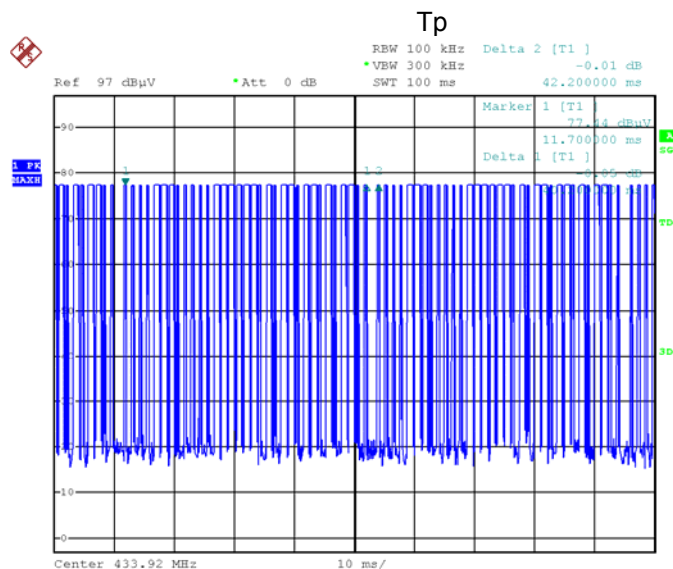

Date: 10.MAY.2019 15:17:01

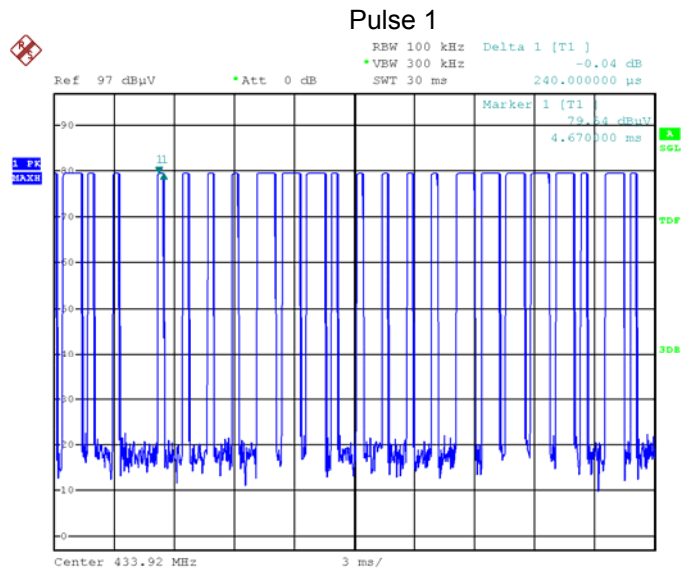


Date: 9.MAY.2019 15:14:54

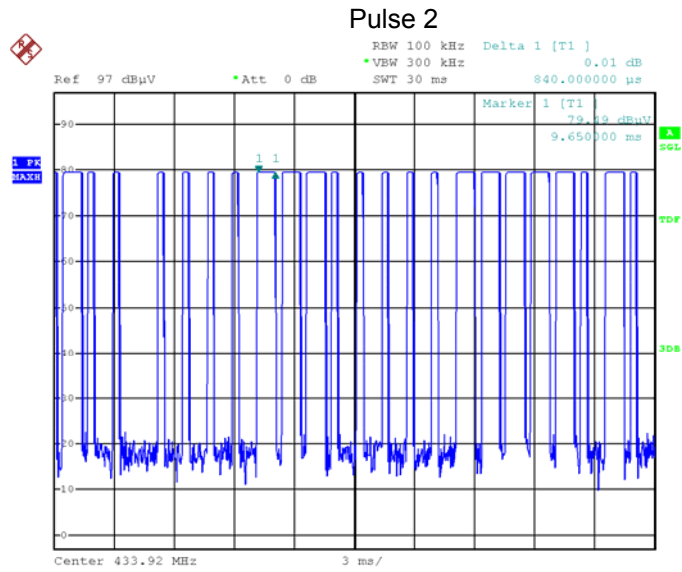

Date: 9.MAY.2019 15:15:10

FCC Part15.231(a)(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2)A transmitter activated automatically shall cease transmission within 5 seconds after activation.

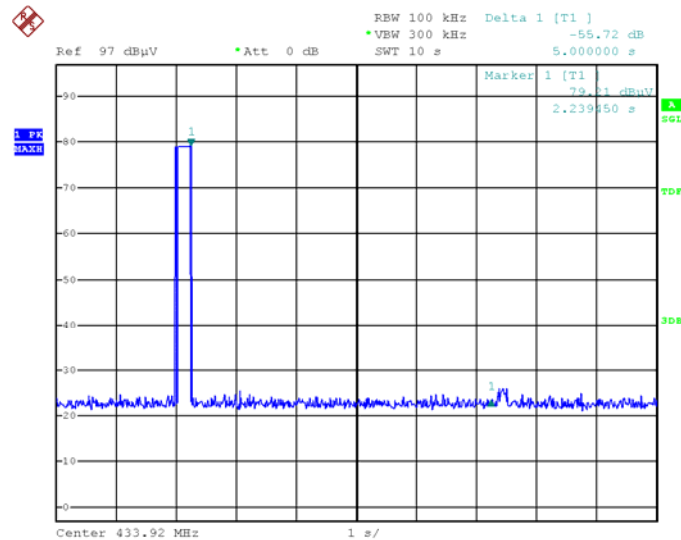

Date: 9.MAY.2019 15:18:54

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition

(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

11 20dB Bandwidth

Test Requirement:	FCC Part15.231(c)
Test Method:	FCC Part15.231(c)
Limit	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

11.1 Test Procedure


1. The transmitter output (antenna port) was connected to the spectrum analyzer. EUT and its simulators are placed on a table, let EUT working in test mode, then test it.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 3kHz RBW and 10kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.

11.2 Test Result

Frequency (MHz)	Bandwidth Emission (kHz)	Limit (kHz)	Result
433.92	59.4	1084.80	Pass

Limit=Center Frequency*0.25%


Test Plot

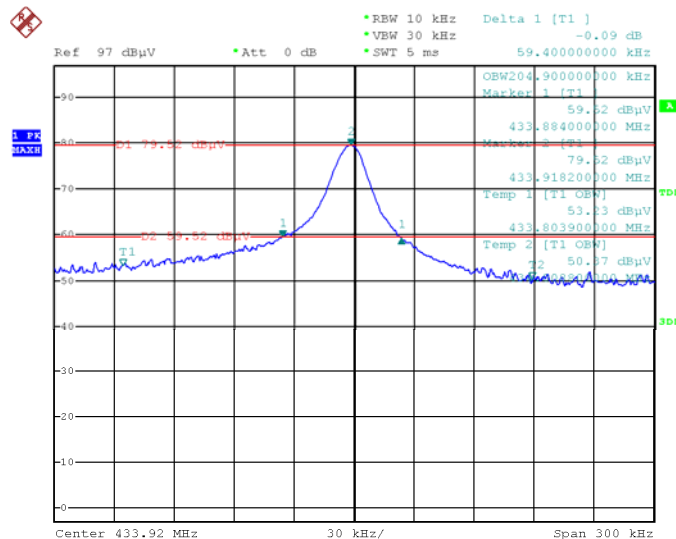

Date: 9.MAY.2019 15:10:28

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product use a permanent Integrated Antenna, fulfill the requirement of this section.

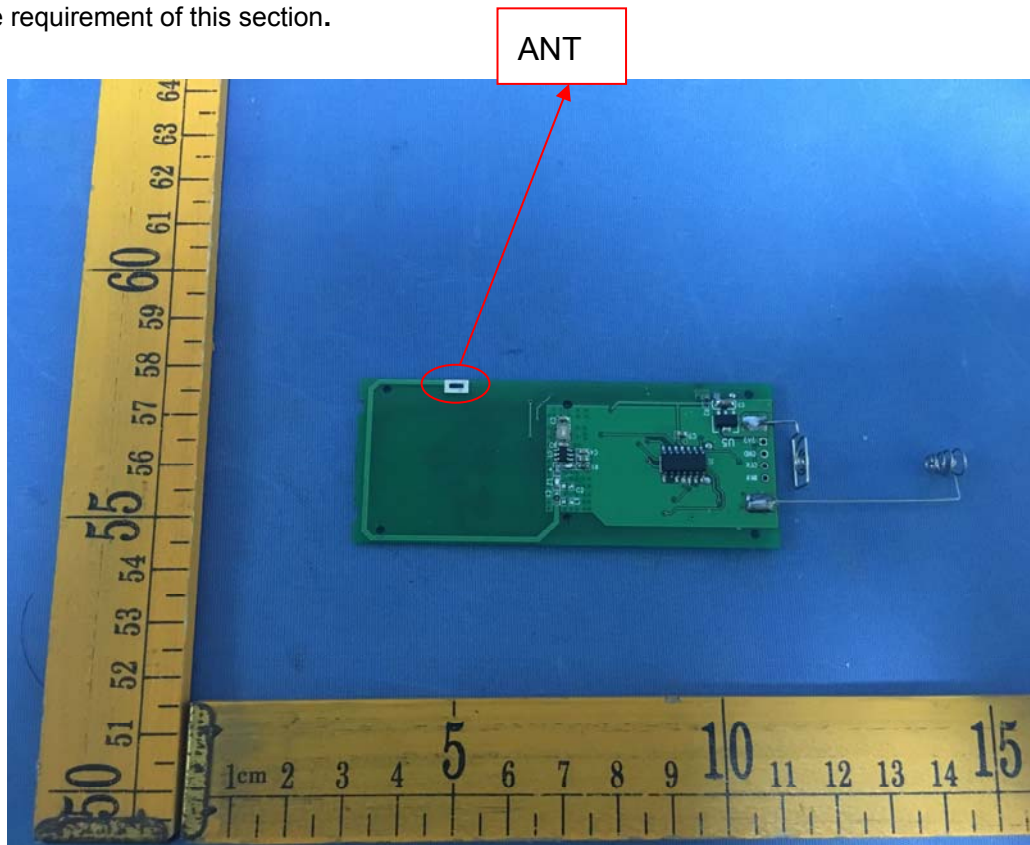

12 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-T301A-Photos

=====**End of Report**=====