


RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-229-RWD-049
Reception No. : 2208002513
Applicant : TPNET CO., LTD
Address : #B-1811, WOOLIM5, 302, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, South Korea
Manufacturer : TPNET CO., LTD
Address : #B-1811, WOOLIM5, 302, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, South Korea
Type of Equipment : AKOiHeart
FCC ID. : 2ATBS-AKoiHRT30
Model Name : AKoiHRT30
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 36 pages (including this page)
Date of Incoming : August 17, 2022
Date of issue : September 27, 2022

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.
 This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.





Tested by
 Myeong-Hwa, Jang / Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / General Manager
 ONETECH Corp.

Approved by
 Ki-Hong, Nam / General Manager
 ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM.....	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH.....	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST DATE	11
7.4 TEST DATA FOR 1 MBPS.....	12
8. MAXIMUM PEAK OUTPUT POWER.....	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST DATE	14
8.4 TEST DATA FOR 1 MBPS.....	15
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17

9.1 OPERATING ENVIRONMENT	17
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT	17
9.4 TEST DATE	17
9.5 TEST DATA FOR CONDUCTED EMISSION	18
9.5.1 TEST DATA FOR 1 MBPS	18
9.6 TEST DATA FOR RADIATED EMISSION	23
9.6.1 Radiated Emission which fall in the Restricted Band	23
9.6.2 Spurious & Harmonic Radiated Emission	24
10. PEAK POWER SPECTRAL DENSITY	26
10.1 OPERATING ENVIRONMENT	26
10.2 TEST SET-UP	26
10.3 TEST DATE	26
10.4 TEST DATA FOR 1 MBPS	27
11. RADIATED EMISSION TEST	29
11.1 OPERATING ENVIRONMENT	29
11.2 TEST SET-UP	29
11.3 TEST DATE	30
11.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	31
11.5 TEST DATA FOR BELOW 30 MHz	32
11.6 TEST DATA FOR ABOVE 1 GHz	32
12. CONDUCTED EMISSION TEST	33
12.1 OPERATING ENVIRONMENT	33
12.2 TEST SET-UP	33
12.3 TEST DATE	33
12.4 TEST DATA	34
13. LIST OF TEST EQUIPMENT	36

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-229-RWD-049	September 27, 2022	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : TPNET CO., LTD
 Address : #B-1811, WOOLIM5, 302, Galmachi-ro, Jungwon-gu, Seongnam-si, Gyeonggi-do, South Korea
 Contact Person : Bonghyun An / President
 Telephone No. : +82-31-745-0025
 FCC ID : 2ATBS-AKoiHRT30
 Model Name : AKoiHRT30
 Brand Name : AKoiHeart / AKoi / TPNET CO., LTD
 Serial Number : N/A
 Date : September 27, 2022

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	AKoiHeart
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The TPNET CO., LTD, Model AKOiHRT30 (referred to as the EUT in this report) is a AKOiHeart. The product specification described herein was obtained from product data sheet or user’s manual.

Device Type	AKOiHeart
Temperature Range	0 °C ~ +45 °C
Operating Frequency	2 402 MHz ~ 2 480 MHz
RF Output Power	-3.22 dBm
Number of Channel	40 Channel
Modulation Type	DSSS Modulation(GFSK)
Antenna Type	Chip Antenna
Antenna Gain	3.5 dBi
Electrical Rating	DC 3.60 V
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	TPNET CO., LTD	TP-AH2000	N/A
Battery	EEMB Energy Power Co., Ltd.	LIR2032	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
AKOiHRT30	TPNET CO., LTD	AKOiHeart (EUT)	-
ProBook 4540s	HP	Notebook PC	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

- Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		


- Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE [1 Mbps]	0.601 4	1.252 4	48.02	3.19

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

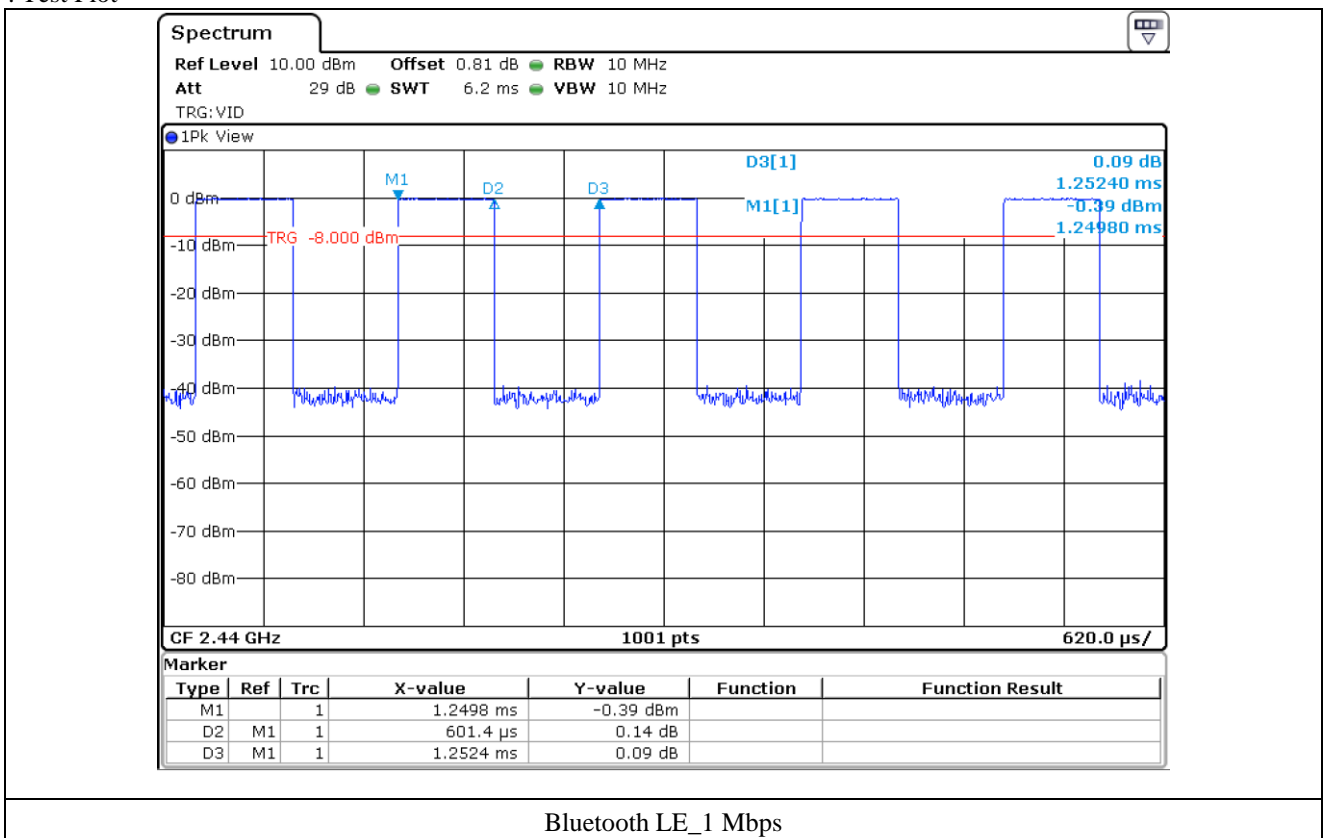

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to AC Adapter. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Charging Mode & Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

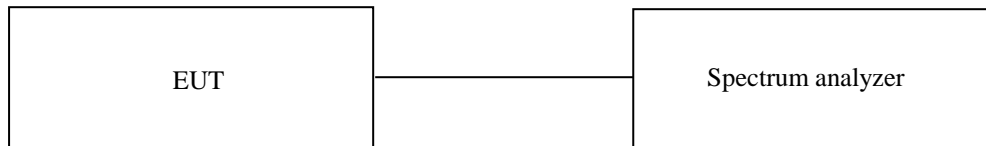


7.3 Test Date


September 13, 2022 ~ September 21, 2022

7.4 Test data for 1 Mbps


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	709.30	500.00	209.30
Middle	2 440.00	709.30	500.00	209.30
High	2 480.00	709.30	500.00	209.30

Remark. Margin = Measured Value - Limit

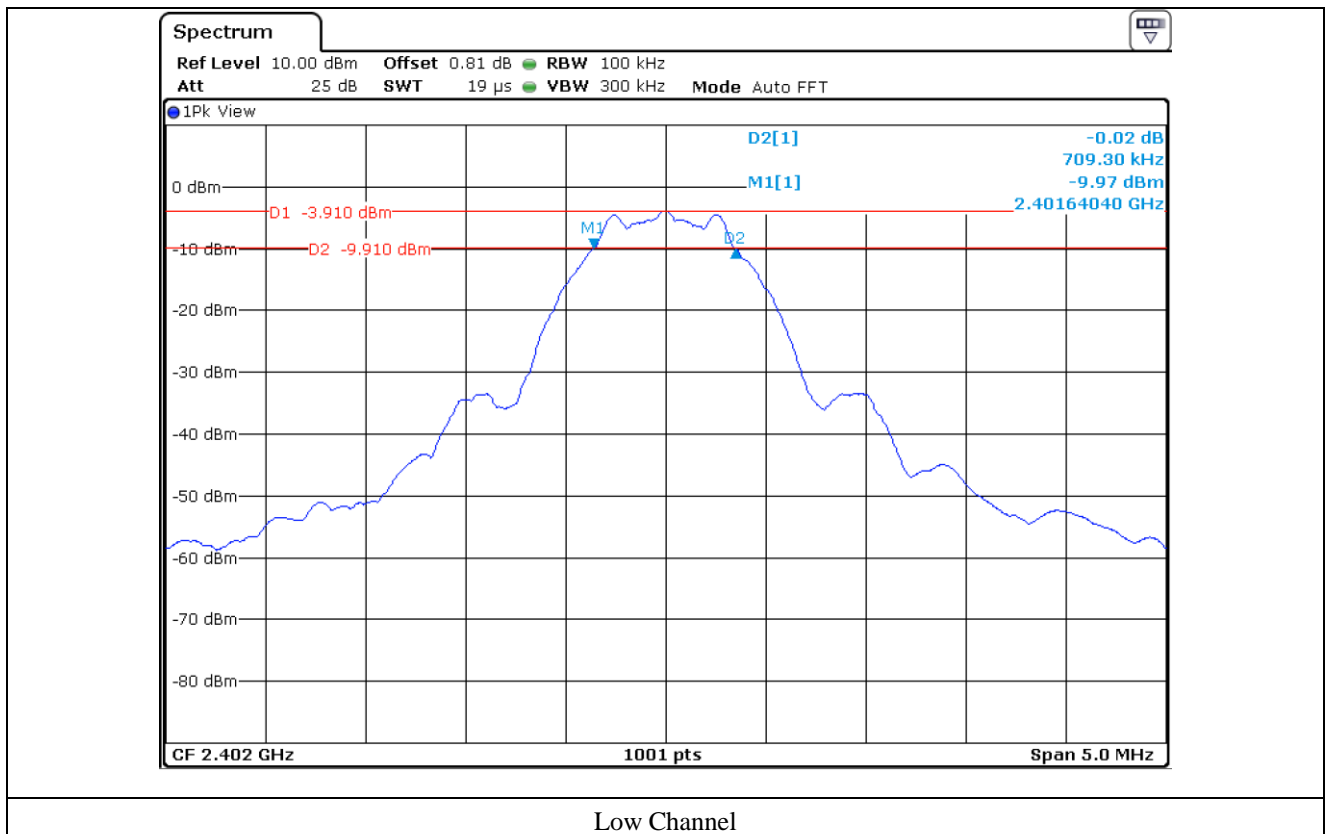

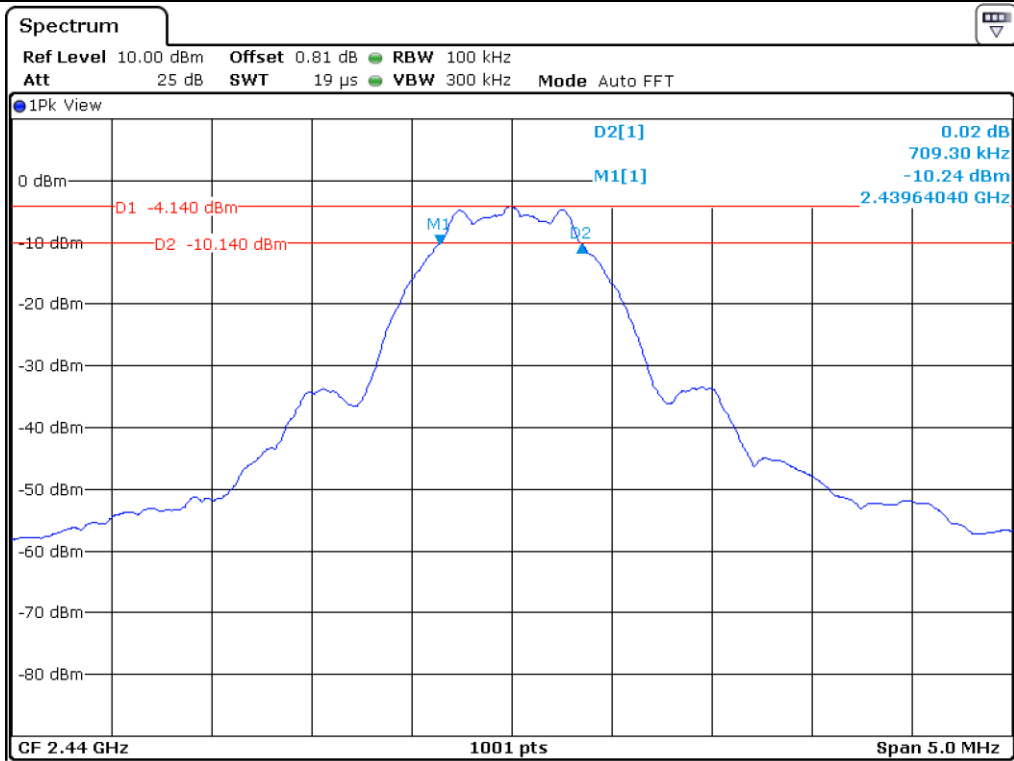

Middle Channel

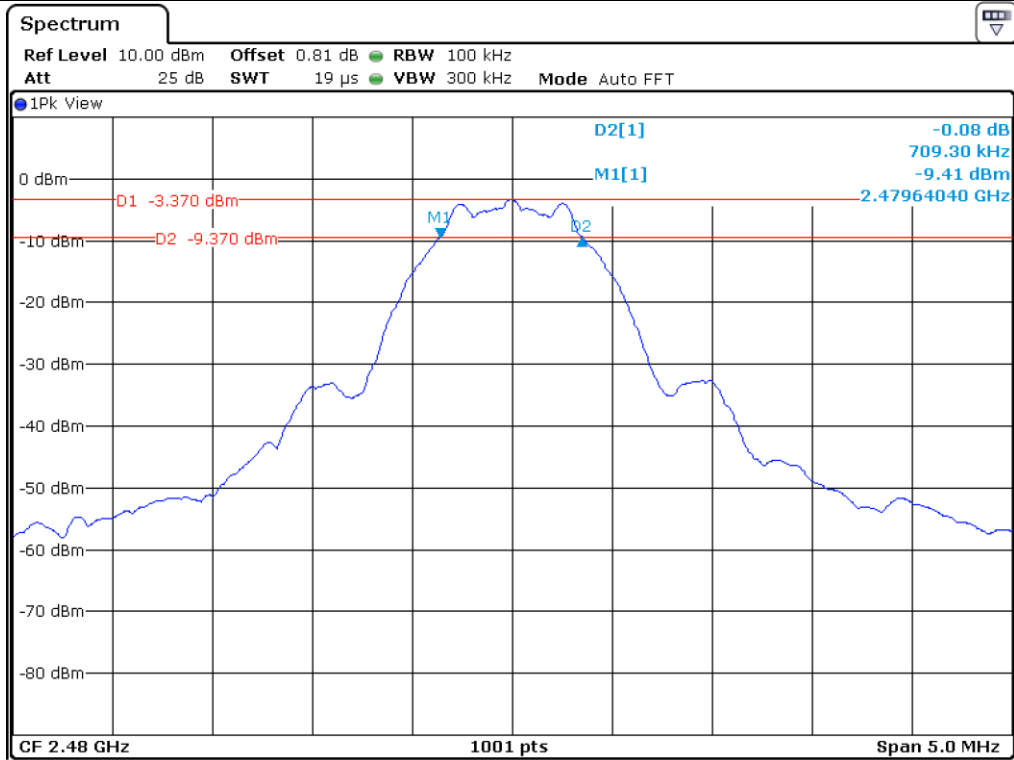

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

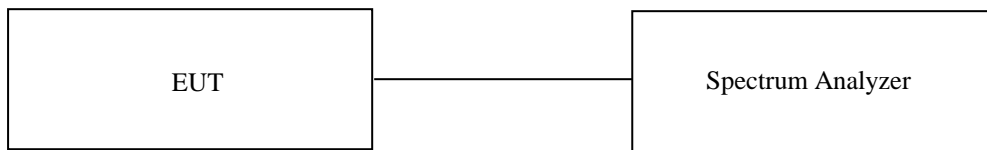

8.3 Test Date


September 13, 2022 ~ September 21, 2022


8.4 Test data for 1 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-3.83	30.00	33.83
MIDDLE	2 440.00	-3.98	30.00	33.98
HIGH	2 480.00	-3.22	30.00	33.22

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

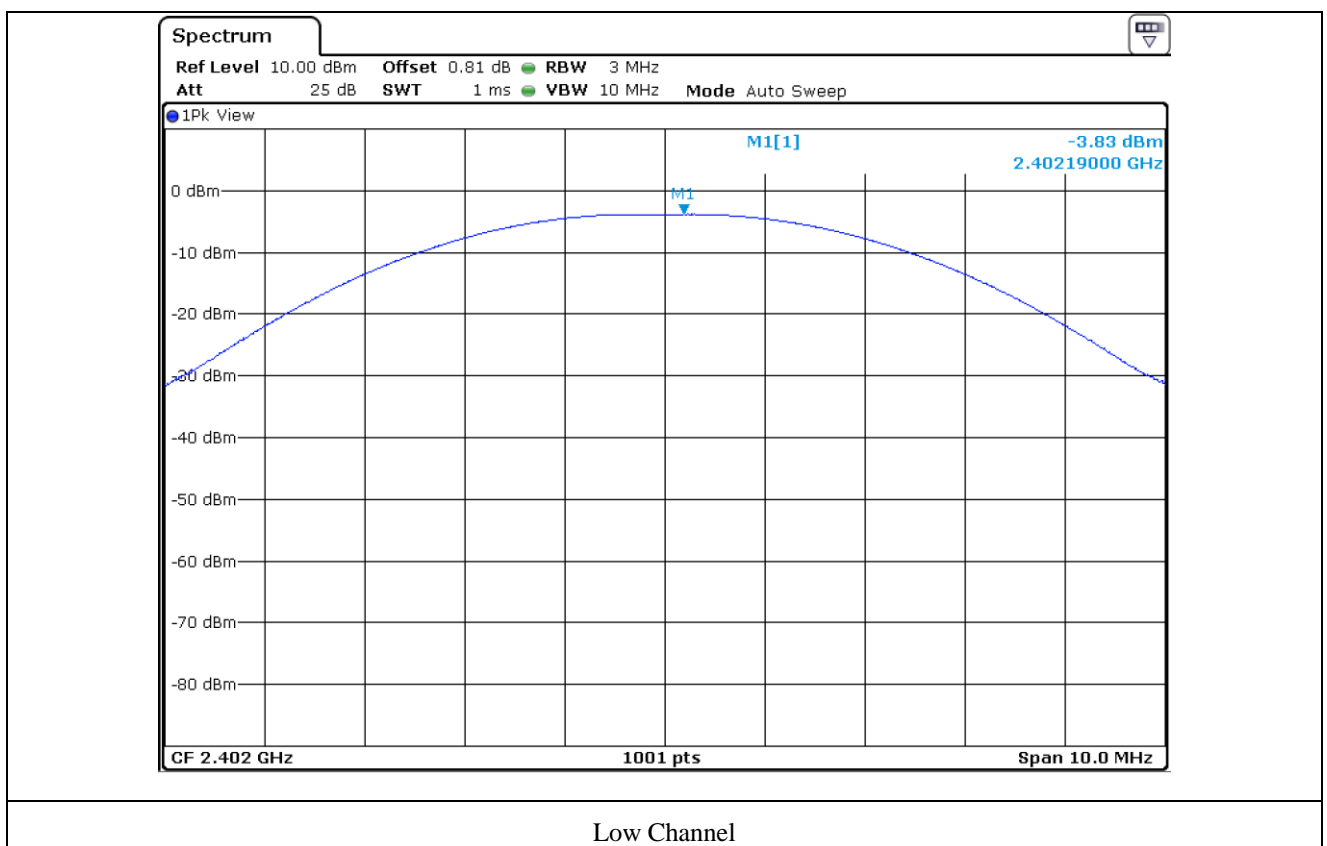

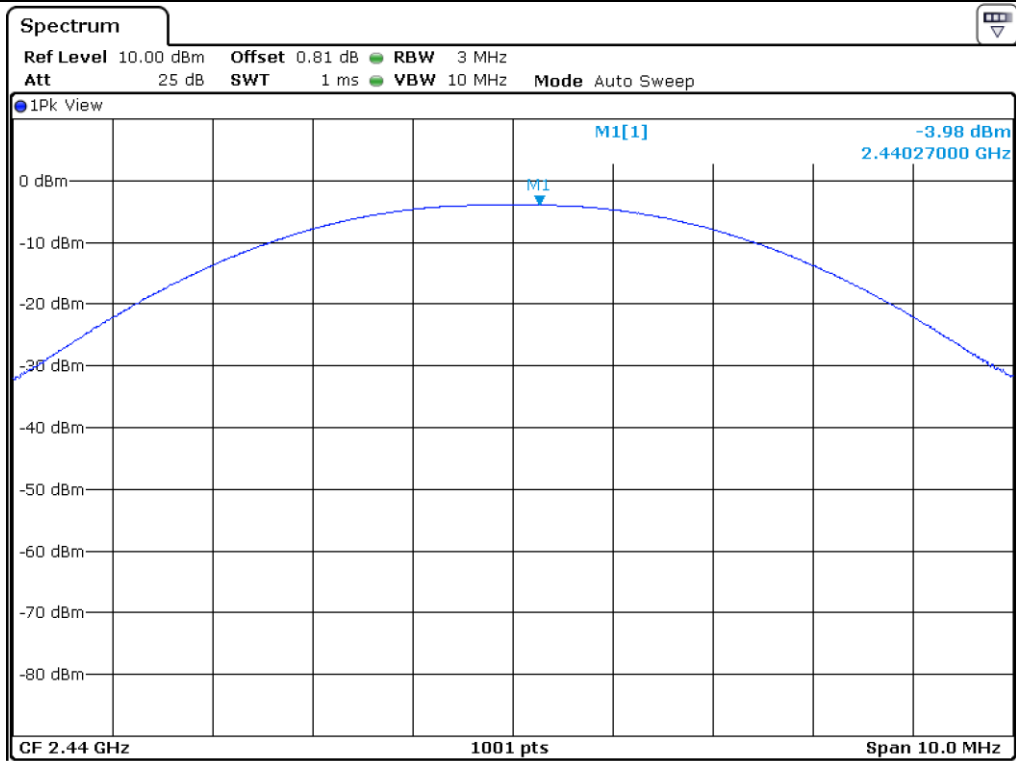

Middle Channel

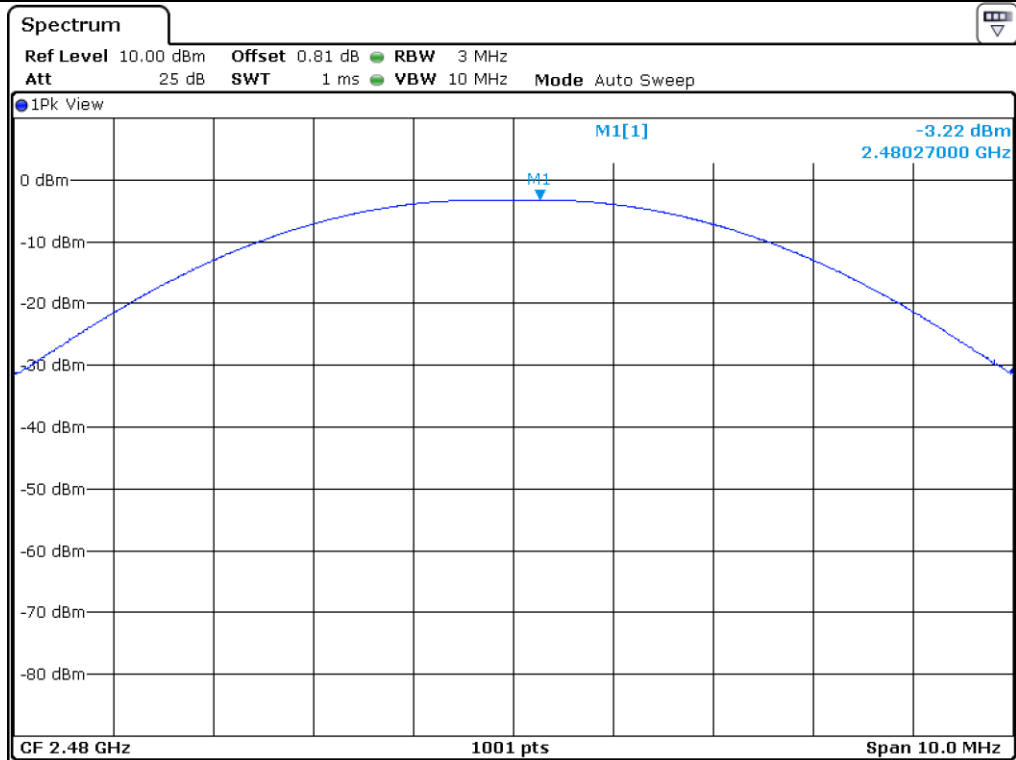

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

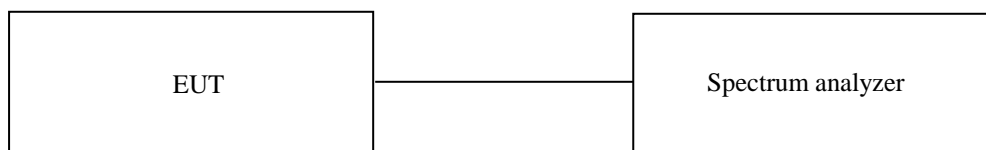

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date


September 13, 2022 ~ September 21, 2022

9.5 Test data for conducted emission


9.5.1 Test data for 1 Mbps

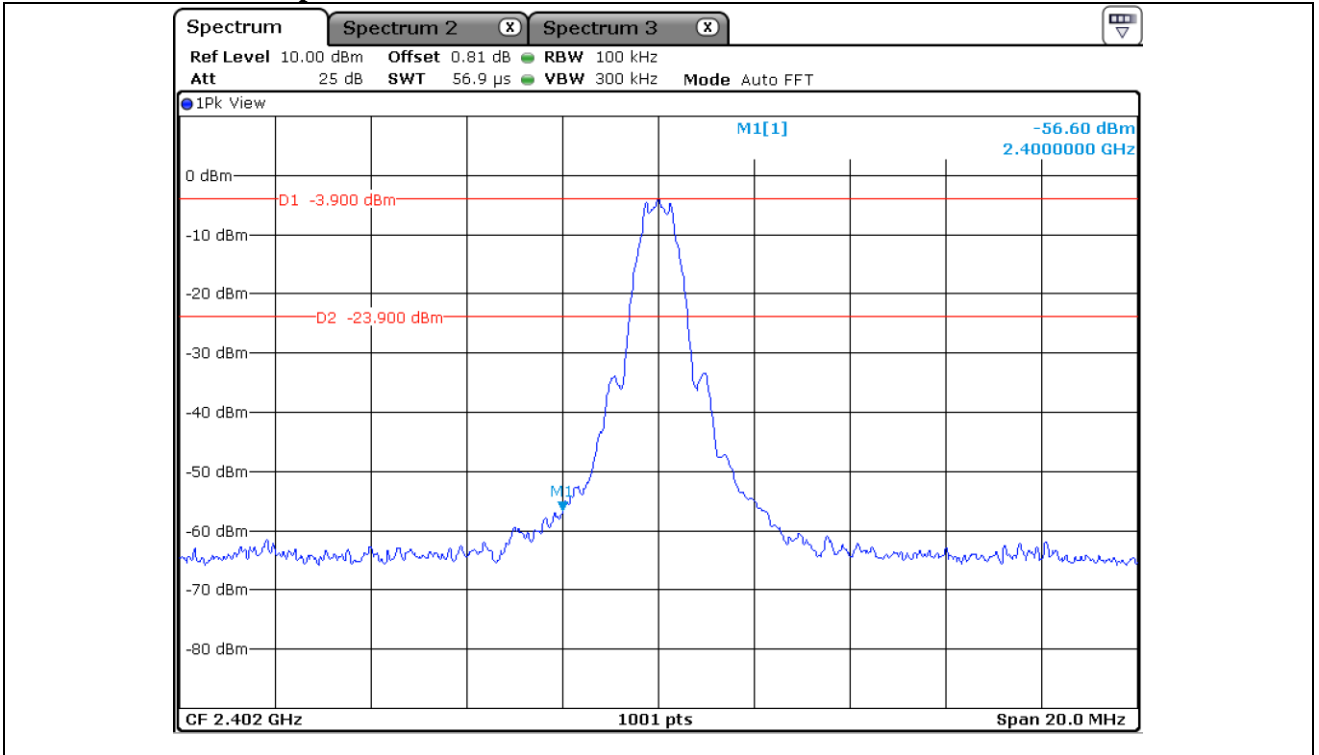


Low Channel

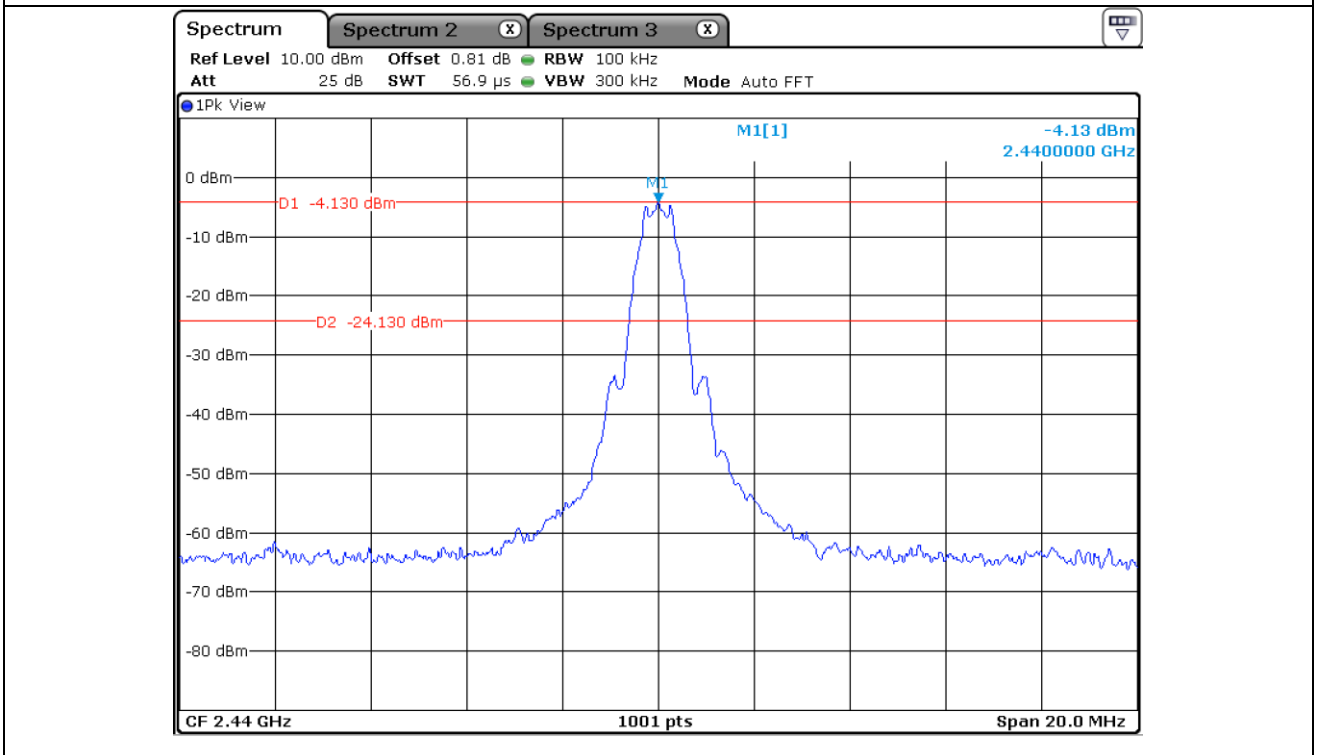


Middle Channel

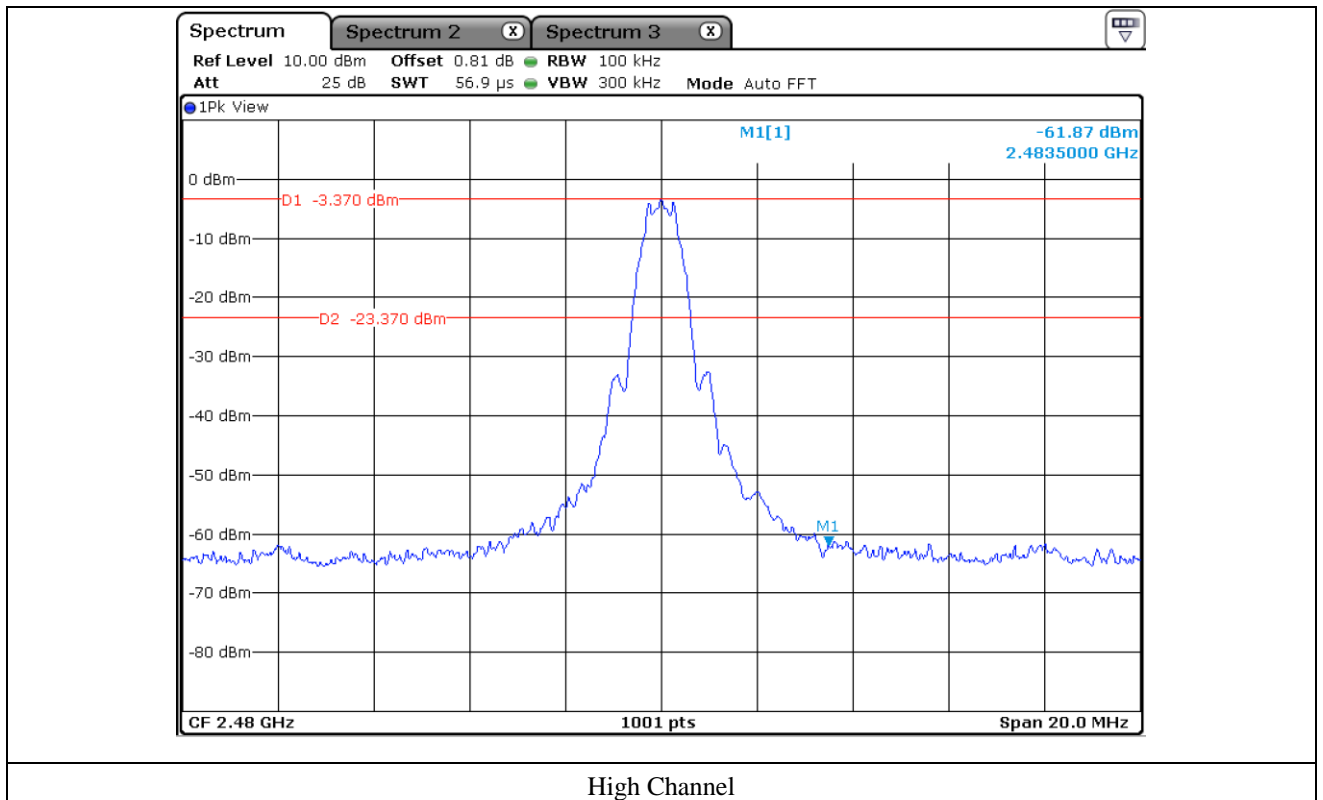


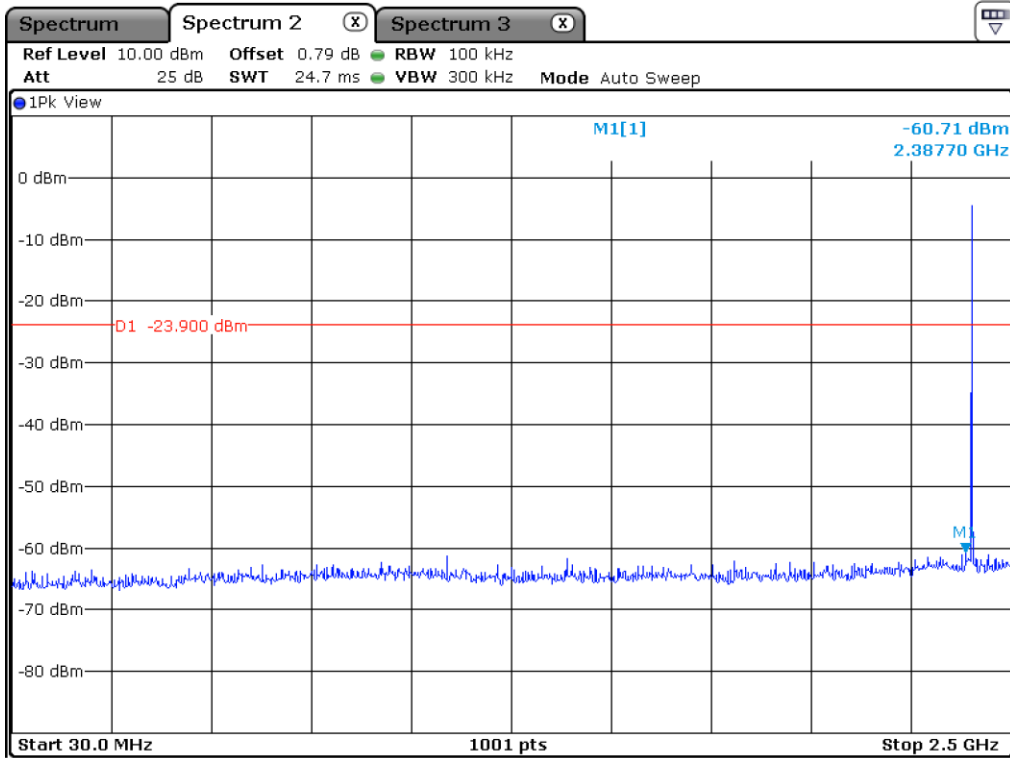


Low Channel

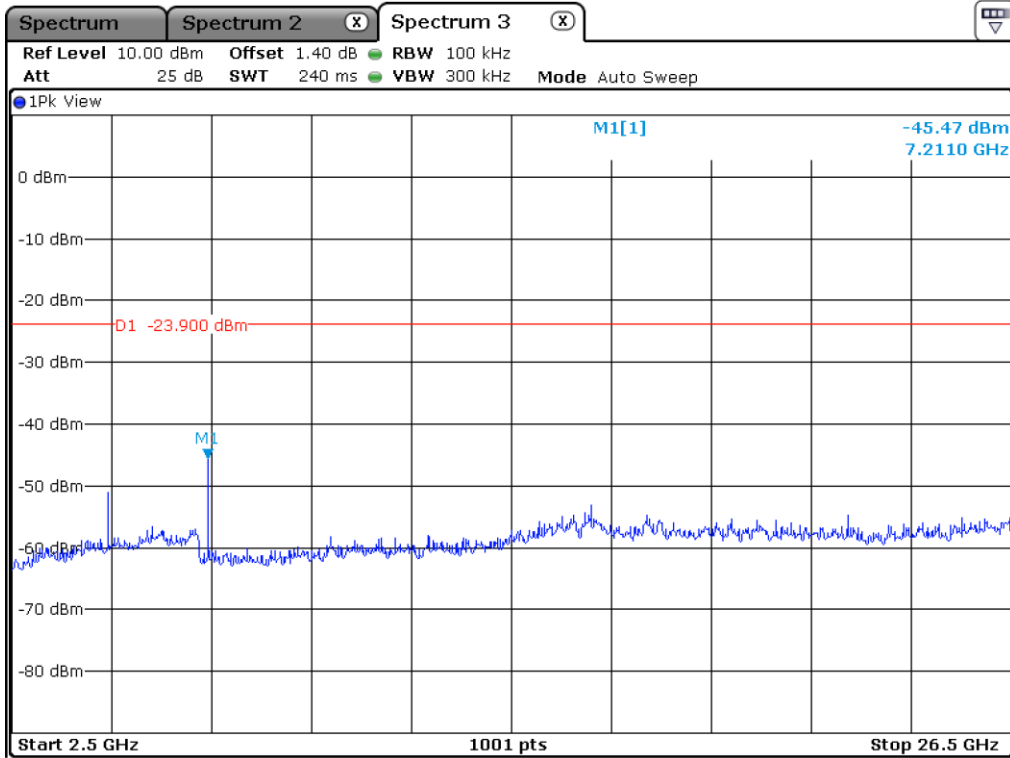


Low Channel

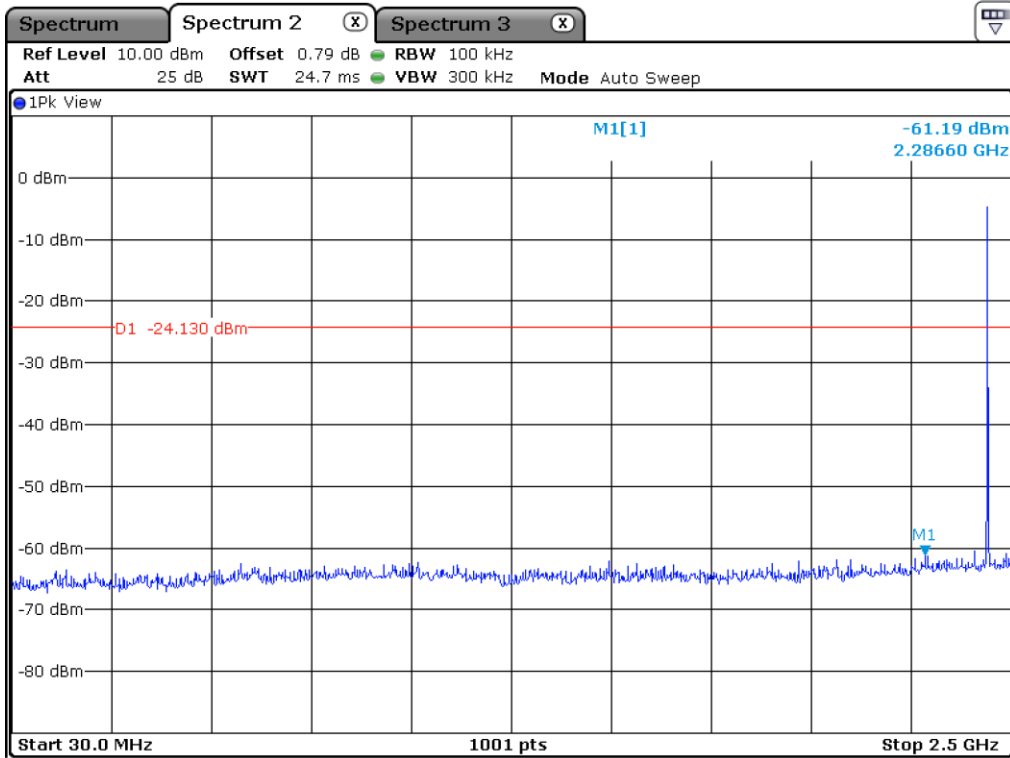


Middle Channel

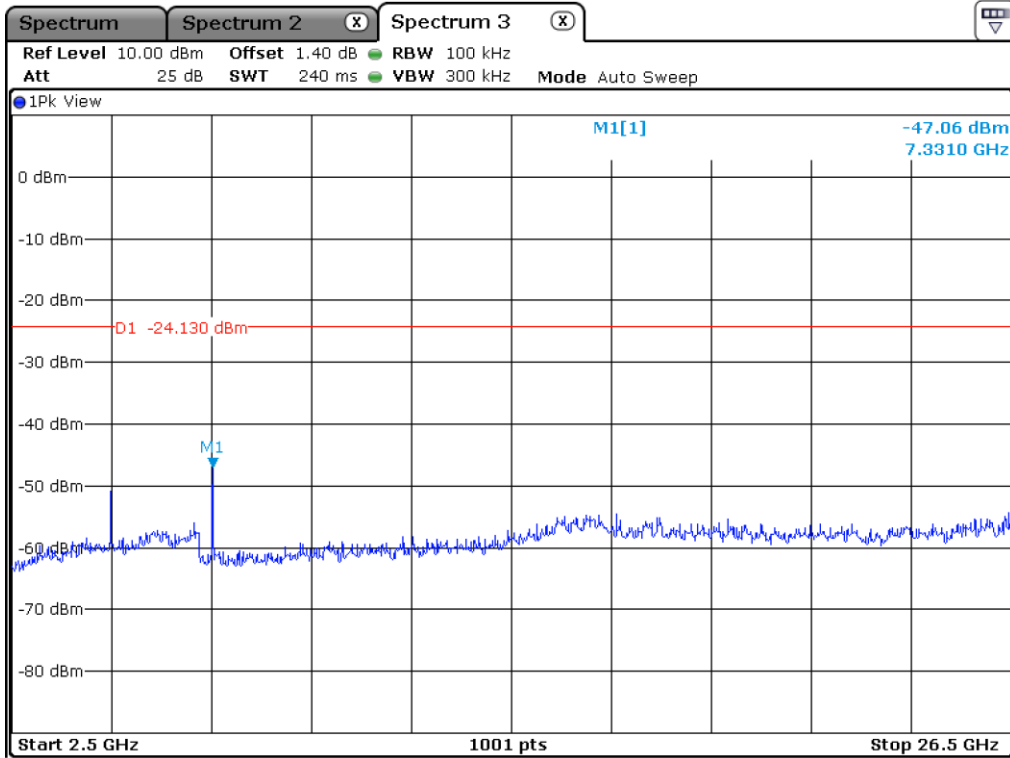

Middle Channel

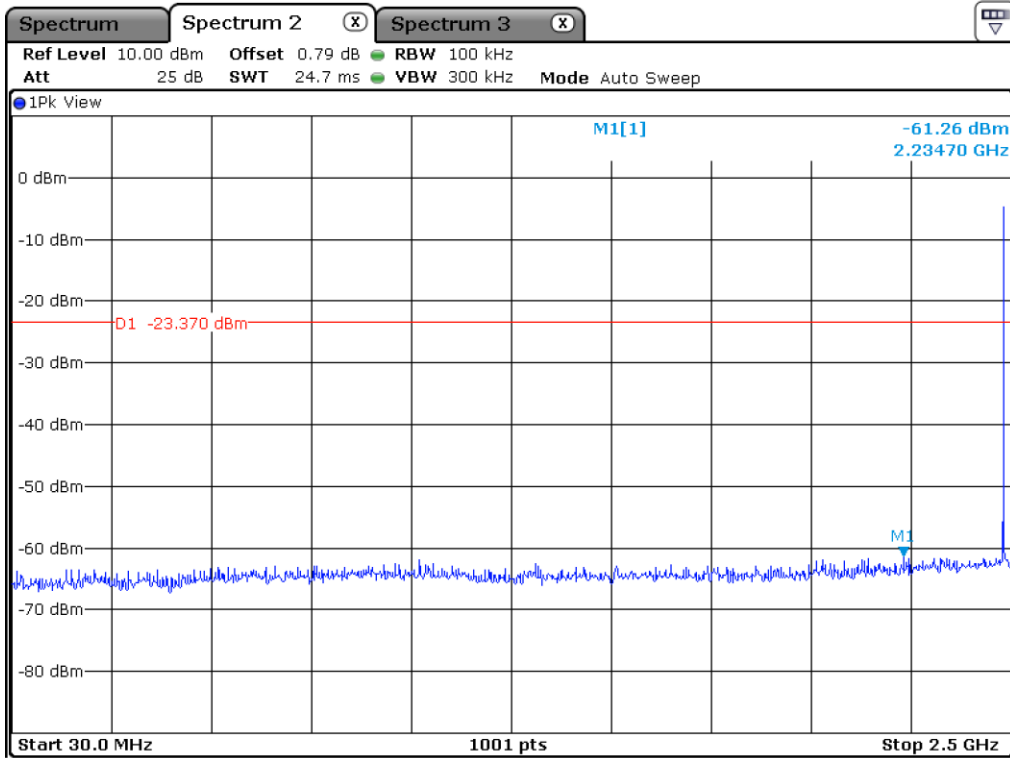

High Channel

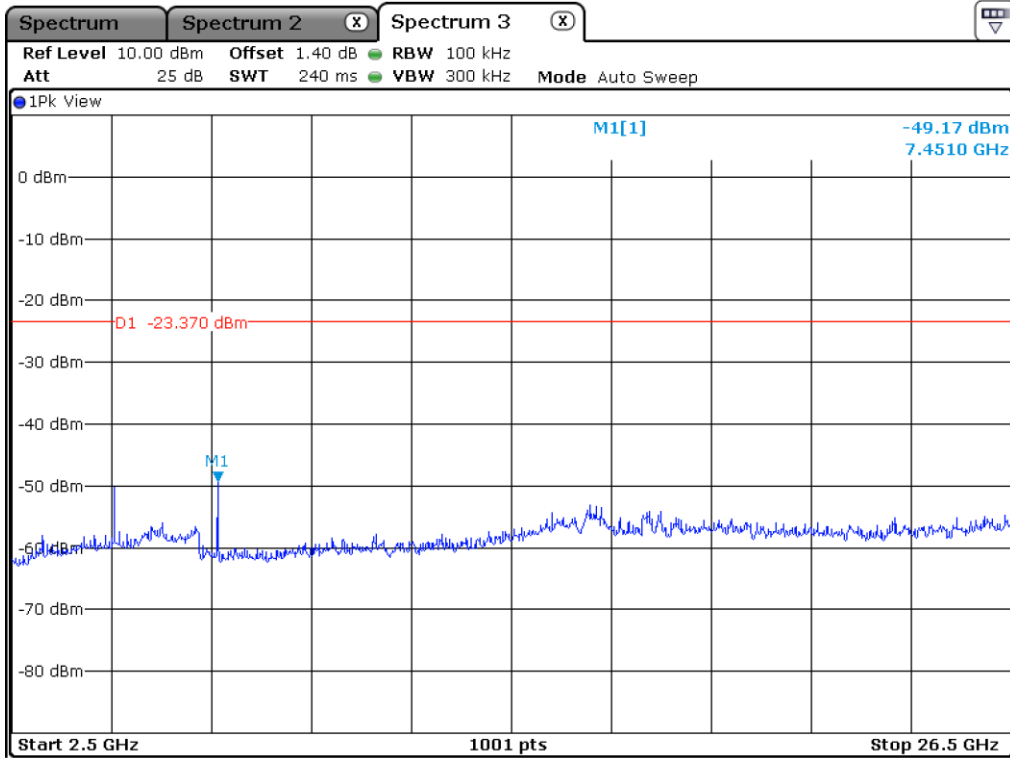

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

9.6.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 48.02 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 317.86	60.52	Peak	H	27.69	7.01	42.76	-	52.46	74.00	21.54
2 330.36	48.55	Average	H	27.54	7.01	42.77	3.19	43.52	54.00	10.48
2 376.50	60.33	Peak	V	27.35	7.11	42.79	-	52.00	74.00	22.00
2 348.83	48.62	Average	V	27.31	7.01	42.77	3.19	43.36	54.00	10.64
Test Data for High Channel										
2 491.16	60.63	Peak	H	27.42	7.17	42.85	-	52.37	74.00	21.63
2 483.75	48.74	Average	H	27.43	7.17	42.84	3.19	43.69	54.00	10.31
2 483.51	61.19	Peak	V	27.43	7.17	42.84	-	52.95	74.00	21.05
2 494.72	48.72	Average	V	27.41	7.17	42.85	3.19	43.64	54.00	10.36

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

9.6.2 Spurious & Harmonic Radiated Emission

9.6.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 48.02 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.17	51.67	Peak	H	31.29	9.98	44.04	-	48.90	74.00	25.10
4 803.89	40.55	Average	H	31.29	9.98	44.04	3.19	40.97	54.00	13.03
4 804.29	52.05	Peak	V	31.29	9.98	44.04	-	49.28	74.00	24.72
4 804.32	40.70	Average	V	31.29	9.98	44.04	3.19	41.12	54.00	12.88
7 205.51	54.37	Peak	H	36.02	12.21	44.94	-	57.66	74.00	16.34
7 206.60	41.56	Average	H	36.03	12.21	44.93	3.19	48.06	54.00	5.94
7 206.23	55.37	Peak	V	36.02	12.21	44.94	-	58.66	74.00	15.34
7 206.30	44.91	Average	V	36.03	12.21	44.93	3.19	51.41	54.00	2.59
Test Data for Middle Channel										
4 880.31	52.08	Peak	H	31.26	10.22	44.06	-	49.50	74.00	24.50
4 880.49	41.05	Average	H	31.26	10.22	44.06	3.19	41.66	54.00	12.34
4 880.30	52.64	Peak	V	31.26	10.22	44.06	-	50.06	74.00	23.94
4 880.05	40.70	Average	V	31.26	10.22	44.06	3.19	41.31	54.00	12.69
7 322.49	54.89	Peak	H	36.30	12.53	44.84	-	58.88	74.00	15.12
7 319.64	42.18	Average	H	36.30	12.53	44.84	3.19	49.36	54.00	4.64
7 319.57	54.88	Peak	V	36.30	12.53	44.84	-	58.87	74.00	15.13
7 320.41	42.60	Average	V	36.30	12.53	44.84	3.19	49.78	54.00	4.22

Test Data for High Channel										
4 960.43	54.79	Peak	H	31.46	10.21	44.09	-	52.37	74.00	21.63
4 959.78	44.21	Average	H	31.46	10.21	44.09	3.19	44.98	54.00	9.02
4 959.76	52.49	Peak	V	31.46	10.21	44.09	-	50.07	74.00	23.93
4 960.01	42.45	Average	V	31.46	10.21	44.09	3.19	43.22	54.00	10.78
7 443.02	53.28	Peak	H	36.40	12.51	44.75	-	57.44	74.00	16.56
7 441.68	41.10	Average	H	36.40	12.51	44.75	3.19	48.45	54.00	5.55
7 440.72	53.48	Peak	V	36.40	12.51	44.75	-	57.64	74.00	16.36
7 443.44	41.11	Average	V	36.40	12.51	44.75	3.19	48.46	54.00	5.54

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{AMP Gain} + \text{Duty Factor}$$

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

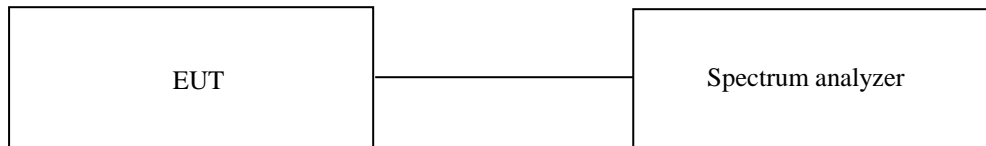

10.3 Test Date

September 13, 2022 ~ September 21, 2022


10.4 Test data for 1 Mbps


- Test Result : Pass

- Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-19.08	8.00	27.08
Middle	2 440.00	-19.26	8.00	27.26
High	2 480.00	-18.44	8.00	26.44

Remark. Margin = Limit – Measured value

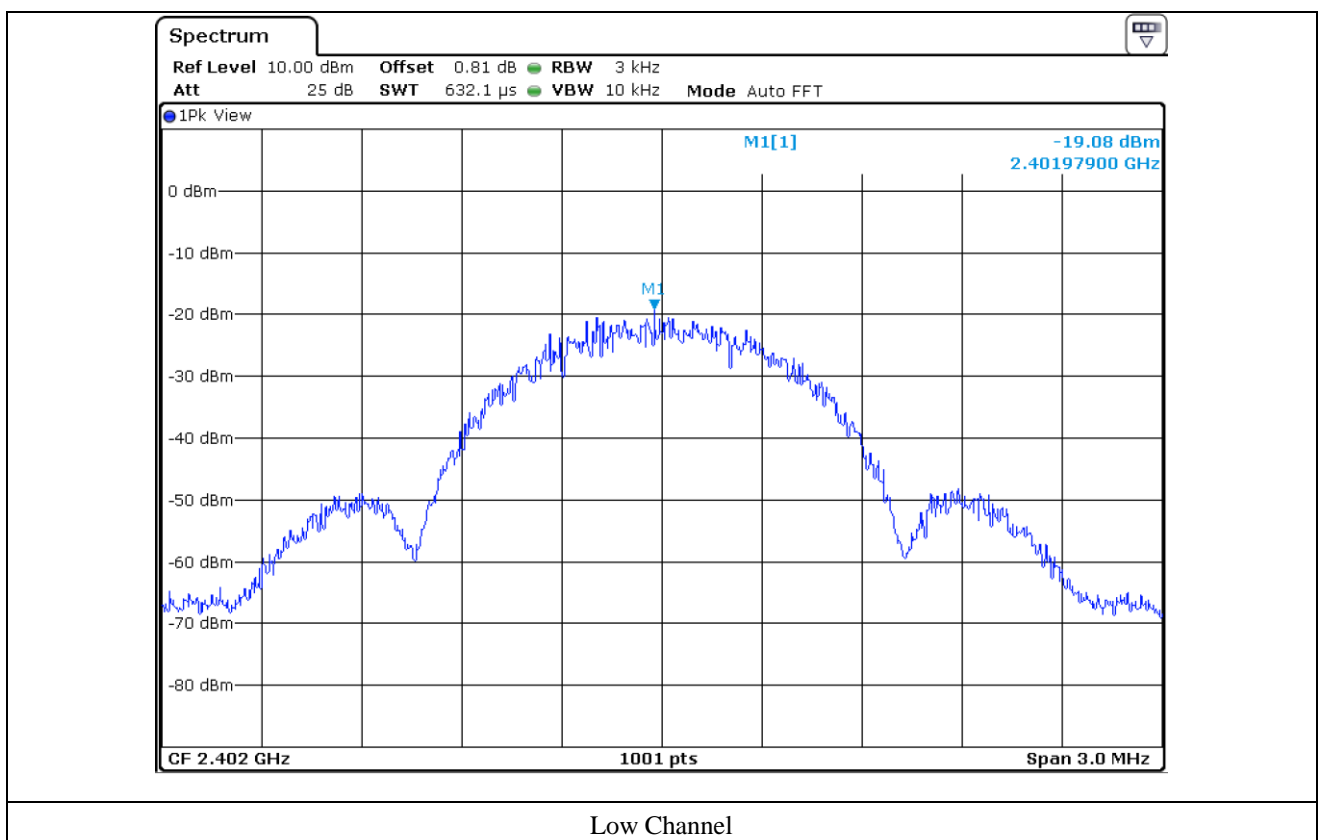

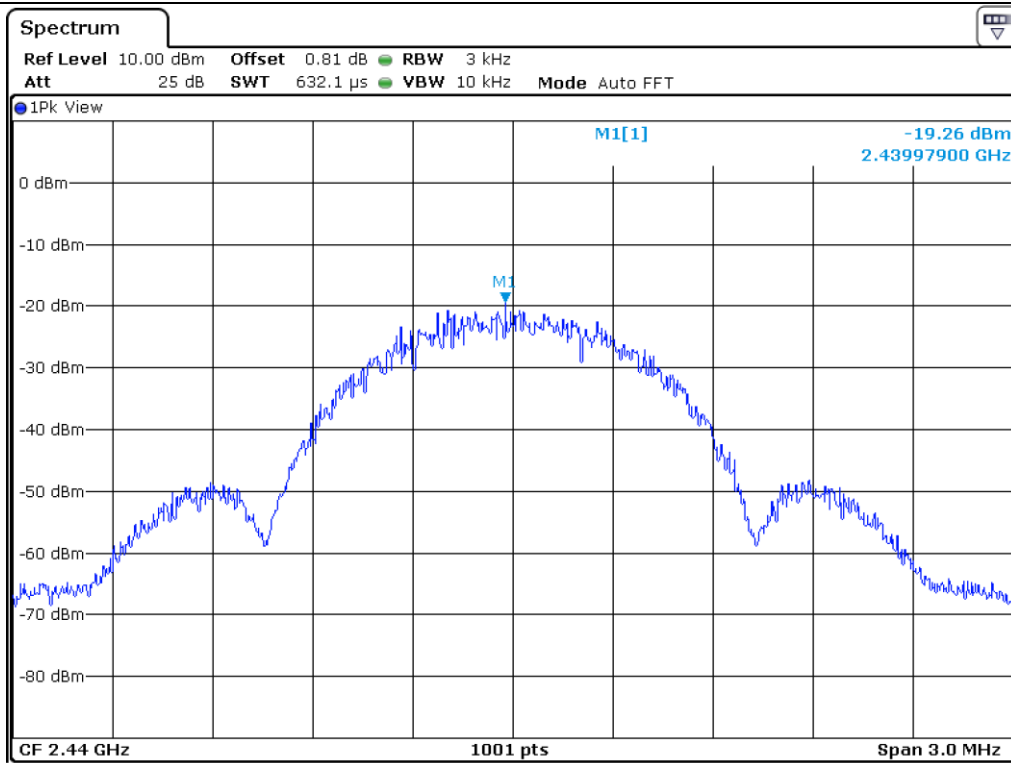

Middle Channel

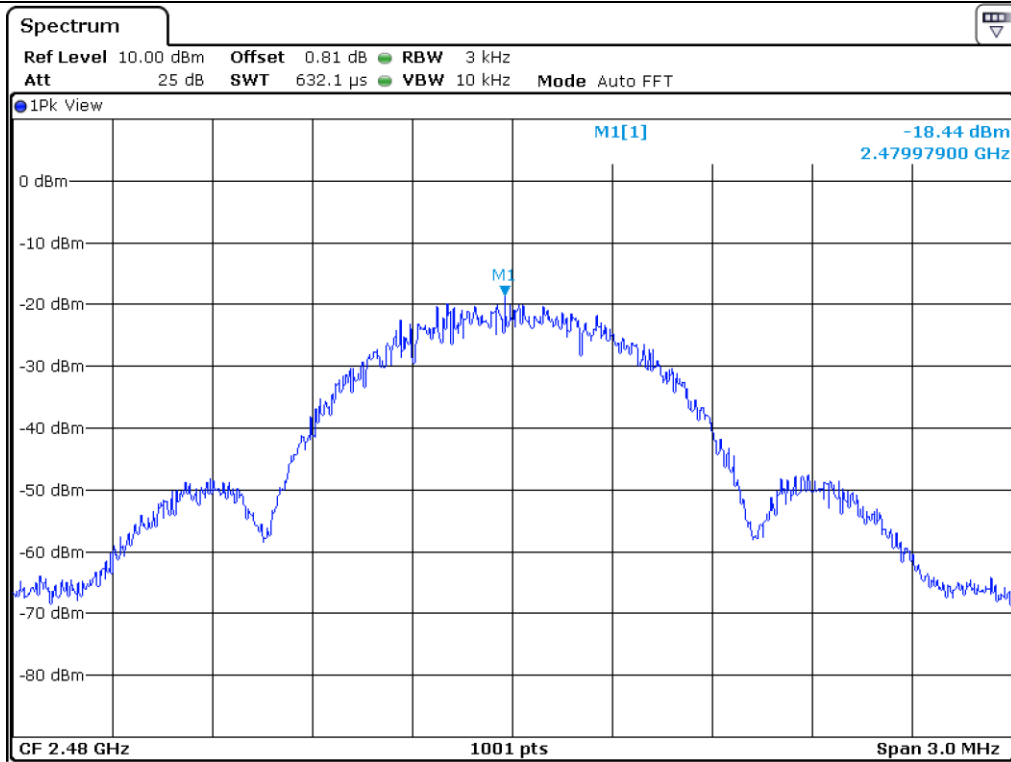

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 46 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

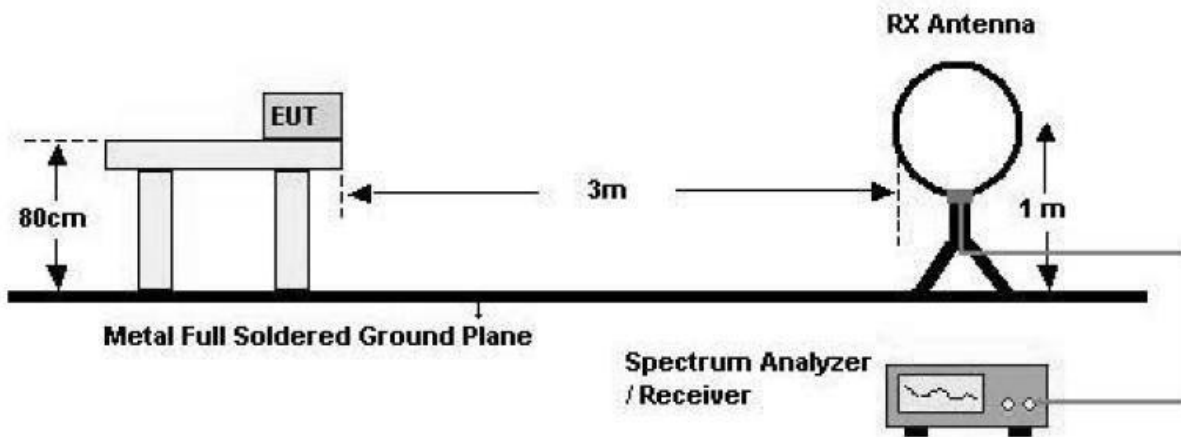

2. 30 MHz - 1 GHz

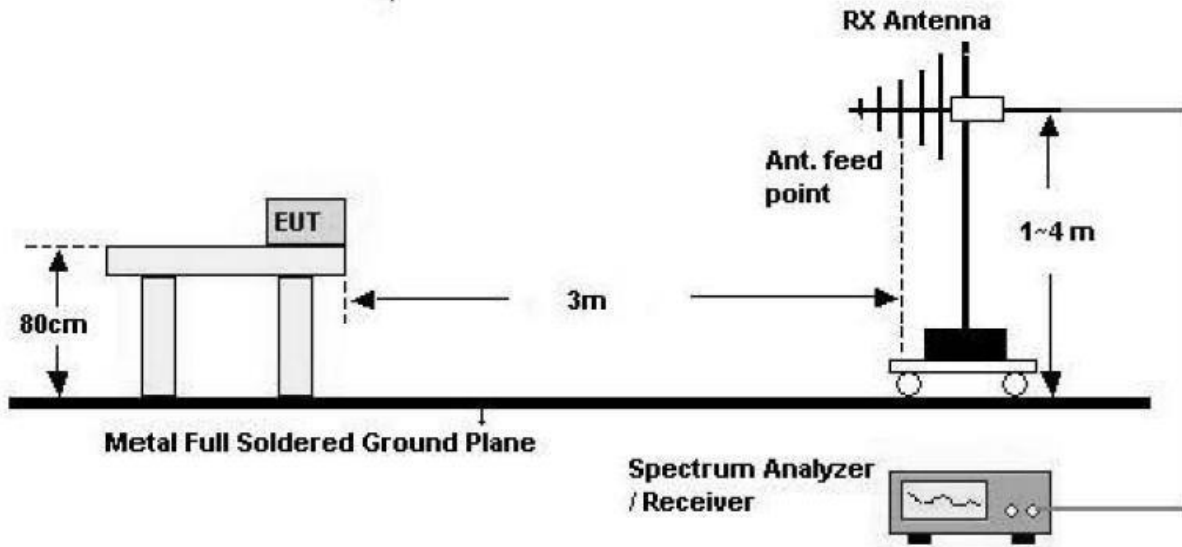

3. Above 1 GHz

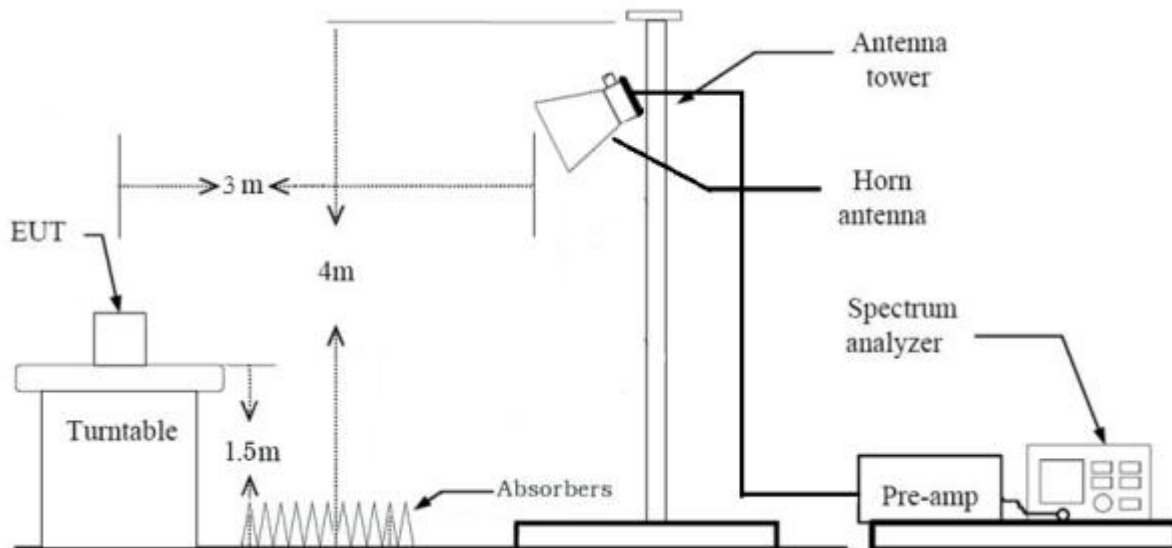

11.3 Test Date

September 13, 2022 ~ September 21, 2022


11.4 Test data for 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : AKOiHeart

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

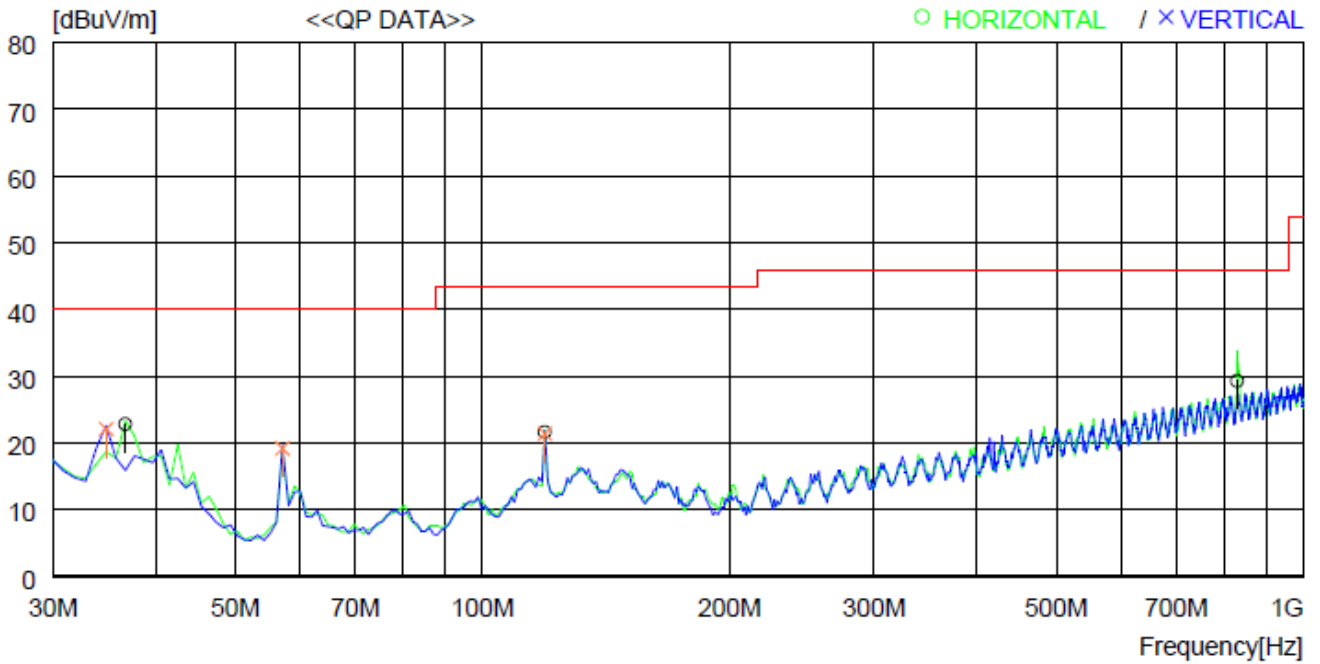

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	36.790	35.6	18.4	0.8	32.0	22.8	40.0	17.2	400	162
2	119.240	33.8	18.5	1.4	32.1	21.6	43.5	21.9	100	5
3	830.241	30.5	27.2	3.8	32.2	29.3	46.0	16.7	200	359
----- Vertical -----										
4	34.850	34.1	19.3	0.8	32.1	22.1	40.0	17.9	400	114
5	57.160	37.9	12.3	1.0	32.0	19.2	40.0	20.8	100	272
6	119.240	33.6	18.5	1.4	32.1	21.4	43.5	22.1	400	204

11.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 23 °C
Relative humidity : 46 % R.H.

12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

12.3 Test date

September 13, 2022 ~ September 21, 2022


12.4 Test data

- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

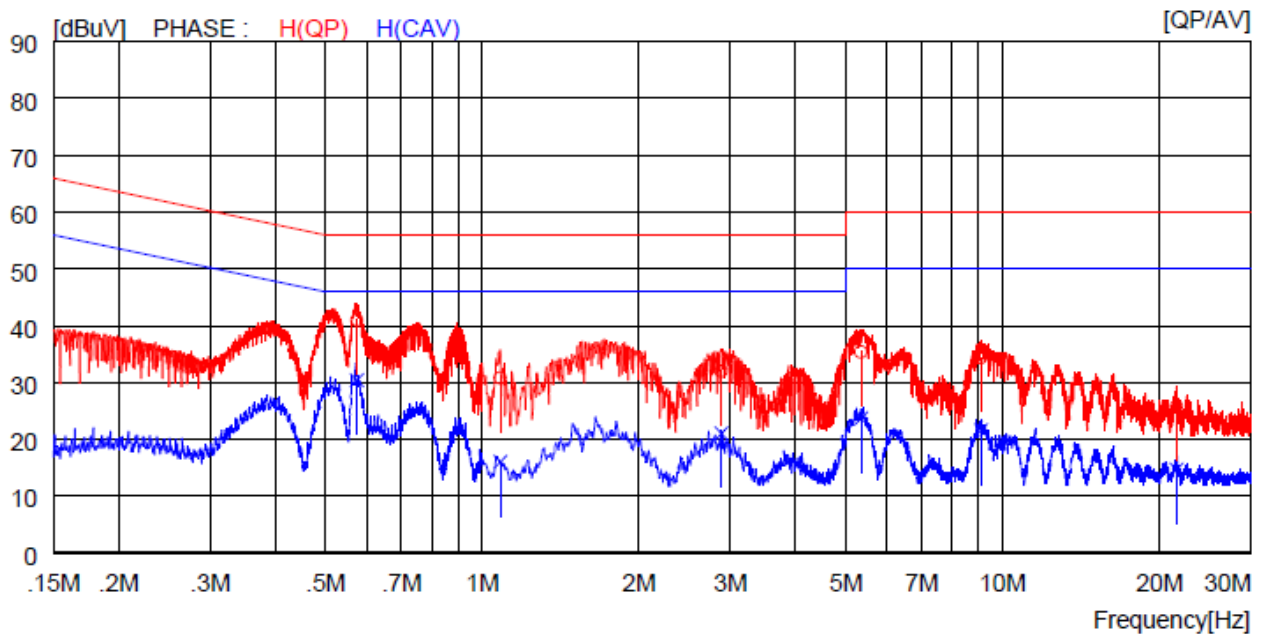

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.57500	31.0	----	10.0	41.0	----	56.0	----	15.0	----	H (QP)
2	1.08400	20.7	----	10.1	30.8	----	56.0	----	25.2	----	H (QP)
3	2.88400	21.9	----	10.1	32.0	----	56.0	----	24.0	----	H (QP)
4	5.35000	25.2	----	10.2	35.4	----	60.0	----	24.6	----	H (QP)
5	9.10000	24.2	----	10.2	34.4	----	60.0	----	25.6	----	H (QP)
6	21.61000	15.3	----	10.5	25.8	----	60.0	----	34.2	----	H (QP)
7	0.57500	----	20.4	10.0	----	30.4	----	46.0	----	15.6	H (CAV)
8	1.08400	----	5.9	10.1	----	16.0	----	46.0	----	30.0	H (CAV)
9	2.88400	----	10.9	10.1	----	21.0	----	46.0	----	25.0	H (CAV)
10	5.35000	----	13.5	10.2	----	23.7	----	50.0	----	26.3	H (CAV)
11	9.10000	----	11.4	10.2	----	21.6	----	50.0	----	28.4	H (CAV)
12	21.61000	----	4.2	10.5	----	14.7	----	50.0	----	35.3	H (CAV)

-. Tested Line : NEUTRAL LINE

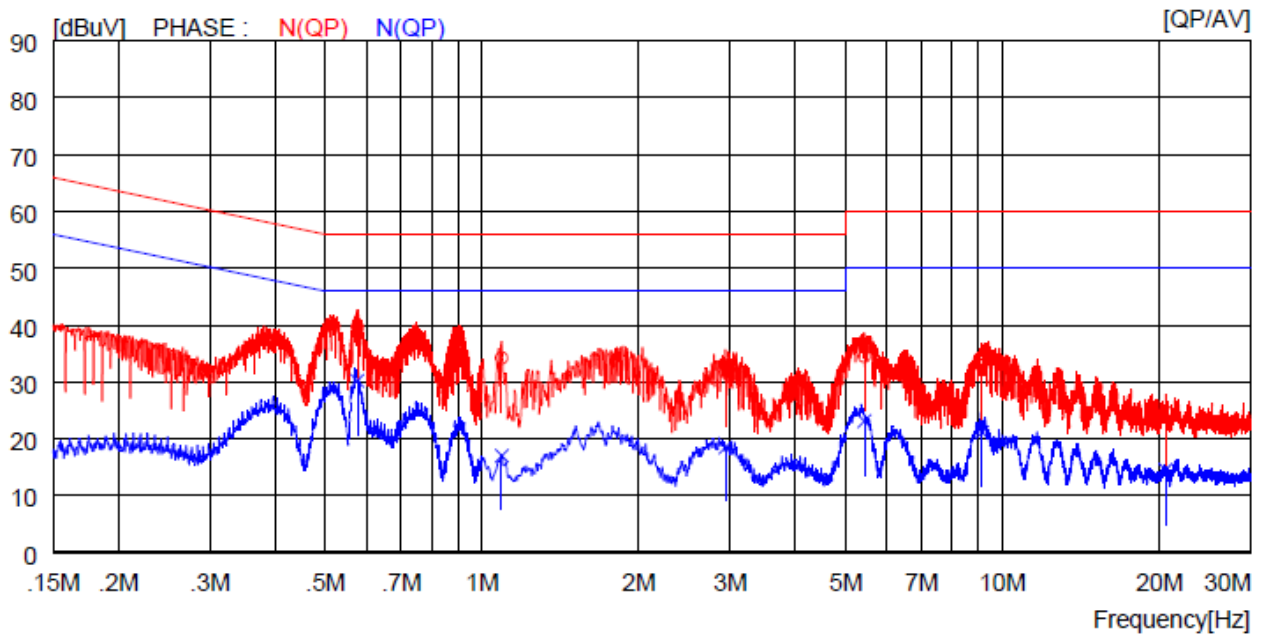

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.57600	29.7	----	10.0	39.7	----	56.0	----	16.3	----	N(QP)
2	1.09200	24.1	----	10.1	34.2	----	56.0	----	21.8	----	N(QP)
3	2.93600	21.6	----	10.1	31.7	----	56.0	----	24.3	----	N(QP)
4	5.43000	24.3	----	10.2	34.5	----	60.0	----	25.5	----	N(QP)
5	9.14000	22.7	----	10.2	32.9	----	60.0	----	27.1	----	N(QP)
6	20.59000	14.3	----	10.5	24.8	----	60.0	----	35.2	----	N(QP)
7	0.57600	----	20.2	10.0	----	30.2	----	46.0	----	15.8	N(CAV)
8	1.09200	----	6.9	10.1	----	17.0	----	46.0	----	29.0	N(CAV)
9	2.93600	----	8.4	10.1	----	18.5	----	46.0	----	27.5	N(CAV)
10	5.43000	----	12.9	10.2	----	23.1	----	50.0	----	26.9	N(CAV)
11	9.14000	----	10.9	10.2	----	21.1	----	50.0	----	28.9	N(CAV)
12	20.59000	----	4.0	10.5	----	14.5	----	50.0	----	35.5	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102196	Apr. 11, 2022 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC Power Supply	5071069	Jan. 06, 2022 (1Y)
WT-A3882-R10	Microwave	Cavity Band Rejection Filter	WT22040502-1	Jun. 21, 2022 (1Y)
ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 07, 2022 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 14, 2021 (1Y)
ELNA18-40	EXYNOD	RF Pre Amplifier	27594	Jun. 22, 2022 (1Y)
ELNA40-45	EXYNOD	RF Pre Amplifier	25339-27648	Jun. 22, 2022 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2022 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 07, 2022 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 05, 2022 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 06, 2022 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
ESCI	Rohde & Schwarz	EMI TEST RECEIVER	101012	Oct. 20, 2021 (1Y)
NSLK8128	Schwarzbeck	AMN	8128216	Mar. 08, 2022 (1Y)
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	100655	Mar. 14, 2022 (1Y)