

# EXPOSURE REPORT

FCC ID: 2ATCAUP2QC10AWA

Date of issue: Oct. 27, 2020

Report Number: MTi20073017-4E2

---

Sample Description: ALOGIC 4-in-1 Wireless Charging Dock

---

Model(s): UP2QC10AWA

---

Applicant: ALOGIC Corporation Pty Ltd.

---

Address: Level 40, 140 William St, Melbourne, Victoria 3000 Australia

---

Date of Test: Agu. 29, 2020 - Oct. 16, 2020

---

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel: (86-755) 88850135

Fax: (86-755) 88850136

Web: <http://www.mtitest.com>

E-mail: [mti@51mti.com](mailto:mti@51mti.com)

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China

# Test Result Certification

Applicant's name: ALOGIC Corporation Pty Ltd.  
\_\_\_\_\_  
Address: Level 40, 140 William St, Melbourne, Victoria 3000 Australia  
\_\_\_\_\_  
Manufacture's name: ALOGIC Corporation Pty Ltd.  
\_\_\_\_\_  
Address: Level 40, 140 William St, Melbourne, Victoria 3000 Australia  
\_\_\_\_\_  
Factory: Dongguan DBK Energy Technology Co., Ltd  
\_\_\_\_\_  
Address: No. 51, Zhangshen Mid Rd, Xuzhen Community, Zhangmutou  
Town, Dongguan, Guangdong, China  
\_\_\_\_\_  
Product name: ALOGIC 4-in-1 Wireless Charging Dock  
\_\_\_\_\_  
Trademark: ALOGIC  
\_\_\_\_\_  
Model name: UP2QC10AWA  
\_\_\_\_\_  
Standard: FCC CFR 47 PART 1 , 1.1310  
\_\_\_\_\_  
RF Exposure Procedures: KDB 680106 D01 RF Exposure Wireless Charging App v03  
\_\_\_\_\_

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



Danny Xu

Oct. 16, 2020

Reviewed by:



Leo Su

Oct. 27, 2020

Approved by:



Tom Xue

Oct. 27, 2020

## 1 General Information

### 1.1 Description of EUT

Product name:	ALOGIC 4-in-1 Wireless Charging Dock
Brand name:	ALOGIC
Model name:	UP2QC10AWA
Series model:	N/A
Deference in serial model:	N/A
Operation frequency:	115–205 kHz, 326.5 kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna
Power source:	DC 9V from adapter AC 120V/60Hz
Battery:	N/A
Adapter information:	Model Code:A361-09040001 Input AC:100-240V~50/60Hz 1.5A Output DC:9V 4000mA(36W)

### 1.2 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
Watch	/	/	Apple
Load 1	/	/	/
Load 2	/	/	/

### 1.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2xUc(y)$

Radiated emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	±1 degree
Humidity	± 5 %

## 2 Testing site

Test Site	Shenzhen Microtest Co., Ltd
Test Site Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinde Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573



### 3 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E068	Broadband Field Meter	Narda Safety Test Solutions GmbH	NBM-520	D-1699	2019/07/13	2021/07/12
MTI-E069	Probe E-Field	Narda Safety Test Solutions	EF0691	H-0571	2019/07/13	2021/07/12

## 4 Test Results

### 4.4 Maximum permissible exposure

#### 4.4.1 Limit

Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm <sup>2</sup> )	Averaging time(minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0 6	6
300-1500			f/300	6
1500-100000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100000			1	30

f = frequency in MHz \* = Plane-wave equivalent power density

#### 4.4.2 Test Procedures

E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the device and 20 cm above the top surface of the primary/client pair.

These measurements should be repeated for three different client battery levels, 1%, 50%, and 99%.


Record the test results.

KDB 680106 D01 RF Exposure Wireless Charging App v03:

- (1) Power transfer frequency is less than 1MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Note: The device is in compliance with KDB 680106 D01 RF Exposure Wireless Charging App v03 6 conditions.

#### 4.4.3 Test Setup

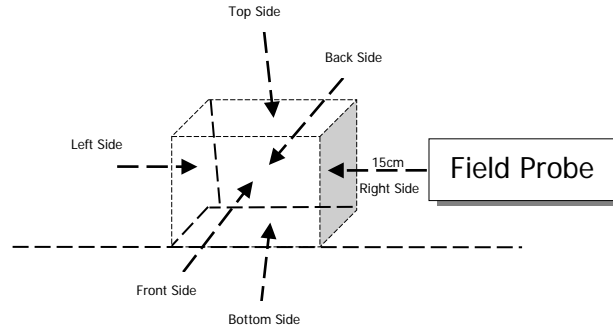

## 4.4.4 Test Result

TX simultaneous two load and apple watch.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	20	0.76	0.0019
<1%	Bottom	15	0.72	0.0017
<1%	Left	15	0.68	0.0014
<1%	Right	15	0.67	0.0012
<1%	Front	15	0.75	0.0009
<1%	Back	15	0.74	0.0016
Limit			614	1.63
Margin Limit (%)			0.124%	0.177%


Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<50%	Top	20	0.72	0.0020
<50%	Bottom	15	0.70	0.0013
<50%	Left	15	0.68	0.0015
<50%	Right	15	0.69	0.0009
<50%	Front	15	0.71	0.0011
<50%	Back	15	0.71	0.0013
Limit			614	1.63
Margin Limit (%)			0.117%	0.123%

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<99%	Top	20	0.73	0.0019
<99%	Bottom	15	0.71	0.0011
<99%	Left	15	0.70	0.0012
<99%	Right	15	0.72	0.0015
<99%	Front	15	0.70	0.0015
<99%	Back	15	0.71	0.0013
Limit			614	1.63
Margin Limit (%)			0.119%	0.117%





4.4.5 MPE Setup photo

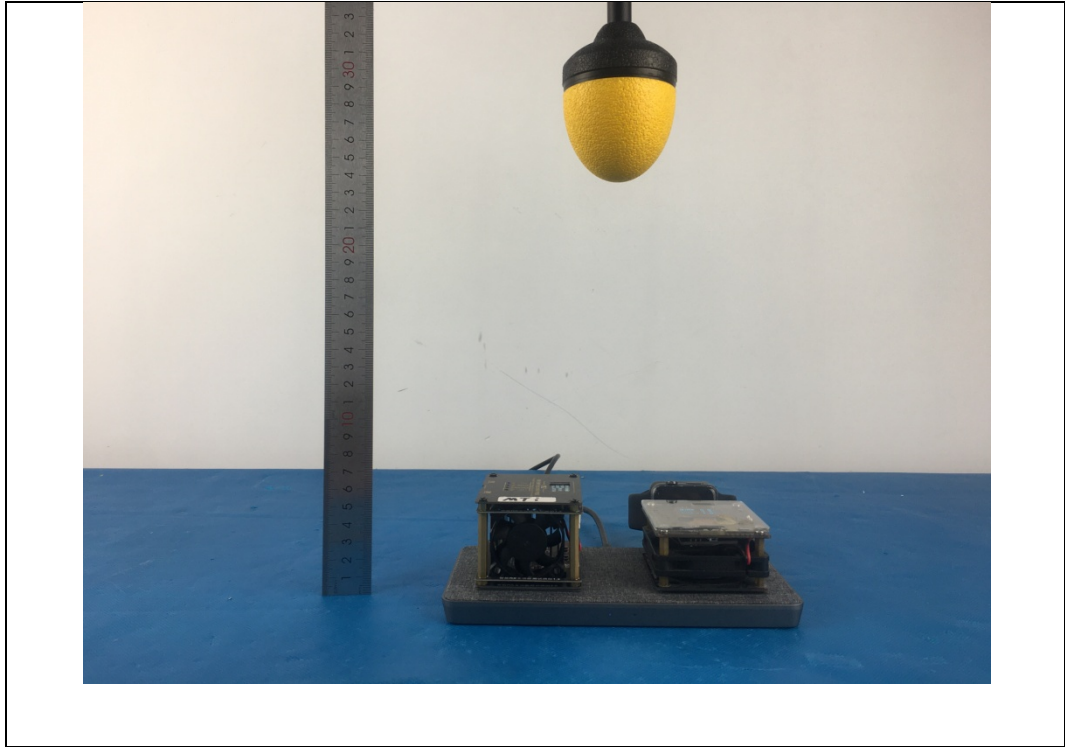

----END OF REPORT----