



# FCC TEST REPORT

FCC ID: 2ATD5HM-1901

On Behalf of

SHENZHEN XINHAI CHUANGDA TECHNOLOGY  
INDUSTRIAL CO.LTD

LED MIRROR

Model No.: HM-1901, HM-1902, HM-1903, HM-1904,  
HM-1905, HM-1906

Prepared for : SHENZHEN XINHAI CHUANGDA TECHNOLOGY INDUSTRIAL  
CO.LTD  
Address : 319, 3/F, JIANGNAN BUILDING, NO. 2 YONGXIANG ROAD,  
BANTIAN STREET, LONGGANG, SHENZHEN, CHINA

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : T1905119-C02-R01  
Date of Receipt : May 14, 2019  
Date of Test : May 14, 2019-May 24, 2019  
Date of Report : May 24, 2019  
Version Number : V0


## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards And Results.....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. General Information.....</b>	<b>7</b>
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT) .....	8
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test Mode Description.....	8
2.6. Test Conditions .....	9
2.7. Test Facility.....	9
2.8. Measurement Uncertainty.....	9
2.9. Test Equipment List .....	10
<b>3. Maximum Peak Output power .....</b>	<b>11</b>
3.1. Limit.....	11
3.2. Test Procedure.....	11
3.3. Test Setup.....	11
3.4. Test Result.....	11
<b>4. Bandwidth.....</b>	<b>12</b>
4.1. Limit.....	12
4.2. Test Procedure.....	12
4.3. Test Result.....	12
<b>5. Carrier Frequency Separation .....</b>	<b>14</b>
5.1. Limit.....	14
5.2. Test Procedure.....	14
5.3. Test Result.....	14
<b>6. Number Of Hopping Channel .....</b>	<b>16</b>
6.1. Limit.....	16
6.2. Test Procedure.....	16
6.3. Test Result.....	16
<b>7. Dwell Time .....</b>	<b>18</b>
7.1. Test limit .....	18
7.2. Test Procedure.....	18
7.3. Test Result.....	18
<b>8. Radiated emissions .....</b>	<b>21</b>
8.1. Limit.....	21
8.2. Block Diagram of Test setup.....	22
8.3. Test Procedure.....	23
8.4. Test Result.....	23
<b>9. Band Edge Compliance .....</b>	<b>27</b>

---

9.1. Block Diagram of Test Setup.....	27
9.2. Limit.....	27
9.3. Test Procedure.....	27
9.4. Test Result.....	27
<b>10. Power Line Conducted Emissions.....</b>	<b>42</b>
10.1. Block Diagram of Test Setup.....	42
10.2. Limit.....	42
10.3. Test Procedure.....	42
10.4. Test Result.....	42
<b>11. Antenna Requirements.....</b>	<b>44</b>
11.1. Limit.....	44
11.2. Result.....	44
<b>12. Test setup photo.....</b>	<b>45</b>
12.1. Photos of Radiated emission.....	45
12.2. Photos of Conducted Emission test.....	46
<b>13. Photos of EUT.....</b>	<b>47</b>

## TEST REPORT DECLARATION

Applicant : SHENZHEN XINHAI CHUANGDA TECHNOLOGY INDUSTRIAL CO.LTD  
Address : 319, 3/F, JIANGNAN BUILDING, NO. 2 YONGXIANG ROAD, BANTIAN STREET, LONGGANG, SHENZHEN, CHINA  
Manufacturer : SHENZHEN XINHAI CHUANGDA TECHNOLOGY INDUSTRIAL CO.LTD  
Address : 319, 3/F, JIANGNAN BUILDING, NO. 2 YONGXIANG ROAD, BANTIAN STREET, LONGGANG, SHENZHEN, CHINA  
EUT Description : LED MIRROR  
(A) Model No. : HM-1901, HM-1902, HM-1903, HM-1904, HM-1905, HM-1906  
(B) Trademark : 



Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.10:2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Ella Liang   
Project Engineer  
Approved by (name + signature).....: Simple Guan   
Project Manager  
Date of issue.....: May 24, 2019

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	May 24, 2019	Initial released Issue	Simple Guan

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

<b>Test Item</b>	<b>Standards Paragraph</b>	<b>Result</b>
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description : LED MIRROR

Trademark :



Model Number : HM-1901, HM-1902, HM-1903, HM-1904, HM-1905, HM-1906

DIFF. : There is no difference between all the models, except the model name, this report performs the model HM-1901.

Test Voltage : AC 100-240V, 50/60Hz, 1.5A

#### BT

Radio Technology : Bluetooth V4.2+EDR

Operation frequency : 2402-2480MHz

Channel No. : 79 Channels

Modulation type : GFSK,  $\pi/4$  DQPSK

Antenna Type : PCB Antenna, max gain -0.58dBi.

Software version : V1.0

Hardware version : 20190408


## 2.2. Accessories of Device (EUT)

Accessories1 : /  
 Manufacturer : /  
 Model : /  
 Ratings : /

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1.	Notebook	ACER	ZQT	N/A	DOC

## 2.4. Block Diagram of connection between EUT and simulators

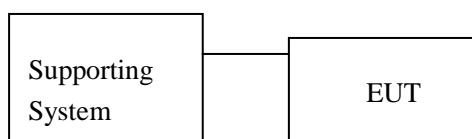

## 2.5. Test Mode Description

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi$ /4 DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480

Note: During the test, set the EUT duty cycle >98% and test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So just shows the worst condition's data in the report.



## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35 °C	27 °C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 25, 2017 Certificated by IC

Registration Number: 12135A

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2 °C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2018.09.21	1Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	1166.1660.26	2018.09.21	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-102082-Wa	2018.09.21	1Year
Receiver	R&S	ESCI	101165	2018.09.21	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2018.09.26	2Year
Cable	Resenberger	N/A	No.1	2018.09.21	1Year
Cable	Resenberger	N/A	No.2	2018.09.21	1Year
Cable	Resenberger	N/A	No.3	2018.09.21	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2018.09.21	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2018.09.21	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2018.09.21	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2018.09.21	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2018.09.21	1 Year
Horn Antenna	A-INFOMW	LB-180100-KF	J211020657	2018.09.21	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2018.09.21	1 Year
Power Meter	Agilent	E9300A	MY41496625	2018.09.21	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	100631	2018.9.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2018.09.11	1 Year

### 3. MAXIMUM PEAK OUTPUT POWER

#### 3.1.Limit


Please refer section 15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

#### 3.3.Test Setup

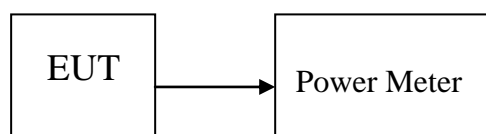

#### 3.4.Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Result
GFSK	2402	-1.528	0.703	30	Pass
	2441	-0.049	0.989	30	Pass
	2480	0.96	1.247	30	Pass
$\pi$ /4 DQPSK	2402	-1.689	0.678	21	Pass
	2441	-0.212	0.952	21	Pass
	2480	<b>1.774</b>	1.505	21	Pass
Conclusion: PASS					

## 4. BANDWIDTH

### 4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 4.3.Test Result


Mode	Freq (MHz)	20dB Bandwidth (MHz)	Conclusion
GFSK	2402	0.7973	PASS
	2441	0.7993	PASS
	2480	0.7932	PASS
$\pi$ /4 DQPSK	2402	1.1786	PASS
	2441	1.2133	PASS
	2480	1.1844	PASS

Original Test data For 20dB bandwidth


GFSK mode	$\pi$ /4 DQPSK
-----------	----------------

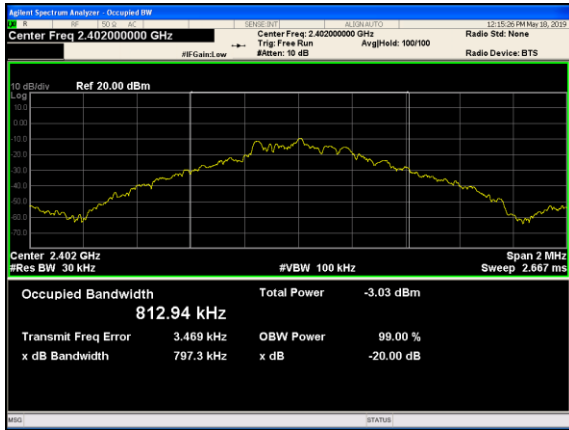


Lowest channel

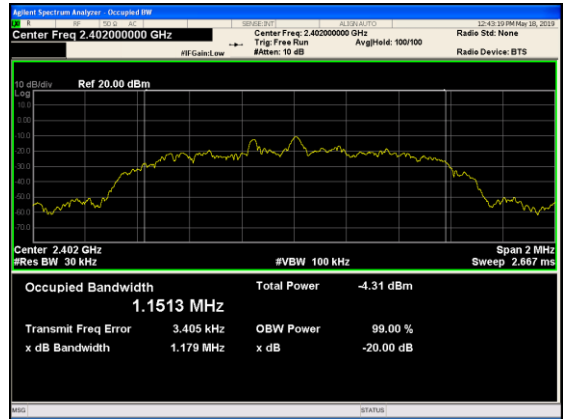


Lowest channel

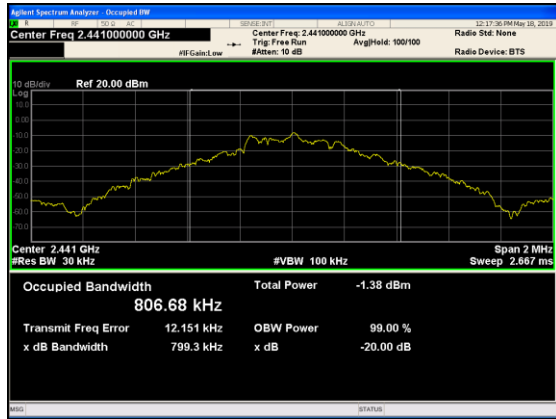


Middle channel

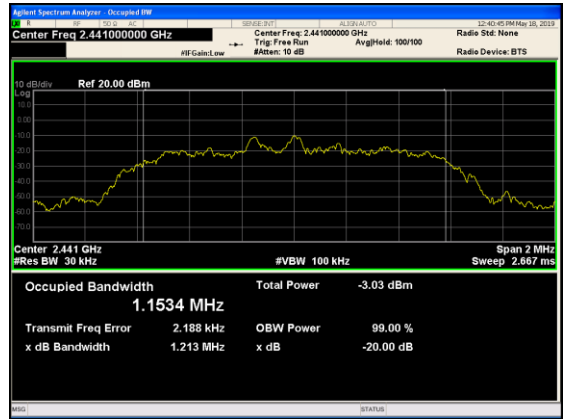

Middle channel

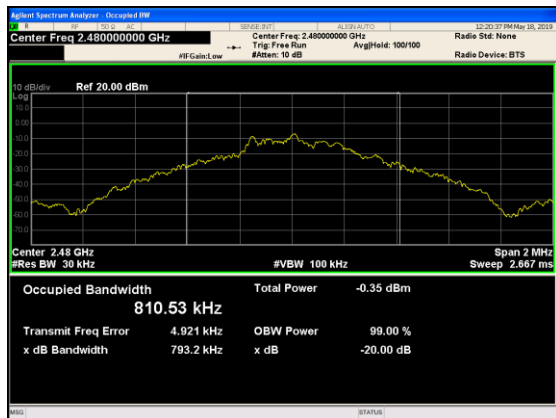

Highest channel

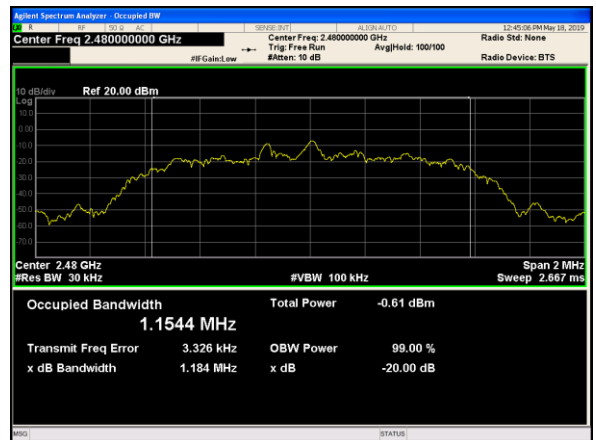

Highest channel

## 5. CARRIER FREQUENCY SEPARATION

### 5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

### 5.2.Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 20kHz RBW and 62kHz VBW.


### 5.3.Test Result

Mode/Channel	Channel separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Conclusion
GFSK	0.987	0.7993	0.7993	PASS
$\pi$ /4 DQPSK	0.900	1.2133	0.809	PASS

Original test data for channel separation



GFSK

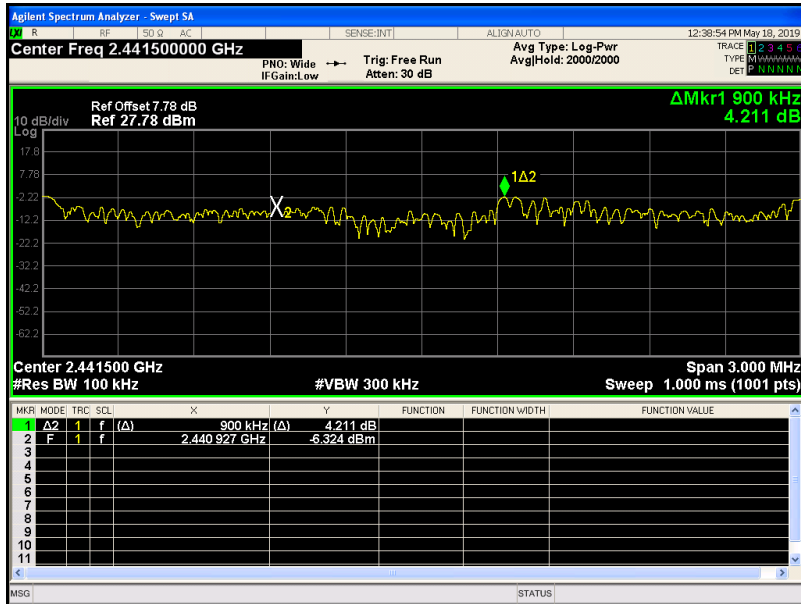

$\pi/4$  DQPSK

## 6. NUMBER OF HOPPING CHANNEL

### 6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

### 6.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

### 6.3.Test Result


Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
$\pi$ /4 DQPSK	79	>15	PASS



Original test data for hopping channel number

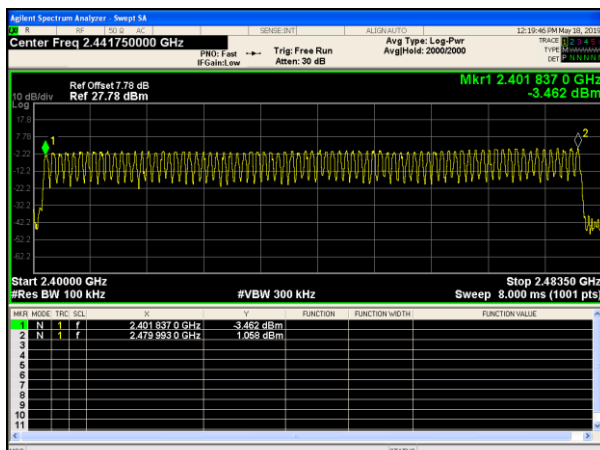

GFSK

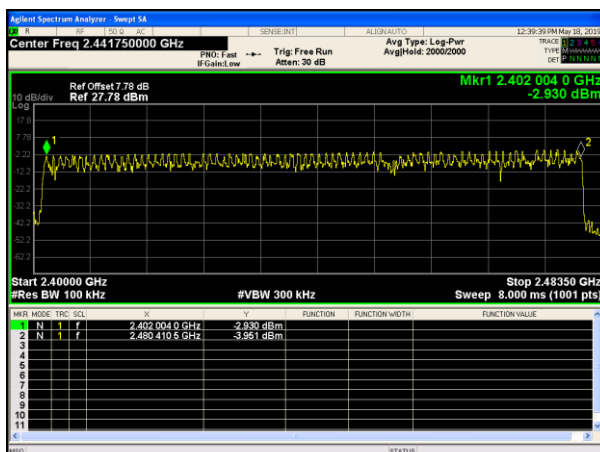

$\pi/4$  DQPSK

## 7. DWELL TIME

### 7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

### 7.3. Test Result

PASS.


Detailed information please see the following page.

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
GFSK	DH1	2441	0.407	130.24	400	PASS
	DH3	2441	1.664	266.24		PASS
	DH5	2441	2.911	310.51		PASS
$\pi$ /4 DQPSK	DH1	2441	0.417	133.44	400	PASS
	DH3	2441	1.670	267.20		PASS
	DH5	2441	2.917	311.15		PASS
Note: 1 A period time = 0.4 (s) * 79 = 31.6(s) 2 DH1 time slot = Pulse Duration * (1600/(2*79)) * A period time/1000 DH3 time slot = Pulse Duration * (1600/(4*79)) * A period time/1000 DH5 time slot = Pulse Duration * (1600/(6*79)) * A period time/1000						


Dwell time

GFSK


$\pi/4$ -DQPSK

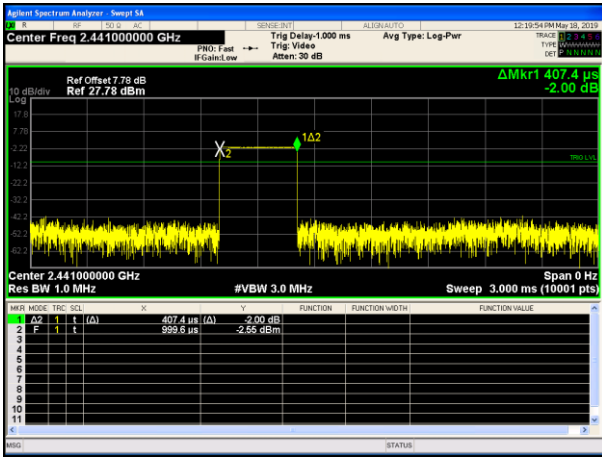


Channel 39 / 2441 MHz - DH1

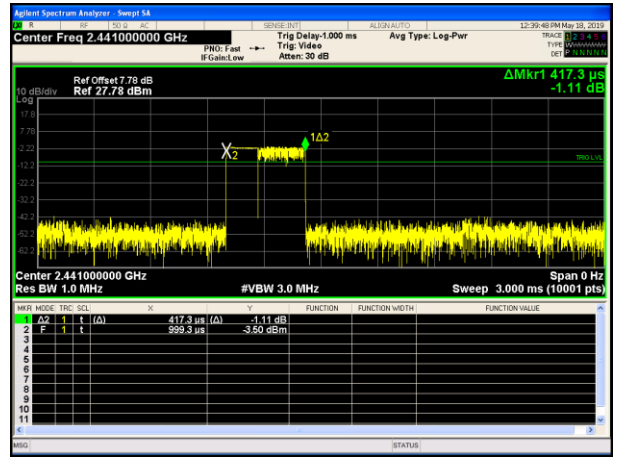


Channel 39 / 2441 MHz - 2DH1

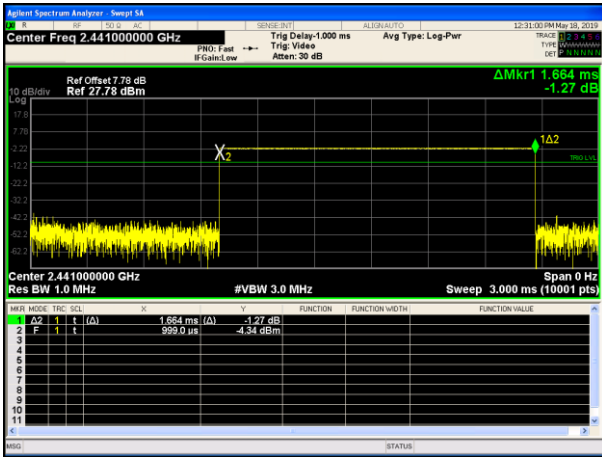


Channel 39 / 2441 MHz - DH3

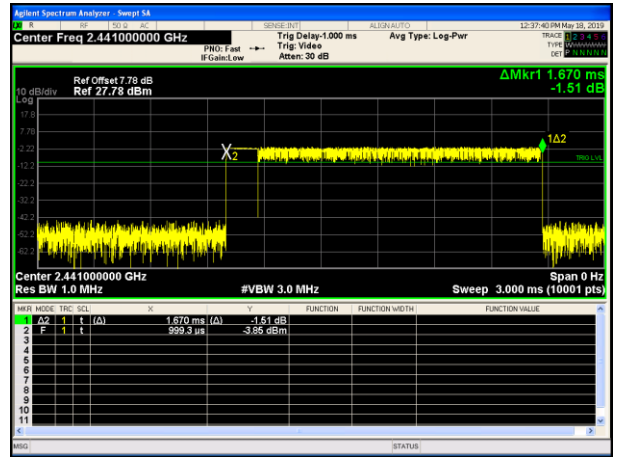

Channel 39 / 2441 MHz - 2DH3

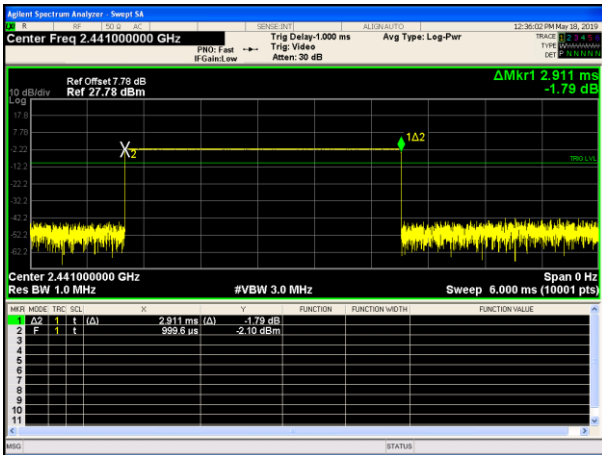

Channel 39 / 2441 MHz - DH5

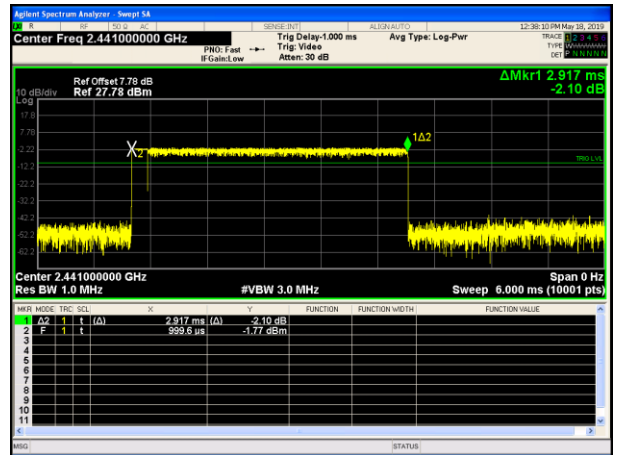

Channel 39 / 2441 MHz - 2DH5

## 8. RADIATED EMISSIONS

### 8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

## 8.2. Block Diagram of Test setup


### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

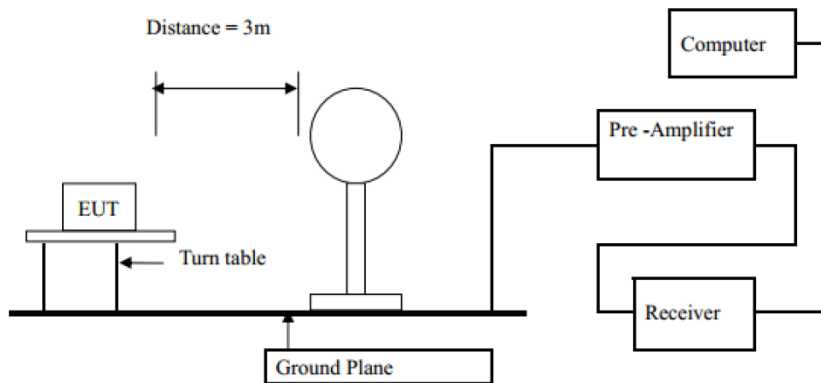

### 8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

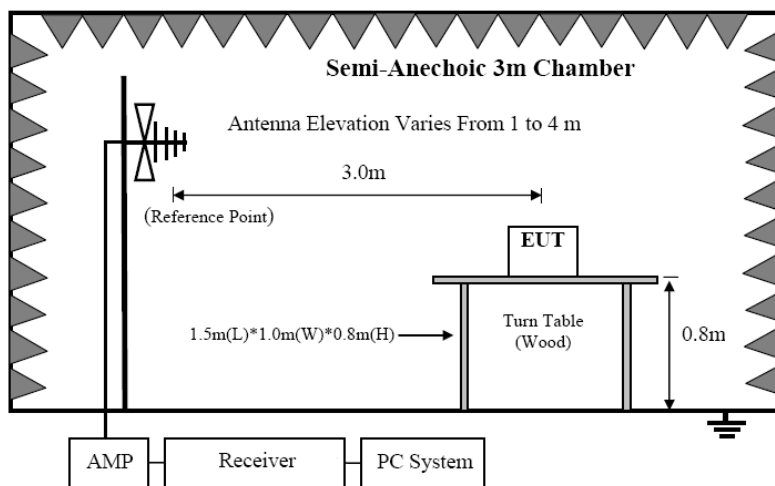

### 8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

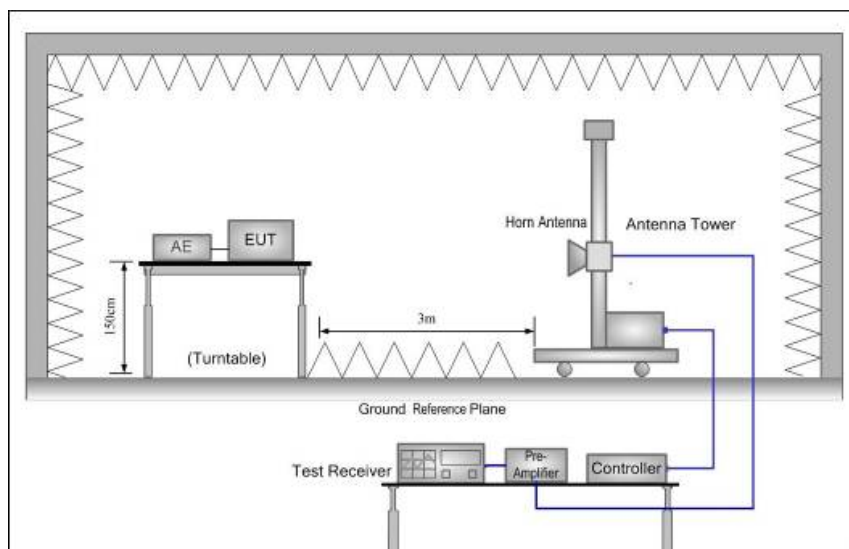

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

### 8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.


### 8.4. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..  
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

<b>EUT Description</b>	LED MIRROR	<b>Model No.</b>	HM-1901
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test date</b>	2019/5/20
<b>Test Voltage</b>	AC 120V/60Hz	<b>Test mode</b>	GFSK (2480MHz)

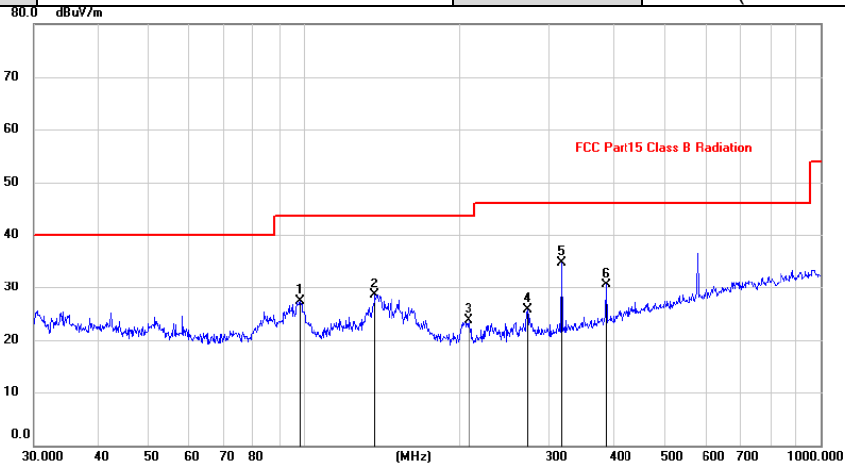

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		98.1419	16.90	10.33	27.23	43.50	-16.27	peak		
2		136.9391	14.94	13.65	28.59	43.50	-14.91	peak		
3		207.8501	13.08	10.61	23.69	43.50	-19.81	peak		
4		270.3748	12.92	12.79	25.71	46.00	-20.29	peak		
5	*	316.5890	20.90	13.79	34.69	46.00	-11.31	peak		
6		383.9318	15.04	15.39	30.43	46.00	-15.57	peak		

<b>Pol</b>	Horizontal	<b>Test date</b>	2019/5/20
------------	------------	------------------	-----------

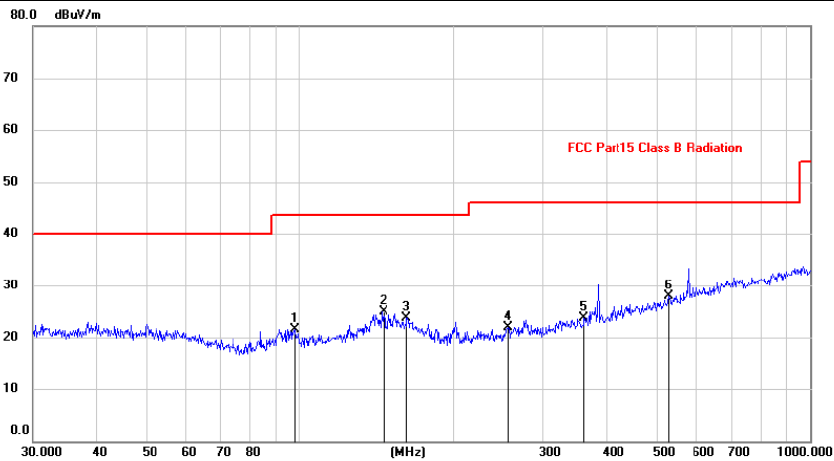

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		97.7983	11.27	10.31	21.58	43.50	-21.92	peak		
2		145.3506	10.67	14.22	24.89	43.50	-18.61	peak		
3		162.6106	9.41	14.37	23.78	43.50	-19.72	peak		
4		255.6231	9.78	12.21	21.99	46.00	-24.01	peak		
5		360.4476	9.23	14.53	23.76	46.00	-22.24	peak		
6	*	528.2458	9.80	18.11	27.91	46.00	-18.09	peak		

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable



From 1G-25GHz


Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.98	V	33.95	10.18	34.26	55.85	74	18.15	PK
4804	36.47	V	33.95	10.18	34.26	46.34	54	7.66	AV
7206	/								
9608	/								
4824	47.75	H	33.95	10.18	34.26	57.62	74	16.38	PK
4824	36.34	H	33.95	10.18	34.26	46.21	54	7.79	AV
7206	/								
9608	/								
Test Mode: GFSK TX Mid									
4882	44.56	V	33.93	10.2	34.29	54.40	74	19.60	PK
4882	37.18	V	33.93	10.2	34.29	47.02	54	6.98	AV
7323	/								
9764	/								
4882	44.92	H	33.93	10.2	34.29	54.76	74	19.24	PK
4882	36.93	H	33.93	10.2	34.29	46.77	54	7.23	AV
7323	/								
9764	/								
Test Mode: GFSK TX High									
4960	44.36	V	33.98	10.22	34.25	54.31	74	19.69	PK
4960	34.66	V	33.98	10.22	34.25	44.61	54	9.39	AV
7440	/								
9920	/								
4960	46.39	H	33.98	10.22	34.25	56.34	74	17.66	PK
4960	35.83	H	33.98	10.22	34.25	45.78	54	8.22	AV
7440	/								
9920	/								
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

From 1G-25GHz

Test Mode: $\pi/4$ DQPSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	45.72	V	33.95	10.18	34.26	55.59	74	18.41	PK
4804	35.71	V	33.95	10.18	34.26	45.58	54	8.42	AV
7206	/		/						
9608	/		/						
4824	46.55	H	33.95	10.18	34.26	56.42	74	17.58	PK
4824	36.44	H	33.95	10.18	34.26	46.31	54	7.69	AV
7206	/								
9608	/								
Test Mode: $\pi/4$ DQPSK TX Mid									
4882	46.60	V	33.93	10.2	34.29	56.44	74	17.56	PK
4882	34.66	V	33.93	10.2	34.29	44.50	54	9.50	AV
7323	/								
9764	/								
4882	46.42	H	33.93	10.2	34.29	56.26	74	17.74	PK
4882	36.43	H	33.93	10.2	34.29	46.27	54	7.73	AV
7323	/								
9764	/								
Test Mode: $\pi/4$ DQPSK TX High									
4960	45.15	V	33.98	10.22	34.25	55.10	74	18.90	PK
4960	34.66	V	33.98	10.22	34.25	44.61	54	9.39	AV
7440	/								
9920	/								
4960	46.47	H	33.98	10.22	34.25	56.42	74	17.58	PK
4960	35.08	H	33.98	10.22	34.25	45.03	54	8.97	AV
7440	/								
9920	/								
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

## 9. BAND EDGE COMPLIANCE

### 9.1. Block Diagram of Test Setup

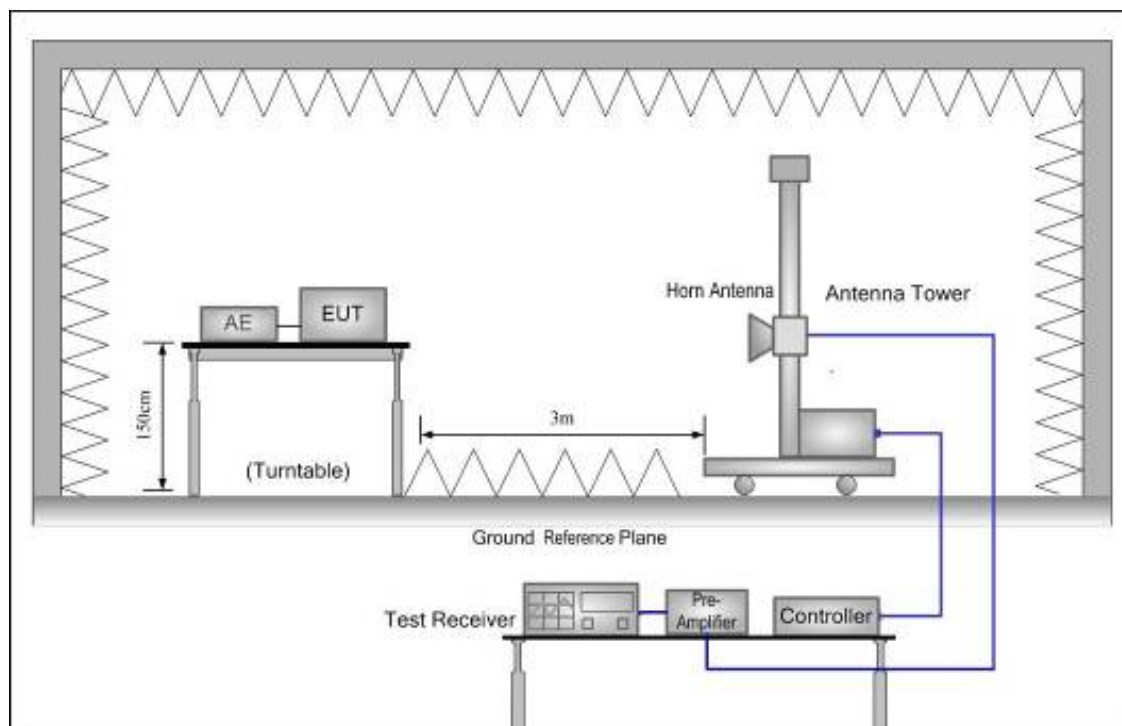

### 9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


### 9.4. Test Result

PASS. (See below detailed test data)

Radiated Method:


Polarization: Vertical

Test Mode: GFSK-Low

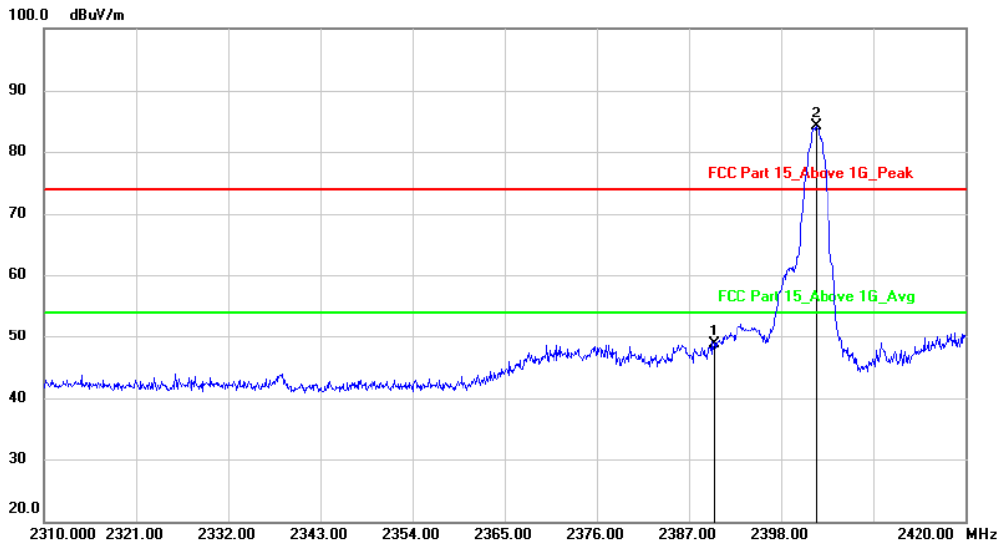

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2390.000	52.01	-3.40	48.61	74.00	-25.39	peak		
2	*	2402.180	87.51	-3.41	84.10	74.00	10.10	peak		

hopping-off

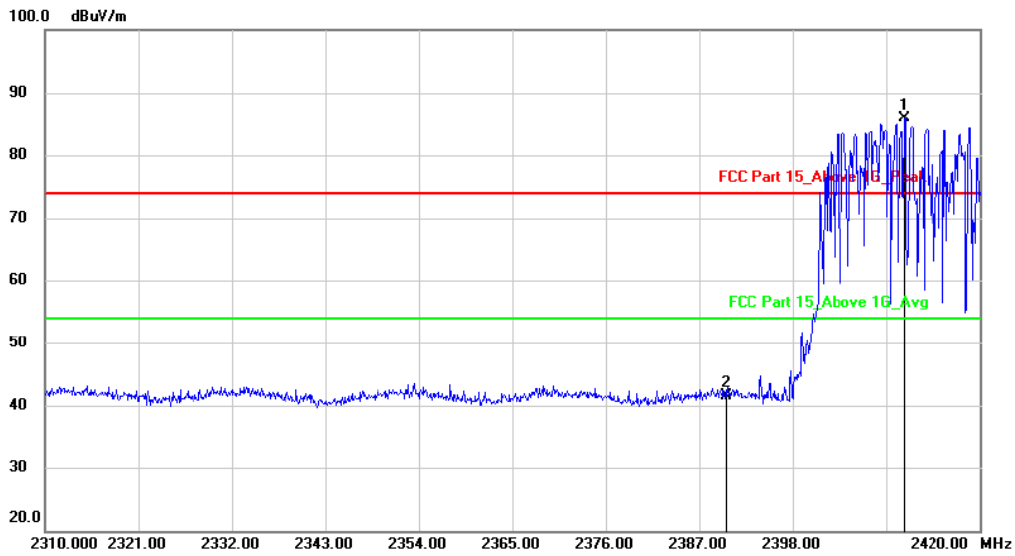


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2411.090	89.24	-3.40	85.84	74.00	11.84	peak		
2		2390.000	44.97	-3.40	41.57	74.00	-32.43	peak		


hopping-on

Polarization: Horizontal:

Test Mode: GFSK-Low

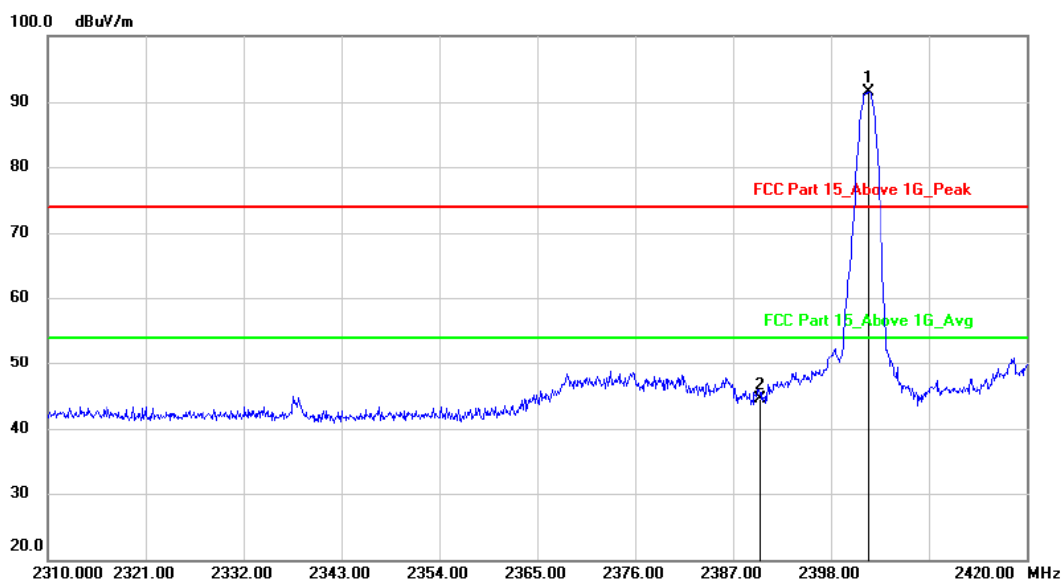

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Antenna	Table	
		MHz	Level	Factor				Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2402.180	94.93	-3.41	91.52	74.00	17.52	peak		
2		2390.000	47.95	-3.40	44.55	74.00	-29.45	peak		hopping-off

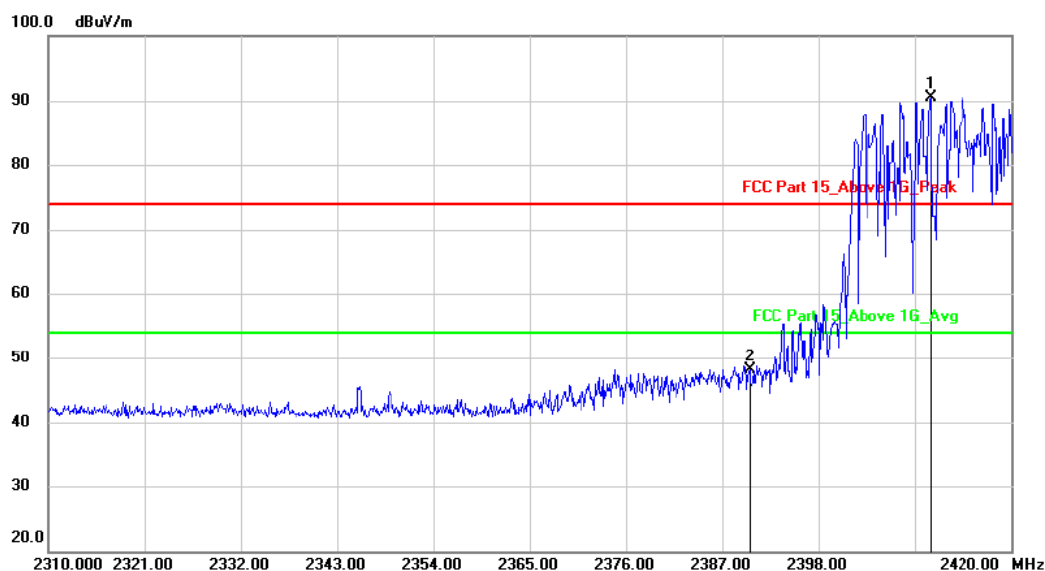


No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin	Antenna	Table	
		MHz	Level	Factor				Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2410.760	93.95	-3.40	90.55	74.00	16.55	peak		
2		2390.000	51.46	-3.40	48.06	74.00	-25.94	peak		hopping-on

hopping-on


Polarization: Vertical

Test Mode: GFSK-High

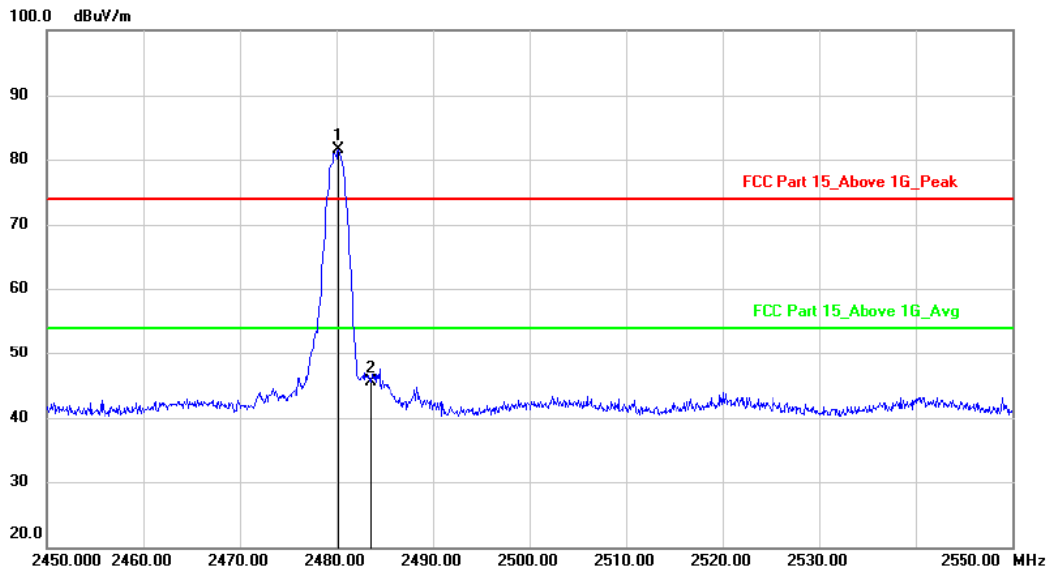

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.200	84.90	-3.38	81.52	74.00	7.52			peak
2		2483.500	48.86	-3.38	45.48	74.00	-28.52			peak

hopping-off

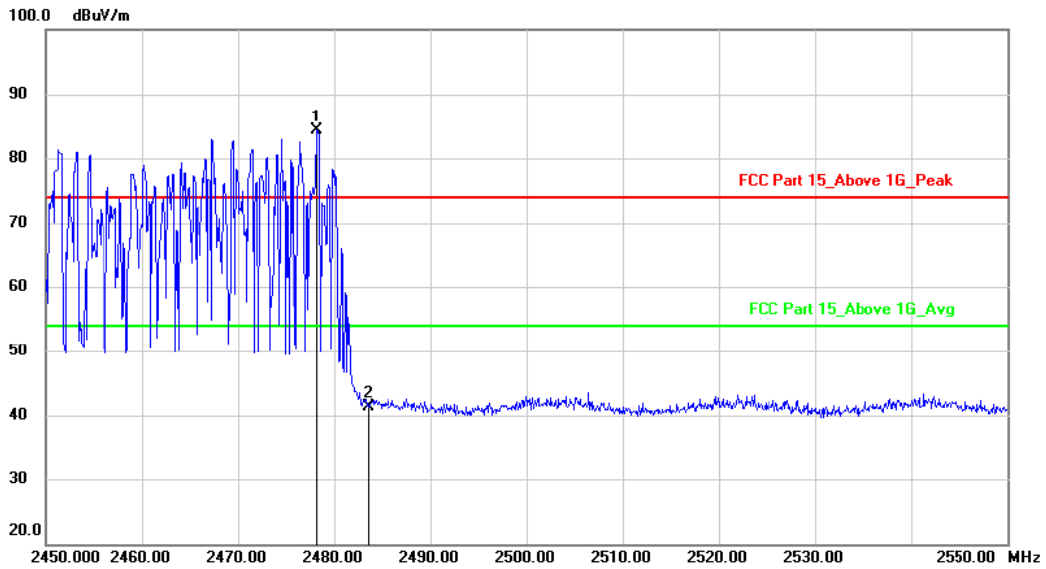


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2478.200	87.72	-3.39	84.33	74.00	10.33			peak
2		2483.500	44.76	-3.38	41.38	74.00	-32.62			peak

hopping-on


Polarization: Horizontal

Test Mode: GFSK-High

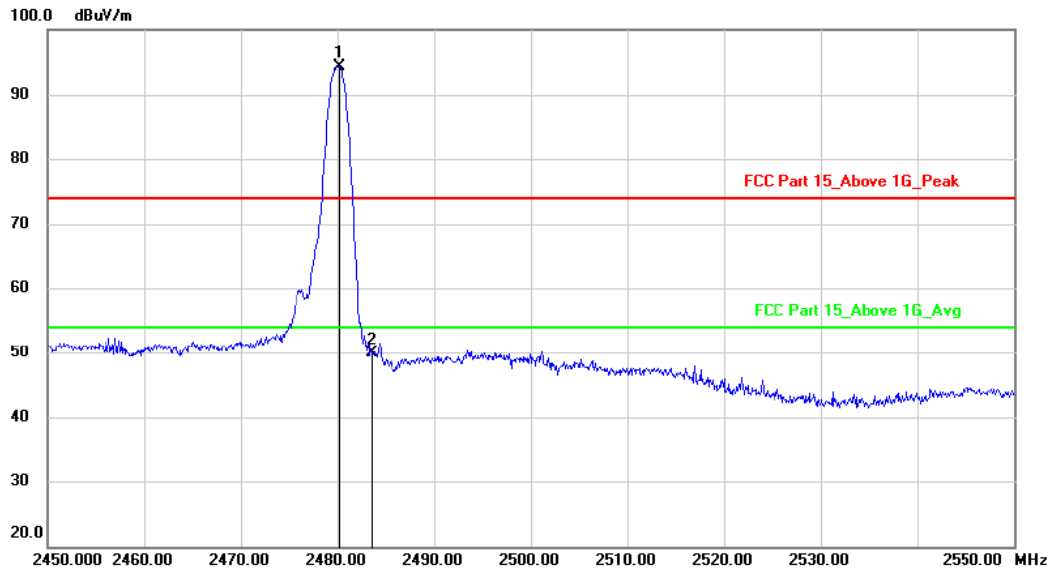

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.200	97.75	-3.38	94.37	74.00	20.37			peak
2		2483.500	53.32	-3.38	49.94	74.00	-24.06			peak

hopping-off

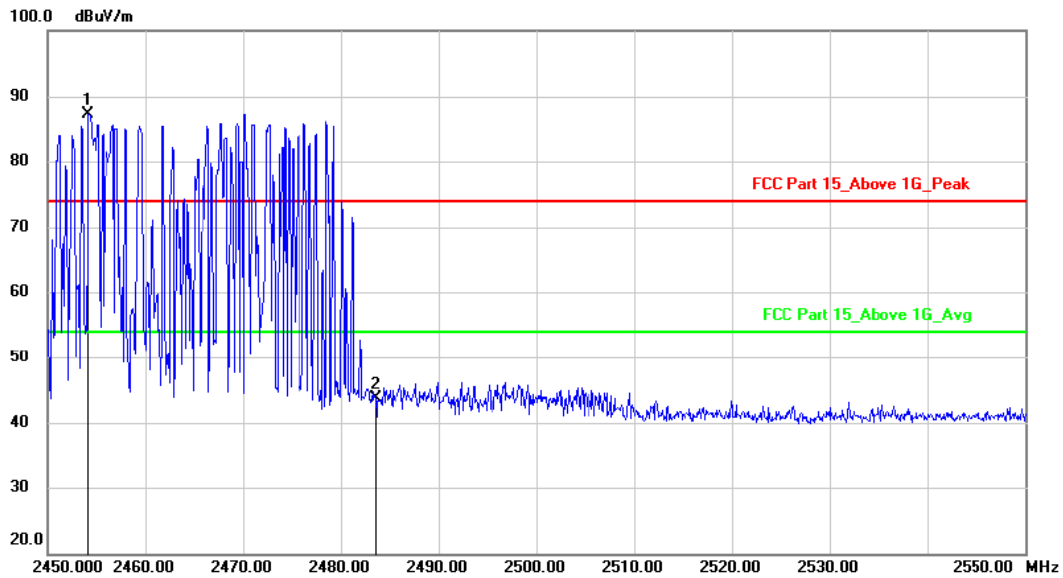


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2454.100	90.78	-3.39	87.39	74.00	13.39			peak
2		2483.500	47.17	-3.38	43.79	74.00	-30.21			peak

hopping-on


Polarization: Vertical

Test Mode:  $\pi/4$  DQPSK-Low

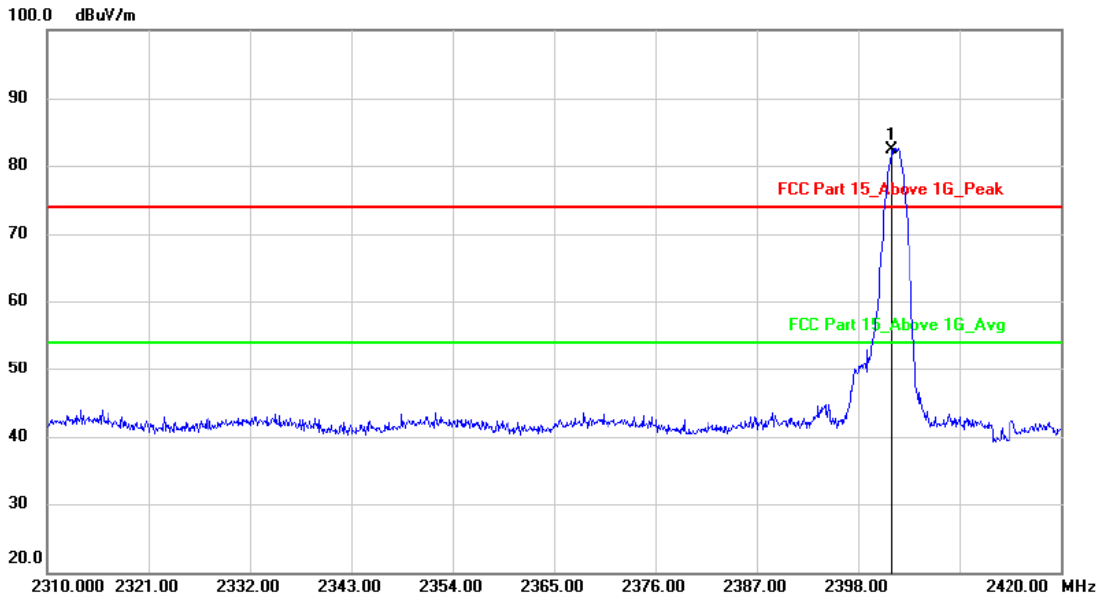

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2401.630	85.74	-3.41	82.33	74.00	8.33	peak		

hopping-off

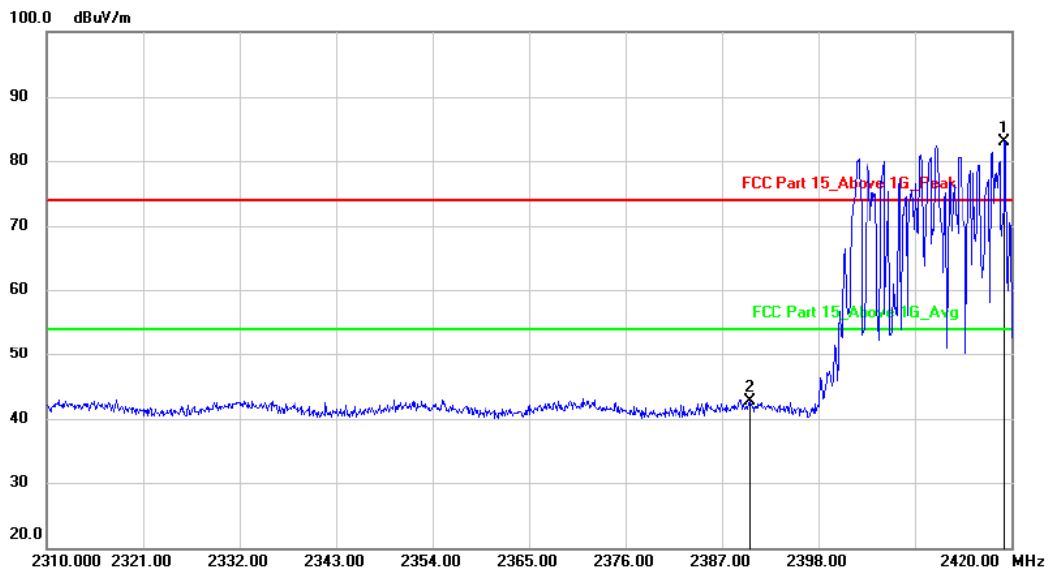


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2419.230	86.33	-3.41	82.92	74.00	8.92	peak		
2		2390.000	46.07	-3.40	42.67	74.00	-31.33	peak		

hopping-on




Polarization: Horizontal

Test Mode:  $\pi/4$  DQPSK-Low

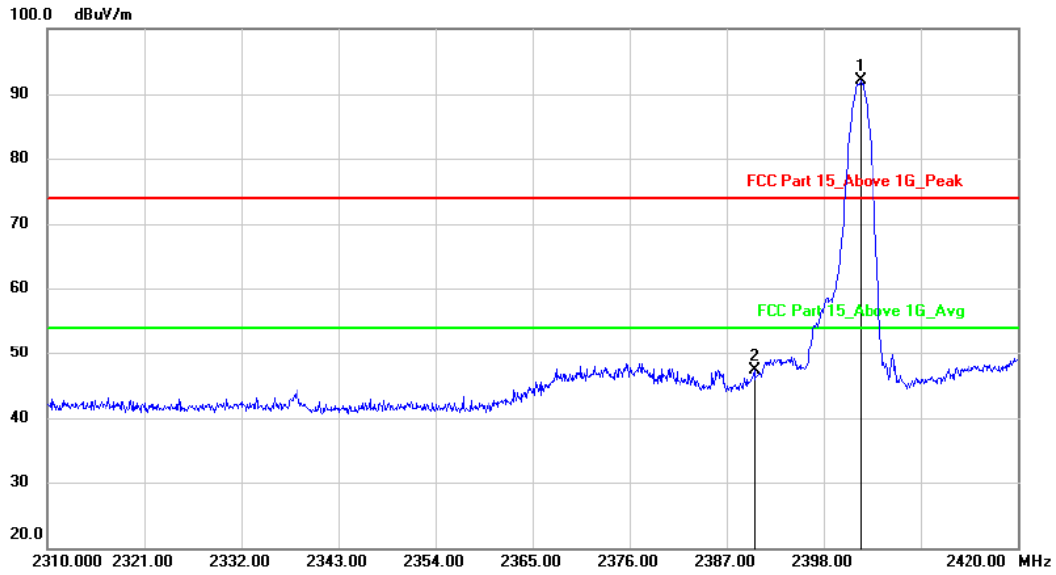

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	2402.180	95.42	-3.41	92.01	74.00	18.01	peak			
2		2390.000	50.68	-3.40	47.28	74.00	-26.72	peak			

hopping-off

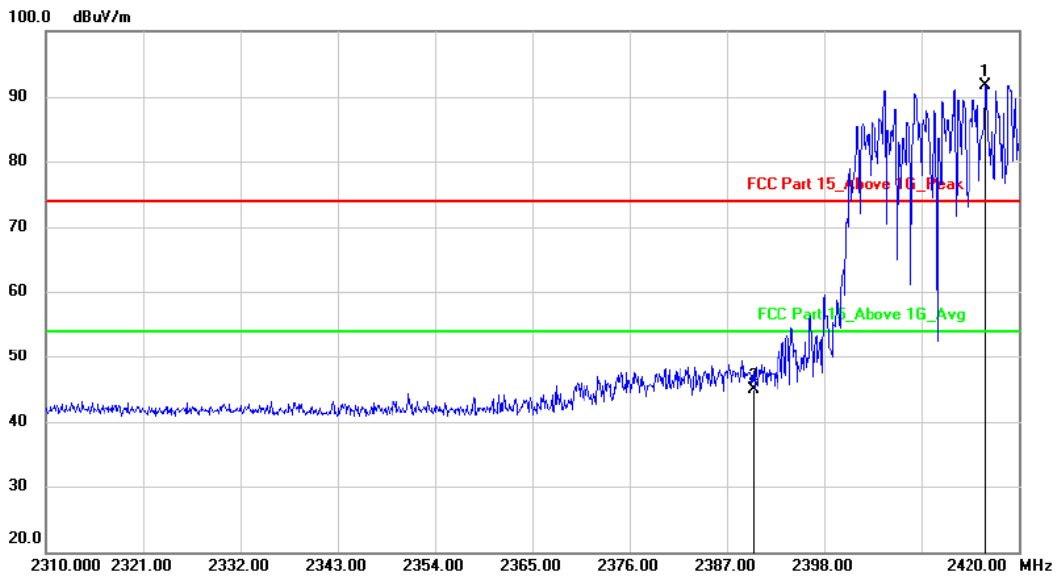


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	2416.260	95.20	-3.41	91.79	74.00	17.79	peak			
2		2390.000	48.29	-3.40	44.89	74.00	-29.11	peak			

hopping-on


Polarization: Vertical

Test Mode:  $\pi/4$  DQPSK-High

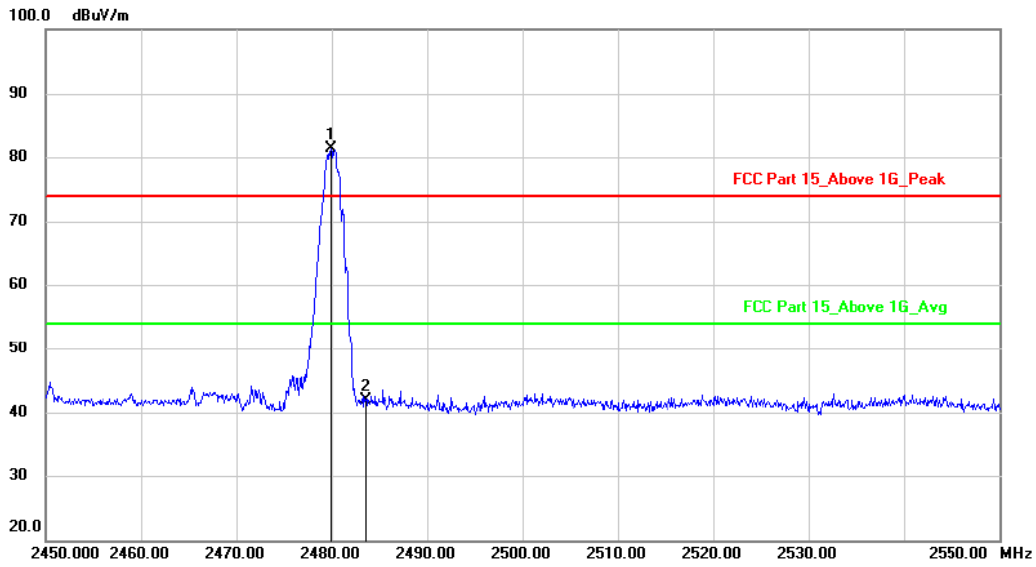

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.900	84.69	-3.38	81.31	74.00	7.31			peak
2		2483.500	45.21	-3.38	41.83	74.00	-32.17			peak

hopping-off

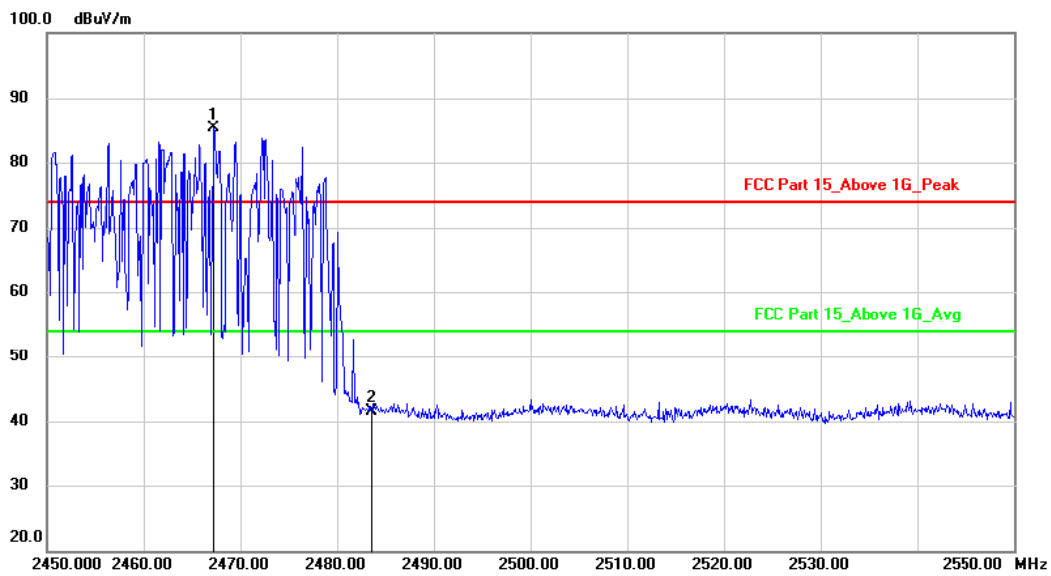


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2467.300	88.73	-3.39	85.34	74.00	11.34			peak
2		2483.500	44.92	-3.38	41.54	74.00	-32.46			peak

hopping-on


Polarization: Horizontal

Test Mode:  $\pi/4$  DQPSK-High

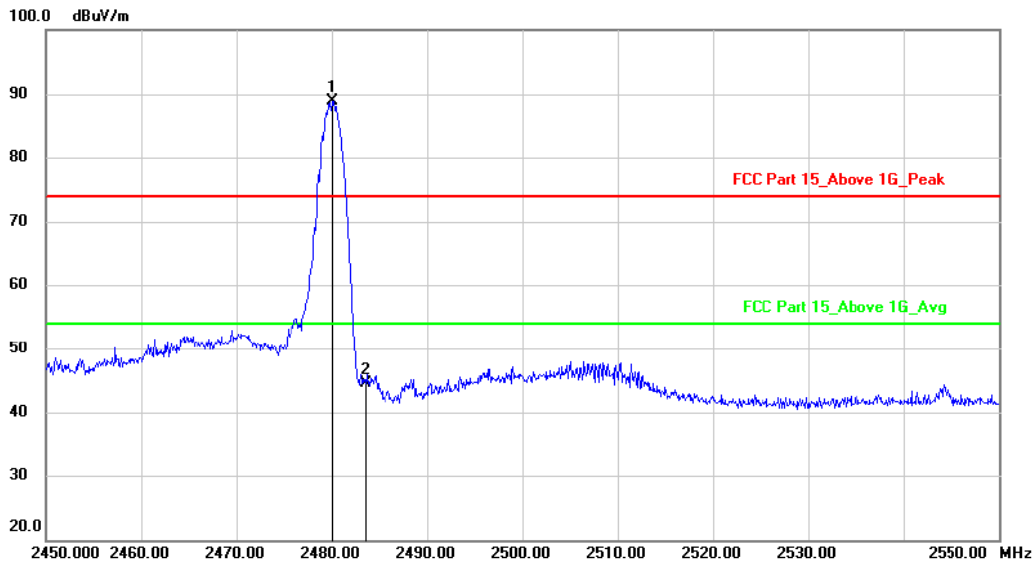

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.000	92.32	-3.38	88.94	74.00	14.94			peak
2		2483.500	47.86	-3.38	44.48	74.00	-29.52			peak

hopping-off

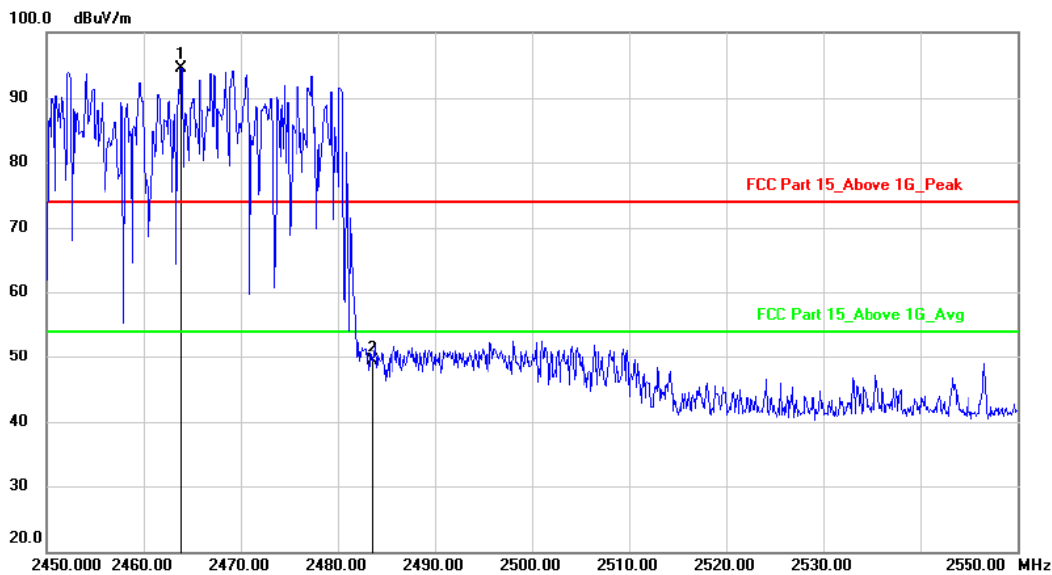

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2463.800	97.90	-3.40	94.50	74.00	20.50			peak
2		2483.500	52.74	-3.38	49.36	74.00	-24.64			peak

hopping-on


Note: 1. \*:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
1-DH1	2402	-49.791	-20	Pass
1-DH1	2441	-45.805	-20	Pass
1-DH1	2480	-41.179	-20	Pass
2-DH1	2402	-44.835	-20	Pass
2-DH1	2441	-43.432	-20	Pass
2-DH1	2480	-41.278	-20	Pass

Tx. Spurious 1-DH1 2402MHz

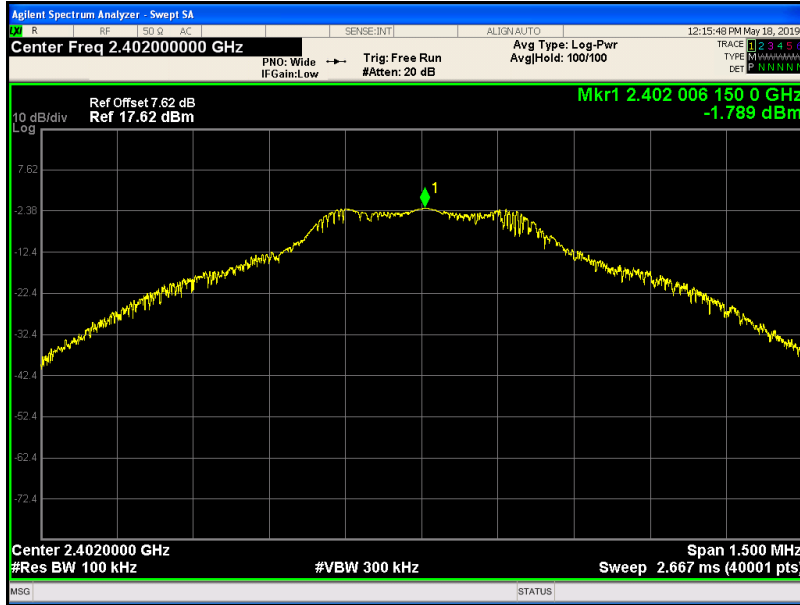

Tx. Spurious 1-DH1 2402MHz Emission

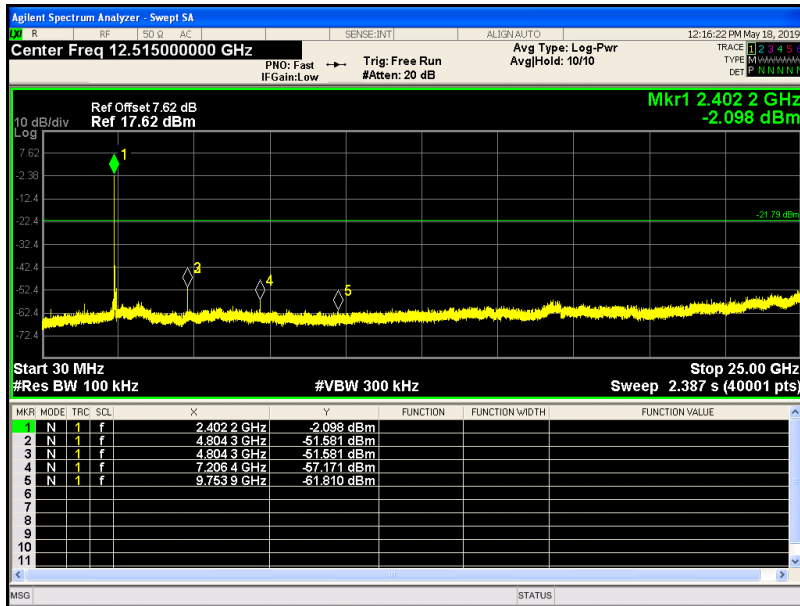









Tx. Spurious 2-DH1 2441MHz Ref

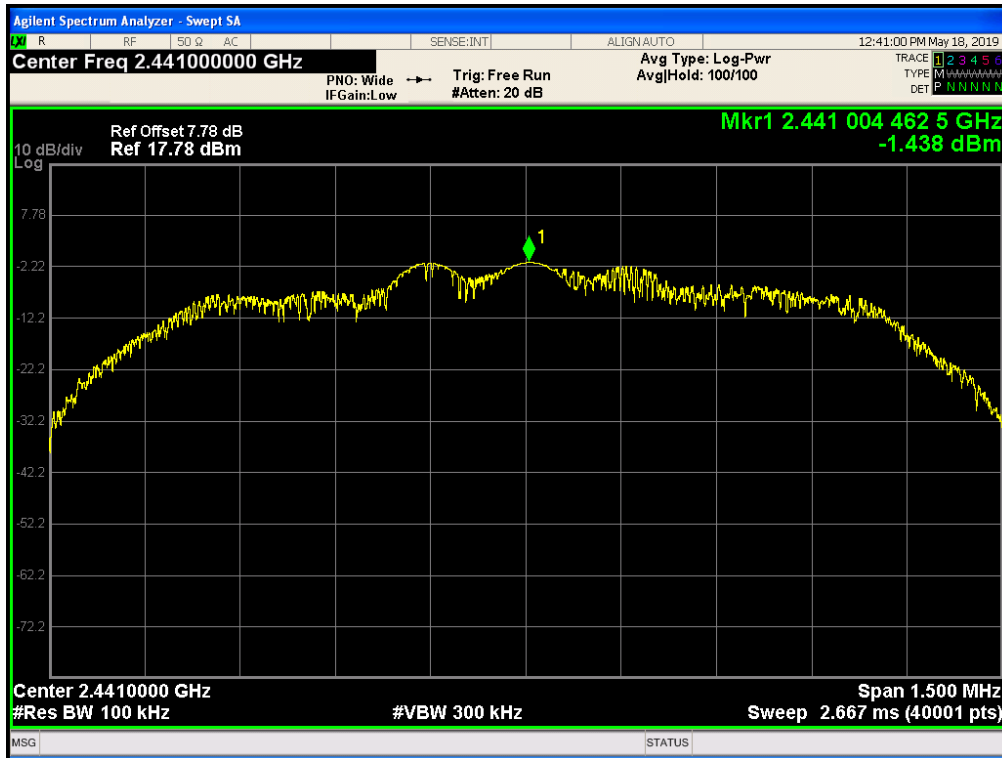

Tx. Spurious 2-DH1 2441MHz Emission

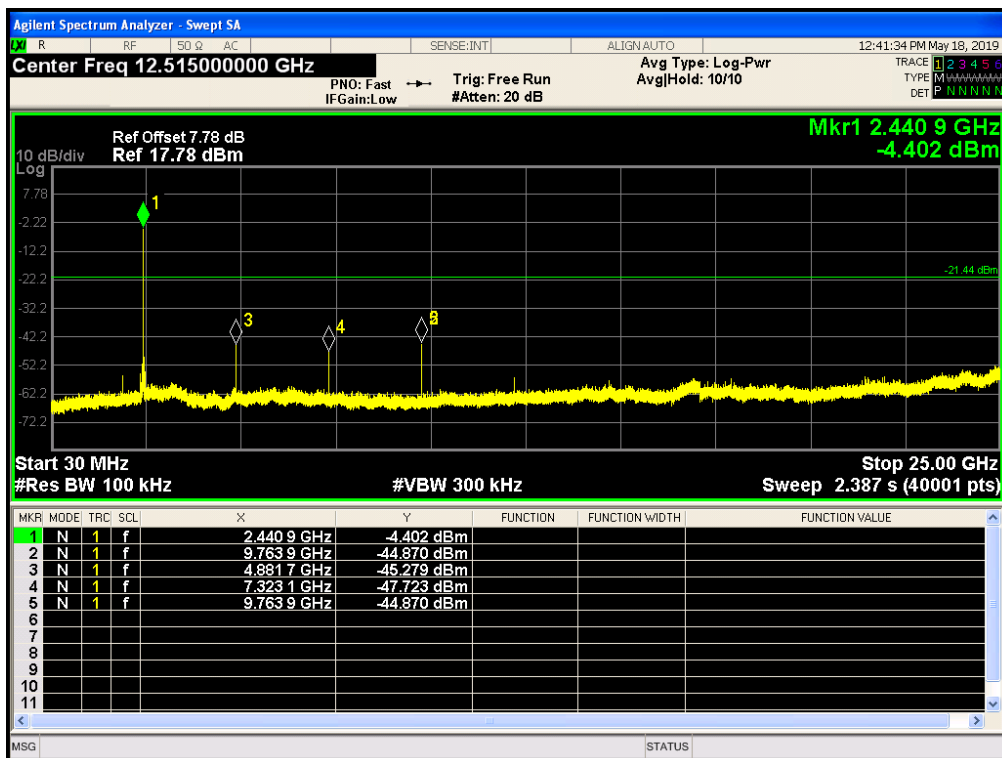






## 10. POWER LINE CONDUCTED EMISSIONS

### 10.1. Block Diagram of Test Setup

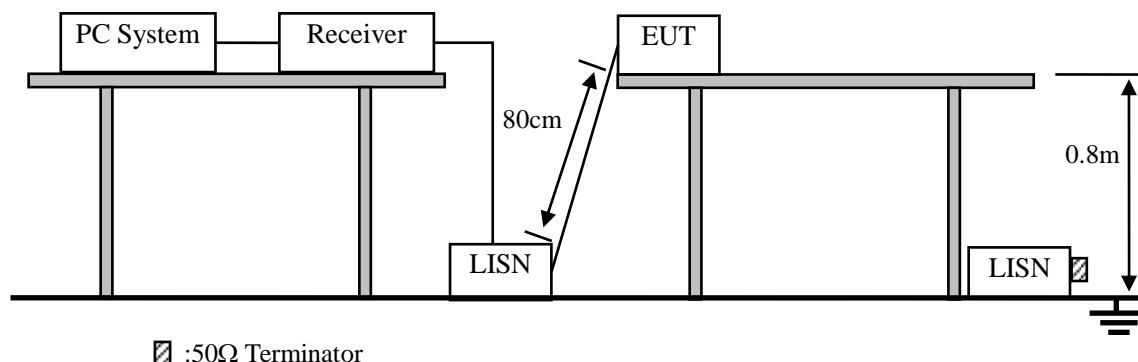

### 10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 10.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

### 10.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

<b>EUT Description</b>	LED MIRROR	<b>Model No.</b>	HM-1901
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test date</b>	2019/5/22
<b>Test Voltage</b>	AC 120V/60Hz	<b>Test mode</b>	GFSK (2480MHz)

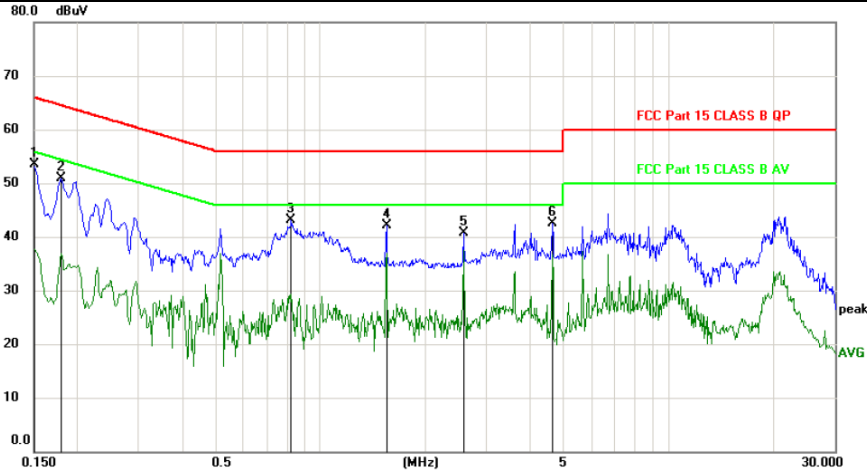

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	43.86	9.63	53.49	66.00	-12.51	peak	
2		0.1800	41.19	9.64	50.83	64.49	-13.66	peak	
3		0.8250	33.41	9.71	43.12	56.00	-12.88	peak	
4		1.5479	32.23	9.78	42.01	56.00	-13.99	peak	
5		2.5800	30.86	9.89	40.75	56.00	-15.25	peak	
6		4.6410	32.43	10.04	42.47	56.00	-13.53	peak	

<b>Pol</b>	Neutral	<b>Test date</b>	2019/5/22
------------	---------	------------------	-----------

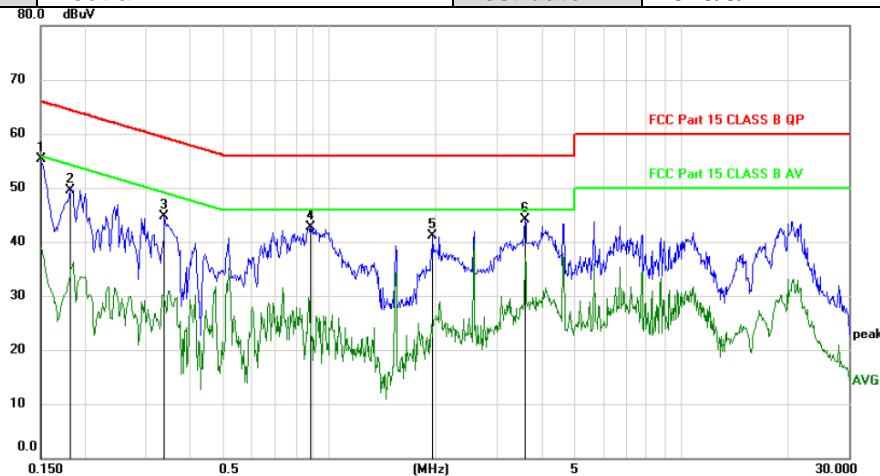

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	45.72	9.63	55.35	66.00	-10.65	peak	
2		0.1830	39.95	9.64	49.59	64.35	-14.76	peak	
3		0.3390	35.09	9.67	44.76	59.23	-14.47	peak	
4		0.8820	33.08	9.72	42.80	56.00	-13.20	peak	
5		1.9649	31.26	9.82	41.08	56.00	-14.92	peak	
6		3.6030	34.13	9.97	44.10	56.00	-11.90	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

## **11. ANTENNA REQUIREMENTS**

### **11.1. Limit**


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2. Result**

The EUT antenna is PCB Antenna. It complies with the standard requirement.

## 12. TEST SETUP PHOTO


### 12.1. Photos of Radiated emission


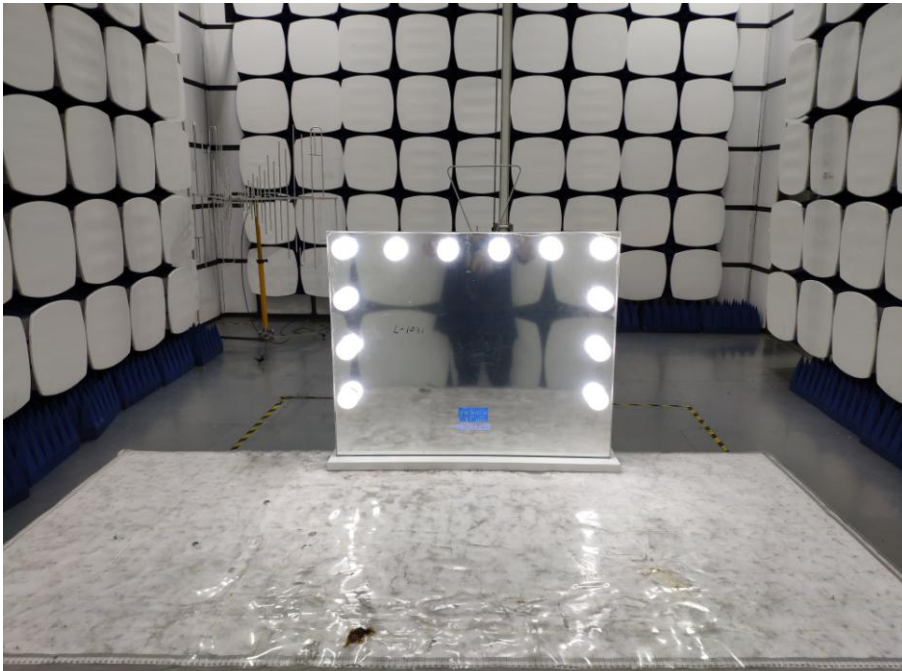


### 12.2.Photos of Conducted Emission test







### 13. PHOTOS OF EUT

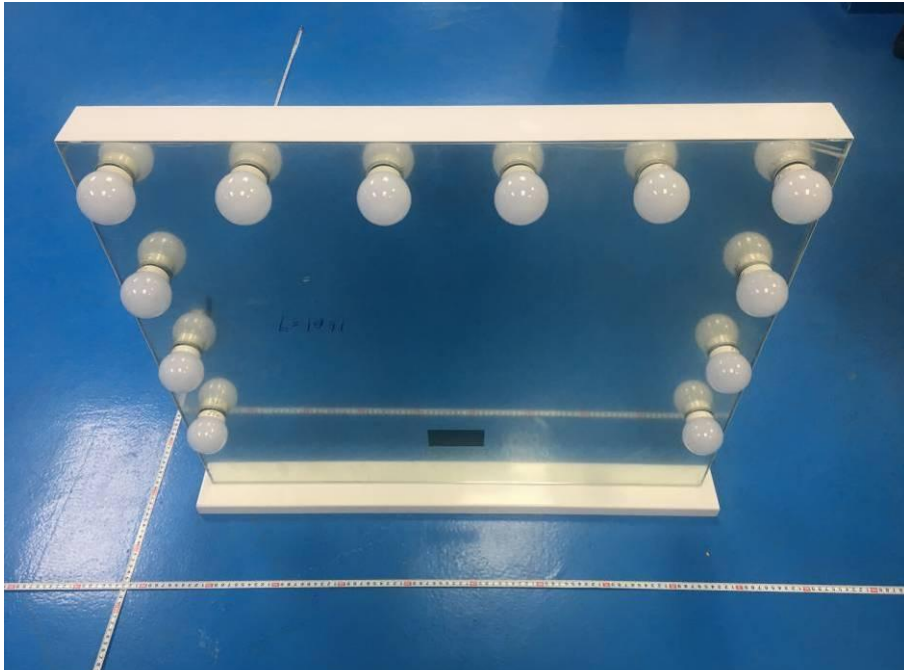


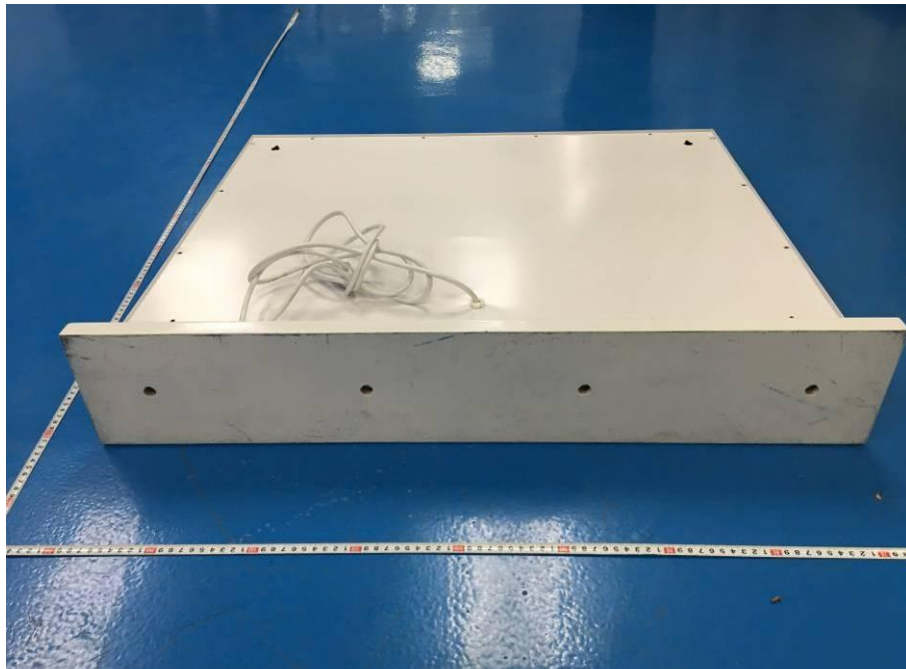
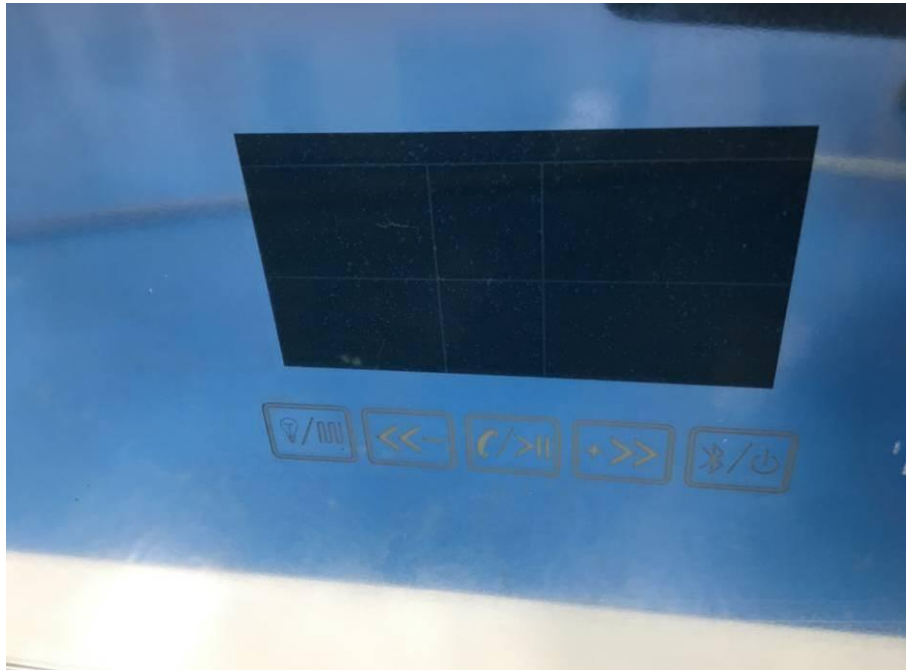






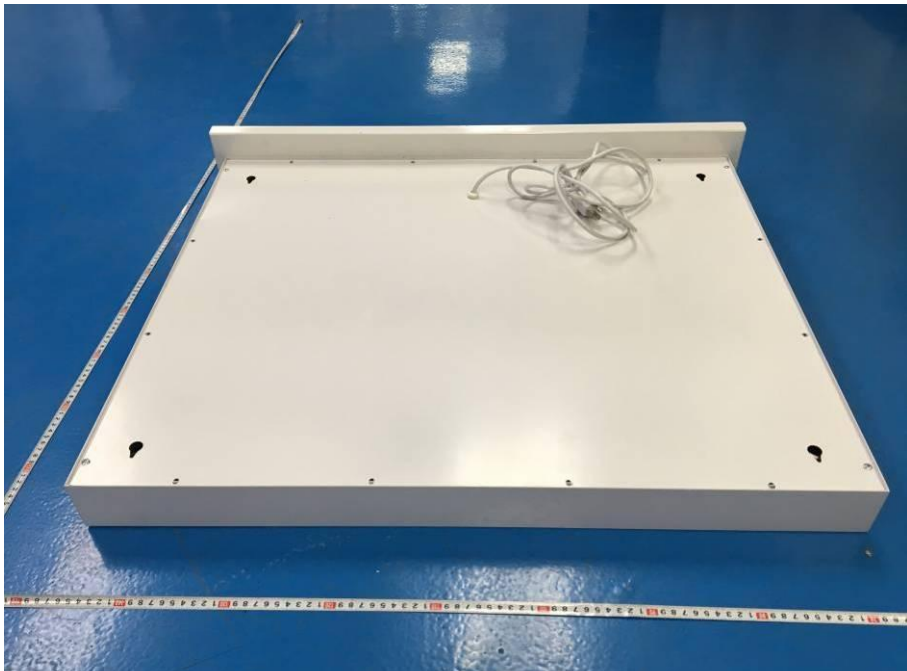
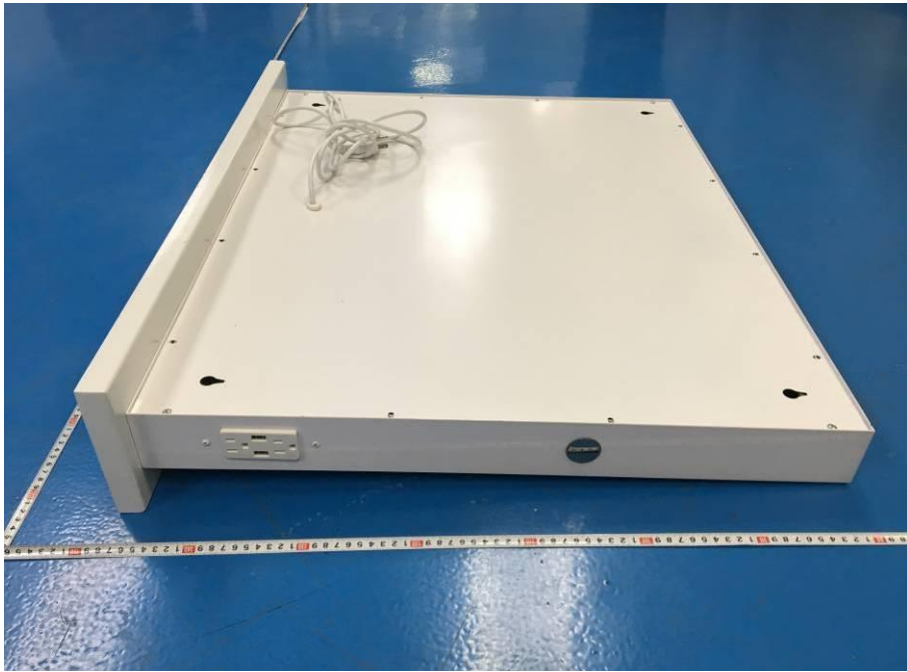


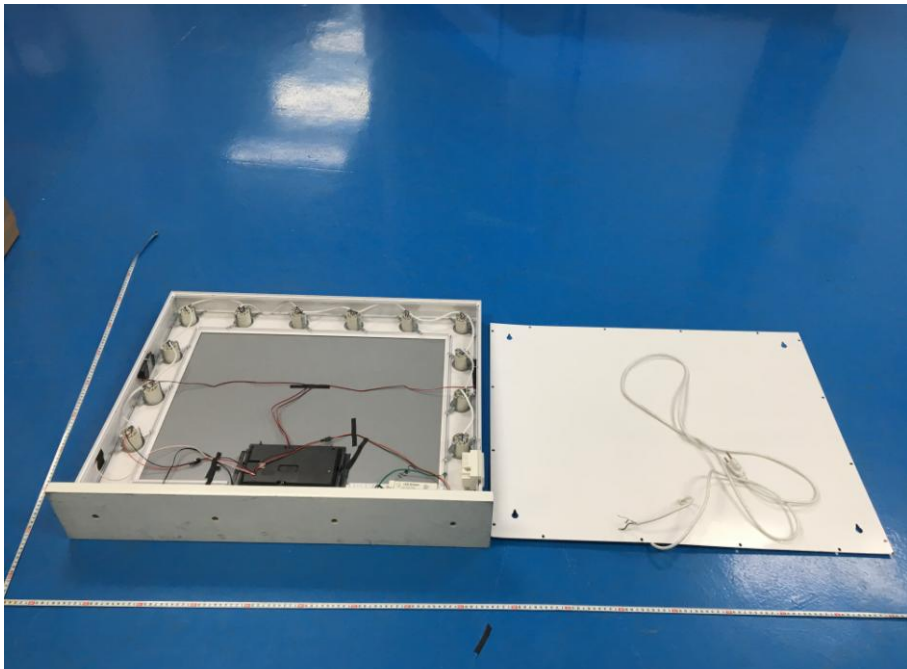
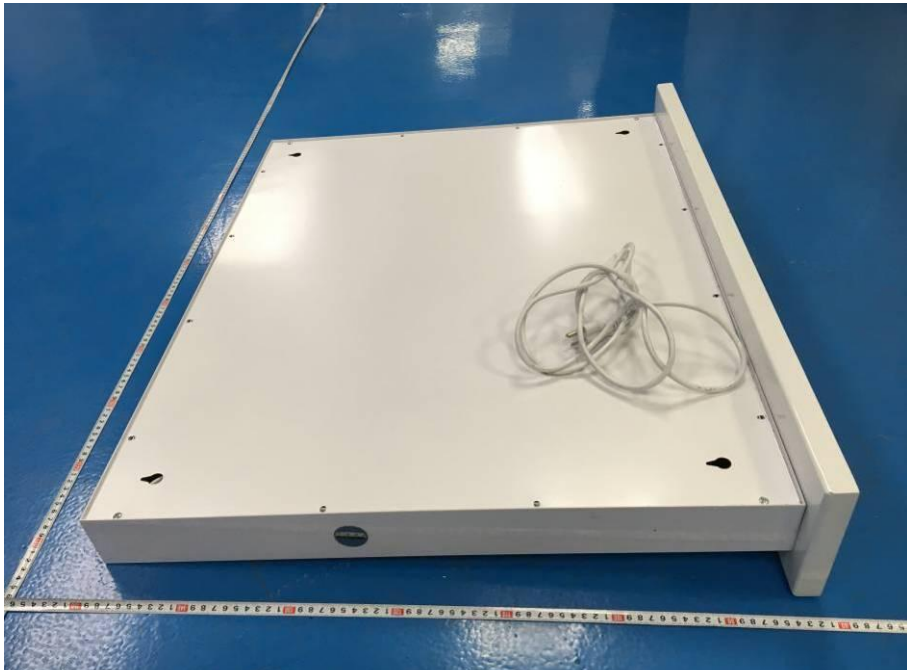



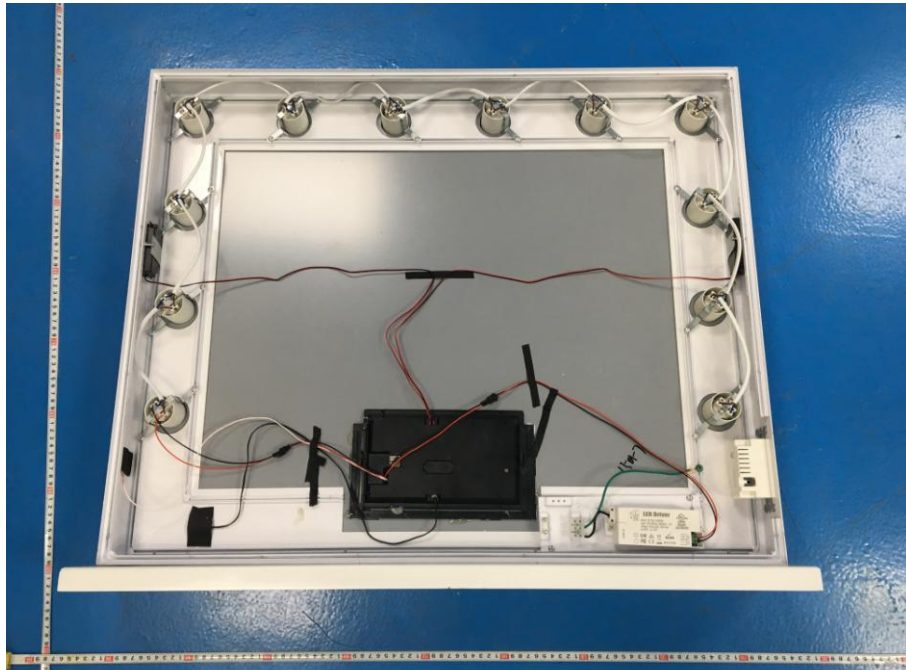


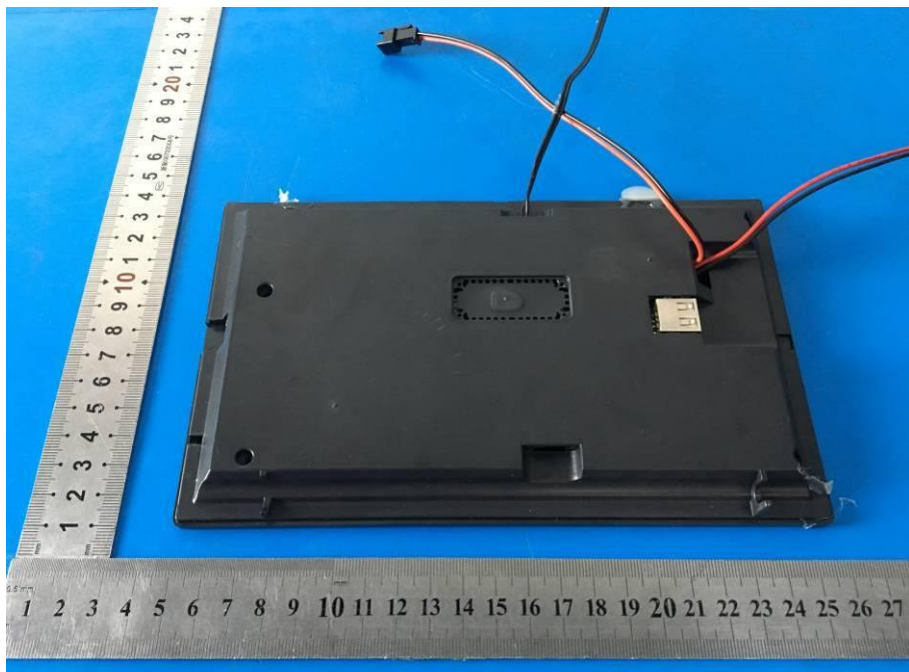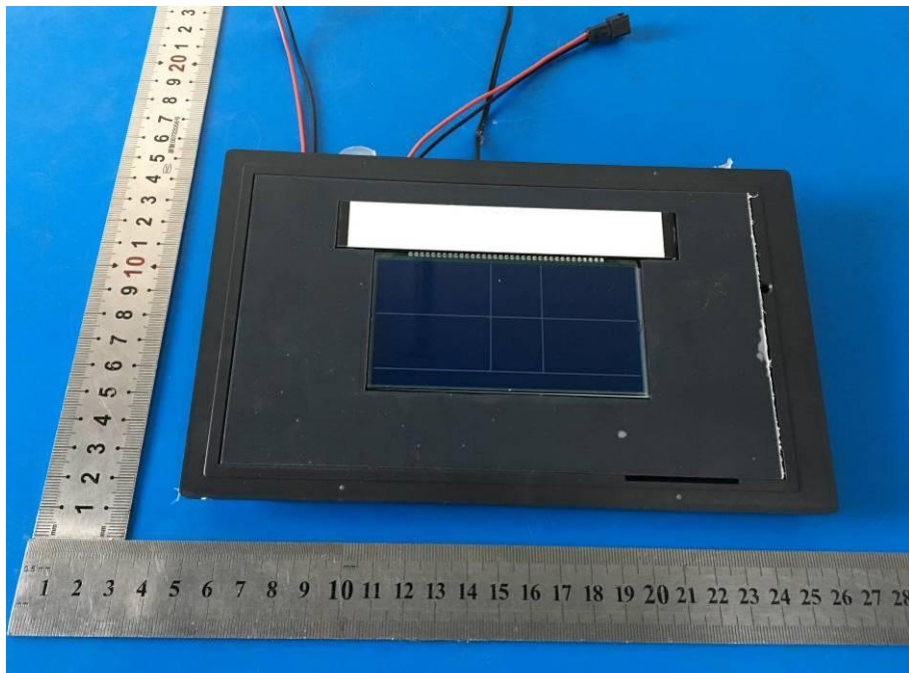

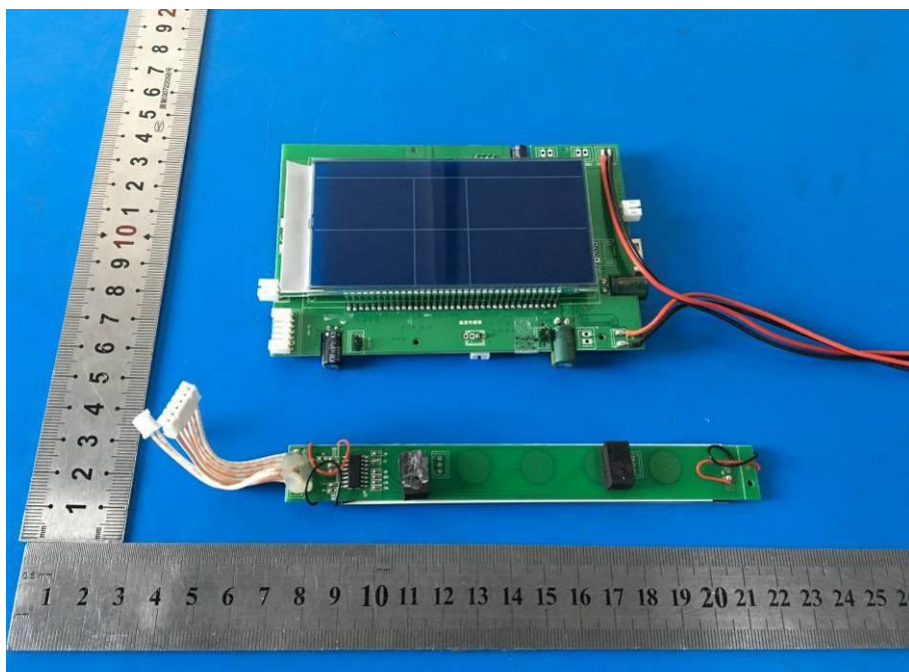
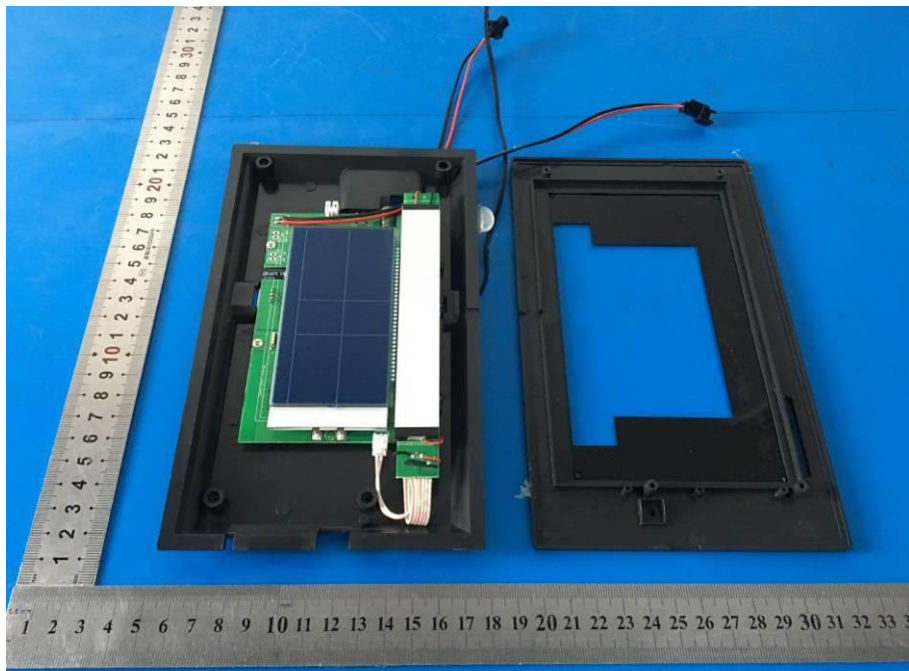


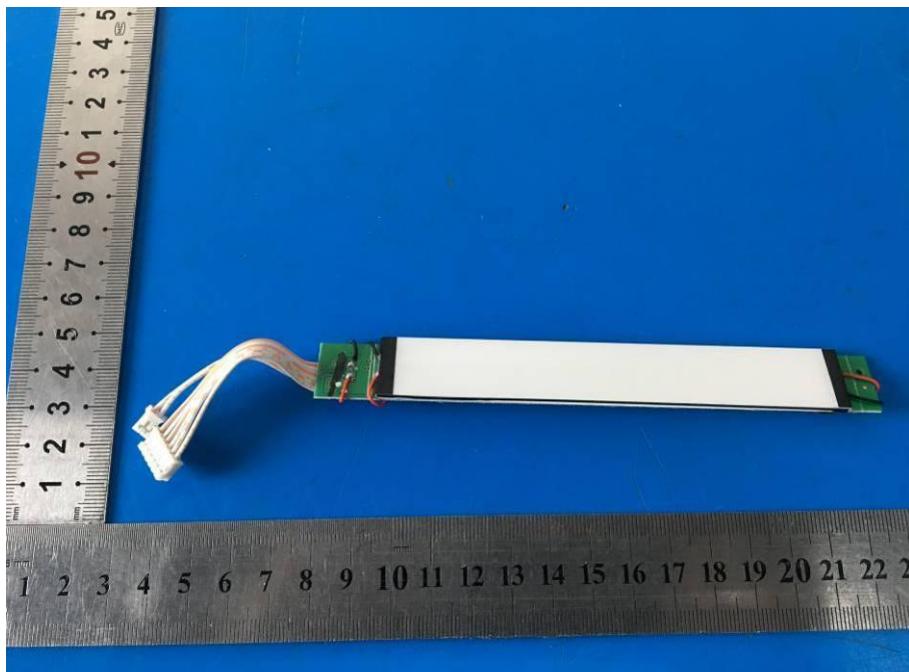
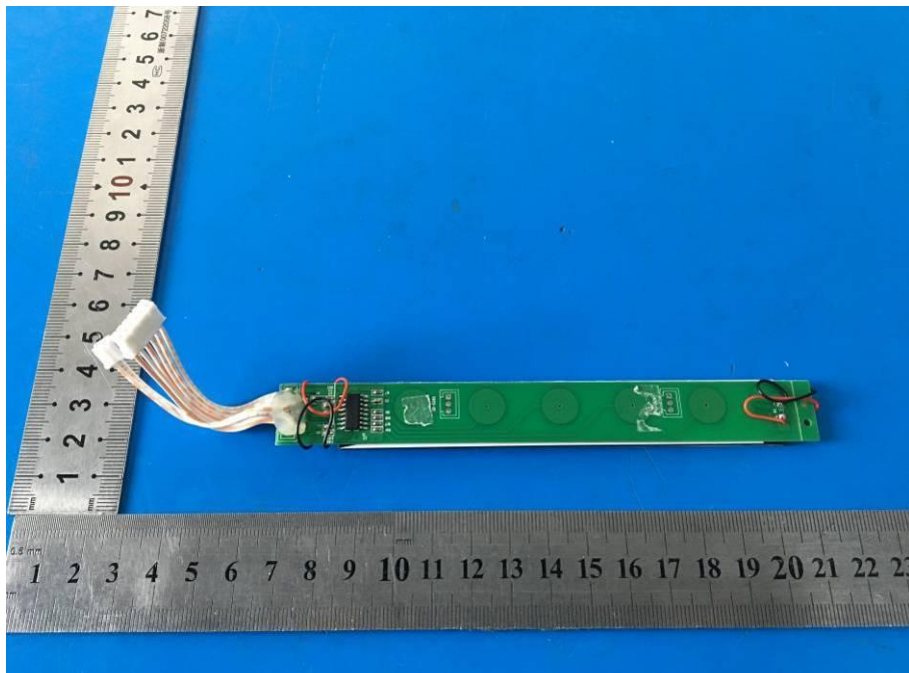


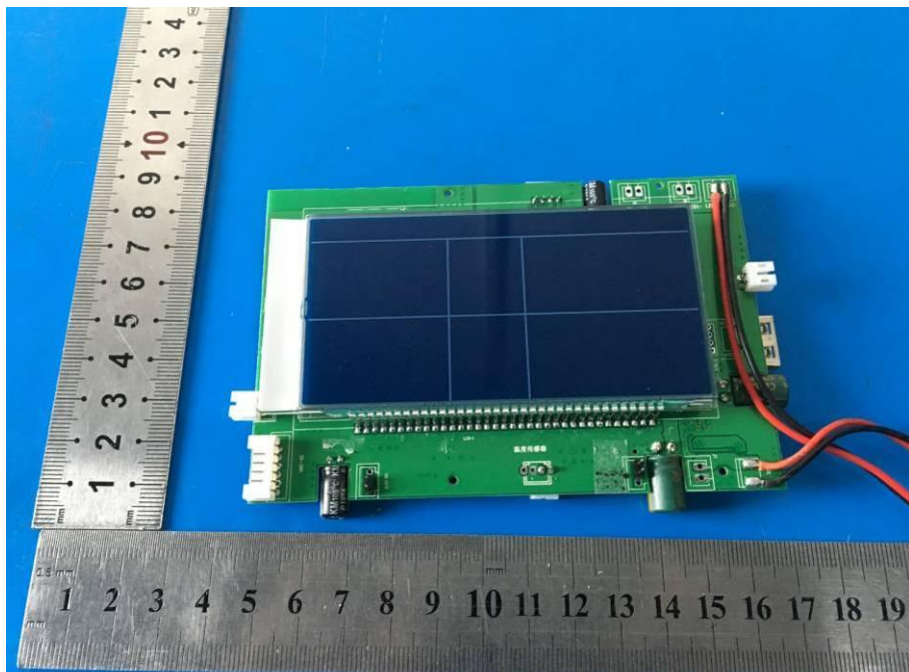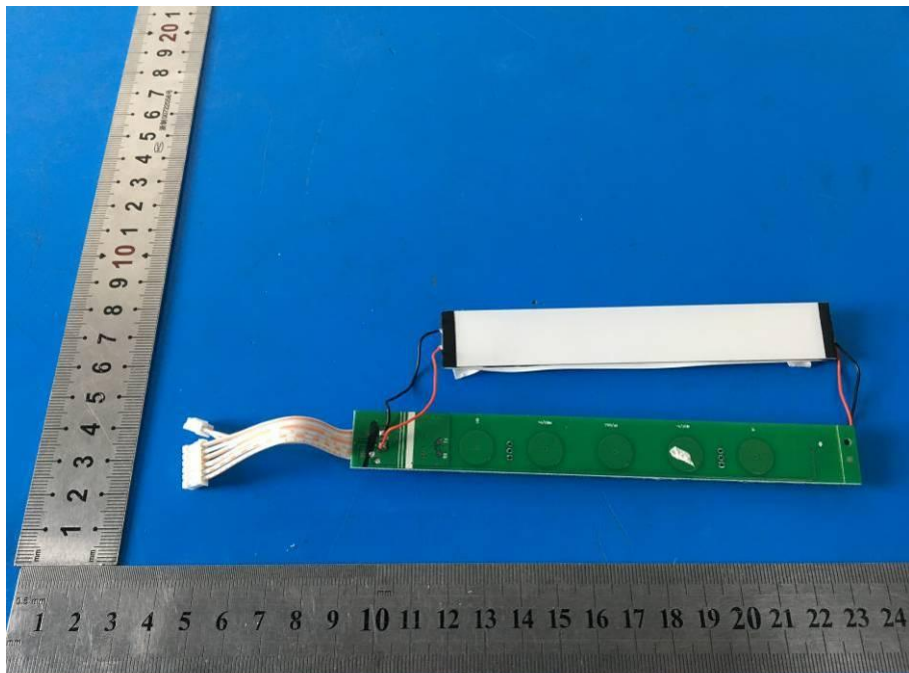

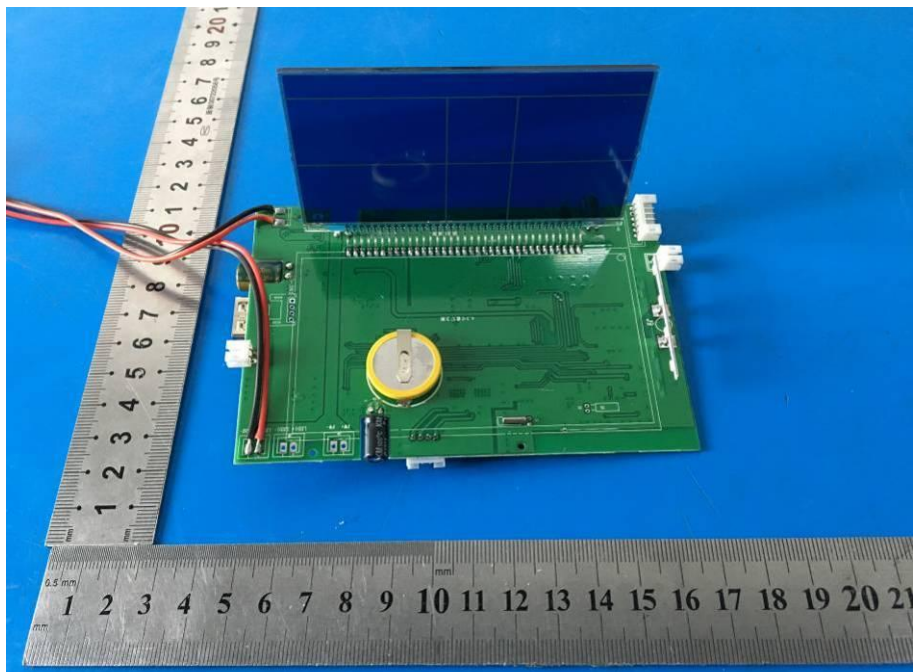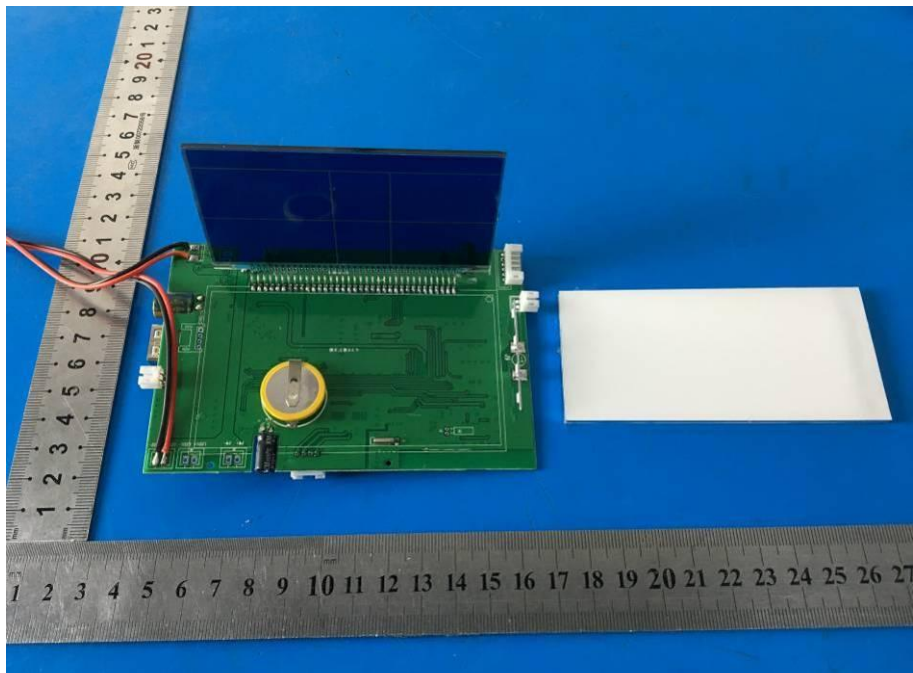



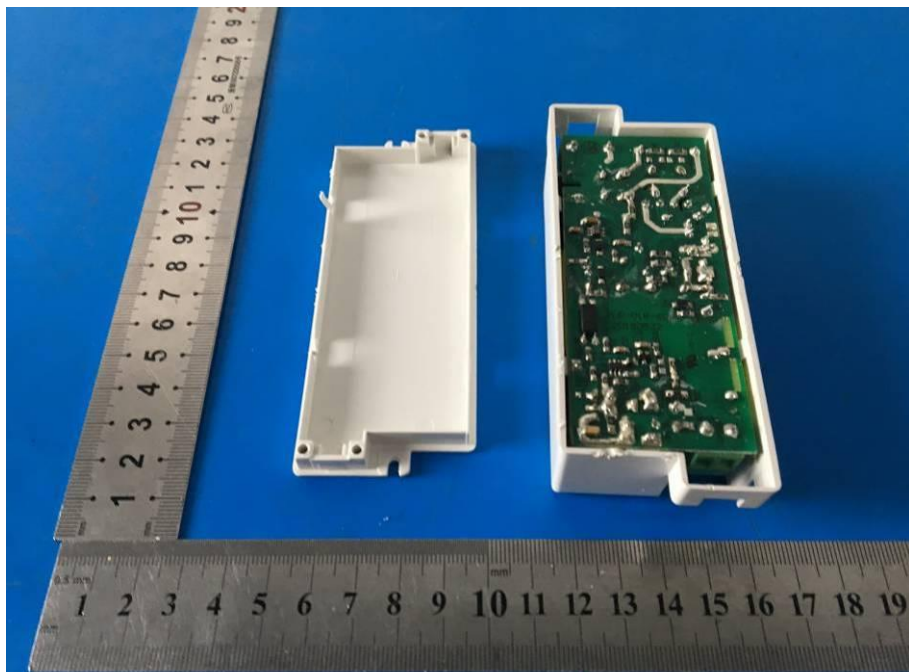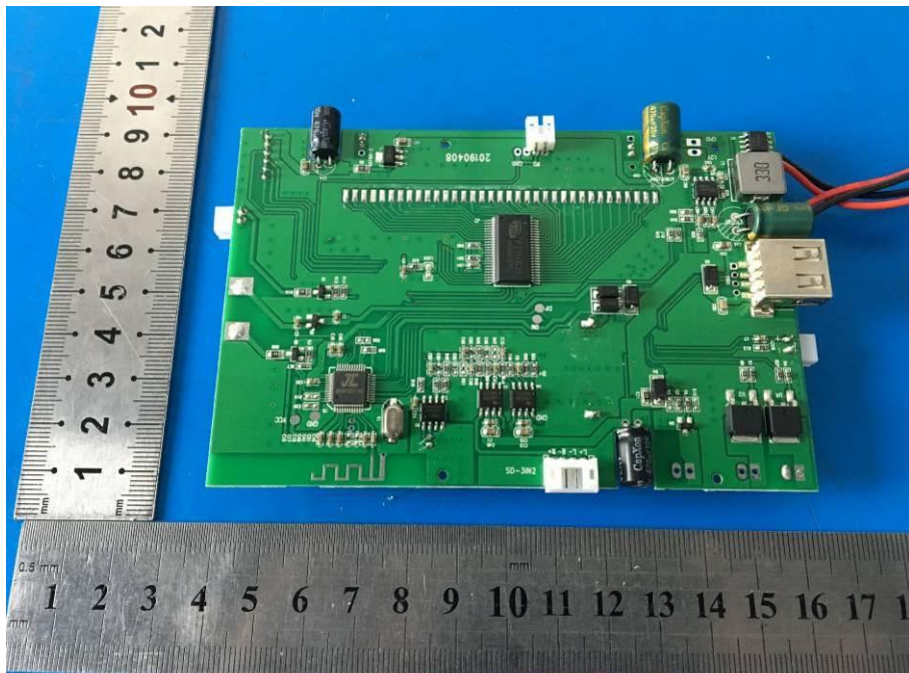

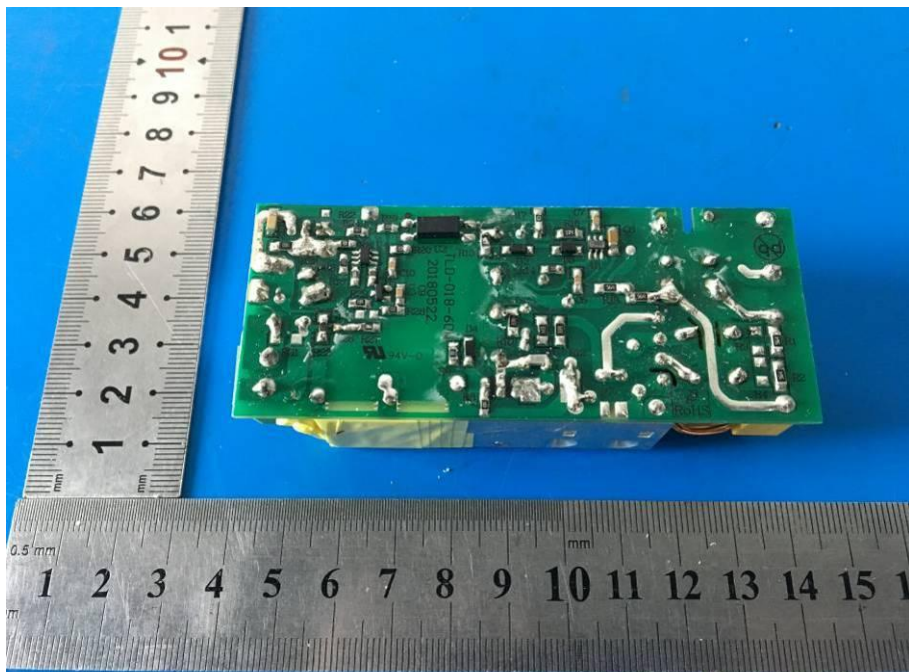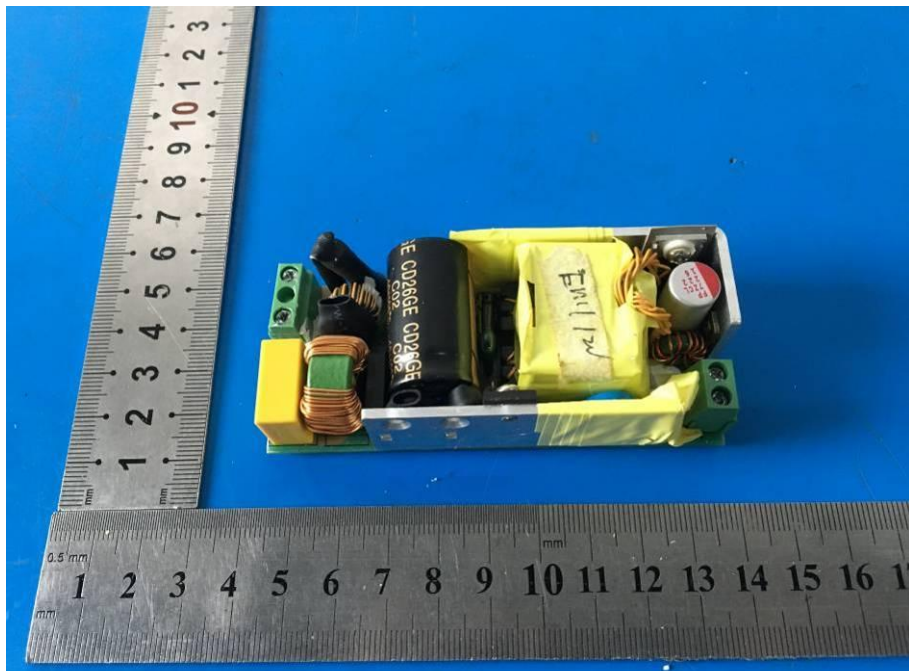

-----THE END OF REPORT-----