

# FCC Part 15C Measurement and Test Report

For

**Hangzhou BroadLink Technology Co., Ltd.**

**Unit C, Building 1, No.57 Jiang'er Road, Changhe Street, Binjiang**

**District, Hangzhou, Zhejiang, P.R. China**

**FCC ID: 2ATEV-BL3353-P**

<b>FCC Rule(s):</b>	<u>FCC Part 15.247</u>
<b>Product Description:</b>	<u>WiFi Module</u>
<b>Tested Model:</b>	<u>BL3353-P</u>
<b>Report No.:</b>	<u>WTX19X04021324W</u>
<b>Sample Receipt Date:</b>	<u>2019-04-10</u>
<b>Tested Date:</b>	<u>2019-04-10 to 2019-04-22</u>
<b>Issued Date:</b>	<u>2019-04-22</u>
<b>Tested By:</b>	<u>Jason Su / Engineer</u>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>
<b>Prepared By:</b>	

*Jason Su*  
*Silin Chen*  
*Jandy So*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
<b>2. SUMMARY OF TEST RESULTS</b>	<b>8</b>
<b>3. RF EXPOSURE</b>	<b>9</b>
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
<b>4. ANTENNA REQUIREMENT</b>	<b>10</b>
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
<b>5. POWER SPECTRAL DENSITY</b>	<b>11</b>
5.1 STANDARD APPLICABLE	11
5.2 TEST PROCEDURE	11
5.3 SUMMARY OF TEST RESULTS/PLOTS	11
<b>6. DTS BANDWIDTH</b>	<b>16</b>
6.1 STANDARD APPLICABLE	16
6.2 TEST PROCEDURE	16
6.3 SUMMARY OF TEST RESULTS/PLOTS	16
<b>7. RF OUTPUT POWER</b>	<b>21</b>
7.1 STANDARD APPLICABLE	21
7.2 TEST PROCEDURE	21
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>27</b>
8.1 STANDARD APPLICABLE	27
8.2 TEST PROCEDURE	27
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	28
8.4 SUMMARY OF TEST RESULTS/PLOTS	28
<b>9. OUT OF BAND EMISSIONS</b>	<b>36</b>
9.1 STANDARD APPLICABLE	36
9.2 TEST PROCEDURE	36
9.3 SUMMARY OF TEST RESULTS/PLOTS	37
<b>10. CONDUCTED EMISSIONS</b>	<b>58</b>
10.1 TEST PROCEDURE	58
10.2 BASIC TEST SETUP BLOCK DIAGRAM	58
10.3 TEST RECEIVER SETUP	58
10.4 SUMMARY OF TEST RESULTS/PLOTS	58

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Hangzhou BroadLink Technology Co., Ltd.  
Address of applicant: Unit C, Building 1, No.57 Jiang'er Road, Changhe Street,  
Binjiang District, Hangzhou, Zhejiang, P.R. China

Manufacturer: Hangzhou BroadLink Technology Co., Ltd.  
Address of manufacturer: Unit C, Building 1, No.57 Jiang'er Road, Changhe Street,  
Binjiang District, Hangzhou, Zhejiang, P.R. China

General Description of EUT	
Product Name:	WiFi Module
Trade Name:	/
Model No.:	BL3353-P
Adding Model(s):	/
Rated Voltage:	DC 3.3V
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n-HT20, 802.11n-HT40
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20 2422-2452MHz for 802.11n-HT40
RF Output Power:	16.84dBm (Conducted)
Type of Modulation:	DBPSK, BPSK, DQPSK, QPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	1.2dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity:	50~56 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1091	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	DTS Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable





### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1091, the mobile transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure




According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




### 5.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-16.37	8
	2437	-16.08	8
	2462	-16.25	8
802.11g_54Mbps	2412	-20.58	8
	2437	-20.45	8
	2462	-20.59	8
802.11n-HT20_MCS7	2412	-21.50	8
	2437	-21.49	8
	2462	-21.51	8
802.11n-HT40_MCS7	2422	-24.80	8
	2437	-25.02	8
	2452	-24.87	8

Please refer to the following test plots:
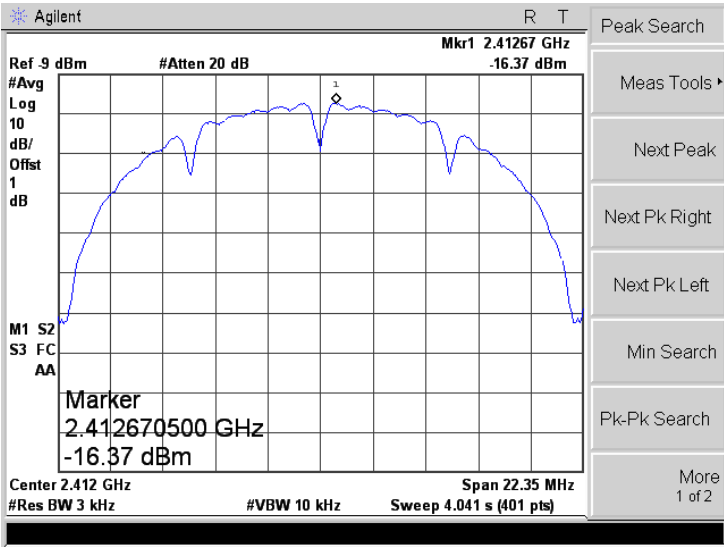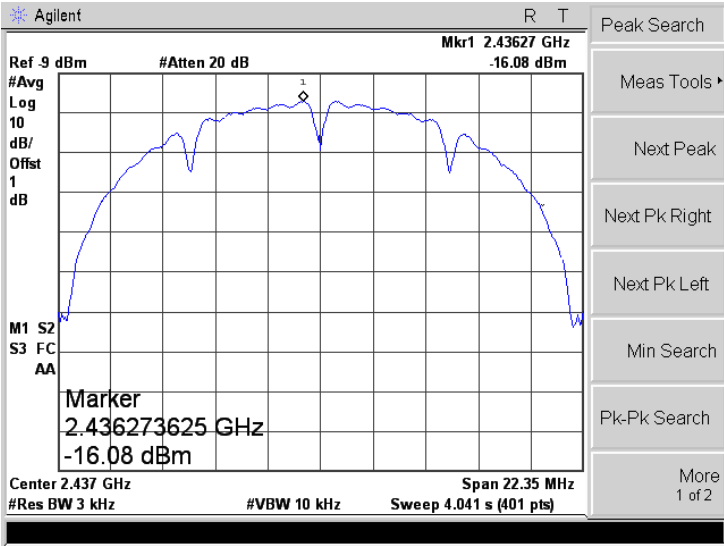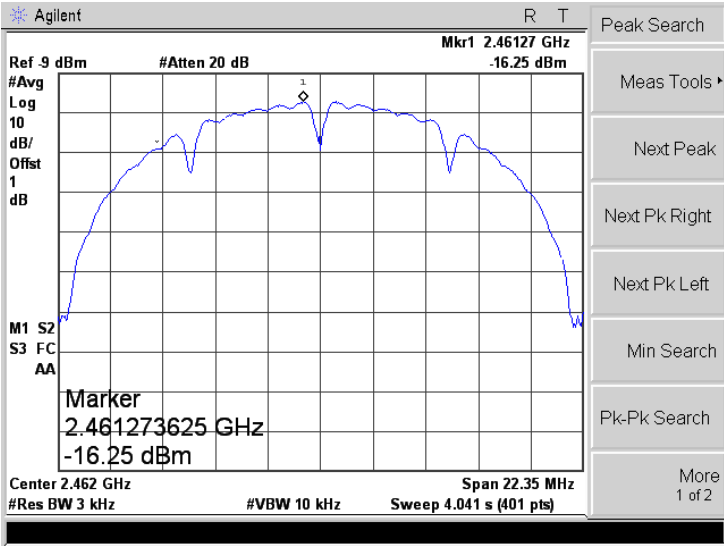
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
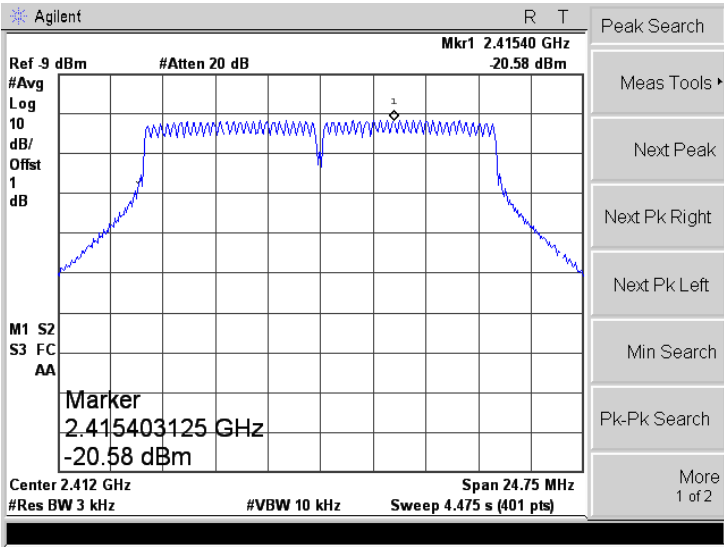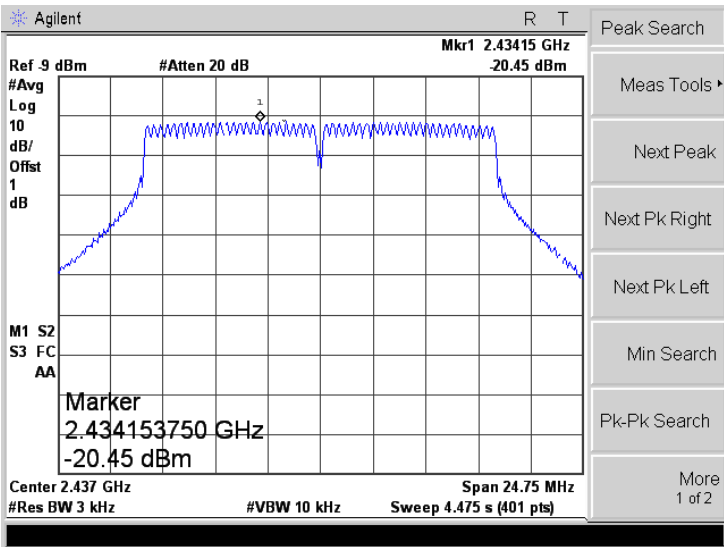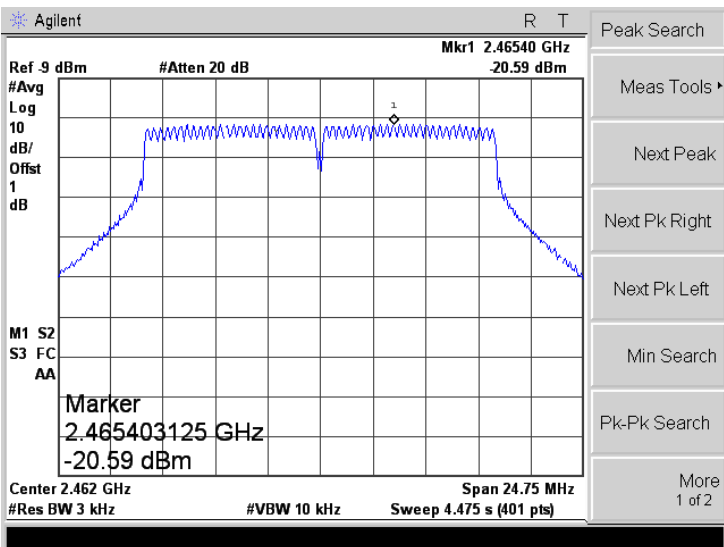
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	
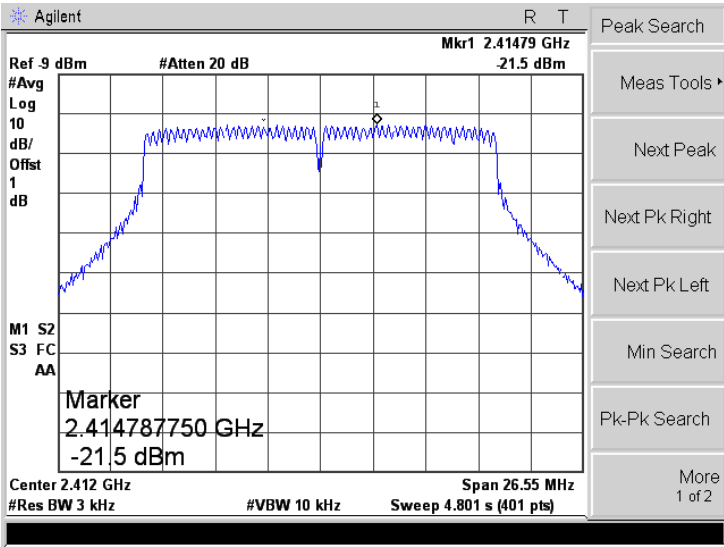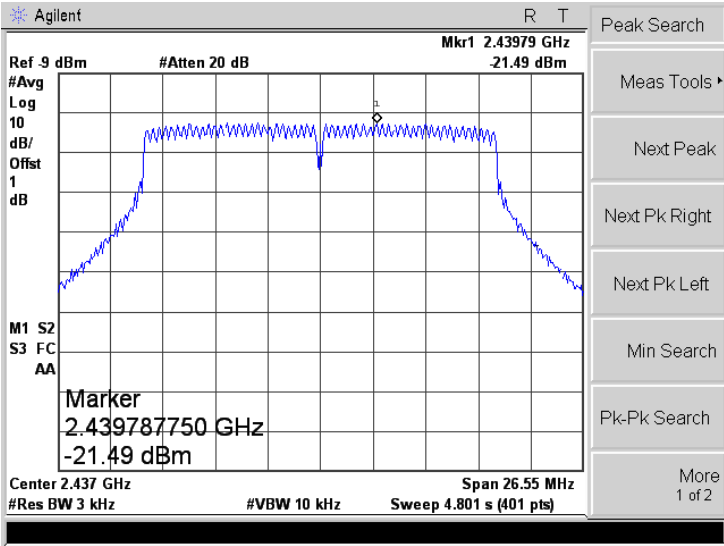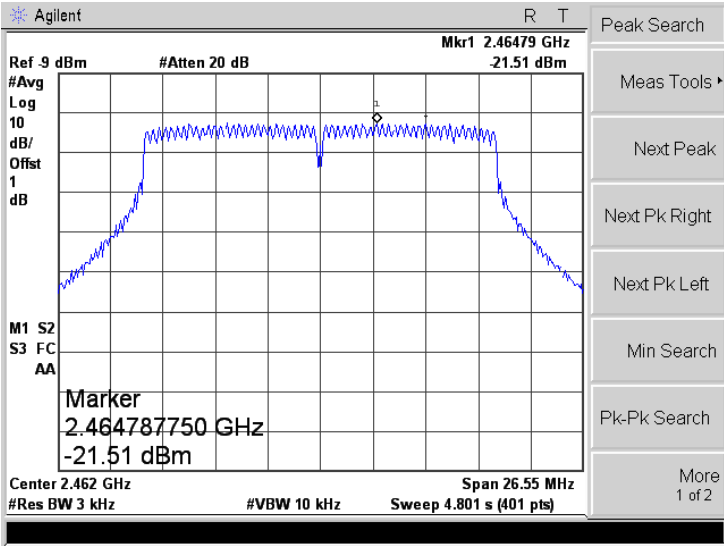
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	
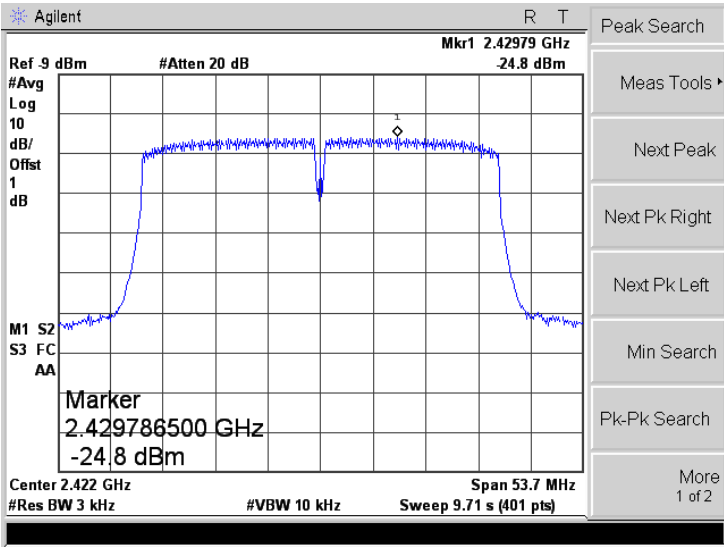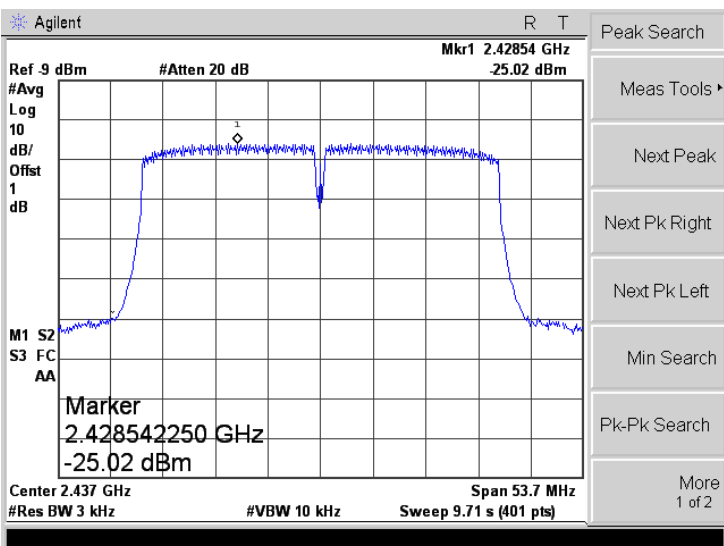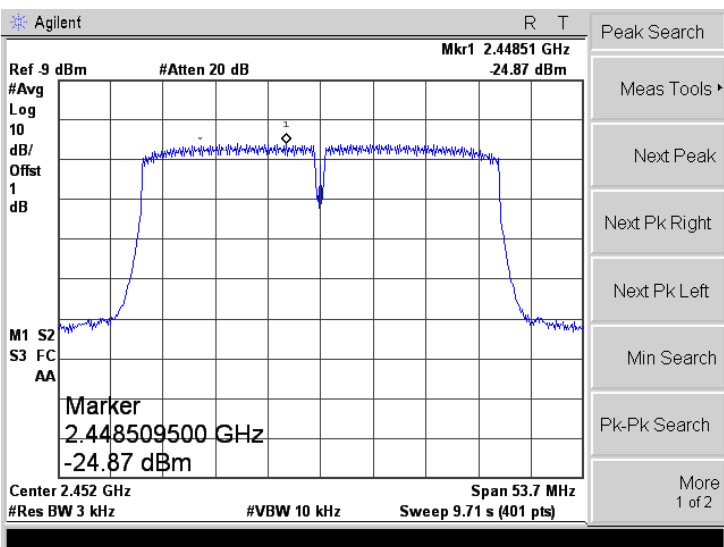
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

## 6. DTS Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.077	$\geq 500$
	2437	10.022	$\geq 500$
	2462	10.087	$\geq 500$
802.11g_54Mbps	2412	16.503	$\geq 500$
	2437	16.516	$\geq 500$
	2462	16.522	$\geq 500$
802.11n-HT20_MCS7	2412	17.750	$\geq 500$
	2437	17.670	$\geq 500$
	2462	17.651	$\geq 500$
802.11n-HT40_MCS7	2422	36.156	$\geq 500$
	2437	36.329	$\geq 500$
	2452	36.326	$\geq 500$




Please refer to the following test plots:



<p>802.11b-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.41200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 14.8408 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -21.310 kHz</p> <p>x dB Bandwidth 10.077 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 14.8641 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -60.428 kHz</p> <p>x dB Bandwidth 10.022 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.46200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 14.8822 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -45.845 kHz</p> <p>x dB Bandwidth 10.087 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.41200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4254 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -42.354 kHz x dB Bandwidth 16.503 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4372 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -61.383 kHz x dB Bandwidth 16.516 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.46200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 16.4310 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -55.662 kHz x dB Bandwidth 16.522 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
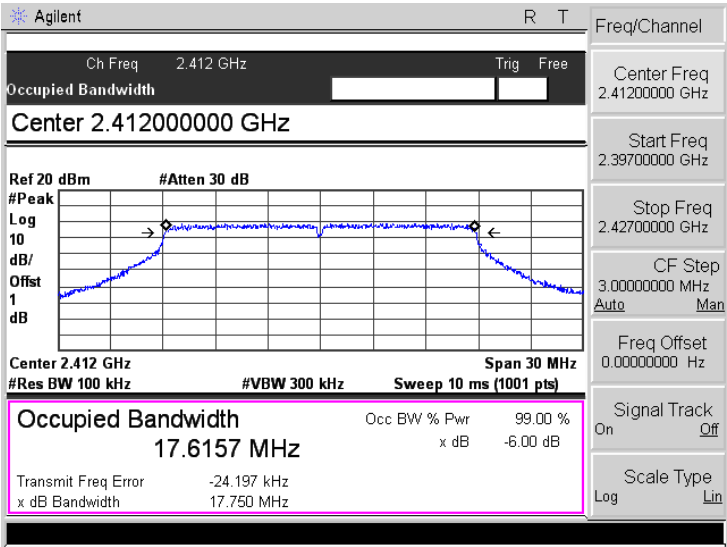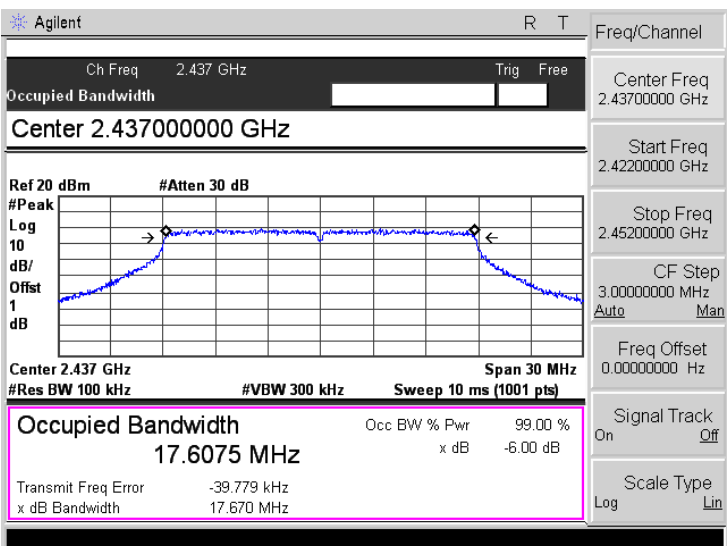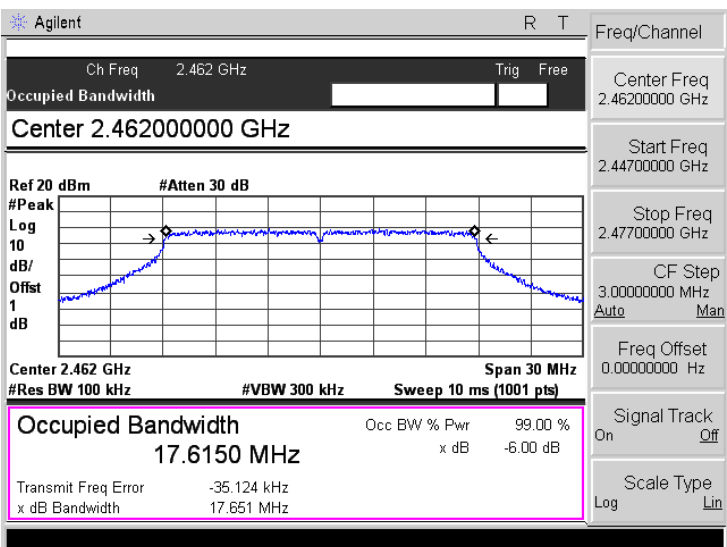
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.41200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.6157 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -24.197 kHz</p> <p>x dB Bandwidth 17.750 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.6075 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -39.779 kHz</p> <p>x dB Bandwidth 17.670 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.46200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>17.6150 MHz</b> x dB -6.00 dB</p> <p>Transmit Freq Error -35.124 kHz</p> <p>x dB Bandwidth 17.651 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
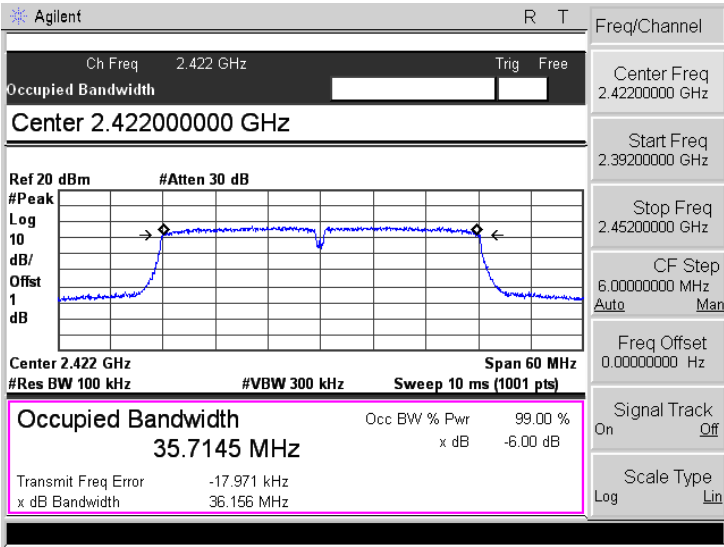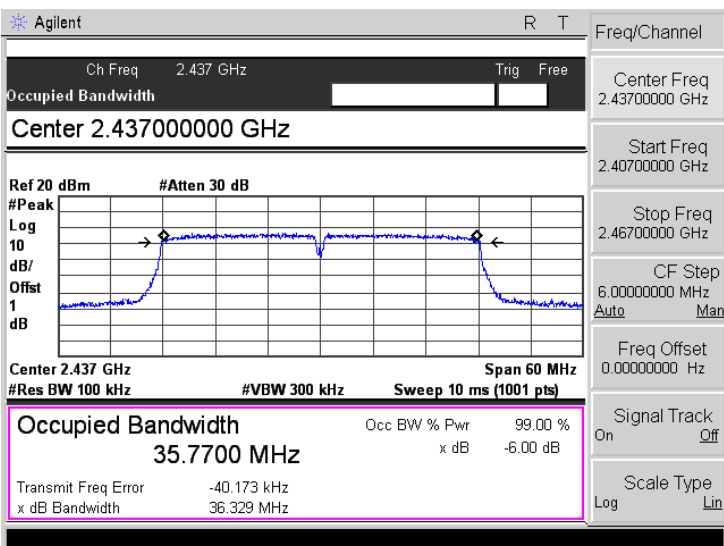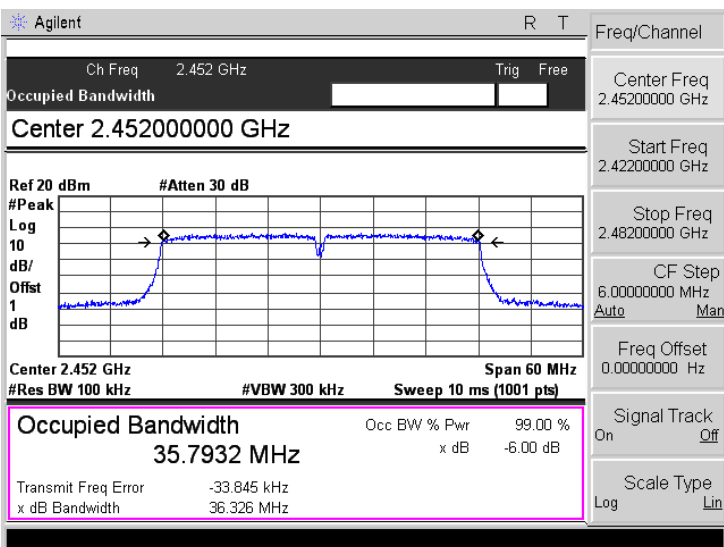
<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.42200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.7145 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -17.971 kHz x dB Bandwidth 36.156 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.7700 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -40.173 kHz x dB Bandwidth 36.329 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.45200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth 35.7932 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -33.845 kHz x dB Bandwidth 36.326 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

---

## 7. RF Output Power

---

### 7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure




According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.3 Summary of Test Results/Plots




Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	16.60	45.709	1000
	2437	16.84	48.306	1000
	2462	16.25	42.170	1000
802.11g_54Mbps	2412	14.23	26.485	1000
	2437	14.51	28.249	1000
	2462	14.38	27.416	1000
802.11n HT20_MCS7	2412	13.12	20.512	1000
	2437	13.38	21.777	1000
	2462	13.21	20.941	1000
802.11n HT40_MCS7	2422	13.35	21.627	1000
	2437	13.22	20.989	1000
	2452	12.74	18.793	1000




Please refer to the following test plots:
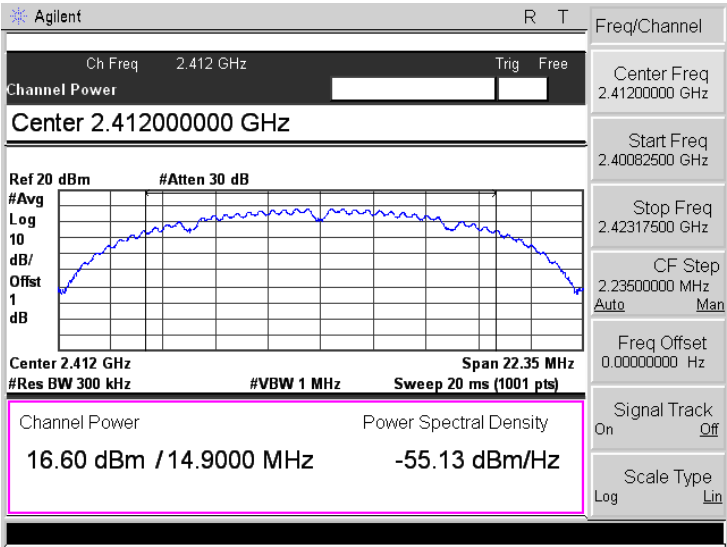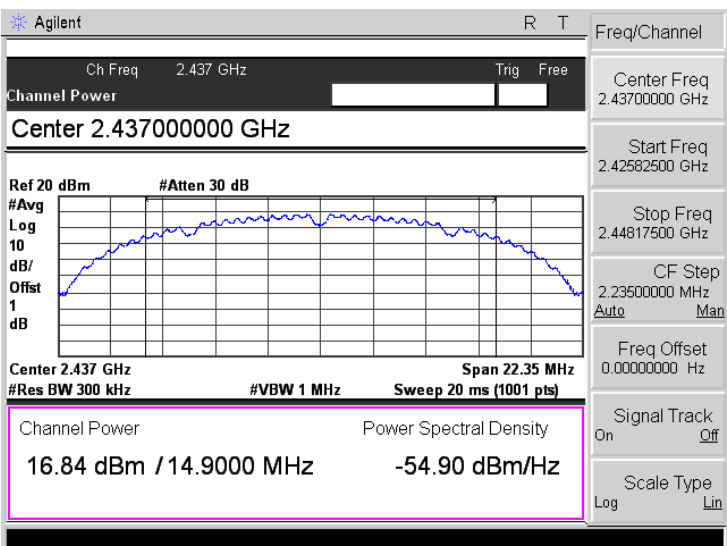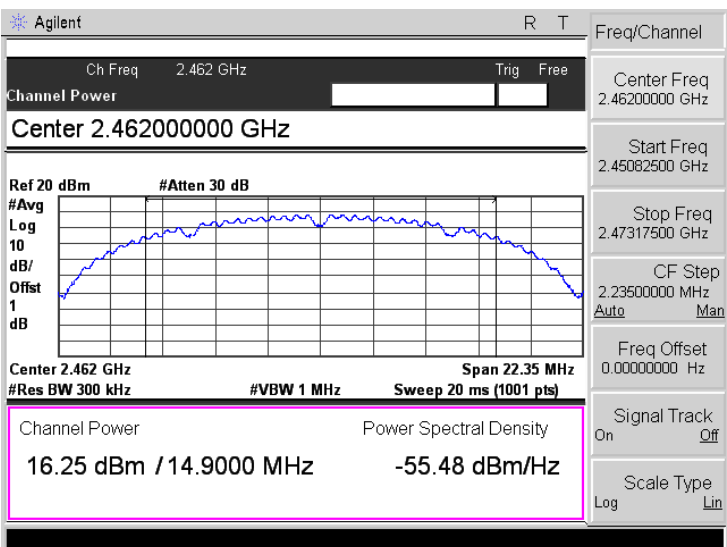
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 2.41200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 22.35 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density <b>16.60 dBm / 14.9000 MHz -55.13 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40082500 GHz</p> <p>Stop Freq 2.42317500 GHz</p> <p>CF Step 2.23500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 22.35 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density <b>16.84 dBm / 14.9000 MHz -54.90 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42582500 GHz</p> <p>Stop Freq 2.44817500 GHz</p> <p>CF Step 2.23500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 2.46200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 22.35 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density <b>16.25 dBm / 14.9000 MHz -55.48 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45082500 GHz</p> <p>Stop Freq 2.47317500 GHz</p> <p>CF Step 2.23500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
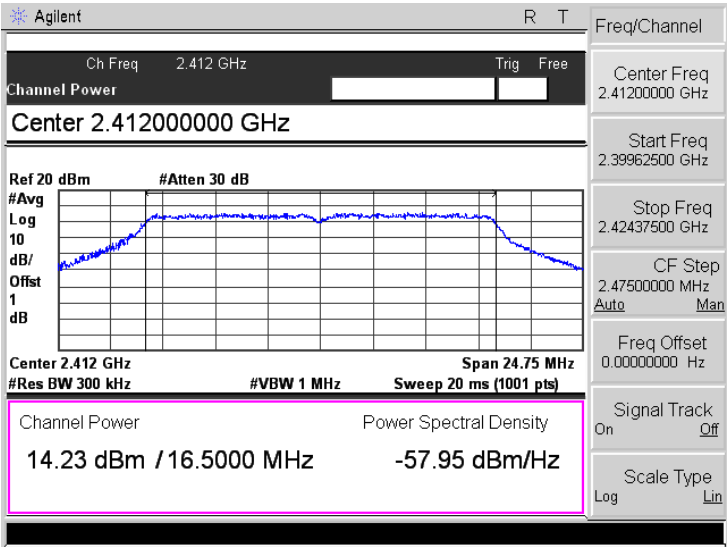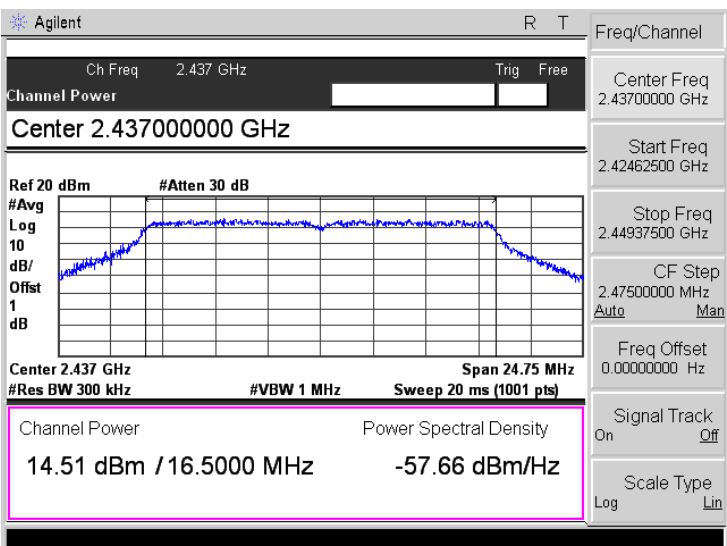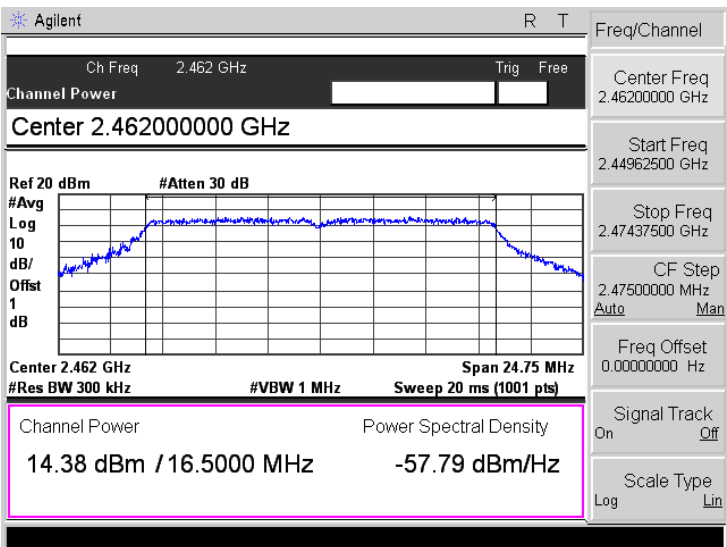
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 2.41200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 24.75 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density <b>14.23 dBm / 16.5000 MHz -57.95 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39962500 GHz</p> <p>Stop Freq 2.42437500 GHz</p> <p>CF Step 2.47500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 2.43700000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 24.75 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density <b>14.51 dBm / 16.5000 MHz -57.66 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42462500 GHz</p> <p>Stop Freq 2.44937500 GHz</p> <p>CF Step 2.47500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p><b>Center 2.46200000 GHz</b></p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 24.75 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density <b>14.38 dBm / 16.5000 MHz -57.79 dBm/Hz</b></p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44962500 GHz</p> <p>Stop Freq 2.47437500 GHz</p> <p>CF Step 2.47500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

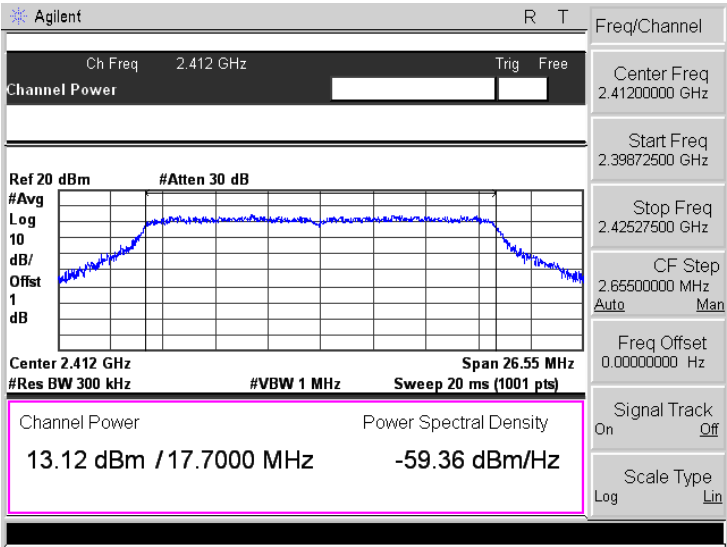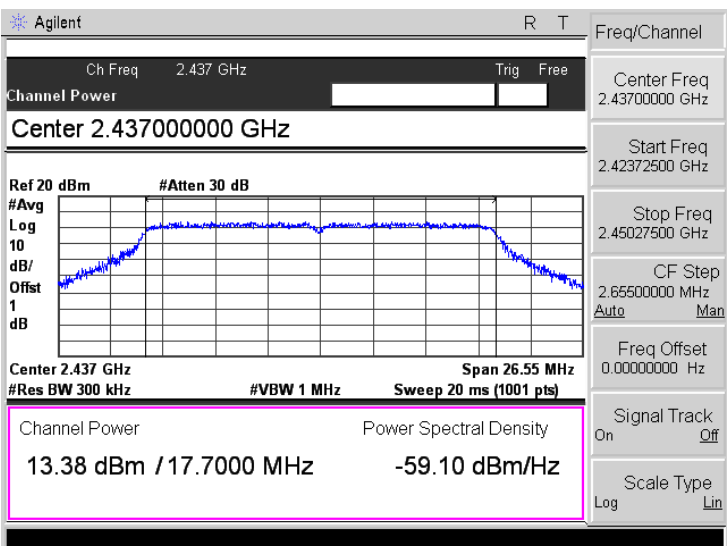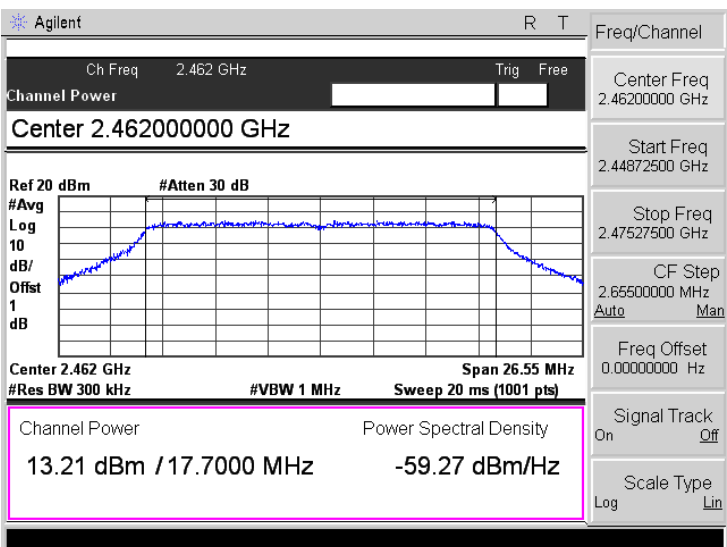

<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 26.55 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.12 dBm / 17.7000 MHz -59.36 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39872500 GHz</p> <p>Stop Freq 2.42527500 GHz</p> <p>CF Step 2.65500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 26.55 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.38 dBm / 17.7000 MHz -59.10 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42372500 GHz</p> <p>Stop Freq 2.45027500 GHz</p> <p>CF Step 2.65500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 26.55 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.21 dBm / 17.7000 MHz -59.27 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44872500 GHz</p> <p>Stop Freq 2.47527500 GHz</p> <p>CF Step 2.65500000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
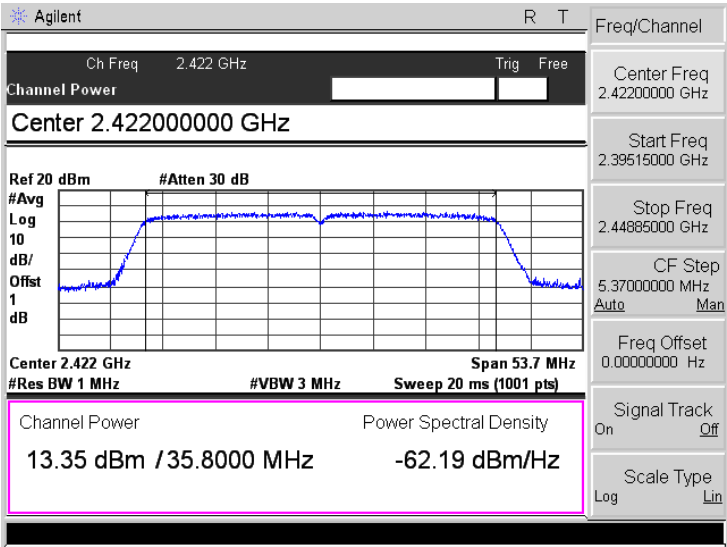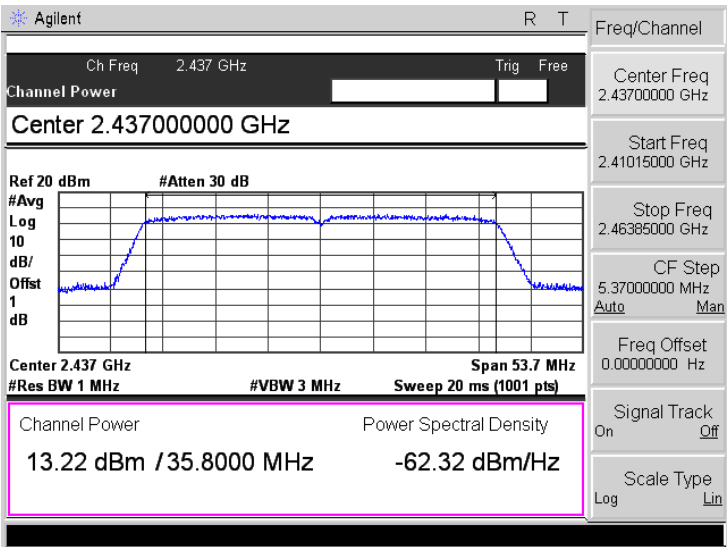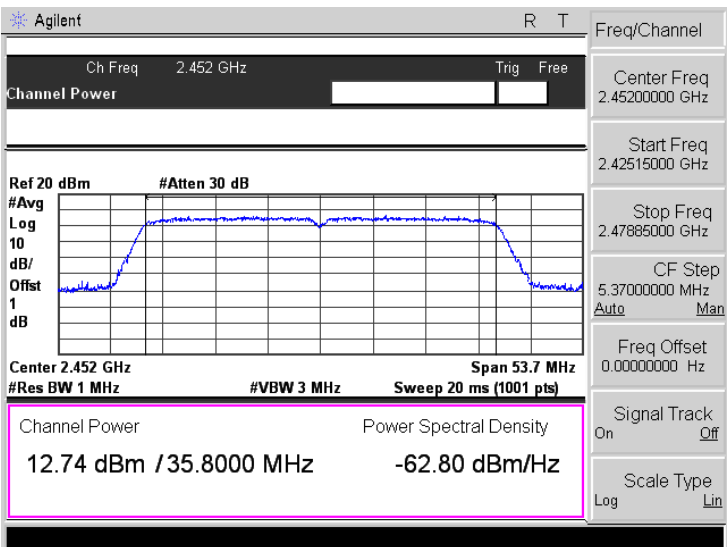
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.42200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 53.7 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.35 dBm / 35.8000 MHz -62.19 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39515000 GHz</p> <p>Stop Freq 2.44885000 GHz</p> <p>CF Step 5.37000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 53.7 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.22 dBm / 35.8000 MHz -62.32 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41015000 GHz</p> <p>Stop Freq 2.46385000 GHz</p> <p>CF Step 5.37000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 53.7 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.74 dBm / 35.8000 MHz -62.80 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42515000 GHz</p> <p>Stop Freq 2.47885000 GHz</p> <p>CF Step 5.37000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

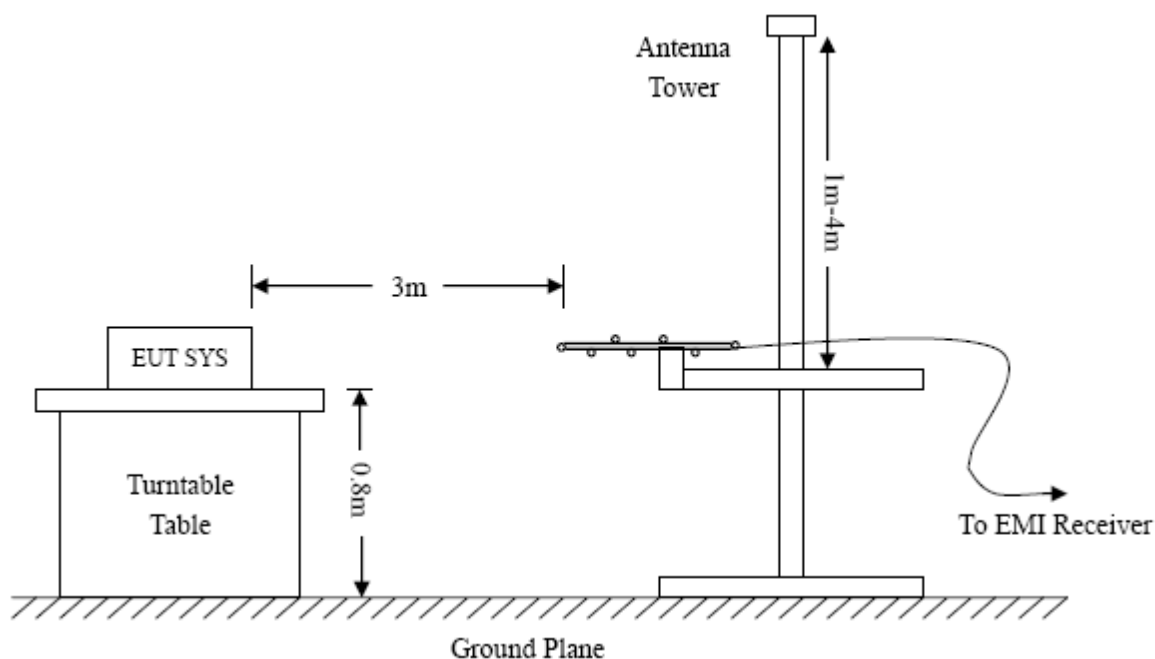

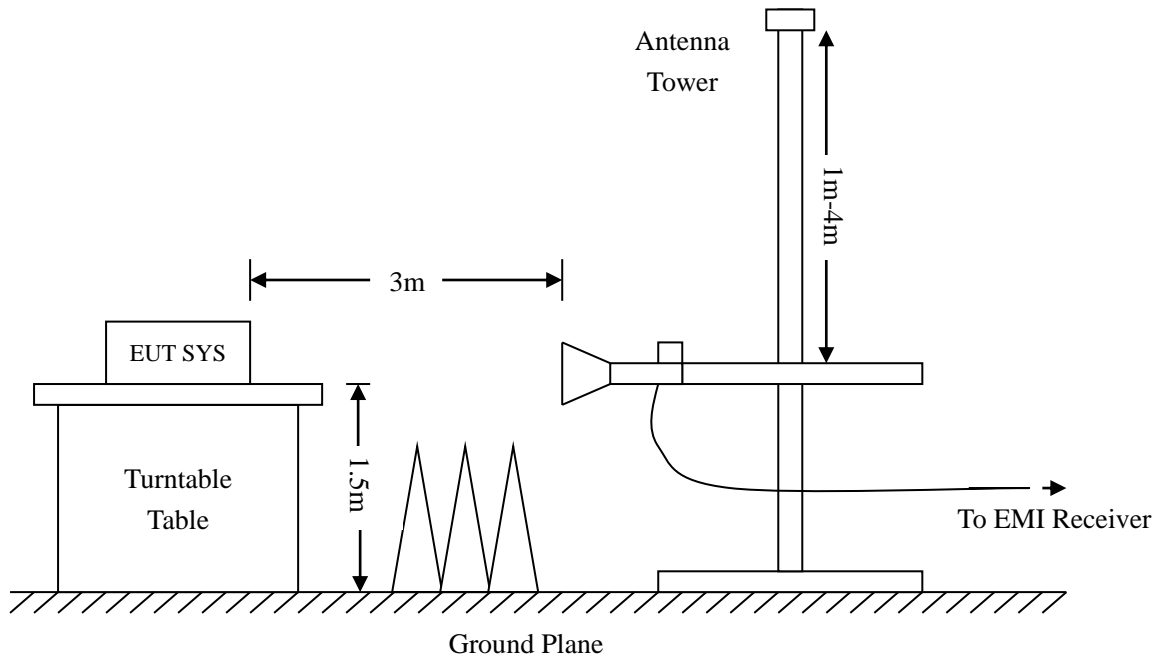

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=360KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


### 8.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

*All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.*


## ➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

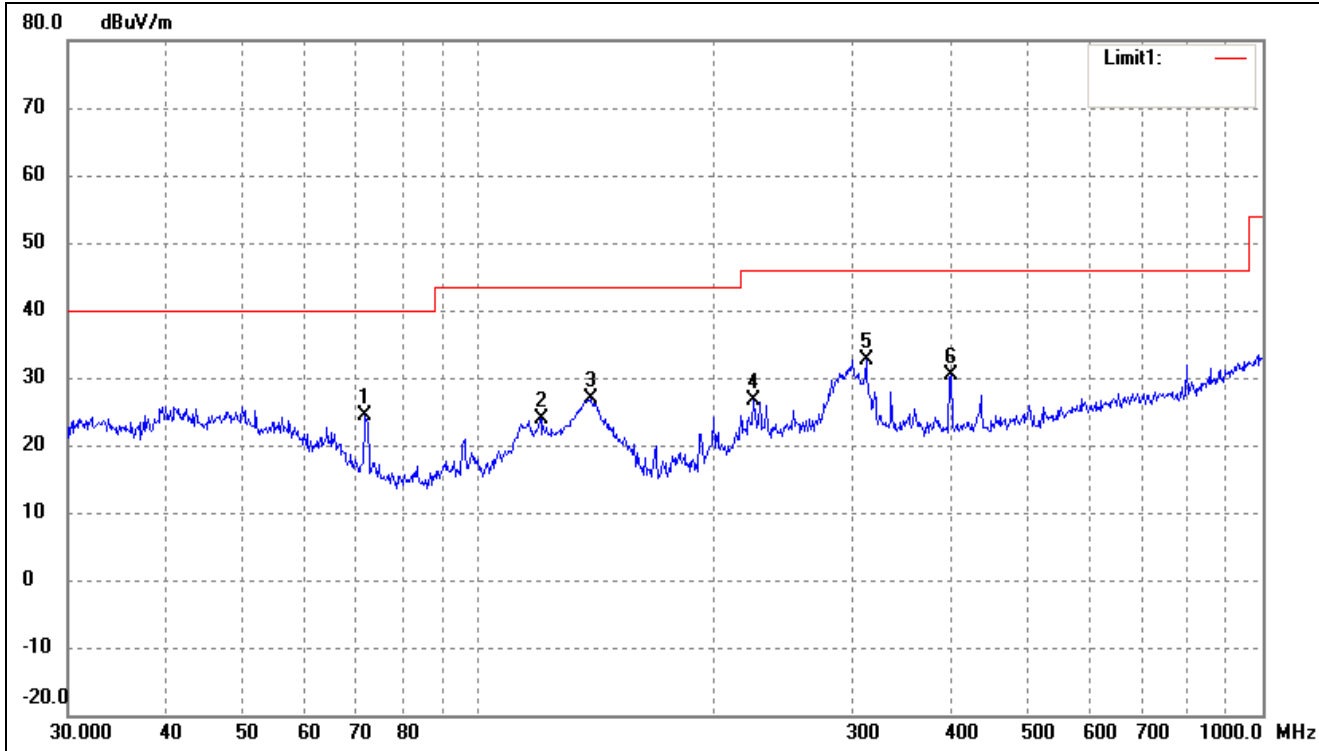


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	71.8320	39.67	-15.22	24.45	40.00	-15.55	236	100	peak
2	120.2766	40.02	-16.07	23.95	43.50	-19.55	99	100	peak
3	139.3613	44.52	-17.61	26.91	43.50	-16.59	297	100	peak
4	224.5193	39.00	-12.39	26.61	46.00	-19.39	92	100	peak
5	312.1794	41.68	-9.03	32.65	46.00	-13.35	337	100	peak
6	400.4319	37.76	-7.43	30.33	46.00	-15.67	134	100	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

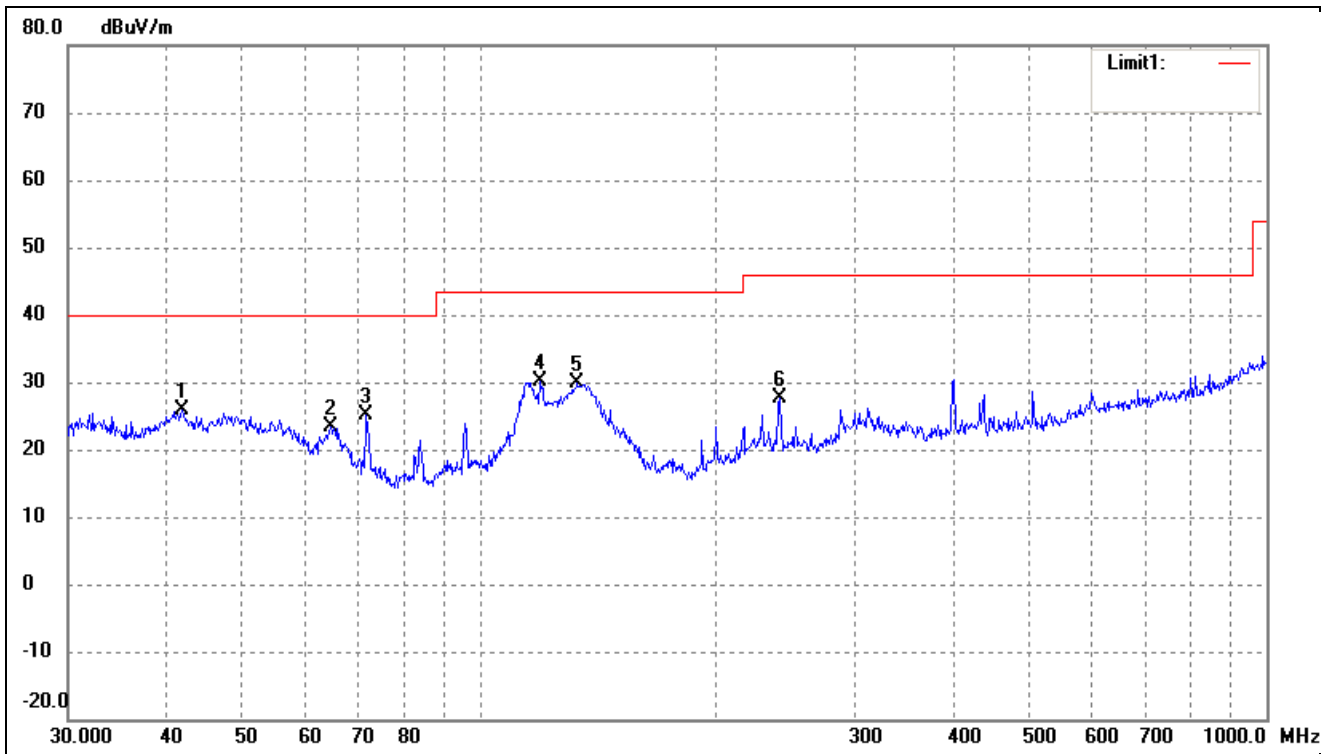


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.8596	33.97	-8.07	25.90	40.00	-14.10	329	100	peak
2	64.6594	35.51	-12.08	23.43	40.00	-16.57	90	100	peak
3	71.8320	40.27	-15.22	25.05	40.00	-14.95	178	100	peak
4	119.4361	46.14	-15.93	30.21	43.50	-13.29	107	100	peak
5	133.1511	47.65	-17.69	29.96	43.50	-13.54	187	100	peak
6	240.8304	38.93	-11.36	27.57	46.00	-18.43	292	100	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

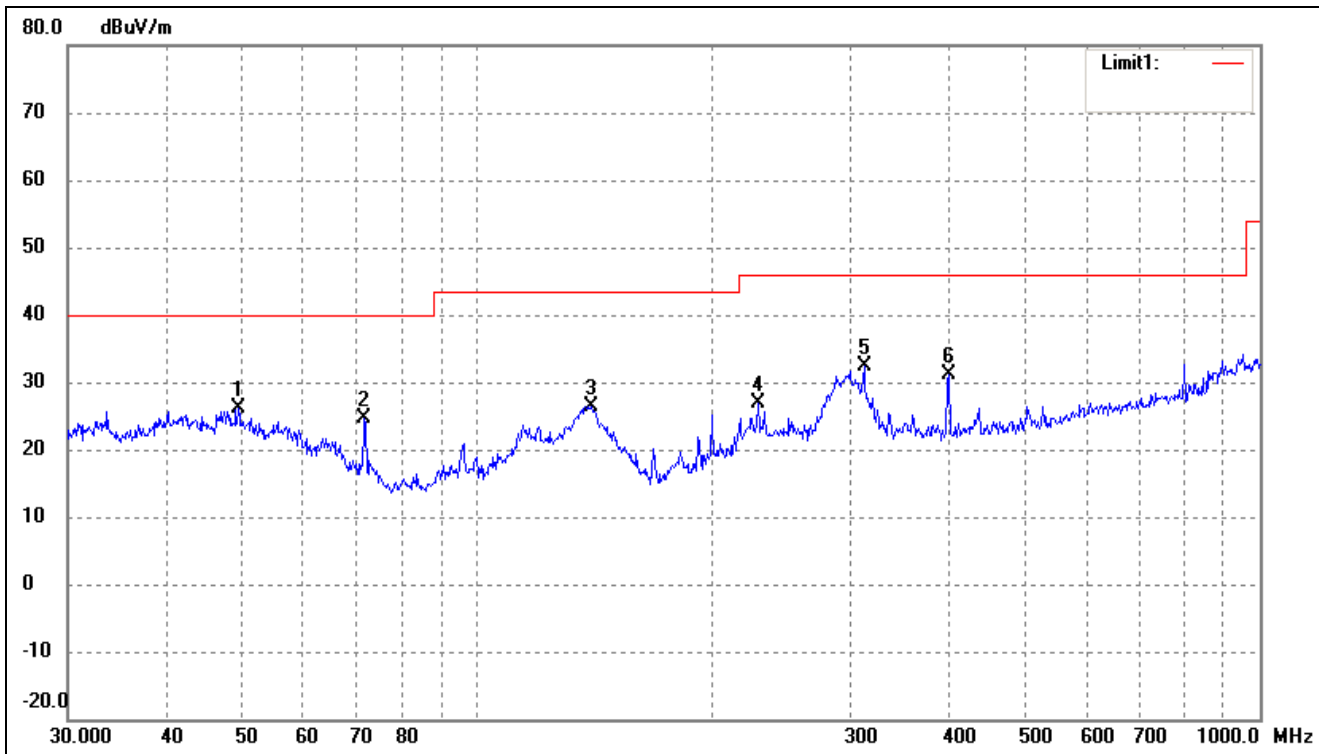

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.5328	34.49	-8.45	26.04	40.00	-13.96	142	100	peak
2	71.8320	39.89	-15.22	24.67	40.00	-15.33	329	100	peak
3	139.8508	44.07	-17.60	26.47	43.50	-17.03	76	100	peak
4	228.4904	38.94	-12.13	26.81	46.00	-19.19	190	100	peak
5	312.1794	41.44	-9.03	32.41	46.00	-13.59	101	100	peak
6	400.4319	38.60	-7.43	31.17	46.00	-14.83	258	100	peak


802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

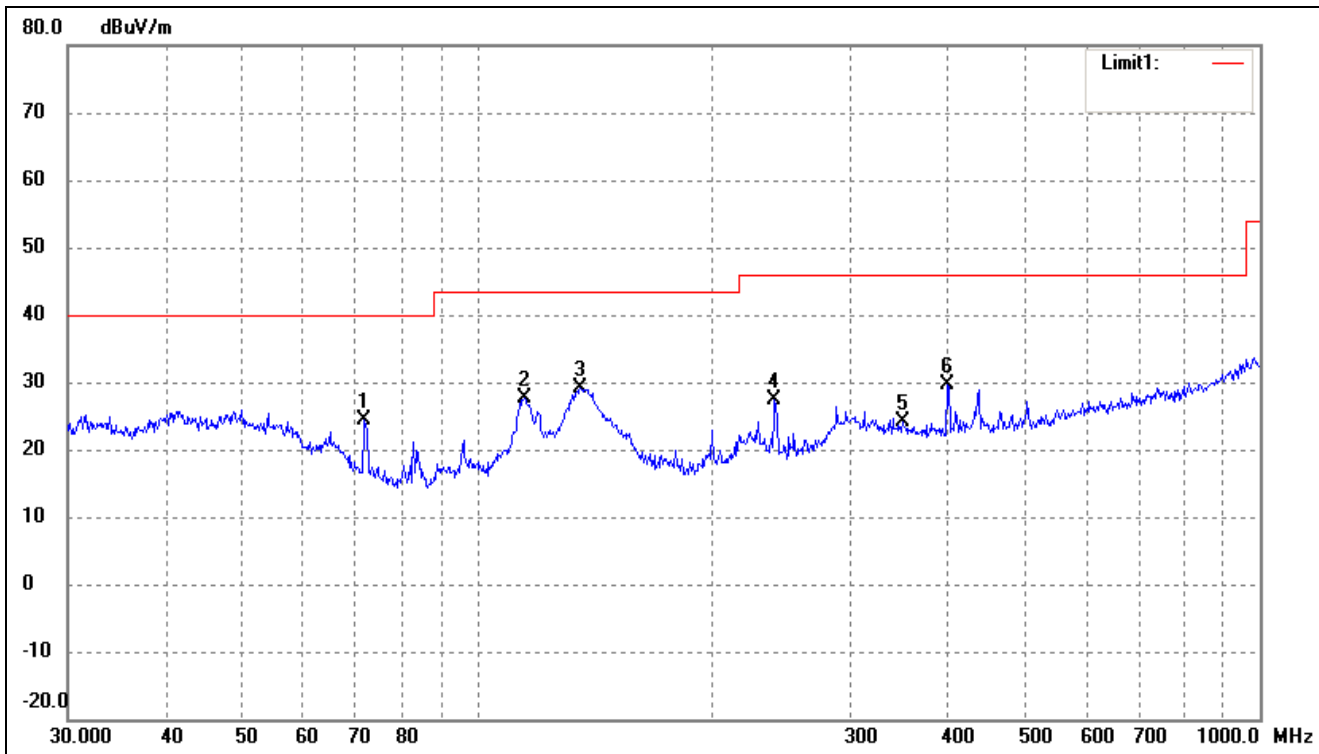

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	71.8320	39.64	-15.22	24.42	40.00	-15.58	339	100	peak
2	114.9169	42.92	-15.30	27.62	43.50	-15.88	292	100	peak
3	135.5062	46.82	-17.75	29.07	43.50	-14.43	53	100	peak
4	239.9874	38.64	-11.38	27.26	46.00	-18.74	208	100	peak
5	349.2500	31.98	-7.96	24.02	46.00	-21.98	180	100	peak
6	399.0302	37.06	-7.48	29.58	46.00	-16.42	330	100	peak




802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

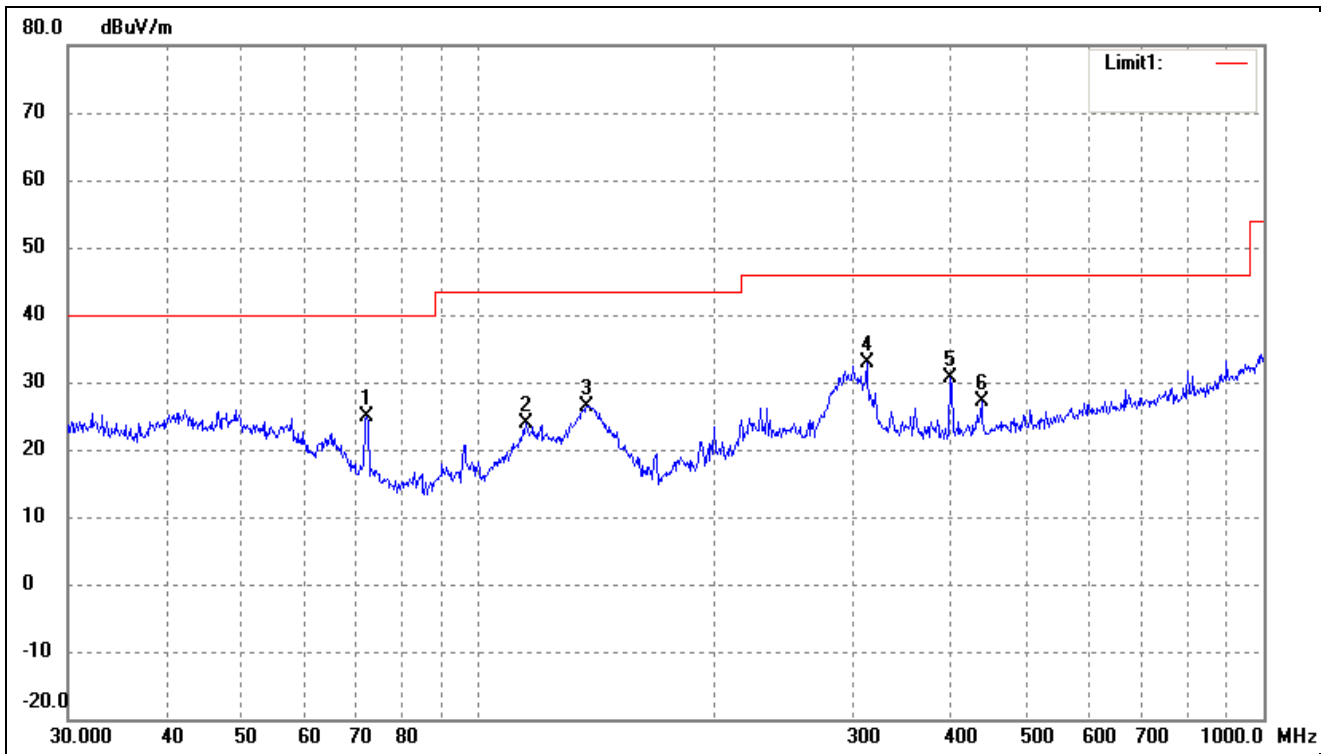

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	72.0843	40.10	-15.32	24.78	40.00	-15.22	169	100	peak
2	114.9169	39.07	-15.30	23.77	43.50	-19.73	90	100	peak
3	137.4202	44.19	-17.69	26.50	43.50	-17.00	103	100	peak
4	312.1794	42.01	-9.03	32.98	46.00	-13.02	149	100	peak
5	399.0302	38.01	-7.48	30.53	46.00	-15.47	342	100	peak
6	437.1199	34.20	-6.97	27.23	46.00	-18.77	258	100	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

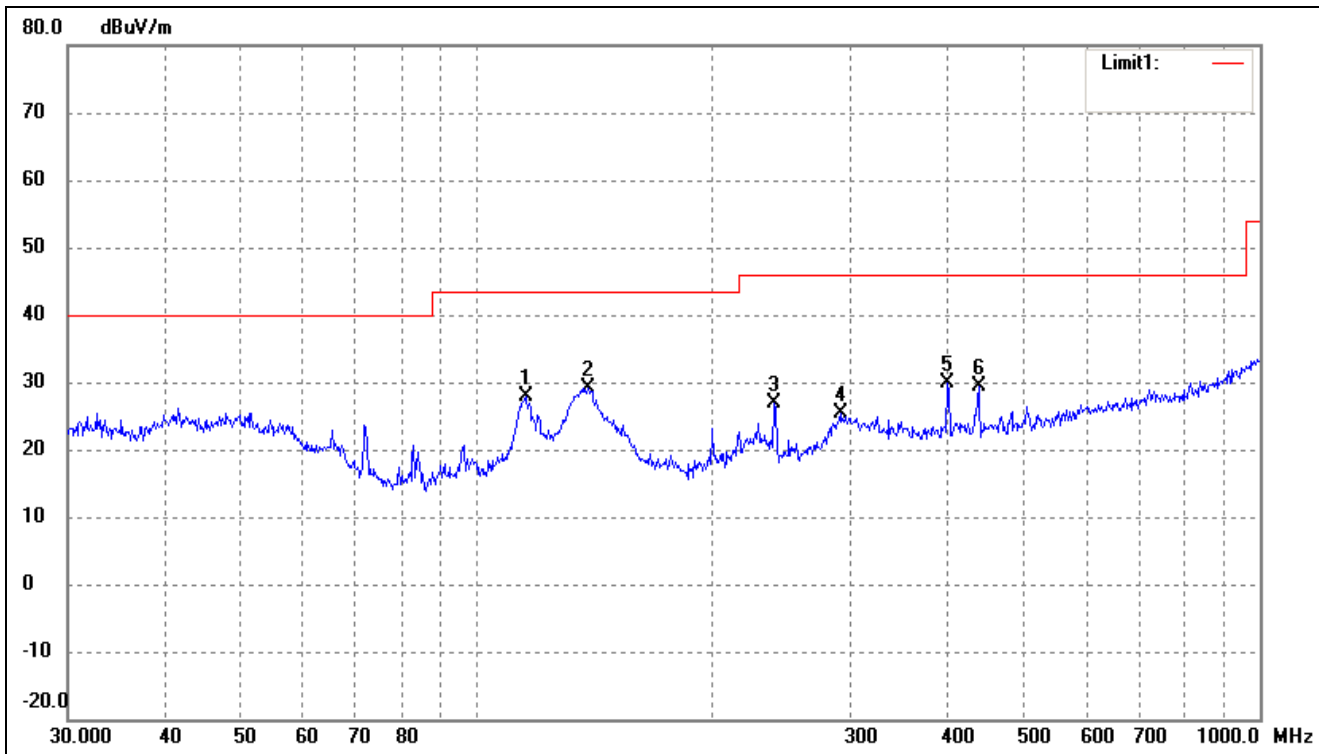

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	115.3205	43.33	-15.36	27.97	43.50	-15.53	89	100	peak
2	138.8735	46.66	-17.63	29.03	43.50	-14.47	191	100	peak
3	239.9874	38.14	-11.38	26.76	46.00	-19.24	150	100	peak
4	291.0360	35.17	-9.76	25.41	46.00	-20.59	99	100	peak
5	399.0302	37.39	-7.48	29.91	46.00	-16.09	73	100	peak
6	437.1199	36.24	-6.97	29.27	46.00	-16.73	335	100	peak

- Spurious Emissions Below 1GHz
- Test Mode: 802.11b\_11Mbps (worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	60.06	-3.86	56.2	74	-17.8	H	PK
4824.000	41.02	-3.86	37.16	54	-16.84	H	AV
7236.000	54.37	1.1	55.47	74	-18.53	H	PK
7236.000	40.92	1.1	42.02	54	-11.98	H	AV
4824.000	58.51	-3.86	54.65	74	-19.35	V	PK
4824.000	42.97	-3.86	39.11	54	-14.89	V	AV
7236.000	55.48	1.1	56.58	74	-17.42	V	PK
7236.000	39.99	1.1	41.09	54	-12.91	V	AV
Middle Channel-2437MHz							
4874.000	58.72	-3.74	54.98	74	-19.02	H	PK
4874.000	43.33	-3.74	39.59	54	-14.41	H	AV
7311.000	55.2	1.47	56.67	74	-17.33	H	PK
7311.000	39.58	1.47	41.05	54	-12.95	H	AV
4874.000	59.37	-3.74	55.63	74	-18.37	V	PK
4874.000	41.1	-3.74	37.36	54	-16.64	V	AV
7311.000	55.01	1.47	56.48	74	-17.52	V	PK
7311.000	39.83	1.47	41.3	54	-12.7	V	AV
High Channel-2462MHz							
4924.000	58.33	-3.63	54.7	74	-19.3	H	PK
4924.000	41.59	-3.63	37.96	54	-16.04	H	AV
7386.000	55.14	1.62	56.76	74	-17.24	H	PK
7386.000	38.78	1.62	40.4	54	-13.6	H	AV
4924.000	58.31	-3.63	54.68	74	-19.32	V	PK
4924.000	43.77	-3.63	40.14	54	-13.86	V	AV
7386.000	52.27	1.62	53.89	74	-20.11	V	PK
7386.000	40.53	1.62	42.15	54	-11.85	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

## B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

## 9.3 Summary of Test Results/Plots


## ➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

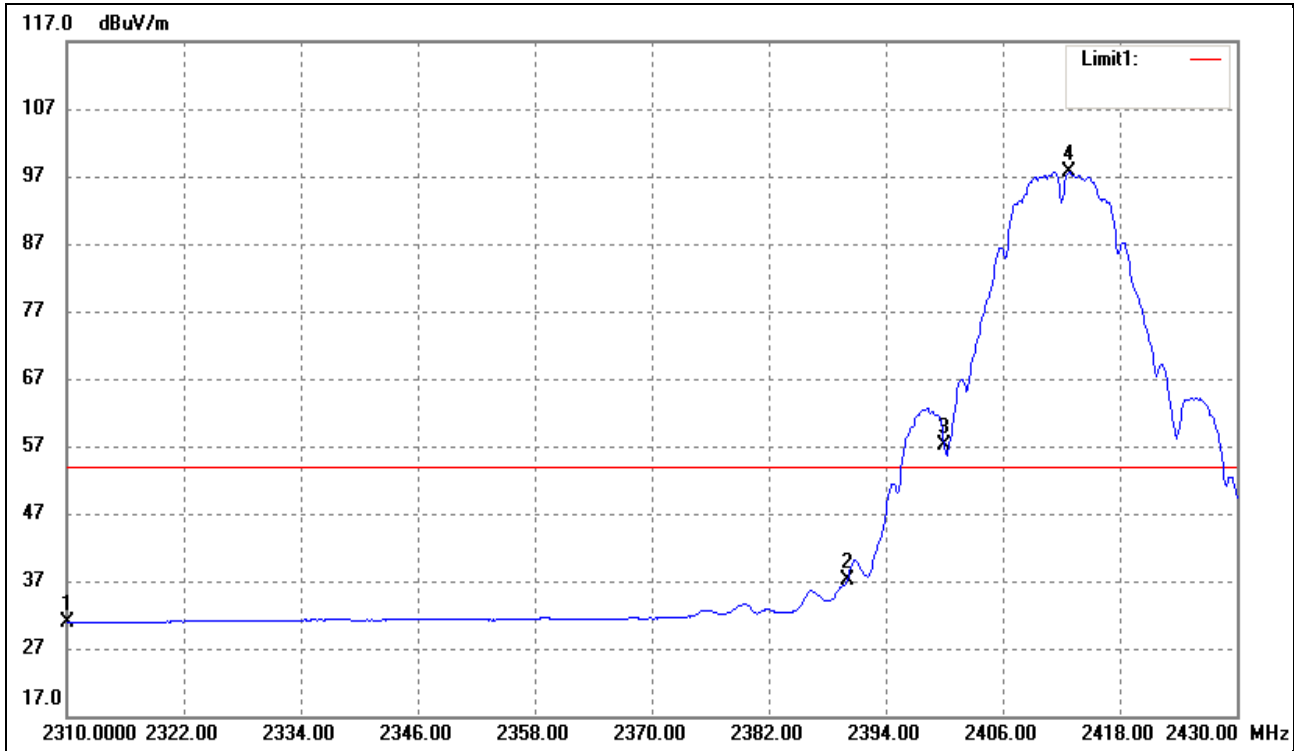


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.62	-7.78	30.84	54.00	-23.16	Average Detector
	2310.000	53.07	-7.78	45.29	74.00	-28.71	Peak Detector
2	2390.000	44.39	-7.32	37.07	54.00	-16.93	Average Detector
	2390.000	73.90	-7.32	66.58	74.00	-7.42	Peak Detector
3	2400.000	64.29	-7.26	57.03	Delta=40.66dBc		Average Detector
4	2412.840	104.87	-7.18	97.69			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

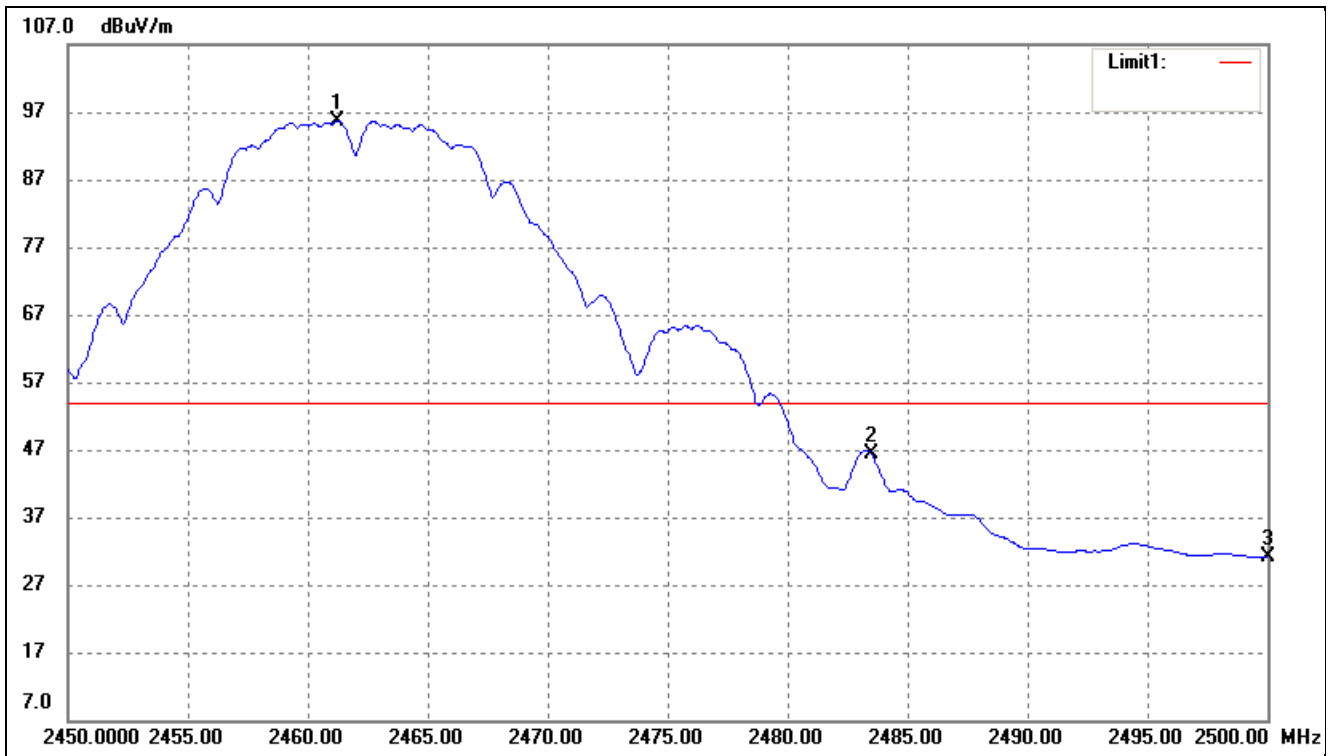

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	102.57	-6.90	95.67	/	/	Average Detector
	2460.550	107.44	-6.90	100.54	/	/	Peak Detector
2	2483.500	53.10	-6.77	46.33	54.00	-7.67	Average Detector
	2483.500	58.78	-6.77	52.01	74.00	-21.99	Peak Detector
3	2500.000	37.68	-6.67	31.01	54.00	-22.99	Average Detector
	2500.000	50.79	-6.67	44.12	74.00	-29.88	Peak Detector


802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

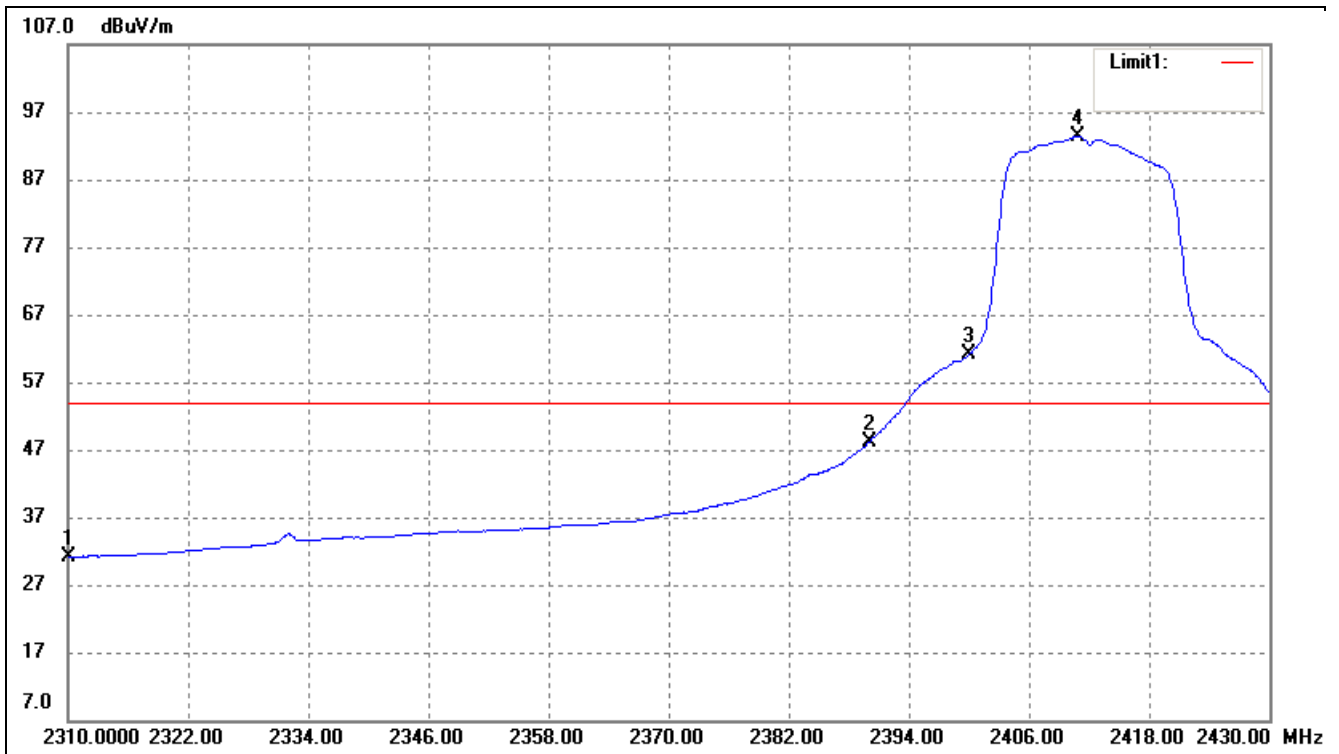

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.89	-7.78	31.11	54.00	-22.89	Average Detector
	2310.000	51.62	-7.78	43.84	74.00	-30.16	Peak Detector
2	2390.000	55.56	-7.32	48.24	54.00	-5.76	Average Detector
	2390.000	70.65	-7.32	63.33	74.00	-10.67	Peak Detector
3	2400.000	68.41	-7.26	61.15	Delta=32.19dBc		Average Detector
4	2410.920	100.53	-7.19	93.34			Average Detector




802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

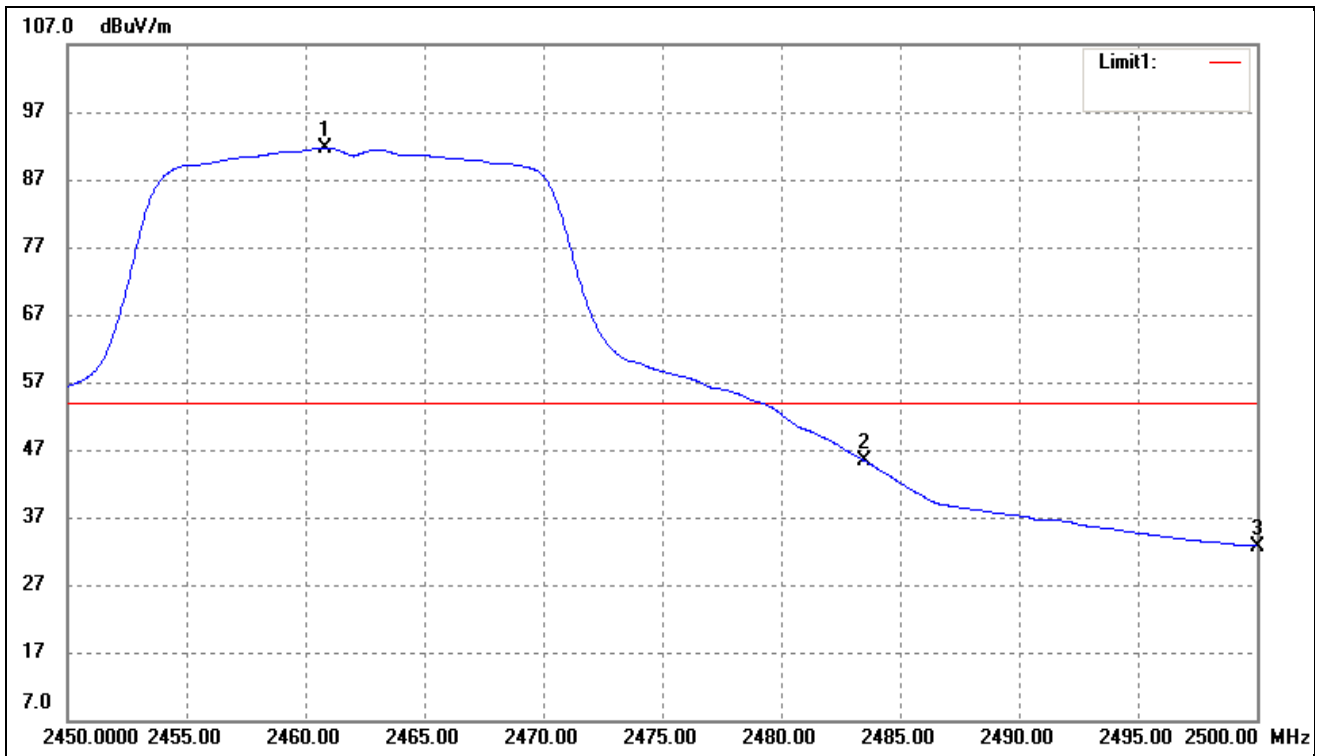


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.800	98.56	-6.90	91.66	/	/	Average Detector
	2463.350	108.79	-6.89	101.90	/	/	Peak Detector
2	2483.500	52.13	-6.77	45.36	54.00	-8.64	Average Detector
	2483.500	70.38	-6.77	63.61	74.00	-10.39	Peak Detector
3	2500.000	39.41	-6.67	32.74	54.00	-21.26	Average Detector
	2500.000	52.24	-6.67	45.57	74.00	-28.43	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

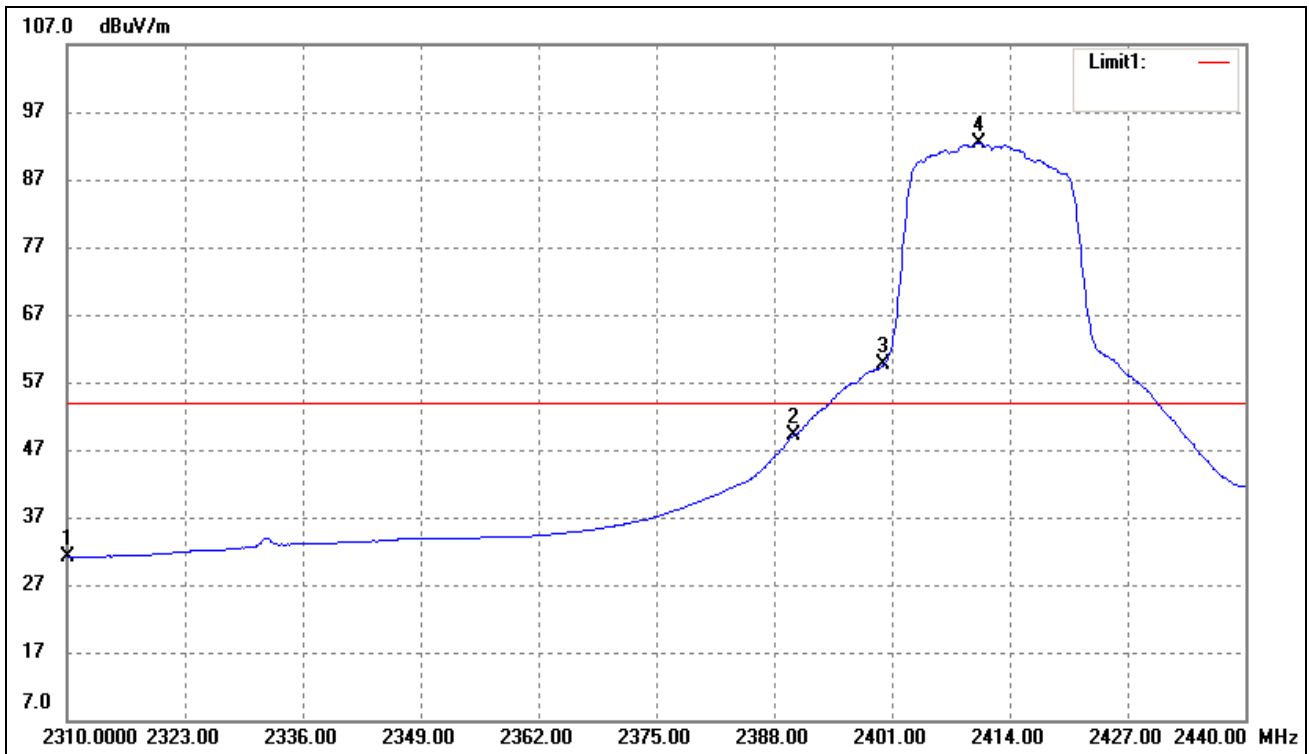


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.87	-7.78	31.09	54.00	-22.91	Average Detector
	2310.000	51.71	-7.78	43.93	74.00	-30.07	Peak Detector
2	2390.000	56.40	-7.32	49.08	54.00	-4.92	Average Detector
	2390.000	76.74	-7.32	69.42	74.00	-4.58	Peak Detector
3	2400.000	66.90	-7.26	59.64	Delta=32.80dBc		Average Detector
4	2410.620	99.63	-7.19	92.44			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

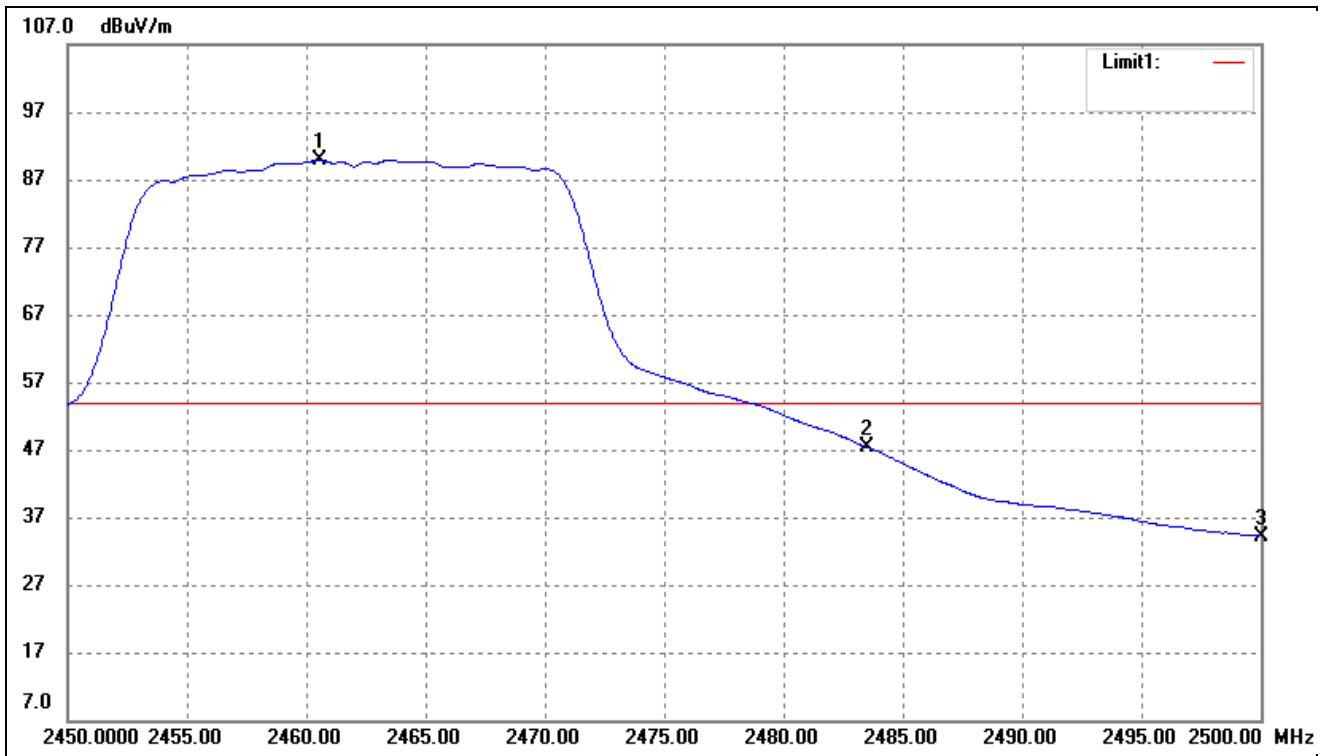


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.550	96.80	-6.90	89.90	/	/	Average Detector
	2465.150	107.44	-6.87	100.57	/	/	Peak Detector
2	2483.500	54.15	-6.77	47.38	54.00	-6.62	Average Detector
	2483.500	75.13	-6.77	68.36	74.00	-5.64	Peak Detector
3	2500.000	40.88	-6.67	34.21	54.00	-19.79	Average Detector
	2500.000	54.33	-6.67	47.66	74.00	-26.34	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

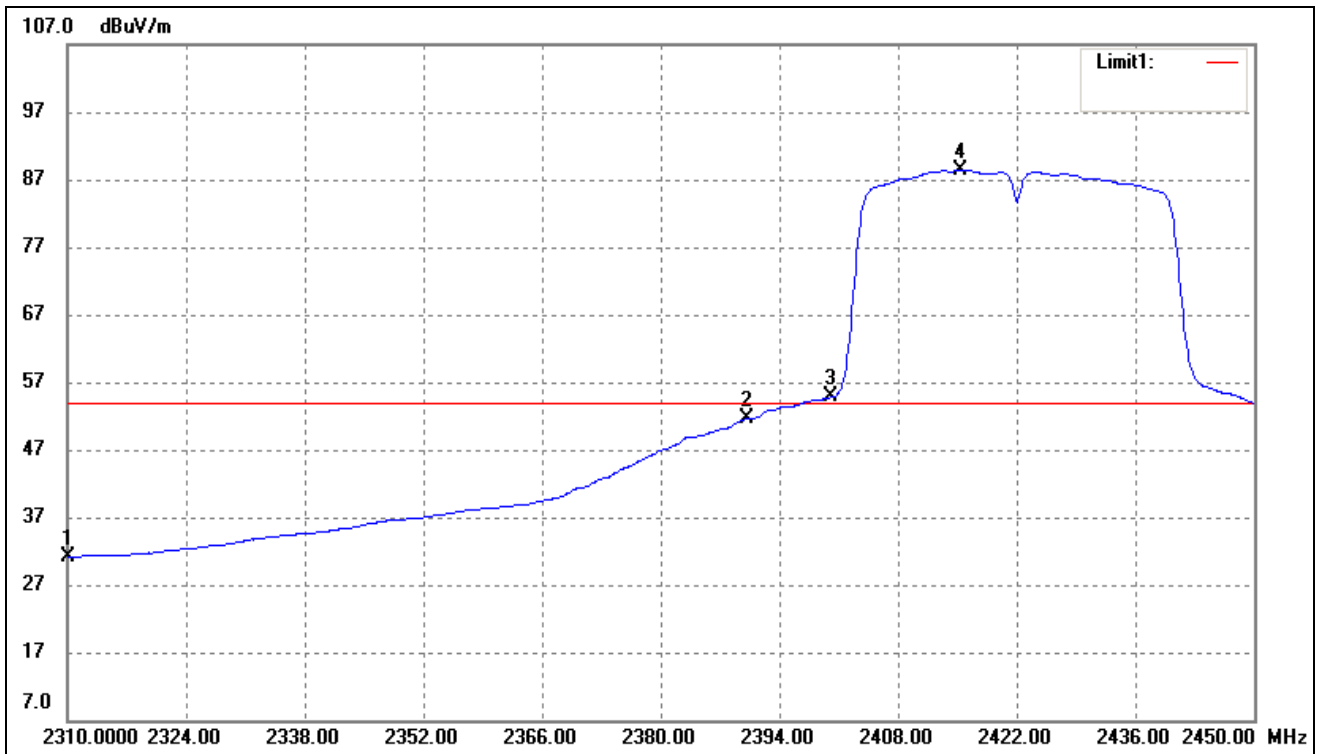

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	39.01	-7.78	31.23	54.00	-22.77	Average Detector
	2310.000	51.48	-7.78	43.70	74.00	-30.30	Peak Detector
2	2390.000	58.94	-7.32	51.62	54.00	-2.38	Average Detector
	2390.000	75.94	-7.32	68.62	74.00	-5.38	Peak Detector
3	2400.000	62.03	-7.26	54.77	Delta=33.69dBc		Average Detector
4	2415.280	95.63	-7.17	88.46			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)


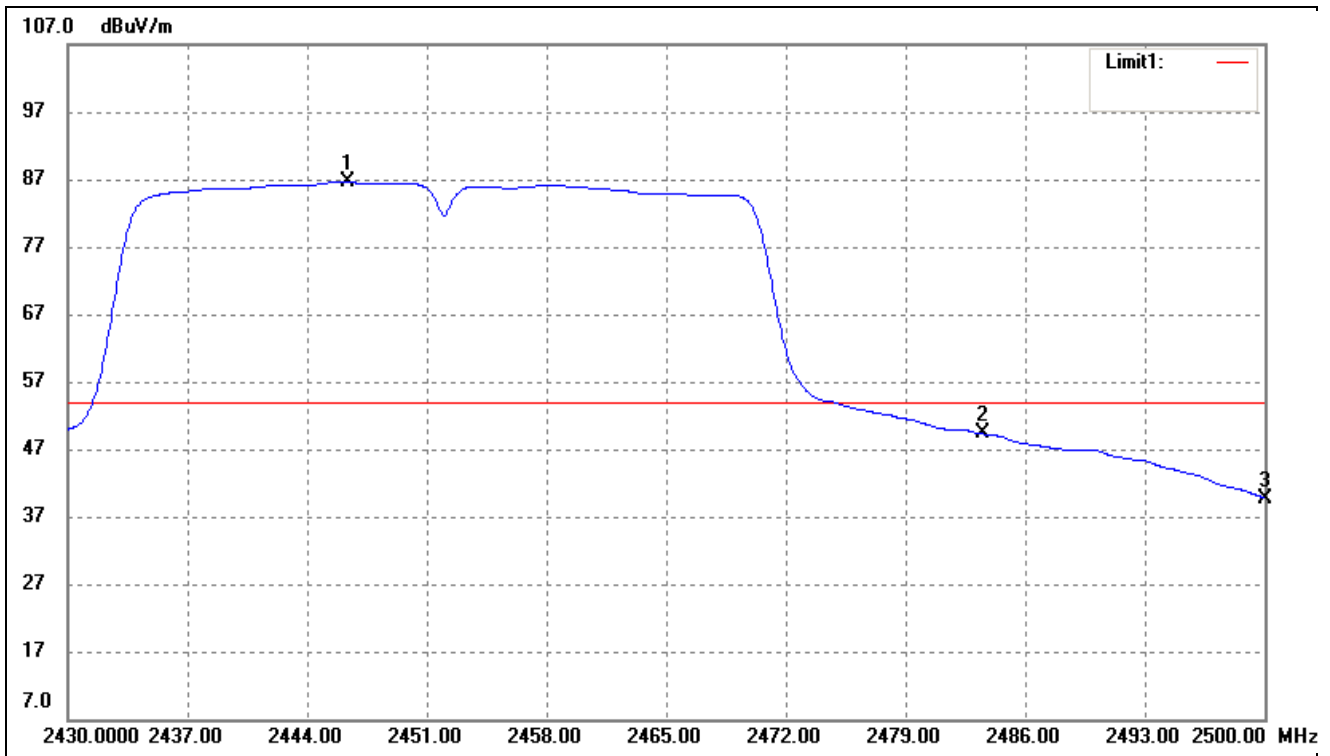


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.380	93.63	-6.98	86.65	/	/	Average Detector
	2449.670	104.43	-6.96	97.47	/	/	Peak Detector
2	2483.500	56.03	-6.77	49.26	54.00	-4.74	Average Detector
	2483.500	73.19	-6.77	66.42	74.00	-7.58	Peak Detector
3	2500.000	46.35	-6.67	39.68	54.00	-14.32	Average Detector
	2500.000	62.16	-6.67	55.49	74.00	-18.51	Peak Detector

➤ Conducted test



802.11b\_11Mbps

Low

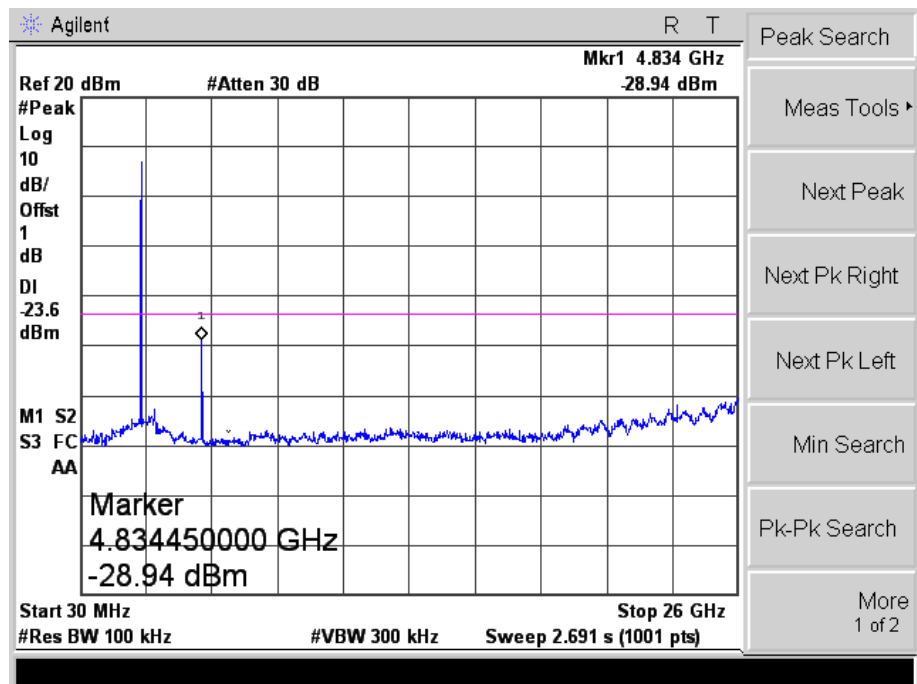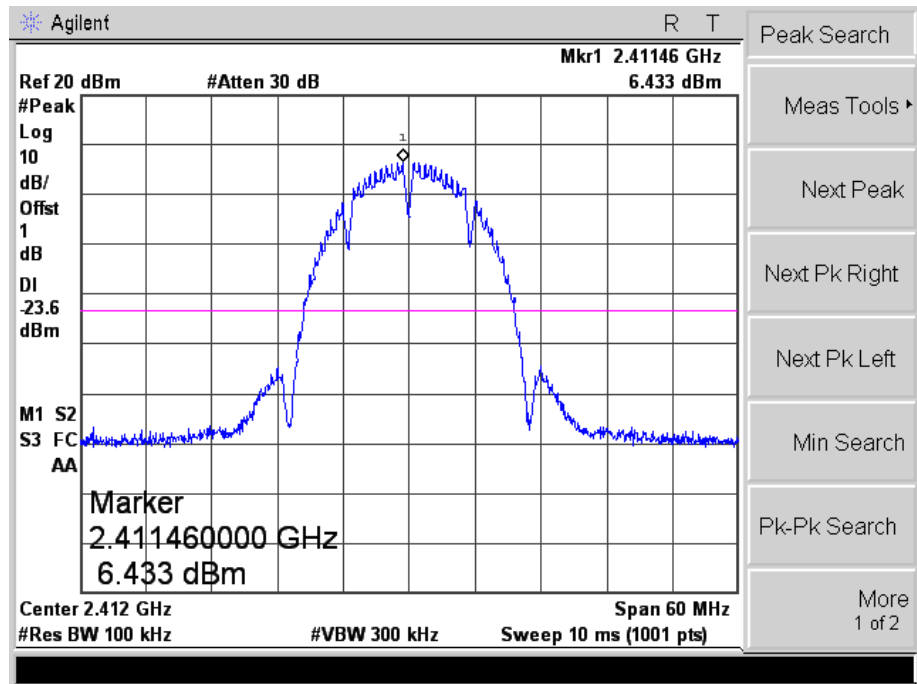



802.11b\_11Mbps

Middle

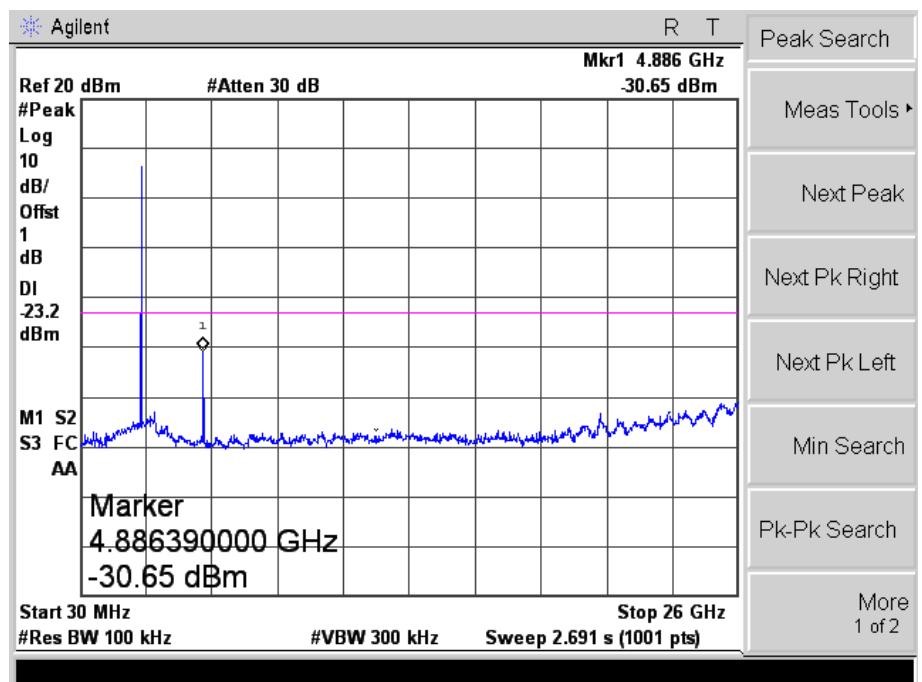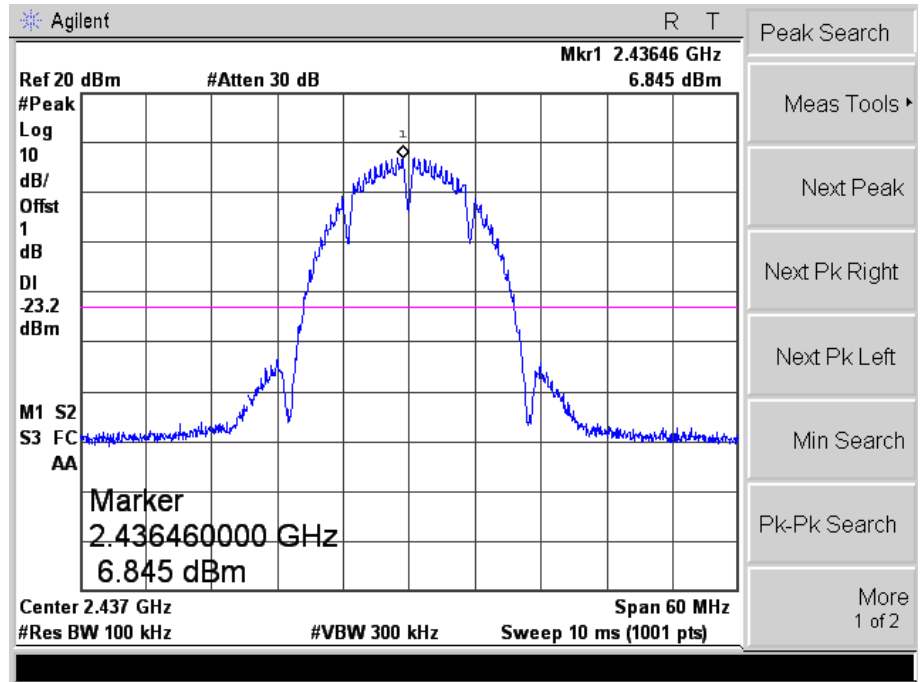

802.11b\_11Mbps



High

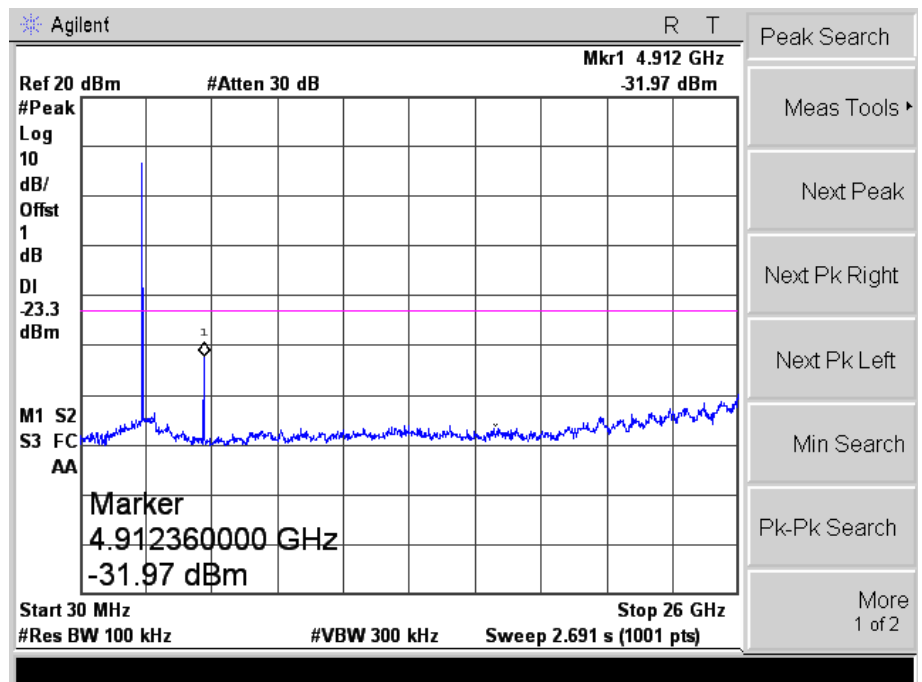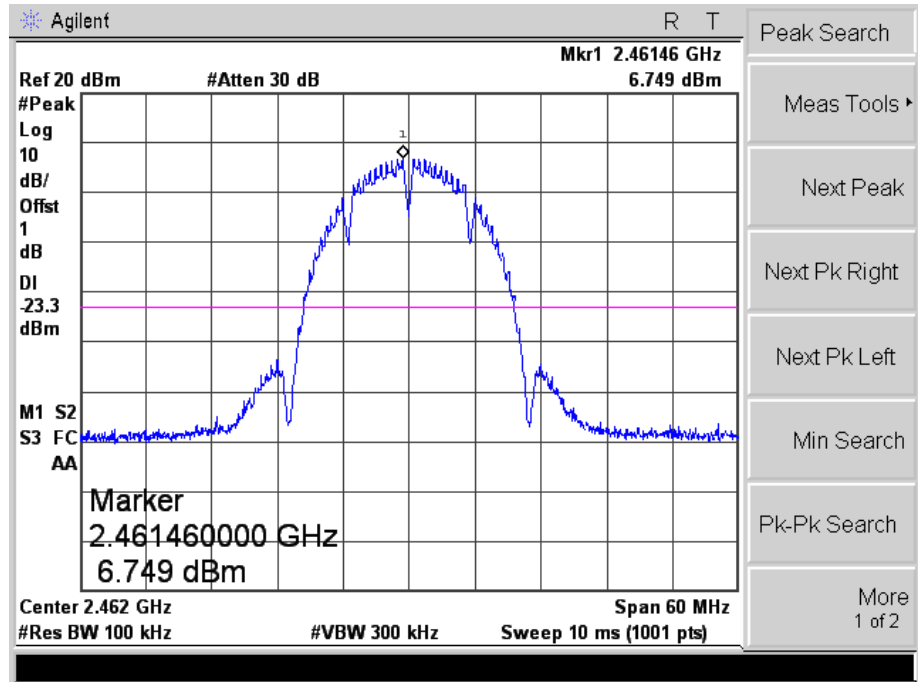





802.11g\_54Mbps

Low

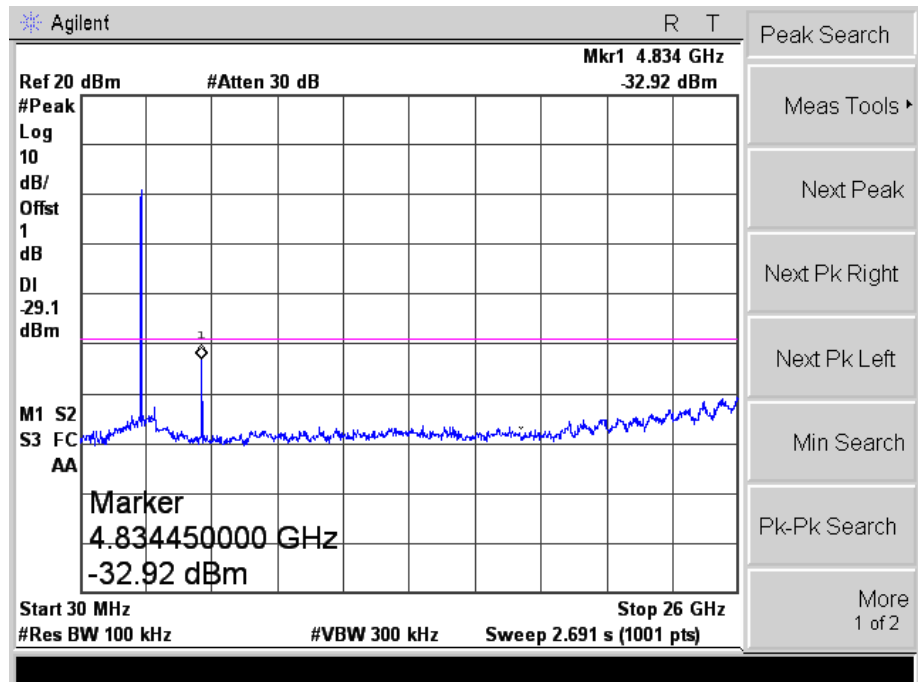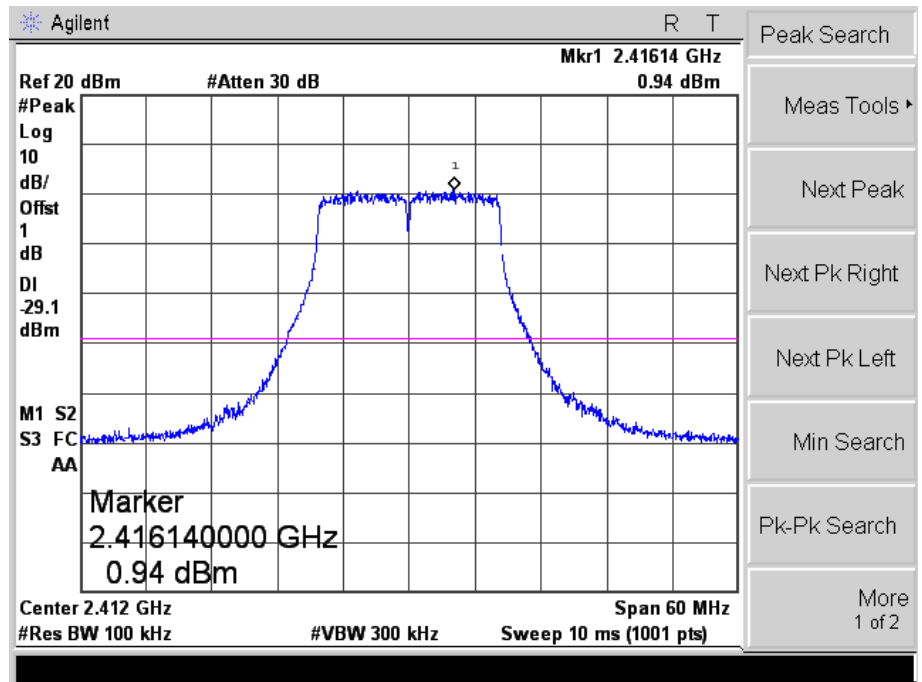



802.11g\_54Mbps

Middle

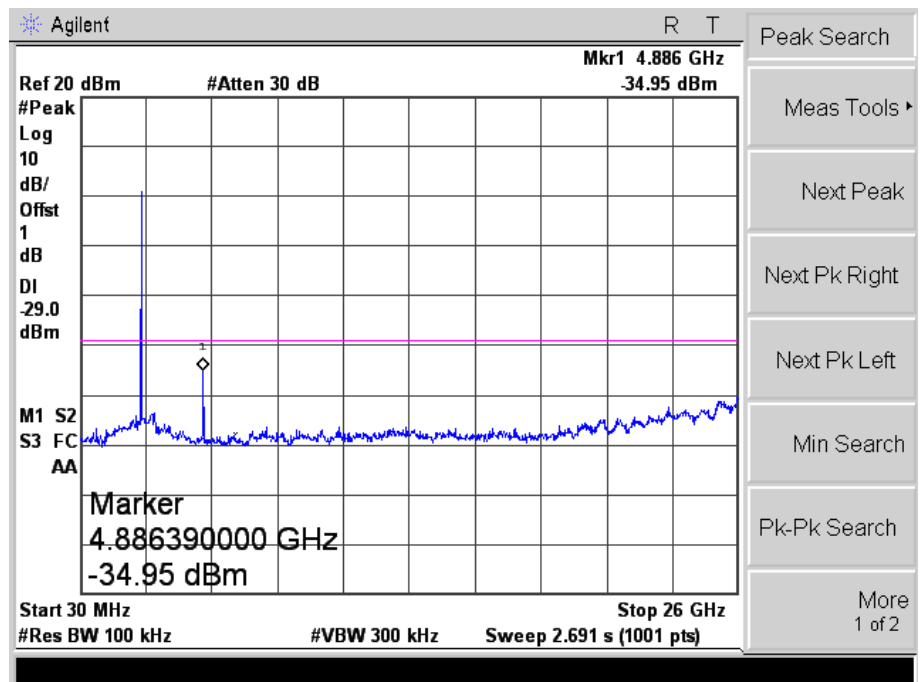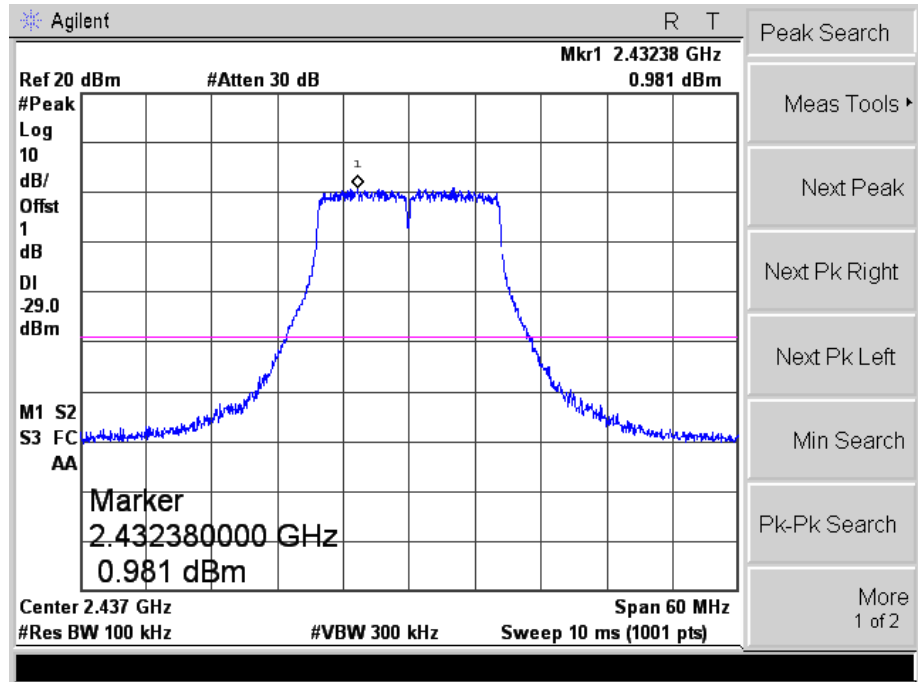



802.11g\_54Mbps

High

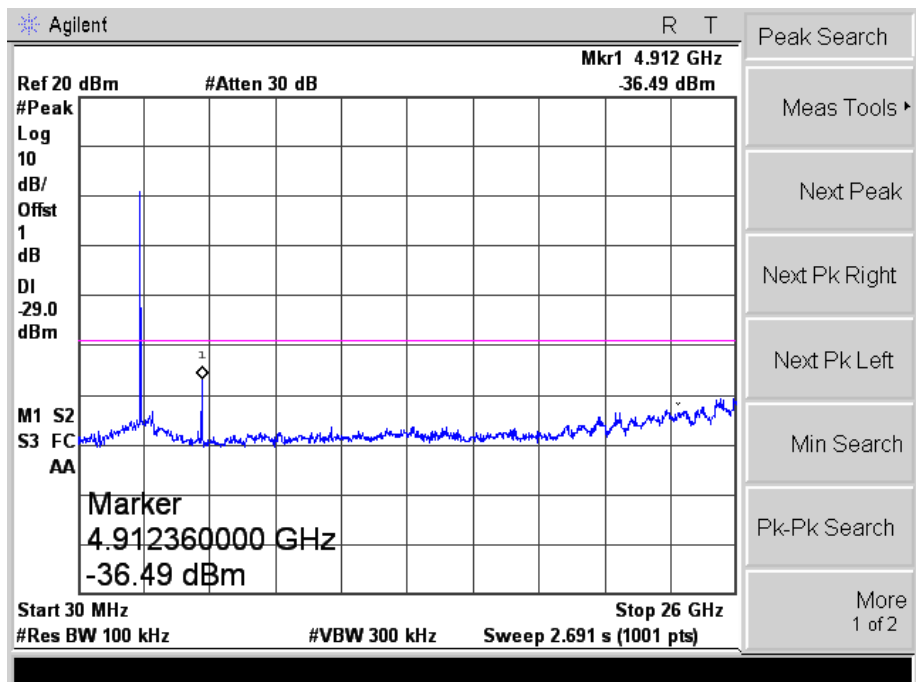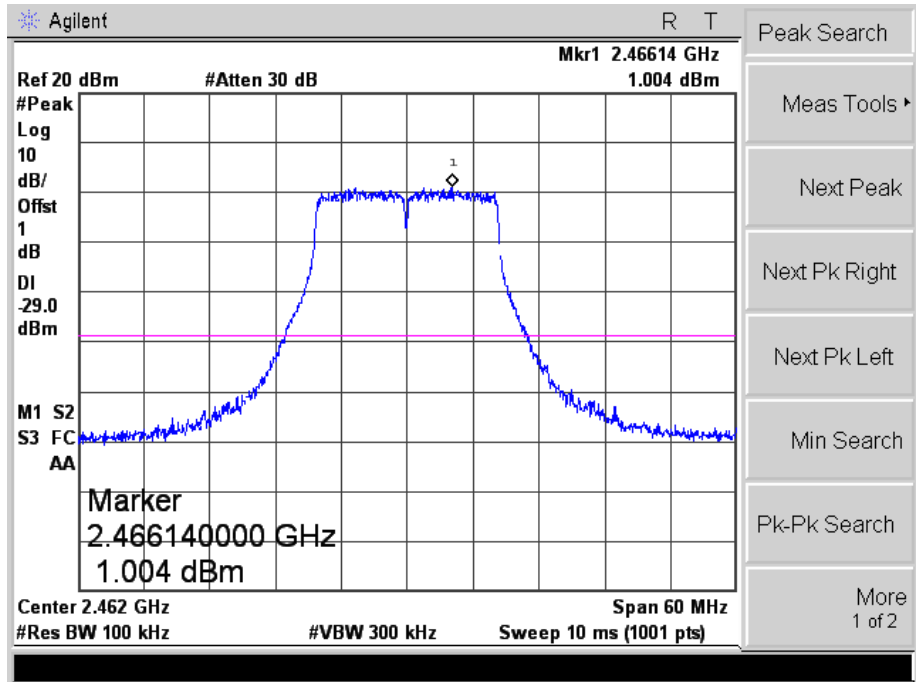



802.11n-HT20\_MCS7

Low

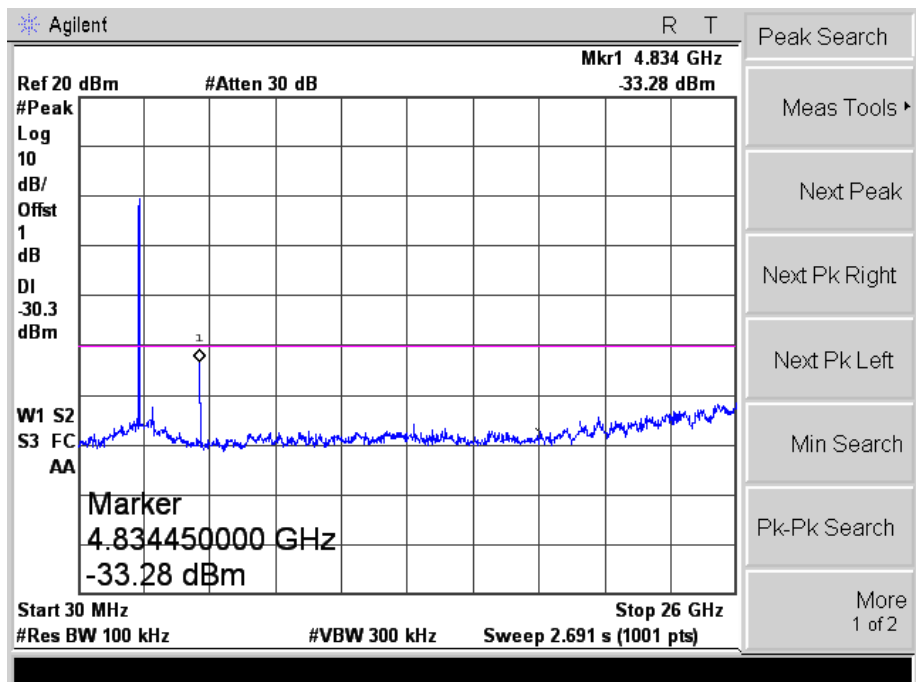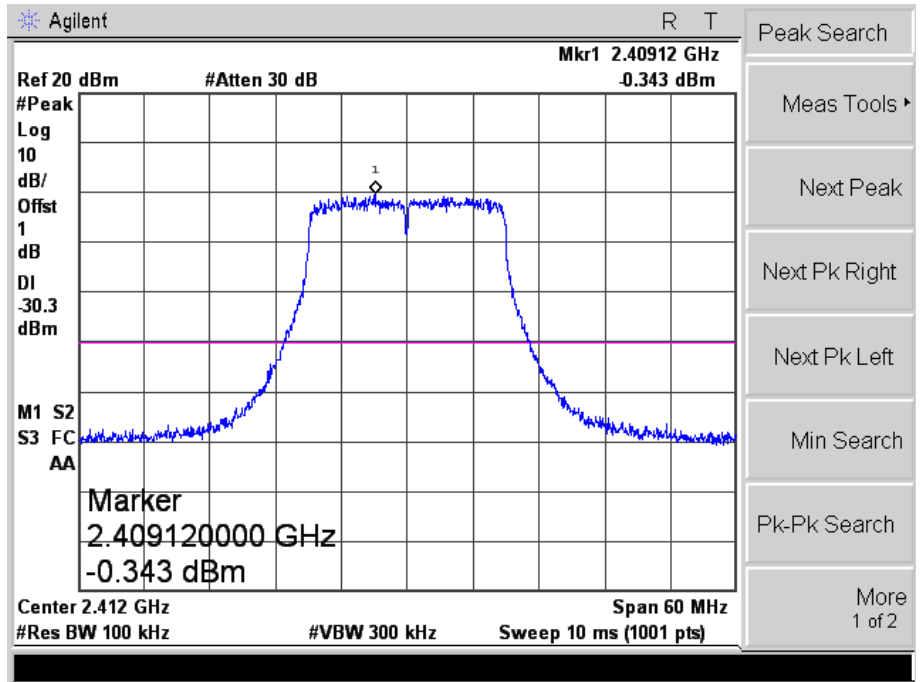



802.11n-HT20\_MCS7

Middle

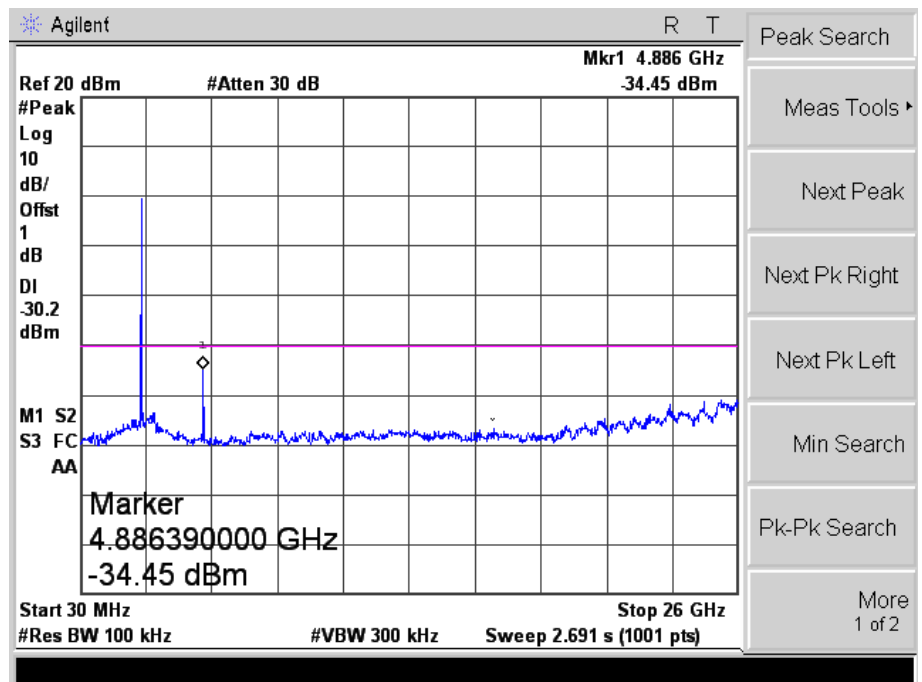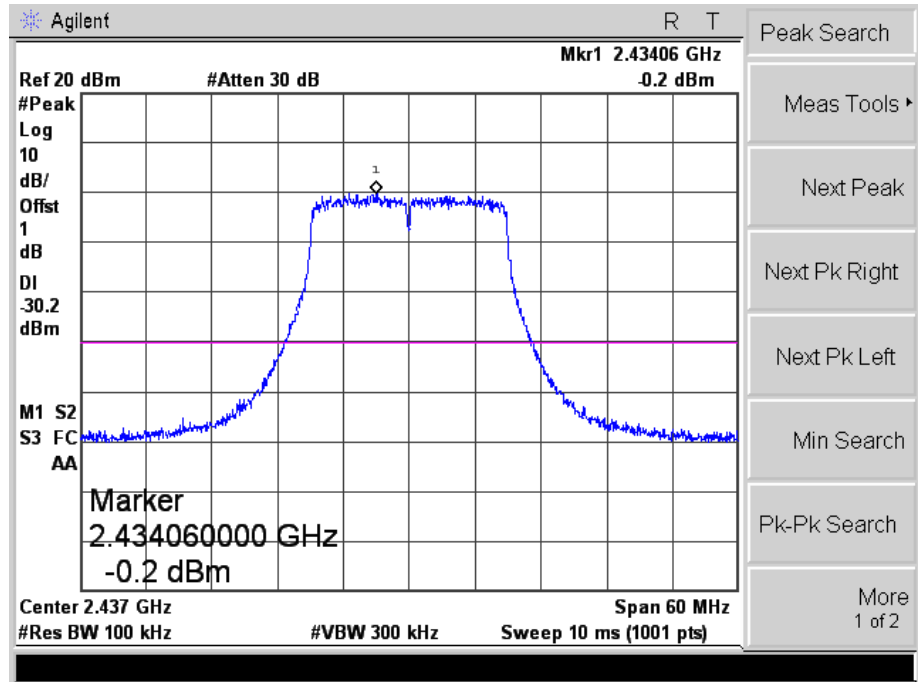



802.11n-HT20\_MCS7

High

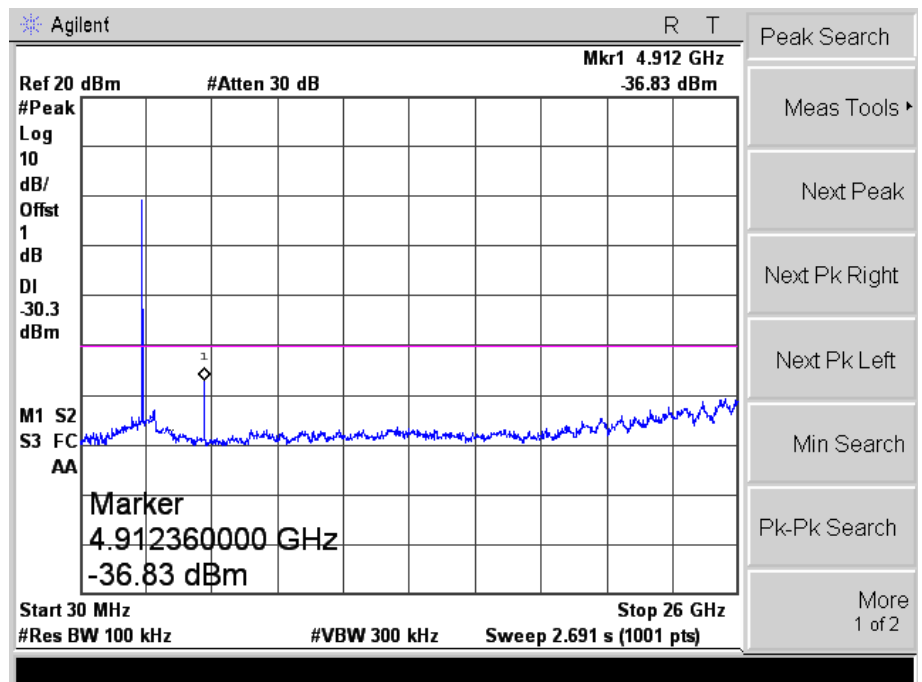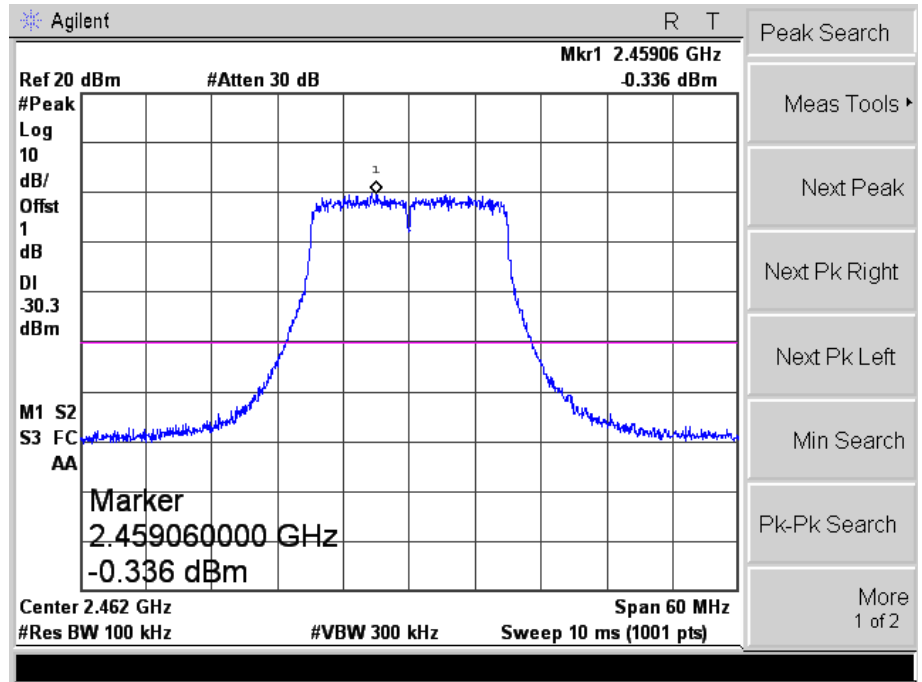



802.11n-HT40\_MCS7

Low

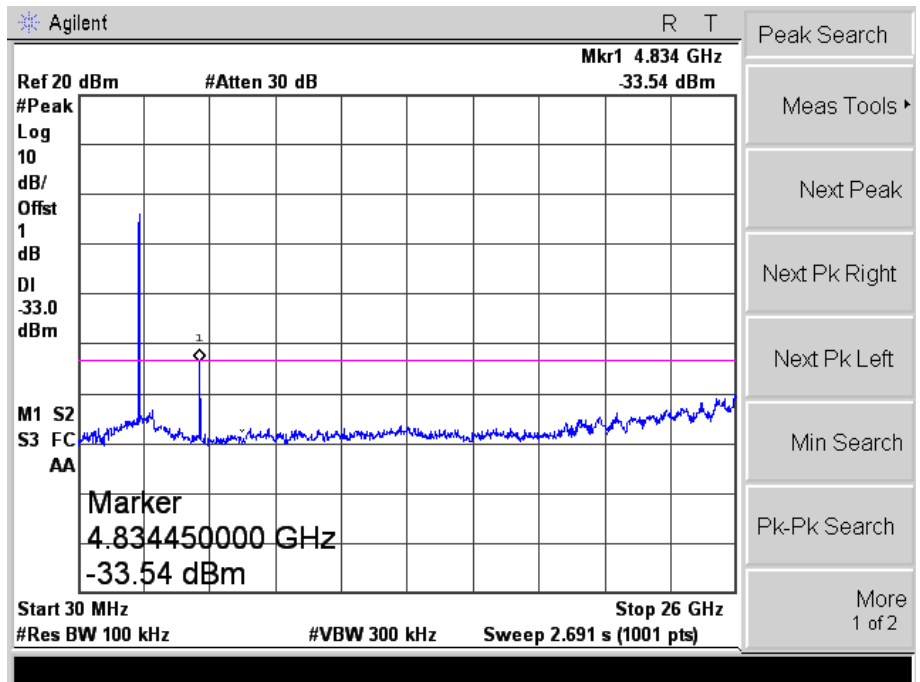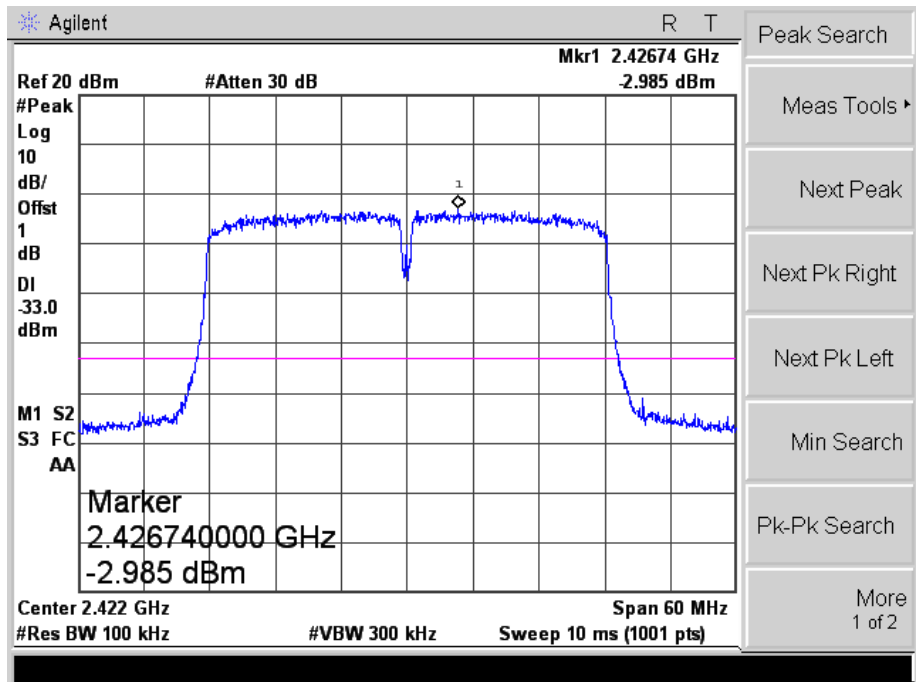

802.11n-HT40\_MCS7



Middle

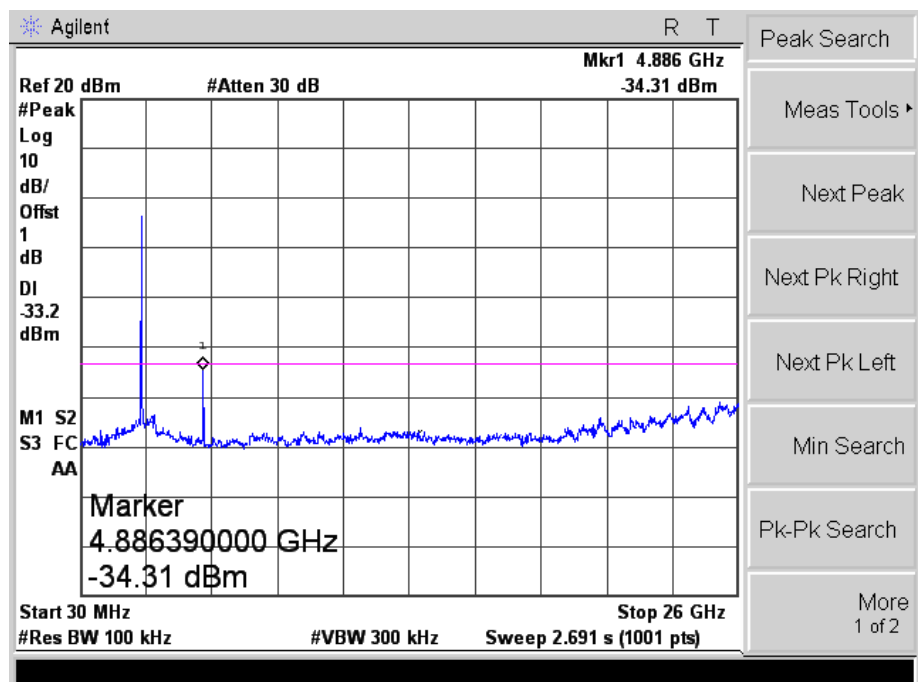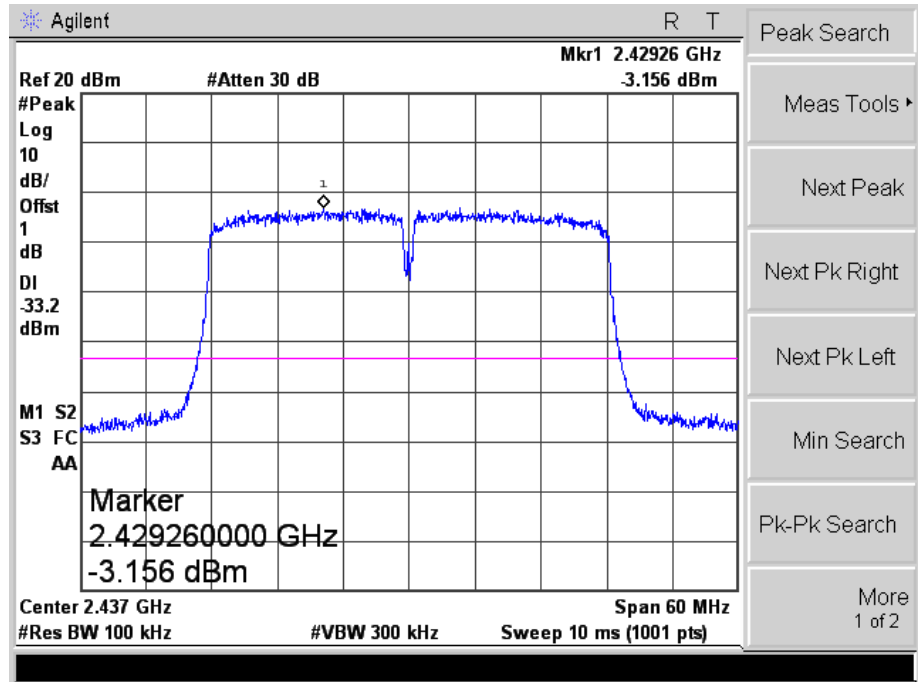



802.11n-HT40\_MCS7

High

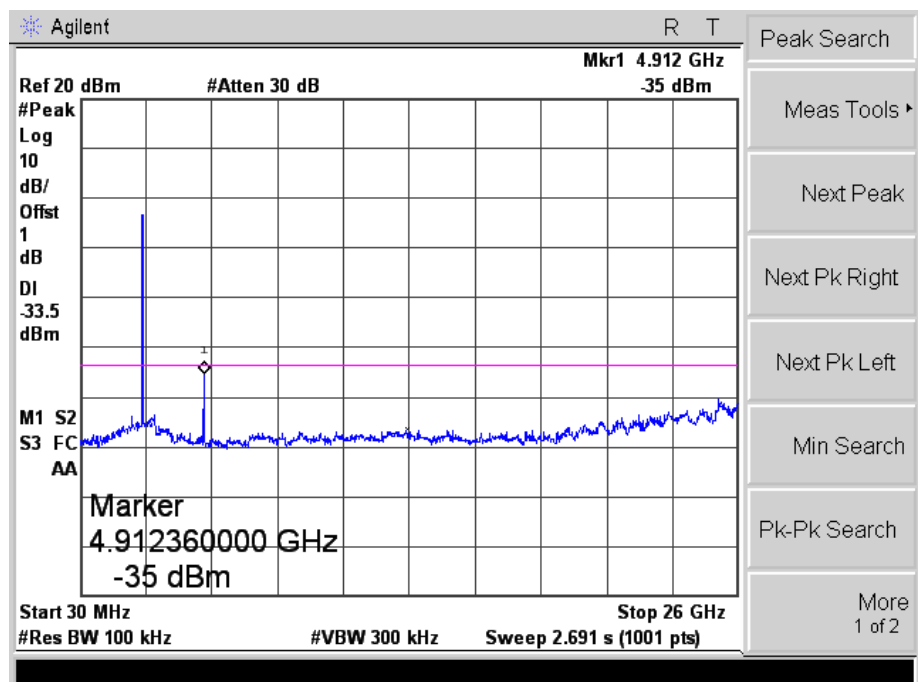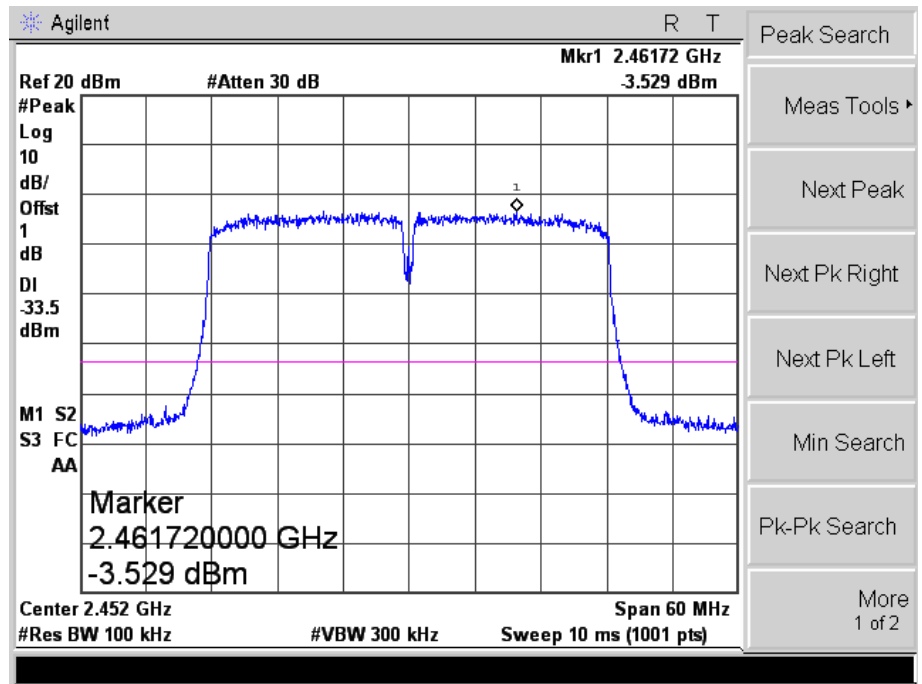


## 10. Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram

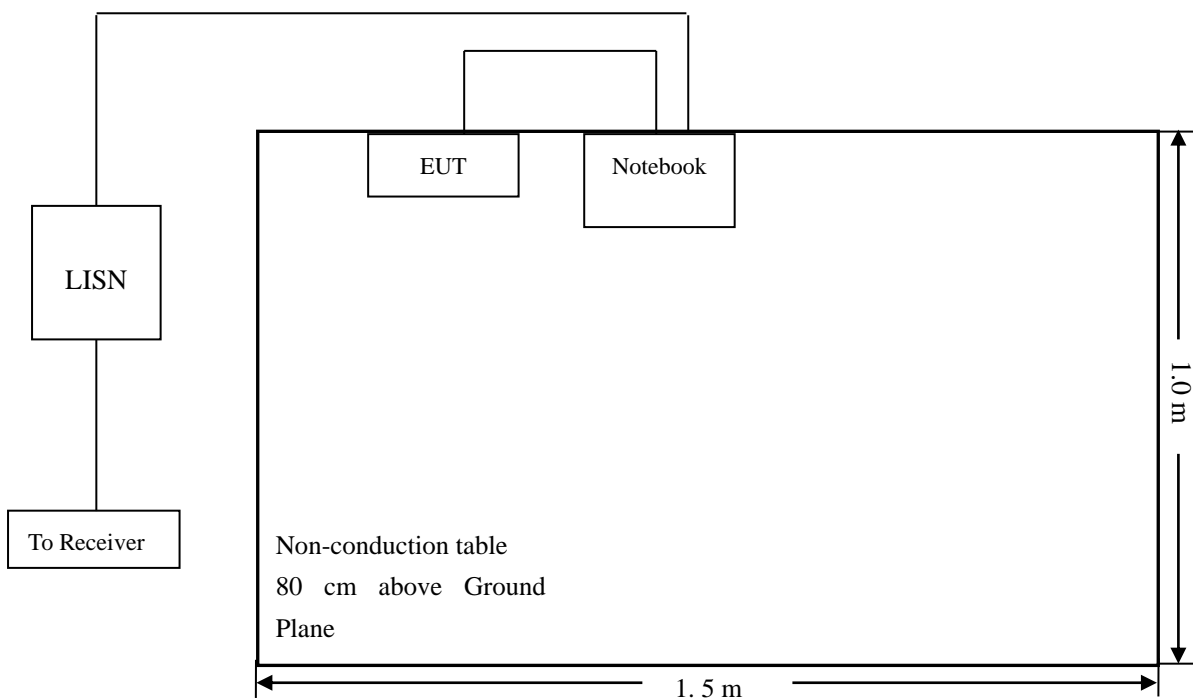


### 10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal


### 10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

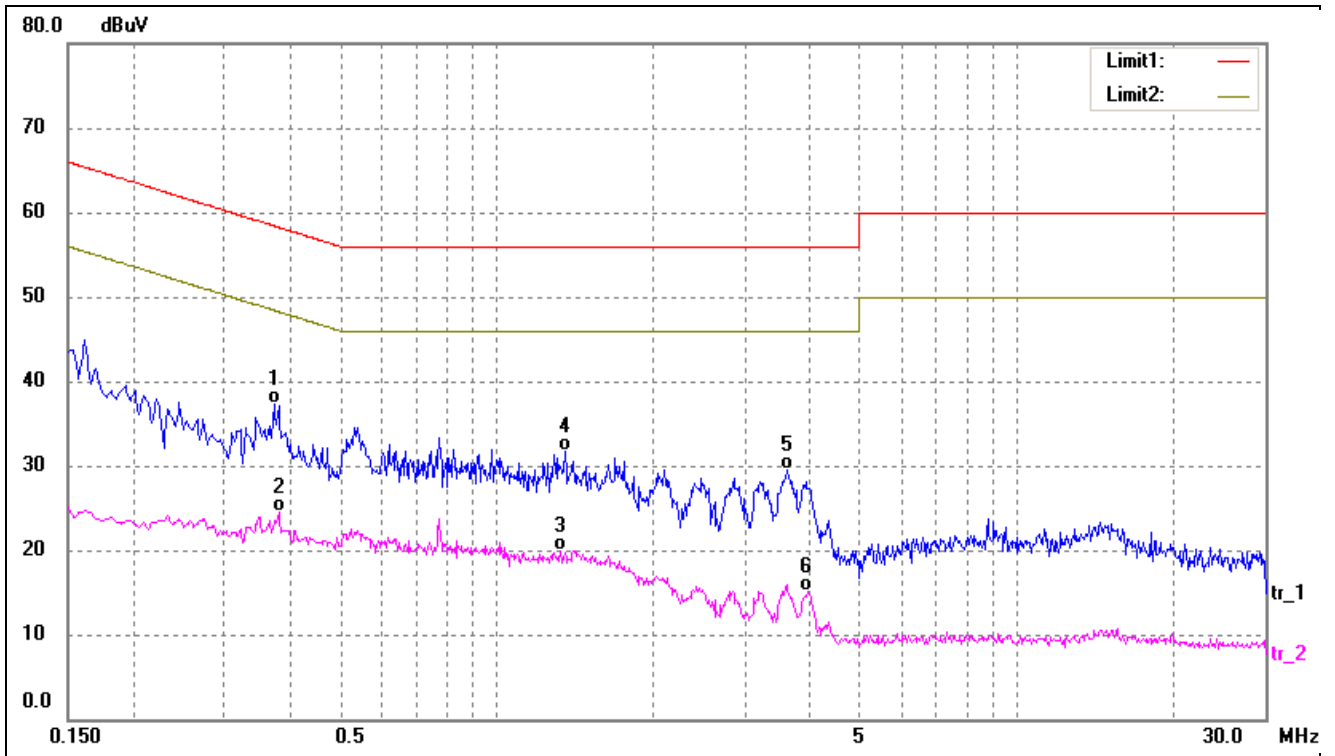

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.3740	27.05	10.24	37.29	58.41	-21.12	QP
2	0.3820	14.23	10.24	24.47	48.23	-23.76	AVG
3	1.3260	9.34	10.54	19.88	46.00	-26.12	AVG
4	1.3580	21.14	10.54	31.68	56.00	-24.32	QP
5	3.6220	18.72	10.70	29.42	56.00	-26.58	QP
6	3.9820	4.45	10.71	15.16	46.00	-30.84	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

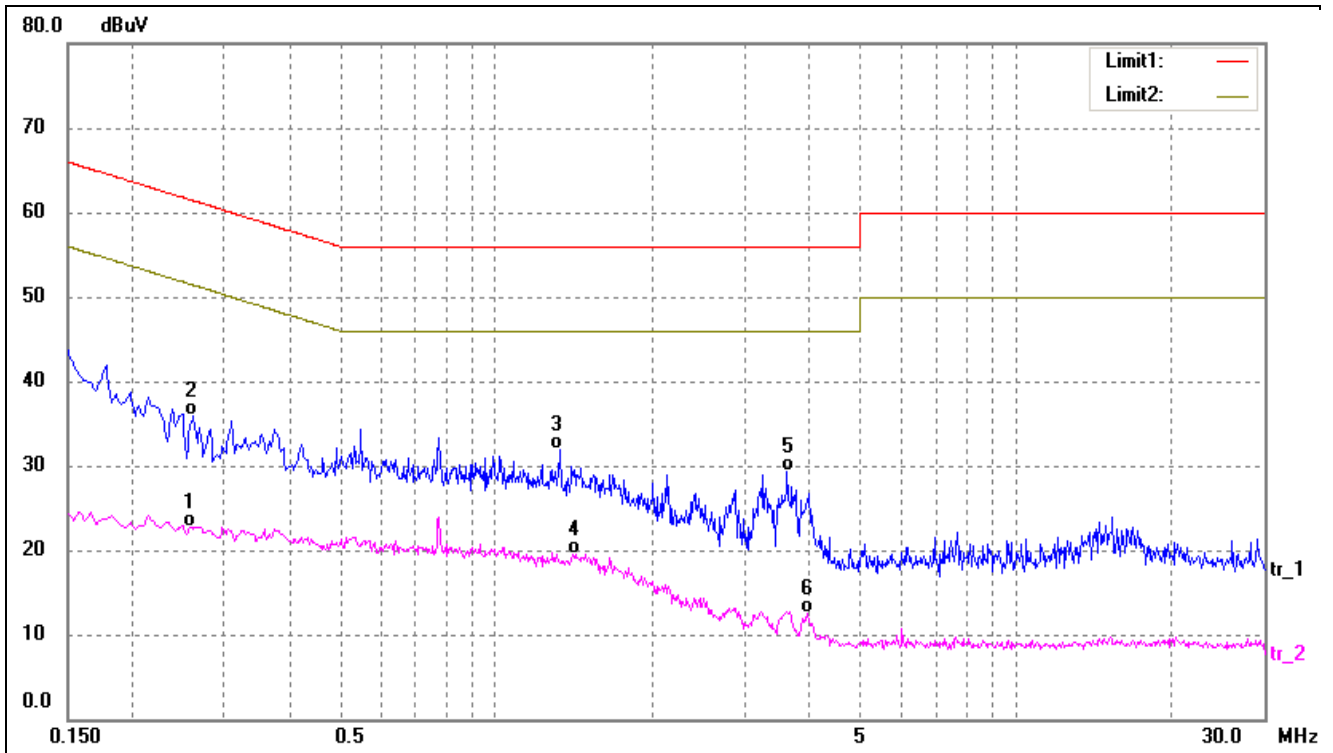

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	12.55	10.16	22.71	51.49	-28.78	AVG
2	0.2620	25.73	10.16	35.89	61.36	-25.47	QP
3*	1.3300	21.29	10.54	31.83	56.00	-24.17	QP
4	1.4220	8.91	10.55	19.46	46.00	-26.54	AVG
5	3.6300	18.57	10.70	29.27	56.00	-26.73	QP
6	3.9740	1.79	10.71	12.50	46.00	-33.50	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*