

# Testing Report


Customer Name: Hangzhou BroadLink Technology Co., Ltd.

Product Name: 2.4G Antenna

Sample Model: SR4D

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2022.9.7

Engineer: Jackson	Date: 2022.9.1	
Auditor: Eason	Date: 2022.9.7	
Approver: Janson	Date: 2022.9.7	

## Version

Version No.	Date	Description	Formulate	Approval
A0	2022.9.2	For the first time, formulate	Jackson	Eason
A1	2022.9.7	Add the antenna size diagram	Jackson	Eason

## Contents

1.General Information .....	3
1.1 General information of testing institutions .....	3
1.2 Testing principle .....	3
1.3 Test equipment .....	4
1.4 Test environment .....	4
1.5 Statement .....	4
2.Sample Information .....	5
2.1 Client information .....	5
2.2 Description of EUT(S) .....	5
2.3 EUT appearance .....	6
2.4 DUT setup photo of free space OTA testing .....	6
3.Test Results .....	7
3.1 Test standard .....	7
3.2 Test uncertainty .....	7
3.3 Test data .....	8
3.3.1 Typical free space efficiency and gain .....	8
3.3.2 Typical free space radiation pattern .....	8
(The following is blank) .....	9

# 1.General Information


## 1.1 General information of testing institutions

<b>Name</b>	Shenzhen RFI-LAB Communication Technology Co., Ltd.
<b>Address</b>	10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ
<b>Tel</b>	13631623357
<b>E-mail</b>	liss@tech-now.com
<b>Equipment</b>	All the equipment used in the report is fixed in 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ

## 1.2 Testing principle



# Multi-Probe OTA Measurement System

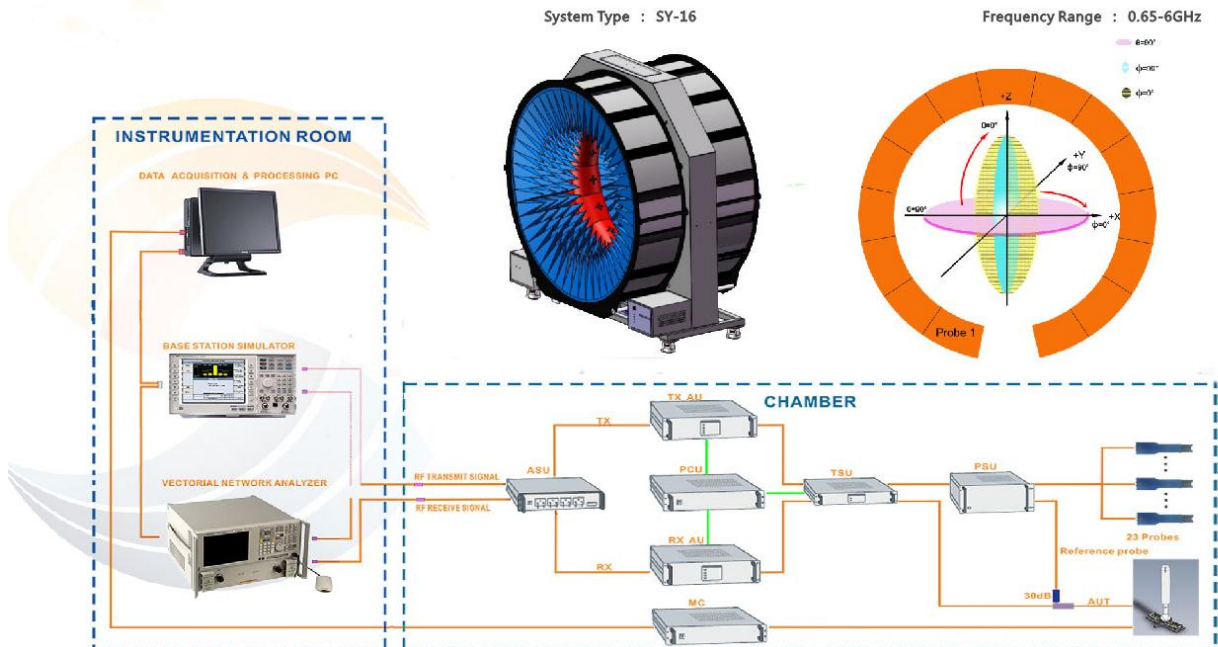

### 1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
16 probe microwave chamber	3*3*2.5	RFI-LAB-RF-A00	SUNYIELD	2021.3.15	2023.3.14
Network Analyzer	E5071C	RFI-LAB-RF-A02	Agilent	2022.5.13	2023.5.12
Network Analyzer	E5071C	RFI-LAB-RF-C02	KEYSIGHT	2022.5.13	2023.5.12

### 1.4 Test environment

Temperature	23.9°C
Humidity	57%RH
Pressure	100.08kPa

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2. Sample Information



### 2.1 Client information

<b>Name</b>	Hangzhou BroadLink Technology Co., Ltd.
<b>Address</b>	Unit C, Building 1, No.57 Jiang'er Road, Changhe Street, Binjiang District, Hangzhou, Zhejiang, P.R. China
<b>Contacts</b>	Mr. Shi
<b>Tel</b>	13510852569
<b>E-mail</b>	mike.shi@waltek.com.cn

### 2.2 Description of EUT(S)

<b>Product Name</b>	2.4G Antenna
<b>Sample Model</b>	SR4D
<b>Antenna Size</b>	15.32*5.24mm
<b>Antenna Type</b>	PCB Antenna
<b>Serial No.</b>	/
<b>Test Item</b>	Antenna gain; Efficiency; Radiation pattern
<b>Frequency Range</b>	2400-2500MHz
<b>Received Date</b>	2022.8.31
<b>Test Date</b>	2022.9.1
<b>Remark</b>	The length of the RF cable is 50mm

### 2.3 EUT appearance

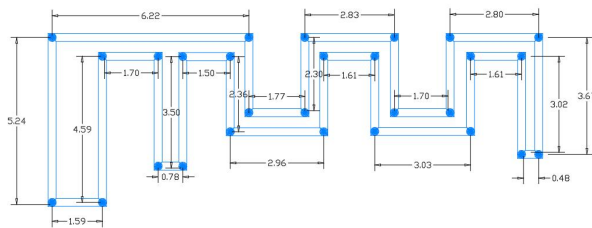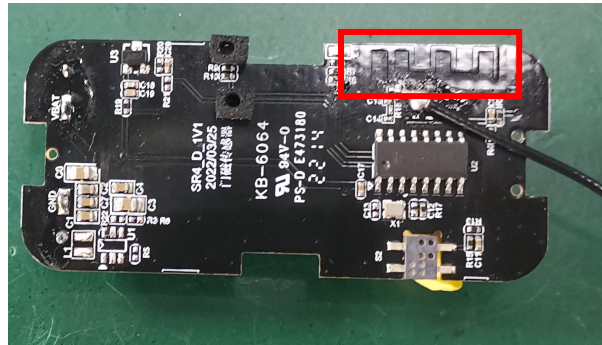


### 2.4 DUT setup photo of free space OTA testing

Planform



Front view

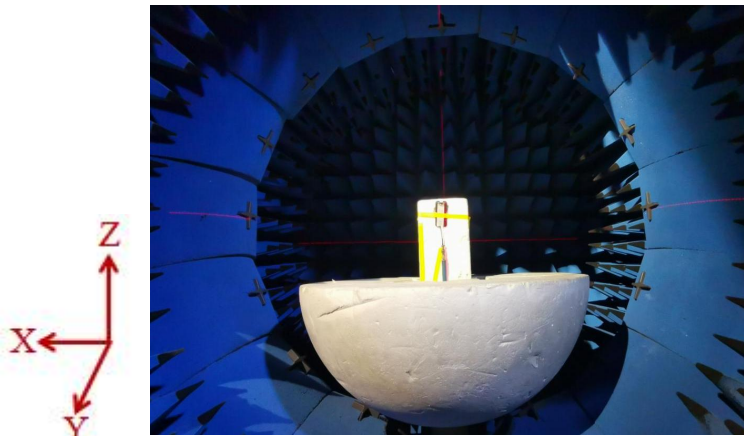

## 3. Test Results

### 3.1 Test standard

Name	Parameter	Method	Standard no.
Mobile communication antenna	Antenna gain	Generic specification for antennas used in the mobile communications	GB/T 9410-2008
	Radiation pattern		
Antenna	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979
	Gain and directivity		

### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

Item	Uncertainty
Antenna gain	$\pm 1\text{dB}$
Radiation efficiency	$\pm 10\%$

### 3.3 Test data


#### 3.3.1 Typical free space efficiency and gain

Frequency/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain/dBi	-2.36	-2.56	-2.87	-2.98	-3.35	-3.42	-3.59	-3.58	-3.74	-4.06	-4.41
Efficiency/%	27.00	25.97	24.51	23.74	22.55	21.66	20.77	20.60	19.59	18.44	17.49

#### 3.3.2 Typical free space radiation pattern


(1) X-Z Plane:

$V \Phi = 0$

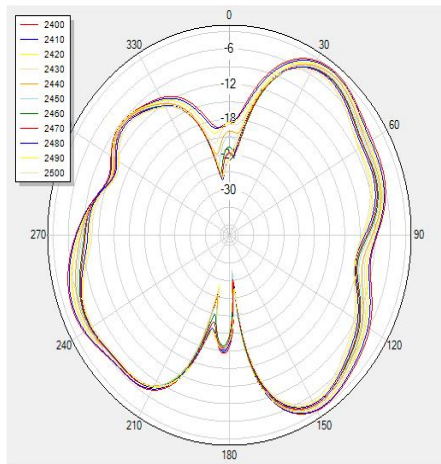

(2) Y-Z Plane:


$V \Phi = 90$

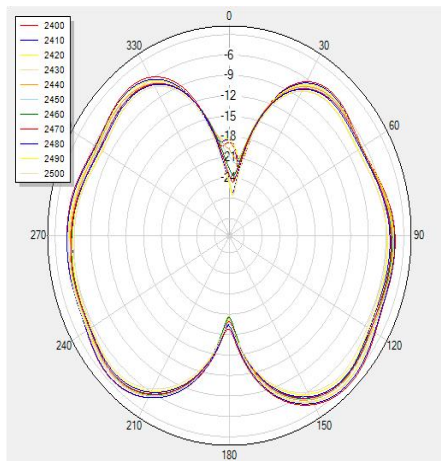




(3) X-Y Plane:

**H Theta=90**

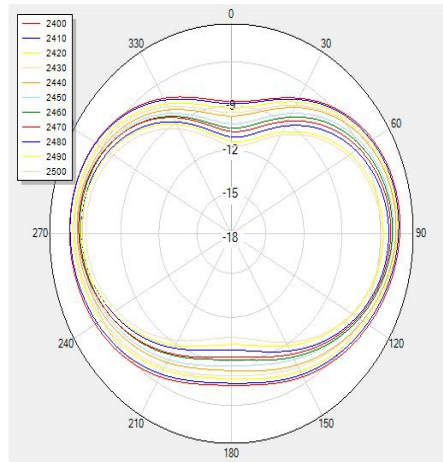

(4) Typical Free Space 3D Radiation Pattern at 2.45GHz:

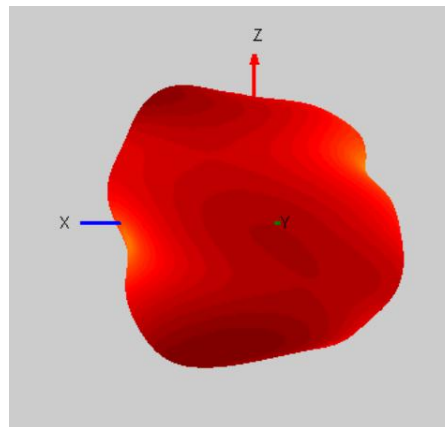

-----  
**End**

**(The following is blank)**