



RF TEST REPORT

Applicant Huawei Device Co., Ltd.
FCC ID 2ATEYCTR-LX3
Product Smart phone
Model CTR-LX3
Report No. R2205A0419-R5
Issue Date June 15, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	4
2. General Description of Equipment under Test.....	5
2.1. Applicant and Manufacturer Information.....	5
2.2. General information.....	5
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. Maximum output power	9
5.2. 99% Bandwidth and 6dB Bandwidth	11
5.3. Band Edge	23
5.4. Power Spectral Density	31
5.5. Spurious RF Conducted Emissions.....	39
5.6. Unwanted Emission	50
5.7. Conducted Emission	104
6. Main Test Instruments.....	107
ANNEX A: The EUT Appearance	108
ANNEX B: Test Setup Photos	109



Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: May 21, 2022 ~ May 28, 2022			
Date of Sample Received: May 17, 2022			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Huawei Device Co., Ltd.
Applicant address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China
Manufacturer	Huawei Device Co., Ltd.
Manufacturer address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

2.2. General information

EUT Description			
Model	CTR-LX3		
SN	A7F6R22423000346		
Hardware Version	LLDM599		
Software Version	12.0.1.108(C900E105R1P1)		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Connector	A permanently attached antenna meet with the standard FCC Part 15.203 requirement)		
Antenna Gain	-1.2dBi		
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 MHz ~ 2462 MHz 802.11n(HT40): 2422 MHz ~ 2452 MHz Bluetooth LE V5.0: 2402 MHz ~2480 MHz		
Modulation Type	802.11b: DSSS 802.11g/n(HT20/HT40): OFDM Bluetooth LE: GFSK		
Max. Output Power	Wi-Fi 2.4G: 16.80 dBm Bluetooth LE: 7.16 dBm		
EUT Accessory			
Accessory	Model	Manufacture	No.
Adapter	HW-100400E01	Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	1
	HW-100400B01	Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	2
		Huawei Technologies Co., Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)	3



	HW-100400U01	Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	4
	HW-100400E02	Huawei Device Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	5
	HW-100400B02	Huawei Device Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	6
	HW-100400U02	Huawei Device Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	7
Battery	HB496493EGW	Dongguan NVT Technology Co., Ltd.	1
		Shenzhen Sunwoda Intelligence Technology Co., Ltd.	2
Earphone	MEND1532B528A 11	Jiangxi Lianchuang Hongsheng Electronic Co., LTD.	1
	1293-3283-3.5mm -339	Boluo County Quancheng Electronic Co.,Ltd.	2
	EPAB542-2WH05- DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	3
USB Cable	WA0046	GUANGXI BROAD TELECOMMUNICATION CO.,LTD	1
	AU2-CHO006HF	FREEPOR T RESOURCES ENTERPRISES (JIANGXI) CO.,LTD	2
	213-00989-0	DONGGUAN MINGJI ELECTRONICS TECHNOLOGY GROUP CO.,LTD	3
	L99UC138-CS-H	LUXSHARE PRECISION INDUSTRY CO.,LTD	4

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

2. There is more than Adapter/Battery/ Earphone /USB cable, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 4/ Battery 2/ Earphone 2/ USB cable 3) for RE, (Adapter 5/ Battery 2/ Earphone 1/ USB cable 1) for CE will be recorded in this report.



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2021) Radio Frequency Devices

ANSI C63.10-2013

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth(Low Energy)	1Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

5. Test Case Results

5.1. Maximum output power


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.



Test Results

Test Mode	Duty cycle	Duty cycle correction Factor(dB)
802.11b	0.99	0.00
802.11g	0.98	0.00
802.11n HT20	0.98	0.00
802.11n HT40	0.95	0.22
Bluetooth LE	0.659	1.814

Note: when Duty cycle \geq 0.98, Duty cycle correction Factor not required.

Test Mode	Carrier frequency (MHz) / Channel	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412/CH 1	15.64	15.64	30	PASS
	2437/CH 6	15.66	15.66	30	PASS
	2462/CH 11	15.57	15.57	30	PASS
802.11g	2412/CH 1	10.69	10.69	30	PASS
	2417/CH 2	15.65	15.65	30	PASS
	2422/CH 3	16.80	16.80	30	PASS
	2437/CH 6	16.51	16.51	30	PASS
	2457/CH 10	16.53	16.53	30	PASS
	2462/CH 11	12.76	12.76	30	PASS
802.11n HT20	2412/CH 1	10.96	10.96	30	PASS
	2417/CH 2	14.76	14.76	30	PASS
	2422/CH 3	15.53	15.53	30	PASS
	2437/CH 6	15.86	15.86	30	PASS
	2457/CH 10	15.77	15.77	30	PASS
	2462/CH 11	12.62	12.62	30	PASS
802.11n HT40	2422/CH 3	6.65	6.87	30	PASS
	2427/CH 4	7.71	7.92	30	PASS
	2432/CH 5	7.54	7.76	30	PASS
	2437/CH 6	10.37	10.59	30	PASS
	2442/CH 7	12.30	12.52	30	PASS
	2447/CH 8	12.47	12.69	30	PASS
	2452/CH 9	10.77	10.99	30	PASS
Bluetooth (Low Energy)	2402/CH 0	5.14	6.95	30	PASS
	2440/CH 19	5.35	7.16	30	PASS
	2480/CH 39	4.94	6.75	30	PASS

Note: Average Power with duty factor = Average Power Measured + Duty cycle correction factor

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup

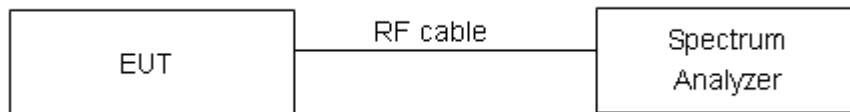

Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.




Test Results:

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	13.85	8.05	500	PASS
	2437	13.85	8.54	500	PASS
	2462	13.84	9.04	500	PASS
802.11g	2412	16.70	16.09	500	PASS
	2417	16.72	16.33	500	PASS
	2422	16.74	15.22	500	PASS
	2437	16.66	15.10	500	PASS
	2457	16.72	15.41	500	PASS
	2462	16.73	15.49	500	PASS
802.11n HT20	2412	17.79	17.30	500	PASS
	2417	17.85	17.30	500	PASS
	2422	17.83	15.07	500	PASS
	2437	17.84	14.91	500	PASS
	2457	17.86	15.39	500	PASS
	2462	17.89	16.06	500	PASS
802.11n HT40	2422	36.27	35.66	500	PASS
	2427	36.28	36.27	500	PASS
	2432	36.30	35.64	500	PASS
	2437	36.25	35.14	500	PASS
	2442	36.22	35.09	500	PASS
	2447	36.22	33.18	500	PASS
	2452	36.20	35.71	500	PASS
Bluetooth (Low Energy)	2402	1.04	0.66	500	PASS
	2440	1.03	0.66	500	PASS
	2480	1.04	0.66	500	PASS



99%bandwidth


802.11b, Carrier frequency (MHz): 2412

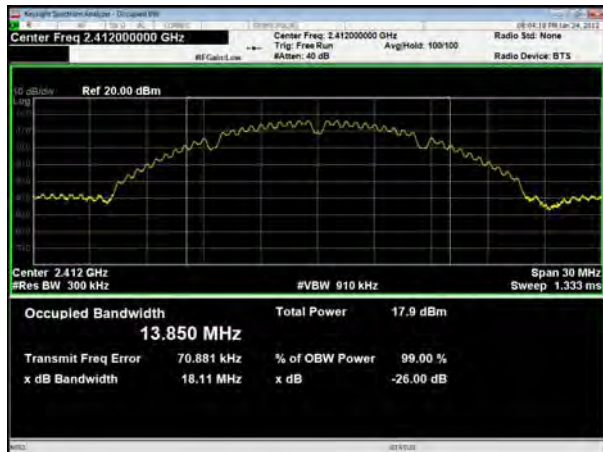

802.11b, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz):2462

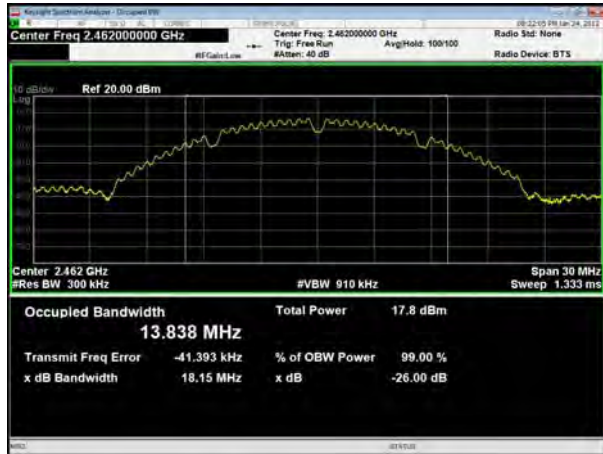



802.11g, Carrier frequency (MHz): 2412



802.11n(HT20), Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2417



802.11n(HT20), Carrier frequency (MHz): 2417



802.11g, Carrier frequency (MHz): 2422



802.11n(HT20), Carrier frequency (MHz): 2422





802.11g, Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2457



802.11n(HT20), Carrier frequency (MHz): 2457



802.11g, Carrier frequency (MHz): 2462




802.11n(HT20), Carrier frequency (MHz): 2462







802.11n(HT40), Carrier frequency (MHz): 2422

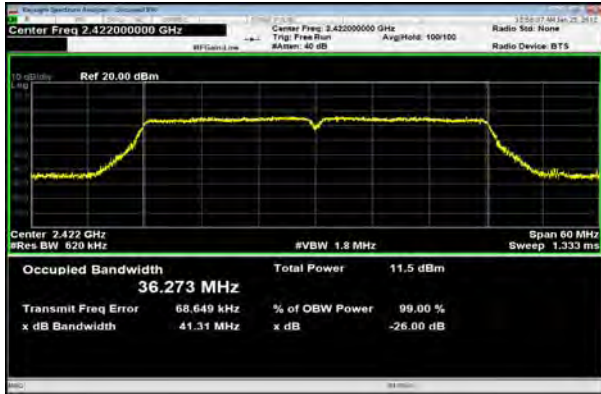


802.11n(HT40), Carrier frequency (MHz): 2427

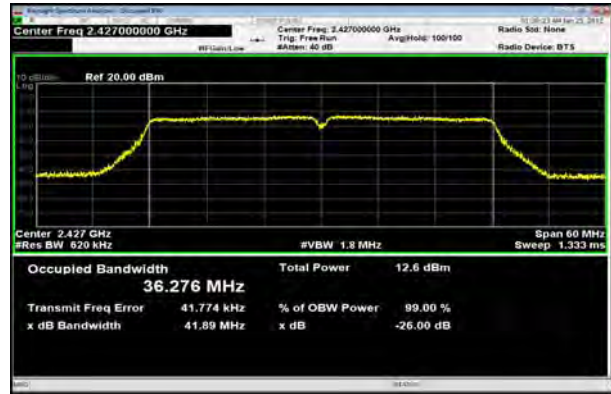


802.11n(HT40), Carrier frequency (MHz): 2432

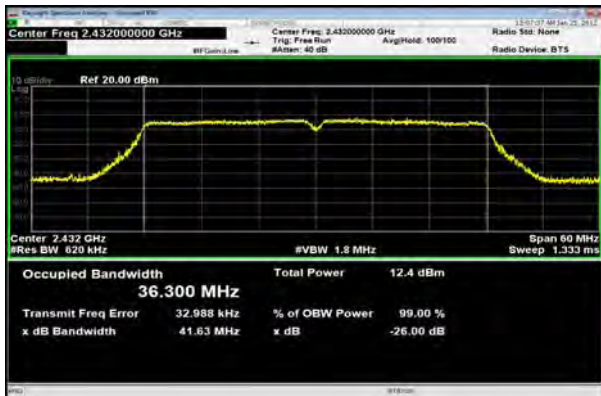


802.11n(HT40), Carrier frequency (MHz): 2437

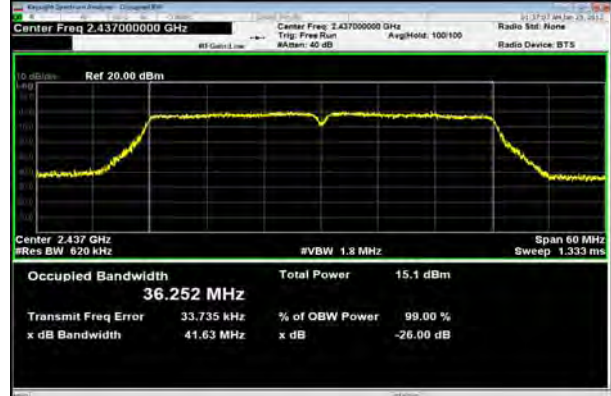


802.11n(HT40), Carrier frequency (MHz):2442

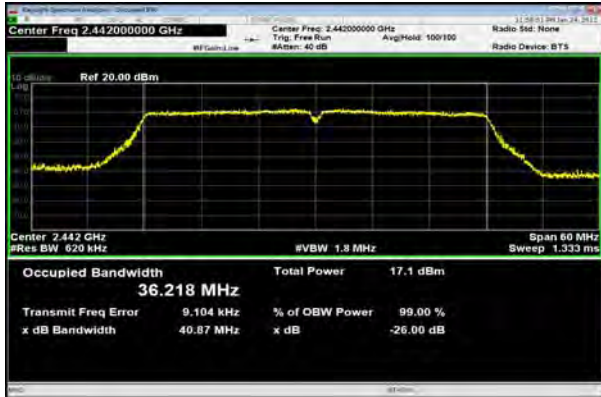

802.11n(HT40), Carrier frequency (MHz):2447

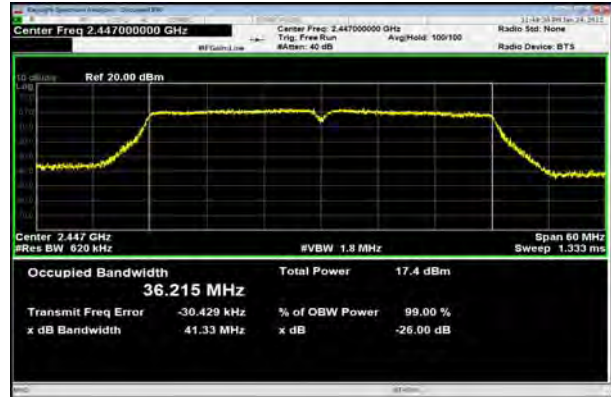

802.11n(HT40), Carrier frequency (MHz):2452

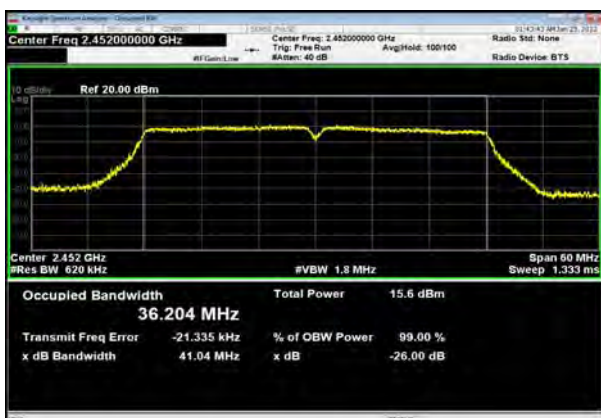



Bluetooth LE Carrier frequency (MHz): 2402



Bluetooth LE Carrier frequency (MHz): 2440



Bluetooth LE Carrier frequency (MHz): 2480





6 dB bandwidth

802.11b, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz):2462





802.11g, Carrier frequency (MHz): 2412



802.11n(HT20), Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2417




802.11n(HT20), Carrier frequency (MHz): 2417



802.11g, Carrier frequency (MHz): 2422



802.11n(HT20), Carrier frequency (MHz): 2422

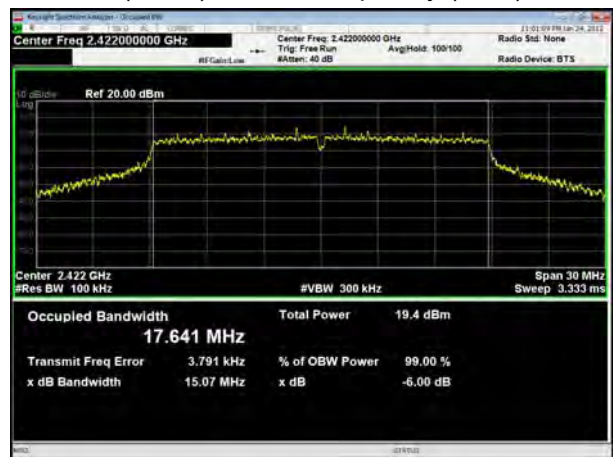



802.11g, Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2457



802.11n(HT20), Carrier frequency (MHz): 2457



802.11g, Carrier frequency (MHz): 2462



802.11n(HT20), Carrier frequency (MHz): 2462




802.11n(HT40), Carrier frequency (MHz): 2422


802.11n(HT40), Carrier frequency (MHz): 2427



802.11n(HT40), Carrier frequency (MHz): 2432

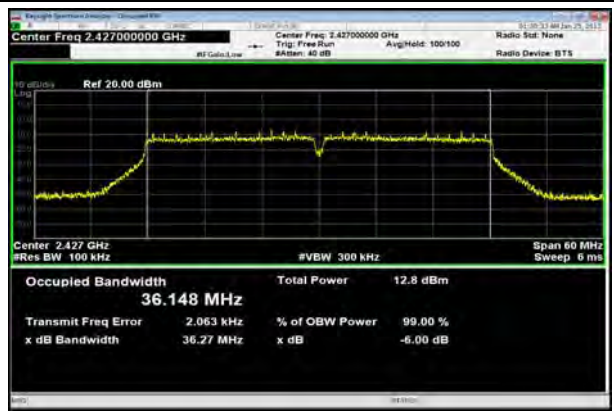


802.11n(HT40), Carrier frequency (MHz): 2437

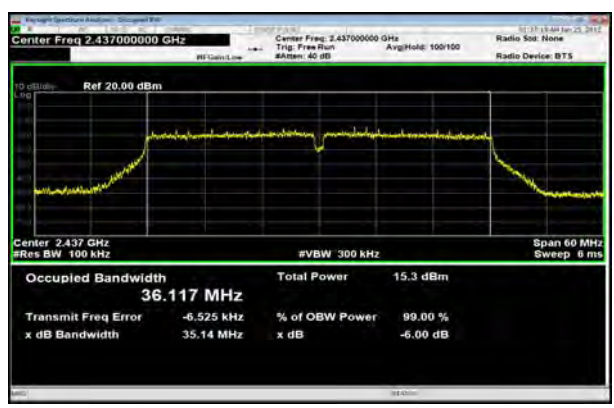


802.11n(HT40), Carrier frequency (MHz):2442



802.11n(HT40), Carrier frequency (MHz):2447

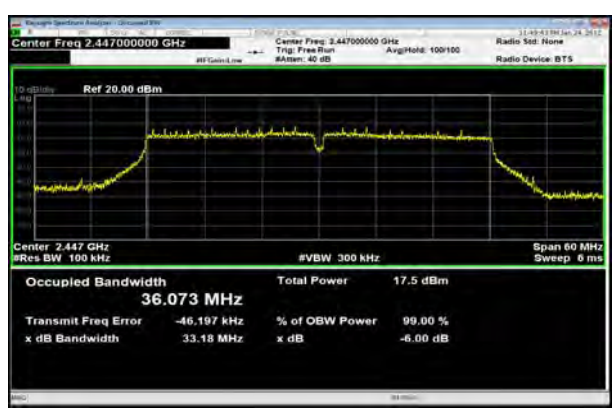

802.11n(HT40), Carrier frequency (MHz):2452

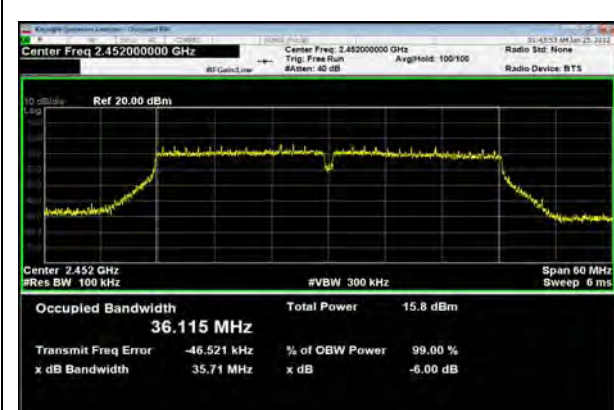



Bluetooth LE Carrier frequency (MHz): 2402



Bluetooth LE Carrier frequency (MHz): 2440



Bluetooth LE Carrier frequency (MHz): 2480



5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup

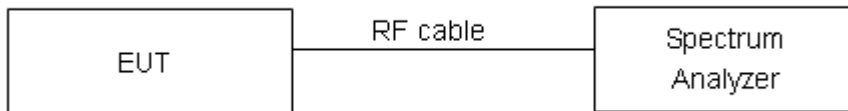

Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB



Test Results: PASS

802.11b, Channel No.: 1

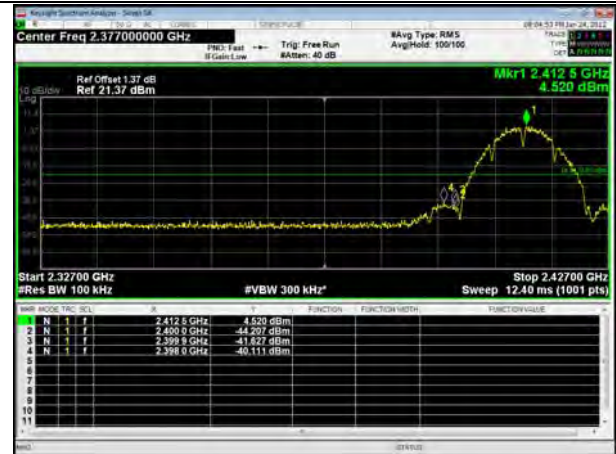

802.11b, Channel No.: 11





802.11g, Channel No.: 1







802.11g, Channel No.: 2

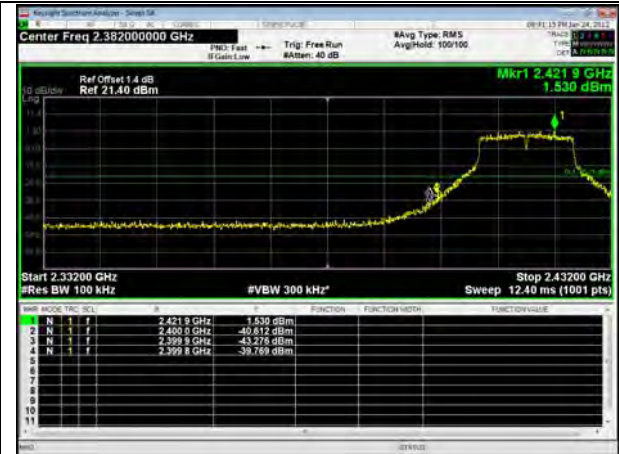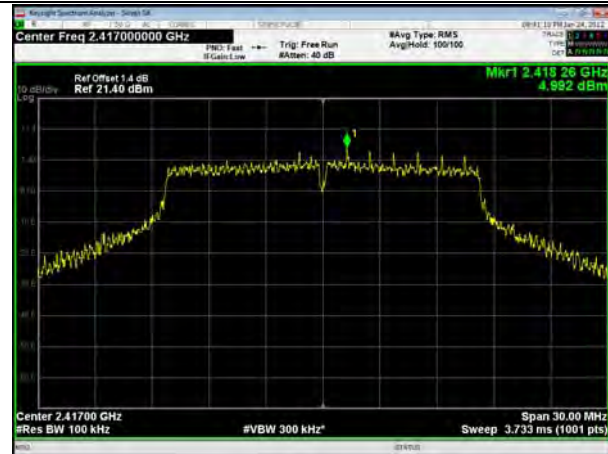

802.11g, Channel No.: 3

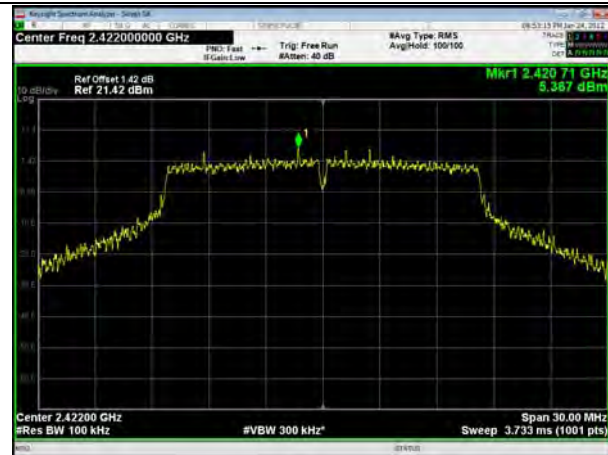


802.11g, Channel No.: 10

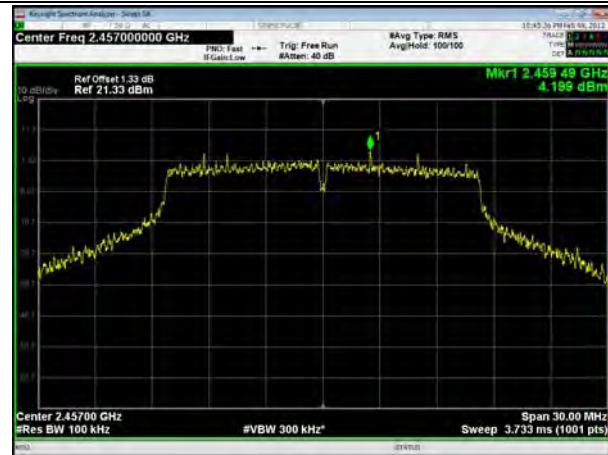



802.11g, Channel No.: 11

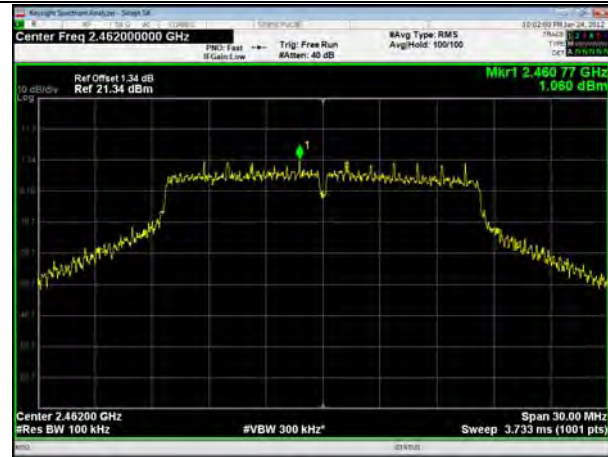

802.11n(HT20), Channel No. 1



802.11n(HT20), Channel No. 2







802.11n(HT20), Channel No. 3



802.11n(HT20), Channel No. 10

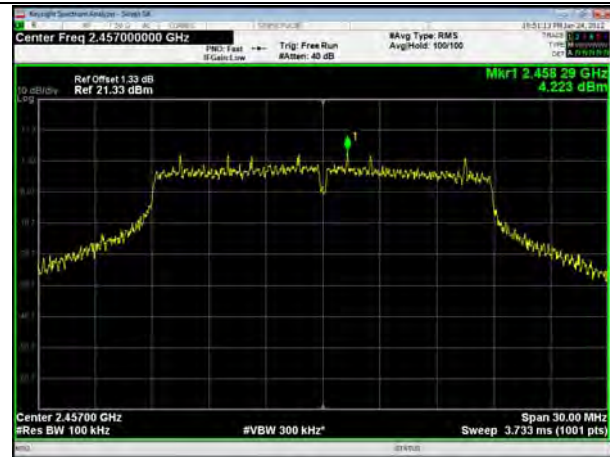

802.11n(HT20), Channel No. 11


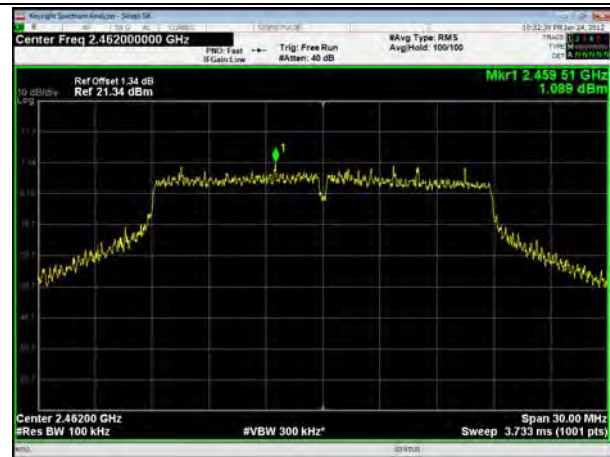





802.11n(HT40), Channel No. 3



802.11n(HT40), Channel No. 4

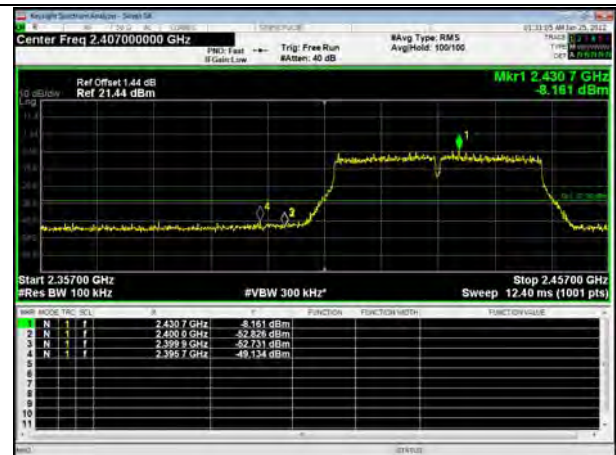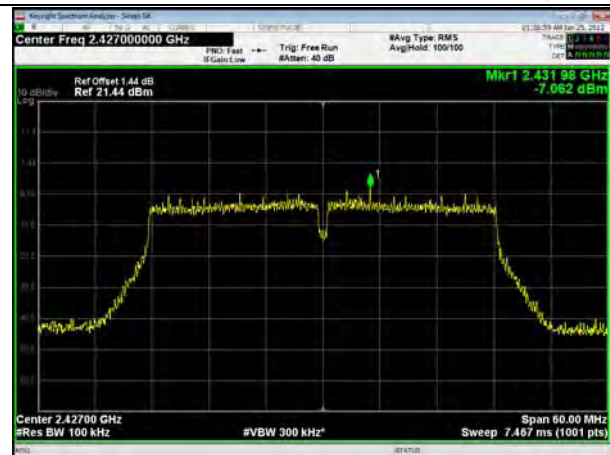

802.11n(HT40), Channel No. 5

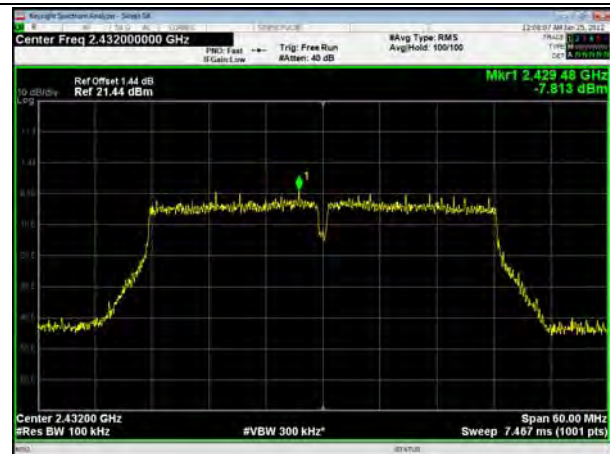




802.11n(HT40), Channel No. 7



802.11n(HT40), Channel No. 8





802.11n(HT40), Channel No. 9


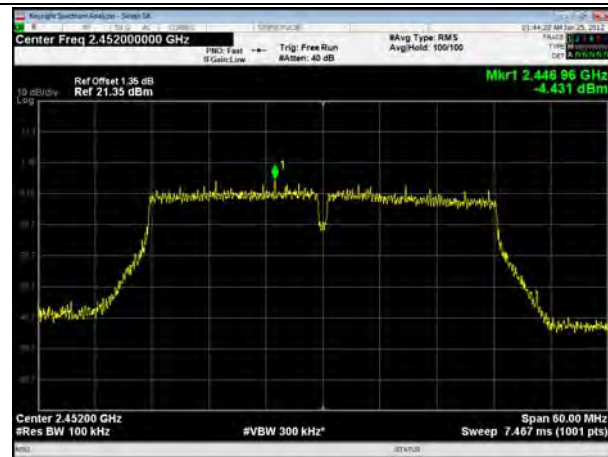




Bluetooth LE, Channel No.: 0

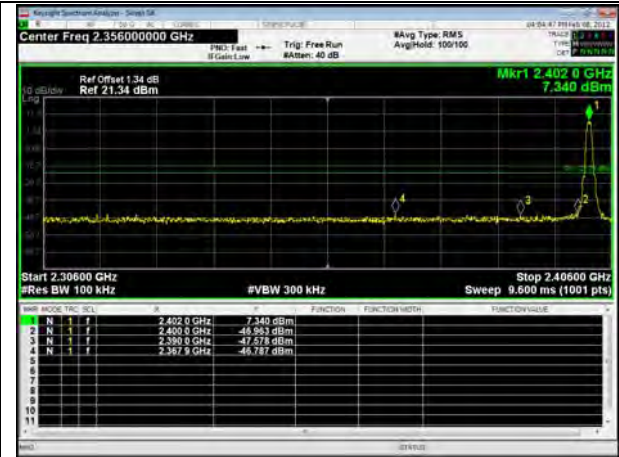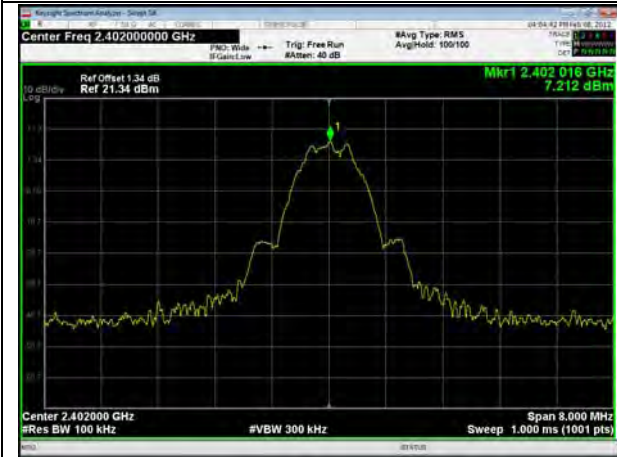

Bluetooth LE, Channel No.: 39

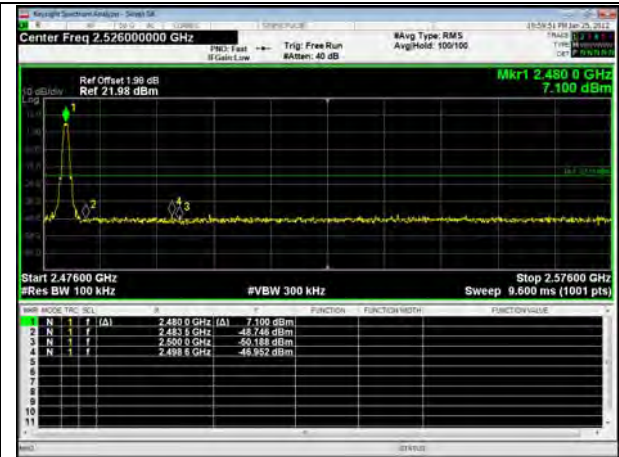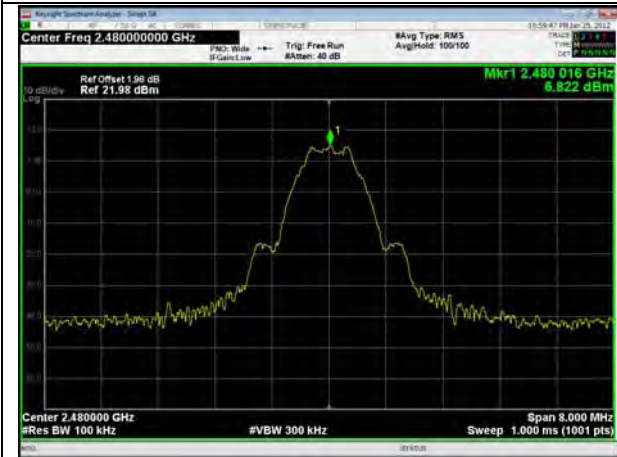

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- a) Set instrument center frequency to DTS channel center frequency
- b) Set span to at least 1.5 times the OBW
- c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- d) Set VBW $\geq [3 \times \text{RBW}]$
- e) Detector=power averaging (rms) or sample detector (when rms not available)
- f) Ensure that the number of measurement points in the sweep $2[2 \times \text{span}/\text{RBWT}]$
- g) Sweep time auto couple
- h) Employ trace averaging (rms) mode over a minimum of 100 traces
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)


Method AVGPSD-2 was used for this test.

- a) Measure the duty cycle (D)of the transmitter output signal as described in 11.6
- b) Set instrument center frequency to DTS channel center frequency
- c) Set span to at least 1.5 times the OBW
- d) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- e) Set VBW $\geq [3 \times \text{RBW}]$
- f) Detector= power averaging (rms) or sample detector (when rms not available)
- g) Ensure that the number of measurement points in the sweep $2[2 \times \text{span}/\text{RBW}]$
- h) Sweep time =auto couple
- i) Do not use sweep triggering; allow sweep to "free run"
- j) Employ trace averaging (rms) mode over a minimum of 100 traces
- k) Use the peak marker function to determine the maximum amplitude level

l) Add $[10 \log(1/ D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U= 0.75\text{dB}$.

**Test Results:**

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	2412/CH 1	-5.69	-15.69	8	PASS
	2437/CH 6	-6.02	-16.02	8	PASS
	2462/CH 11	-6.04	-16.04	8	PASS
802.11g	2412/CH 1	-13.08	-23.08	8	PASS
	2417/CH 2	-8.17	-18.17	8	PASS
	2422/CH 3	-6.69	-16.69	8	PASS
	2437/CH 6	-7.18	-17.18	8	PASS
	2457/CH 10	-7.08	-17.08	8	PASS
	2462/CH 11	-10.61	-20.61	8	PASS
802.11n HT20	2412/CH 1	-12.88	-22.88	8	PASS
	2417/CH 2	-8.89	-18.89	8	PASS
	2422/CH 3	-8.80	-18.80	8	PASS
	2437/CH 6	-8.01	-18.01	8	PASS
	2457/CH 10	-8.91	-18.91	8	PASS
	2462/CH 11	-11.86	-21.86	8	PASS
802.11n HT40	2422/CH 3	-14.91	-24.69	8	PASS
	2427/CH 4	-18.98	-28.76	8	PASS
	2432/CH 5	-18.87	-28.65	8	PASS
	2437/CH 6	-16.48	-26.26	8	PASS
	2442/CH 7	-14.27	-24.05	8	PASS
	2447/CH 8	-13.88	-23.66	8	PASS
	2452/CH 9	-15.10	-24.88	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor+10*log10(3/30)

Test Mode	Carrier frequency (MHz) / Channel	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
Bluetooth (Low Energy)	2402/CH 0	-11.09	-9.28	8	PASS
	2440/CH 19	-9.25	-7.44	8	PASS
	2480/CH 39	-10.83	-9.02	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor



802.11b, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437




802.11b, Carrier frequency (MHz):2462





802.11g, Carrier frequency (MHz): 2412

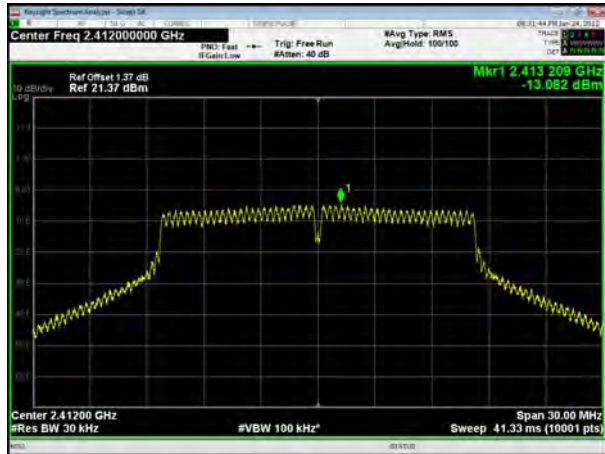


802.11n(HT20), Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2417




802.11n(HT20), Carrier frequency (MHz): 2417

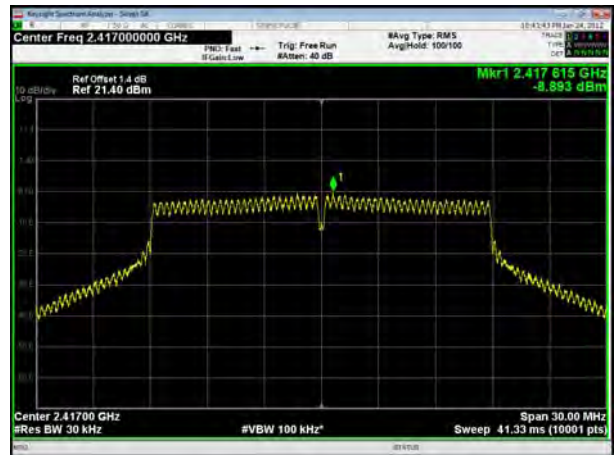

802.11g, Carrier frequency (MHz): 2422

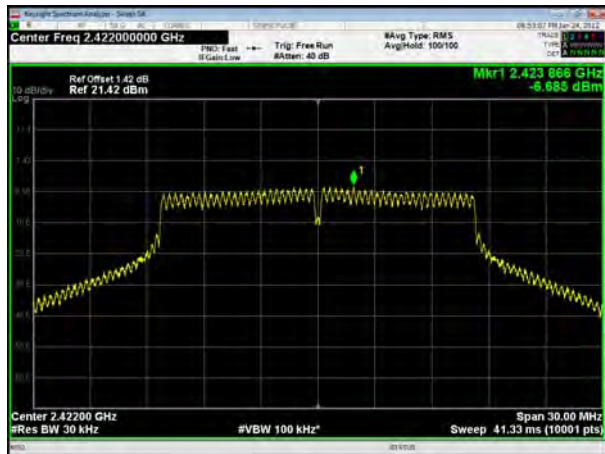


802.11n(HT20), Carrier frequency (MHz): 2422

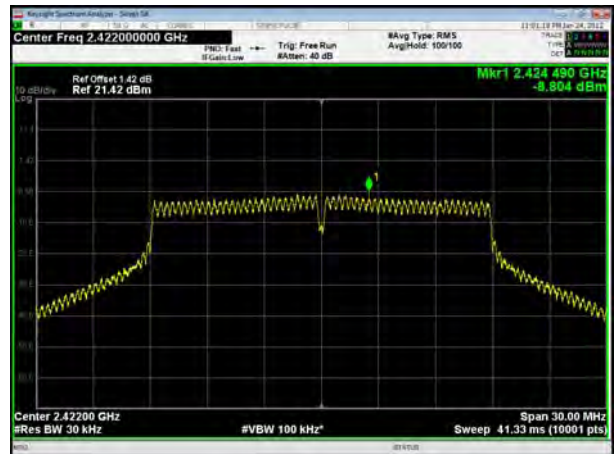





802.11g, Carrier frequency (MHz): 2437

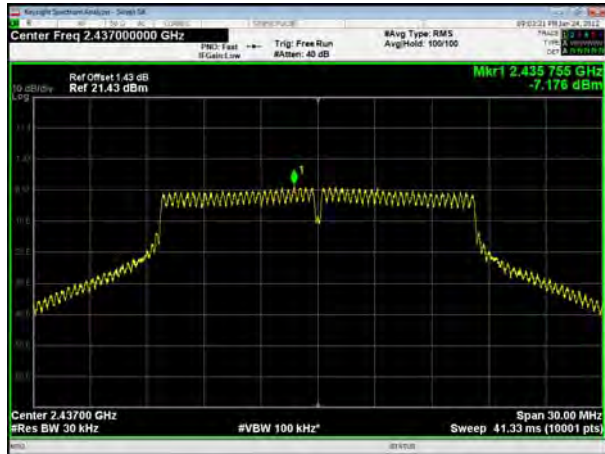


802.11n(HT20), Carrier frequency (MHz): 2437

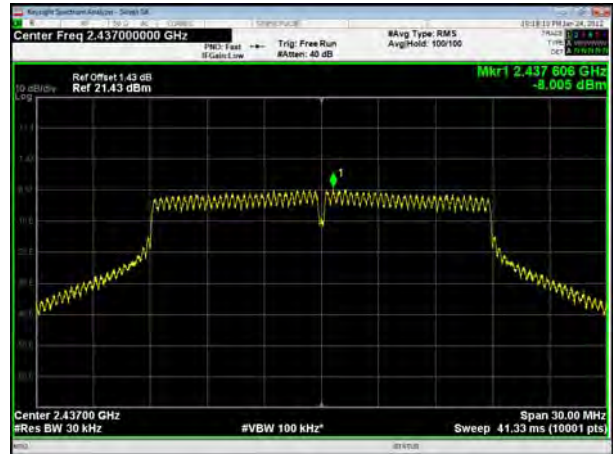

802.11g, Carrier frequency (MHz): 2457

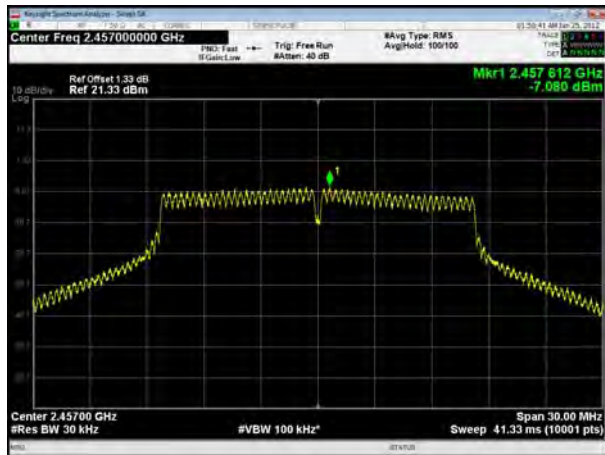

802.11n(HT20), Carrier frequency (MHz): 2457

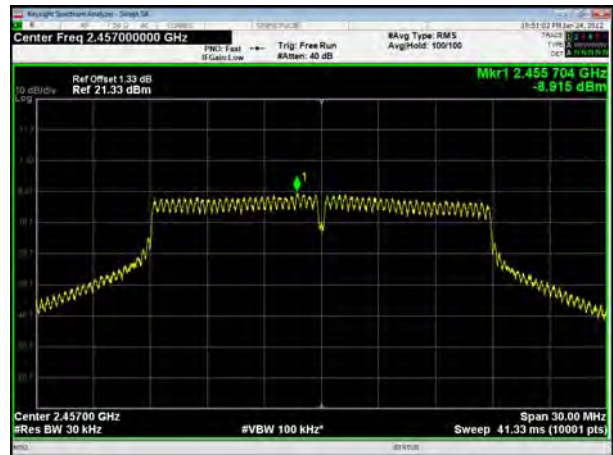

802.11g, Carrier frequency (MHz): 2462




802.11n(HT20), Carrier frequency (MHz): 2462







802.11n(HT40), Carrier frequency (MHz): 2422

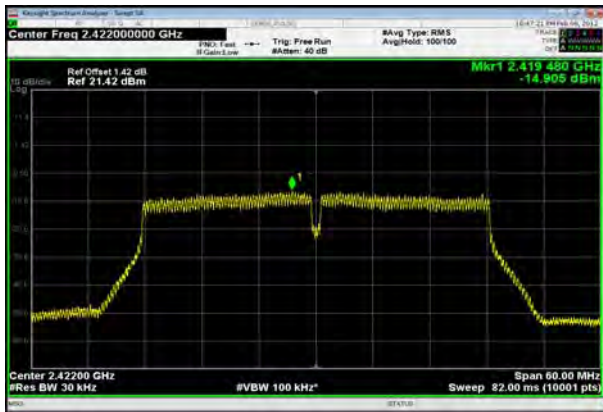


802.11n(HT40), Carrier frequency (MHz): 2427

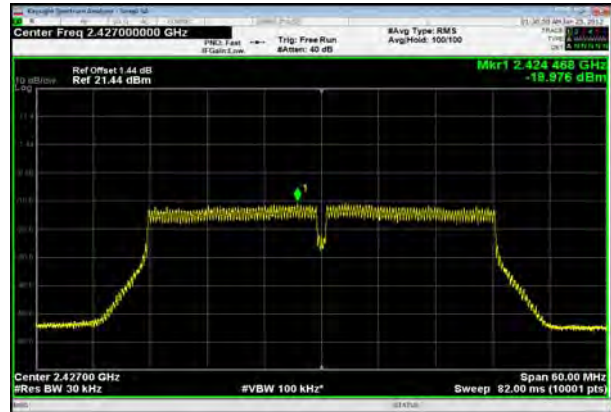

802.11n(HT40), Carrier frequency (MHz): 2432

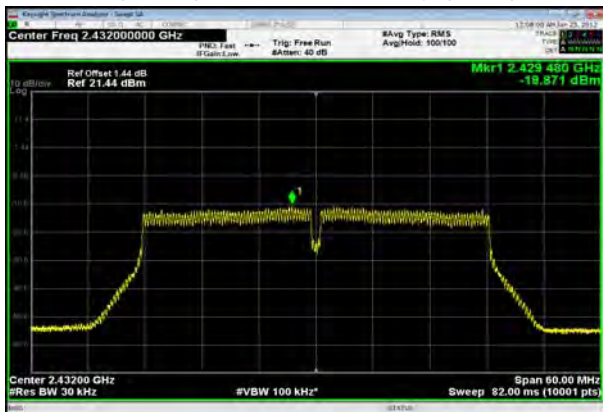


802.11n(HT40), Carrier frequency (MHz): 2437

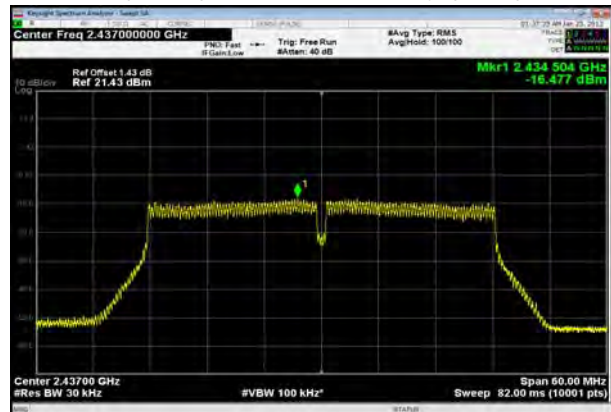


802.11n(HT40), Carrier frequency (MHz):2442



802.11n(HT40), Carrier frequency (MHz):2447

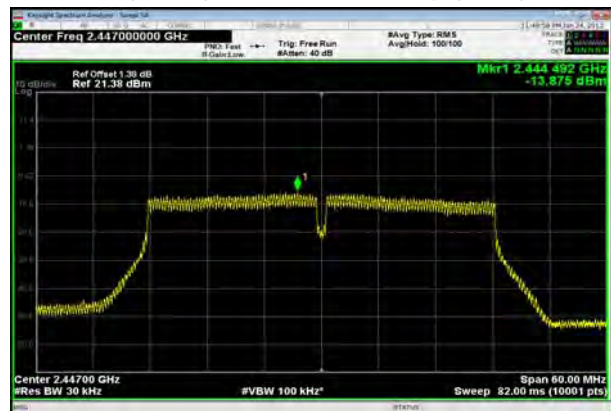


802.11n(HT40), Carrier frequency (MHz):2452

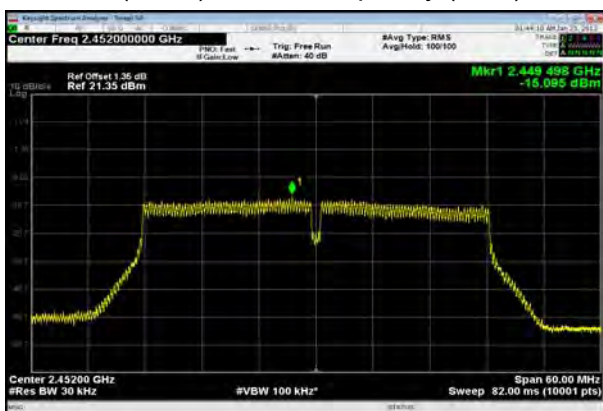


Bluetooth LE Carrier frequency (MHz): 2402



Bluetooth LE Carrier frequency (MHz): 2440

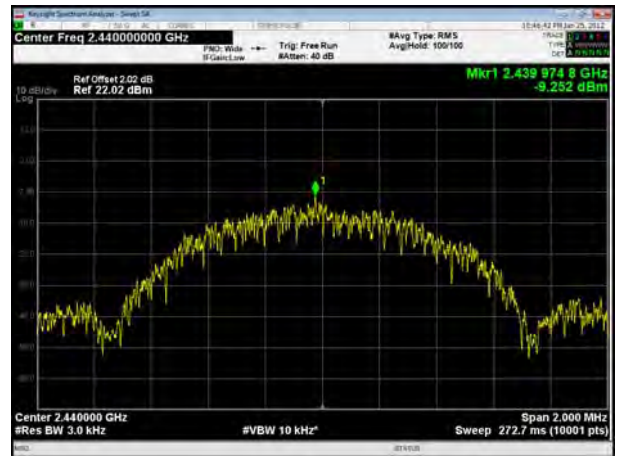

Bluetooth LE Carrier frequency (MHz): 2480

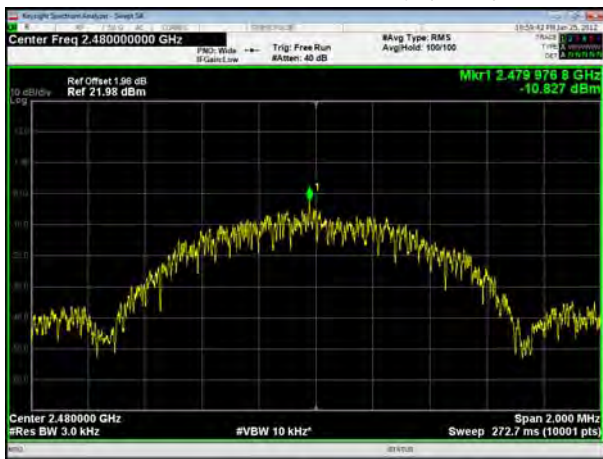

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Antenna 1

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	6.49	-23.51
	2437	6.89	-23.11
	2462	6.71	-23.29
802.11g	2412	-0.01	-30.01
	2417	4.70	-25.30
	2422	6.07	-23.93
	2437	5.69	-24.31
	2457	6.59	-23.41
	2462	0.93	-29.07
802.11n HT20	2412	-0.33	-30.33
	2417	3.68	-26.32



	2422	4.09	-25.91
	2437	5.29	-24.71
	2457	4.17	-25.83
	2462	0.67	-29.33
802.11n HT40	2422	-8.62	-38.62
	2427	-7.91	-37.91
	2432	-8.17	-38.17
	2437	-5.55	-35.55
	2442	-2.55	-32.55
	2447	-3.05	-33.05
	2452	-5.10	-35.10
Bluetooth (Low Energy)	2402	7.14	-22.86
	2440	8.75	-21.25
	2480	7.05	-22.95

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:


802.11b, Channel No.: 1

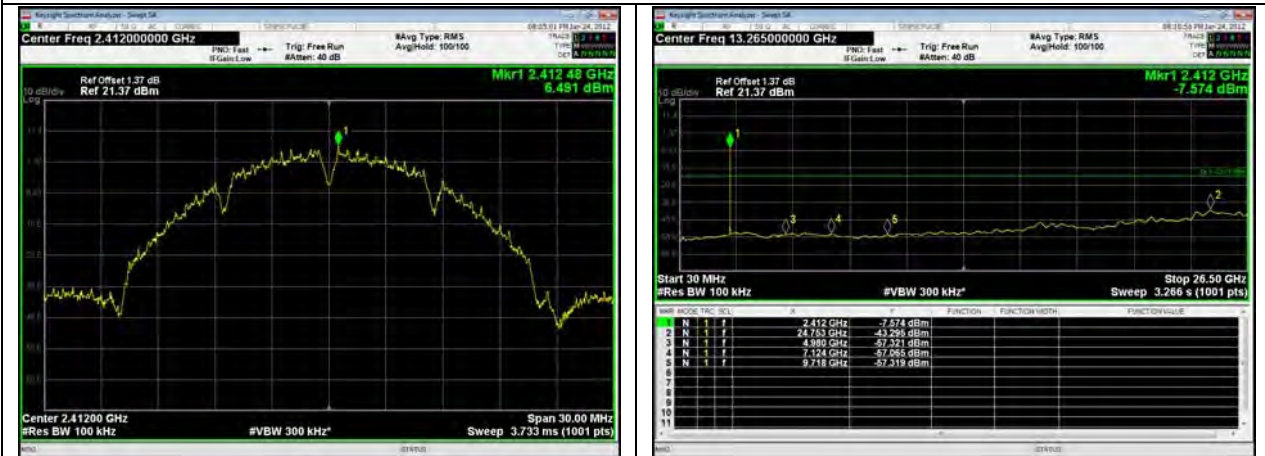

802.11b, Channel No.: 6


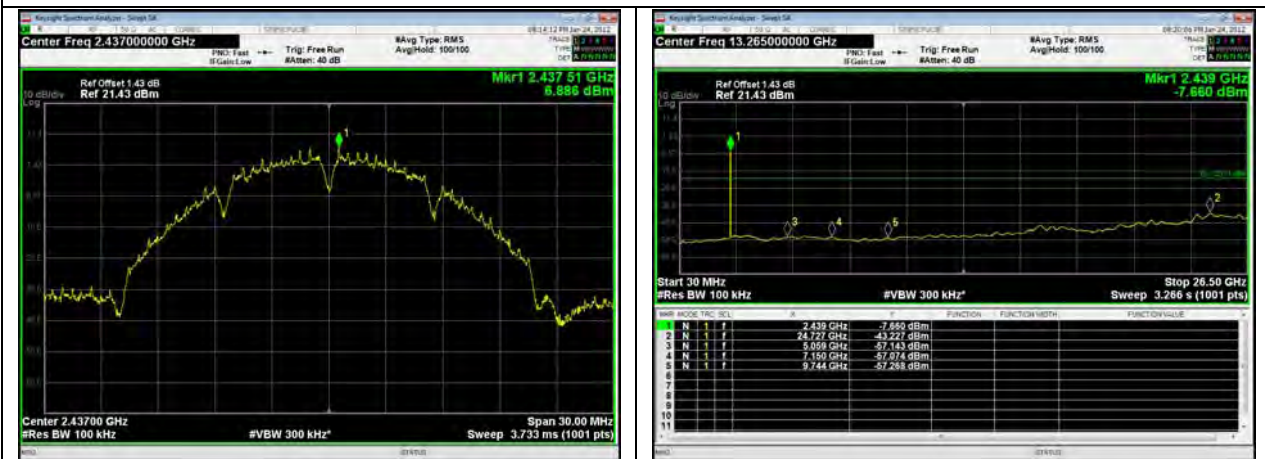


802.11b, Channel No.: 11

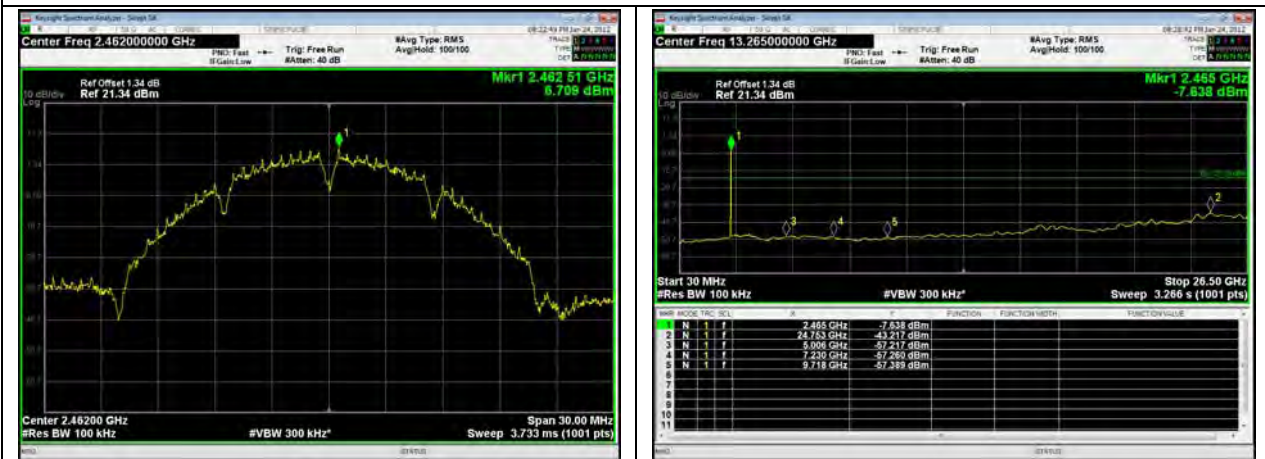





802.11g, Channel No.: 1

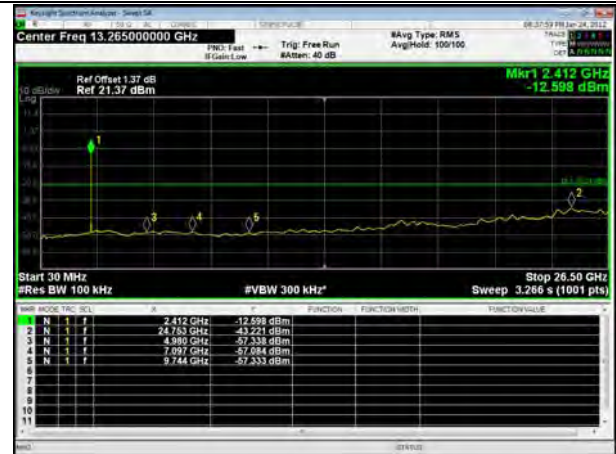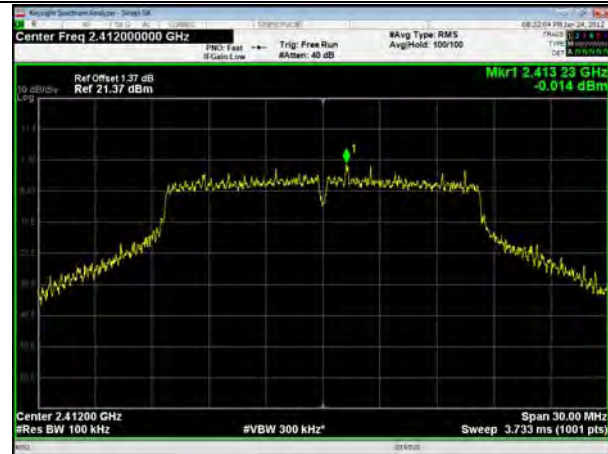

802.11g, Channel No.: 2

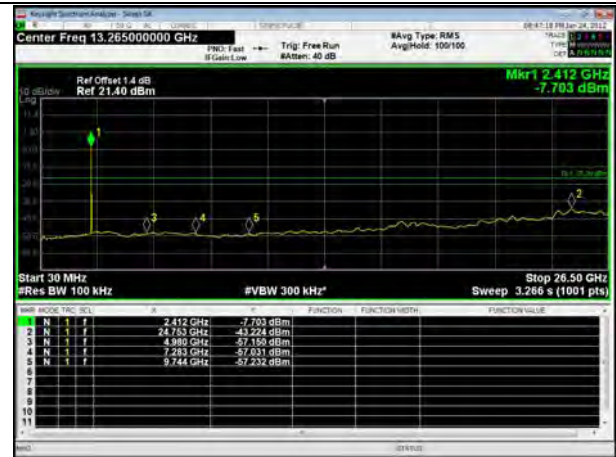


802.11g, Channel No.: 3


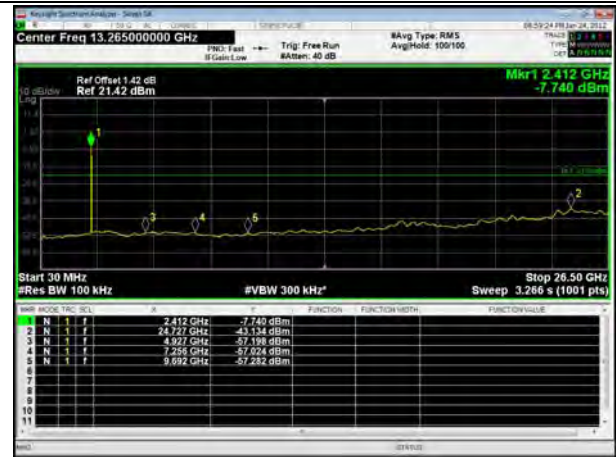






802.11g, Channel No.: 6

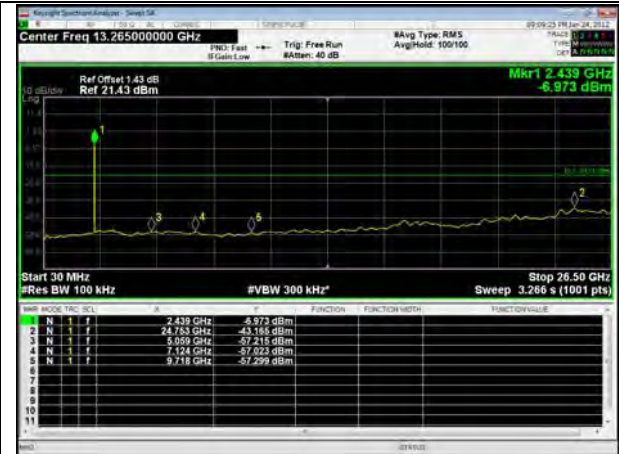

802.11g, Channel No.: 10

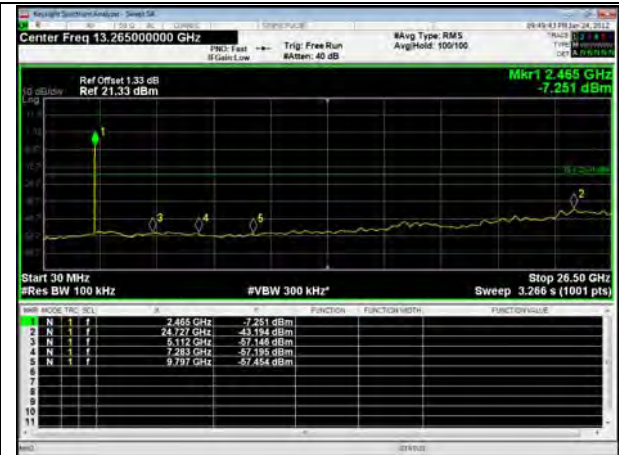
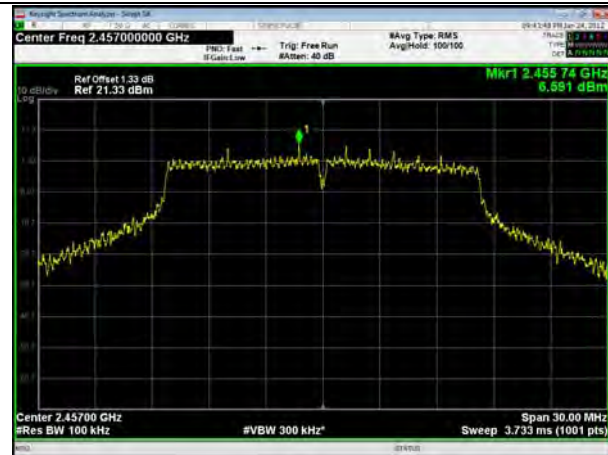


802.11g, Channel No.: 11

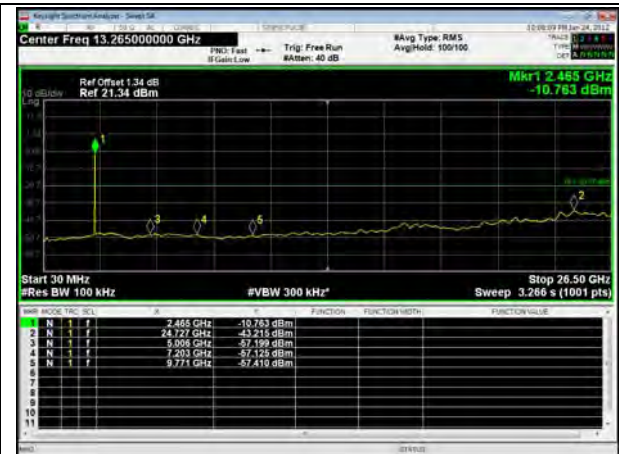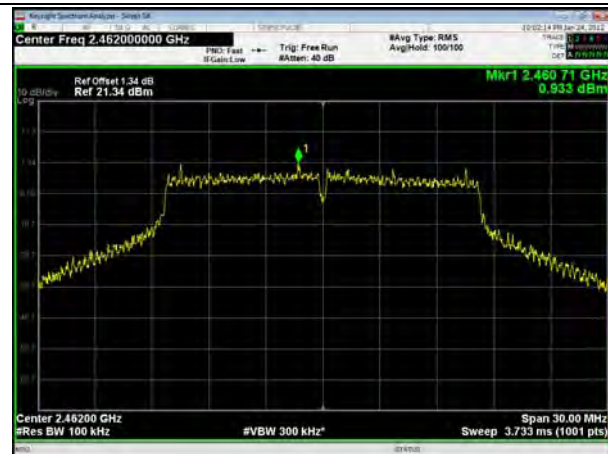



802.11n(HT20), Channel No. 1

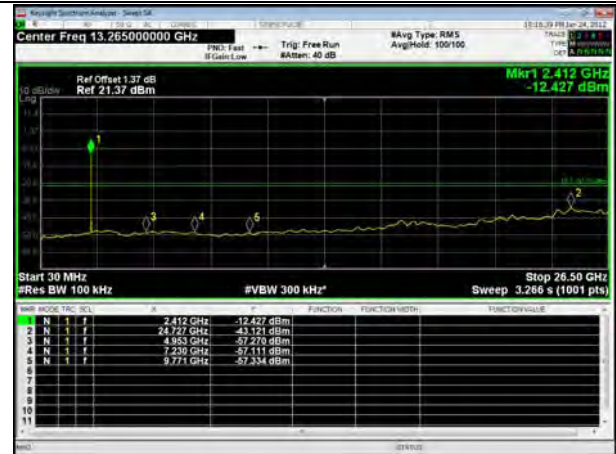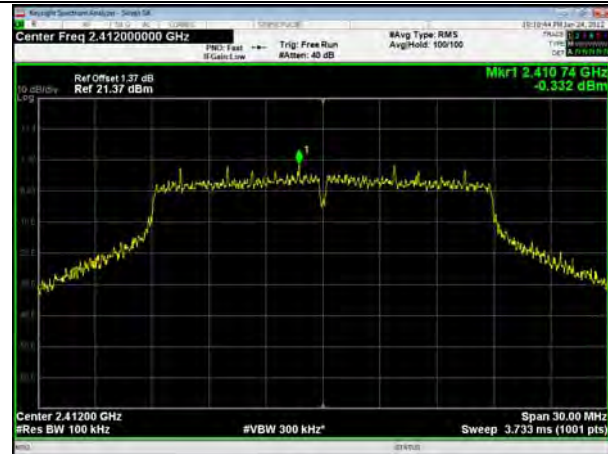

802.11n(HT20), Channel No. 2




802.11n(HT20), Channel No. 3








802.11n(HT20), Channel No. 6

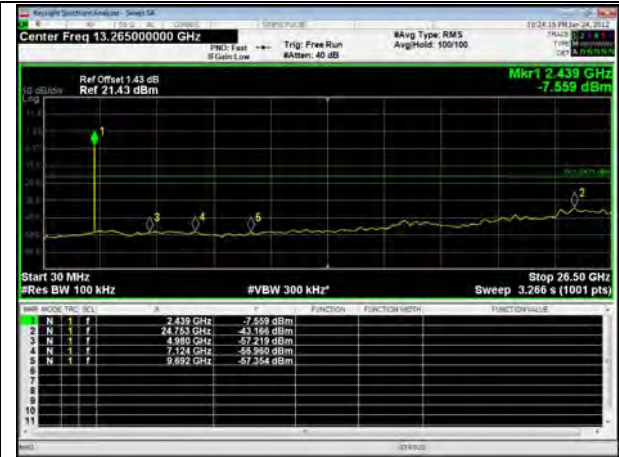

802.11n(HT20), Channel No. 10

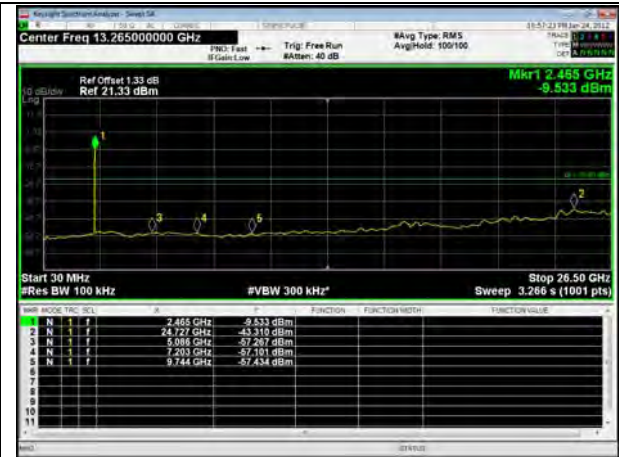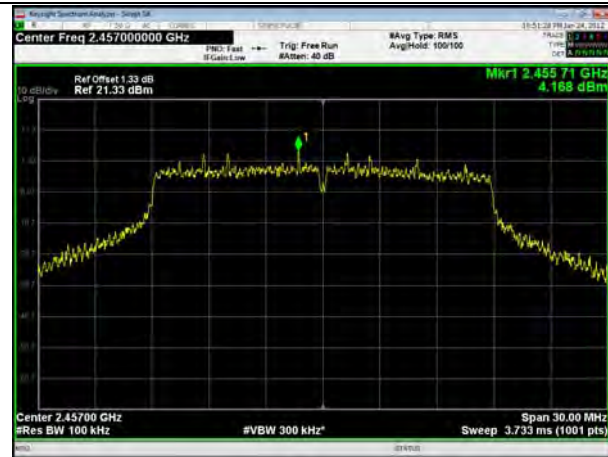


802.11n(HT20), Channel No. 11

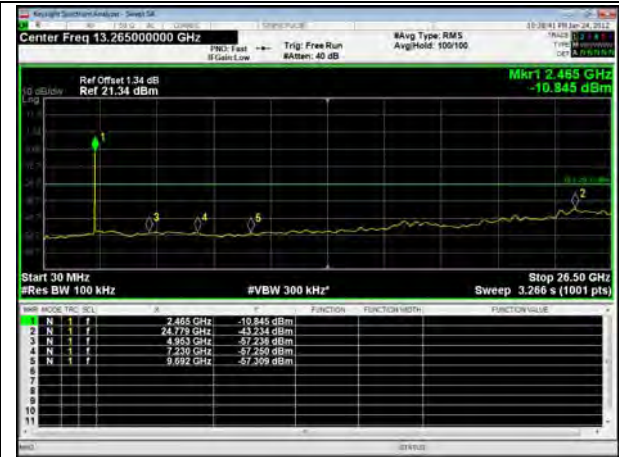



802.11n(HT40), Channel No. 3

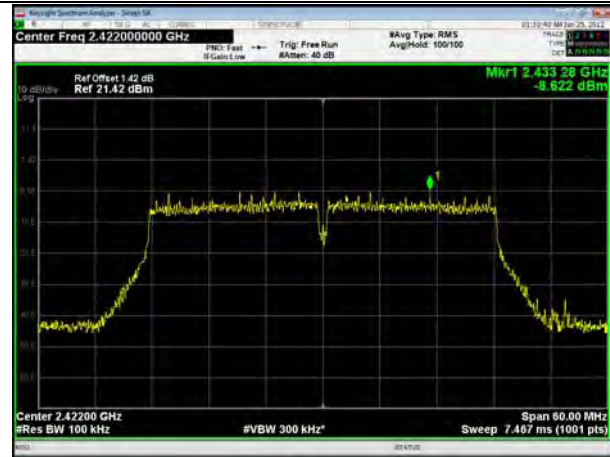

802.11n(HT40), Channel No. 4




802.11n(HT40), Channel No. 5






802.11n(HT40), Channel No. 6

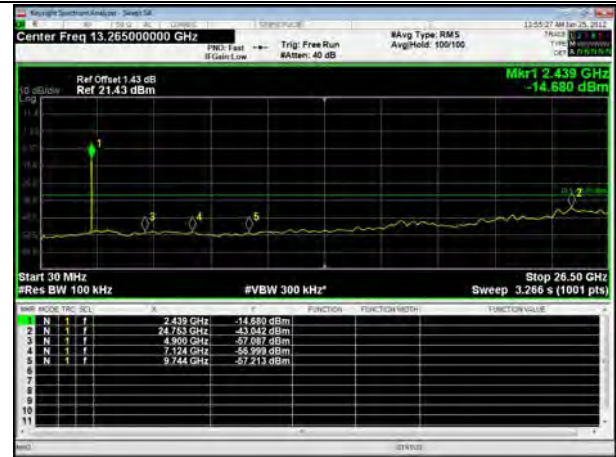

802.11n(HT40), Channel No. 7





802.11n(HT40), Channel No. 8

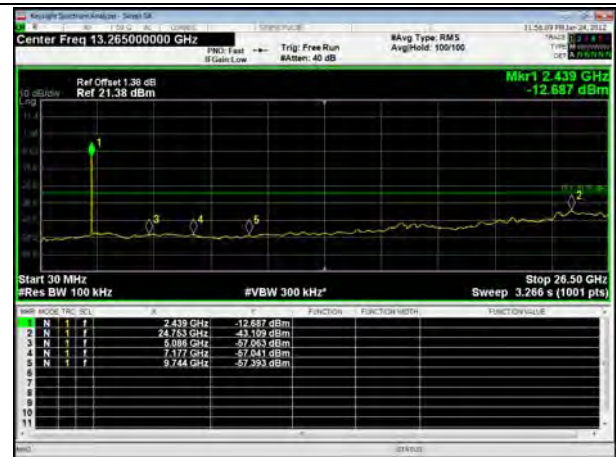



802.11n(HT40), Channel No. 9

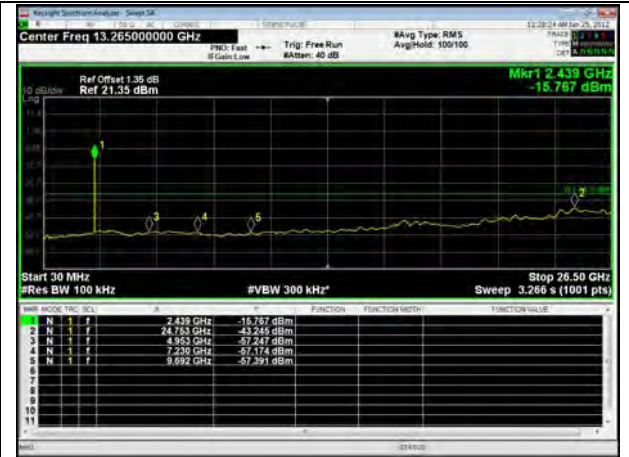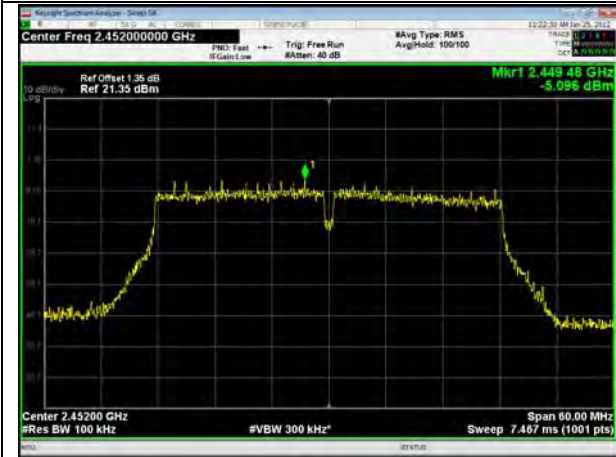





Bluetooth LE, Channel No.: 0



Bluetooth LE, Channel No.: 19

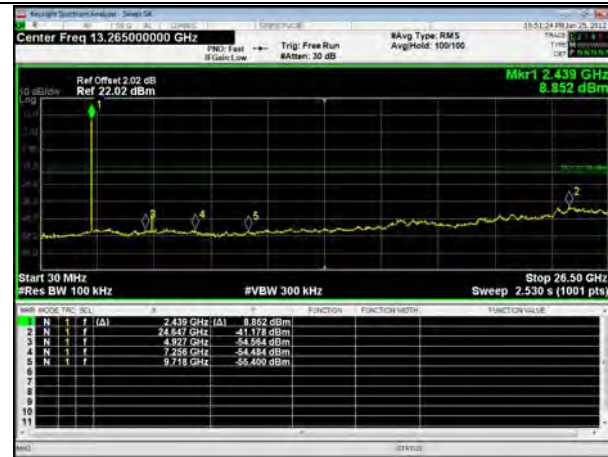

Bluetooth LE, Channel No.: 39

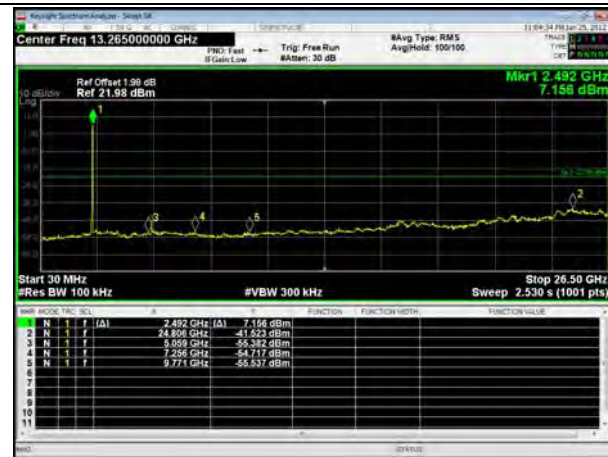

5.6. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

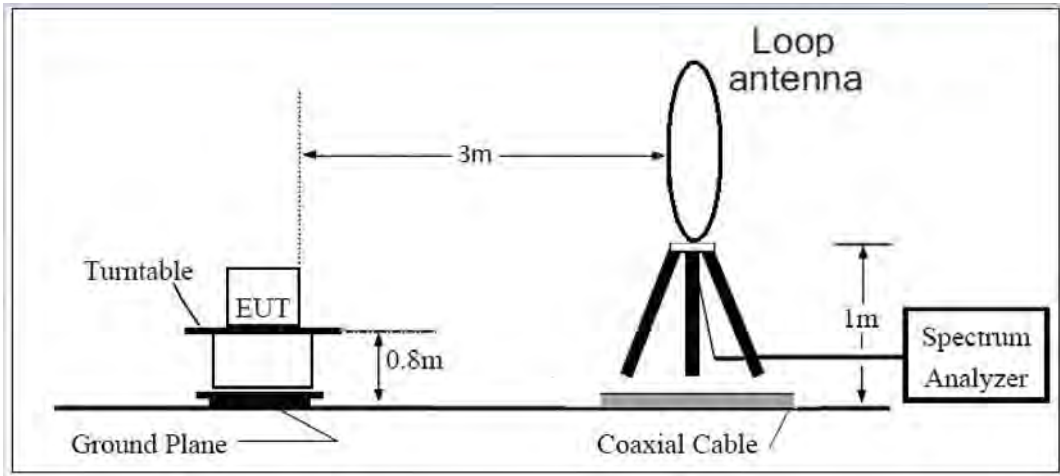

30MHz ~ 1GHz

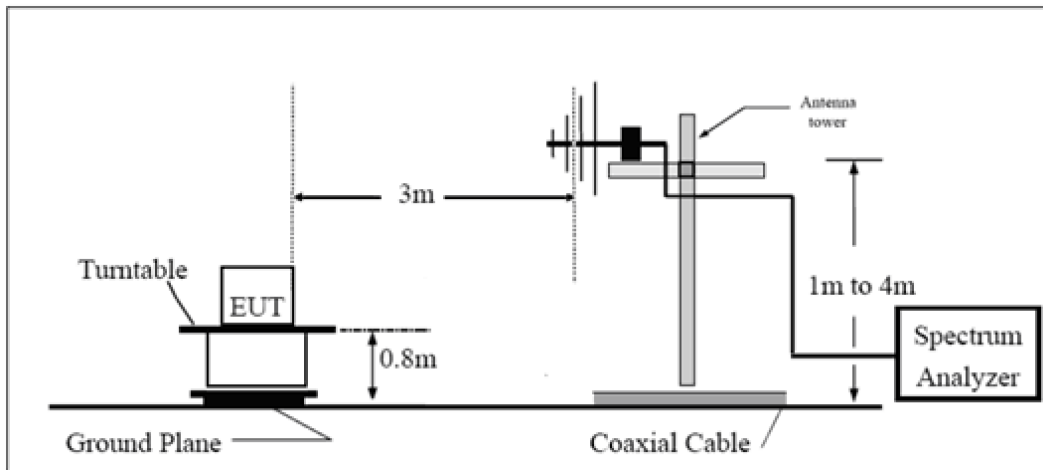

Above 1GHz

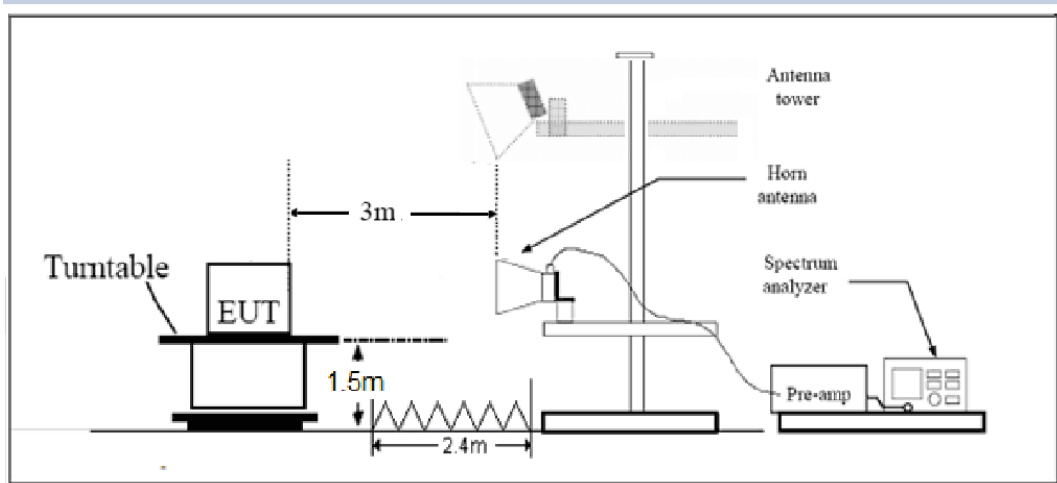

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m



Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB




Test Results:

A font (dB_{μV/m}) in the test plot = (dB μV/m)


A font (dB V/) in the test plot = (dB μV/m)

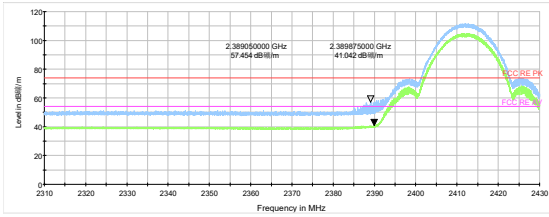


802.11b-Channel 1 Peak+ Average

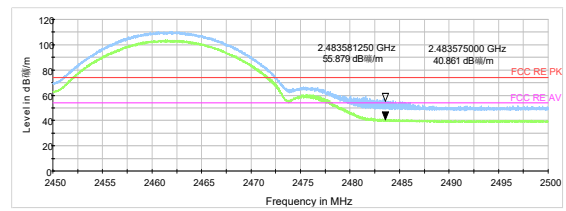


802.11b-Channel 11 Peak+ Average

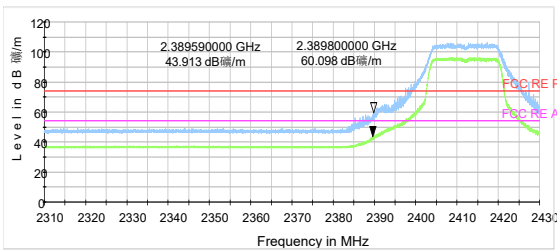


802.11g-Channel 1 Peak+ Average

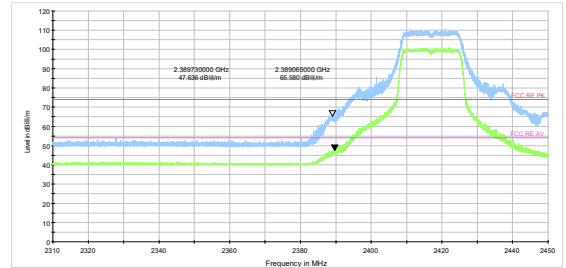


802.11g-Channel 2 Peak+ Average

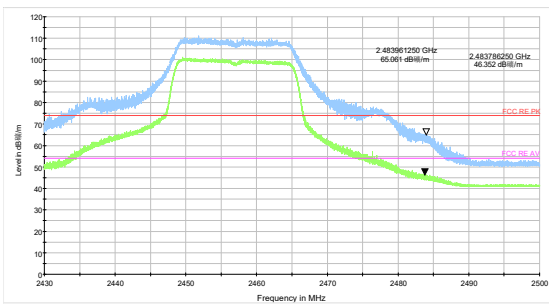


802.11g-Channel 10 Peak+ Average

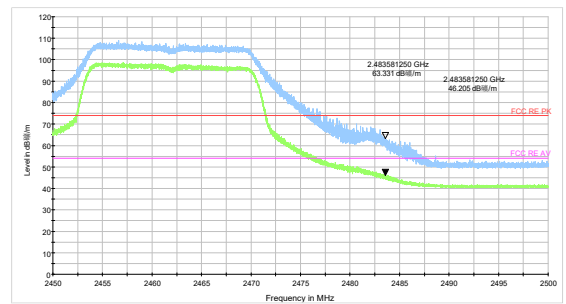


802.11g-Channel 11 Peak+ Average

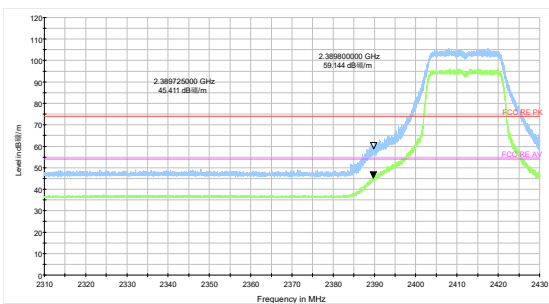


802.11n HT20 -Channel 1 Peak+ Average

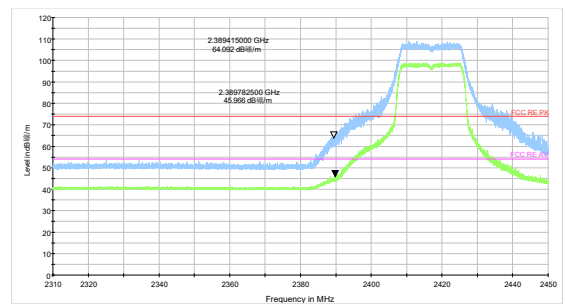

802.11n HT20 -Channel 2 Peak+ Average

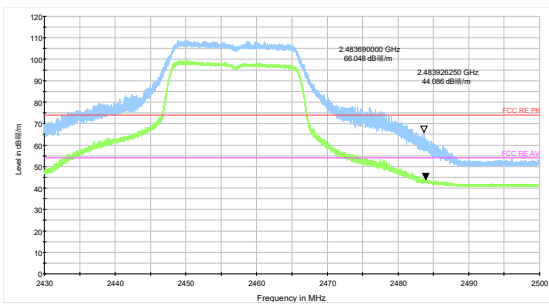


802.11n HT20 -Channel 1 Peak+ Average

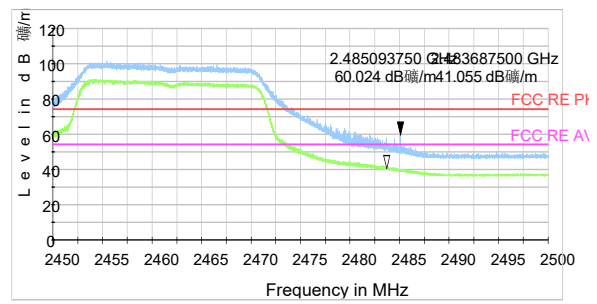


802.11n HT20 -Channel 2 Peak+ Average




802.11n HT20 -Channel 10 Peak+ Average

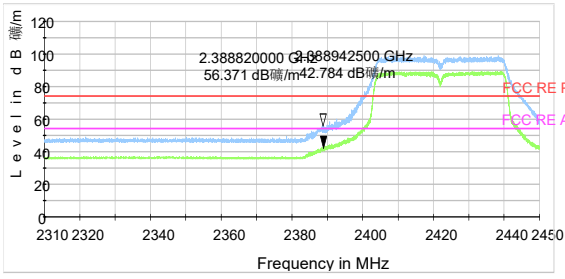


802.11n HT20 -Channel 11 Peak+ Average

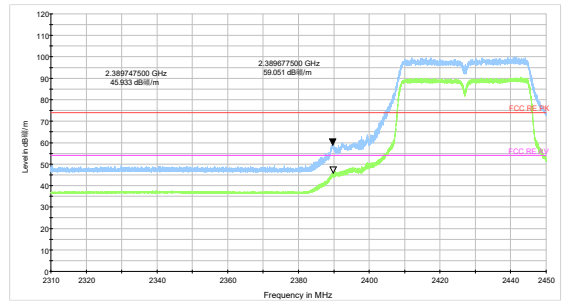


802.11n HT40 -Channel 3 Peak+ Average

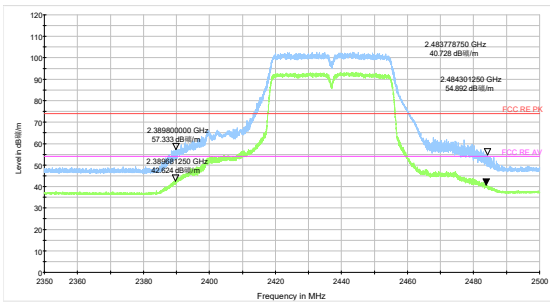



802.11n HT40 -Channel 4 Peak+ Average

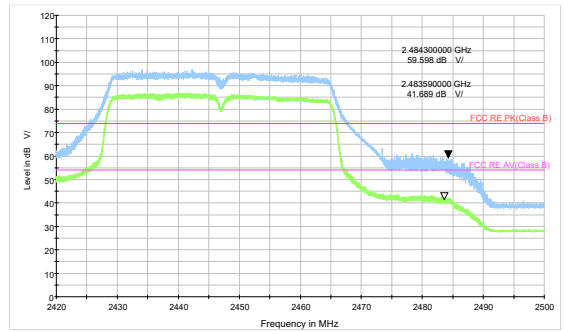

802.11n HT40 -Channel 6 Peak+ Average

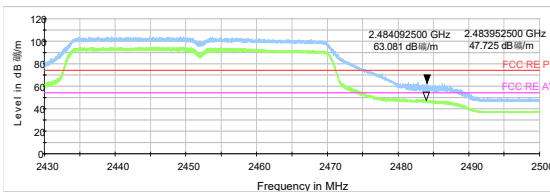

802.11n HT40 -Channel 8 Peak+ Average

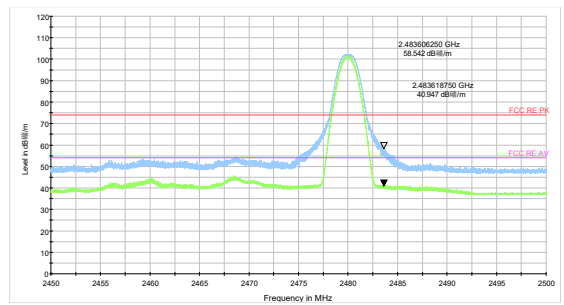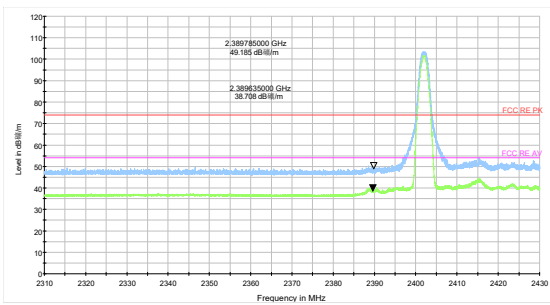

Bluetooth LE Channel 0 Peak+ Average

Bluetooth LE Channel 39 Peak+ Average

Result of RE

Test result


The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT20), Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


A font (Level in dB μ V/m) in the test plot =(level in dB μ V/m)

A font (Level in dB V/) in the test plot =(level in dB μ V/m)


Continuous TX mode:

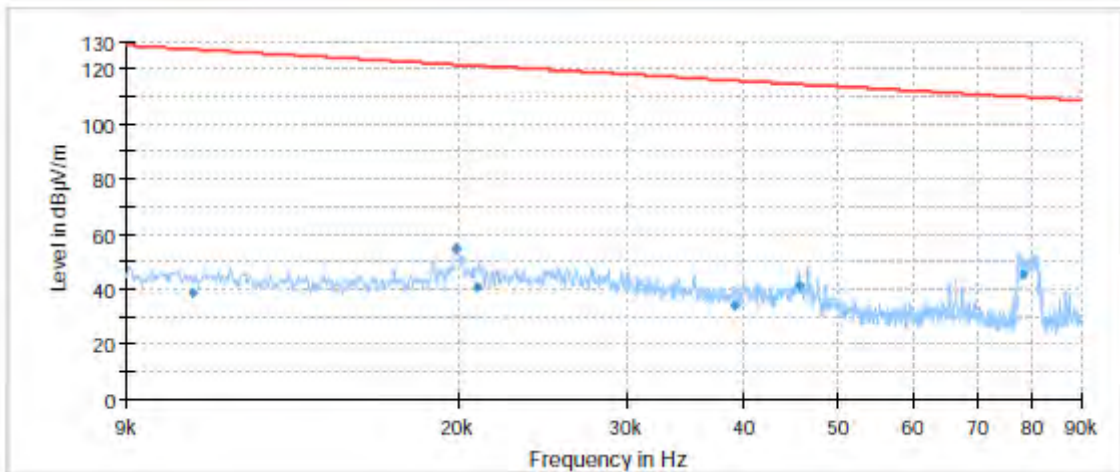


Radiates Emission from 9KHz to 90KHz

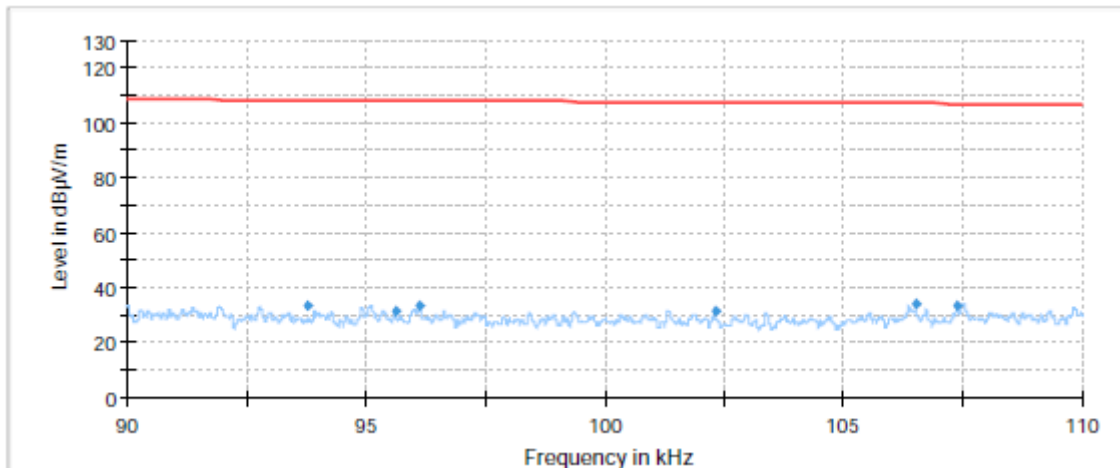


Radiates Emission from 90KHz to 110KHz

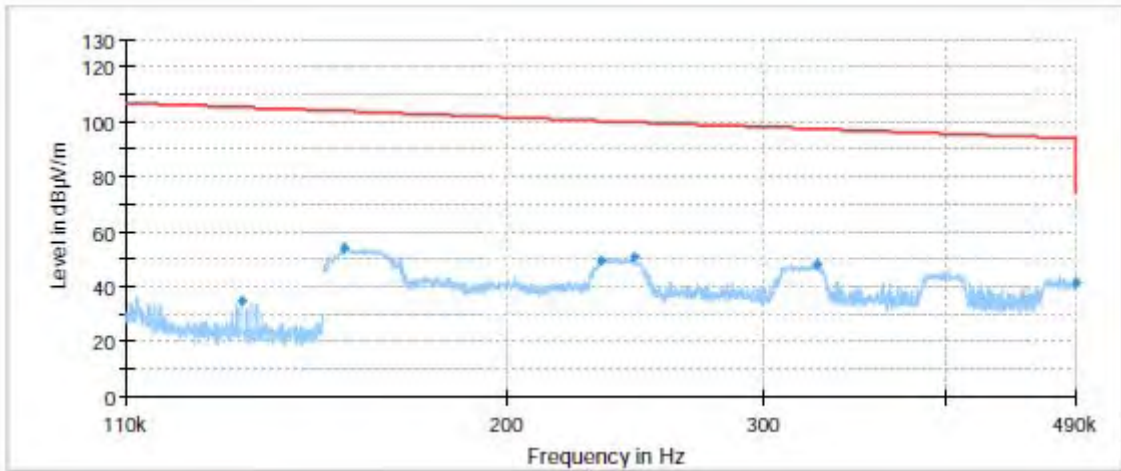

Radiates Emission from 110KHz to 490KHz

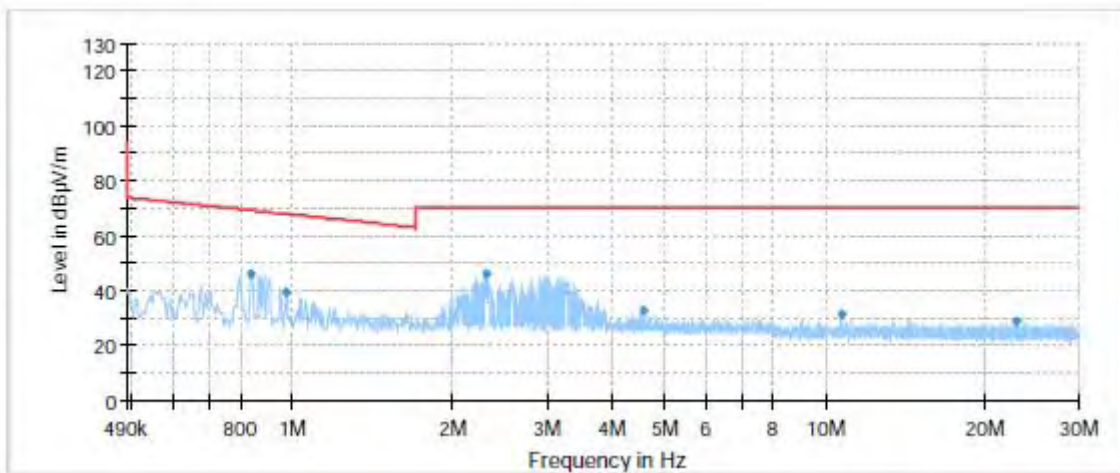

Radiates Emission from 490KHz to 30MHz

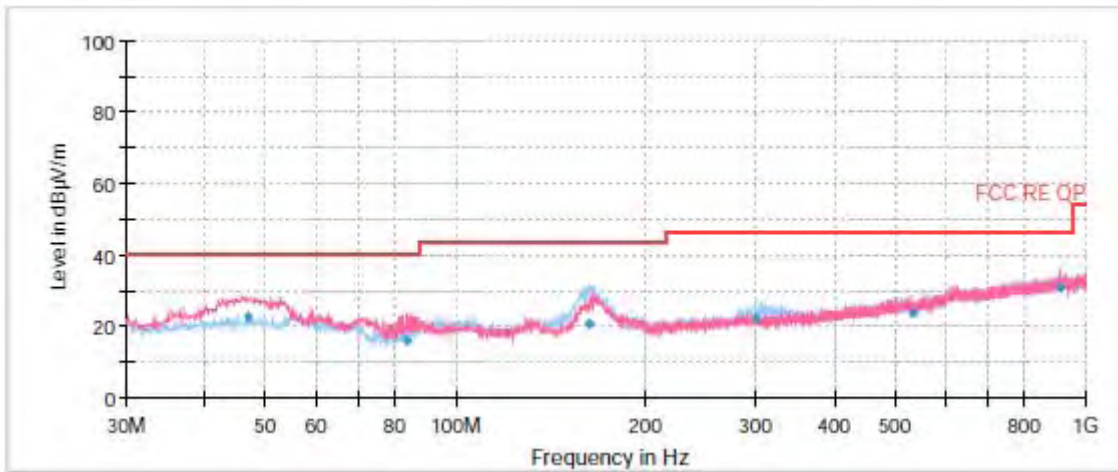


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
46.89	22.82	109.0	V	0.00	14	17.18	40.00
83.67	16.03	100.0	V	248.00	9	23.97	40.00
162.65	20.46	210.0	H	306.00	10	23.04	43.50
299.18	22.24	100.0	H	265.00	15	23.76	46.00
531.77	23.63	100.0	V	265.00	20	22.37	46.00
913.95	30.95	125.0	V	300.00	25	15.05	46.00

- Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)**
2. Margin = Limit – Quasi-Peak


802.11b CH1

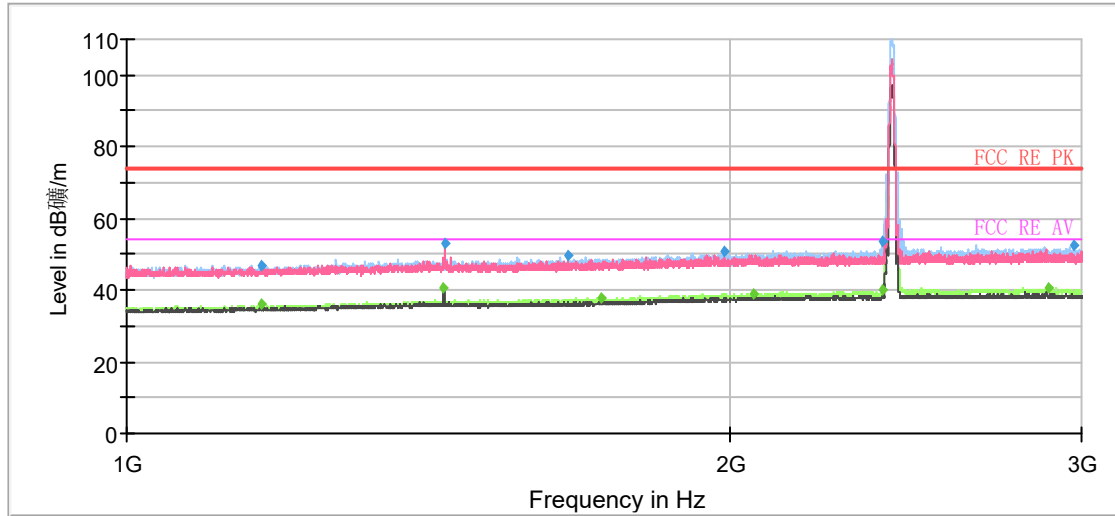

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1167.00	---	35.91	54.00	18.09	500.00	100.0	H	323.00	-9
1168.00	46.84	---	74.00	27.16	500.00	200.0	H	1.00	-9
1440.50	---	40.40	54.00	13.60	500.00	200.0	V	356.00	-7
1441.25	52.91	---	74.00	21.09	500.00	200.0	V	94.00	-7
1661.50	49.48	---	74.00	24.52	500.00	200.0	H	2.00	-6
1724.75	---	37.66	54.00	16.34	500.00	200.0	H	20.00	-6
1990.75	50.92	---	74.00	23.08	500.00	100.0	H	265.00	-5
2055.25	---	39.01	54.00	14.99	500.00	100.0	H	355.00	-5
2387.00	53.86	---	74.00	20.14	500.00	200.0	H	188.00	-4
2387.75	---	40.14	54.00	13.86	500.00	200.0	H	222.00	-4
2886.50	---	40.61	54.00	13.39	500.00	100.0	H	331.00	-3
2971.75	52.24	---	74.00	21.76	500.00	100.0	H	323.00	-3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

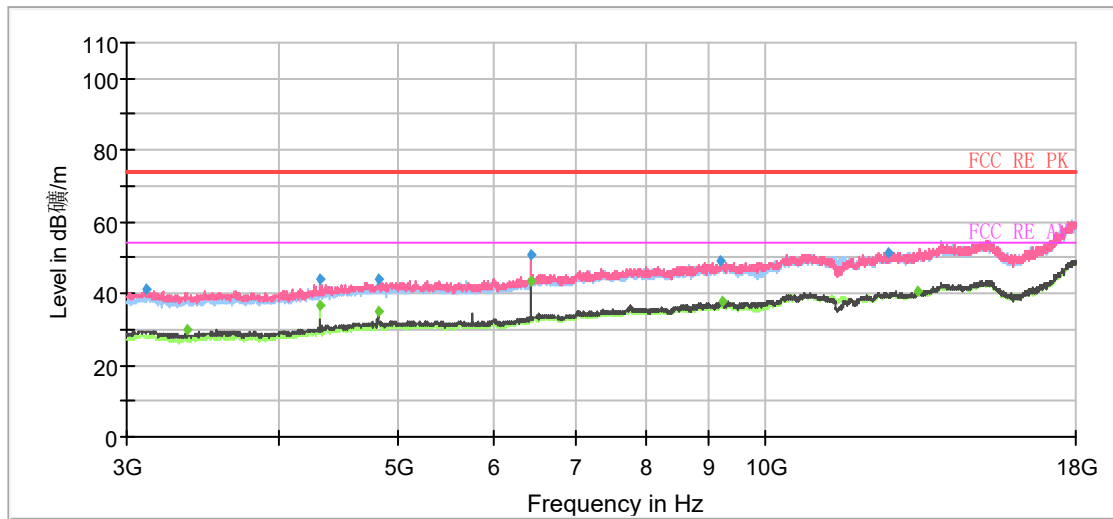


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3112.50	41.37	---	74.00	32.63	500.00	200.0	V	328.00	-13
3360.00	---	29.87	54.00	24.13	500.00	100.0	V	306.00	-13
4321.88	---	36.41	54.00	17.59	500.00	100.0	H	142.00	-10
4321.88	43.97	---	74.00	30.03	500.00	100.0	H	142.00	-10
4822.50	43.79	---	74.00	30.21	500.00	100.0	H	343.00	-9
4824.38	---	35.22	54.00	18.78	500.00	100.0	H	295.00	-9
6431.25	50.56	---	74.00	23.44	500.00	100.0	V	240.00	-5
6431.25	---	43.67	54.00	10.33	500.00	100.0	V	240.00	-5
9211.88	48.88	---	74.00	25.12	500.00	200.0	V	118.00	-2
9232.50	---	37.73	54.00	16.27	500.00	200.0	V	19.00	-2
12646.88	51.57	---	74.00	22.43	500.00	200.0	V	6.00	2
13351.88	---	40.59	54.00	13.41	500.00	100.0	V	249.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11b CH6

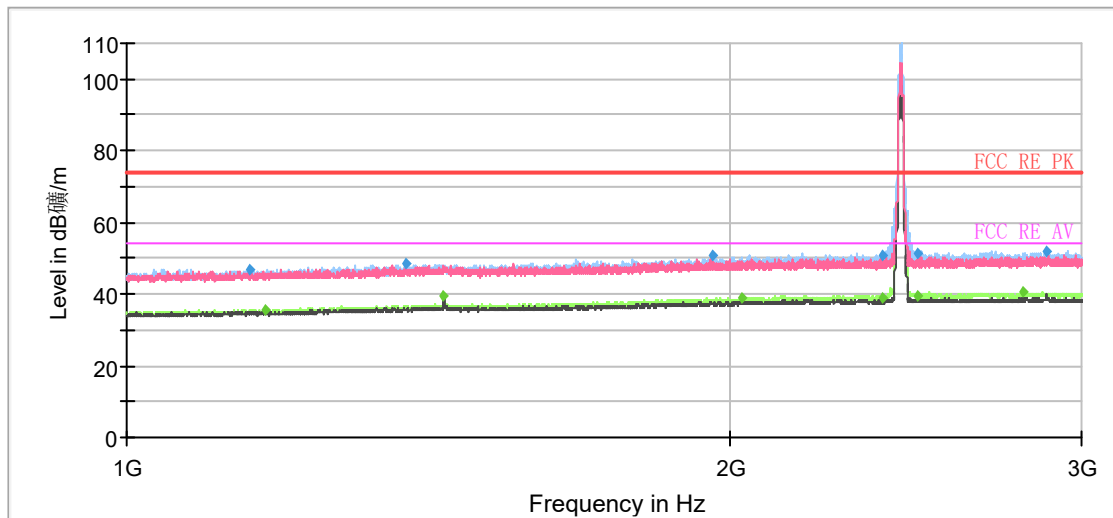


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1152.00	47.05	---	74.00	26.95	500.00	100.0	H	336.00	-9
1172.25	---	35.69	54.00	18.31	500.00	100.0	H	0.00	-9
1380.00	48.48	---	74.00	25.52	500.00	200.0	H	0.00	-7
1440.50	---	39.48	54.00	14.52	500.00	200.0	V	36.00	-7
1963.00	50.92	---	74.00	23.08	500.00	100.0	H	329.00	-5
2027.25	---	38.96	54.00	15.04	500.00	200.0	H	3.00	-5
2387.00	50.75	---	74.00	23.25	500.00	100.0	H	329.00	-4
2388.25	---	39.11	54.00	14.89	500.00	100.0	H	353.00	-4
2485.25	51.26	---	74.00	22.74	500.00	100.0	H	0.00	-4
2485.75	---	39.46	54.00	14.54	500.00	100.0	H	336.00	-4
2805.25	---	40.47	54.00	13.53	500.00	200.0	H	14.00	-3
2881.00	51.81	---	74.00	22.19	500.00	200.0	H	4.00	-3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

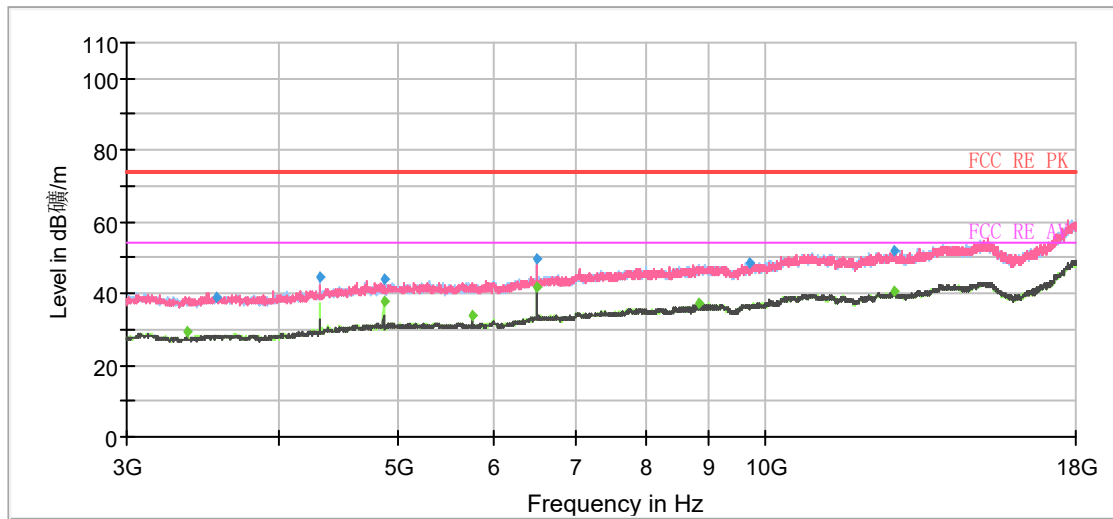


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3360.00	---	29.06	54.00	24.94	500.00	100.0	V	100.00	-13
3549.38	39.16	---	74.00	34.84	500.00	200.0	H	339.00	-13
4321.88	44.74	---	74.00	29.26	500.00	100.0	H	337.00	-10
4873.13	---	37.56	54.00	16.44	500.00	200.0	H	297.00	-9
4873.13	44.24	---	74.00	29.76	500.00	100.0	H	354.00	-9
5761.88	---	33.79	54.00	20.21	500.00	200.0	V	336.00	-7
6498.75	49.44	---	74.00	24.56	500.00	100.0	H	95.00	-4
6498.75	---	41.93	54.00	12.07	500.00	100.0	H	95.00	-4
8846.25	---	37.20	54.00	16.80	500.00	200.0	V	67.00	-3
9735.00	48.55	---	74.00	25.45	500.00	100.0	H	1.00	-2
12755.63	52.06	---	74.00	21.94	500.00	100.0	H	1.00	3
12795.00	---	40.36	54.00	13.64	500.00	100.0	H	140.00	2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11b CH11

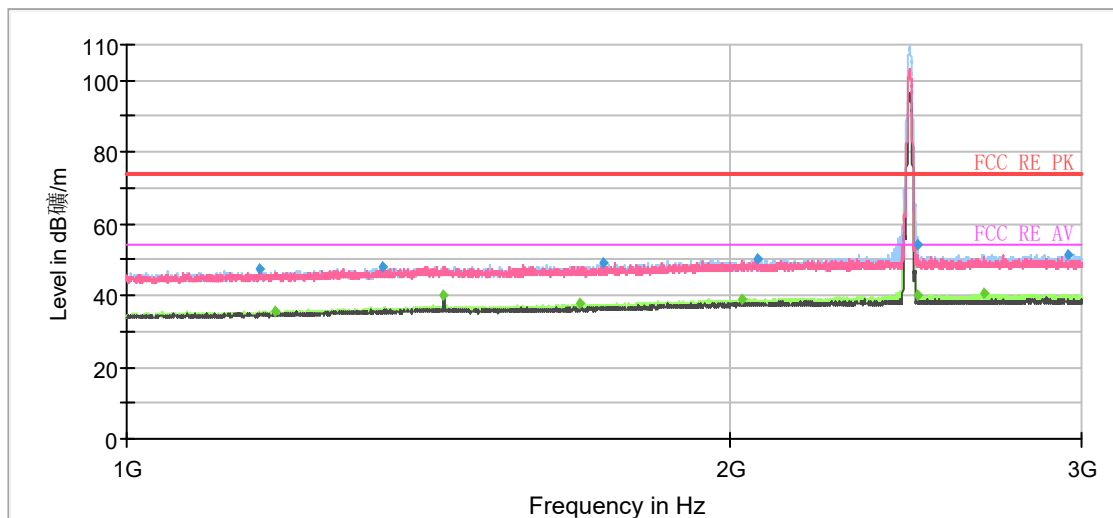


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1166.00	47.16	---	74.00	26.84	500.00	100.0	H	300.00	-9
1187.25	---	35.64	54.00	18.36	500.00	100.0	H	0.00	-9
1341.25	47.99	---	74.00	26.01	500.00	300.0	H	88.00	-7
1440.50	---	40.33	54.00	13.67	500.00	200.0	V	87.00	-7
1682.50	---	37.61	54.00	16.39	500.00	100.0	H	348.00	-6
1731.00	49.07	---	74.00	24.93	500.00	100.0	H	348.00	-6
2030.25	---	39.05	54.00	14.95	500.00	100.0	H	265.00	-5
2068.00	50.15	---	74.00	23.85	500.00	100.0	H	351.00	-5
2484.25	54.02	---	74.00	19.98	500.00	300.0	H	236.00	-4
2485.25	---	39.79	54.00	14.21	500.00	100.0	H	0.00	-4
2678.25	---	40.49	54.00	13.51	500.00	100.0	H	338.00	-3
2952.00	51.51	---	74.00	22.49	500.00	100.0	H	357.00	-3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

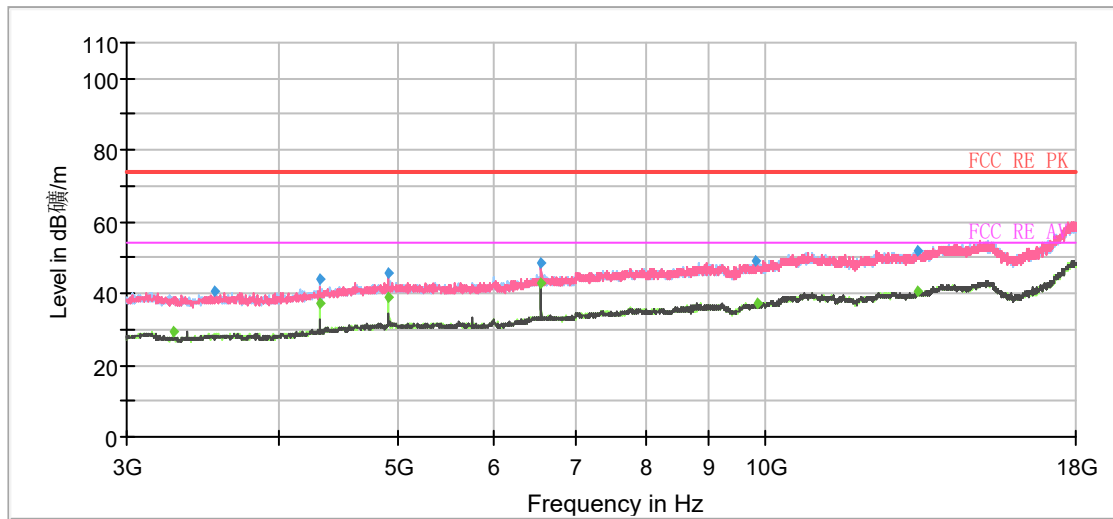


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3281.25	---	29.38	54.00	24.62	500.00	100.0	H	0.00	-13
3547.50	40.56	---	74.00	33.44	500.00	200.0	V	8.00	-13
4320.00	44.15	---	74.00	29.85	500.00	100.0	H	337.00	-10
4321.88	---	37.02	54.00	16.98	500.00	100.0	H	337.00	-10
4923.75	---	39.09	54.00	14.91	500.00	100.0	H	298.00	-8
4923.75	45.47	---	74.00	28.53	500.00	100.0	H	298.00	-8
6564.38	48.76	---	74.00	25.24	500.00	100.0	H	337.00	-4
6564.38	---	42.83	54.00	11.17	500.00	100.0	H	337.00	-4
9840.00	49.27	---	74.00	24.73	500.00	100.0	V	50.00	-1
9881.25	---	37.23	54.00	16.77	500.00	200.0	H	341.00	-1
13336.88	51.65	---	74.00	22.35	500.00	200.0	H	281.00	3
13342.50	---	40.41	54.00	13.59	500.00	200.0	V	210.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH1

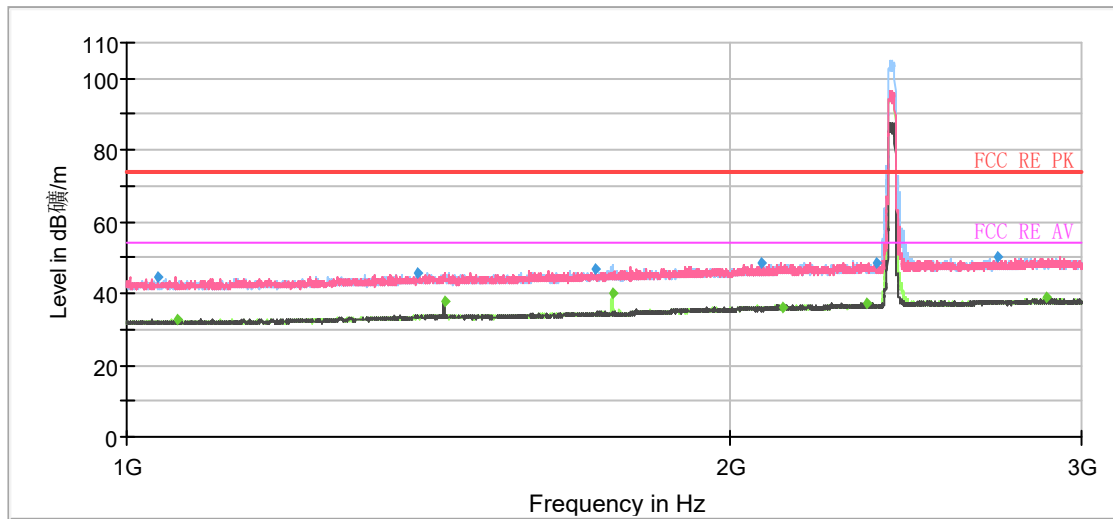


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1036.50	44.75	---	74.00	29.25	500.00	100.0	V	160.00	5
1059.50	---	32.79	54.00	21.21	500.00	100.0	H	159.00	5
1398.75	45.76	---	74.00	28.24	500.00	100.0	V	101.00	7
1440.75	---	37.53	54.00	16.47	500.00	200.0	H	214.00	7
1714.50	46.64	---	74.00	27.36	500.00	200.0	H	19.00	8
1749.25	---	40.25	54.00	13.75	500.00	200.0	H	124.00	8
2076.50	48.44	---	74.00	25.56	500.00	100.0	H	0.00	10
2126.50	---	36.31	54.00	17.69	500.00	200.0	H	0.00	10
2342.50	---	36.97	54.00	17.03	500.00	100.0	H	220.00	11
2369.25	48.24	---	74.00	25.76	500.00	200.0	V	241.00	11
2723.75	50.40	---	74.00	23.60	500.00	100.0	H	320.00	11
2881.00	---	39.19	54.00	14.81	500.00	100.0	V	0.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

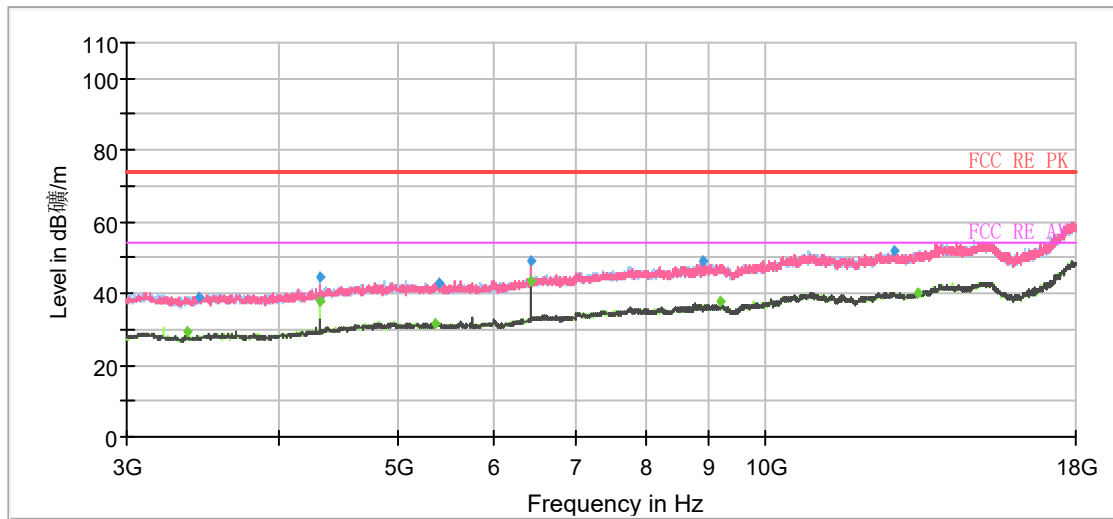


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3360.00	---	29.06	54.00	24.94	500.00	100.0	V	56.00	-13
3444.38	38.79	---	74.00	35.21	500.00	100.0	H	289.00	-13
4321.88	---	37.64	54.00	16.36	500.00	100.0	H	338.00	-10
4321.88	44.69	---	74.00	29.31	500.00	100.0	H	338.00	-10
5375.63	---	31.36	54.00	22.64	500.00	200.0	H	205.00	-7
5420.63	42.64	---	74.00	31.36	500.00	100.0	H	0.00	-7
6431.25	49.24	---	74.00	24.76	500.00	100.0	H	338.00	-5
6431.25	---	43.48	54.00	10.52	500.00	100.0	H	338.00	-5
8913.75	49.34	---	74.00	24.66	500.00	200.0	V	251.00	-3
9217.50	---	37.77	54.00	16.23	500.00	200.0	V	13.00	-2
12787.50	51.90	---	74.00	22.10	500.00	100.0	V	292.00	2
13350.00	---	40.27	54.00	13.73	500.00	100.0	H	166.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH2

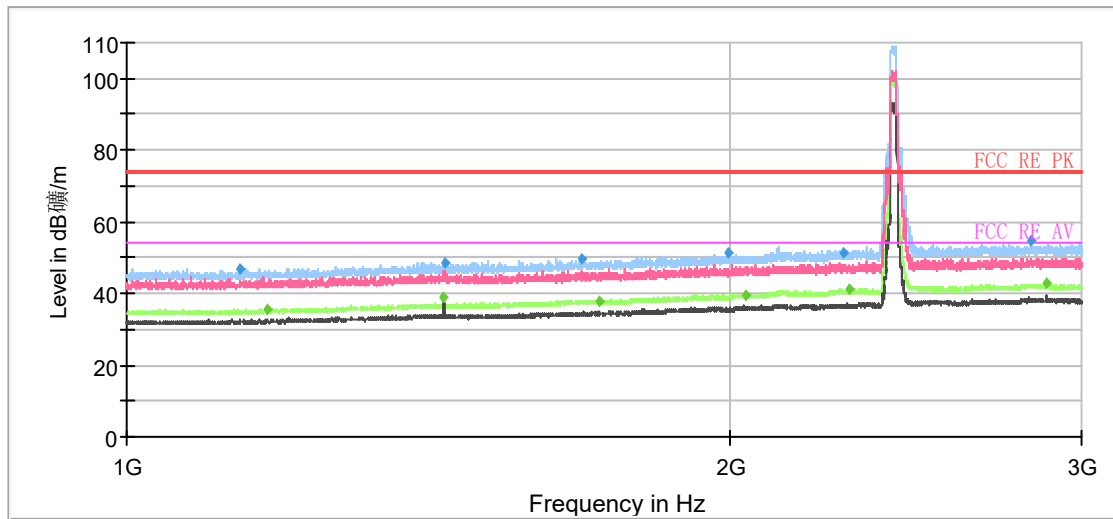


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1138.75	46.85	---	74.00	27.15	500.00	200.0	H	0.00	6
1174.50	---	35.63	54.00	18.37	500.00	200.0	H	305.00	6
1440.50	---	38.69	54.00	15.31	500.00	100.0	H	116.00	7
1441.00	48.44	---	74.00	25.56	500.00	200.0	H	180.00	7
1687.50	49.63	---	74.00	24.37	500.00	200.0	H	297.00	8
1721.25	---	38.04	54.00	15.96	500.00	100.0	H	29.00	8
1998.00	51.25	---	74.00	22.75	500.00	200.0	H	237.00	9
2039.00	---	39.67	54.00	14.33	500.00	100.0	H	6.00	10
2278.25	51.54	---	74.00	22.46	500.00	100.0	H	98.00	10
2297.25	---	40.93	54.00	13.07	500.00	200.0	H	357.00	10
2829.50	54.58	---	74.00	19.42	500.00	100.0	H	124.00	11
2881.50	---	42.90	54.00	11.10	500.00	100.0	H	47.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

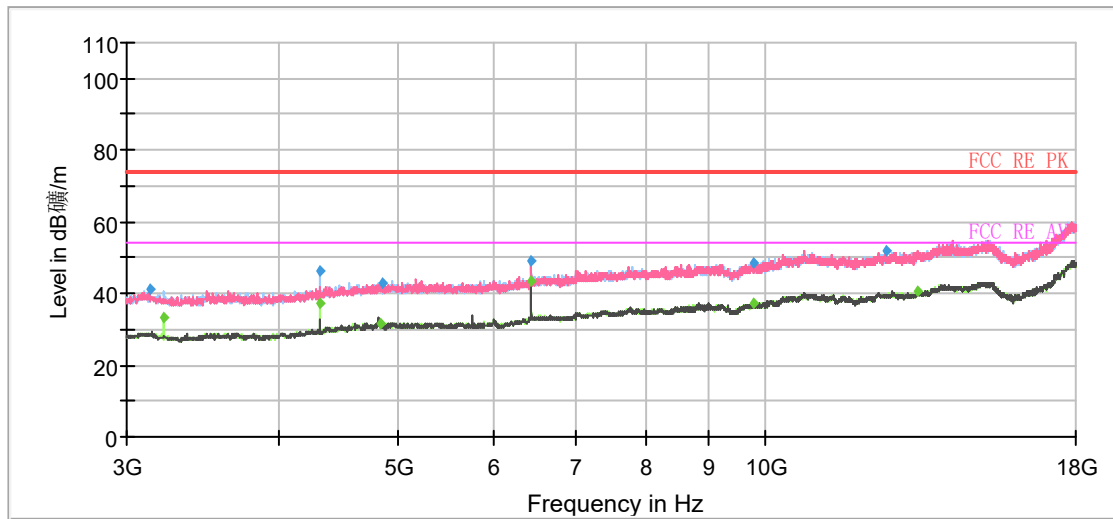


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3131.25	41.12	---	74.00	32.88	500.00	200.0	V	106.00	-13
3221.25	---	33.39	54.00	20.61	500.00	100.0	H	307.00	-13
4321.88	---	37.11	54.00	16.89	500.00	100.0	H	336.00	-10
4321.88	46.16	---	74.00	27.84	500.00	100.0	H	336.00	-10
4846.88	---	31.81	54.00	22.19	500.00	100.0	H	346.00	-9
4865.63	42.65	---	74.00	31.35	500.00	200.0	H	0.00	-9
6444.38	49.19	---	74.00	24.81	500.00	100.0	H	336.00	-5
6444.38	---	43.22	54.00	10.78	500.00	100.0	H	336.00	-5
9781.88	48.76	---	74.00	25.24	500.00	200.0	V	32.00	-2
9787.50	---	37.31	54.00	16.69	500.00	100.0	H	316.00	-2
12566.25	52.06	---	74.00	21.94	500.00	200.0	V	164.00	2
13348.13	---	40.61	54.00	13.39	500.00	200.0	V	79.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH6

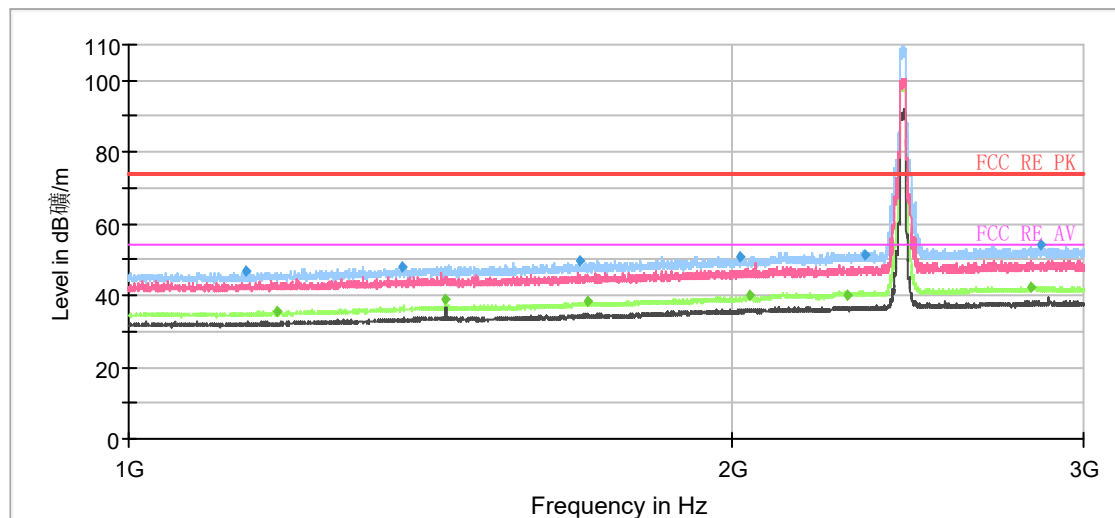


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1144.75	46.92	---	74.00	27.08	500.00	200.0	H	64.00	6
1187.50	---	35.64	54.00	18.36	500.00	200.0	H	24.00	6
1369.25	48.21	---	74.00	25.79	500.00	100.0	H	359.00	7
1440.50	---	38.77	54.00	15.23	500.00	200.0	H	5.00	7
1679.25	49.68	---	74.00	24.32	500.00	200.0	H	14.00	8
1696.50	---	38.13	54.00	15.87	500.00	100.0	H	0.00	8
2021.00	50.83	---	74.00	23.17	500.00	200.0	H	99.00	10
2042.75	---	39.87	54.00	14.13	500.00	100.0	H	356.00	10
2285.00	---	40.33	54.00	13.67	500.00	200.0	H	47.00	10
2330.50	51.13	---	74.00	22.87	500.00	200.0	H	31.00	11
2826.25	---	42.51	54.00	11.49	500.00	200.0	H	150.00	11
2858.50	53.99	---	74.00	20.01	500.00	200.0	H	82.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

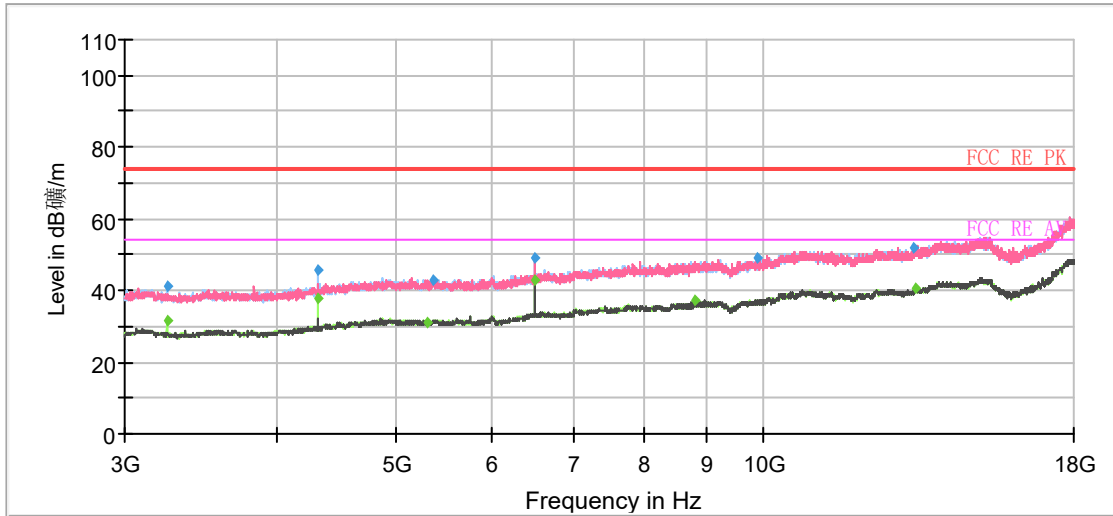


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3247.50	41.34	---	74.00	32.66	500.00	200.0	H	315.00	-13
3249.38	---	31.53	54.00	22.47	500.00	200.0	H	315.00	-13
4321.88	---	37.63	54.00	16.37	500.00	100.0	H	318.00	-10
4321.88	45.57	---	74.00	28.43	500.00	100.0	H	318.00	-10
5315.63	---	31.30	54.00	22.70	500.00	100.0	H	222.00	-8
5366.25	42.63	---	74.00	31.37	500.00	200.0	V	133.00	-7
6498.75	49.08	---	74.00	24.92	500.00	100.0	H	338.00	-4
6498.75	---	42.64	54.00	11.36	500.00	100.0	V	238.00	-4
8814.38	---	37.07	54.00	16.93	500.00	100.0	V	167.00	-3
9898.13	48.95	---	74.00	25.05	500.00	100.0	H	78.00	-1
13323.75	51.77	---	74.00	22.23	500.00	200.0	V	1.00	3
13338.75	---	40.40	54.00	13.60	500.00	200.0	V	12.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH10

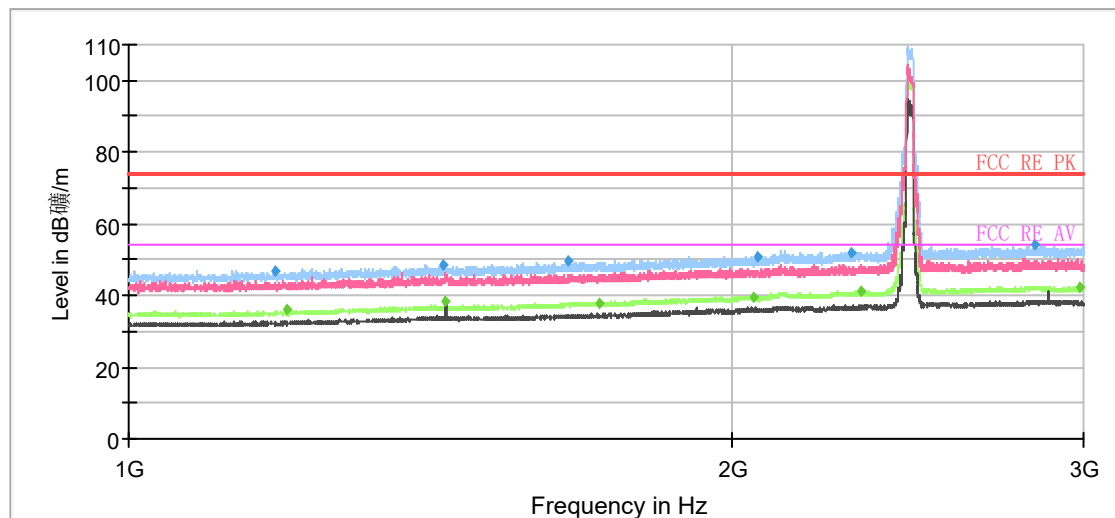


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1184.00	46.95	---	74.00	27.05	500.00	200.0	H	349.00	6
1200.00	---	35.94	54.00	18.06	500.00	200.0	H	258.00	6
1434.75	48.34	---	74.00	25.66	500.00	100.0	H	25.00	7
1440.50	---	38.17	54.00	15.83	500.00	200.0	V	71.00	7
1656.25	49.51	---	74.00	24.49	500.00	100.0	H	99.00	8
1719.75	---	38.06	54.00	15.94	500.00	200.0	H	0.00	8
2050.00	---	39.67	54.00	14.33	500.00	200.0	H	292.00	10
2060.00	50.80	---	74.00	23.20	500.00	200.0	H	353.00	10
2295.75	51.97	---	74.00	22.03	500.00	100.0	H	229.00	10
2320.00	---	41.01	54.00	12.99	500.00	100.0	H	25.00	11
2836.25	53.95	---	74.00	20.05	500.00	200.0	H	346.00	12
2989.00	---	42.48	54.00	11.52	500.00	200.0	H	341.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

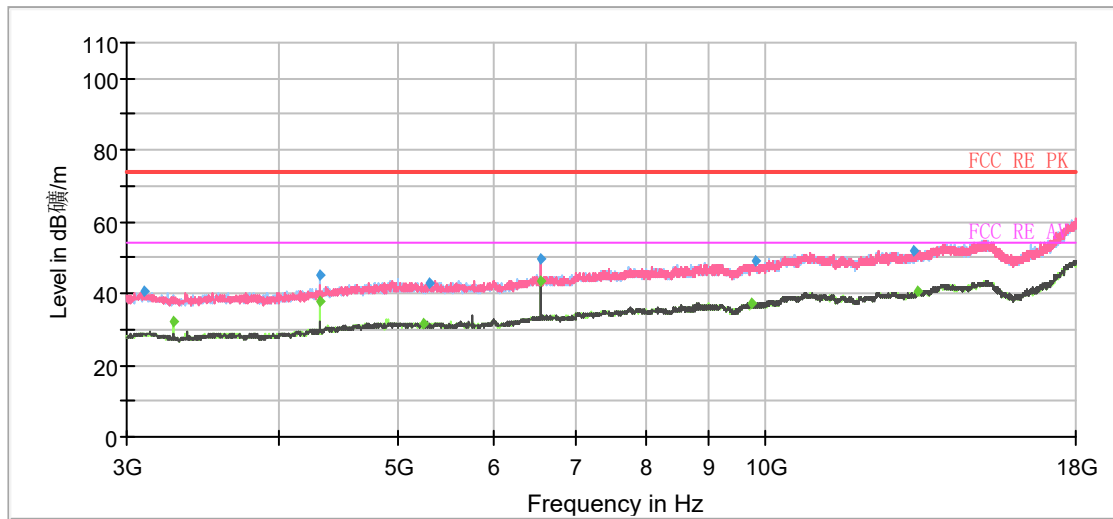


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3097.50	40.56	---	74.00	33.44	500.00	200.0	V	280.00	-13
3275.63	---	31.96	54.00	22.04	500.00	200.0	H	312.00	-13
4321.88	---	37.78	54.00	16.22	500.00	100.0	H	336.00	-10
4321.88	45.00	---	74.00	29.00	500.00	100.0	H	336.00	-10
5255.63	---	31.57	54.00	22.43	500.00	200.0	V	0.00	-8
5311.88	42.62	---	74.00	31.38	500.00	100.0	H	153.00	-8
6551.25	49.47	---	74.00	24.53	500.00	100.0	V	238.00	-4
6551.25	---	43.71	54.00	10.29	500.00	100.0	H	88.00	-4
9770.63	---	37.23	54.00	16.77	500.00	100.0	H	220.00	-2
9819.38	48.84	---	74.00	25.16	500.00	200.0	H	302.00	-1
13241.25	51.65	---	74.00	22.35	500.00	100.0	H	297.00	3
13348.13	---	40.48	54.00	13.52	500.00	100.0	H	125.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH11

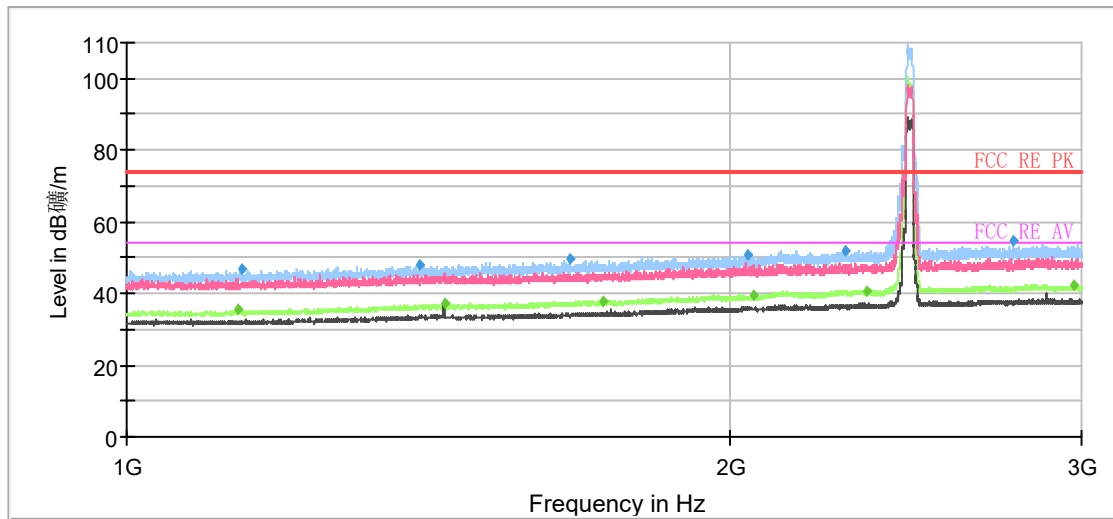


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1136.25	---	35.66	54.00	18.34	500.00	100.0	H	356.00	6
1140.50	46.70	---	74.00	27.30	500.00	100.0	H	336.00	6
1400.50	47.92	---	74.00	26.08	500.00	100.0	H	350.00	7
1440.75	---	36.99	54.00	17.01	500.00	100.0	H	290.00	7
1665.00	49.67	---	74.00	24.33	500.00	100.0	H	347.00	8
1731.50	---	38.04	54.00	15.96	500.00	100.0	H	272.00	8
2041.25	50.61	---	74.00	23.39	500.00	100.0	H	355.00	10
2056.75	---	39.61	54.00	14.39	500.00	100.0	H	353.00	10
2283.50	51.96	---	74.00	22.04	500.00	100.0	H	0.00	10
2342.50	---	40.44	54.00	13.56	500.00	100.0	H	350.00	11
2773.00	54.69	---	74.00	19.31	500.00	100.0	H	0.00	11
2972.75	---	42.38	54.00	11.62	500.00	100.0	H	290.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

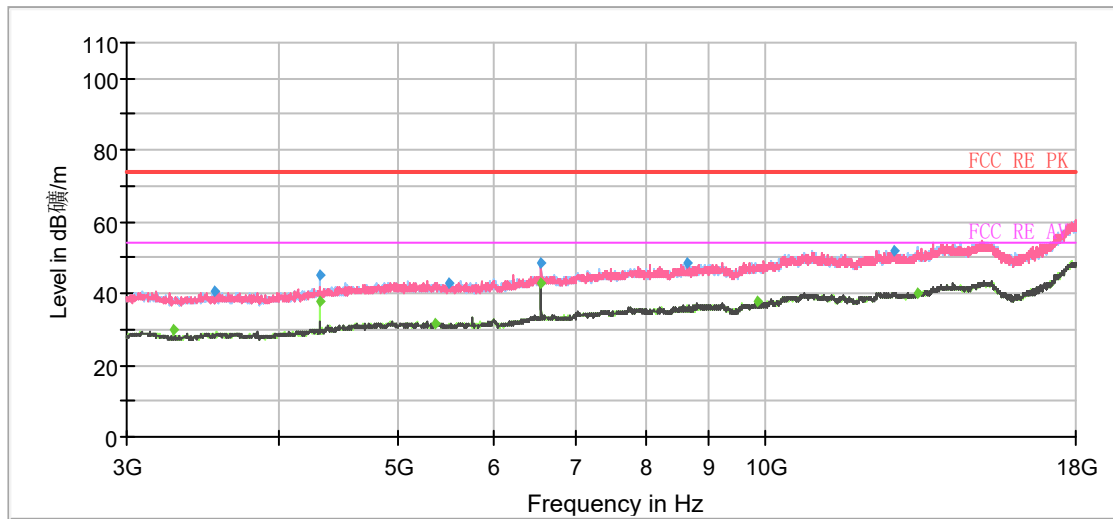


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3281.25	---	29.98	54.00	24.02	500.00	100.0	H	318.00	-13
3536.25	40.43	---	74.00	33.57	500.00	200.0	H	357.00	-13
4321.88	---	37.97	54.00	16.03	500.00	100.0	H	328.00	-10
4321.88	45.09	---	74.00	28.91	500.00	100.0	H	328.00	-10
5373.75	---	31.31	54.00	22.69	500.00	100.0	H	194.00	-7
5506.88	42.73	---	74.00	31.28	500.00	200.0	V	0.00	-7
6564.38	48.66	---	74.00	25.34	500.00	100.0	H	328.00	-4
6564.38	---	42.78	54.00	11.22	500.00	100.0	H	328.00	-4
8653.13	48.77	---	74.00	25.23	500.00	200.0	H	335.00	-3
9881.25	---	37.60	54.00	16.40	500.00	200.0	H	82.00	-1
12791.25	52.03	---	74.00	21.97	500.00	200.0	V	50.00	2
13335.00	---	40.32	54.00	13.68	500.00	100.0	V	359.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH1

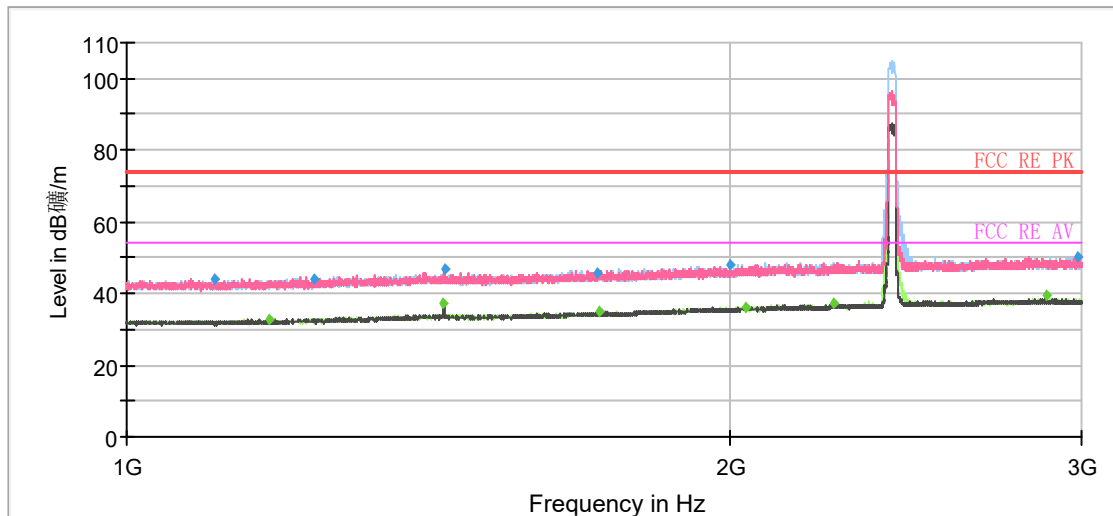


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1107.00	43.99	---	74.00	30.01	500.00	100.0	V	165.00	5
1177.00	---	32.60	54.00	21.40	500.00	200.0	V	136.00	6
1241.25	44.20	---	74.00	29.80	500.00	100.0	V	0.00	6
1440.50	---	37.25	54.00	16.75	500.00	200.0	H	225.00	7
1440.75	47.07	---	74.00	26.93	500.00	200.0	V	195.00	7
1718.50	45.44	---	74.00	28.56	500.00	200.0	H	336.00	8
1723.75	---	34.83	54.00	19.17	500.00	100.0	H	3.00	8
2001.00	48.19	---	74.00	25.81	500.00	100.0	V	314.00	9
2038.00	---	36.23	54.00	17.77	500.00	200.0	V	177.00	10
2253.25	---	37.02	54.00	16.98	500.00	100.0	H	32.00	11
2881.25	---	39.57	54.00	14.43	500.00	100.0	V	273.00	12
2985.25	50.27	---	74.00	23.73	500.00	200.0	V	70.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

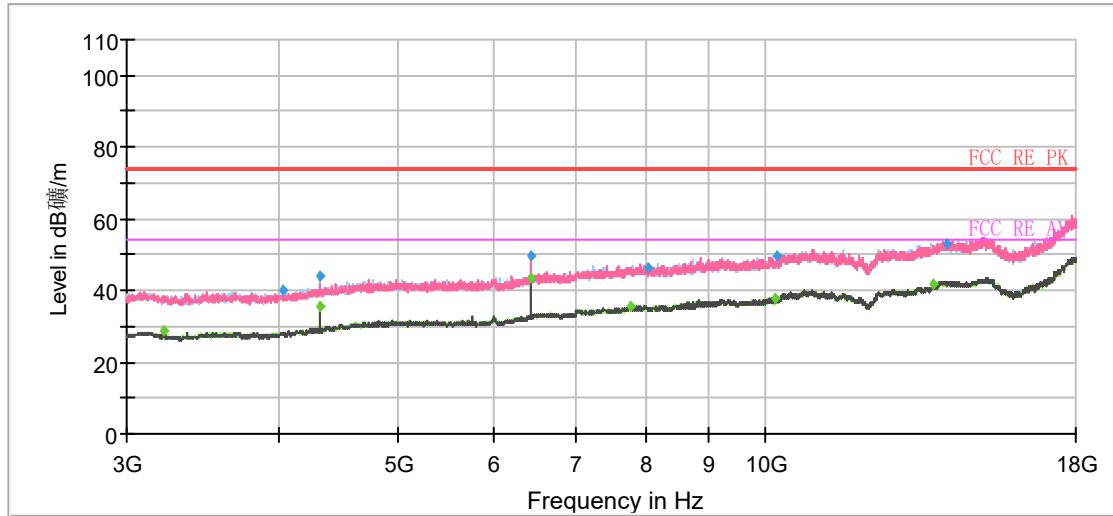


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3215.63	---	28.74	54.00	25.26	500.00	100.0	H	324.00	-13
4027.50	39.85	---	74.00	34.15	500.00	100.0	H	221.00	-11
4321.88	---	35.28	54.00	18.72	500.00	100.0	H	358.00	-10
4321.88	43.82	---	74.00	30.18	500.00	100.0	H	358.00	-10
6431.25	49.55	---	74.00	24.45	500.00	100.0	V	243.00	-5
6431.25	---	43.57	54.00	10.43	500.00	100.0	V	243.00	-5
7773.75	---	35.42	54.00	18.58	500.00	200.0	V	276.00	-3
8025.00	46.31	---	74.00	27.69	500.00	100.0	V	131.00	-3
10218.75	---	37.67	54.00	16.33	500.00	100.0	H	357.00	-1
10224.38	49.41	---	74.00	24.59	500.00	200.0	V	33.00	-1
13764.38	---	41.79	54.00	12.21	500.00	200.0	V	163.00	4
14126.25	53.25	---	74.00	20.75	500.00	200.0	H	4.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH2

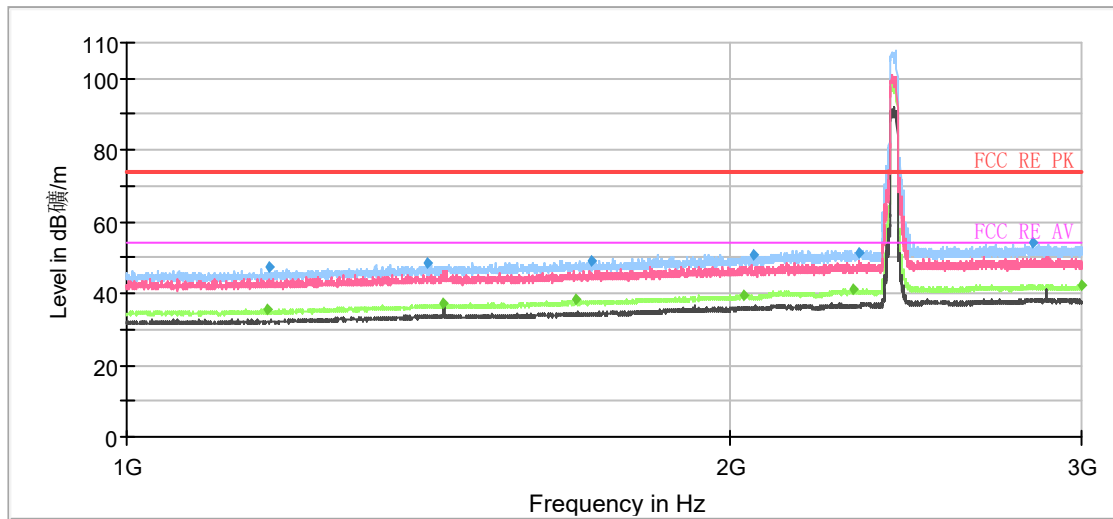


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1174.75	---	35.54	54.00	18.46	500.00	100.0	H	160.00	6
1178.00	47.56	---	74.00	26.44	500.00	100.0	H	6.00	6
1412.25	48.45	---	74.00	25.55	500.00	100.0	H	101.00	7
1440.50	---	37.31	54.00	16.69	500.00	200.0	V	93.00	7
1677.75	---	38.11	54.00	15.89	500.00	100.0	H	126.00	8
1707.50	49.21	---	74.00	24.79	500.00	100.0	H	160.00	8
2035.75	---	39.55	54.00	14.45	500.00	100.0	H	101.00	10
2057.50	50.90	---	74.00	23.10	500.00	100.0	H	5.00	10
2308.25	---	40.94	54.00	13.06	500.00	100.0	H	39.00	10
2320.00	51.50	---	74.00	22.50	500.00	100.0	H	101.00	11
2835.75	54.01	---	74.00	19.99	500.00	100.0	H	10.00	12
2998.50	---	42.38	54.00	11.62	500.00	100.0	H	0.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

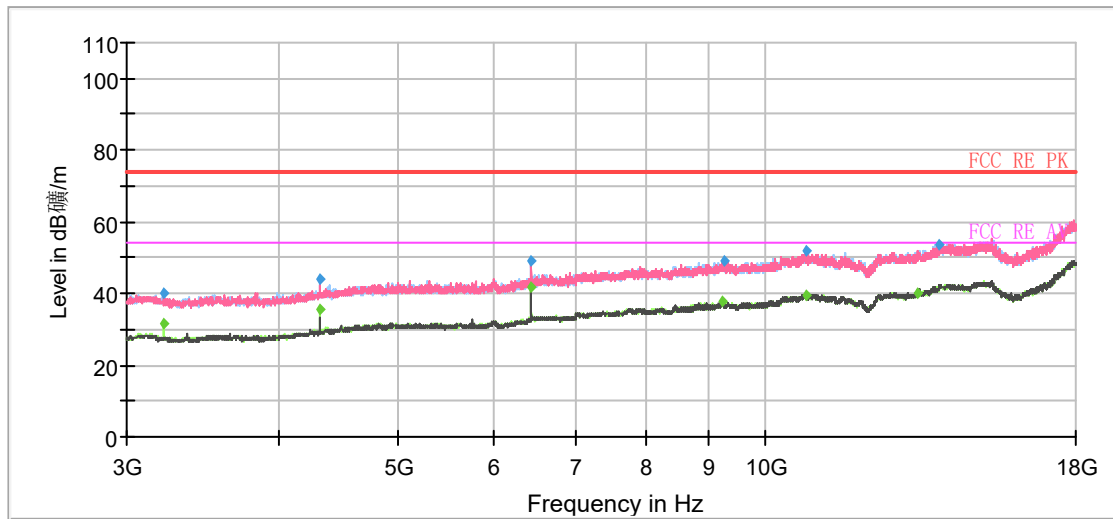


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3221.25	---	31.48	54.00	22.52	500.00	200.0	H	319.00	-13
3221.25	40.06	---	74.00	33.94	500.00	200.0	H	319.00	-13
4320.00	44.25	---	74.00	29.75	500.00	100.0	H	0.00	-10
4321.88	---	35.73	54.00	18.27	500.00	100.0	H	358.00	-10
6444.38	48.99	---	74.00	25.01	500.00	100.0	V	308.00	-5
6444.38	---	41.78	54.00	12.22	500.00	100.0	V	308.00	-5
9230.63	---	37.62	54.00	16.38	500.00	100.0	V	113.00	-2
9270.00	49.11	---	74.00	24.89	500.00	100.0	H	325.00	-2
10813.13	---	39.37	54.00	14.63	500.00	200.0	V	236.00	0
10815.00	51.84	---	74.00	22.16	500.00	100.0	V	337.00	0
13348.13	---	40.32	54.00	13.68	500.00	100.0	V	104.00	3
13925.63	53.63	---	74.00	20.37	500.00	200.0	V	351.00	4

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH6

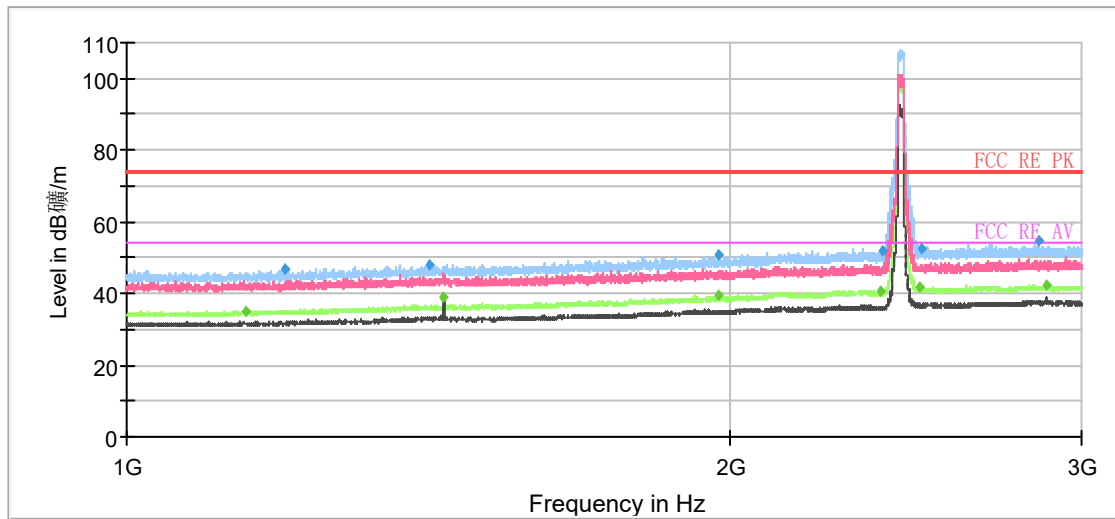


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1147.00	---	35.08	54.00	18.92	500.00	100.0	H	12.00	6
1200.50	46.61	---	74.00	27.39	500.00	100.0	H	37.00	6
1417.75	47.83	---	74.00	26.17	500.00	100.0	H	17.00	7
1440.50	---	38.83	54.00	15.17	500.00	100.0	H	1.00	7
1975.50	---	39.37	54.00	14.63	500.00	100.0	H	0.00	9
1977.50	50.69	---	74.00	23.31	500.00	100.0	H	198.00	9
2378.75	---	40.73	54.00	13.27	500.00	100.0	H	6.00	11
2384.25	51.65	---	74.00	22.35	500.00	100.0	H	128.00	11
2490.75	---	41.60	54.00	12.40	500.00	100.0	H	87.00	11
2496.00	52.74	---	74.00	21.26	500.00	100.0	H	12.00	11
2855.00	54.58	---	74.00	19.42	500.00	100.0	H	206.00	12
2881.50	---	42.33	54.00	11.67	500.00	100.0	H	53.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

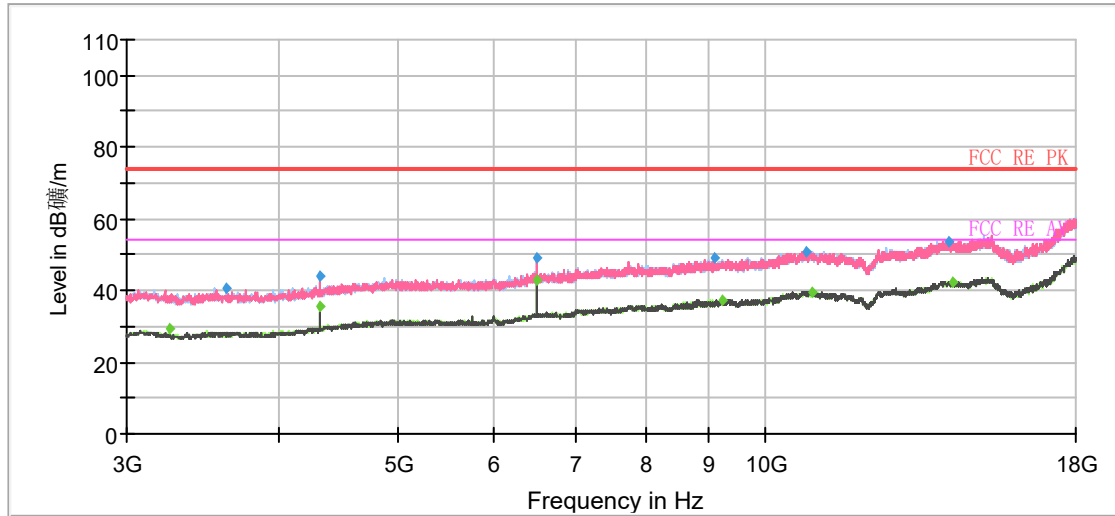


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3249.38	---	29.31	54.00	24.69	500.00	100.0	H	335.00	-13
3616.88	40.45	---	74.00	33.55	500.00	100.0	H	299.00	-13
4321.88	---	35.80	54.00	18.20	500.00	100.0	H	354.00	-10
4321.88	44.17	---	74.00	29.83	500.00	100.0	H	354.00	-10
6498.75	---	42.94	54.00	11.06	500.00	100.0	V	301.00	-4
6498.75	49.27	---	74.00	24.73	500.00	100.0	V	301.00	-4
9101.25	49.05	---	74.00	24.95	500.00	100.0	V	212.00	-2
9223.13	---	37.40	54.00	16.60	500.00	200.0	V	355.00	-2
10805.63	51.02	---	74.00	22.98	500.00	100.0	H	354.00	0
10959.38	---	39.46	54.00	14.54	500.00	100.0	H	327.00	0
14173.13	53.84	---	74.00	20.16	500.00	200.0	V	333.00	5
14287.50	---	42.55	54.00	11.45	500.00	100.0	H	42.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH10

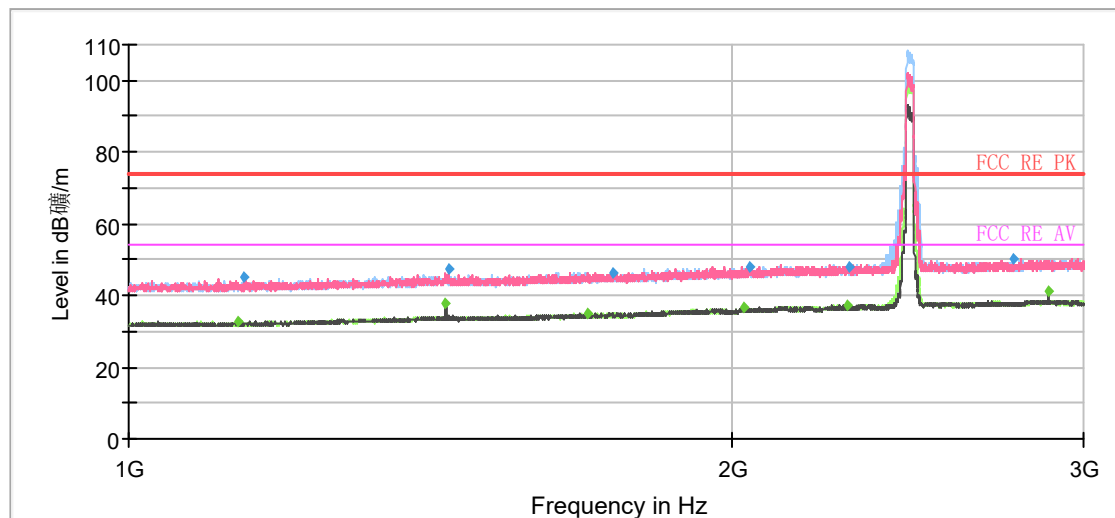


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1135.25	---	32.71	54.00	21.29	500.00	200.0	V	288.00	6
1141.75	44.99	---	74.00	29.01	500.00	100.0	H	150.00	6
1440.50	---	37.52	54.00	16.48	500.00	200.0	V	34.00	7
1444.50	47.26	---	74.00	26.74	500.00	100.0	V	199.00	7
1696.25	---	34.88	54.00	19.12	500.00	200.0	H	0.00	8
1747.00	46.41	---	74.00	27.59	500.00	200.0	H	12.00	8
2028.50	---	36.68	54.00	17.32	500.00	200.0	H	324.00	10
2041.00	48.08	---	74.00	25.92	500.00	100.0	H	209.00	10
2285.25	---	37.32	54.00	16.68	500.00	200.0	H	343.00	10
2288.75	48.13	---	74.00	25.87	500.00	100.0	H	26.00	10
2765.50	50.35	---	74.00	23.65	500.00	200.0	H	0.00	11
2881.50	---	40.91	54.00	13.09	500.00	100.0	V	70.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

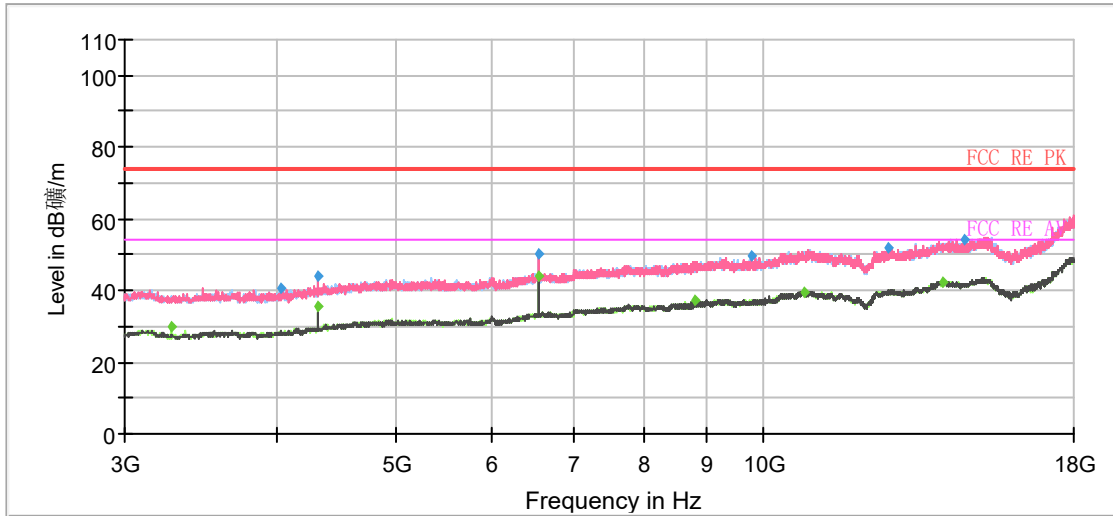


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3275.63	---	29.81	54.00	24.19	500.00	100.0	H	309.00	-13
4031.25	40.47	---	74.00	33.53	500.00	200.0	V	236.00	-11
4320.00	44.12	---	74.00	29.88	500.00	100.0	H	0.00	-10
4321.88	---	35.76	54.00	18.24	500.00	100.0	H	318.00	-10
6551.25	50.02	---	74.00	23.98	500.00	100.0	V	328.00	-4
6551.25	---	44.12	54.00	9.88	500.00	100.0	V	328.00	-4
8814.38	---	37.41	54.00	16.59	500.00	100.0	H	357.00	-3
9789.38	49.72	---	74.00	24.28	500.00	100.0	H	13.00	-2
10811.25	---	39.45	54.00	14.55	500.00	200.0	H	108.00	0
12669.38	51.66	---	74.00	22.34	500.00	100.0	V	35.00	2
14055.00	---	42.10	54.00	11.90	500.00	200.0	H	194.00	5
14621.25	53.94	---	74.00	20.06	500.00	100.0	H	81.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT20) CH11

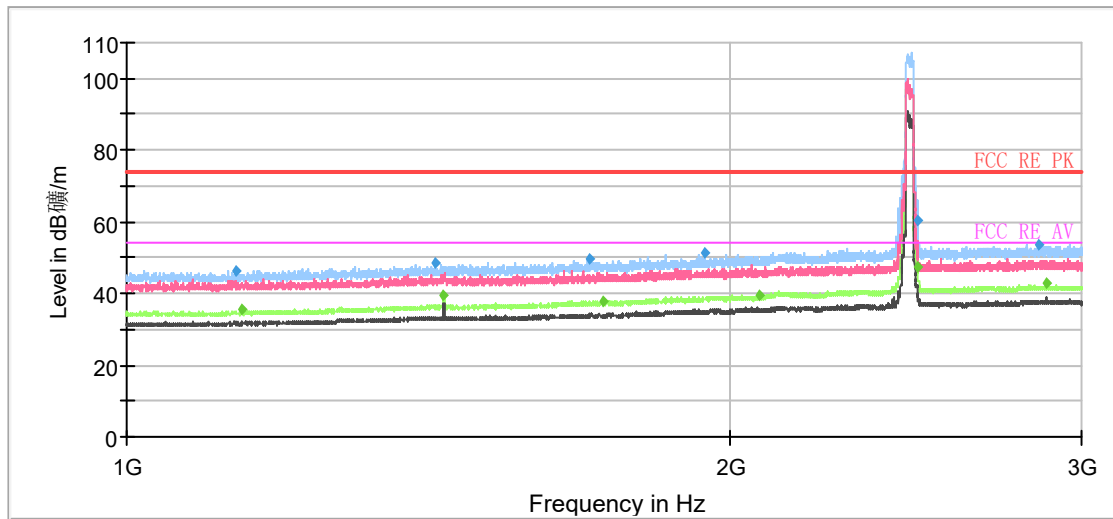


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1135.00	46.35	---	74.00	27.65	500.00	100.0	H	180.00	6
1141.25	---	35.39	54.00	18.61	500.00	100.0	H	34.00	6
1426.75	48.67	---	74.00	25.33	500.00	100.0	H	0.00	7
1440.50	---	39.61	54.00	14.39	500.00	100.0	H	4.00	7
1705.00	49.84	---	74.00	24.16	500.00	100.0	H	4.00	8
1730.75	---	37.94	54.00	16.06	500.00	100.0	H	20.00	8
1944.25	51.12	---	74.00	22.88	500.00	100.0	H	51.00	9
2072.00	---	39.33	54.00	14.67	500.00	100.0	H	189.00	10
2484.00	---	47.18	54.00	6.82	500.00	100.0	H	180.00	11
2484.50	60.57	---	74.00	13.43	500.00	100.0	H	197.00	11
2852.50	53.69	---	74.00	20.31	500.00	100.0	H	146.00	12
2881.25	---	42.69	54.00	11.31	500.00	100.0	H	51.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

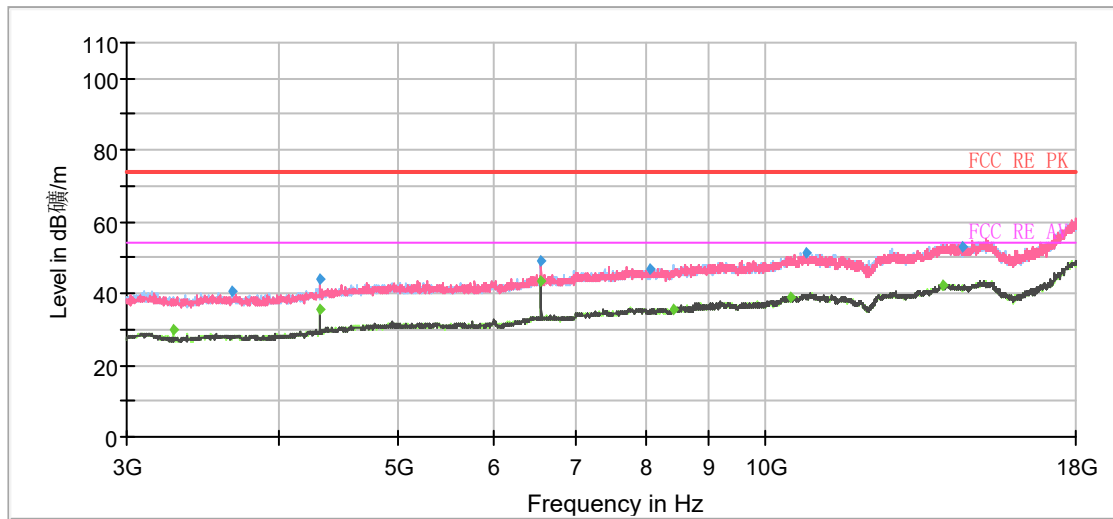


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3281.25	---	29.62	54.00	24.38	500.00	100.0	H	355.00	-13
3658.13	40.69	---	74.00	33.31	500.00	100.0	H	192.00	-12
4321.88	---	35.68	54.00	18.32	500.00	100.0	H	355.00	-10
4321.88	43.76	---	74.00	30.24	500.00	100.0	H	355.00	-10
6564.38	---	43.29	54.00	10.71	500.00	100.0	V	327.00	-4
6564.38	49.28	---	74.00	24.72	500.00	100.0	V	327.00	-4
8070.00	46.66	---	74.00	27.34	500.00	200.0	H	320.00	-3
8413.13	---	35.79	54.00	18.21	500.00	100.0	H	332.00	-3
10513.13	---	38.87	54.00	15.13	500.00	200.0	V	356.00	0
10839.38	51.59	---	74.00	22.41	500.00	100.0	H	249.00	0
13987.50	---	42.14	54.00	11.86	500.00	100.0	H	0.00	5
14544.38	53.29	---	74.00	20.71	500.00	100.0	H	359.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH3

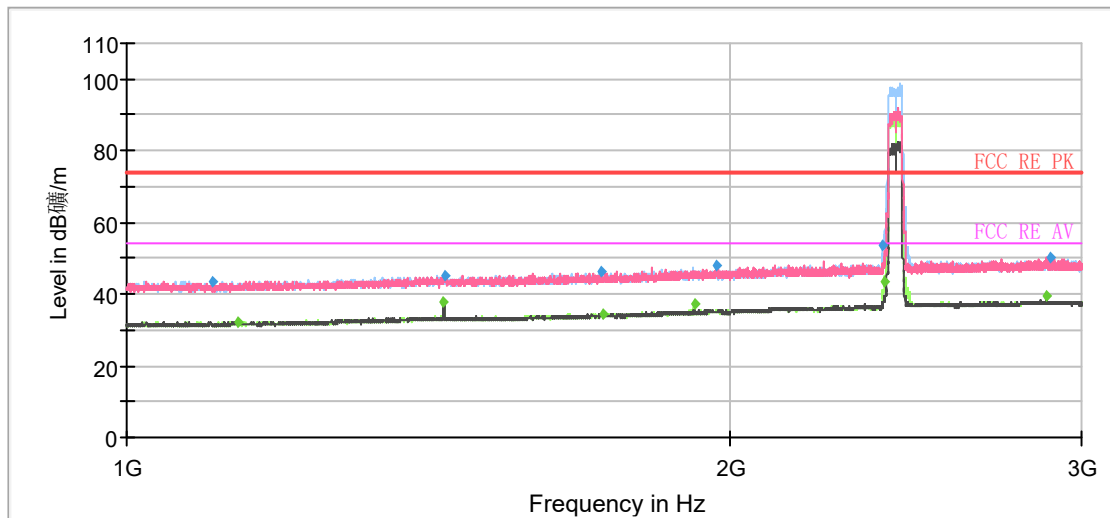

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1102.75	43.71	---	74.00	30.29	500.00	100.0	H	5.00	5
1137.75	---	32.28	54.00	21.72	500.00	200.0	H	0.00	6
1440.50	---	38.02	54.00	15.98	500.00	100.0	H	7.00	7
1440.75	45.23	---	74.00	28.77	500.00	100.0	H	5.00	7
1727.75	46.25	---	74.00	27.75	500.00	200.0	V	171.00	8
1728.25	---	34.50	54.00	19.50	500.00	200.0	V	87.00	8
1920.75	---	37.03	54.00	16.97	500.00	100.0	H	7.00	9
1970.75	47.70	---	74.00	26.30	500.00	200.0	V	29.00	9
2387.50	53.74	---	74.00	20.26	500.00	100.0	H	281.00	11
2389.50	---	43.30	54.00	10.70	500.00	200.0	H	227.00	11
2881.25	---	39.36	54.00	14.64	500.00	100.0	V	156.00	12
2892.50	50.02	---	74.00	23.98	500.00	200.0	H	202.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

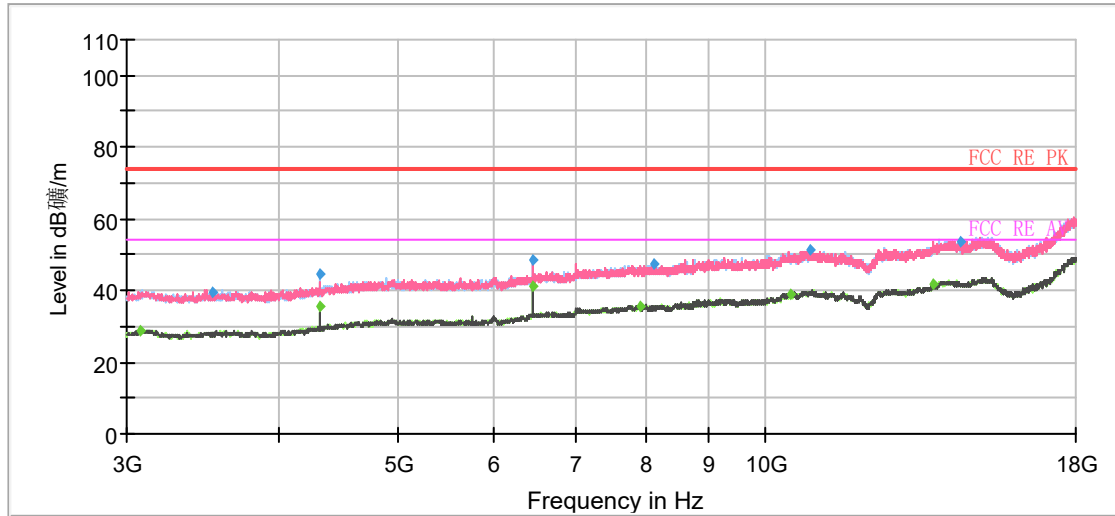


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3080.63	---	28.94	54.00	25.06	500.00	100.0	H	277.00	-13
3534.38	39.56	---	74.00	34.44	500.00	100.0	H	51.00	-13
4321.88	---	35.79	54.00	18.21	500.00	100.0	H	314.00	-10
4321.88	44.70	---	74.00	29.30	500.00	100.0	H	314.00	-10
6457.50	48.31	---	74.00	25.69	500.00	100.0	H	80.00	-4
6457.50	---	41.27	54.00	12.73	500.00	100.0	H	80.00	-4
7906.88	---	35.30	54.00	18.70	500.00	200.0	H	0.00	-3
8130.00	47.49	---	74.00	26.51	500.00	100.0	V	210.00	-3
10526.25	---	38.97	54.00	15.03	500.00	200.0	V	33.00	0
10912.50	51.57	---	74.00	22.43	500.00	100.0	H	353.00	0
13755.00	---	41.79	54.00	12.21	500.00	200.0	V	304.00	4
14467.50	53.67	---	74.00	20.33	500.00	100.0	H	220.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH4

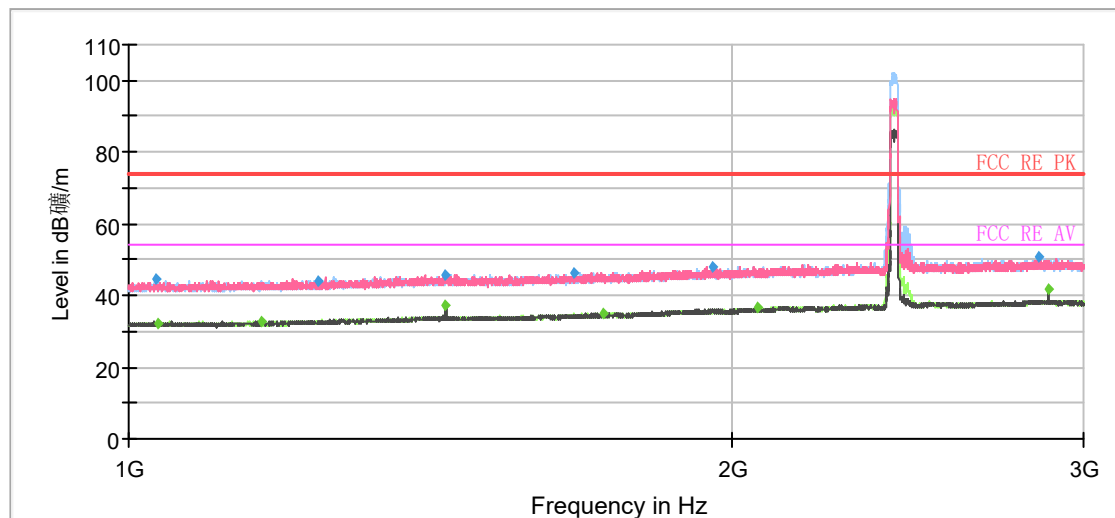


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1031.50	44.45	---	74.00	29.55	500.00	200.0	H	235.00	5
1034.75	---	32.05	54.00	21.95	500.00	100.0	V	228.00	5
1165.75	---	32.79	54.00	21.21	500.00	100.0	V	353.00	6
1243.00	44.13	---	74.00	29.87	500.00	100.0	V	0.00	6
1440.50	---	37.33	54.00	16.67	500.00	200.0	V	91.00	7
1440.50	45.75	---	74.00	28.25	500.00	100.0	V	220.00	7
1670.50	46.42	---	74.00	27.58	500.00	100.0	V	0.00	8
1725.25	---	34.90	54.00	19.10	500.00	200.0	V	75.00	8
1956.25	48.21	---	74.00	25.79	500.00	100.0	V	0.00	9
2063.50	---	36.41	54.00	17.59	500.00	100.0	H	6.00	10
2850.25	50.59	---	74.00	23.41	500.00	200.0	V	58.00	12
2881.50	---	41.65	54.00	12.35	500.00	100.0	V	64.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

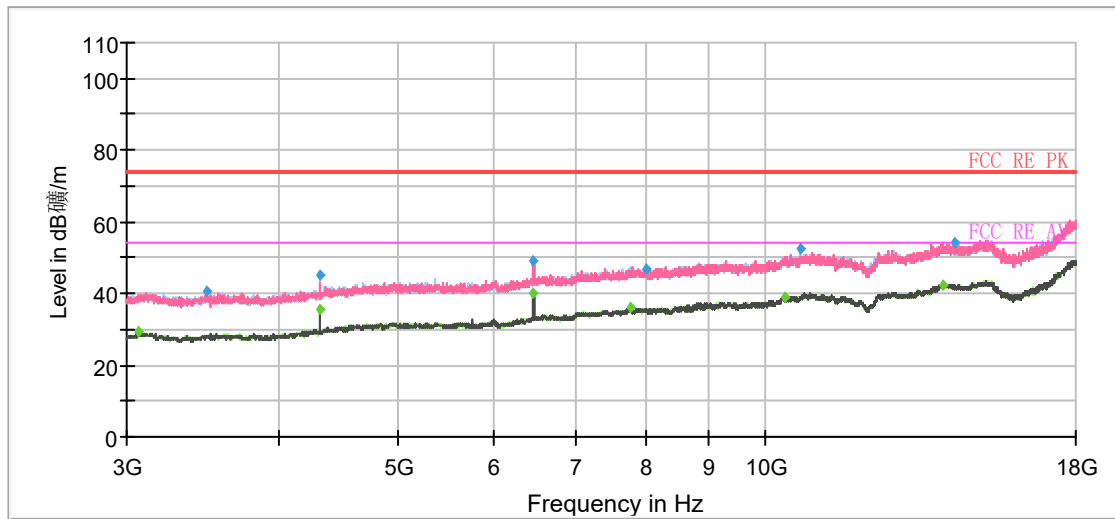


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3065.63	---	29.19	54.00	24.81	500.00	200.0	V	272.00	-13
3483.75	40.34	---	74.00	33.66	500.00	200.0	V	0.00	-13
4321.88	---	35.63	54.00	18.37	500.00	100.0	H	306.00	-10
4321.88	45.37	---	74.00	28.63	500.00	100.0	H	306.00	-10
6470.63	48.92	---	74.00	25.08	500.00	100.0	V	299.00	-4
6470.63	---	40.03	54.00	13.97	500.00	100.0	V	299.00	-4
7777.50	---	35.92	54.00	18.08	500.00	100.0	H	353.00	-3
7987.50	47.02	---	74.00	26.98	500.00	200.0	H	10.00	-2
10400.63	---	38.94	54.00	15.06	500.00	100.0	V	148.00	-1
10715.63	52.24	---	74.00	21.76	500.00	200.0	H	33.00	0
13996.88	---	42.18	54.00	11.82	500.00	100.0	H	0.00	5
14336.25	53.92	---	74.00	20.08	500.00	100.0	V	22.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH6

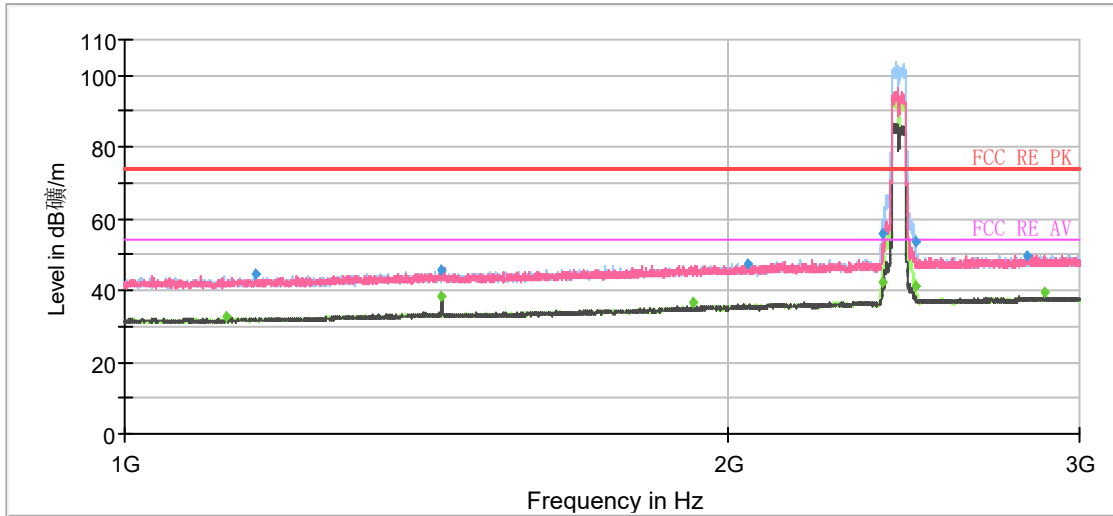


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.50	---	32.70	54.00	21.30	500.00	200.0	V	0.00	6
1161.50	44.48	---	74.00	29.52	500.00	100.0	H	232.00	6
1440.50	---	38.47	54.00	15.53	500.00	100.0	H	3.00	7
1440.50	45.82	---	74.00	28.18	500.00	100.0	H	3.00	7
1920.75	---	36.71	54.00	17.29	500.00	100.0	H	141.00	9
2048.25	47.59	---	74.00	26.41	500.00	200.0	V	89.00	10
2389.50	---	42.49	54.00	11.51	500.00	200.0	H	281.00	11
2389.75	55.84	---	74.00	18.16	500.00	200.0	H	290.00	11
2484.25	---	41.36	54.00	12.64	500.00	100.0	H	241.00	11
2485.00	53.62	---	74.00	20.38	500.00	100.0	H	241.00	11
2826.00	49.86	---	74.00	24.14	500.00	100.0	V	356.00	11
2881.50	---	39.44	54.00	14.56	500.00	100.0	H	125.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

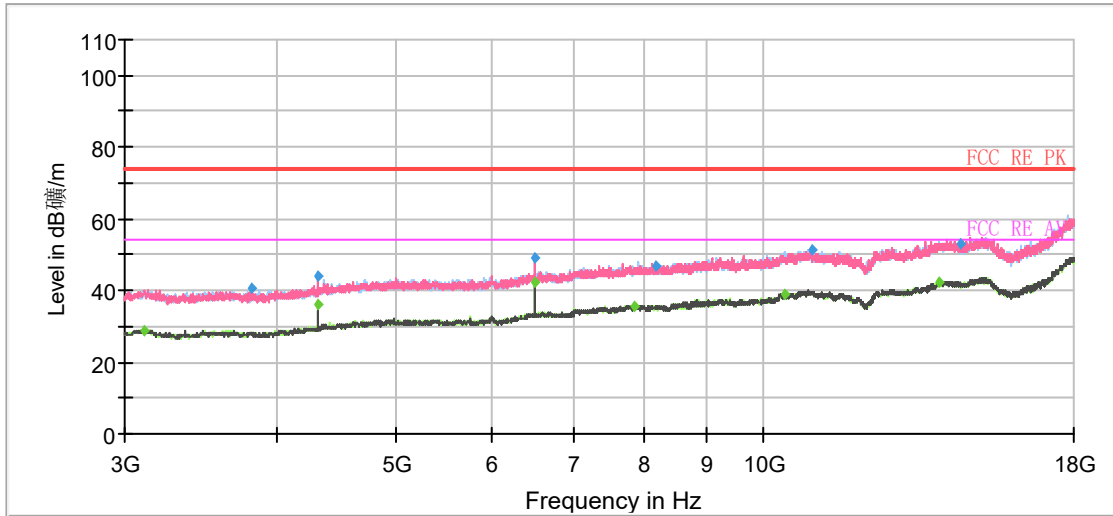


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3114.38	---	29.00	54.00	25.00	500.00	100.0	H	94.00	-13
3817.50	40.42	---	74.00	33.58	500.00	200.0	V	0.00	-12
4321.88	---	35.84	54.00	18.16	500.00	100.0	H	302.00	-10
4321.88	43.84	---	74.00	30.16	500.00	100.0	H	302.00	-10
6498.75	49.34	---	74.00	24.66	500.00	100.0	H	321.00	-4
6498.75	---	42.55	54.00	11.45	500.00	100.0	V	242.00	-4
7843.13	---	35.42	54.00	18.58	500.00	100.0	H	122.00	-3
8175.00	47.04	---	74.00	26.96	500.00	200.0	V	358.00	-3
10445.63	---	39.14	54.00	14.86	500.00	100.0	H	358.00	-1
10978.13	51.22	---	74.00	22.78	500.00	200.0	V	232.00	0
13963.13	---	42.07	54.00	11.93	500.00	100.0	H	274.00	5
14559.38	53.30	---	74.00	20.70	500.00	100.0	H	284.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH8

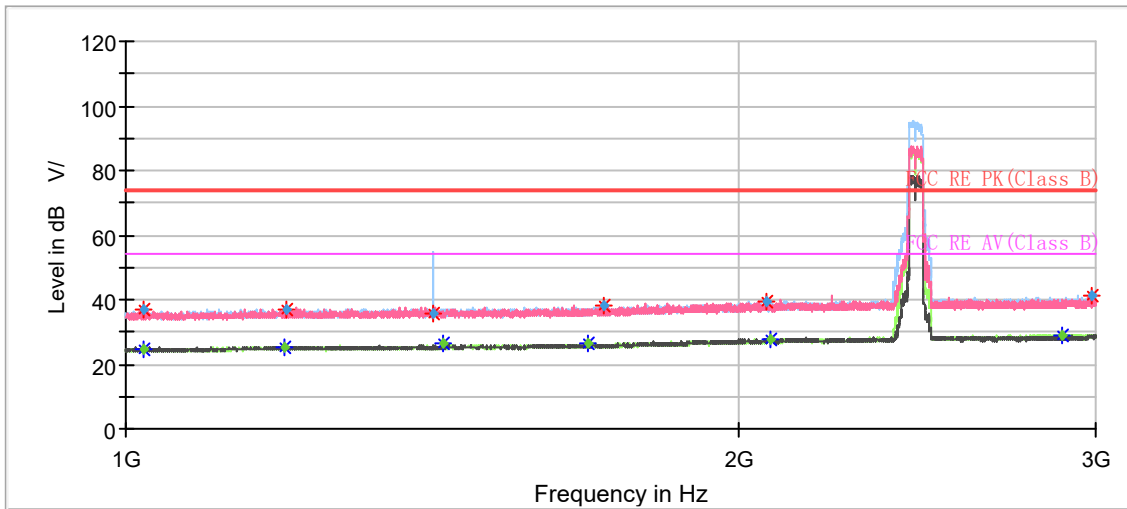


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1020.25	36.98	---	74.00	37.02	500.00	200.0	V	339.00	0
1021.50	---	24.71	54.00	29.29	500.00	200.0	H	5.00	0
1196.50	---	25.52	54.00	28.48	500.00	100.0	H	197.00	1
1198.75	36.80	---	74.00	37.20	500.00	100.0	H	291.00	1
1415.25	35.85	---	74.00	38.15	500.00	200.0	H	271.00	2
1432.00	---	26.17	54.00	27.83	500.00	100.0	H	169.00	2
1687.75	---	26.34	54.00	27.66	500.00	100.0	V	0.00	3
1718.00	38.24	---	74.00	35.76	500.00	100.0	V	47.00	3
2067.50	39.31	---	74.00	34.69	500.00	200.0	V	320.00	4
2073.25	---	27.65	54.00	26.35	500.00	200.0	V	299.00	4
2885.25	---	29.00	54.00	25.00	500.00	200.0	H	57.00	6
2985.75	40.94	---	74.00	33.06	500.00	200.0	H	0.00	6

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

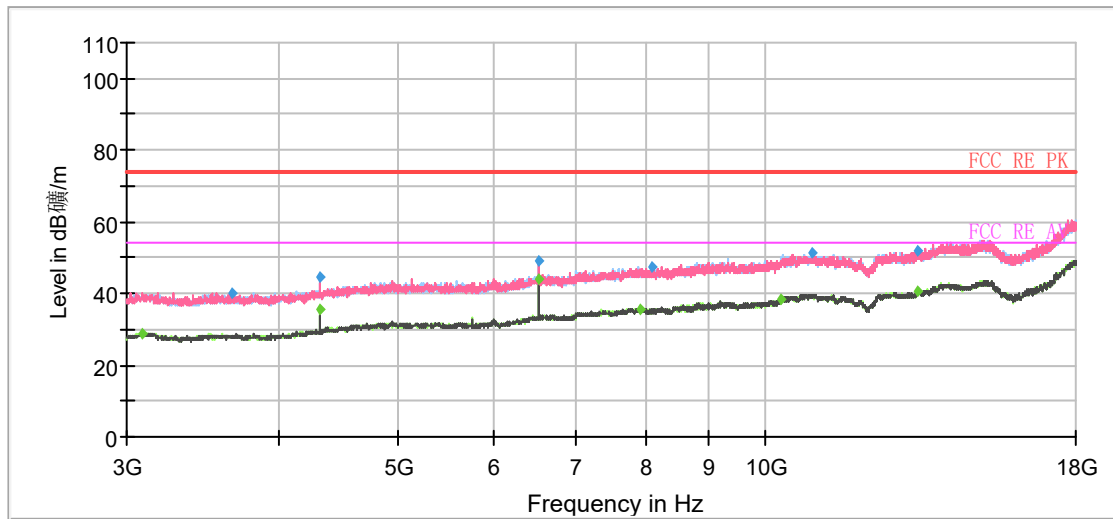


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3086.25	---	28.93	54.00	25.07	500.00	100.0	H	356.00	-13
3663.75	40.25	---	74.00	33.75	500.00	200.0	H	101.00	-12
4321.88	---	35.73	54.00	18.27	500.00	100.0	H	0.00	-10
4321.88	44.39	---	74.00	29.61	500.00	100.0	H	0.00	-10
6525.00	49.24	---	74.00	24.76	500.00	100.0	V	328.00	-4
6525.00	---	44.22	54.00	9.78	500.00	100.0	V	328.00	-4
7905.00	---	35.36	54.00	18.64	500.00	200.0	H	193.00	-3
8101.88	47.63	---	74.00	26.37	500.00	200.0	H	15.00	-3
10316.25	---	38.41	54.00	15.59	500.00	200.0	H	21.00	0
10931.25	51.13	---	74.00	22.87	500.00	200.0	V	146.00	0
13338.75	51.75	---	74.00	22.25	500.00	200.0	H	157.00	3
13344.38	---	40.65	54.00	13.35	500.00	100.0	H	356.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH9

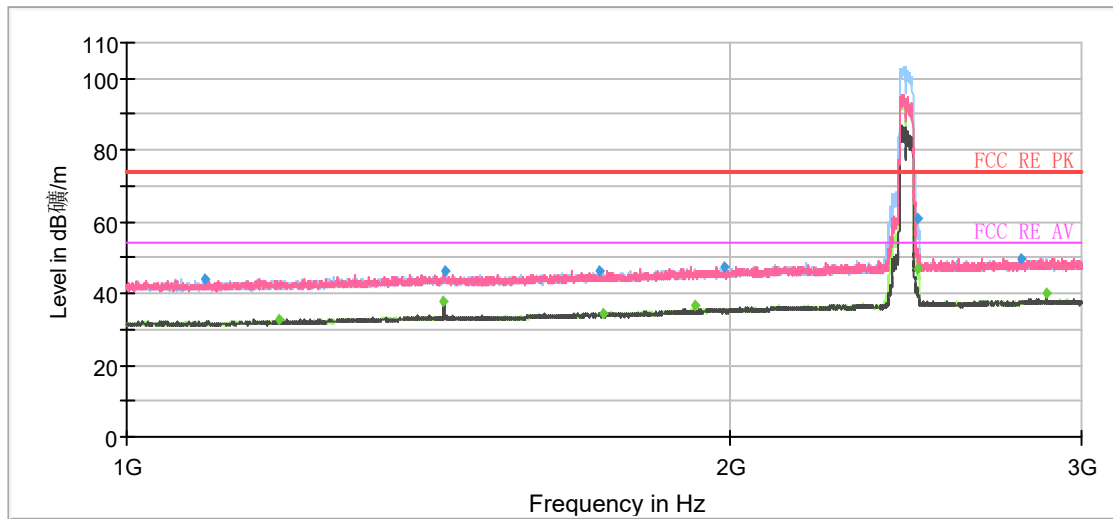


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1094.25	44.23	---	74.00	29.77	500.00	100.0	V	0.00	5
1191.00	---	32.76	54.00	21.24	500.00	200.0	H	299.00	6
1440.50	---	37.93	54.00	16.07	500.00	100.0	H	5.00	7
1441.25	46.00	---	74.00	28.00	500.00	200.0	H	157.00	7
1723.75	46.23	---	74.00	27.77	500.00	200.0	V	184.00	8
1730.25	---	34.67	54.00	19.33	500.00	100.0	V	308.00	8
1921.00	---	36.72	54.00	17.28	500.00	100.0	H	2.00	9
1990.50	47.56	---	74.00	26.44	500.00	200.0	H	338.00	9
2484.50	---	46.59	54.00	7.41	500.00	100.0	H	280.00	11
2485.75	60.67	---	74.00	13.33	500.00	200.0	H	241.00	11
2801.00	49.90	---	74.00	24.10	500.00	200.0	V	50.00	11
2881.25	---	40.15	54.00	13.85	500.00	200.0	H	0.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

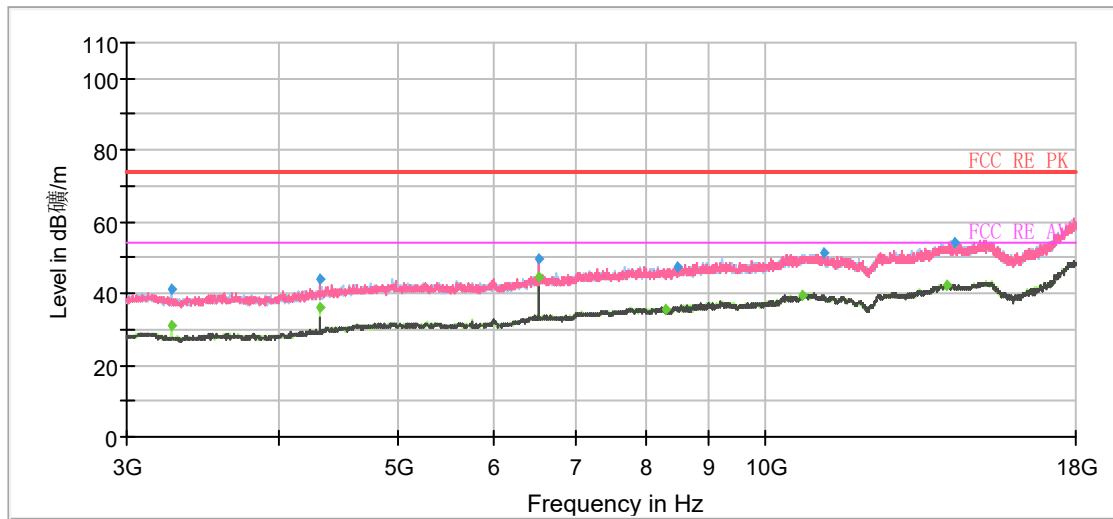


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3268.13	---	30.81	54.00	23.19	500.00	100.0	H	300.00	-13
3268.13	41.41	---	74.00	32.59	500.00	200.0	H	318.00	-13
4321.88	---	36.00	54.00	18.00	500.00	100.0	H	0.00	-10
4321.88	44.09	---	74.00	29.91	500.00	100.0	H	0.00	-10
6538.13	49.52	---	74.00	24.48	500.00	100.0	V	328.00	-4
6538.13	---	44.64	54.00	9.36	500.00	100.0	V	328.00	-4
8311.88	---	35.81	54.00	18.19	500.00	200.0	H	186.00	-3
8476.88	47.47	---	74.00	26.53	500.00	100.0	H	309.00	-2
10741.88	---	39.38	54.00	14.62	500.00	100.0	V	81.00	0
11173.13	51.16	---	74.00	22.84	500.00	100.0	H	203.00	1
14088.75	---	42.44	54.00	11.56	500.00	100.0	V	101.00	5
14317.50	54.18	---	74.00	19.82	500.00	100.0	H	213.00	5

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



Bluetooth LE-Channel 0

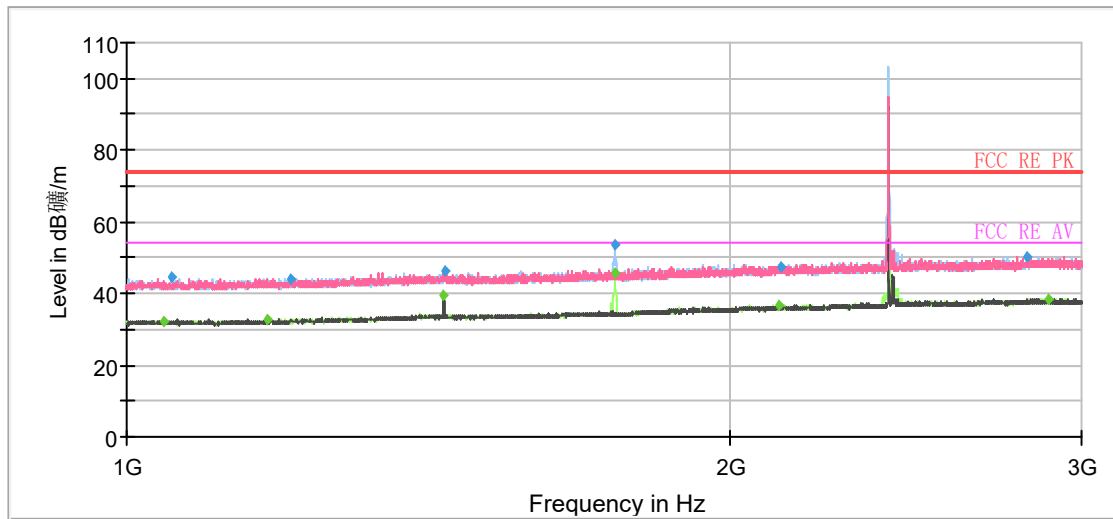


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1042.50	---	32.07	54.00	21.93	500.00	200.0	H	205.00	5
1052.75	44.62	---	74.00	29.38	500.00	200.0	H	240.00	5
1176.75	---	32.63	54.00	21.37	500.00	100.0	V	1.00	6
1206.75	43.87	---	74.00	30.13	500.00	200.0	H	160.00	6
1440.50	---	39.76	54.00	14.24	500.00	100.0	H	39.00	7
1440.75	46.25	---	74.00	27.75	500.00	100.0	H	39.00	7
1755.00	53.82	---	74.00	20.18	500.00	200.0	H	103.00	8
1755.25	---	45.79	54.00	8.21	500.00	200.0	H	103.00	8
2117.25	---	36.45	54.00	17.55	500.00	200.0	H	274.00	10
2124.00	47.54	---	74.00	26.46	500.00	200.0	V	276.00	10
2818.00	50.30	---	74.00	23.70	500.00	200.0	V	342.00	11
2886.00	---	38.63	54.00	15.37	500.00	100.0	H	212.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

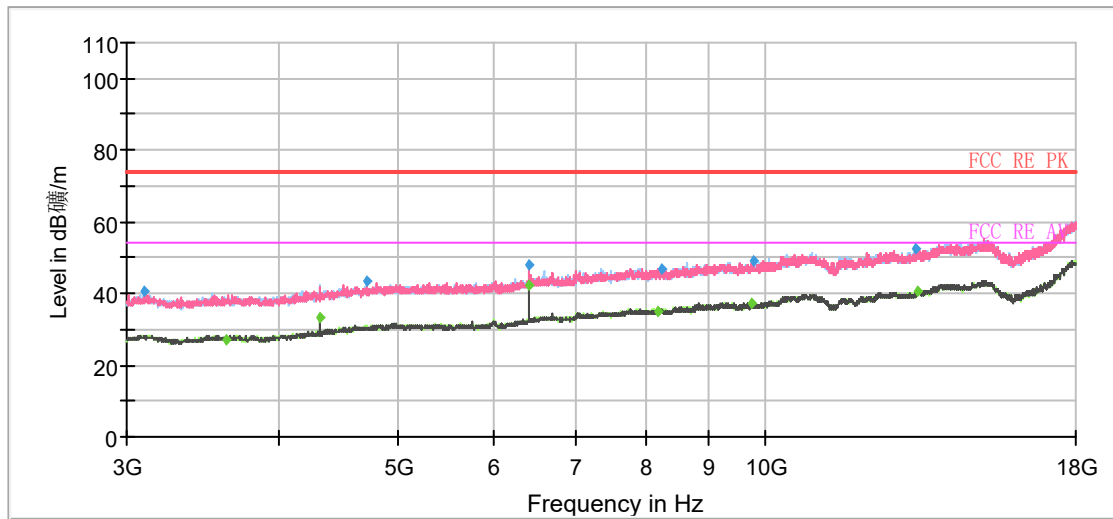


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3095.63	40.37	---	74.00	33.63	500.00	100.0	H	256.00	-13
3626.25	---	27.30	54.00	26.70	500.00	100.0	H	134.00	-13
4321.88	---	33.23	54.00	20.77	500.00	100.0	H	164.00	-10
4715.63	43.58	---	74.00	30.42	500.00	100.0	H	204.00	-9
6405.00	47.81	---	74.00	26.19	500.00	100.0	V	244.00	-5
6405.00	---	42.11	54.00	11.89	500.00	100.0	V	244.00	-5
8190.00	---	35.11	54.00	18.89	500.00	200.0	H	177.00	-3
8235.00	46.70	---	74.00	27.30	500.00	200.0	V	47.00	-3
9761.25	---	37.44	54.00	16.56	500.00	100.0	V	353.00	-2
9804.38	49.30	---	74.00	24.70	500.00	200.0	V	121.00	-1
13323.75	52.24	---	74.00	21.76	500.00	200.0	V	98.00	3
13351.88	---	40.41	54.00	13.59	500.00	100.0	H	316.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



Bluetooth LE-Channel 19

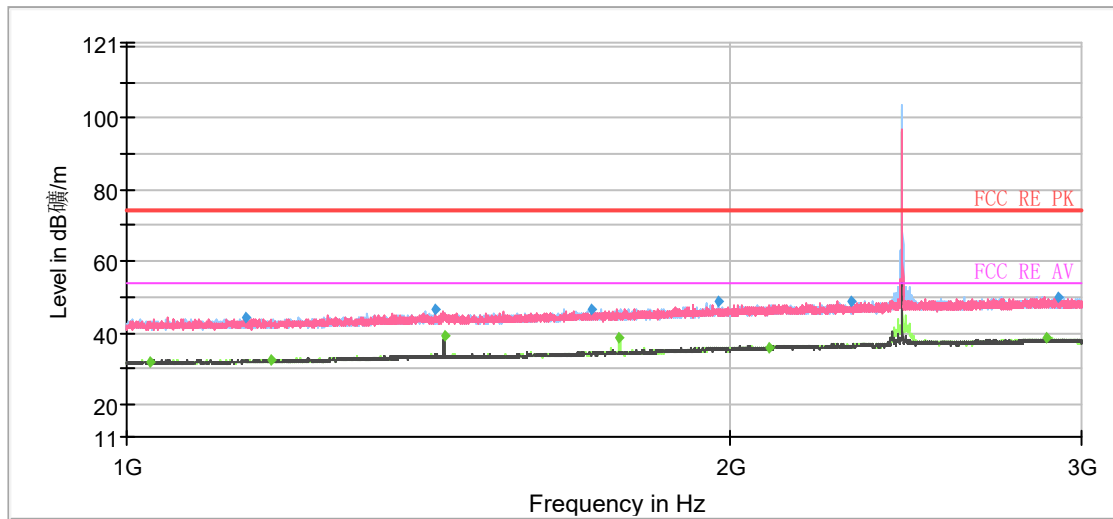


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1028.00	---	31.98	54.00	22.02	500.00	200.0	H	32.00	5
1147.00	44.28	---	74.00	29.72	500.00	100.0	H	294.00	6
1181.50	---	32.69	54.00	21.31	500.00	200.0	H	32.00	6
1427.25	46.80	---	74.00	27.20	500.00	100.0	V	239.00	7
1440.75	---	39.03	54.00	14.97	500.00	100.0	H	41.00	7
1706.25	46.51	---	74.00	27.49	500.00	200.0	H	65.00	8
1763.25	---	38.86	54.00	15.14	500.00	100.0	H	314.00	8
1974.00	48.76	---	74.00	25.24	500.00	100.0	H	275.00	9
2094.25	---	36.05	54.00	17.95	500.00	200.0	H	294.00	10
2303.00	48.94	---	74.00	25.06	500.00	100.0	H	301.00	10
2881.75	---	38.53	54.00	15.47	500.00	100.0	V	81.00	12
2917.75	50.05	---	74.00	23.95	500.00	200.0	H	2.00	11

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

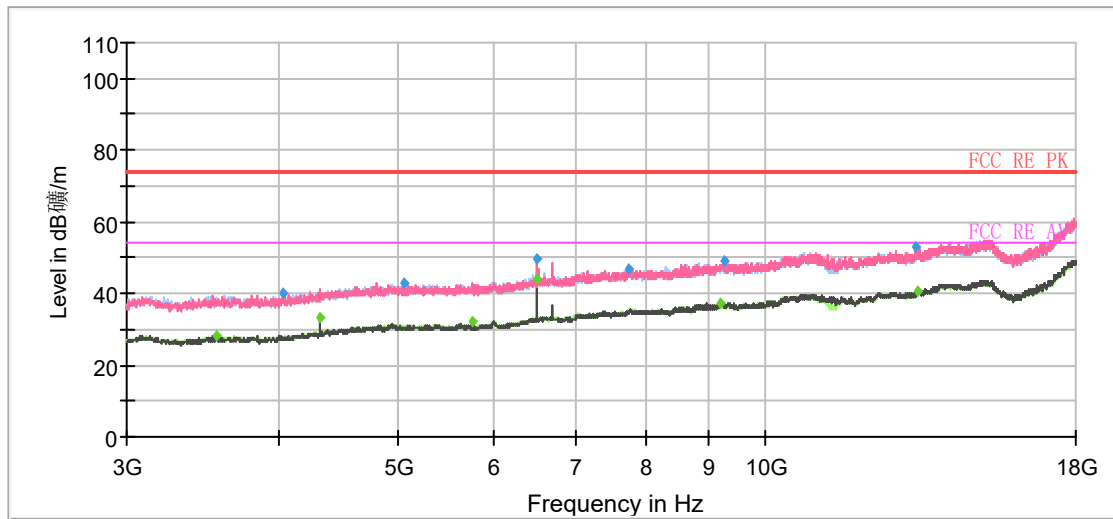


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3551.25	---	28.32	54.00	25.68	500.00	100.0	V	15.00	-13
4021.88	39.86	---	74.00	34.14	500.00	200.0	H	321.00	-11
4321.88	---	33.20	54.00	20.80	500.00	100.0	H	21.00	-10
5056.88	42.69	---	74.00	31.31	500.00	100.0	H	178.00	-8
5761.88	---	32.03	54.00	21.97	500.00	100.0	H	7.00	-7
6506.25	49.36	---	74.00	24.64	500.00	100.0	H	89.00	-4
6506.25	---	43.95	54.00	10.05	500.00	100.0	H	89.00	-4
7740.00	46.70	---	74.00	27.30	500.00	100.0	H	246.00	-3
9217.50	---	37.30	54.00	16.70	500.00	100.0	V	263.00	-2
9268.13	49.04	---	74.00	24.96	500.00	200.0	V	3.00	-2
13293.75	52.77	---	74.00	21.23	500.00	200.0	V	104.00	3
13336.88	---	40.39	54.00	13.61	500.00	200.0	H	307.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



Bluetooth LE-Channel 39

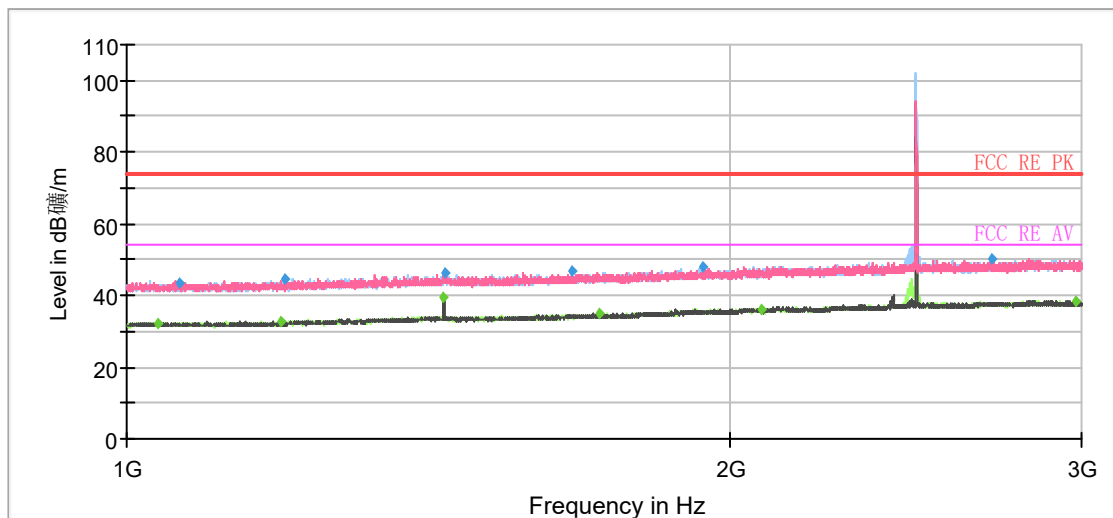


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1037.75	---	31.90	54.00	22.10	500.00	200.0	H	289.00	5
1062.00	43.18	---	74.00	30.82	500.00	200.0	V	170.00	5
1193.25	---	32.63	54.00	21.37	500.00	200.0	V	78.00	6
1199.00	44.54	---	74.00	29.46	500.00	200.0	V	58.00	6
1440.50	---	39.62	54.00	14.38	500.00	100.0	H	37.00	7
1440.75	46.03	---	74.00	27.97	500.00	100.0	H	44.00	7
1668.25	46.57	---	74.00	27.43	500.00	100.0	H	10.00	8
1722.00	---	34.88	54.00	19.12	500.00	100.0	H	24.00	8
1938.25	47.91	---	74.00	26.09	500.00	100.0	H	0.00	9
2076.00	---	36.27	54.00	17.73	500.00	100.0	H	164.00	10
2707.25	50.20	---	74.00	23.80	500.00	200.0	H	118.00	11
2980.25	---	38.61	54.00	15.39	500.00	100.0	V	343.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

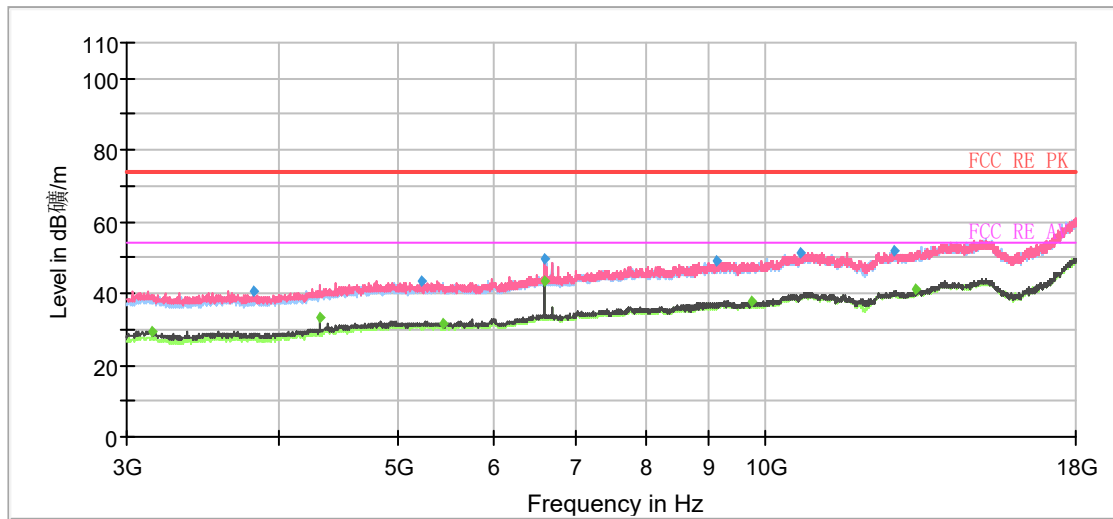


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3148.13	---	29.43	54.00	24.57	500.00	100.0	V	231.00	-13
3817.50	40.83	---	74.00	33.17	500.00	100.0	V	268.00	-12
4321.88	---	33.46	54.00	20.54	500.00	100.0	V	298.00	-10
5231.25	43.44	---	74.00	30.56	500.00	100.0	V	268.00	-8
5460.00	---	31.48	54.00	22.52	500.00	100.0	V	28.00	-7
6613.13	49.50	---	74.00	24.50	500.00	100.0	V	231.00	-4
6613.13	---	43.37	54.00	10.63	500.00	100.0	V	231.00	-4
9121.88	49.07	---	74.00	24.93	500.00	100.0	H	9.00	-2
9770.63	---	37.81	54.00	16.19	500.00	100.0	V	347.00	-2
10717.50	51.07	---	74.00	22.93	500.00	100.0	V	335.00	0
12796.88	52.00	---	74.00	22.00	500.00	100.0	V	298.00	2
13327.50	---	40.93	54.00	13.07	500.00	100.0	V	290.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, 802.11n (HT20), Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

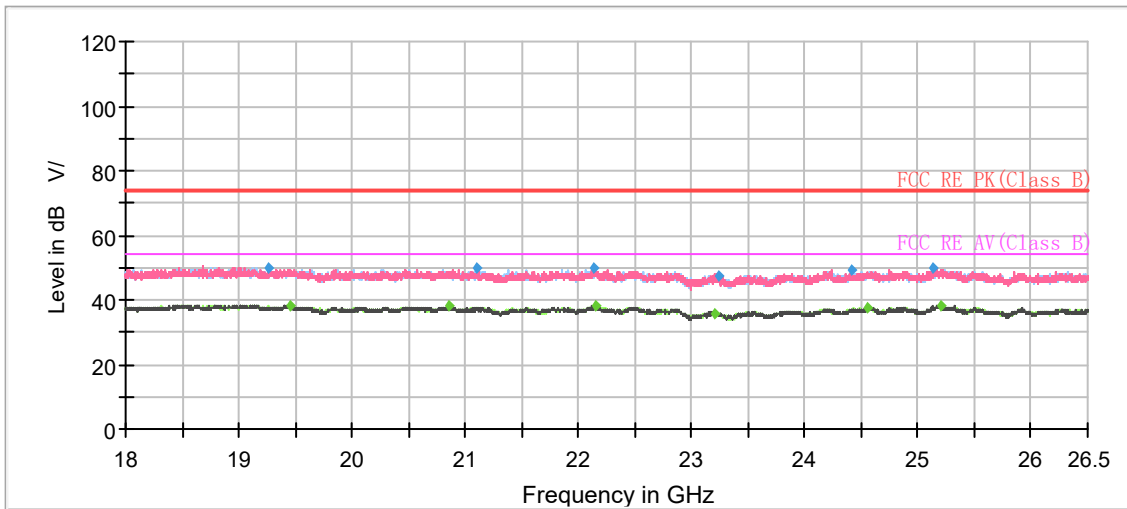

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19255.88	49.66	---	74.00	24.34	500.00	200.0	H	268.00	-1
19447.13	---	38.37	54.00	15.63	500.00	200.0	H	105.00	-1
20854.94	---	37.89	54.00	16.11	500.00	100.0	V	333.00	0
21098.25	49.59	---	74.00	24.41	500.00	100.0	H	11.00	0
22129.94	49.67	---	74.00	24.33	500.00	200.0	V	120.00	1
22146.94	---	38.03	54.00	15.97	500.00	100.0	H	185.00	1
23197.75	---	35.92	54.00	18.08	500.00	100.0	H	69.00	2
23248.75	47.16	---	74.00	26.84	500.00	100.0	V	333.00	2
24421.75	49.17	---	74.00	24.83	500.00	100.0	V	50.00	3
24556.69	---	37.48	54.00	16.52	500.00	100.0	V	114.00	3
25131.50	49.91	---	74.00	24.09	500.00	100.0	H	185.00	3
25206.94	---	38.31	54.00	15.69	500.00	100.0	V	219.00	3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

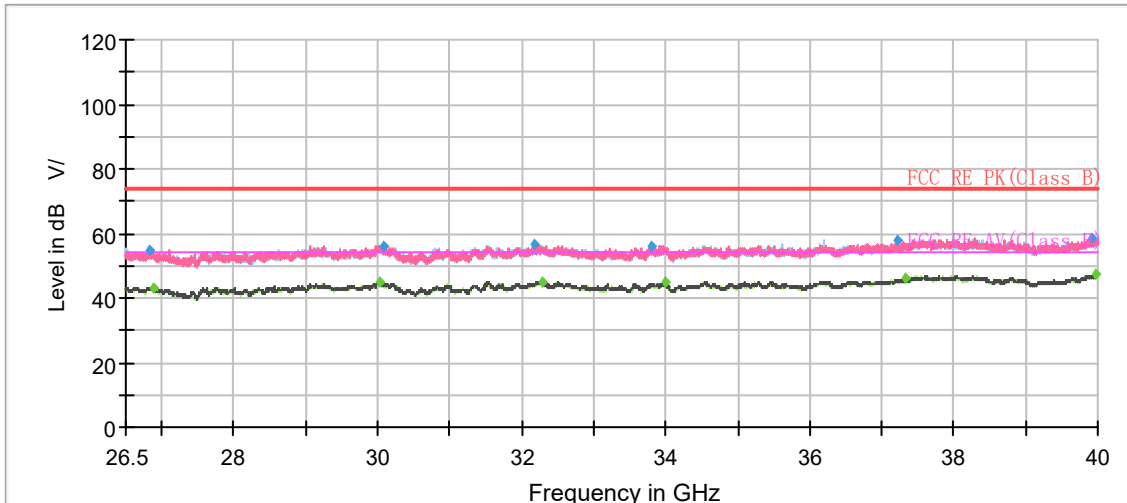

Radiates Emission from 26.5GHz to 26.5GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
26832.44	54.51	---	74.00	19.49	500.00	200.0	V	151.00	8
26874.63	---	43.29	54.00	10.71	500.00	200.0	H	142.00	7
30023.50	---	45.02	54.00	8.98	500.00	200.0	H	84.00	7
30094.38	56.26	---	74.00	17.74	500.00	200.0	H	283.00	7
32185.19	56.41	---	74.00	17.59	500.00	200.0	V	44.00	8
32294.88	---	45.02	54.00	8.98	500.00	200.0	H	293.00	8
33795.06	56.17	---	74.00	17.83	500.00	200.0	V	295.00	8
33994.19	---	44.92	54.00	9.08	500.00	100.0	V	338.00	8
37224.06	57.72	---	74.00	16.28	500.00	100.0	H	303.00	10
37338.81	---	45.93	54.00	8.07	500.00	200.0	H	334.00	11
39910.56	58.64	---	74.00	15.36	500.00	200.0	H	303.00	11
39974.69	---	47.17	54.00	6.83	500.00	100.0	V	278.00	12

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.7. Conducted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

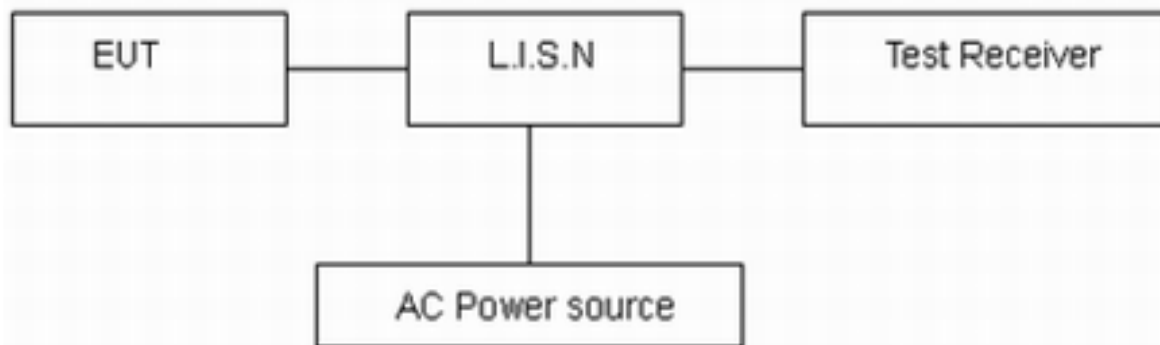

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G /Bluetooth LE) with all channels, 802.11n (HT20), Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

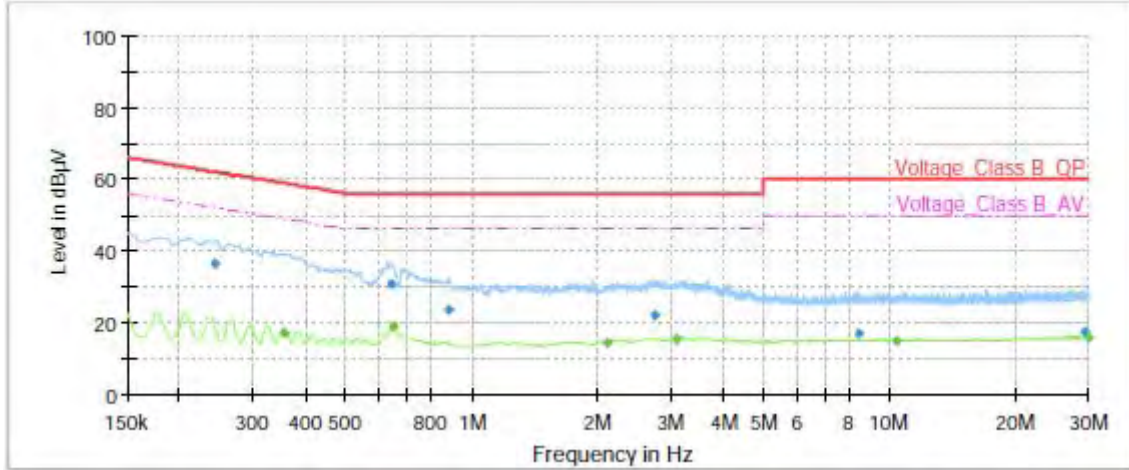

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.24	36.27	---	62.02	25.75	1000.00	9.000	L1	ON	21
0.35	---	16.89	48.85	31.96	1000.00	9.000	L1	ON	21
0.64	30.94	---	56.00	25.06	1000.00	9.000	L1	ON	20
0.65	---	19.05	46.00	26.95	1000.00	9.000	L1	ON	20
0.88	23.71	---	56.00	32.29	1000.00	9.000	L1	ON	20
2.12	---	14.48	46.00	31.52	1000.00	9.000	L1	ON	20
2.73	22.06	---	56.00	33.94	1000.00	9.000	L1	ON	19
3.08	---	15.53	46.00	30.47	1000.00	9.000	L1	ON	19
8.49	16.72	---	60.00	43.28	1000.00	9.000	L1	ON	20
10.41	---	14.99	50.00	35.01	1000.00	9.000	L1	ON	20
29.42	17.54	---	60.00	42.46	1000.00	9.000	L1	ON	20
30.00	---	15.78	50.00	34.22	1000.00	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

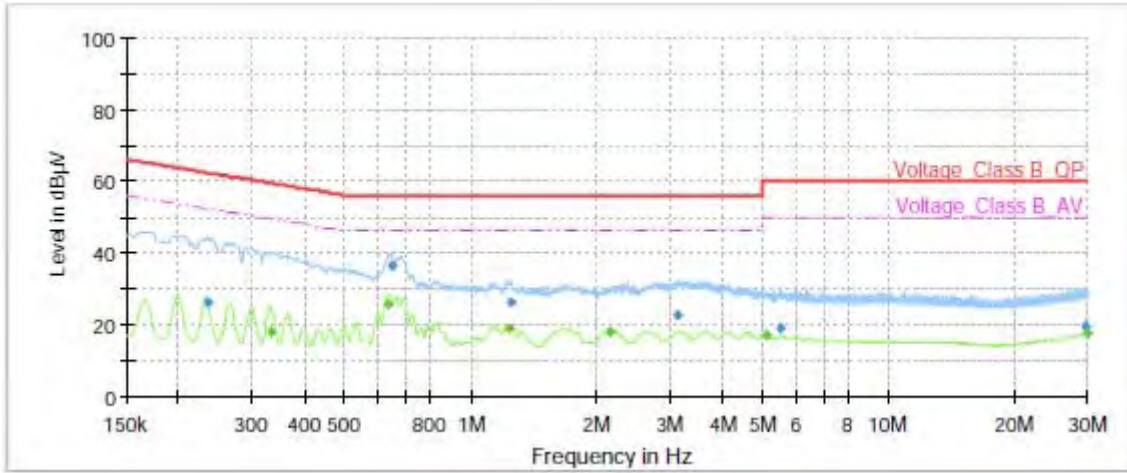

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.24	26.15	---	62.25	36.10	1000.00	9.000	N	ON	21
0.33	---	18.13	49.40	31.27	1000.00	9.000	N	ON	21
0.63	---	25.74	46.00	20.26	1000.00	9.000	N	ON	20
0.65	36.34	---	56.00	19.66	1000.00	9.000	N	ON	20
1.24	---	19.21	46.00	26.79	1000.00	9.000	N	ON	20
1.24	26.13	---	56.00	29.87	1000.00	9.000	N	ON	20
2.16	---	17.93	46.00	28.07	1000.00	9.000	N	ON	20
3.12	22.38	---	56.00	33.62	1000.00	9.000	N	ON	19
5.13	---	16.94	50.00	33.06	1000.00	9.000	N	ON	19
5.53	18.92	---	60.00	41.08	1000.00	9.000	N	ON	19
29.83	19.44	---	60.00	40.56	1000.00	9.000	N	ON	20
30.00	---	17.22	50.00	32.78	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Wireless Communication Tester	R&S	CMW270	101201	2022-05-25	2023-05-24
Power sensor	R&S	OSP-B157W8	100924	2021-12-12	2022-12-11
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2021-12-12	2022-12-11
Radiated Emission					
EMI Test Receiver	R&S	ESCI7	100936	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV30	103591	2021-12-12	2022-12-11
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	9163	1023	2021-06-07	2024-06-06
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2019-12-16	2022-12-15
Horn Antenna	ETS-Lindgren	3160-09	00102643	2020-08-11	2023-08-10
Horn Antenna	STEATITE	QSH-SL-26-4 0-K-15	16779	2019-12-24	2022-12-23
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	101171	2020-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	101667	2022-05-25	2023-05-24
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.