



RF TEST REPORT

Applicant Huawei Device Co., Ltd.
FCC ID 2ATEYCTR-LX3
Product Smart phone
Model CTR-LX3
Report No. R2205A0419-R7V1
Issue Date June 23, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the test report.....	5
1.2. Test facility	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General information.....	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	12
5.1. Occupied Bandwidth	12
5.2. Average Power Output.....	33
5.3. Frequency Stability.....	41
5.4. Power Spectral Density.....	45
5.5. Unwanted Emission	64
5.6. Conducted Emission	167
6. Main Test Instruments.....	170
ANNEX A: The EUT Appearance	171
ANNEX B: Test Setup Photos	172



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	June 15, 2022
Rev.1	Update data.	June 23, 2022

Note: This revised report (Report No. R2205A0419-R7V1) supersedes and replaces the previously issued report (Report No. R2205A0419-R7). Please discard or destroy the previously issued report and dispose of it accordingly.



Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS

Date of Testing: May 22, 2022 ~ June 7, 2022 and June 23, 2022

Date of Sample Received: May 17, 2022

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Huawei Device Co., Ltd.
Applicant address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China
Manufacturer	Huawei Device Co., Ltd.
Manufacturer address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

2.2. General information

EUT Description			
Model	CTR-LX3		
SN	A7F6R22423000346		
Hardware Version	LLDM599		
Software Version	12.0.1.108(C900E105R1P1)		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	-1.5dBi		
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-2A:5250MHz -5350MHz U-NII-2C:5470MHz-5725MHz U-NII-3: 5725MHz -5850MHz		
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM		
Max. Power	16.99dBm		
Testing temperature range:	0 ° C to 35° C		
Operating temperature range:	0 ° C to 35° C		
Operating voltage range:	3.6V to 4.48V		
State DC voltage:	3.88V		
EUT Accessory			
Accessory	Model	Manufacture	No.
Adapter	HW-100400E01	Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	1
	HW-100400B01	Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	2
		Huawei Technologies Co., Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)	3



	HW-100400U01	Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	4
	HW-100400E02	Huawei Device Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	5
	HW-100400B02	Huawei Device Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	6
	HW-100400U02	Huawei Device Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	7
Battery	HB496493EGW	Dongguan NVT Technology Co., Ltd.	1
		Shenzhen Sunwoda Intelligence Technology Co., Ltd.	2
Earphone	MEND1532B528A11	Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD.	1
	1293-3283-3.5mm-339	Boluo County Quancheng Electronic Co.,ltd.	2
	EPAB542-2WH05-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	3
USB Cable	WA0046	GUANGXI BROAD TELECOMMUNICATION CO.,LTD	1
	AU2-CHO006HF	FREEPOR T RESOURCES ENTERPRISES (JIANGXI) CO .,LTD	2
	213-00989-0	DONGGUAN MINGJI ELECTRONICS TECHNOLOGY GROUP CO.,LTD	3
	L99UC138-CS-H	LUXSHARE PRECISION INDUSTRY CO.,LTD	4

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.
2. There is more than Adapter/Battery/ Earphone /USB cable, each one should be applied throughout the compliance test respectively, and however, only the worst case (Adapter 4/ Battery 2/ Earphone 2/ USB cable 3) for RE, (Adapter 5/ Battery 2/ Earphone 1/ USB cable 1) for CE will be recorded in this report.



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2021) Unlicensed National Information Infrastructure Devices

ANSI C63.10-2013

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0



Wireless Technology and Frequency Range

Wireless Technology		Bandwidth	Channel	Frequency	
Wi-Fi	U-NII-1	20 MHz	36	5180MHz	
			40	5200MHz	
			44	5220MHz	
			48	5240MHz	
		40 MHz	38	5190MHz	
			46	5230MHz	
			80 MHz	42	5210MHz
		U-NII-2A	20 MHz	52	5260MHz
				56	5280MHz
	60			5300MHz	
	64			5320MHz	
	40 MHz		54	5270MHz	
			62	5310MHz	
	80 MHz		58	5290MHz	
	U-NII-2C		20 MHz	100	5500MHz
				104	5520MHz
		108		5540MHz	
		112		5560MHz	
		116		5580MHz	
		120		5600MHz	
		124		5620MHz	
		128		5640MHz	
		132		5660MHz	
		136		5680MHz	
		140		5700MHz	
		144		5720MHz	
		40 MHz	102	5510MHz	
			110	5550MHz	
			118	5590MHz	
			126	5630MHz	
			134	5670MHz	
			142	5710MHz	
		80 MHz	106	5530MHz	
122			5610MHz		
138			5690MHz		
U-NII-3			20 MHz	149	5745MHz
				153	5765MHz
				157	5785MHz
	161	5805MHz			
	165	5825MHz			
	40 MHz	151	5755MHz		



			159	5795MHz
		80 MHz	155	5775MHz
Does this device support TPC Function? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Does this device support TDWR Band? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				

5. Test Case Results

5.1. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW \approx 1% OCB kHz, VBW \geq 3 \times RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW \geq 3 \times RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

Test Setup



Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:****U-NII-1**

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	16.72	22.94	PASS
	5200	16.69	23.12	PASS
	5240	16.66	23.60	PASS
802.11n HT20	5180	17.85	24.11	PASS
	5200	17.86	24.02	PASS
	5240	17.83	23.59	PASS
802.11n HT40	5190	36.22	41.32	PASS
	5230	36.26	41.24	PASS
802.11ac VHT20	5180	17.86	23.66	PASS
	5200	17.85	23.97	PASS
	5240	17.87	24.41	PASS
802.11ac VHT40	5190	36.18	41.44	PASS
	5230	36.20	41.70	PASS
802.11ac VHT80	5210	75.49	82.75	PASS

U-NII-2A

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5260	16.72	23.84	PASS
	5300	16.72	23.69	PASS
	5320	16.72	22.77	PASS
802.11n HT20	5260	17.91	24.16	PASS
	5300	17.87	24.65	PASS
	5320	17.83	23.88	PASS
802.11n HT40	5270	36.26	41.49	PASS
	5310	36.28	41.26	PASS
802.11ac VHT20	5260	17.86	24.67	PASS
	5300	17.85	23.94	PASS
	5320	17.88	24.19	PASS
802.11ac VHT40	5270	36.24	41.34	PASS
	5310	36.24	41.61	PASS
802.11ac VHT80	5290	75.57	82.88	PASS







U-NII-2C

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5500	16.71	23.19	PASS
	5600	16.65	22.99	PASS
	5700	16.74	23.53	PASS
	5720	13.36	16.48	PASS
802.11n HT20	5500	17.82	24.21	PASS
	5600	17.83	23.70	PASS
	5700	17.87	23.64	PASS
	5720	13.94	16.91	PASS
802.11n HT40	5510	36.22	41.45	PASS
	5590	36.23	41.13	PASS
	5670	36.25	41.03	PASS
	5710	33.00	36.06	PASS
802.11ac VHT20	5500	17.83	23.57	PASS
	5600	17.83	24.00	PASS
	5700	17.87	24.04	PASS
	5720	13.91	16.78	PASS
802.11ac VHT40	5510	36.23	42.39	PASS
	5590	36.25	41.34	PASS
	5670	36.23	41.49	PASS
	5710	32.97	36.01	PASS
802.11ac VHT80	5530	75.47	81.98	PASS
	5610	75.50	82.96	PASS
	5690	72.32	75.95	PASS



U-NII-3

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5720	5.05	3.15	500	PASS
	5745	16.64	14.39	500	PASS
	5785	16.67	15.30	500	PASS
	5825	16.63	14.06	500	PASS
802.11n HT20	5720	5.25	3.81	500	PASS
	5745	17.82	15.04	500	PASS
	5785	17.80	16.92	500	PASS
	5825	17.82	13.82	500	PASS
802.11n HT40	5710	5.69	3.17	500	PASS
	5755	36.28	36.05	500	PASS
	5795	36.27	35.64	500	PASS
802.11ac VHT20	5720	5.11	3.77	500	PASS
	5745	17.83	16.63	500	PASS
	5785	17.80	17.16	500	PASS
	5825	17.78	15.13	500	PASS
802.11ac VHT40	5710	4.82	3.16	500	PASS
	5755	36.30	36.03	500	PASS
	5795	36.28	35.70	500	PASS
802.11ac VHT80	5690	20.14	3.14	500	PASS
	5775	75.57	75.07	500	PASS

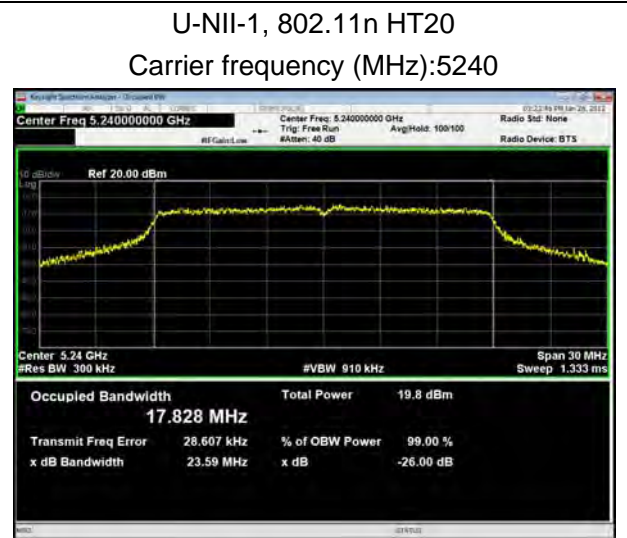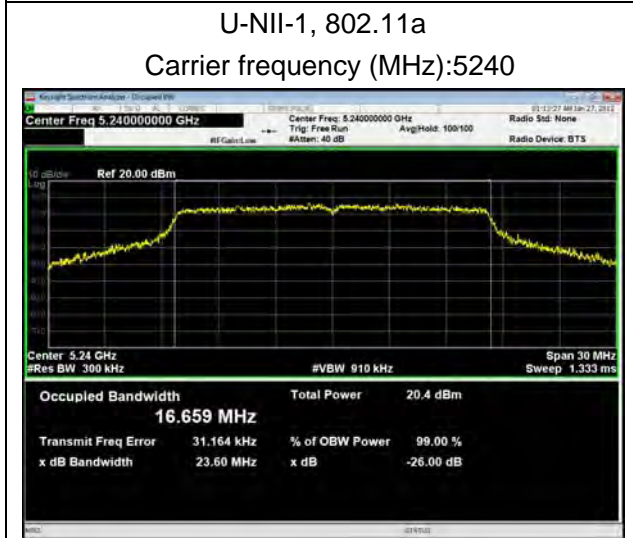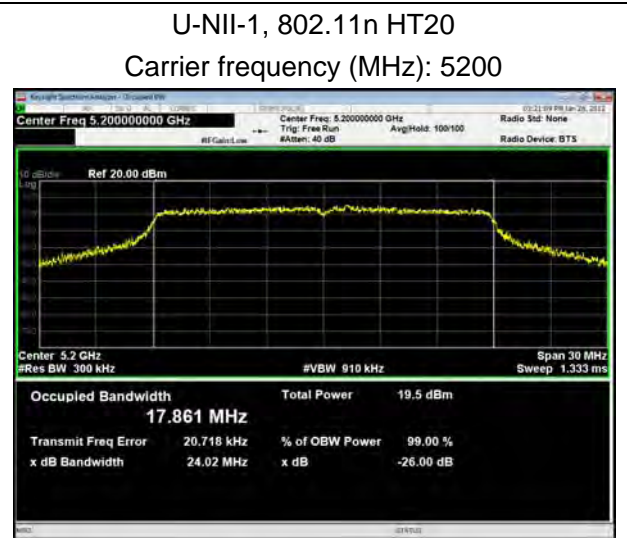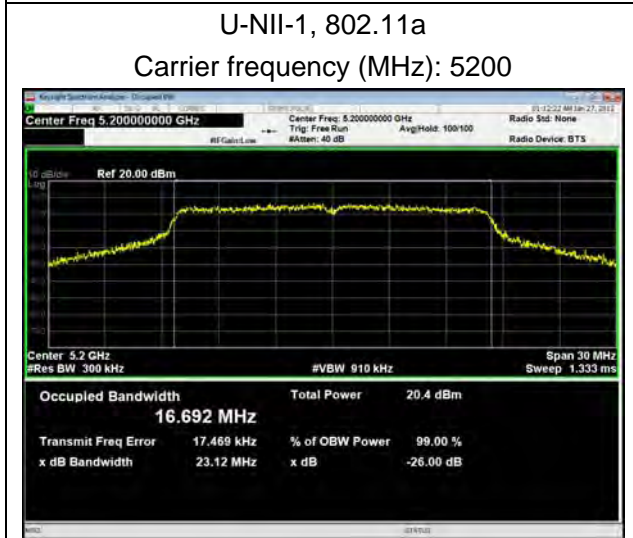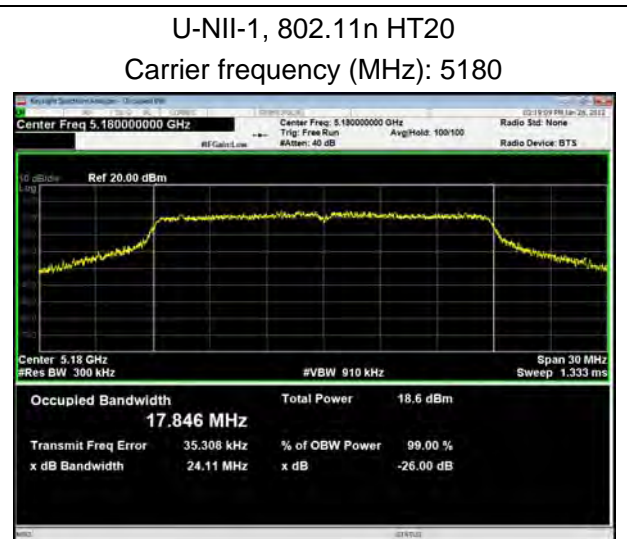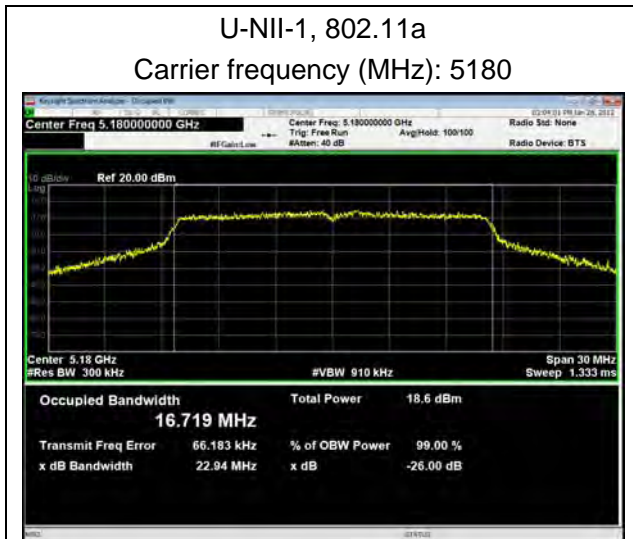

U-NII-1, 802.11n HT40
Carrier frequency (MHz): 5190



U-NII-1, 802.11ac VHT20
Carrier frequency (MHz): 5180



U-NII-1, 802.11n HT40
Carrier frequency (MHz): 5230



U-NII-1, 802.11ac VHT20
Carrier frequency (MHz): 5200



U-NII-1, 802.11ac VHT40
Carrier frequency (MHz): 5190




U-NII-1, 802.11ac VHT20
Carrier frequency (MHz): 5240



U-NII-1, 802.11ac VHT40
Carrier frequency (MHz): 5230



U-NII-1, 802.11ac VHT80
Carrier frequency (MHz): 5210

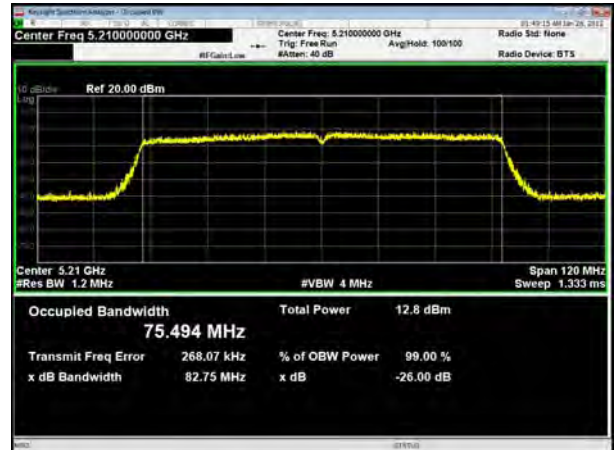

U-NII-2A, 802.11a
Carrier frequency (MHz): 5260



U-NII-2A, 802.11n HT20
Carrier frequency (MHz): 5260









U-NII-2A, 802.11a
Carrier frequency (MHz): 5300



U-NII-2A, 802.11n HT20
Carrier frequency (MHz): 5300



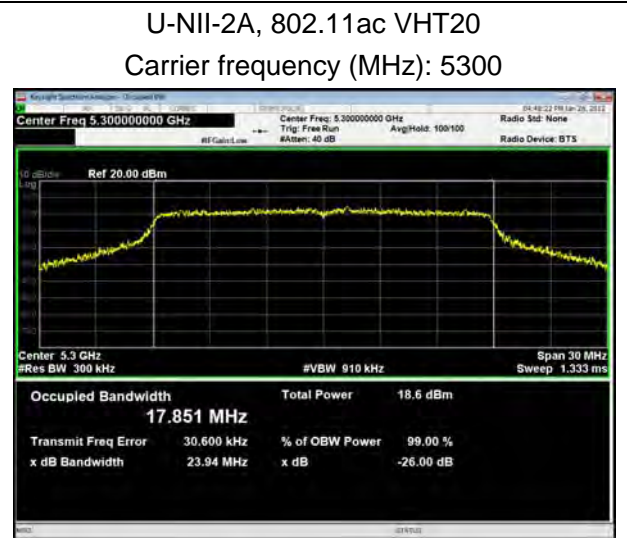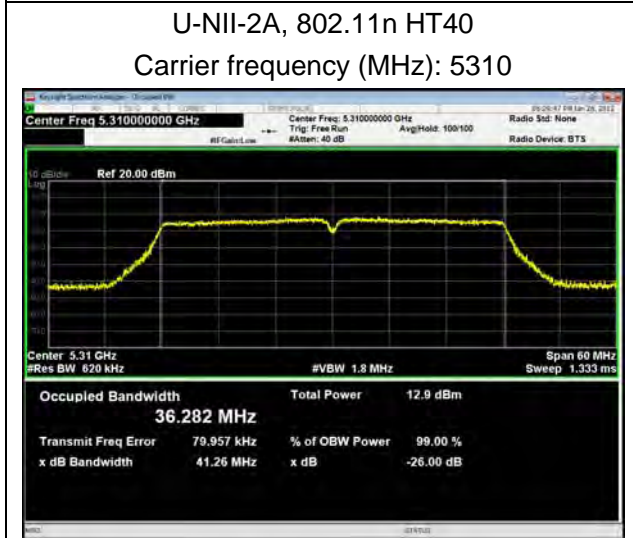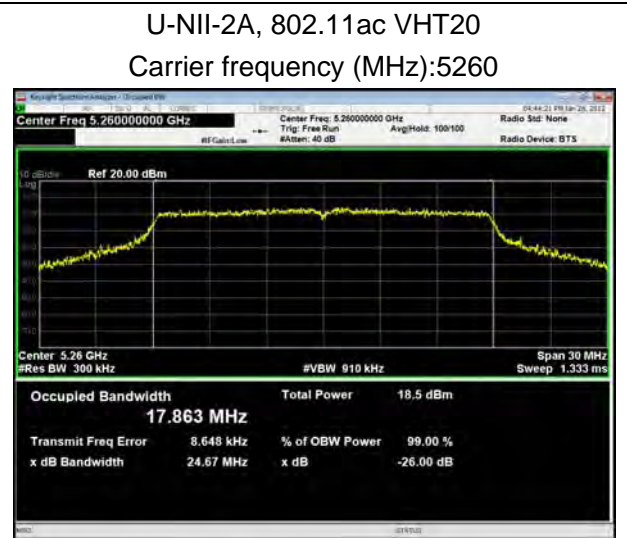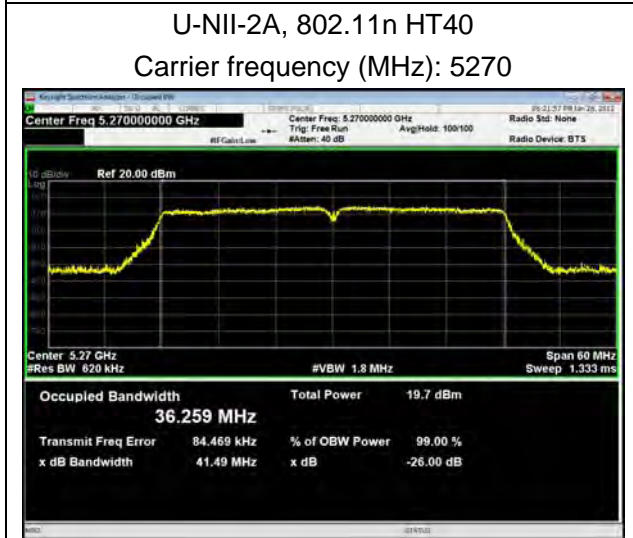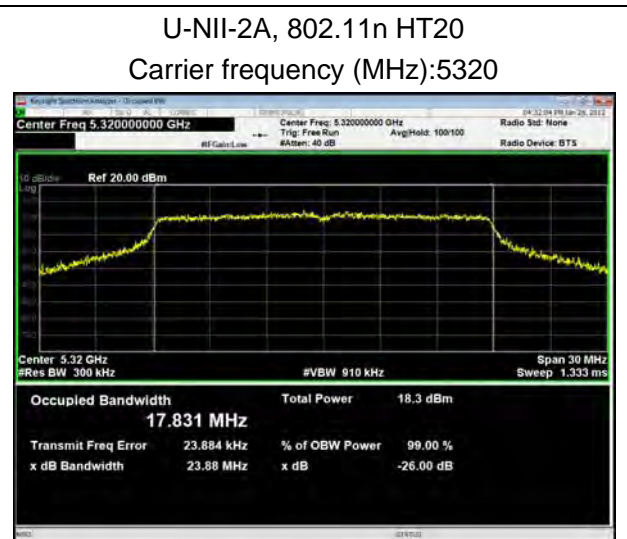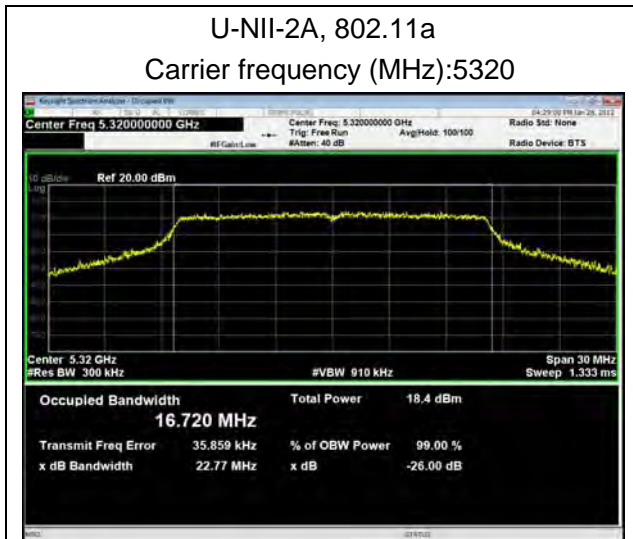

U-NII-2A, 802.11ac VHT40
Carrier frequency (MHz): 5270




U-NII-2A, 802.11ac VHT20
Carrier frequency (MHz): 5320



U-NII-2A, 802.11ac VHT40
Carrier frequency (MHz): 5310



U-NII-2A, 802.11ac VHT80
Carrier frequency (MHz): 5290

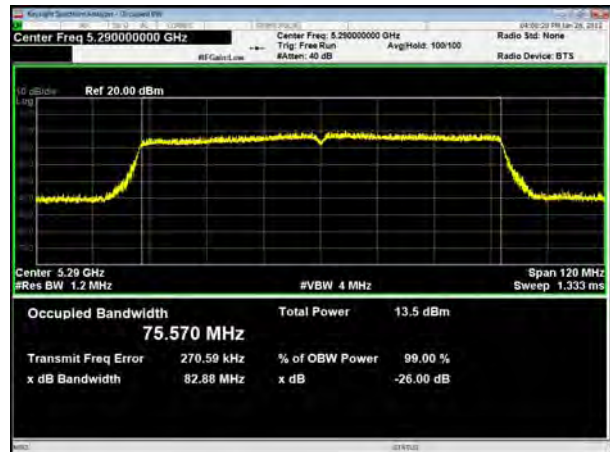

U-NII-2C, 802.11a
Carrier frequency (MHz): 5500



U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5500




U-NII-2C, 802.11a
Carrier frequency (MHz): 5600



U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5600



U-NII-2C, 802.11a
Carrier frequency (MHz): 5700

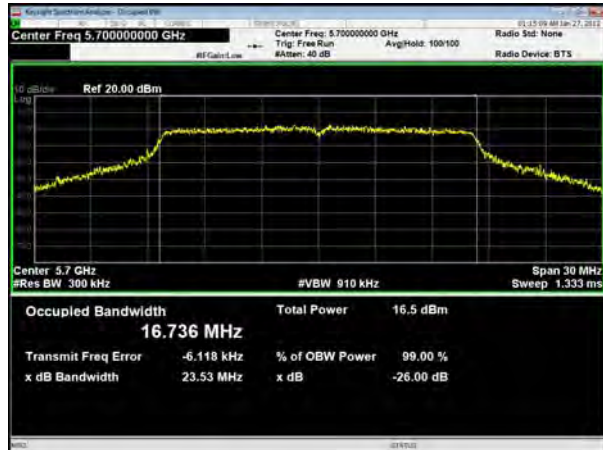

U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5700



U-NII-2C, 802.11a
Carrier frequency (MHz): 5720



U-NII-2C, 802.11n HT20
Carrier frequency (MHz): 5720



U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5510



U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5500




U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5590



U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5600




U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5670

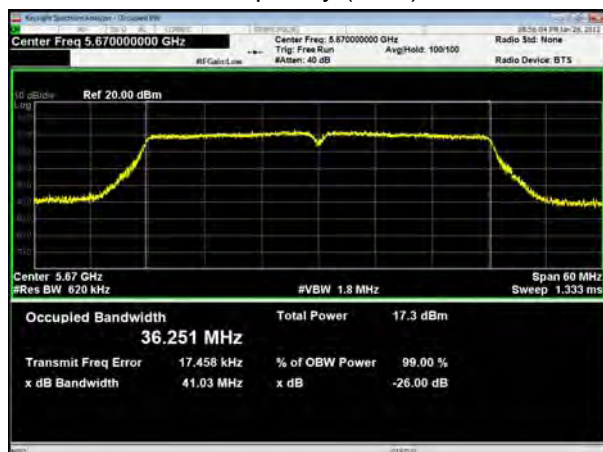

U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5700



U-NII-2C, 802.11n HT40
Carrier frequency (MHz): 5710

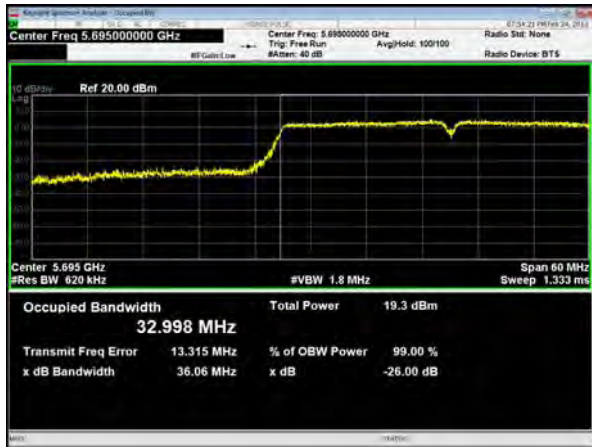

U-NII-2C, 802.11ac VHT20
Carrier frequency (MHz): 5720



U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5510



U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5590



U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5670




U-NII-2C, 802.11ac VHT40
Carrier frequency (MHz): 5710







U-NII-2C, 802.11ac VHT80
Carrier frequency (MHz): 5530

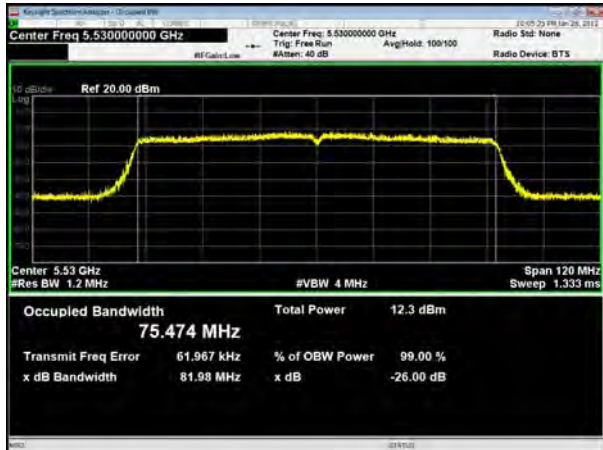

U-NII-2C, 802.11ac VHT80
Carrier frequency (MHz): 5610

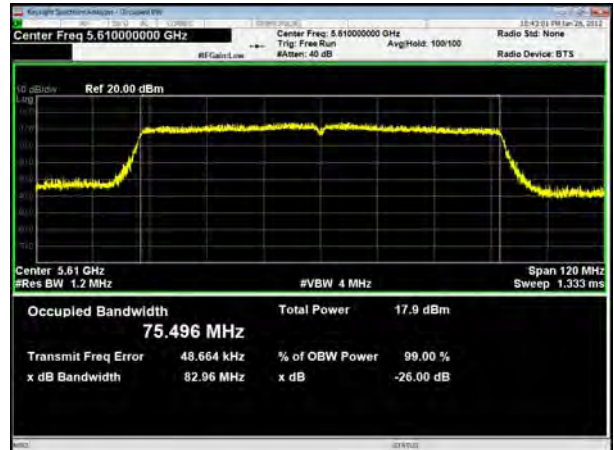








U-NII-2C, 802.11ac VHT80
Carrier frequency (MHz): 5690

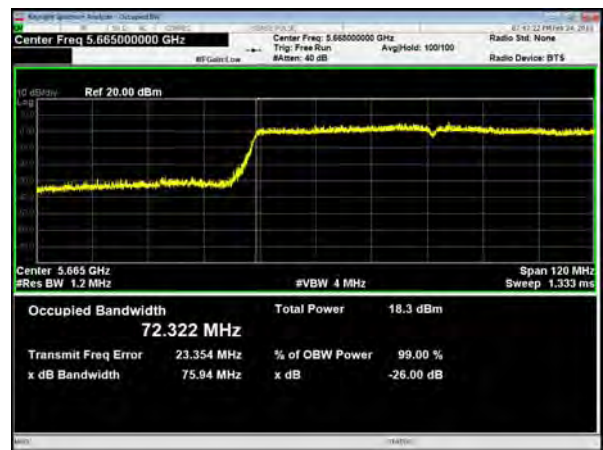



99% bandwidth

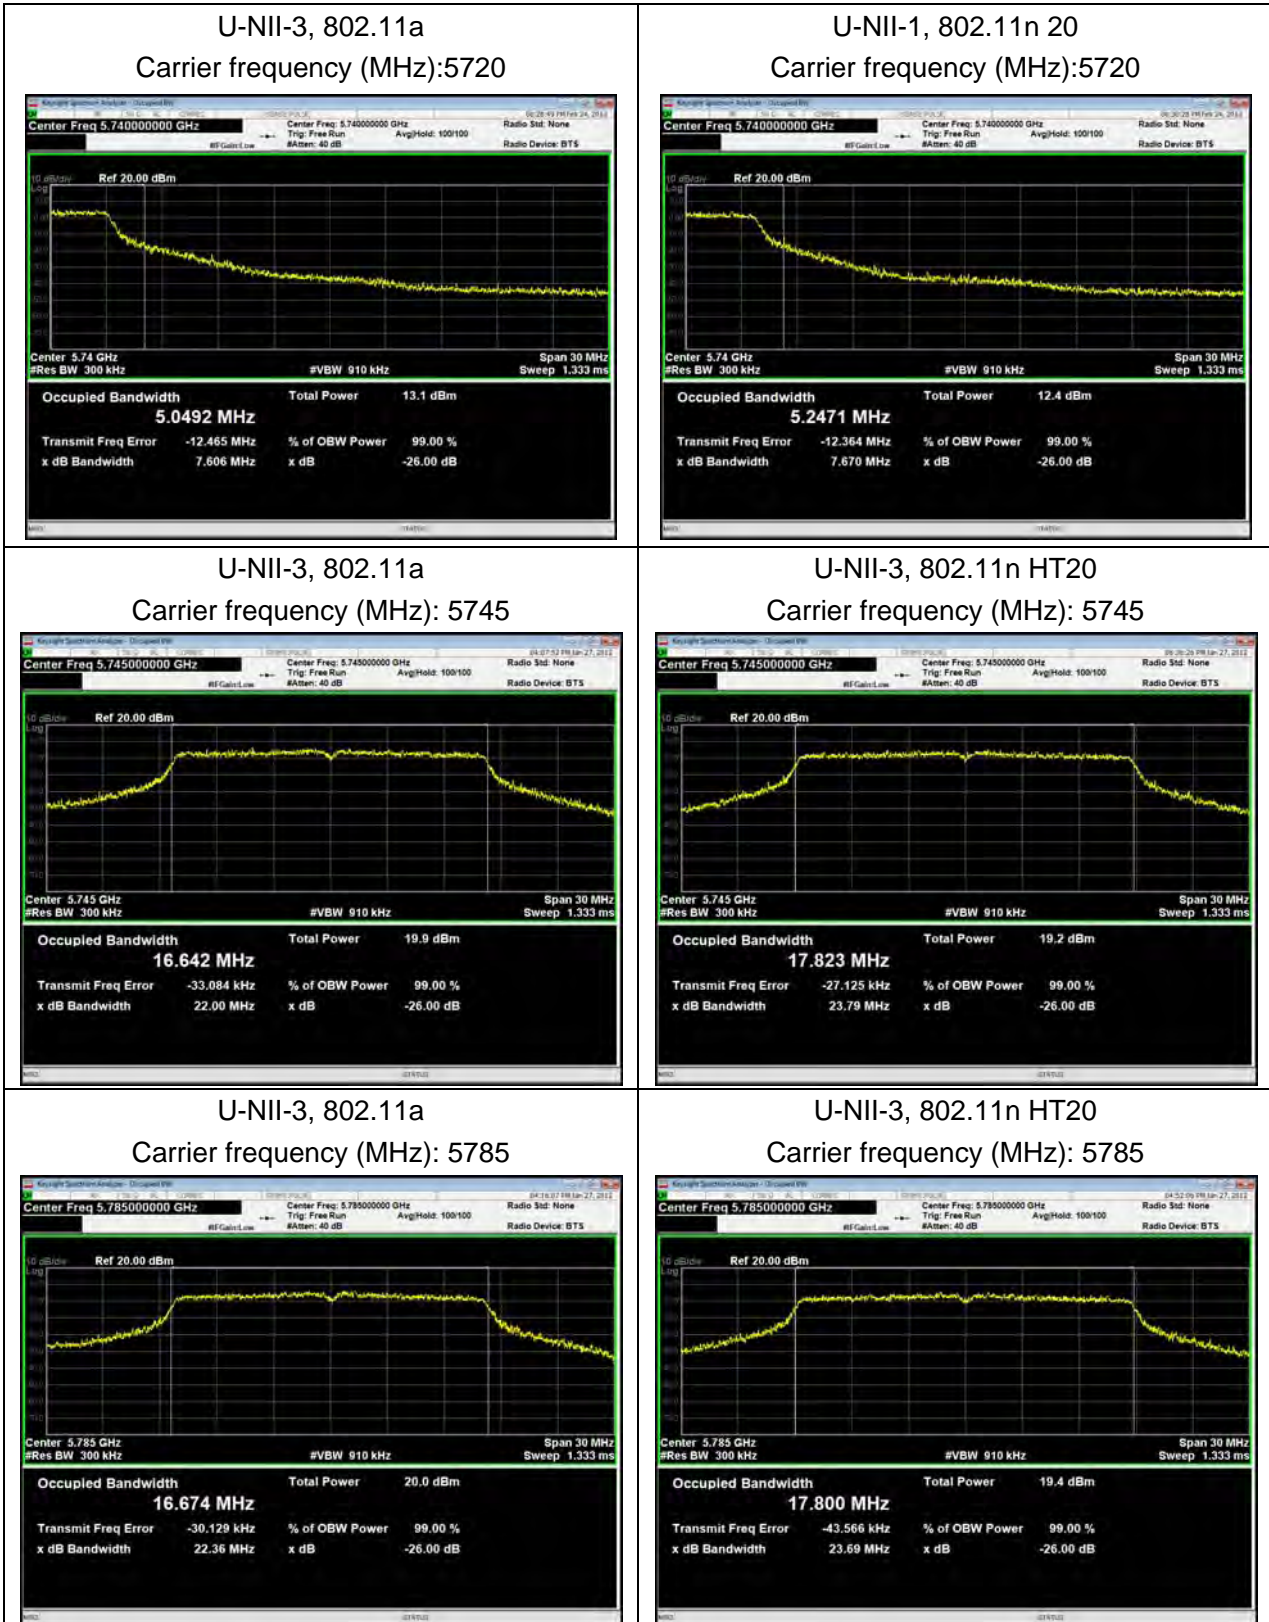

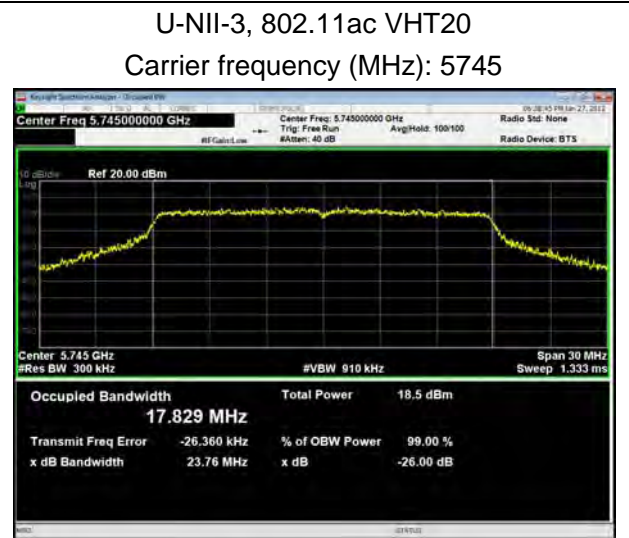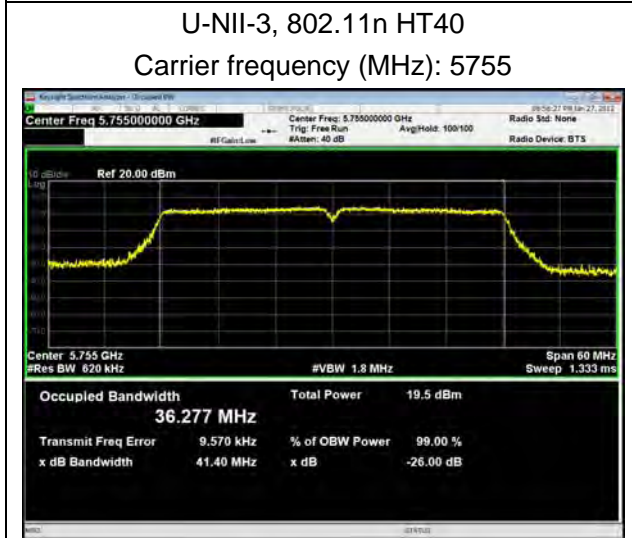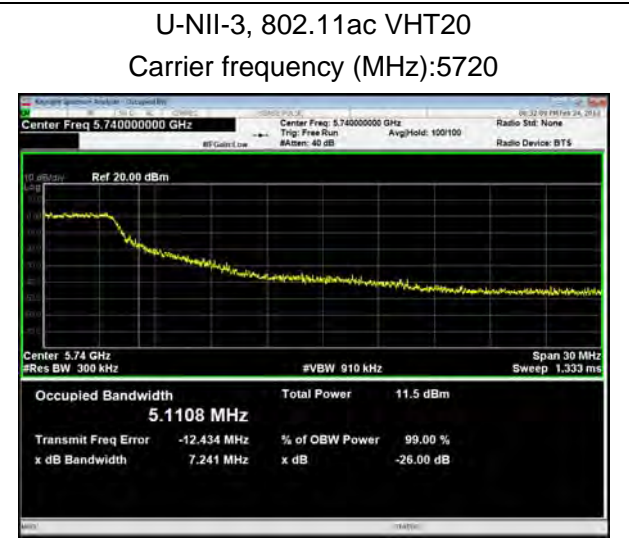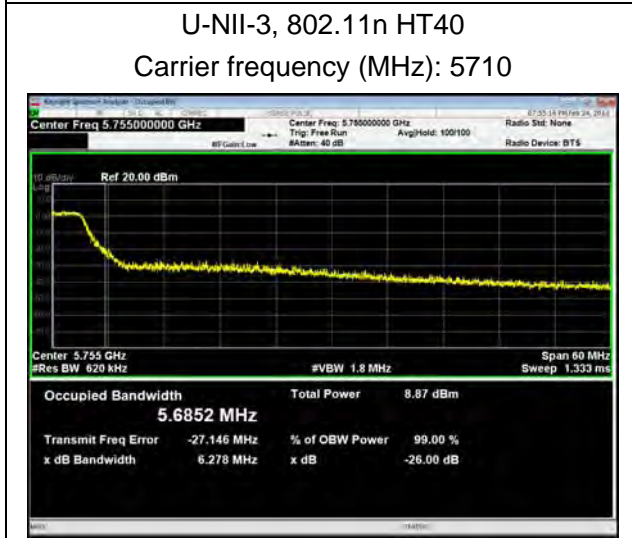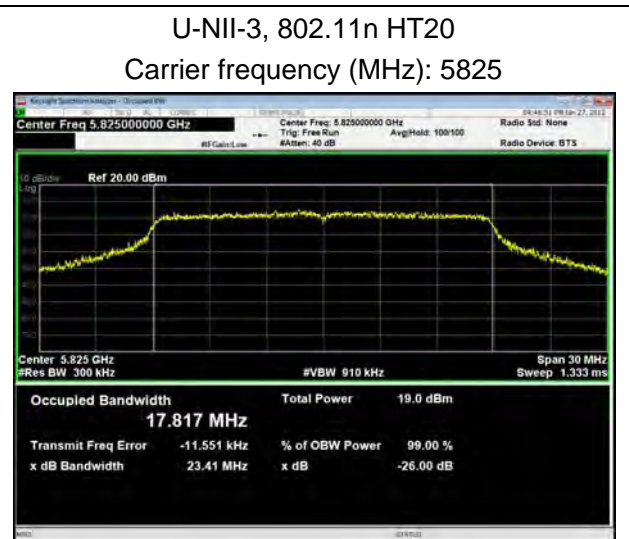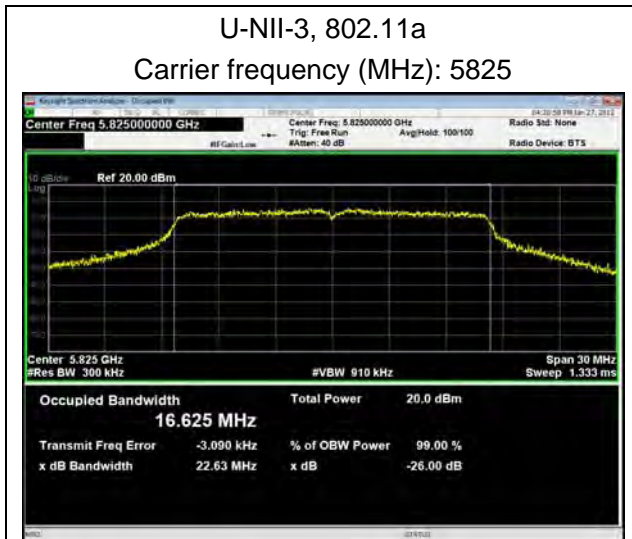

U-NII-3, 802.11n HT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5785



U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5710



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5825



U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5755




U-NII-3, 802.11ac VHT80
Carrier frequency (MHz): 5690





U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5795

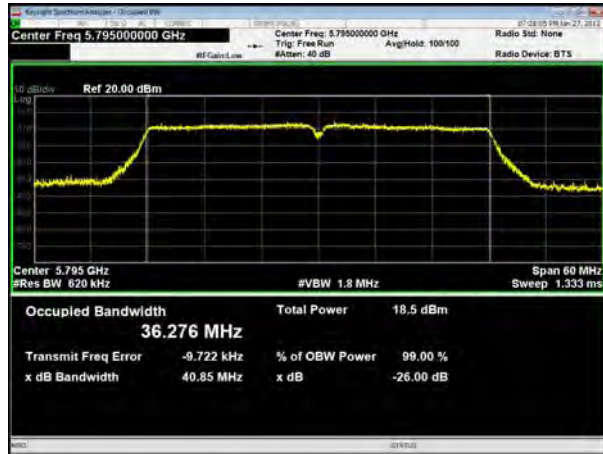

U-NII-3, 802.11ac VHT80
Carrier frequency (MHz): 5775





Minimum 6 dB bandwidth

U-NII-3, 802.11a

Carrier frequency (MHz):5720



U-NII-1, 802.11n 20

Carrier frequency (MHz):5720



U-NII-3, 802.11a

Carrier frequency (MHz): 5745



U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5745



U-NII-3, 802.11a







Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20

Carrier frequency (MHz): 5785



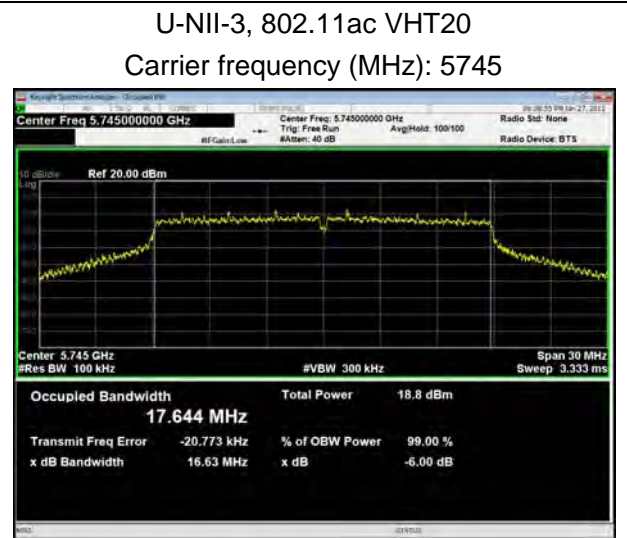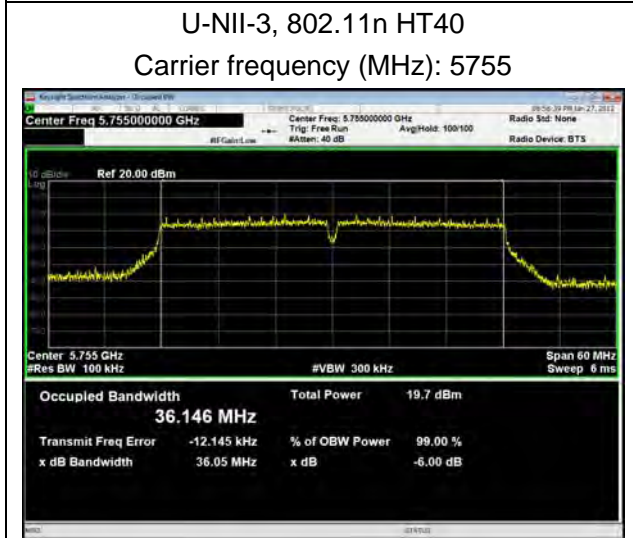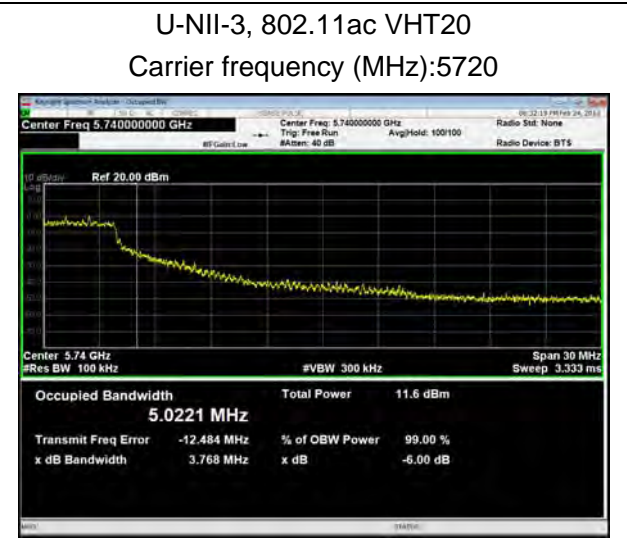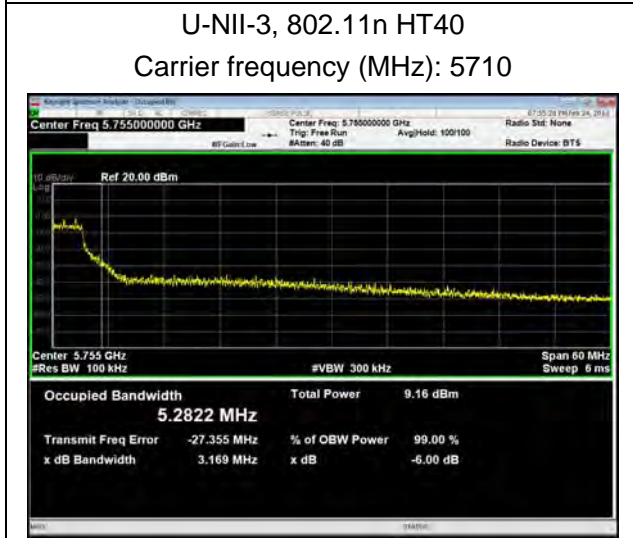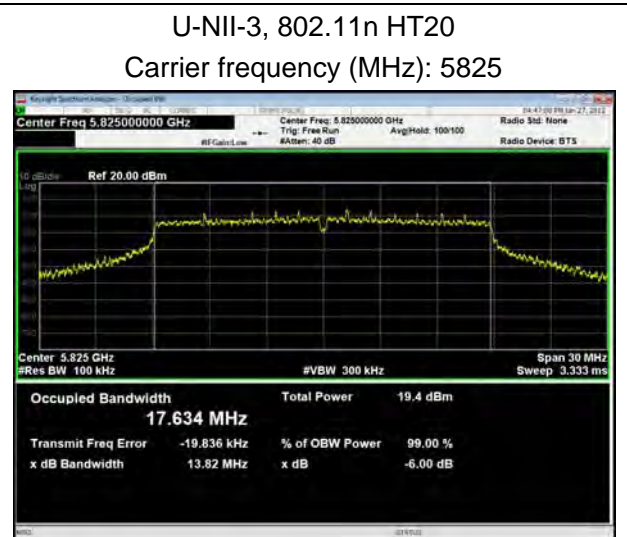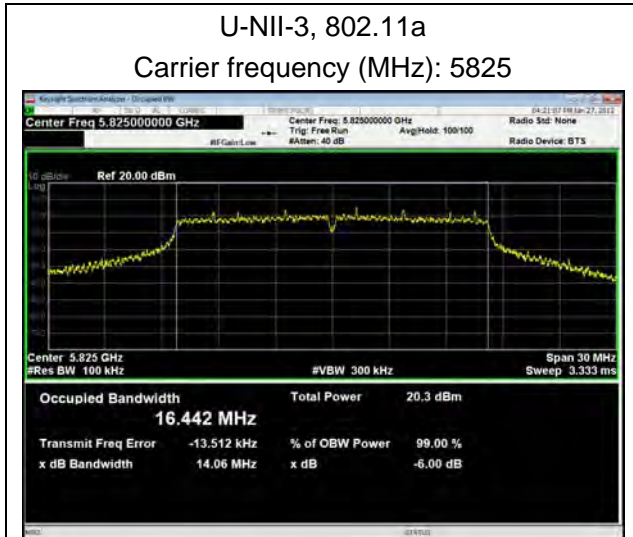


U-NII-3, 802.11n HT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5785



U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5710

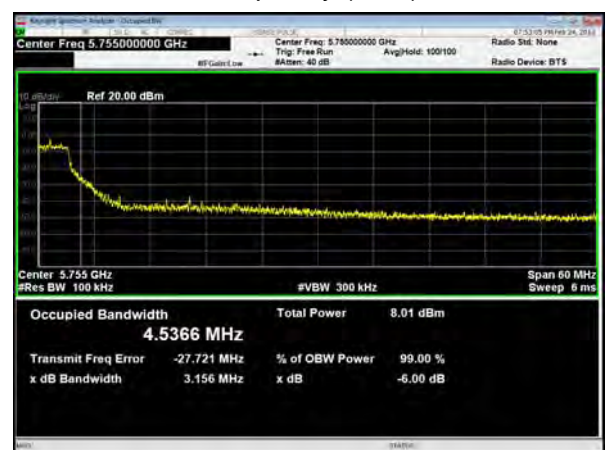


U-NII-3, 802.11ac VHT20
Carrier frequency (MHz): 5825



U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT80
Carrier frequency (MHz): 5690

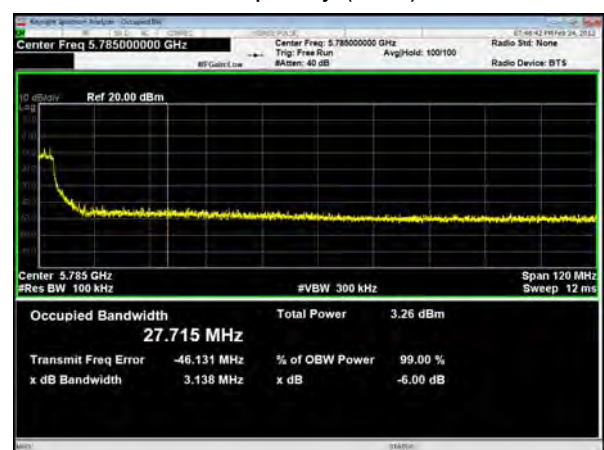




U-NII-3, 802.11ac VHT40
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT80
Carrier frequency (MHz): 5775

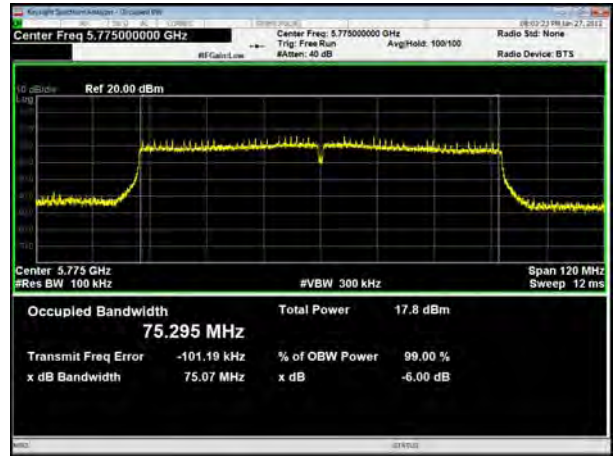

5.2. Average Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

Test Setup



Limits

Rule FCC Part 15.407(a)(1)(2)(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude



the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.



Test Results

Mode	Duty cycle	Duty cycle correction Factor(dB)
802.11a	0.98	0.00
802.11n HT20	0.98	0.00
802.11n HT40	0.96	0.16
802.11ac VHT20	0.98	0.00
802.11ac VHT40	0.96	0.16
802.11ac VHT80	0.93	0.31

Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.

Test Mode		Channel/Frequency (MHz)	B=26 dB bandwidth (MHz)	Limit 11 dBm + 10 log B (dBm)	Final Limit(dBm)
U-NII-2A	802.11a	52/5260	23.84	24.77>24	24.00
		60/5300	23.69	24.75>24	24.00
		64/5320	22.77	24.57>24	24.00
	802.11n HT20	52/5260	24.16	24.83>24	24.00
		60/5300	24.65	24.92>24	24.00
		64/5320	23.88	24.78>24	24.00
	802.11n HT40	54/5270	41.49	27.18>24	24.00
		62/5310	41.26	27.16>24	24.00
	802.11ac VHT20	52/5260	24.67	24.92>24	24.00
		60/5300	23.94	24.79>24	24.00
		64/5320	24.19	24.84>24	24.00
	802.11ac VHT40	54/5270	41.34	27.16>24	24.00
62/5310		41.61	27.19>24	24.00	
802.11ac VHT80	58/5290	82.88	30.18>24	24.00	
U-NII-2C	802.11a	100/5500	23.19	24.65>24	24.00
		120/5600	22.99	24.61>24	24.00
		140/5700	23.53	24.72>24	24.00
		144/5720	16.48	23.17<24	23.17
	802.11n HT20	100/5500	24.21	24.84>24	24.00
		120/5600	23.70	24.75>24	24.00
		140/5700	23.64	24.74>24	24.00
		144/5720	16.91	23.28<24	23.28
	802.11n HT40	102/5510	41.45	27.18>24	24.00
		118/5590	41.13	27.14>24	24.00
		134/5670	41.03	27.13>24	24.00



		142/5710	36.06	26.57>24	24.00
	802.11ac VHT20	100/5500	23.57	24.72>24	24.00
		120/5600	24.00	24.80>24	24.00
		140/5700	24.04	24.81>24	24.00
		144/5720	16.78	23.25<24	23.25
	802.11ac VHT40	102/5510	42.39	27.27>24	24.00
		118/5590	41.34	27.16>24	24.00
		134/5670	41.49	27.18>24	24.00
		142/5710	36.01	26.56>24	24.00
	802.11ac VHT80	106/5530	81.98	30.14>24	24.00
		122/5610	82.96	30.19>24	24.00
		138/5690	75.95	29.80>24	24.00

Note: 250mW=24dBm

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



U-NII-1

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	14.95	14.95	24.00	PASS
	40/5200	16.79	16.79	24.00	PASS
	48/5240	16.77	16.77	24.00	PASS
802.11n HT20	36/5180	14.86	14.86	24.00	PASS
	40/5200	15.90	15.90	24.00	PASS
	48/5240	15.98	15.98	24.00	PASS
802.11n HT40	38/5190	8.58	8.74	24.00	PASS
	46/5230	15.47	15.63	24.00	PASS
802.11ac VHT20	36/5180	14.56	14.56	24.00	PASS
	40/5200	14.90	14.90	24.00	PASS
	48/5240	14.92	14.92	24.00	PASS
802.11ac VHT40	38/5190	8.14	8.30	24.00	PASS
	46/5230	14.76	14.92	24.00	PASS
802.11ac VHT80	42/5210	7.88	8.19	24.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



U-NII-2A

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	52/5260	16.99	16.99	24.00	PASS
	60/5300	16.77	16.77	24.00	PASS
	64/5320	14.67	14.67	24.00	PASS
802.11n HT20	52/5260	15.83	15.83	24.00	PASS
	60/5300	15.88	15.88	24.00	PASS
	64/5320	14.52	14.52	24.00	PASS
802.11n HT40	54/5270	15.58	15.73	24.00	PASS
	62/5310	8.83	8.99	24.00	PASS
802.11ac VHT20	52/5260	14.74	14.74	24.00	PASS
	60/5300	14.70	14.70	24.00	PASS
	64/5320	14.98	14.98	24.00	PASS
802.11ac VHT40	54/5270	14.73	14.89	24.00	PASS
	62/5310	8.81	8.96	24.00	PASS
802.11ac VHT80	58/5290	8.66	8.97	24.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



U-NII-2C

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	100/5500	14.71	14.71	24.00	PASS
	120/5600	16.71	16.71	24.00	PASS
	140/5700	12.90	12.90	24.00	PASS
	144/5720	15.99	15.99	23.17	PASS
802.11n HT20	100/5500	14.58	14.58	24.00	PASS
	120/5600	15.62	15.62	24.00	PASS
	140/5700	10.93	10.93	24.00	PASS
	144/5720	14.80	14.80	23.28	PASS
802.11n HT40	102/5510	7.77	7.93	24.00	PASS
	118/5590	15.43	15.59	24.00	PASS
	134/5670	13.44	13.59	24.00	PASS
	142/5710	15.37	15.52	24.00	PASS
802.11ac VHT20	100/5500	14.64	14.64	24.00	PASS
	120/5600	14.52	14.52	24.00	PASS
	140/5700	10.93	10.93	24.00	PASS
	144/5720	13.81	13.81	23.25	PASS
802.11ac VHT40	102/5510	7.80	7.96	24.00	PASS
	118/5590	14.38	14.54	24.00	PASS
	134/5670	13.50	13.66	24.00	PASS
	142/5710	14.36	14.52	24.00	PASS
802.11ac VHT80	106/5530	7.52	7.83	24.00	PASS
	122/5610	13.44	13.75	24.00	PASS
	138/5690	13.64	13.95	24.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					



U-NII-3

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	144/5720	9.49	9.49	30.00	PASS
	149/5745	16.51	16.51	30.00	PASS
	157/5785	16.54	16.54	30.00	PASS
	165/5825	16.51	16.51	30.00	PASS
802.11n HT20	144/5720	8.86	8.86	30.00	PASS
	149/5745	15.55	15.55	30.00	PASS
	157/5785	15.74	15.74	30.00	PASS
	165/5825	15.51	15.51	30.00	PASS
802.11n HT40	142/5710	4.23	4.39	30.00	PASS
	151/5755	15.64	15.80	30.00	PASS
	159/5795	15.36	15.51	30.00	PASS
802.11ac VHT20	144/5720	7.84	7.84	30.00	PASS
	149/5745	14.93	14.93	30.00	PASS
	157/5785	14.85	14.85	30.00	PASS
	165/5825	14.83	14.83	30.00	PASS
802.11ac VHT40	142/5710	5.11	5.26	30.00	PASS
	151/5755	14.70	14.86	30.00	PASS
	159/5795	14.70	14.85	30.00	PASS
802.11ac VHT80	138/5690	-0.86	-0.55	30.00	PASS
	155/5775	13.36	13.67	30.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

5.3. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency stability with respect to ambient temperature

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.



- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936\text{Hz}$

**Test Results**

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
3.87	0	5200.001944	5199.999798	5199.999007	5199.989928
3.87	5	5199.997151	5199.996796	5199.998365	5199.983893
3.87	10	5199.993416	5199.989362	5199.995023	5199.980158
3.87	15	5199.985948	5199.988121	5199.987092	5199.977475
3.87	20	5199.982690	5199.986763	5199.983784	5199.974381
3.87	25	5199.977544	5199.979095	5199.981810	5199.967797
3.87	30	5199.972042	5199.976176	5199.978283	5199.958853
3.87	35	5199.969622	5199.970923	5199.974683	5199.949250
3.60	25	5199.964442	5199.964348	5199.969660	5199.941896
4.45	25	5199.961134	5199.961081	5199.960746	5199.934971
Max. ΔMHz		-0.038866	-0.038919	-0.039254	-0.065029
PPM		-7.474201	-7.484441	-7.548845	-12.505647

Voltage (V)	Temperature (°C)	U-NII-2A Test Results			
		5300MHz			
		1min	2min	5min	10min
3.88	0	5300.000793	5299.998940	5299.990001	5299.988581
3.88	5	5299.991610	5299.990983	5299.980317	5299.983255
3.88	10	5299.987663	5299.981775	5299.979902	5299.978417
3.88	15	5299.978558	5299.972916	5299.972010	5299.972663
3.88	20	5299.975498	5299.968488	5299.965399	5299.966608
3.88	25	5299.970354	5299.967689	5299.955614	5299.963304
3.88	30	5299.963550	5299.964353	5299.949177	5299.958919
3.88	35	5299.962335	5299.955764	5299.942550	5299.952444
3.60	25	5299.953685	5299.950611	5299.941387	5299.943045
4.48	25	5299.948580	5299.946267	5299.941096	5299.940313
Max. ΔMHz		-0.051420	-0.053733	-0.058904	-0.059687
PPM		-9.701864	-10.138214	-11.113882	-11.261784



Voltage (V)	Temperature (°C)	U-NII-2C Test Results			
		5580MHz			
		1min	2min	5min	10min
3.88	0	5579.990980	5579.984262	5579.981781	5579.976852
3.88	5	5579.984774	5579.983226	5579.979193	5579.970232
3.88	10	5579.983058	5579.979211	5579.973018	5579.960517
3.88	15	5579.976184	5579.970367	5579.970684	5579.951382
3.88	20	5579.967714	5579.963474	5579.962009	5579.949463
3.88	25	5579.960139	5579.954599	5579.955487	5579.943586
3.88	30	5579.958113	5579.949036	5579.950070	5579.933628
3.88	35	5579.956006	5579.941528	5579.946219	5579.926140
3.60	25	5579.951114	5579.931802	5579.943178	5579.918073
4.48	25	5579.945426	5579.925974	5579.933711	5579.910211
3.88	0	5579.990980	5579.984262	5579.981781	5579.976852
Max. ΔMHz		-0.054574	-0.074026	-0.066289	-0.089789
PPM		-9.780238	-13.266224	-11.879679	-16.091235

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
3.88	0	5785.004598	5785.000126	5784.991184	5784.984148
3.88	5	5785.001350	5784.996758	5784.983721	5784.976876
3.88	10	5784.996186	5784.994781	5784.978329	5784.972612
3.88	15	5784.987043	5784.989529	5784.970184	5784.968204
3.88	20	5784.985724	5784.988569	5784.965111	5784.963600
3.88	25	5784.984703	5784.979835	5784.961845	5784.960430
3.88	30	5784.975657	5784.975956	5784.960810	5784.955257
3.88	35	5784.971898	5784.968225	5784.954183	5784.948815
3.60	25	5784.970729	5784.964797	5784.951052	5784.940275
4.48	25	5784.962638	5784.964207	5784.943190	5784.934536
3.88	0	5785.004598	5785.000126	5784.991184	5784.984148
Max. ΔMHz		-0.037362	-0.035793	-0.056810	-0.065464
PPM		-6.458412	-6.187158	-9.820142	-11.316147

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 1MHz, VBW =3MHz for the band 5.150-5.250GHz, 5.250-5.350GHz, 5.470-5.725GHz.
 Set RBW = 470kHz, VBW =1.5MHz for the band 5.725-5.850GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup



Limits

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2) / Part 15.407(a)(3)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the



amount in dB that the directional gain of the antenna exceeds 6 dBi.

Frequency Bands/MHz	Limits
5150-5250	11dBm/MHz
5.25-5.35 GHz and 5.47-5.725 GHz	11dBm/MHz
5725-5850	30dBm/500kHz

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

**Test Results:**

Note: Power Spectral Density =Read Value+Duty cycle correction factor

U-NII-1

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36/5180	4.96	4.96	11.00	PASS
	40/5200	6.96	6.96	11.00	PASS
	48/5240	6.83	6.83	11.00	PASS
802.11n HT20	36/5180	4.56	4.56	11.00	PASS
	40/5200	5.81	5.81	11.00	PASS
	48/5240	5.81	5.81	11.00	PASS
802.11n HT40	38/5190	-4.37	-4.21	11.00	PASS
	46/5230	2.39	2.55	11.00	PASS
802.11ac VHT20	36/5180	4.26	4.26	11.00	PASS
	40/5200	4.54	4.54	11.00	PASS
	48/5240	4.74	4.74	11.00	PASS
802.11ac VHT40	38/5190	-4.89	-4.73	11.00	PASS
	46/5230	1.80	1.96	11.00	PASS
802.11ac VHT80	42/5210	-8.31	-8.00	11.00	PASS



U-NII-2A

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	52/5260	7.04	7.04	11.00	PASS
	60/5300	6.80	6.80	11.00	PASS
	64/5320	4.64	4.64	11.00	PASS
802.11n HT20	52/5260	5.47	5.47	11.00	PASS
	60/5300	5.96	5.96	11.00	PASS
	64/5320	4.31	4.31	11.00	PASS
802.11n HT40	54/5270	2.38	2.54	11.00	PASS
	62/5310	-4.55	-4.39	11.00	PASS
802.11ac VHT20	52/5260	4.38	4.38	11.00	PASS
	60/5300	4.47	4.47	11.00	PASS
	64/5320	4.62	4.62	11.00	PASS
802.11ac VHT40	54/5270	1.58	1.74	11.00	PASS
	62/5310	-4.47	-4.31	11.00	PASS
802.11ac VHT80	58/5290	-7.41	-7.10	11.00	PASS

U-NII-2C

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	100/5500	4.71	4.71	11.00	PASS
	120/5600	6.82	6.82	11.00	PASS
	140/5700	2.89	2.89	11.00	PASS
	144/5720	6.69	6.69	11.00	PASS
802.11n HT20	100/5500	4.55	4.55	11.00	PASS
	120/5600	5.23	5.23	11.00	PASS
	140/5700	0.72	0.72	11.00	PASS
	144/5720	5.45	5.45	11.00	PASS
802.11n HT40	102/5510	-5.32	-5.16	11.00	PASS
	118/5590	2.15	2.31	11.00	PASS
	134/5670	0.33	0.49	11.00	PASS
	142/5710	2.44	2.60	11.00	PASS
802.11ac VHT20	100/5500	4.57	4.57	11.00	PASS
	120/5600	4.31	4.31	11.00	PASS
	140/5700	0.82	0.82	11.00	PASS
	144/5720	4.52	4.52	11.00	PASS
802.11ac VHT40	102/5510	-5.20	-5.04	11.00	PASS
	118/5590	1.03	1.19	11.00	PASS
	134/5670	0.16	0.32	11.00	PASS
	142/5710	1.60	1.76	11.00	PASS
802.11ac VHT80	106/5530	-8.60	-8.29	11.00	PASS
	122/5610	-2.59	-2.28	11.00	PASS
	138/5690	-2.16	-1.85	11.00	PASS



U-NII-3

Mode	Channel Number	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	144/5720	2.42	2.69	30.00	PASS
	149/5745	3.07	3.34	30.00	PASS
	157/5785	3.08	3.35	30.00	PASS
	165/5825	3.56	3.83	30.00	PASS
802.11n HT20	144/5720	0.92	1.19	30.00	PASS
	149/5745	2.12	2.39	30.00	PASS
	157/5785	2.26	2.53	30.00	PASS
	165/5825	2.25	2.52	30.00	PASS
802.11n HT40	142/5710	0.92	1.35	30.00	PASS
	151/5755	-0.88	-0.45	30.00	PASS
	159/5795	-1.2	-0.77	30.00	PASS
802.11ac VHT20	144/5720	-0.23	0.04	30.00	PASS
	149/5745	1.34	1.61	30.00	PASS
	157/5785	1.4	1.67	30.00	PASS
	165/5825	1.51	1.78	30.00	PASS
802.11ac VHT40	142/5710	-3.34	-2.91	30.00	PASS
	151/5755	-1.89	-1.46	30.00	PASS
	159/5795	-2.06	-1.63	30.00	PASS
802.11ac VHT80	138/5690	-8.63	-8.05	30.00	PASS
	155/5775	-5.67	-5.09	30.00	PASS

Note: PSD=Read Value+Duty cycle correction factor +10*LOG(500/470) correction factor


U-NII-1, 802.11a, Channel No.: 36



U-NII-1, 802.11n HT20, Channel No.: 36




U-NII-1, 802.11a, Channel No.: 40

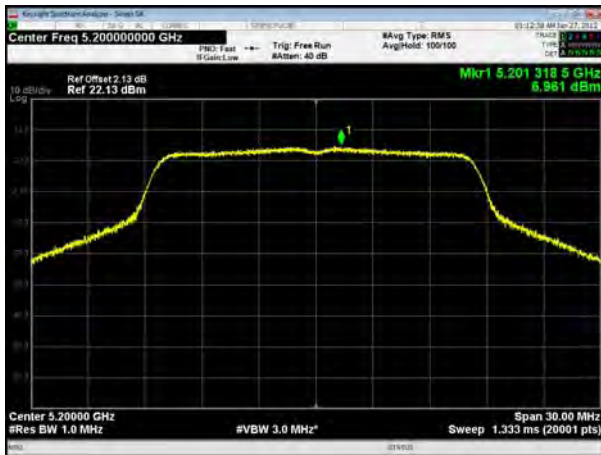

U-NII-1, 802.11n HT20, Channel No.: 40



U-NII-1, 802.11a, Channel No.: 48

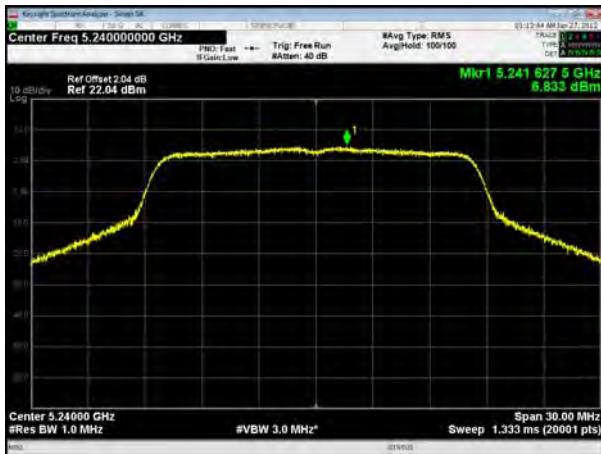

U-NII-1, 802.11n HT20, Channel No.: 48



U-NII-1, 802.11n HT40, Channel No.: 38



U-NII-1, 802.11ac VHT20, Channel No.: 36



U-NII-1, 802.11n HT40, Channel No.: 46




U-NII-1, 802.11ac VHT20, Channel No.: 40



U-NII-1, 802.11ac VHT40, Channel No.: 38



U-NII-1, 802.11ac VHT20, Channel No.: 48

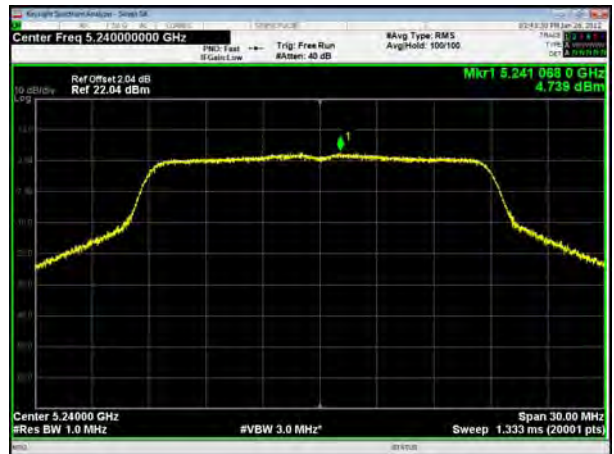





U-NII-1, 802.11ac VHT40, Channel No.: 46




U-NII-1, 802.11ac VHT80, Channel No.: 42

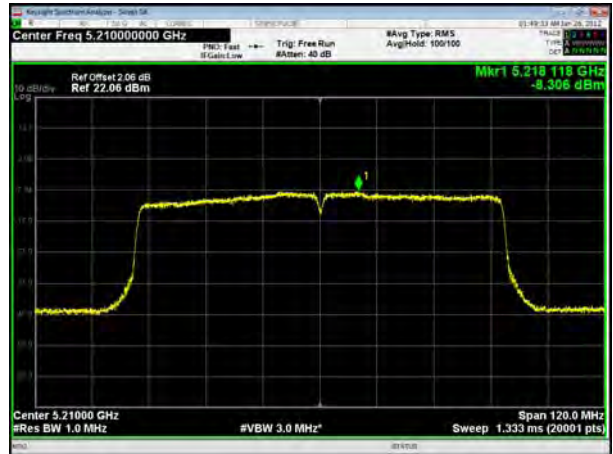


U-NII-2A, 802.11a, Channel No.: 52

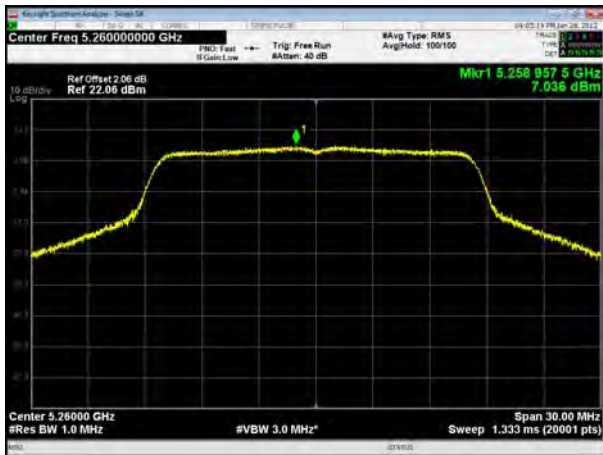

U-NII-2A, 802.11n HT20, Channel No.: 52

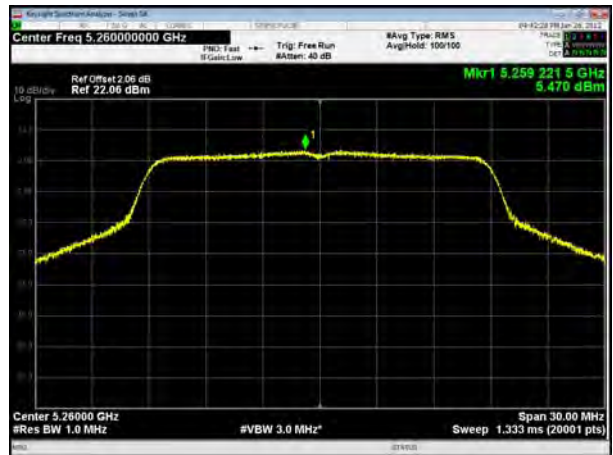

U-NII-2A, 802.11a, Channel No.: 60

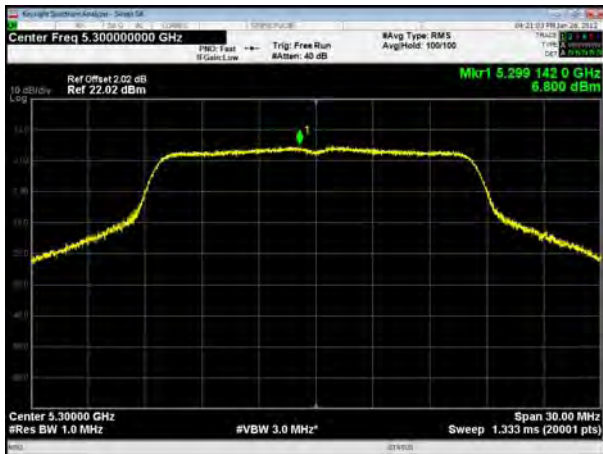

U-NII-2A, 802.11n HT20, Channel No.: 60






U-NII-2A, 802.11a, Channel No.: 64




U-NII-2A, 802.11n HT20, Channel No.: 64

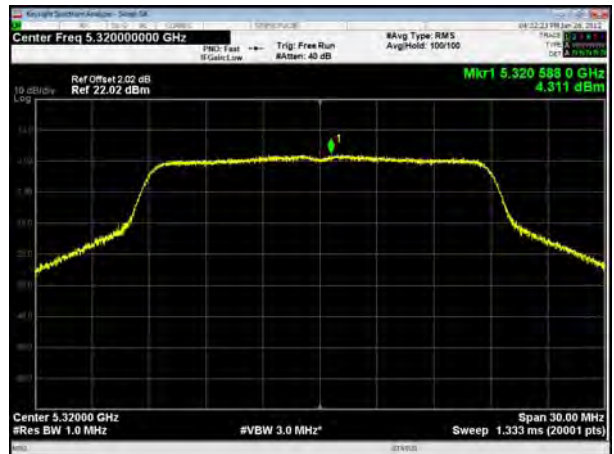


U-NII-2A, 802.11n HT40, Channel No.: 54




U-NII-2A, 802.11ac VHT20, Channel No.:52

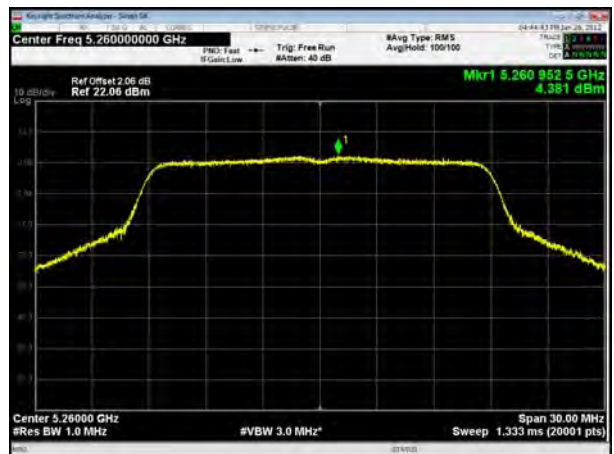

U-NII-2A, 802.11n HT40, Channel No.: 62

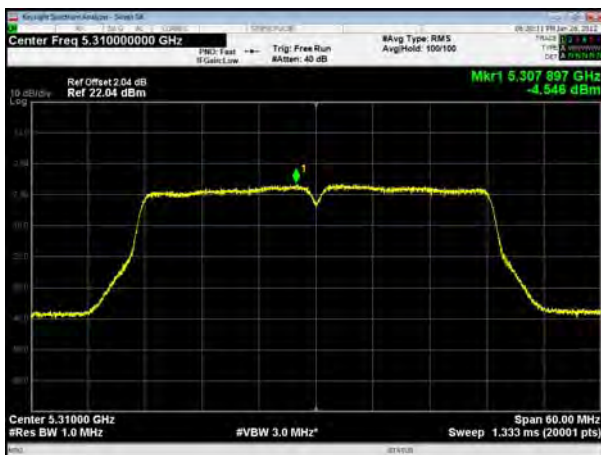


U-NII-2A, 802.11ac VHT20, Channel No.: 60

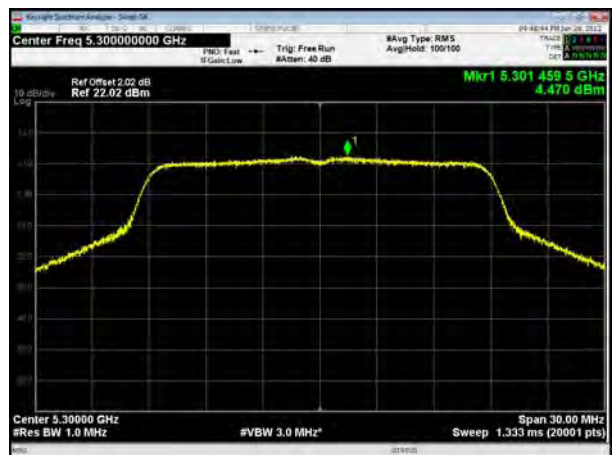





U-NII-2A, 802.11ac VHT40, Channel No.: 54

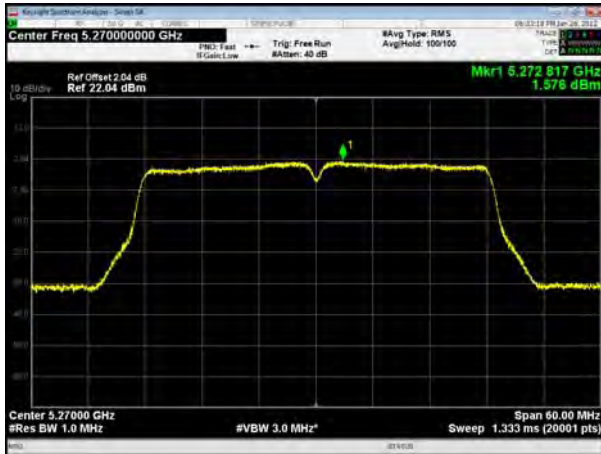


U-NII-2A, 802.11ac VHT20, Channel No.: 64

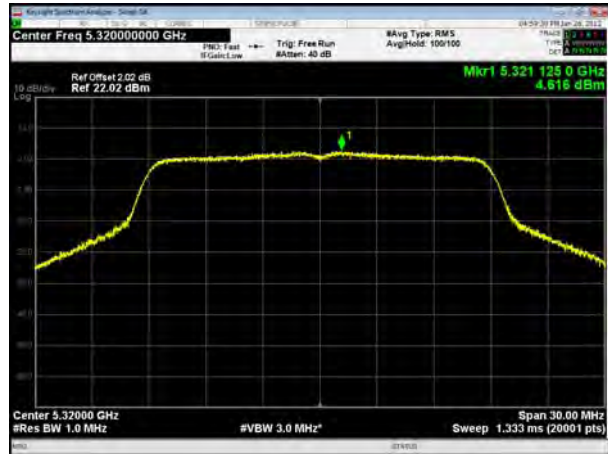


U-NII-2A, 802.11ac VHT40, Channel No.: 62

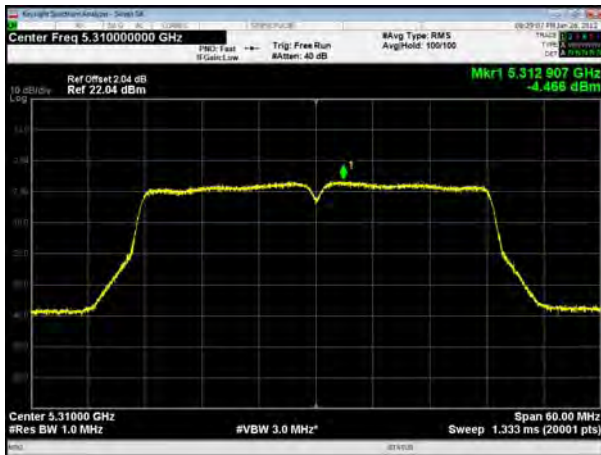


U-NII-2A, 802.11ac VHT80, Channel No.: 58

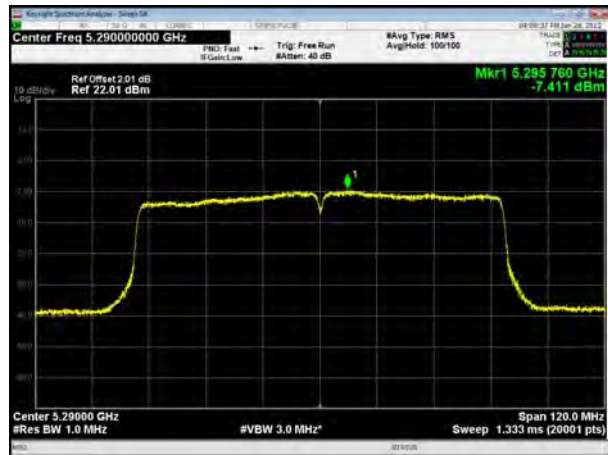


U-NII-2C, 802.11a, Channel No.: 100

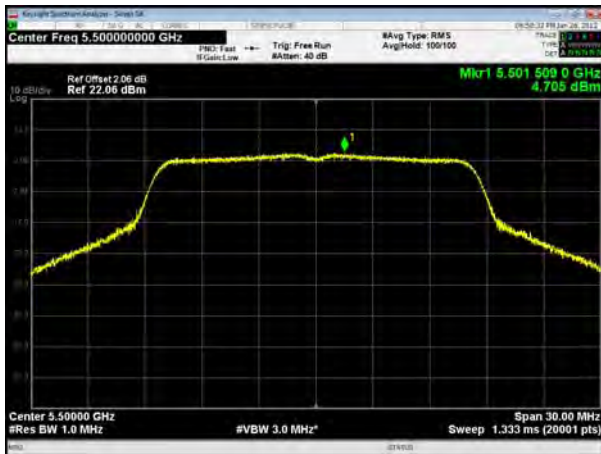


U-NII-2C, 802.11n HT20, Channel No.: 100

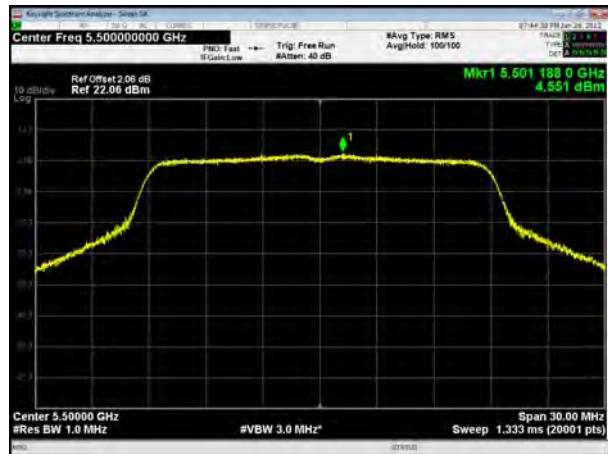


U-NII-2C, 802.11a, Channel No.: 120

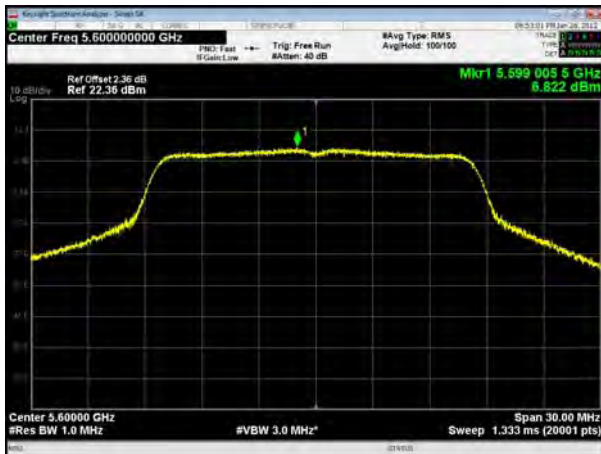

U-NII-2C, 802.11n HT20, Channel No.: 120

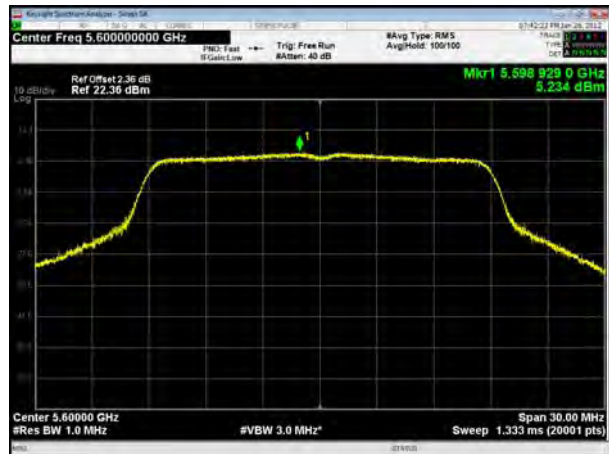

U-NII-2C, 802.11a, Channel No.: 140

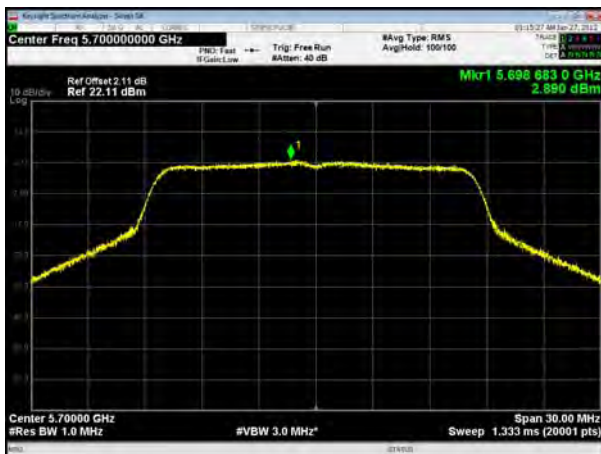


U-NII-2C, 802.11n HT20, Channel No.: 140



U-NII-2C, 802.11a, Channel No.: 144




U-NII-2C, 802.11n HT20, Channel No.: 144

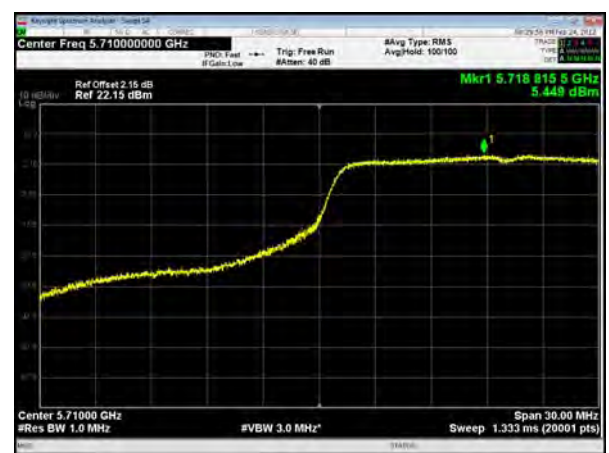




U-NII-2C, 802.11n HT40, Channel No.: 102

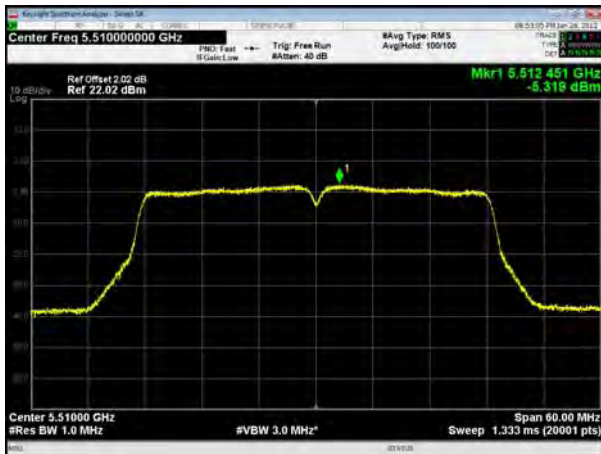


U-NII-2C, 802.11ac VHT20, Channel No.: 100

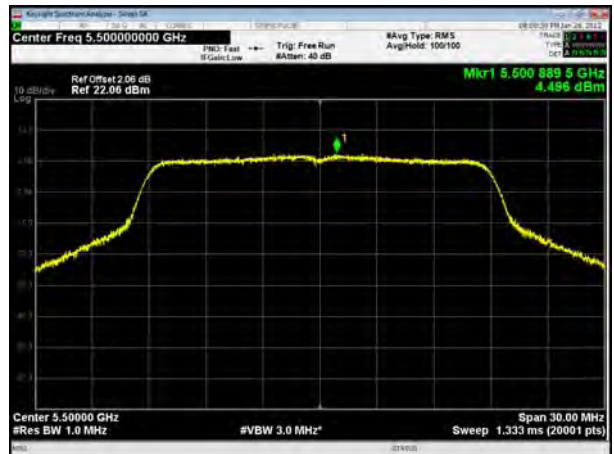


U-NII-2C, 802.11n HT40, Channel No.: 118




U-NII-2C, 802.11ac VHT20, Channel No.: 120

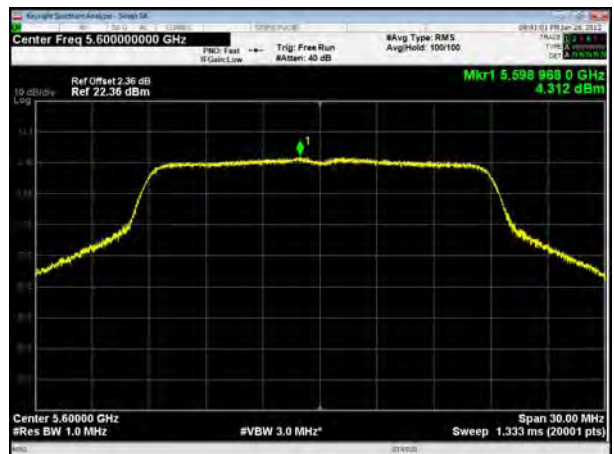

U-NII-2C, 802.11n HT40, Channel No.: 134

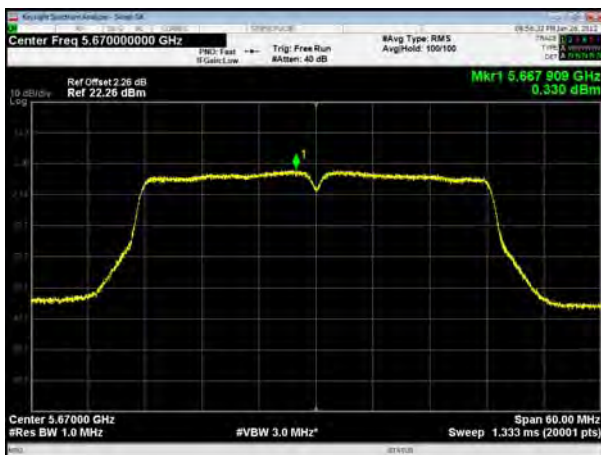


U-NII-2C, 802.11ac VHT20, Channel No.: 140

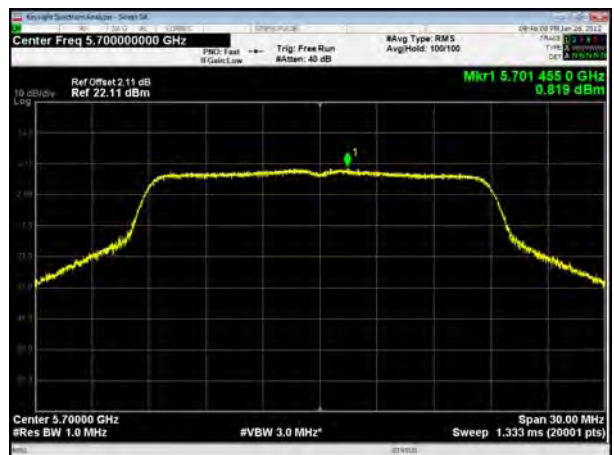




U-NII-2C, 802.11n HT40, Channel No.: 142

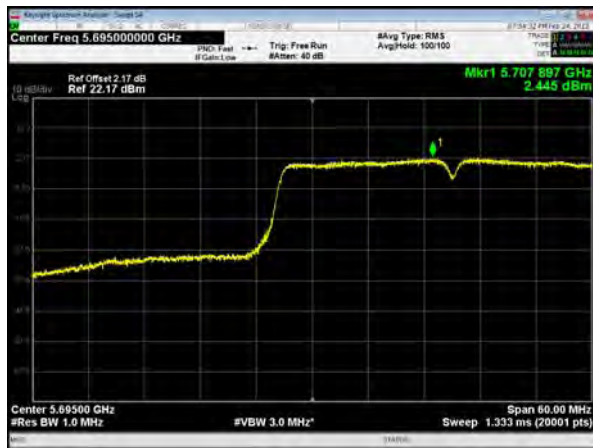

U-NII-2C, 802.11ac VHT20, Channel No.: 144

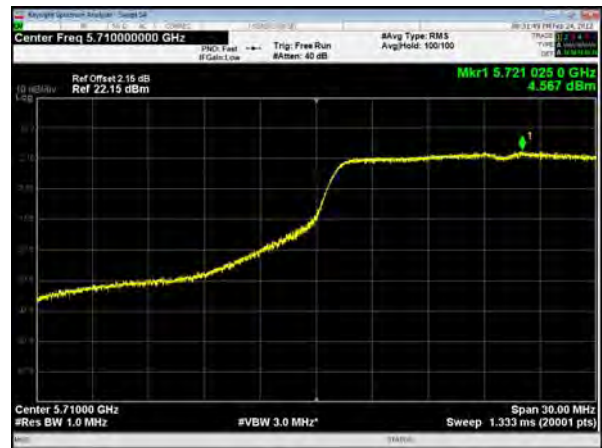


U-NII-2C, 802.11ac VHT40, Channel No.: 102




U-NII-2C, 802.11ac VHT40, Channel No.: 118




U-NII-2C, 802.11ac VHT40, Channel No.: 134

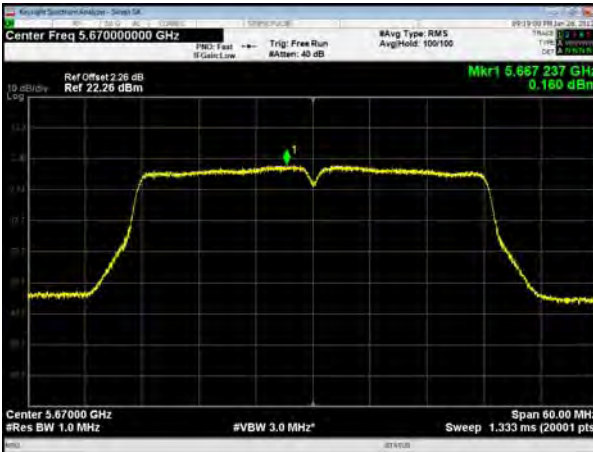


U-NII-2C, 802.11ac VHT40, Channel No.: 142

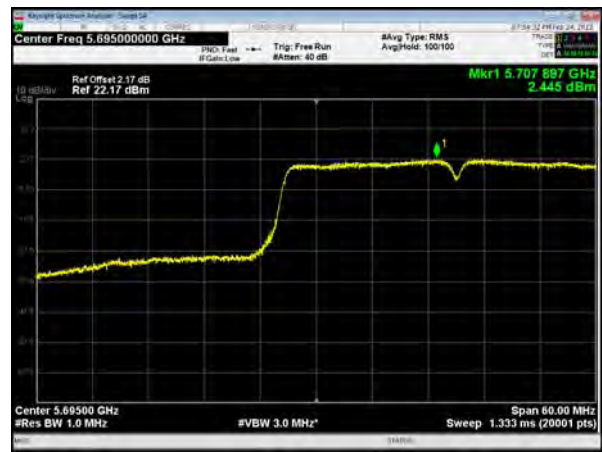


U-NII-2C, 802.11ac VHT80, Channel No.: 106

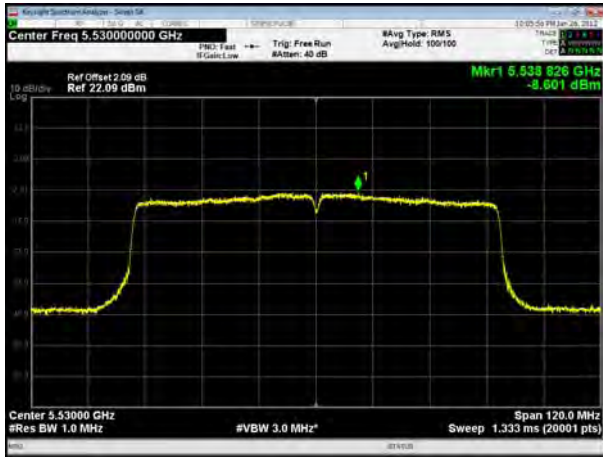


U-NII-2C, 802.11ac VHT80, Channel No.: 122

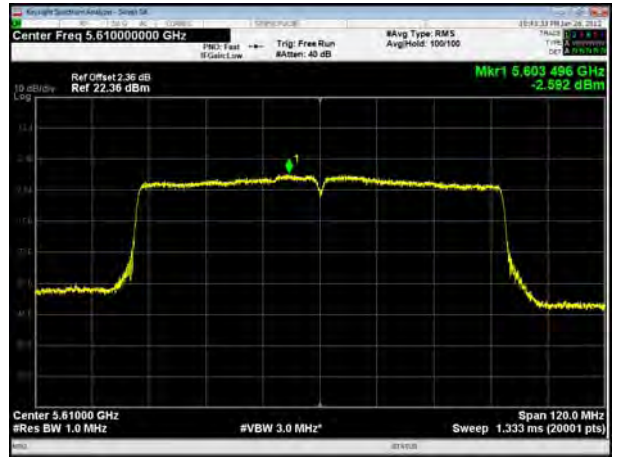


U-NII-2C, 802.11ac VHT80, Channel No.: 138

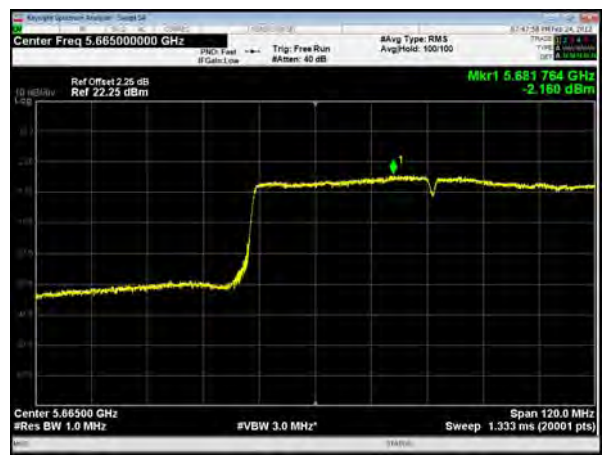

U-NII-3, 802.11a, Channel No.: 144

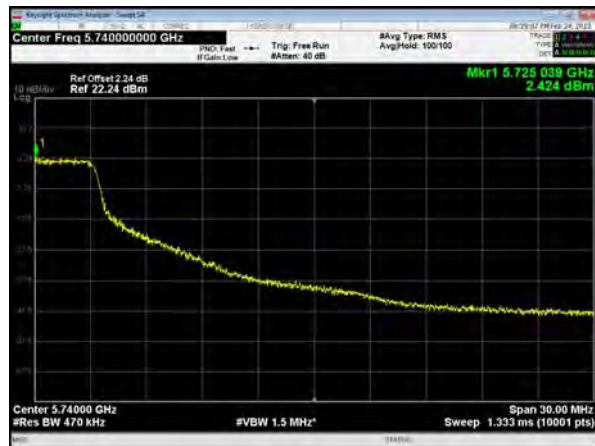


U-NII-3, 802.11n HT20, Channel No.: 144

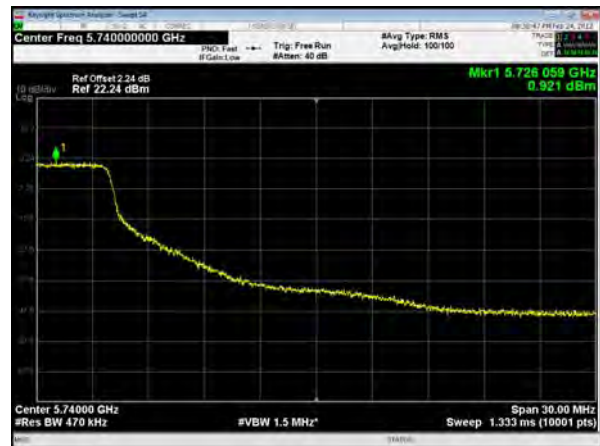

U-NII-3, 802.11a, Channel No.: 149




U-NII-3, 802.11n HT20, Channel No.: 149

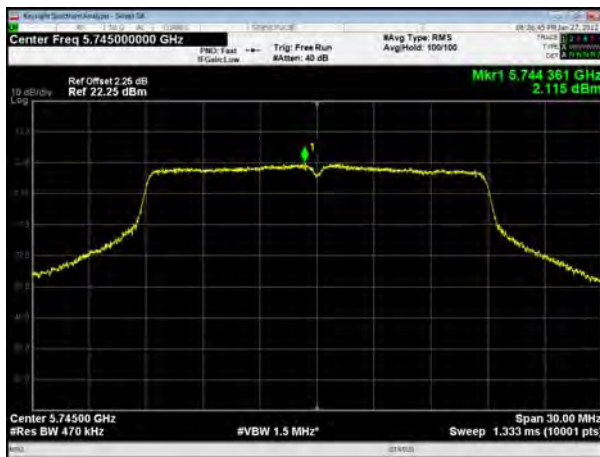

U-NII-3, 802.11a, Channel No.: 157



U-NII-3, 802.11n HT20, Channel No.: 157

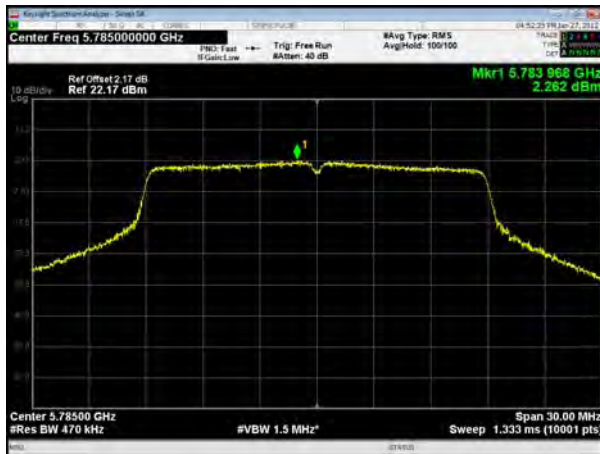


U-NII-3, 802.11a, Channel No.: 165




U-NII-3, 802.11n HT20, Channel No.: 165




U-NII-3, 802.11n HT40, Channel No.: 144

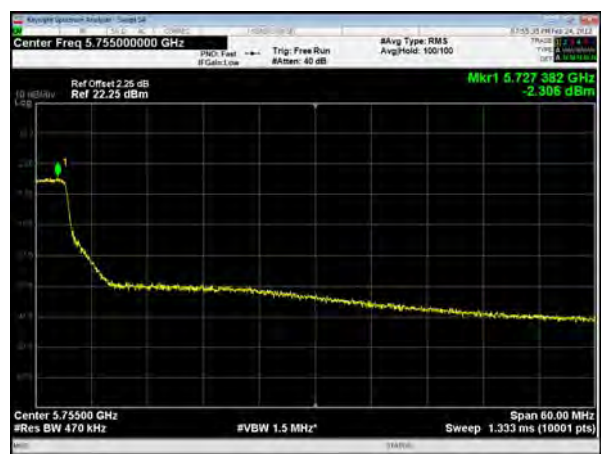


U-NII-3, 802.11ac VHT20, Channel No.: 144

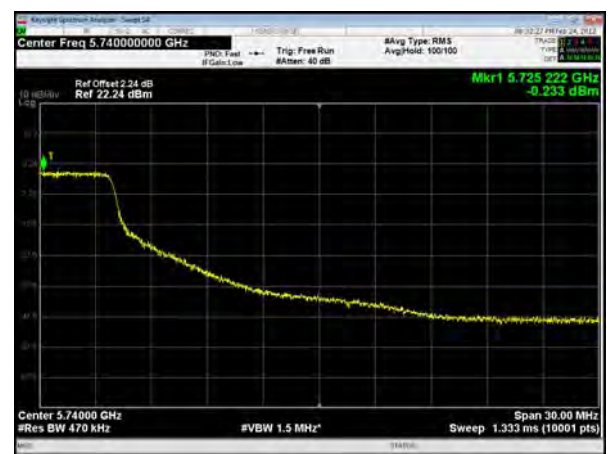

U-NII-3, 802.11n HT40, Channel No.: 151

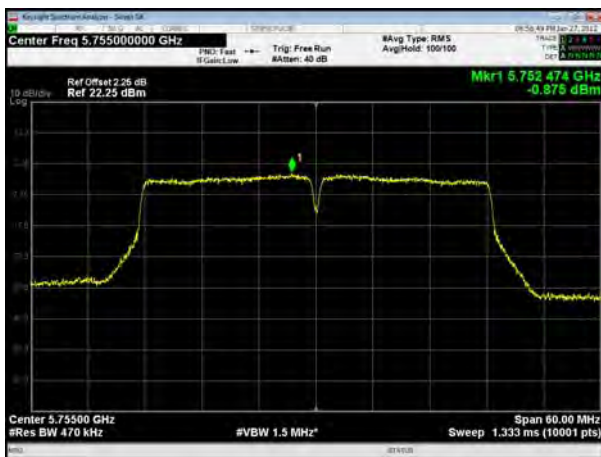


U-NII-3, 802.11ac VHT20, Channel No.: 149

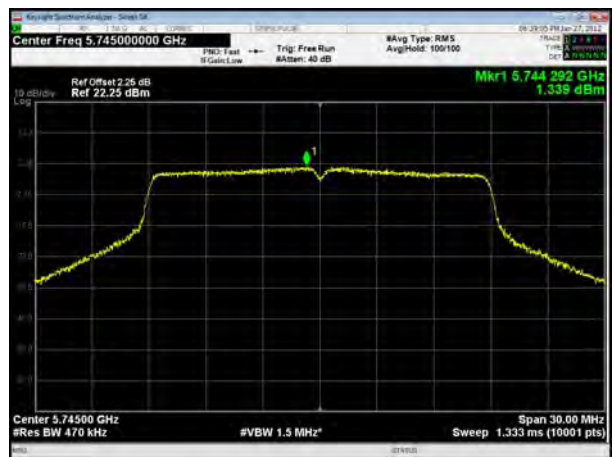





U-NII-3, 802.11n HT40, Channel No.: 159

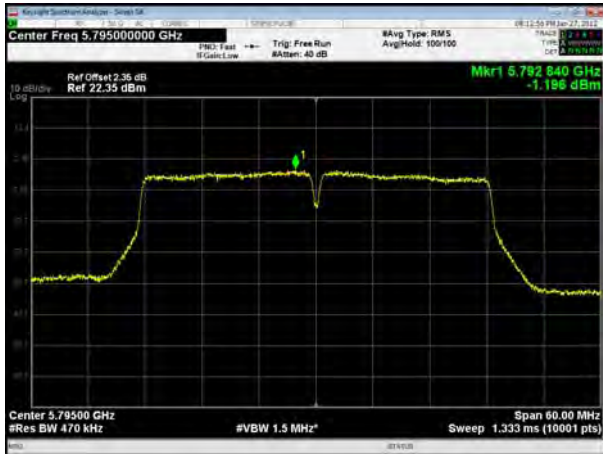


U-NII-3, 802.11ac VHT20, Channel No.: 157

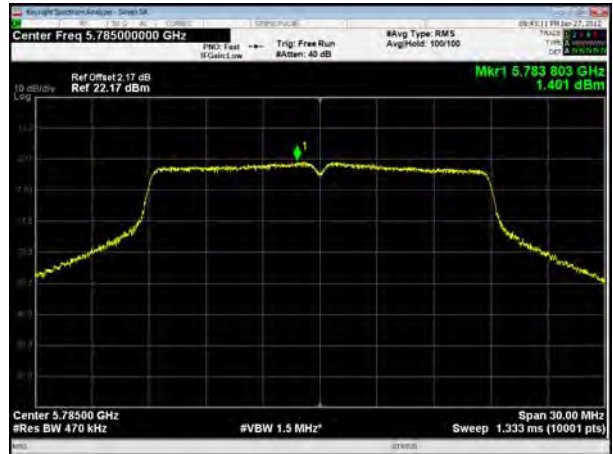

U-NII-3, 802.11ac VHT40, Channel No.: 144

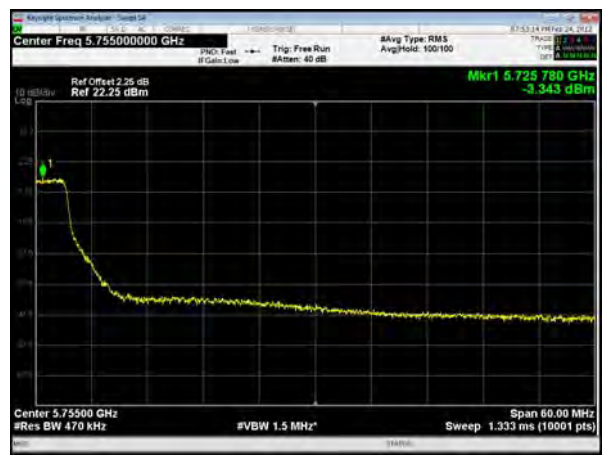


U-NII-3, 802.11ac VHT20, Channel No.: 165

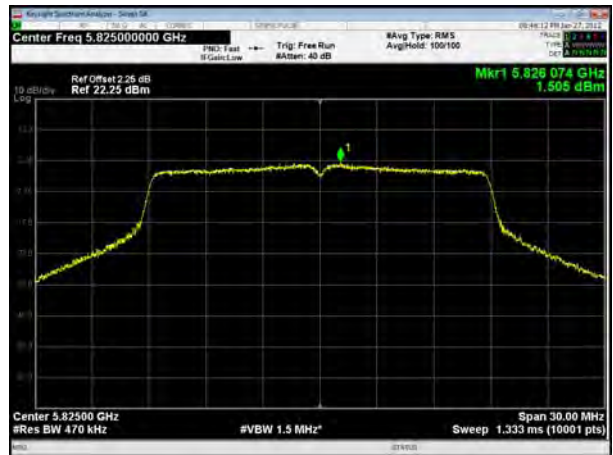

U-NII-3, 802.11ac VHT40, Channel No.: 151




U-NII-3, 802.11ac VHT80, Channel No.: 138

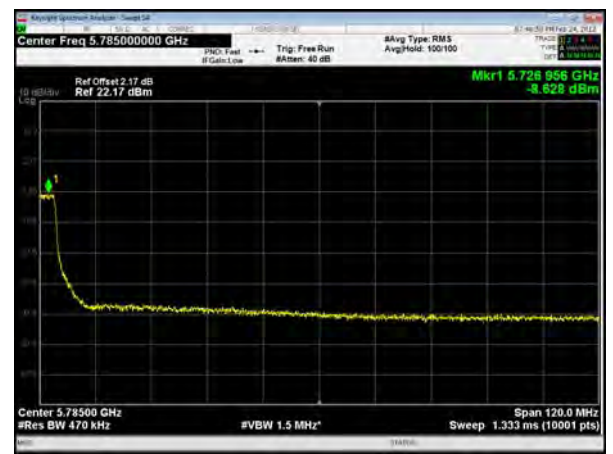




U-NII-3, 802.11ac VHT40, Channel No.: 159

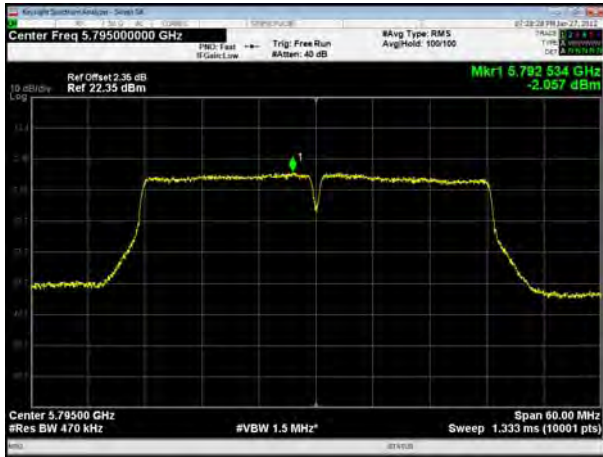

U-NII-3, 802.11ac VHT80, Channel No.: 155

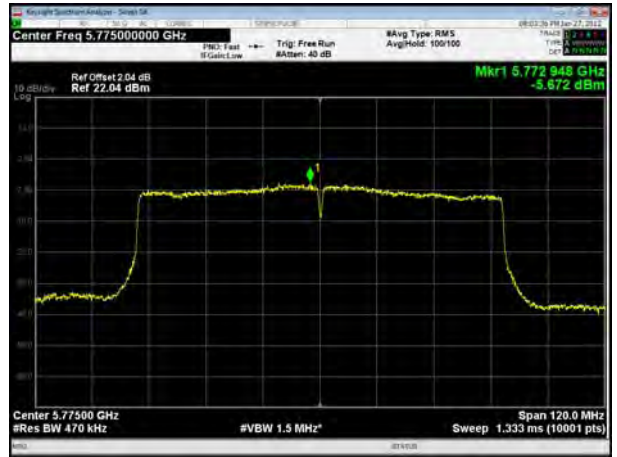



5.5. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific



emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

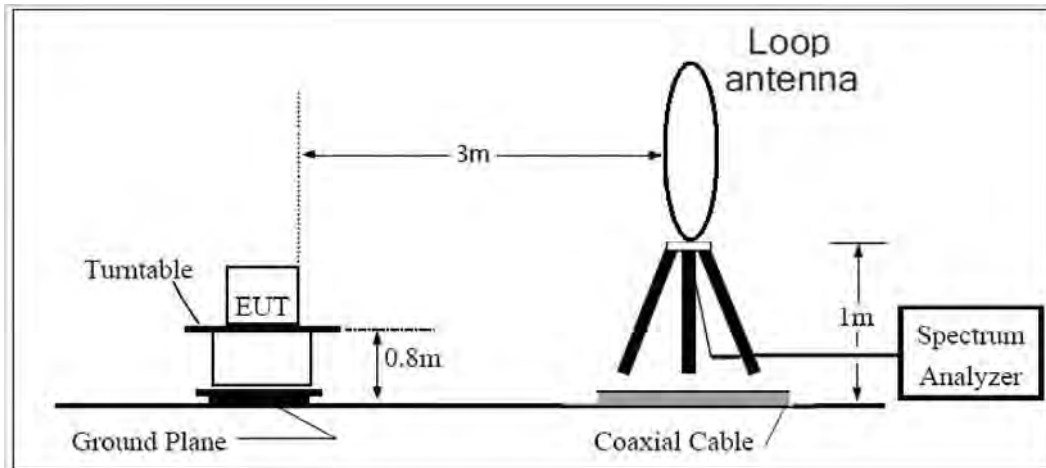

30MHz~~~ 1GHz

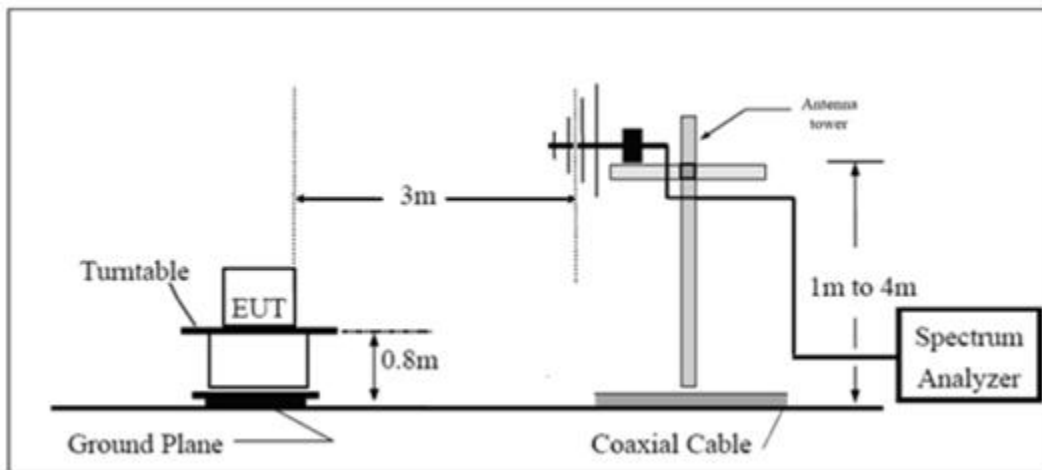

Above 1GHz

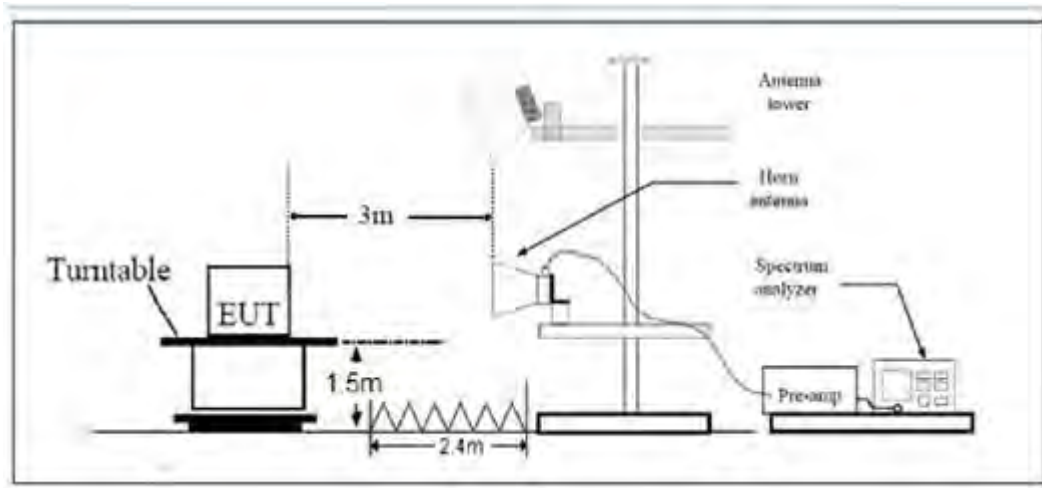

Note: Area side:2.4mX3.6m

**Limits**

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54



MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB



Test Results:

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.


A font (dB μ V/m) in the test plot =(dB μ V/m)

A font (dB V/) in the test plot =(dB μ V/m)


The signal beyond the limit is carrier.

U-NII-1


802.11a-Channel 36: Peak + Average

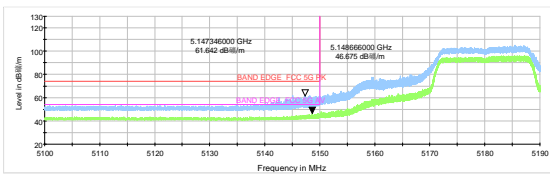


802.11a-Channel 48: Peak + Average

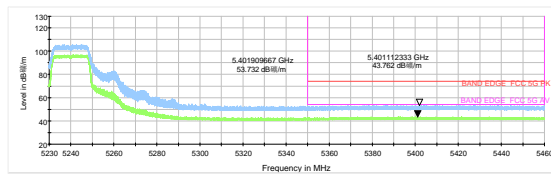


802.11n HT20-Channel 36: Peak + Average

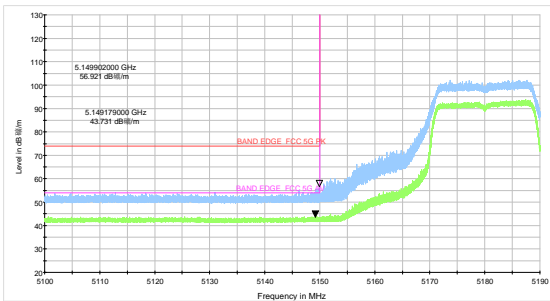


802.11n HT20-Channel 48: Peak + Average

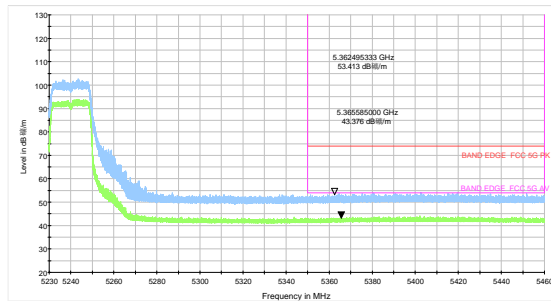


802.11n HT40-Channel 38: Peak + Average



802.11n HT40-Channel 46: Peak + Average




802.11ac VHT80 -Channel 42: Peak + Average

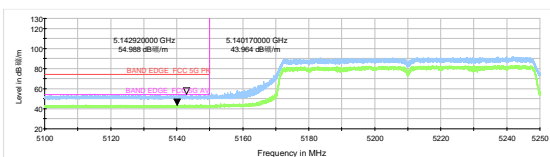




U-NII-2A


802.11a-Channel 52: Peak + Average

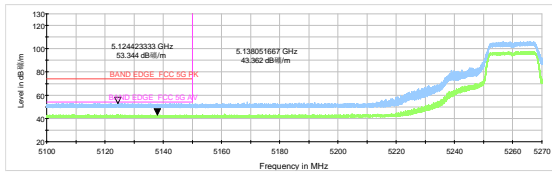


802.11a-Channel 60: Peak + Average

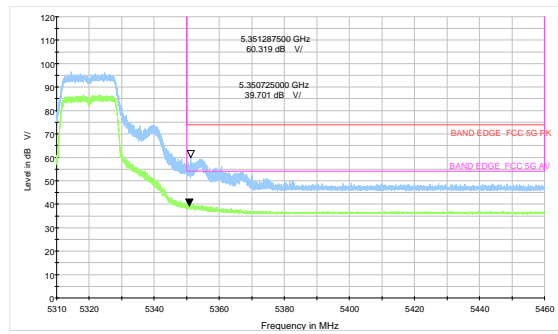


802.11a-Channel 52: Peak + Average

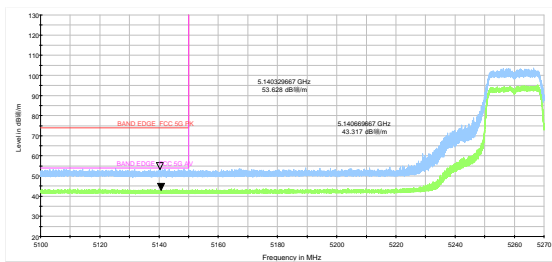


802.11a-Channel 60: Peak + Average

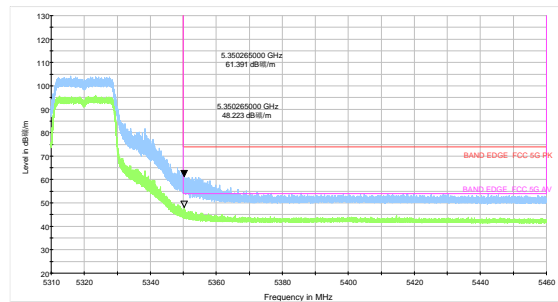


802.11n HT40-Channel 54: Peak + Average



802.11n HT40-Channel 62: Peak + Average




802.11ac VHT80 -Channel 58: Peak + Average

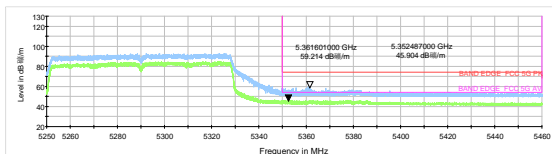




U-NII-2C


802.11a-Channel 100: Peak + Average

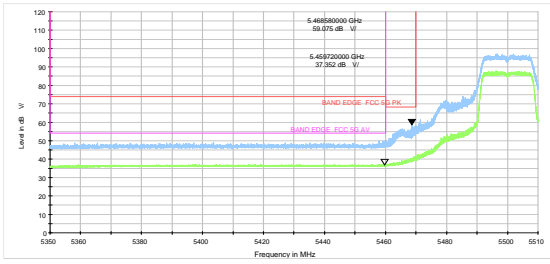


802.11n HT20-Channel 100: Peak + Average

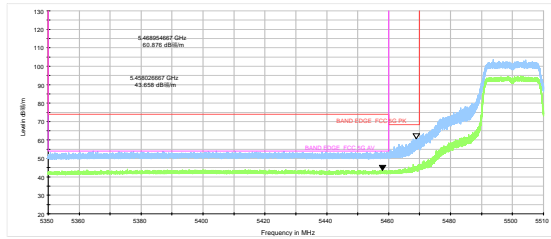


802.11a-Channel 104: Peak + Average

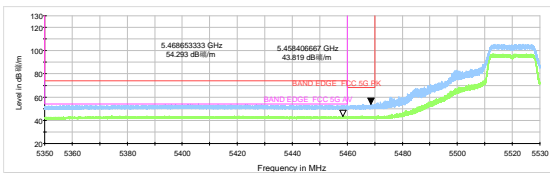


802.11n HT20-Channel 140: Peak

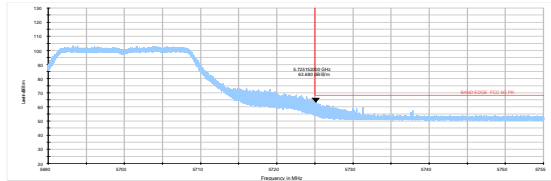


802.11a-Channel 140: Peak

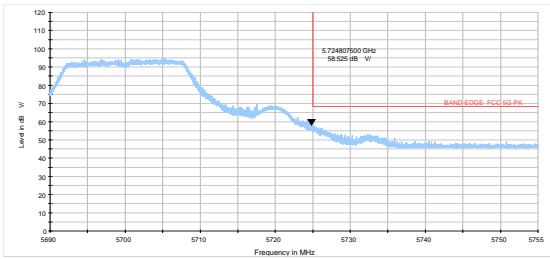


802.11n HT20-Channel 144: Peak

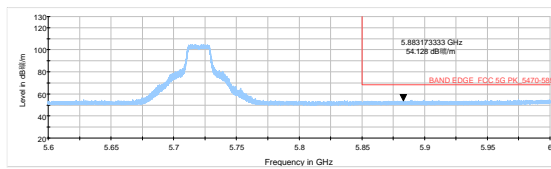


802.11a-Channel 144: Peak




802.11n HT40-Channel 134: Peak

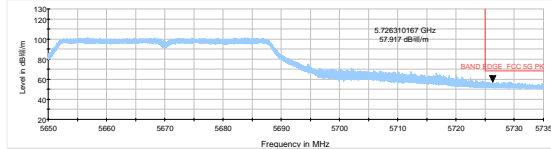


802.11n HT40-Channel 102: Peak + Average




802.11ac VHT80 -Channel 106: Peak + Average

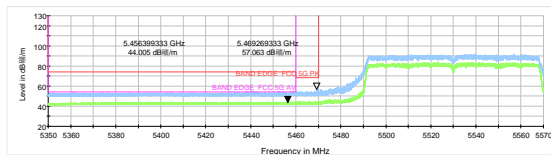

802.11n HT40-Channel 142: Average

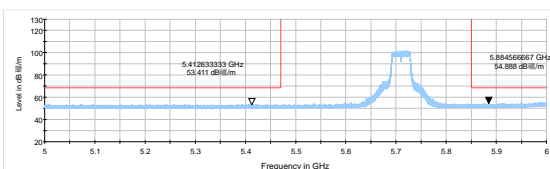


802.11ac VHT80 -Channel 138: Peak

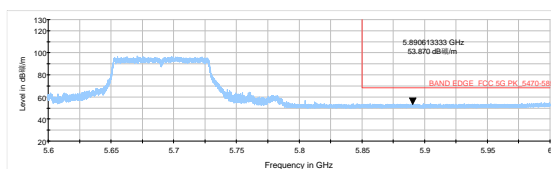




802.11ac VHT80 –Channel 122: Peak

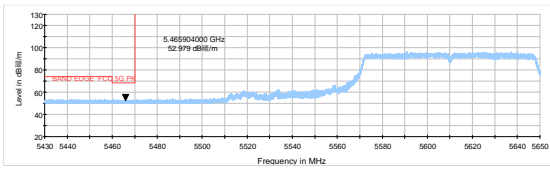




U-NII-3


802.11a-Channel 149: Peak

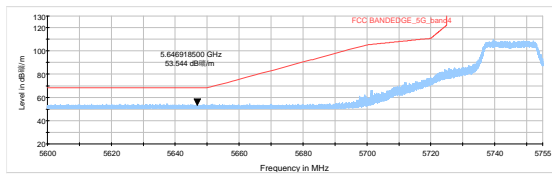


802.11a-Channel 165: Peak

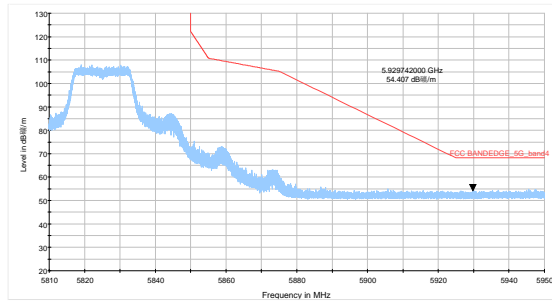


802.11n HT20-Channel 149: Peak

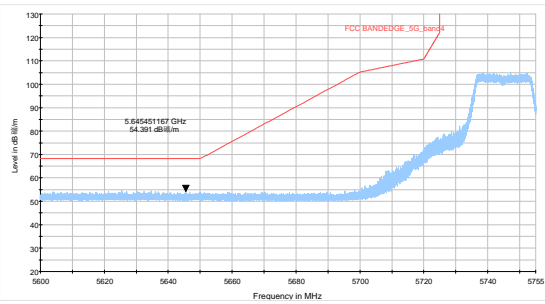


802.11n HT20-Channel 165: Peak

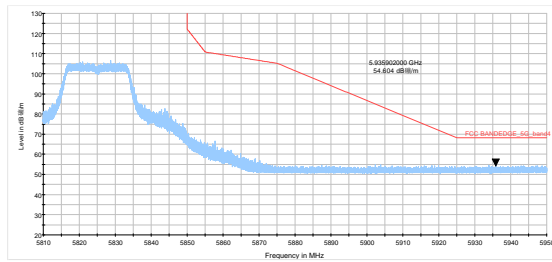


802.11n HT40-Channel 151: Peak

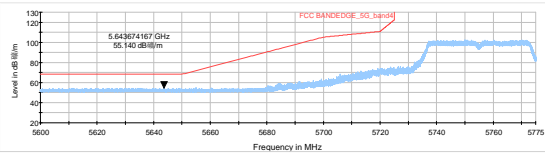

802.11n HT40-Channel 159: Peak

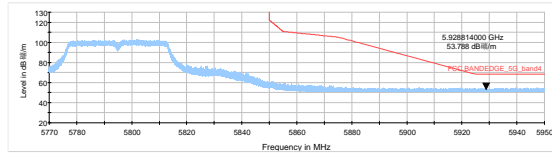

802.11ac VHT80- Channel 155: Peak

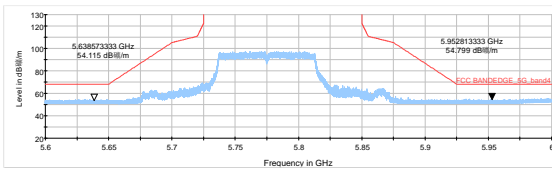



Result of RE

Test result


A font (Level in dB_{μV/m}) in the test plot =(level in dB μ V/m)

A font (Level in dB μ V/) in the test plot =(level in dB μ V/m)

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT40), Channel 151 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Continuous TX mode:

FCC RE 9K-90KHz AV

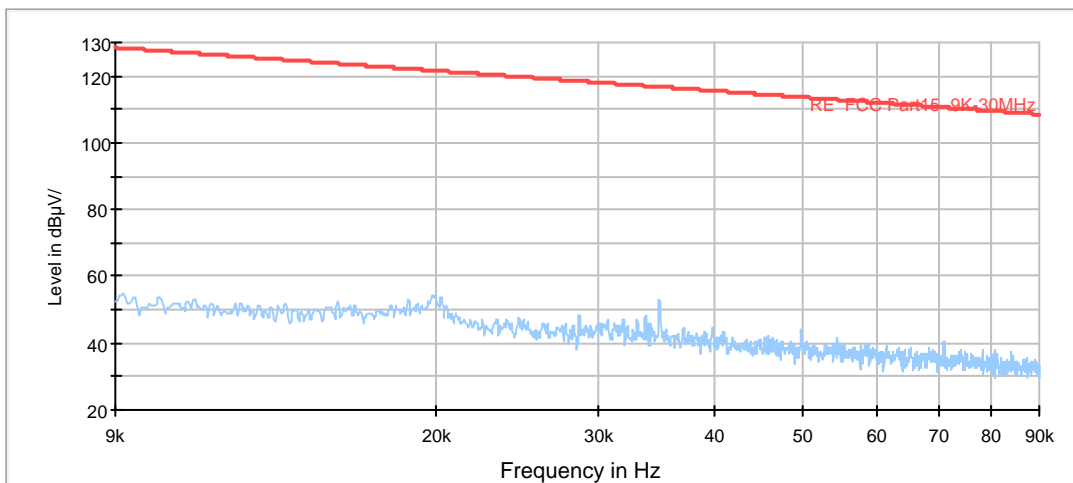


Radiates Emission from 9KHz to 90KHz

FCC RE 90K-110KHz QP

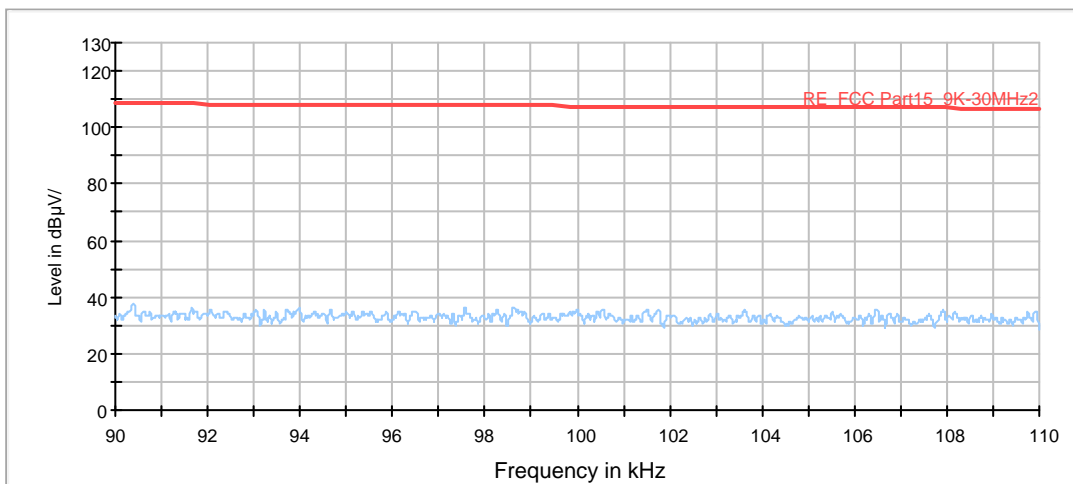


Radiates Emission from 90KHz to 110KHz

FCC RE 110K-490KHz AV

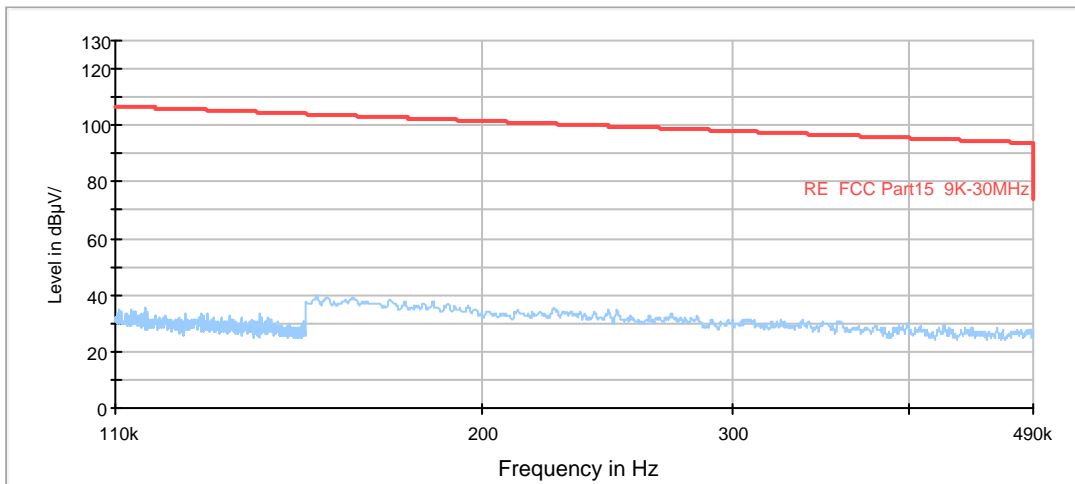


Radiates Emission from 110KHz to 490KHz

FCC RE 490K-30MHz QP

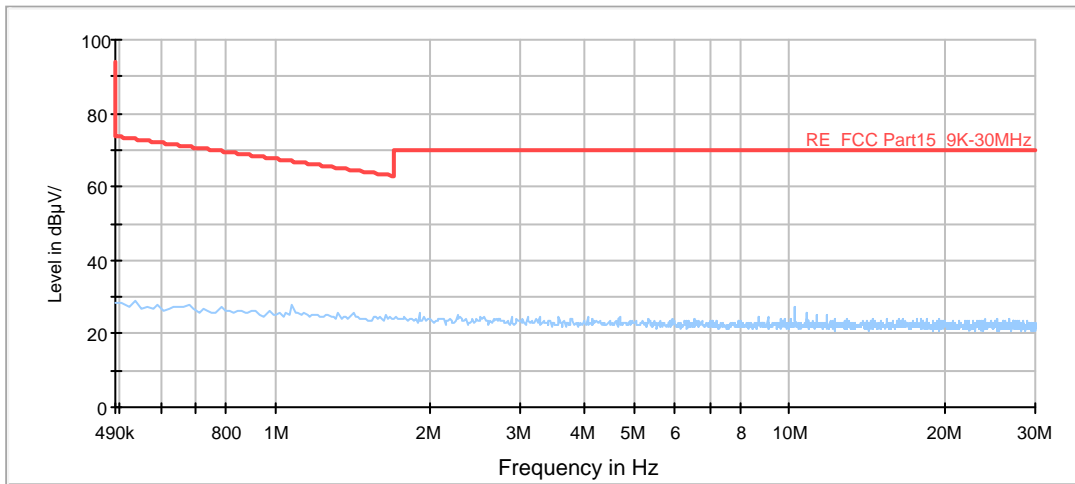

Radiates Emission from 490KHz to 30MHz

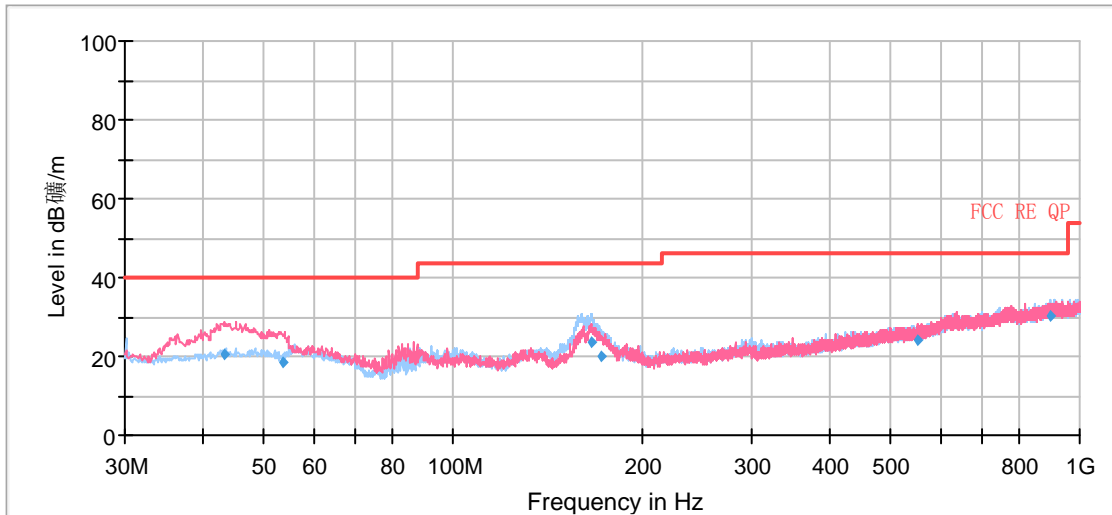

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
43.34	20.56	118.0	V	356.00	14	19.44	40.00
53.45	18.57	105.0	V	0.00	13	21.43	40.00
166.32	23.51	196.0	H	299.00	10	19.99	43.50
172.84	20.17	125.0	H	107.00	10	23.33	43.50
550.48	24.04	225.0	V	72.00	20	21.96	46.00
895.40	30.51	100.0	H	13.00	25	15.49	46.00

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak



802.11a CH36

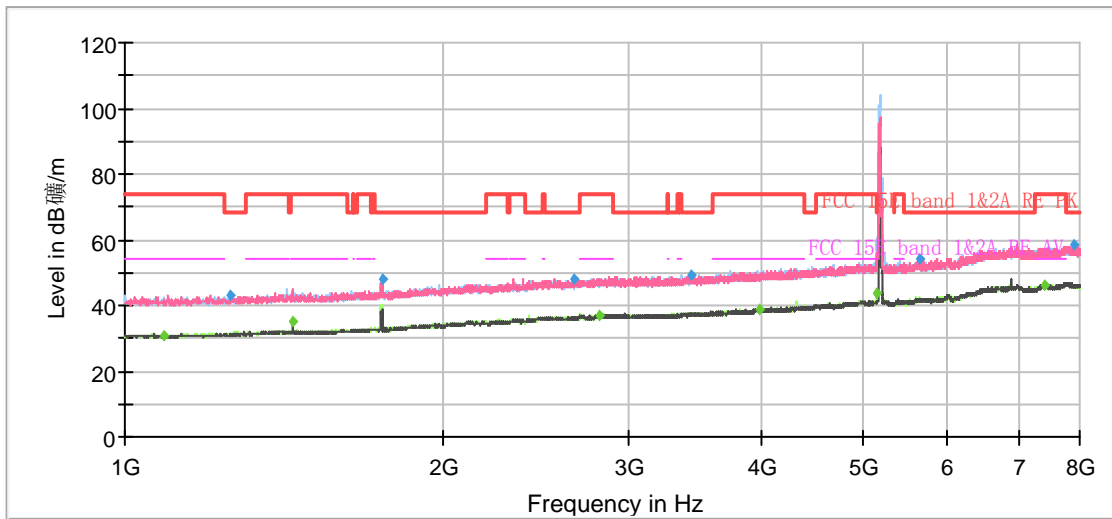


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1086.63	---	30.85	54.00	23.15	500.00	200.0	V	5.00	5
1257.25	42.83	---	68.20	25.37	500.00	100.0	V	138.00	6
1440.13	---	35.26	54.00	18.74	500.00	200.0	H	22.00	7
1750.75	47.81	---	68.20	20.39	500.00	200.0	H	0.00	8
2663.38	47.92	---	68.20	20.28	500.00	100.0	H	0.00	11
2809.50	---	37.18	54.00	16.82	500.00	200.0	V	42.00	11
3428.13	49.07	---	68.20	19.13	500.00	100.0	H	188.00	12
3985.50	---	39.04	54.00	14.96	500.00	100.0	H	60.00	13
5149.25	---	43.60	54.00	10.40	500.00	100.0	H	51.00	15
5639.25	54.32	---	68.20	13.88	500.00	200.0	V	140.00	16
7419.00	---	46.14	54.00	7.86	500.00	100.0	H	14.00	21
7909.00	58.56	---	68.20	9.64	500.00	200.0	H	219.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

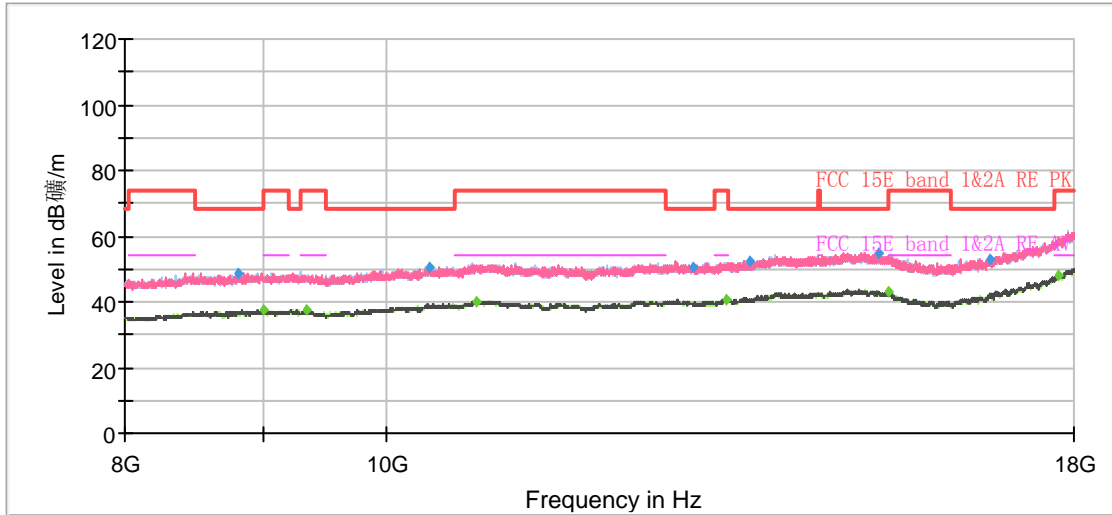


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8818.75	48.79	---	68.20	19.41	500.00	200.0	V	186.00	-3
9007.50	---	37.61	54.00	16.39	500.00	100.0	V	30.00	-2
9340.00	---	37.27	54.00	16.73	500.00	200.0	H	1.00	-2
10370.00	50.56	---	68.20	17.64	500.00	100.0	V	192.00	0
10800.00	---	40.28	54.00	13.72	500.00	200.0	H	80.00	0
13008.75	50.42	---	68.20	17.78	500.00	100.0	H	292.00	2
13372.50	---	40.89	54.00	13.11	500.00	200.0	H	3.00	3
13651.25	52.47	---	68.20	15.73	500.00	100.0	H	274.00	3
15221.25	55.01	---	68.20	13.19	500.00	200.0	V	143.00	4
15356.25	---	42.85	54.00	11.15	500.00	200.0	H	87.00	4
16745.00	53.04	---	68.20	15.16	500.00	200.0	H	38.00	3
17755.00	---	47.95	54.00	6.05	500.00	100.0	H	174.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11a CH40

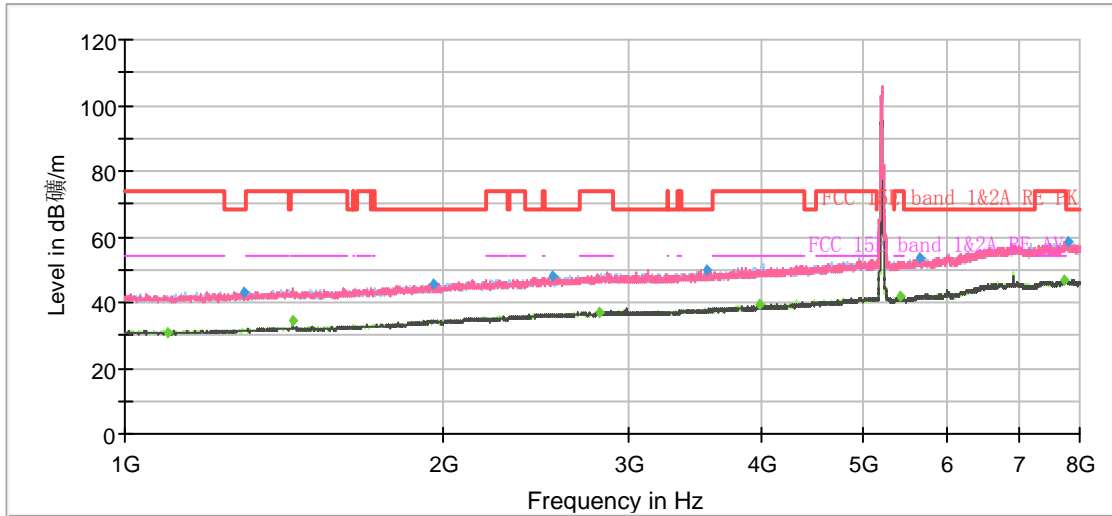

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1096.25	---	30.90	54.00	23.10	500.00	200.0	H	348.00	5
1296.63	43.09	---	68.20	25.11	500.00	100.0	H	177.00	6
1440.13	---	34.23	54.00	19.77	500.00	200.0	V	70.00	7
1956.38	45.65	---	68.20	22.55	500.00	100.0	V	0.00	9
2541.75	47.99	---	68.20	20.21	500.00	200.0	H	127.00	11
2807.75	---	37.08	54.00	16.92	500.00	100.0	V	355.00	11
3551.50	50.09	---	68.20	18.11	500.00	100.0	H	5.00	12
3981.13	---	39.15	54.00	14.85	500.00	100.0	V	65.00	13
5398.63	---	41.69	54.00	12.31	500.00	100.0	V	266.00	15
5637.50	53.68	---	68.20	14.52	500.00	200.0	H	354.00	16
7734.00	---	46.70	54.00	7.30	500.00	200.0	V	79.00	22
7804.88	58.42	---	68.20	9.78	500.00	200.0	V	186.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

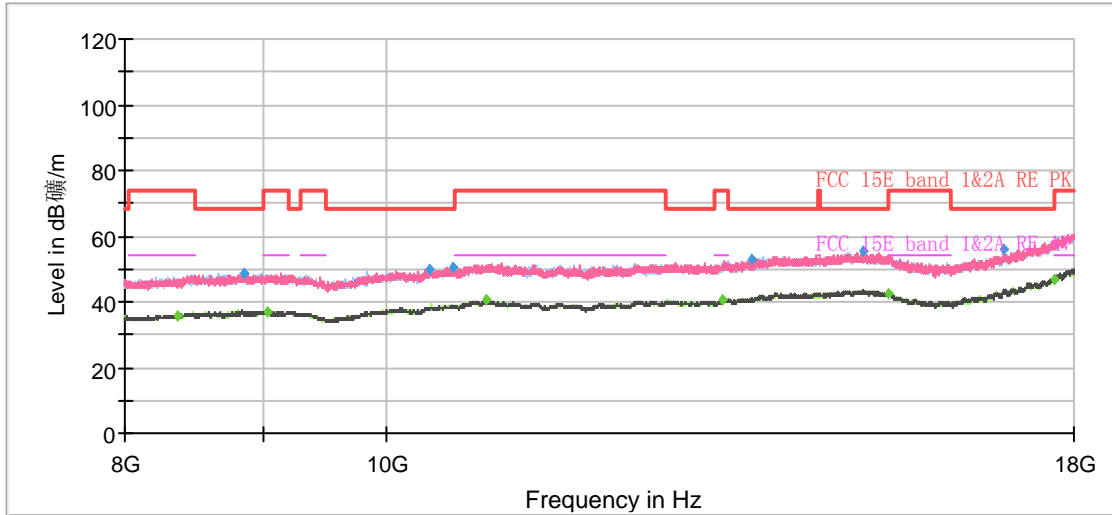


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8367.50	---	35.60	54.00	18.40	500.00	100.0	H	67.00	-3
8850.00	48.90	---	68.20	19.30	500.00	200.0	V	151.00	-3
9028.75	---	37.22	54.00	16.78	500.00	200.0	H	282.00	-2
10375.00	49.94	---	68.20	18.26	500.00	100.0	H	246.00	-1
10585.00	50.71	---	68.20	17.49	500.00	100.0	H	0.00	0
10897.50	---	40.46	54.00	13.54	500.00	200.0	V	210.00	0
13338.75	---	40.60	54.00	13.40	500.00	100.0	V	0.00	3
13677.50	52.88	---	68.20	15.32	500.00	100.0	V	116.00	3
15032.50	55.19	---	68.20	13.01	500.00	200.0	H	357.00	5
15351.25	---	42.74	54.00	11.26	500.00	100.0	H	67.00	4
16957.50	55.72	---	68.20	12.48	500.00	200.0	V	217.00	3
17710.00	---	46.79	54.00	7.21	500.00	100.0	V	345.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11a CH48

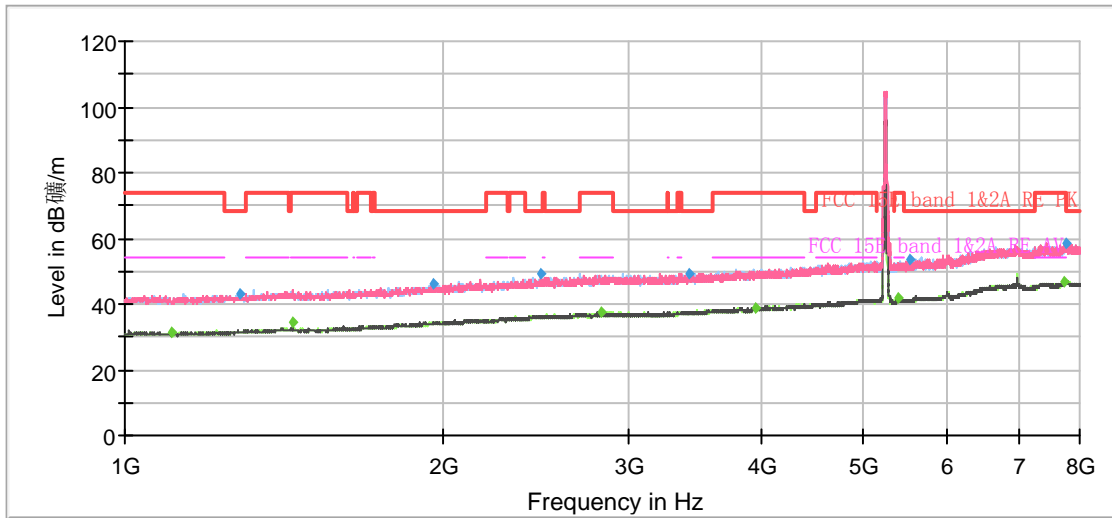

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1106.75	---	31.16	54.00	22.84	500.00	100.0	V	273.00	5
1287.00	42.82	---	68.20	25.38	500.00	100.0	H	4.00	6
1440.13	---	34.25	54.00	19.75	500.00	200.0	V	60.00	7
1958.13	45.99	---	68.20	22.21	500.00	100.0	V	119.00	9
2471.75	49.26	---	68.20	18.94	500.00	100.0	V	358.00	11
2825.25	---	37.34	54.00	16.66	500.00	200.0	V	1.00	11
3419.38	49.44	---	68.20	18.76	500.00	200.0	V	78.00	12
3947.88	---	38.95	54.00	15.05	500.00	100.0	V	345.00	13
5389.88	---	41.85	54.00	12.15	500.00	200.0	H	349.00	15
5531.63	53.58	---	68.20	14.62	500.00	200.0	H	339.00	15
7748.88	---	46.81	54.00	7.19	500.00	100.0	H	42.00	22
7775.13	58.58	---	68.20	9.62	500.00	200.0	H	0.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

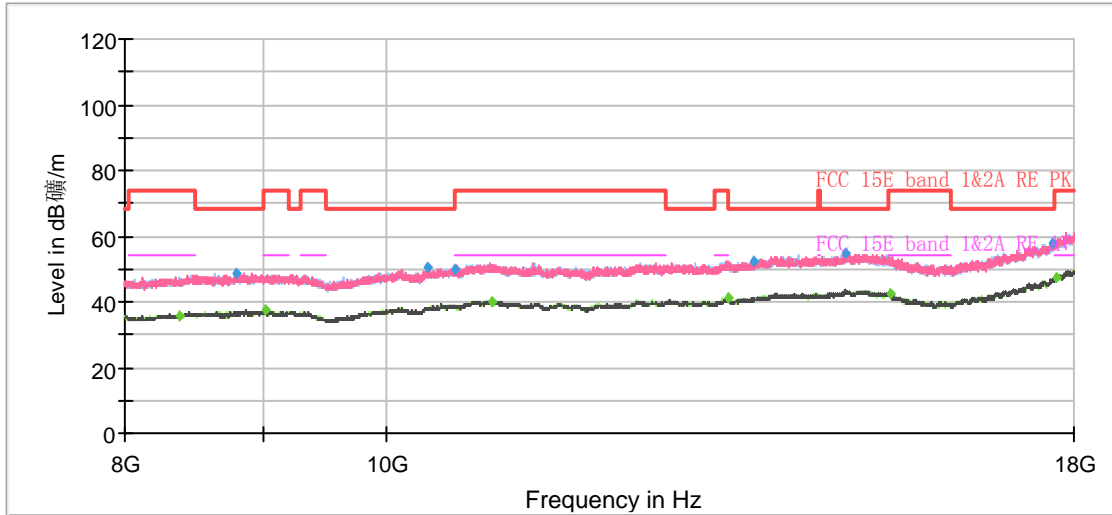


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8387.50	---	35.82	54.00	18.18	500.00	200.0	H	352.00	-3
8802.50	48.73	---	68.20	19.47	500.00	100.0	V	296.00	-3
9022.50	---	37.26	54.00	16.74	500.00	200.0	V	3.00	-2
10361.25	50.22	---	68.20	17.98	500.00	100.0	V	139.00	0
10598.75	50.05	---	68.20	18.15	500.00	200.0	H	102.00	0
10951.25	---	40.23	54.00	13.77	500.00	200.0	H	43.00	0
13398.75	---	41.08	54.00	12.92	500.00	100.0	H	12.00	3
13697.50	52.54	---	68.20	15.66	500.00	200.0	V	122.00	4
14810.00	54.48	---	68.20	13.72	500.00	200.0	V	0.00	5
15381.25	---	42.57	54.00	11.43	500.00	200.0	H	110.00	4
17666.25	57.69	---	68.20	10.51	500.00	200.0	H	357.00	7
17723.75	---	47.18	54.00	6.82	500.00	100.0	V	355.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11a CH52

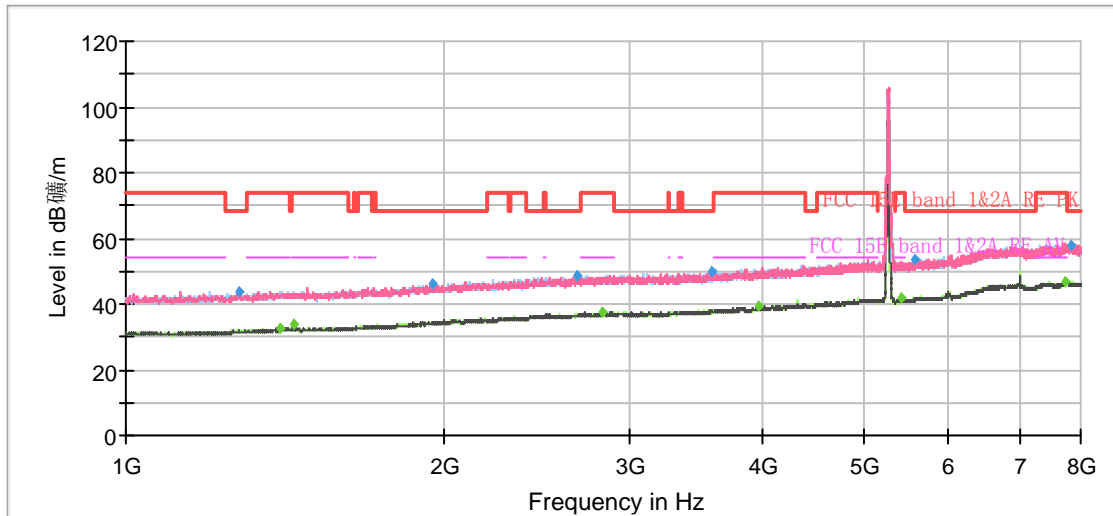


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1279.13	43.77	---	68.20	24.43	500.00	200.0	V	6.00	6
1399.00	---	32.61	54.00	21.39	500.00	200.0	V	224.00	7
1440.13	---	34.03	54.00	19.97	500.00	100.0	V	355.00	7
1952.88	45.98	---	68.20	22.22	500.00	200.0	H	306.00	9
2665.13	48.80	---	68.20	19.40	500.00	200.0	H	288.00	11
2827.88	---	37.35	54.00	16.65	500.00	200.0	H	355.00	11
3576.00	49.61	---	68.20	18.59	500.00	200.0	V	0.00	12
3968.88	---	39.16	54.00	14.84	500.00	100.0	H	68.00	13
5400.38	---	41.81	54.00	12.19	500.00	100.0	H	4.00	15
5582.38	53.56	---	68.20	14.64	500.00	200.0	H	348.00	16
7731.38	---	46.69	54.00	7.31	500.00	200.0	V	315.00	22
7832.88	58.01	---	68.20	10.19	500.00	200.0	V	47.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

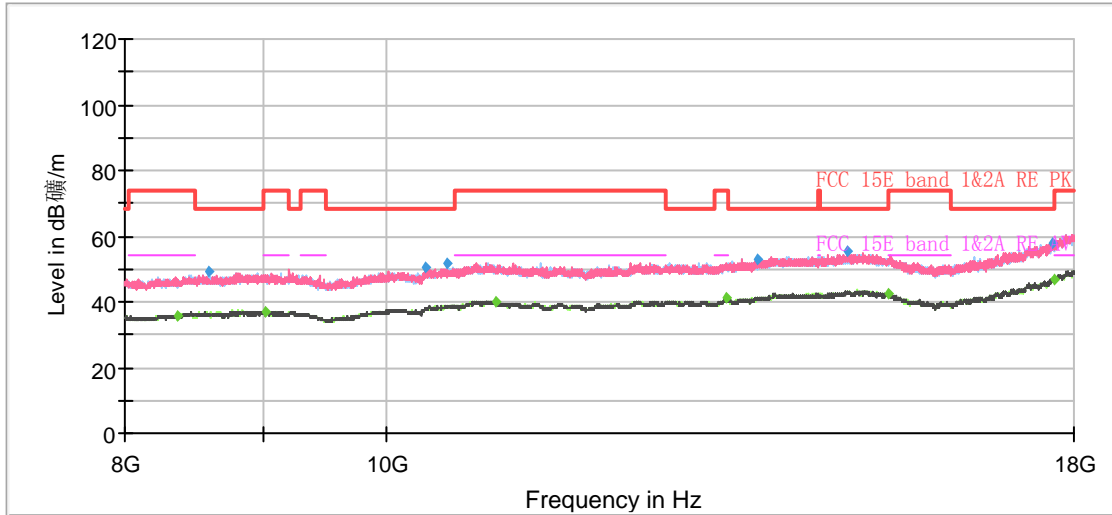


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8372.50	---	35.70	54.00	18.30	500.00	100.0	H	95.00	-3
8593.75	48.94	---	68.20	19.26	500.00	100.0	H	102.00	-3
9025.00	---	37.15	54.00	16.85	500.00	200.0	V	6.00	-2
10345.00	50.21	---	68.20	17.99	500.00	200.0	V	54.00	0
10541.25	51.45	---	68.20	16.75	500.00	200.0	H	66.00	0
10976.25	---	40.15	54.00	13.85	500.00	100.0	V	72.00	0
13380.00	---	40.93	54.00	13.07	500.00	200.0	H	333.00	3
13732.50	52.93	---	68.20	15.27	500.00	100.0	V	297.00	4
14837.50	55.12	---	68.20	13.08	500.00	100.0	V	253.00	5
15356.25	---	42.61	54.00	11.39	500.00	200.0	H	0.00	4
17678.75	57.89	---	68.20	10.31	500.00	200.0	H	51.00	7
17705.00	---	46.53	54.00	7.47	500.00	200.0	H	340.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11a CH60

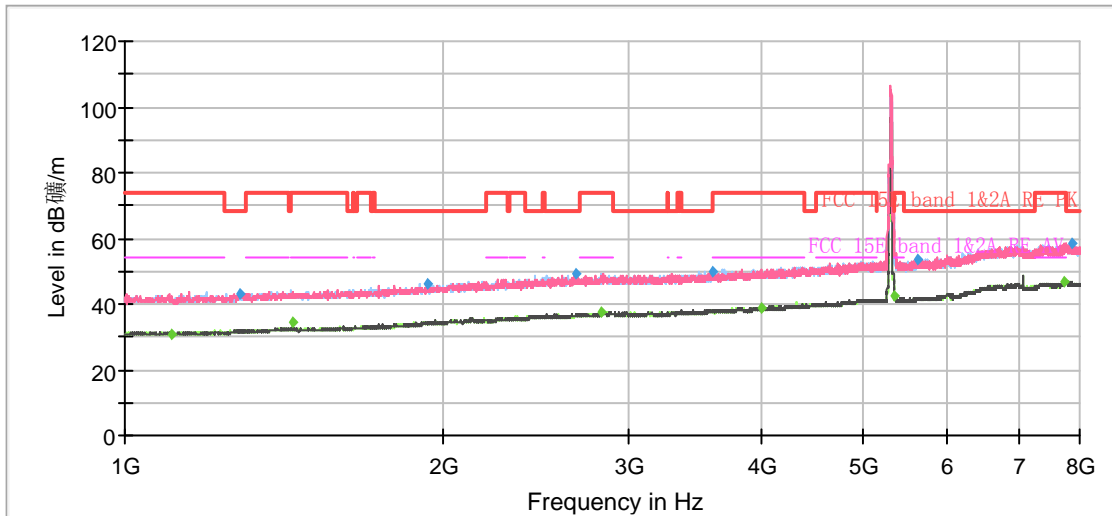

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1105.88	---	31.00	54.00	23.00	500.00	100.0	H	47.00	5
1285.25	43.05	---	68.20	25.15	500.00	100.0	V	219.00	6
1440.13	---	34.45	54.00	19.55	500.00	100.0	V	0.00	7
1937.13	46.06	---	68.20	22.14	500.00	100.0	H	55.00	9
2672.13	49.05	---	68.20	19.15	500.00	100.0	V	359.00	11
2821.75	---	37.51	54.00	16.49	500.00	200.0	V	88.00	11
3597.88	50.01	---	68.20	18.19	500.00	100.0	V	347.00	12
3995.13	---	38.99	54.00	15.01	500.00	100.0	H	55.00	13
5352.25	---	42.45	54.00	11.55	500.00	200.0	V	2.00	15
5613.88	53.40	---	68.20	14.80	500.00	200.0	H	263.00	16
7748.00	---	46.81	54.00	7.19	500.00	100.0	V	354.00	22
7850.38	58.51	---	68.20	9.69	500.00	100.0	H	38.00	22

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

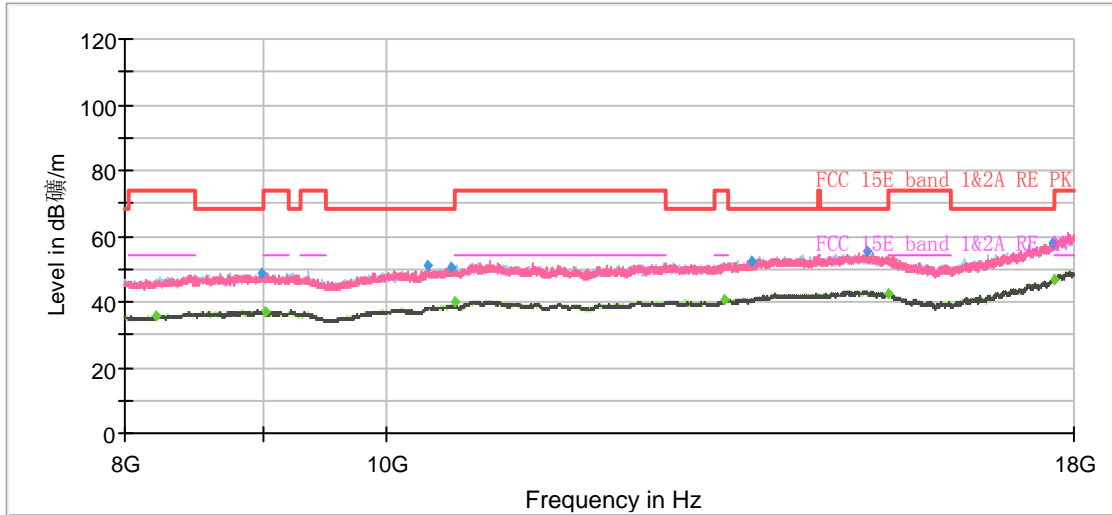

Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
8216.25	---	35.65	54.00	18.35	500.00	200.0	H	237.00	-3
8993.75	48.64	---	68.20	19.56	500.00	200.0	H	355.00	-2
9022.50	---	37.08	54.00	16.92	500.00	100.0	V	180.00	-2
10357.50	51.00	---	68.20	17.20	500.00	100.0	H	112.00	0
10565.00	50.36	---	68.20	17.84	500.00	200.0	V	91.00	0
10600.00	---	40.23	54.00	13.77	500.00	100.0	H	244.00	0
13356.25	---	40.67	54.00	13.33	500.00	200.0	H	130.00	3
13662.50	52.49	---	68.20	15.71	500.00	200.0	V	0.00	3
15070.00	55.22	---	68.20	12.98	500.00	200.0	H	0.00	5
15362.50	---	42.49	54.00	11.51	500.00	100.0	V	351.00	4
17676.25	57.91	---	68.20	10.29	500.00	200.0	H	86.00	7
17713.75	---	46.77	54.00	7.23	500.00	100.0	H	9.00	8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)