



# RF TEST REPORT

**Applicant** Huawei Device Co., Ltd.  
**FCC ID** 2ATEYJLN  
**Product** Smart phone  
**Model** JLN-LX3  
**Report No.** R2112A1178-R7V1  
**Issue Date** February 15, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

---

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	5
1.1. Notes of the test report.....	5
1.2. Test facility .....	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General information.....	6
3. Applied Standards .....	8
4. Test Configuration .....	9
5. Test Case Results .....	12
5.1. Occupied Bandwidth .....	12
5.2. Average Power Output.....	32
5.3. Frequency Stability.....	39
5.4. Power Spectral Density.....	43
5.5. Unwanted Emission .....	62
5.6. Conducted Emission .....	154
6. Main Test Instruments.....	157
ANNEX A: The EUT Appearance .....	158
ANNEX B: Test Setup Photos .....	159



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	January 29, 2022
Rev.1	Update data.	February 15, 2022

Note: This revised report (Report No. R2112A1178-R7V1) supersedes and replaces the previously issued report (Report No. R2112A1178-R7). Please discard or destroy the previously issued report and dispose of it accordingly.



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS

Date of Testing: January 5, 2022 ~ January 20, 2022 and February 11, 2022 ~ February 15, 2022  
Date of Sample Received: December 24, 2021

Note: PASS: The EUT complies with the essential requirements in the standard.  
FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

<b>Applicant</b>	Huawei Device Co., Ltd.
<b>Applicant address</b>	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China
<b>Manufacturer</b>	Huawei Device Co., Ltd.
<b>Manufacturer address</b>	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

### 2.2. General information

EUT Description			
Model	JLN-LX3		
SN	HWQYD21C07500160		
Hardware Version	HL1JLNM		
Software Version	12.0.1.100(C900E100R1P3)		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain:	-0.04dBi		
Directional Gain	NA		
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-2A: 5250MHz -5350MHz U-NII-2C: 5470MHz-5725MHz U-NII-3: 5725MHz -5850MHz		
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM		
Max Power	18.96 dBm		
Testing temperature range:	0 ° C to 35° C		
Operating temperature range:	0 ° C to 35° C		
Operating voltage range:	3.60 V to 4.48V		
State DC voltage:	3.87V		
EUT Accessory			
Accessory	Model	Manufacture	No.
Adapter	HW-110600U00	Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	1
		Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	2
	HW-110600U02	Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	3
		Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	4
	HW-110600E02	Huawei Technologies Co., Ltd.	5



		(Manufacturer: Astec Electronics (Luoding) Co. Limited)		
		Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	6	
	HW-110600B02		Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	7
			Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	8
	HW-110600A02		Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	9
			Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	10
	HW-110600B00		Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	11
			Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	12
	HW-110600E00		Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	13
			Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	14
	HW-110600A00		Huawei Technologies Co., Ltd. (Manufacturer: Astec Electronics (Luoding) Co. Limited)	15
			Huawei Technologies Co., Ltd. (Manufacturer: ASAP TECHNOLOGY (Jiangxi) CO., LTD)	16
	Battery	HB426493EFW	SCUD (FUJIAN) Electronics Co., Ltd.	1
			Sunwoda Electronic Co.,LTD.	2
	USB Cable	L99UC139-CS-H	Luxshare Precision industry Co.,Ltd	1
		213-01011-0	MING JI ELECTRONICS CO., LTD.	2
Earphone	1311-3291-6001-TC-351	Boluo County Quancheng Electronic Co., Ltd.	1	
Earphone, USB Type-C to 3.5mm Adapter Assembly	6001-7001-TC-348	Boluo County Quancheng Electronic Co., Ltd.	1	
	USB042020090AW7	Jiangxi Lianchuang Hongsheng Electronic Co.,Ltd.	2	
	642344	FOSTER ELECTRIC CO. ( HONG KONG ) LTD	3	

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

2. This device support automatically discontinue transmission, while the device is not transmitting any information, the device can automatically discontinue transmission and become standby mode for power saving. The device can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3. There are more than one Adapter, Battery and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 2, Battery 1 and USB Cable 1) will be recorded in this report.



### **3. Applied Standards**

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15E (2020)** Unlicensed National Information Infrastructure Devices

**ANSI C63.10 (2013)**

**Reference standard:**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**



## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

**Wireless Technology and Frequency Range**

Wireless Technology		Bandwidth	Channel	Frequency	
Wi-Fi	U-NII-1	20 MHz	36	5180MHz	
			40	5200MHz	
			44	5220MHz	
			48	5240MHz	
		40 MHz	38	5190MHz	
			46	5230MHz	
			80 MHz	42	5210MHz
		U-NII-2A	20 MHz	52	5260MHz
				56	5280MHz
	60			5300MHz	
	64			5320MHz	
	40 MHz		54	5270MHz	
			62	5310MHz	
			80 MHz	58	5290MHz
	U-NII-2C		20 MHz	100	5500MHz
				104	5520MHz
		108		5540MHz	
		112		5560MHz	
		116		5580MHz	
		120		5600MHz	
		124		5620MHz	
		128		5640MHz	
		132		5660MHz	
		136		5680MHz	
		140		5700MHz	
		40 MHz		102	5510MHz
			110	5550MHz	
			118	5590MHz	
			126	5630MHz	
			134	5670MHz	
142			5710MHz		
80 MHz		106	5530MHz		
		122	5610MHz		
		138	5690MHz		
U-NII-3		20 MHz	149	5745MHz	
	153		5765MHz		
	157		5785MHz		



			161	5805MHz
			165	5825MHz
		40 MHz	151	5755MHz
			159	5795MHz
		80 MHz	155	5775MHz
Does this device support TPC Function? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Does this device support TDWR Band? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				

## 5. Test Case Results

### 5.1. Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.


For U-NII-1/U-NII-2A/U-NII-2C, set RBW  $\approx$ 1% OCB kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

For U-NII-3, Set RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

Use the 99 % power bandwidth function of the instrument

#### Test Setup



#### Limits

Rule FCC Part §15.407(e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:****U-NII-1**

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5180	16.721	24.31	PASS
	5200	16.807	25.29	PASS
	5220	16.715	24.75	PASS
	5240	16.769	24.67	PASS
802.11n HT20	5180	17.728	23.66	PASS
	5200	17.902	24.29	PASS
	5240	17.858	24.09	PASS
802.11n HT40	5190	36.114	40.90	PASS
	5230	36.151	40.74	PASS
802.11ac VHT20	5180	17.760	22.54	PASS
	5200	17.848	24.45	PASS
	5240	17.886	24.45	PASS
802.11ac VHT40	5190	36.100	40.45	PASS
	5230	36.133	48.52	PASS
802.11ac VHT80	5210	75.320	80.30	PASS

**U-NII-2A**

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5260	16.765	24.89	PASS
	5280	16.954	27.45	PASS
	5300	16.830	24.92	PASS
	5320	16.715	24.51	PASS
802.11n HT20	5260	17.853	24.84	PASS
	5300	17.869	24.31	PASS
	5320	17.855	24.64	PASS
802.11n HT40	5270	36.125	41.52	PASS
	5310	36.085	40.74	PASS
802.11ac VHT20	5260	17.852	24.22	PASS
	5300	17.914	25.17	PASS
	5320	17.886	24.13	PASS
802.11ac VHT40	5270	36.148	49.00	PASS
	5310	36.133	40.41	PASS
802.11ac VHT80	5290	75.394	80.52	PASS



## U-NII-2C

Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11a	5500	16.905	27.19	PASS
	5600	16.571	22.91	PASS
	5680	16.685	24.73	PASS
	5700	16.535	21.34	PASS
802.11n HT20	5500	16.689	24.30	PASS
	5600	17.912	25.97	PASS
	5700	17.700	22.70	PASS
802.11n HT40	5510	36.181	40.75	PASS
	5550	36.199	40.80	PASS
	5590	36.191	41.65	PASS
	5670	36.178	45.46	PASS
802.11ac VHT20	5500	17.884	24.93	PASS
	5600	17.957	26.14	PASS
	5700	17.734	23.23	PASS
802.11ac VHT40	5510	36.175	41.27	PASS
	5550	36.163	41.07	PASS
	5590	36.219	47.45	PASS
	5670	36.208	42.48	PASS
802.11ac VHT80	5530	75.415	81.44	PASS
	5610	75.558	86.34	PASS




## U-NII-3


Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11a	5745	16.561	14.93	500	PASS
	5785	19.108	15.91	500	PASS
	5825	16.537	15.69	500	PASS
802.11n HT20	5745	17.757	16.91	500	PASS
	5785	17.729	16.99	500	PASS
	5825	17.865	16.17	500	PASS
802.11n HT40	5755	36.176	35.34	500	PASS
	5795	36.203	35.29	500	PASS
802.11ac VHT20	5745	17.710	15.13	500	PASS
	5785	17.755	16.76	500	PASS
	5825	17.754	17.00	500	PASS
802.11ac VHT40	5755	36.199	36.02	500	PASS
	5795	36.166	35.06	500	PASS
802.11ac VHT80	5775	75.500	75.07	500	PASS




U-NII-1, 802.11a  
Carrier frequency (MHz): 5180

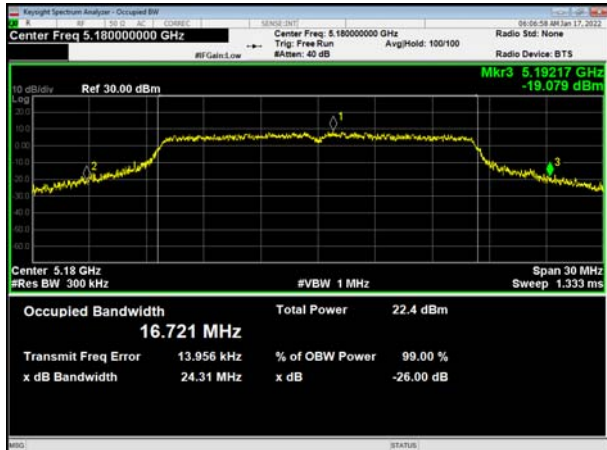


U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5180

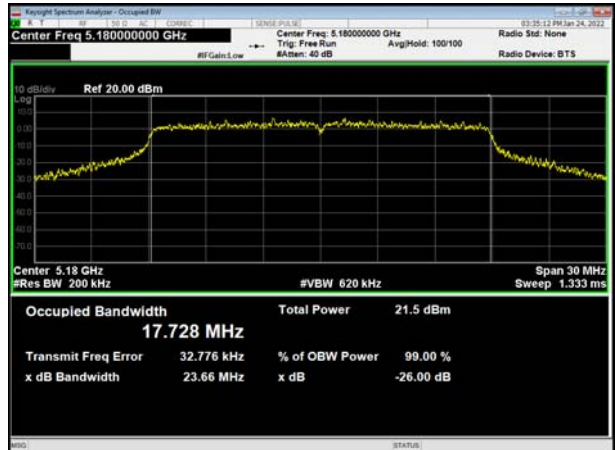

U-NII-1, 802.11a  
Carrier frequency (MHz): 5200

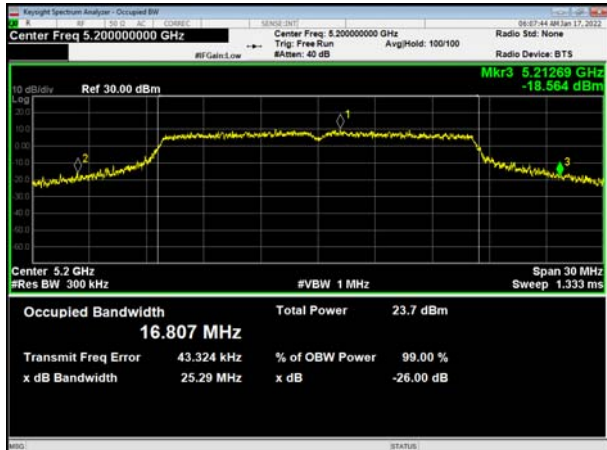


U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5200

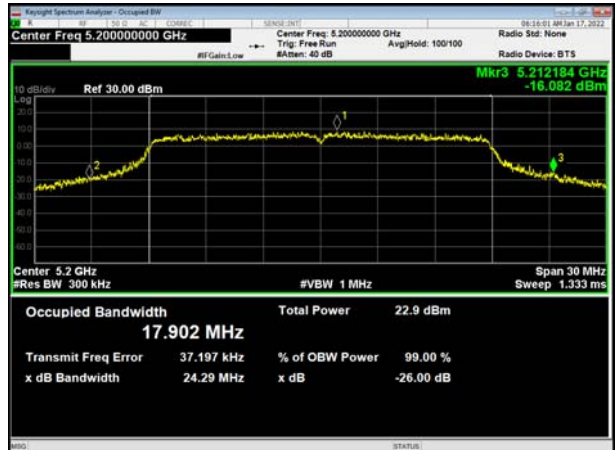







U-NII-1, 802.11a  
Carrier frequency (MHz): 5220



U-NII-1, 802.11n HT20  
Carrier frequency (MHz): 5240

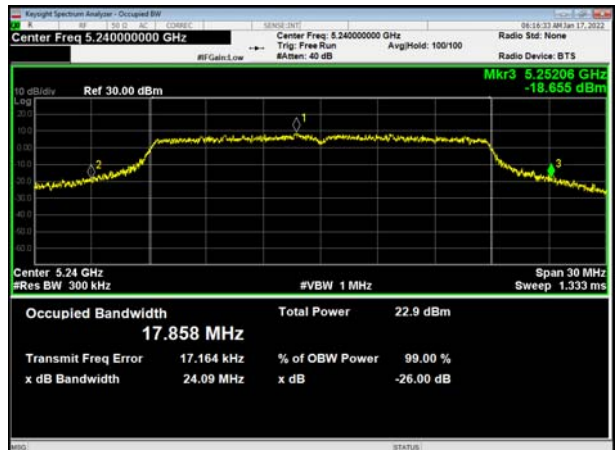



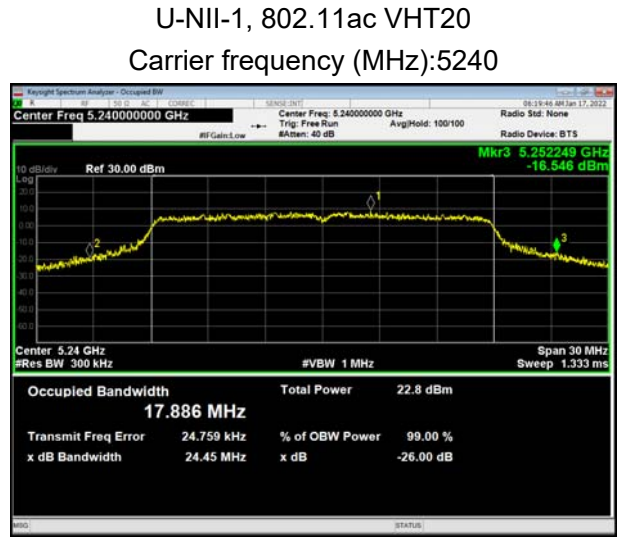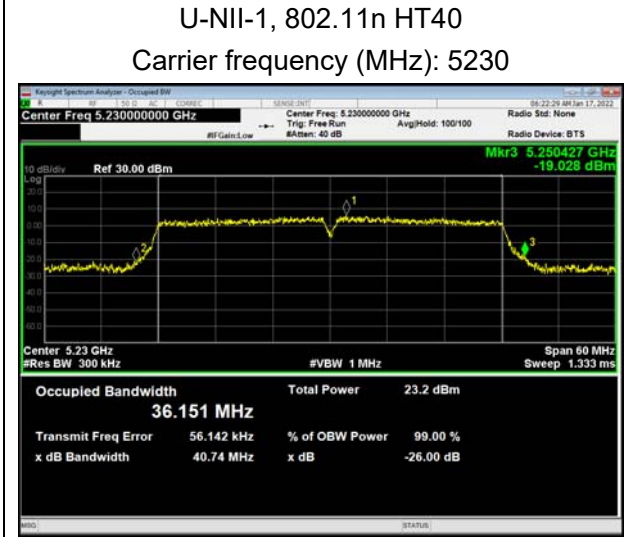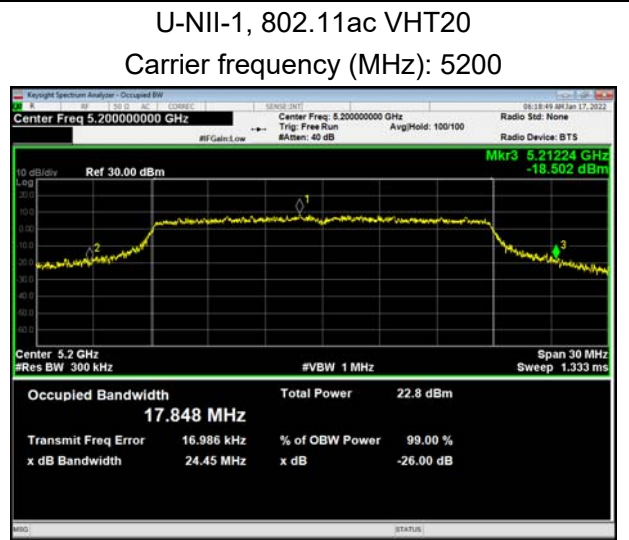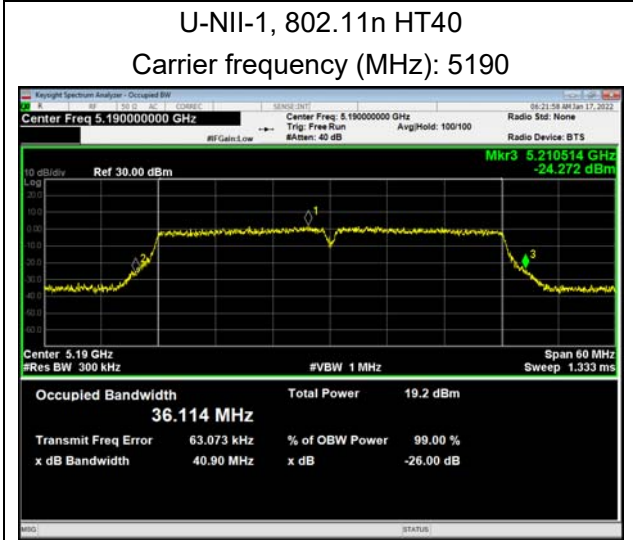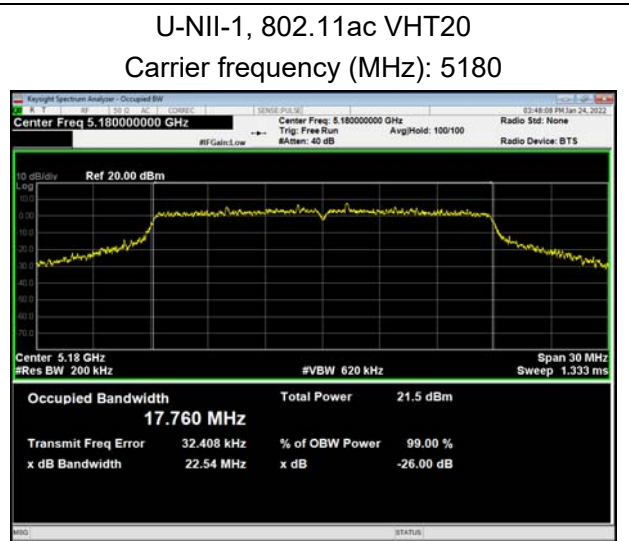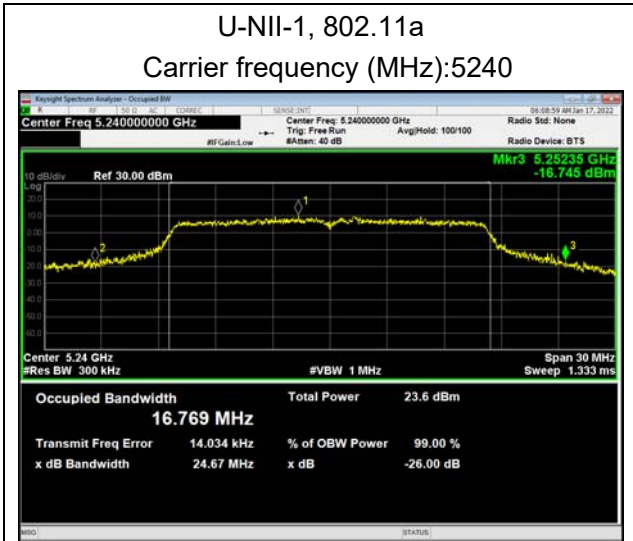


U-NII-1, 802.11ac VHT40  
Carrier frequency (MHz): 5190



U-NII-1, 802.11ac VHT80  
Carrier frequency (MHz): 5210




U-NII-1, 802.11ac VHT40  
Carrier frequency (MHz): 5230

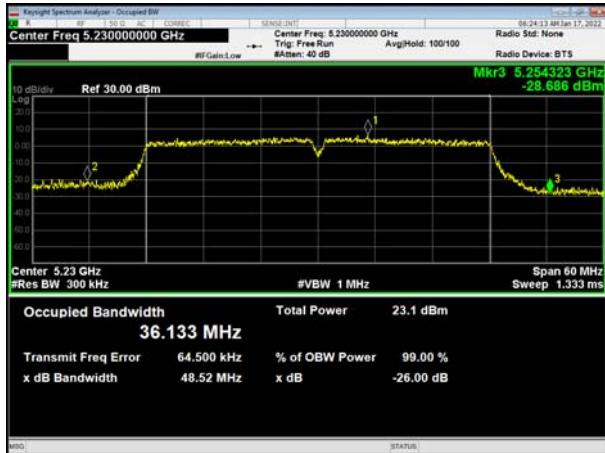





U-NII-2A, 802.11a  
Carrier frequency (MHz): 5260

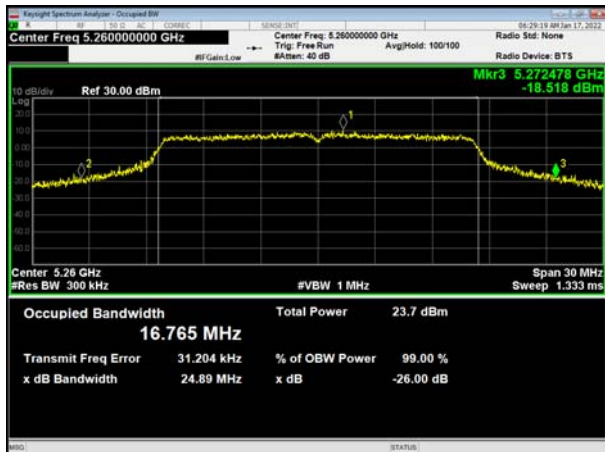


U-NII-2A, 802.11n HT20  
Carrier frequency (MHz): 5260

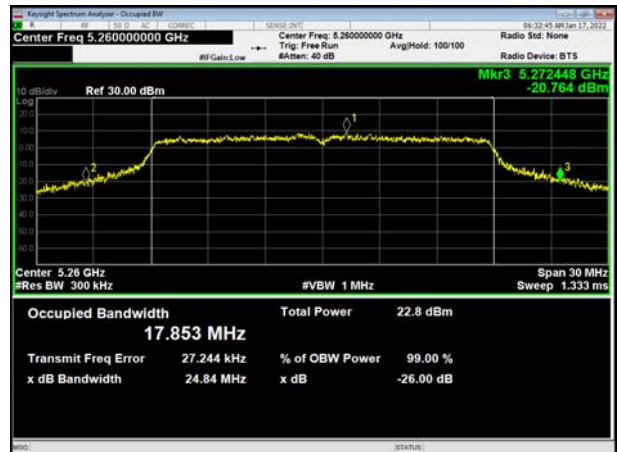


U-NII-2A, 802.11a  
Carrier frequency (MHz): 5280

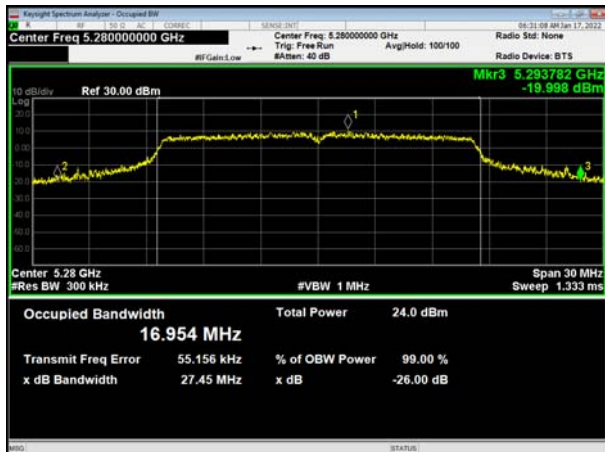

U-NII-2A, 802.11n HT20  
Carrier frequency (MHz): 5300

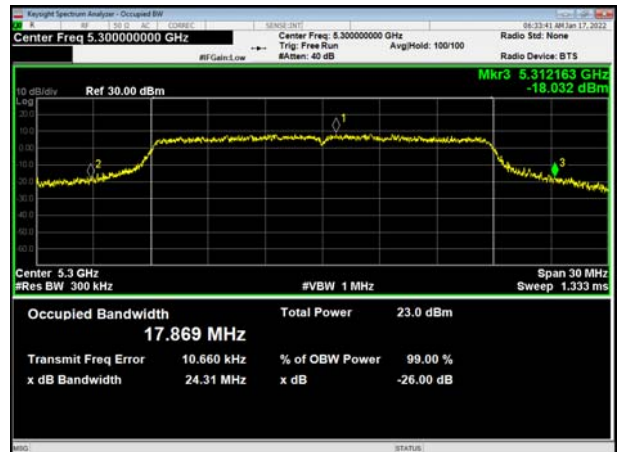







U-NII-2A, 802.11a  
Carrier frequency (MHz): 5300

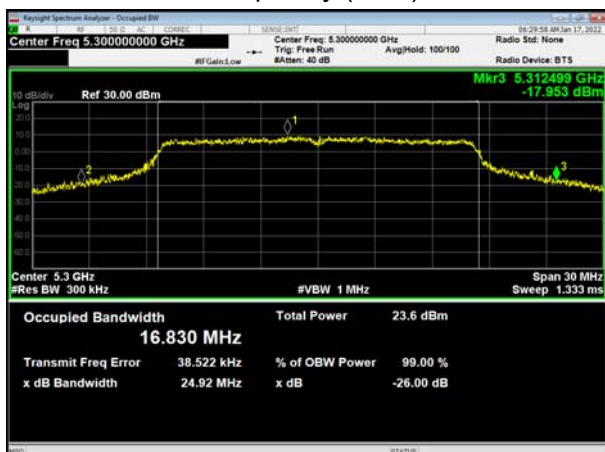

U-NII-2A, 802.11n HT20  
Carrier frequency (MHz): 5320





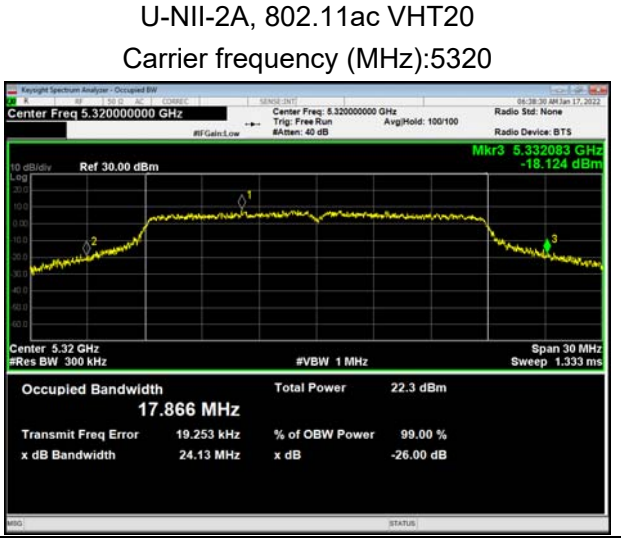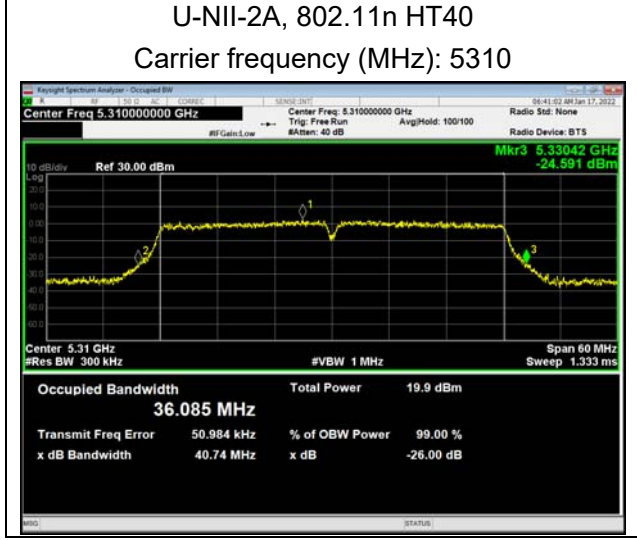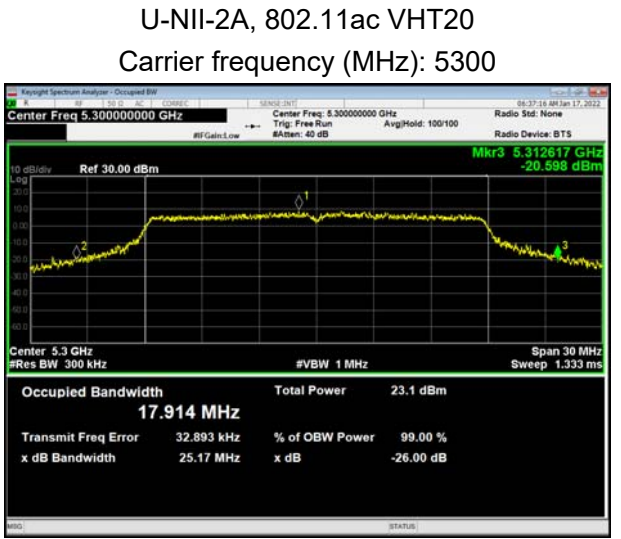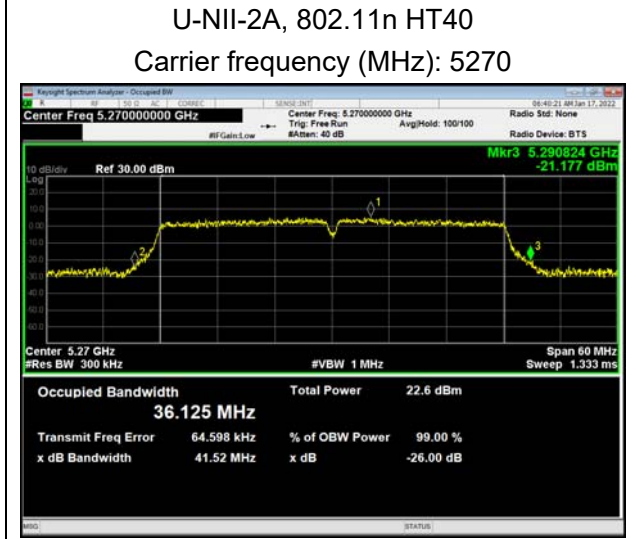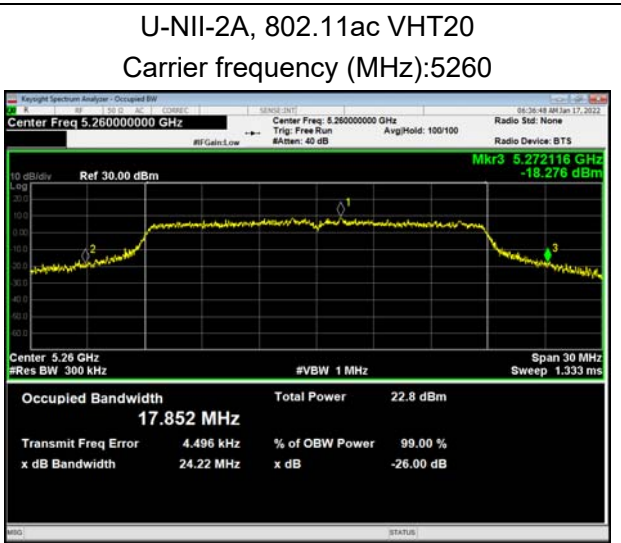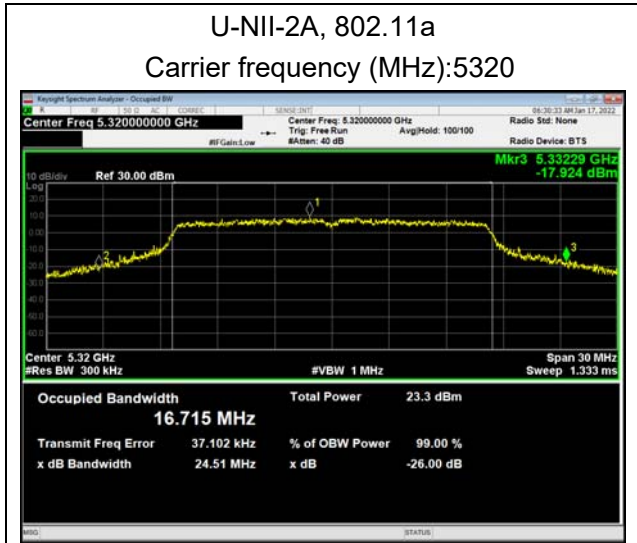





U-NII-2A, 802.11ac VHT40  
Carrier frequency (MHz): 5270



U-NII-2A, 802.11ac VHT80  
Carrier frequency (MHz): 5290

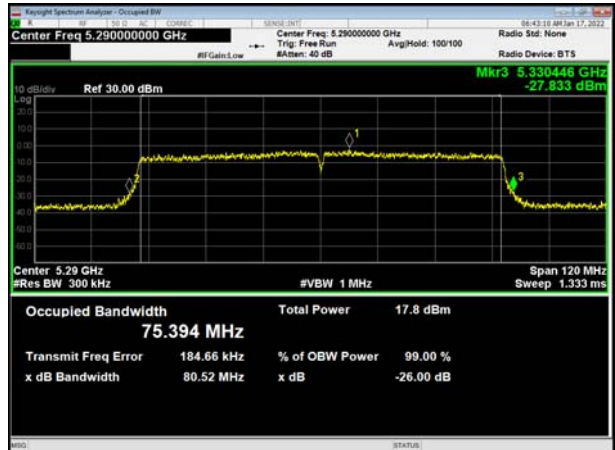

U-NII-2A, 802.11ac VHT40  
Carrier frequency (MHz): 5310

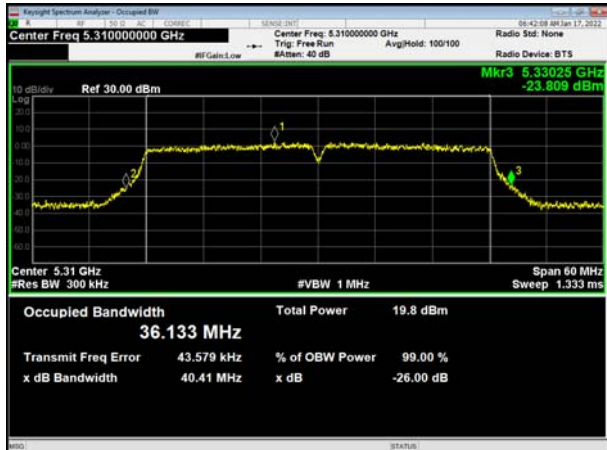




U-NII-2C, 802.11a  
Carrier frequency (MHz): 5500




U-NII-2C, 802.11n HT20  
Carrier frequency (MHz): 5500




U-NII-2C, 802.11a  
Carrier frequency (MHz): 5600

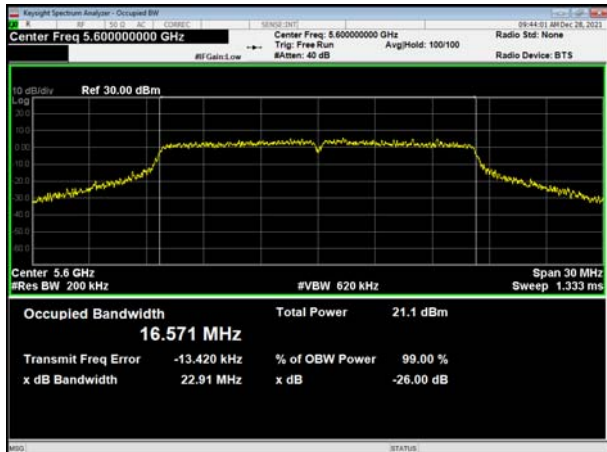

U-NII-2C, 802.11n HT20  
Carrier frequency (MHz): 5600

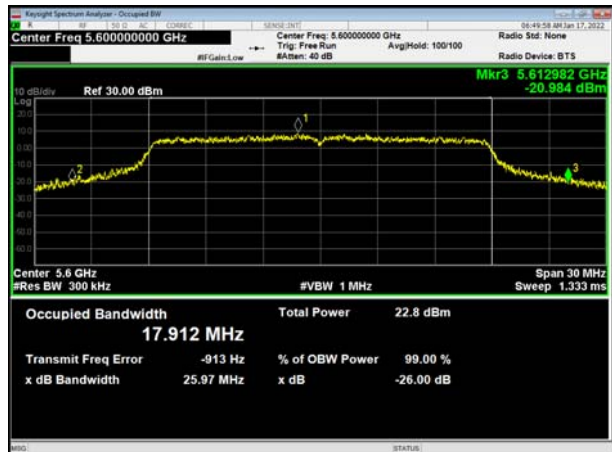

U-NII-2C, 802.11a  
Carrier frequency (MHz): 5680

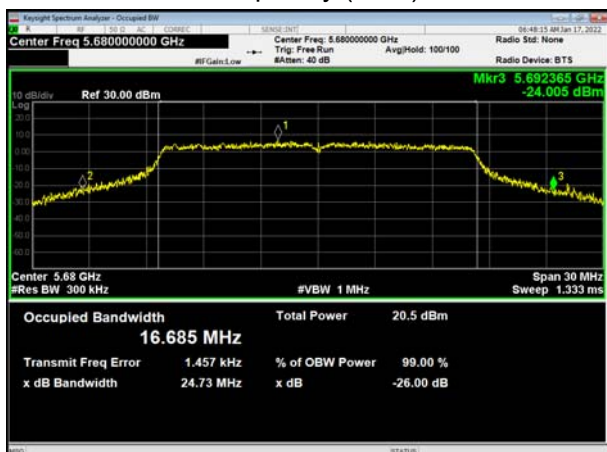

U-NII-2C, 802.11n HT20  
Carrier frequency (MHz): 5700







U-NII-2C, 802.11a  
Carrier frequency (MHz): 5700




U-NII-2C, 802.11ac VHT20  
Carrier frequency (MHz): 5500

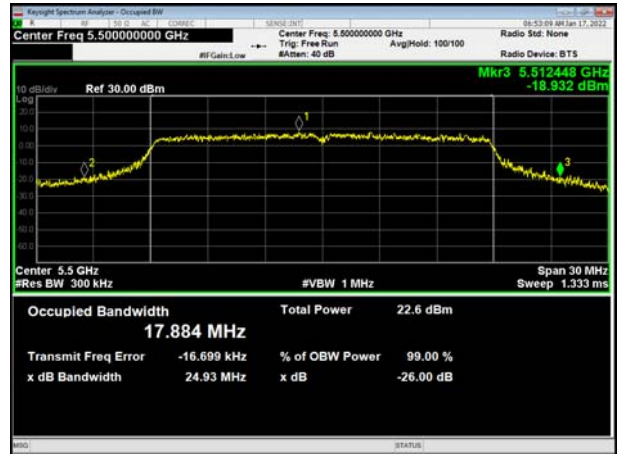

U-NII-2C, 802.11n HT40  
Carrier frequency (MHz): 5510

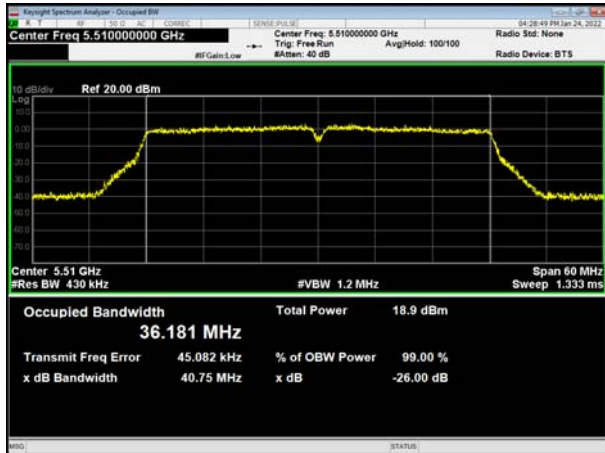

U-NII-2C, 802.11ac VHT20  
Carrier frequency (MHz): 5600

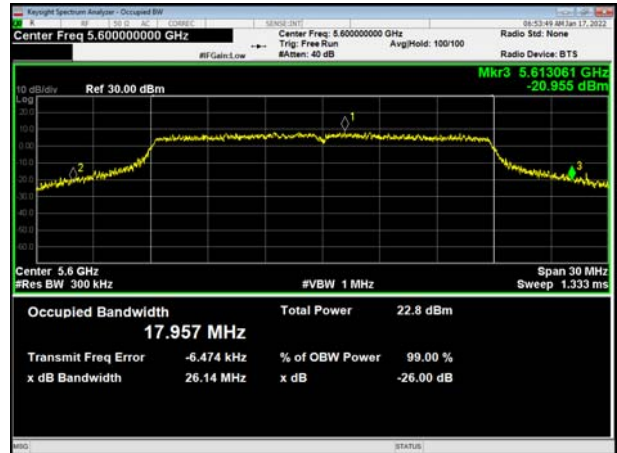




U-NII-2C, 802.11n HT40  
Carrier frequency (MHz): 5550




U-NII-2C, 802.11ac VHT20  
Carrier frequency (MHz): 5700

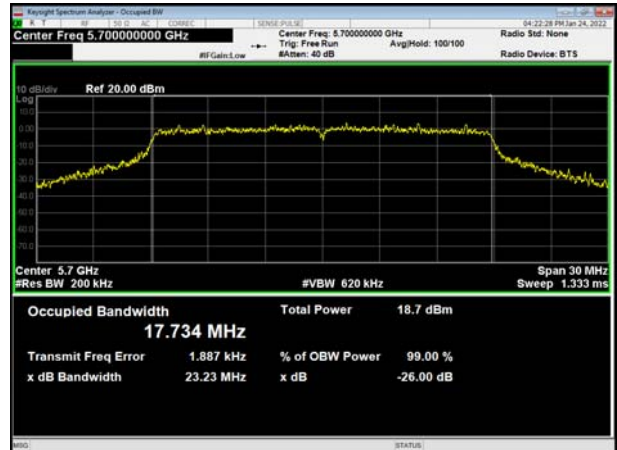


U-NII-2C, 802.11n HT40  
Carrier frequency (MHz): 5590



U-NII-2C, 802.11ac VHT80  
Carrier frequency (MHz): 5530

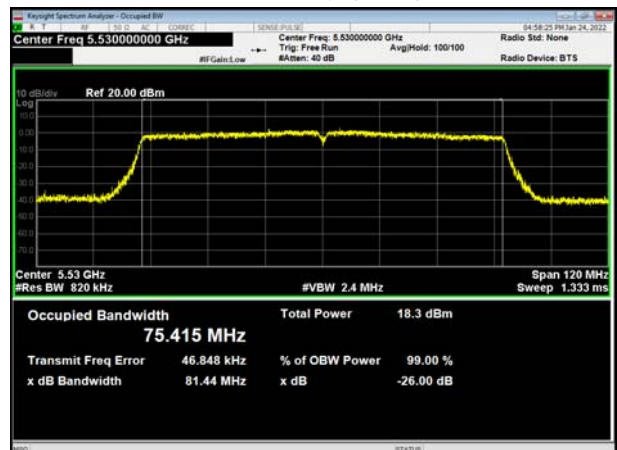

U-NII-2C, 802.11n HT40  
Carrier frequency (MHz): 5670

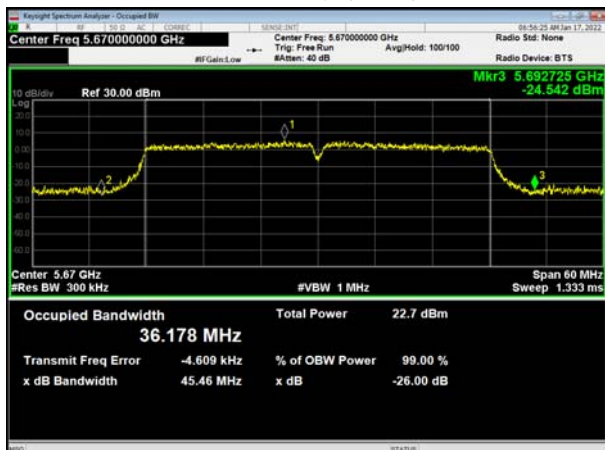






U-NII-2C, 802.11ac VHT40  
Carrier frequency (MHz): 5510



U-NII-2C, 802.11ac VHT80  
Carrier frequency (MHz): 5610

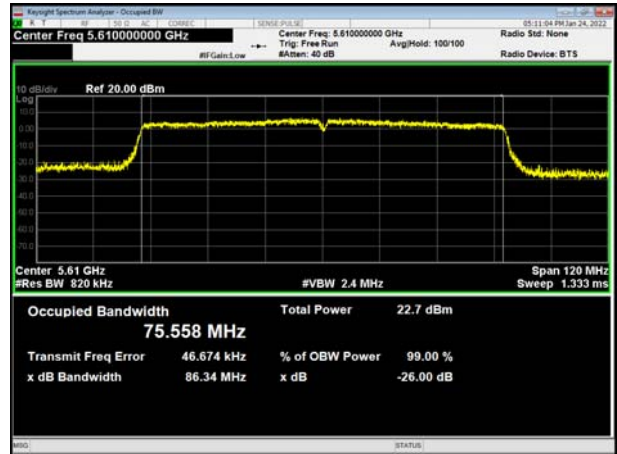





U-NII-2C, 802.11ac VHT40  
Carrier frequency (MHz): 5550



U-NII-2C, 802.11ac VHT40  
Carrier frequency (MHz): 5590

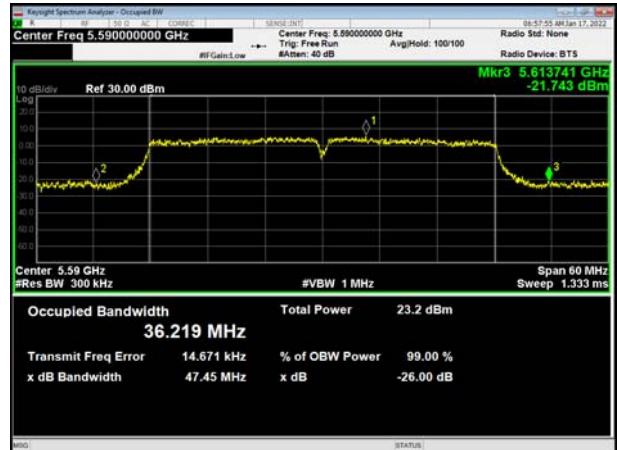


U-NII-2C, 802.11ac VHT40  
Carrier frequency (MHz): 5670

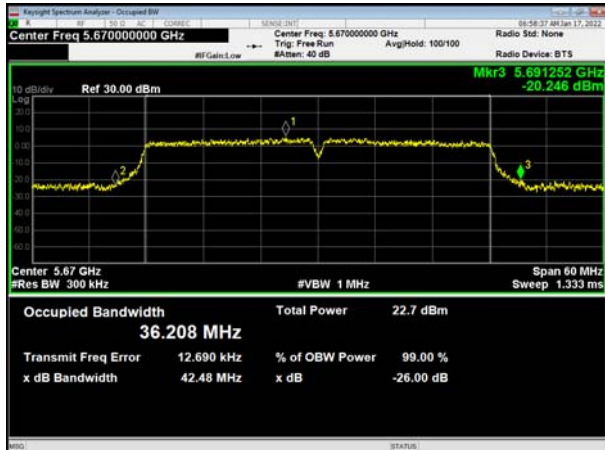



99% bandwidth

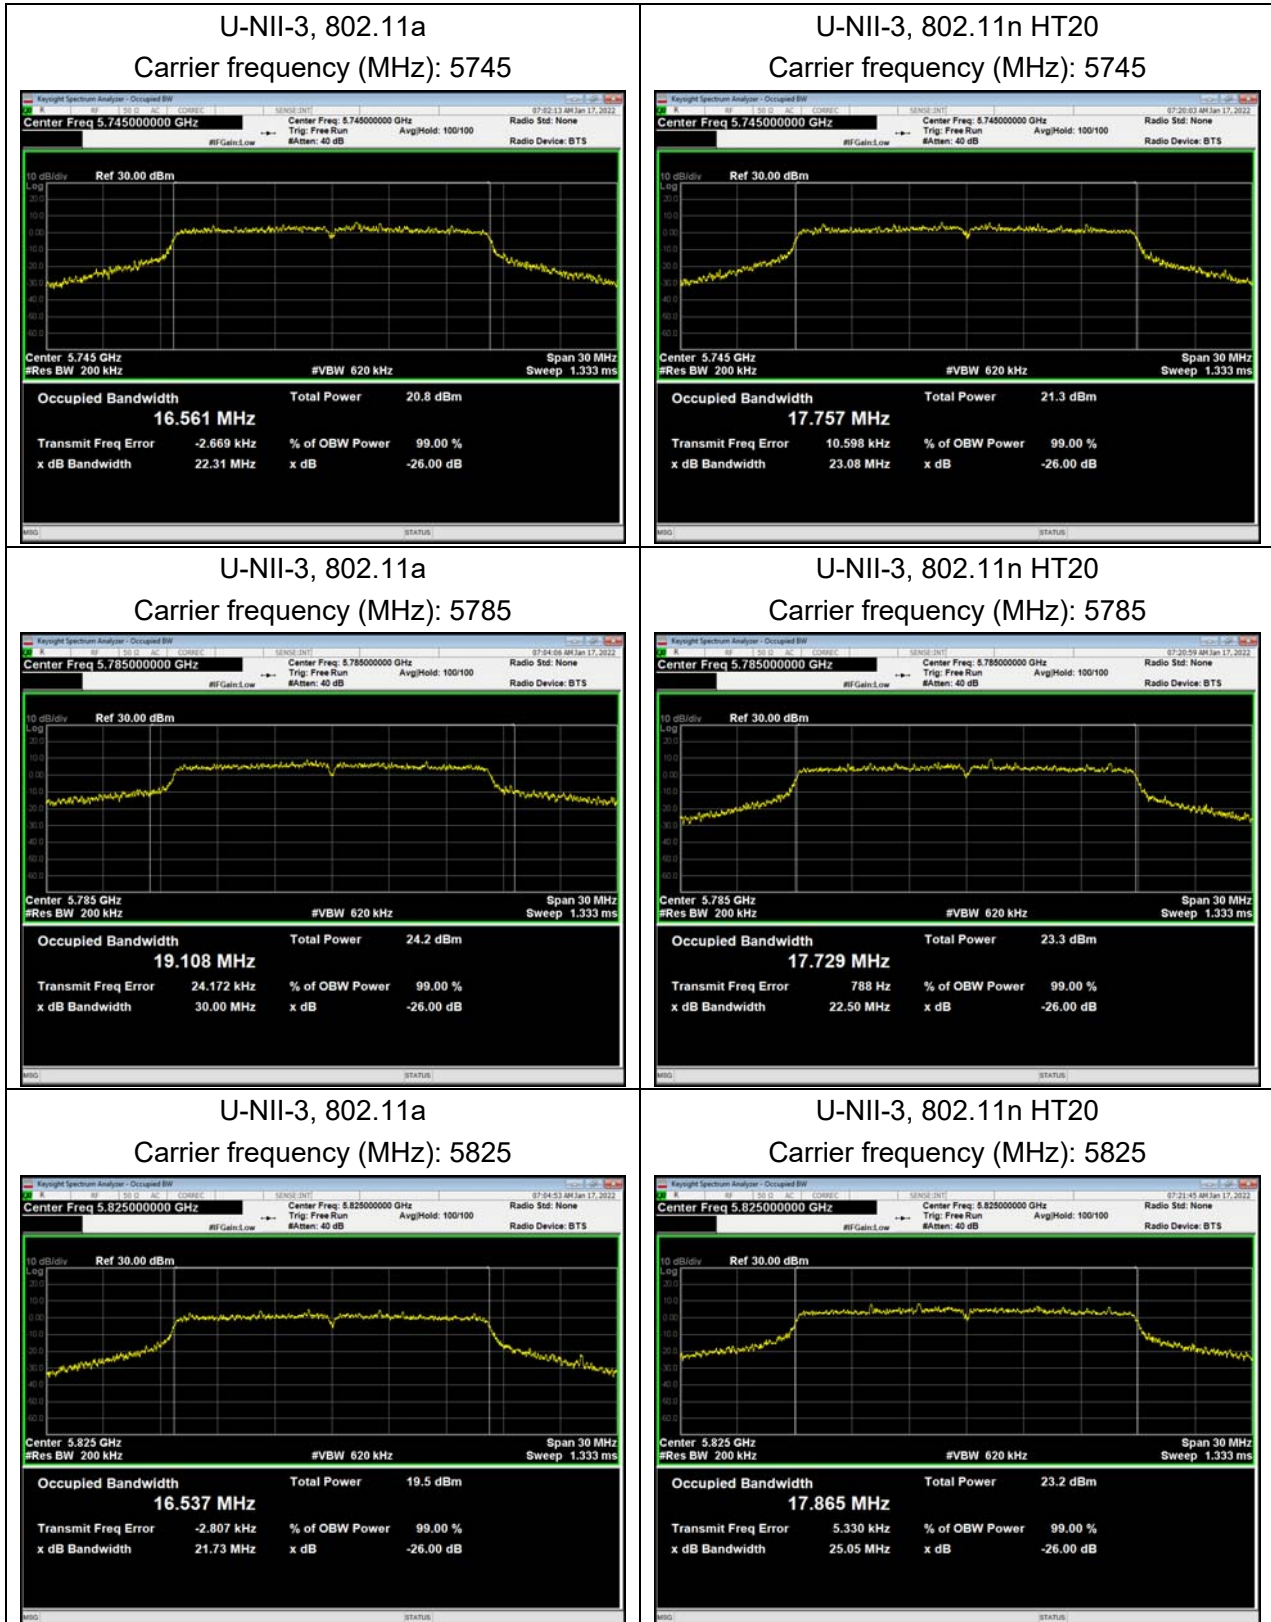



U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5755




U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5745



U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5785

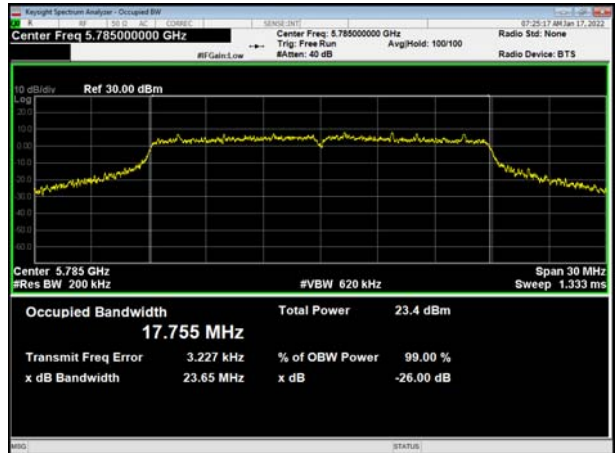

U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5755



U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5825







U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5795



U-NII-3, 802.11ac VHT80  
Carrier frequency (MHz): 5775



Minimum 6 dB bandwidth

U-NII-3, 802.11a  
Carrier frequency (MHz): 5745



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5745



U-NII-3, 802.11a  
Carrier frequency (MHz): 5785



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5785






U-NII-3, 802.11a  
Carrier frequency (MHz): 5825



U-NII-3, 802.11n HT20  
Carrier frequency (MHz): 5825

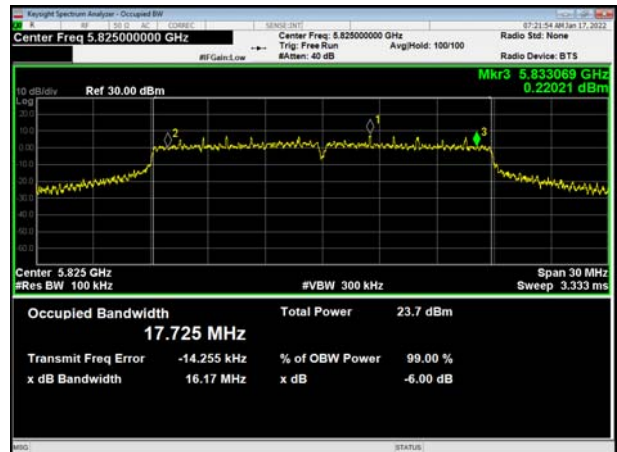


U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5755




U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5745



U-NII-3, 802.11n HT40  
Carrier frequency (MHz): 5795

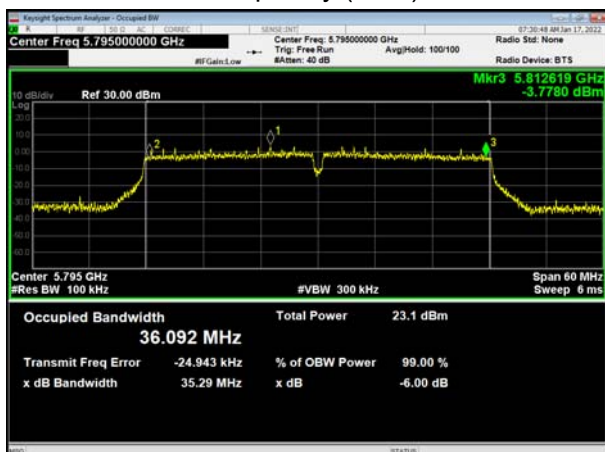

U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5785

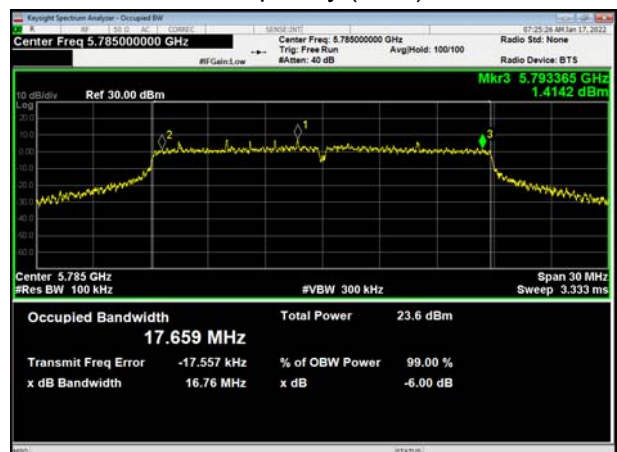


U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5755




U-NII-3, 802.11ac VHT20  
Carrier frequency (MHz): 5825



U-NII-3, 802.11ac VHT40  
Carrier frequency (MHz): 5795

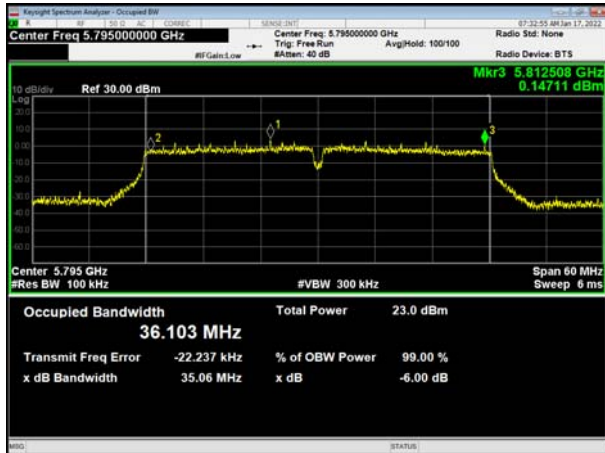

U-NII-3, 802.11ac VHT80  
Carrier frequency (MHz): 5775

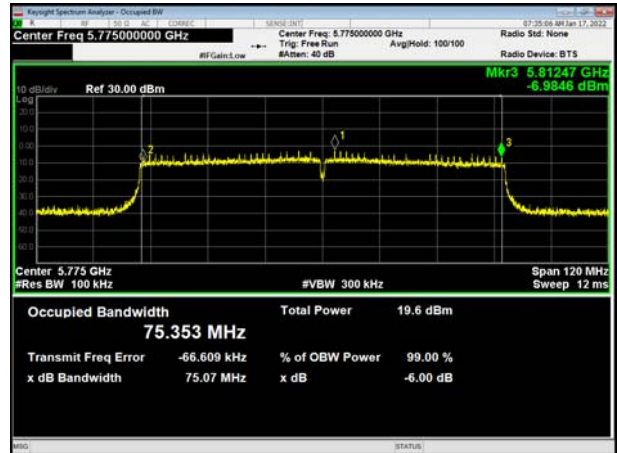

## 5.2. Average Power Output


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

During the process of the testing, The EUT was connected to the average power meter through an external attenuator and a known loss cable. The EUT is max power transmission with proper modulation. We use Maximum average Conducted Output Power Level Method in KDB789033 for this test

### Test Setup



### Limits

Rule FCC Part 15.407(a)(1)(2)(3)

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated





transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44 \text{ dB}$ .

**Test Results**

Mode	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11a	2.04	2.08	0.98	0.00
802.11n HT20	1.88	1.93	0.97	0.11
802.11n HT40	0.93	0.97	0.96	0.18
802.11ac VHT20	1.91	1.95	0.98	0.00
802.11ac VHT40	0.92	0.97	0.95	0.20
802.11ac VHT80	0.46	0.49	0.93	0.33

Note: when Duty cycle  $\geq 0.98$ , Duty cycle correction Factor not required.



Test Mode		Channel/Frequency (MHz)	B=26 dB bandwidth (MHz)	Limit 11 dBm + 10 log B (dBm)	Final Limit(dBm)
U-NII-2A	802.11a	52/5260	24.89	24.96>24	24
		56/5280	27.45	25.39>24	24
		60/5300	24.92	24.97>24	24
		64/5320	24.51	24.89>24	24
	802.11n HT20	52/5260	24.84	24.95>24	24
		60/5300	24.31	24.86>24	24
		64/5320	24.64	24.92>24	24
	802.11n HT40	54/5270	41.52	27.18>24	24
		62/5310	40.74	27.10>24	24
	802.11ac VHT20	52/5260	24.22	24.84>24	24
		60/5300	25.17	25.01>24	24
		64/5320	24.13	24.83>24	24
	802.11ac VHT40	54/5270	49.00	27.90>24	24
		62/5310	40.41	27.07>24	24
802.11ac VHT80	58/5290	80.52	30.06>24	24	
U-NII-2C	802.11a	100/5500	27.19	25.34>24	24
		120/5600	22.91	24.60>24	24
		136/5680	24.73	24.93>24	24
		140/5700	27.64	25.41>24	24
	802.11n HT20	100/5500	24.30	24.86>24	24
		120/5600	25.97	25.14>24	24
		140/5700	22.70	24.56>24	24
	802.11n HT40	102/5510	40.75	27.10>24	24
		110/5550	40.80	27.11>24	24
		118/5590	41.65	27.20>24	24
		134/5670	45.46	27.58>24	24
	802.11ac VHT20	100/5500	24.93	24.97>24	24
		120/5600	26.14	25.17>24	24
		140/5700	23.23	24.66>24	24
	802.11ac VHT40	102/5510	41.27	27.16>24	24
		110/5550	41.07	27.14>24	24
		118/5590	47.45	27.76>24	24
		134/5670	42.48	27.28>24	24
	802.11ac VHT80	106/5530	81.44	30.11>24	24
		122/5610	86.34	30.36>24	24

Note: 250mW=24dBm



Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

**U-NII-1**

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	16.91	16.91	24	PASS
	40/5200	18.34	18.34	24	PASS
	44/5220	17.81	17.81	24	PASS
	48/5240	18.63	18.63	24	PASS
802.11n HT20	36/5180	15.56	15.67	24	PASS
	40/5200	17.65	17.76	24	PASS
	48/5240	17.83	17.94	24	PASS
802.11n HT40	38/5190	13.21	13.39	24	PASS
	46/5230	17.53	17.71	24	PASS
802.11ac VHT20	36/5180	15.59	15.59	24	PASS
	40/5200	17.55	17.55	24	PASS
	48/5240	17.81	17.81	24	PASS
802.11ac VHT40	38/5190	13.27	13.47	24	PASS
	46/5230	17.57	17.77	24	PASS
802.11ac VHT80	42/5210	12.10	12.43	24	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor



## U-NII-2A

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	52/5260	18.73	18.73	24.00	PASS
	56/5280	18.75	18.75	24.00	PASS
	60/5300	18.07	18.07	24.00	PASS
	64/5320	16.45	16.45	24.00	PASS
802.11n HT20	52/5260	17.59	17.70	24.00	PASS
	60/5300	17.48	17.59	24.00	PASS
	64/5320	15.88	15.99	24.00	PASS
802.11n HT40	54/5270	17.15	17.33	24.00	PASS
	62/5310	13.71	13.89	24.00	PASS
802.11ac VHT20	52/5260	17.88	17.88	24.00	PASS
	60/5300	17.81	17.81	24.00	PASS
	64/5320	15.89	15.89	24.00	PASS
802.11ac VHT40	54/5270	17.21	17.41	24.00	PASS
	62/5310	13.79	13.99	24.00	PASS
802.11ac VHT80	58/5290	12.51	12.84	24.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

## U-NII-2C

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	100/5500	17.79	17.79	24.00	PASS
	120/5600	18.83	18.83	24.00	PASS
	136/5680	18.96	18.96	24.00	PASS
	140/5700	13.97	13.97	24.00	PASS
802.11n HT20	100/5500	17.07	17.18	24.00	PASS
	120/5600	16.98	17.09	24.00	PASS
	140/5700	12.59	12.70	24.00	PASS
802.11n HT40	102/5510	12.91	13.09	24.00	PASS
	110/5550	13.61	13.79	24.00	PASS
	118/5590	17.05	17.23	24.00	PASS
	134/5670	17.27	17.45	24.00	PASS
802.11ac	100/5500	17.02	17.02	24.00	PASS



VHT20	120/5600	16.78	16.78	24.00	PASS
	140/5700	12.70	12.70	24.00	PASS
802.11ac VHT40	102/5510	12.84	13.04	24.00	PASS
	110/5550	13.49	13.69	24.00	PASS
	118/5590	17.09	17.29	24.00	PASS
	134/5670	17.21	17.41	24.00	PASS
802.11ac VHT80	106/5530	11.77	11.97	24.00	PASS
	122/5610	16.49	16.82	24.00	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

## U-NII-3

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	149/5745	15.65	15.65	30	PASS
	157/5785	18.42	18.42	30	PASS
	165/5825	17.73	17.73	30	PASS
802.11n HT20	149/5745	15.23	15.34	30	PASS
	157/5785	17.41	17.52	30	PASS
	165/5825	17.01	17.12	30	PASS
802.11n HT40	151/5755	13.76	13.94	30	PASS
	159/5795	16.89	17.07	30	PASS
802.11ac VHT20	149/5745	15.14	15.14	30	PASS
	157/5785	17.19	17.19	30	PASS
	165/5825	17.01	17.01	30	PASS
802.11ac VHT40	151/5755	13.69	13.89	30	PASS
	159/5795	16.90	17.10	30	PASS
802.11ac VHT80	155/5775	13.46	13.79	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

### 5.3. Frequency Stability

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

##### 1. Frequency stability with respect to ambient temperature

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.

f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than 10°C, and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

##### 2. Frequency stability when varying supply voltage

Unless otherwise specified, these tests shall be made at ambient room temperature (+15°C to +25 °C). An antenna shall be connected to the antenna output terminals of the EUT if possible. If the EUT is equipped with or uses an adjustable-length antenna, then it shall be fully extended.

a) Supply the EUT with nominal voltage or install a new or fully charged battery in the EUT. Turn ON the EUT and couple its output to a frequency counter or other frequency-measuring instrument.



- b) Tune the EUT to one of the number of frequencies required in 5.6. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).
- c) Measure the frequency at each of the frequencies specified in 5.6.
- d) Repeat the above procedure at 85% and 115% of the nominal supply voltage.

**Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936\text{Hz}$



**Test Results**

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
3.87	0	5200.006366	5199.998997	5199.993925	5199.987840
3.87	5	5200.007288	5199.994127	5199.985609	5199.983830
3.87	10	5200.002987	5199.991552	5199.979741	5199.980023
3.87	15	5199.994367	5199.987690	5199.969826	5199.973855
3.87	20	5199.984382	5199.986588	5199.967056	5199.970117
3.87	25	5199.975814	5199.984558	5199.957813	5199.963052
3.87	30	5199.969707	5199.981922	5199.953286	5199.959578
3.87	35	5199.964054	5199.981159	5199.951134	5199.950273
3.6	20	5199.955137	5199.979692	5199.950062	5199.948275
4.48	20	5199.945861	5199.973150	5199.942174	5199.938953
Max. ΔMHz		-0.054139023	-0.026850376	-0.057826011	-0.061047199
PPM		-10.41135056	-5.163533942	-11.12038666	-11.73984604

Voltage (V)	Temperature (°C)	U-NII-2A Test Results			
		5300MHz			
		1min	2min	5min	10min
3.87	0	5300.001544	5299.996309	5299.991716	5299.982313
3.87	5	5299.995698	5299.995893	5299.988193	5299.977336
3.87	10	5299.989960	5299.990594	5299.984213	5299.975113
3.87	15	5299.986468	5299.983773	5299.978930	5299.972490
3.87	20	5299.981423	5299.982481	5299.969183	5299.970879
3.87	25	5299.978659	5299.972555	5299.965624	5299.962414
3.87	30	5299.976111	5299.972048	5299.960761	5299.959335
3.87	35	5299.968454	5299.964542	5299.958201	5299.957702
3.6	20	5299.960271	5299.962818	5299.955458	5299.956075
4.48	20	5299.954199	5299.955594	5299.950423	5299.954117
Max. ΔMHz		-0.045800693	-0.044405801	-0.049577154	-0.045883434
PPM		-8.641640122	-8.378452941	-9.354180038	-8.657251706



Voltage (V)	Temperature (°C)	U-NII-2C Test Results			
		5580MHz			
		1min	2min	5min	10min
3.87	0	5579.997750	5579.991556	5579.989106	5579.987278
3.87	5	5579.989903	5579.986345	5579.986138	5579.978678
3.87	10	5579.986179	5579.977885	5579.977484	5579.977827
3.87	15	5579.982168	5579.972234	5579.974181	5579.970885
3.87	20	5579.972424	5579.966917	5579.973707	5579.964800
3.87	25	5579.969551	5579.963180	5579.968050	5579.958903
3.87	30	5579.960271	5579.960648	5579.960049	5579.953833
3.87	35	5579.953921	5579.955499	5579.952384	5579.950044
3.6	20	5579.953785	5579.950352	5579.943713	5579.949103
4.48	20	5579.948400	5579.943712	5579.935541	5579.942582
Max. ΔMHz		-0.051599679	-0.05628808	-0.064459383	-0.057418328
PPM		-9.247254244	-10.08746947	-11.55186075	-10.29002289

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
3.87	0	5785.005040	5784.997943	5784.988755	5784.986560
3.87	5	5784.999866	5784.993483	5784.979396	5784.983792
3.87	10	5784.994959	5784.987546	5784.972296	5784.977421
3.87	15	5784.988180	5784.980664	5784.969224	5784.976659
3.87	20	5784.986632	5784.971663	5784.965940	5784.974786
3.87	25	5784.980591	5784.970233	5784.956962	5784.969547
3.87	30	5784.979301	5784.968199	5784.947629	5784.963090
3.87	35	5784.972948	5784.960938	5784.940464	5784.956411
3.6	20	5784.969541	5784.958907	5784.939380	5784.954644
4.48	20	5784.961272	5784.950787	5784.933284	5784.954630
Max. ΔMHz		-0.038728162	-0.049212928	-0.066715725	-0.045370454
PPM		-6.694582859	-8.506988409	-11.53253678	-7.842775127

## 5.4. Power Spectral Density

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

Set RBW = 1MHz, VBW =3MHz for the band 5.150-5.250GHz, 5.250-5.350GHz, 5.470-5.725GHz.  
 Set RBW = 470kHz, VBW =1.5MHz for the band 5.725-5.850GHz

The conducted PSD is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

### Test setup



### Limits

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2) / Part 15.407(a)(3)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the



amount in dB that the directional gain of the antenna exceeds 6 dBi.

Frequency Bands/MHz	Limits
5150-5250	11dBm/MHz
5.25-5.35 GHz and 5.47-5.725 GHz	11dBm/MHz
5725-5850	30dBm/500kHz

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**U-NII-1**

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36	7.05	7.05	11	PASS
	40	8.29	8.29	11	PASS
	44	7.35	7.35	11	PASS
	48	7.99	7.99	11	PASS
802.11n HT20	36	5.40	5.51	11	PASS
	40	7.12	7.23	11	PASS
	48	6.82	6.93	11	PASS
802.11n HT40	38	0.15	0.33	11	PASS
	46	3.87	4.05	11	PASS
802.11ac VHT20	36	5.53	5.53	11	PASS
	40	7.06	7.06	11	PASS
	48	6.98	6.98	11	PASS
802.11ac VHT40	38	-0.02	0.18	11	PASS
	46	3.90	4.10	11	PASS
802.11ac VHT80	42	-3.81	-3.48	11	PASS

**U-NII-2A**

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	52	8.00	8.00	11	PASS
	56	8.18	8.18	11	PASS
	60	8.21	8.21	11	PASS
	64	7.51	7.51	11	PASS
802.11n HT20	52	6.78	6.89	11	PASS
	60	6.85	6.96	11	PASS
	64	5.32	5.43	11	PASS
802.11n HT40	54	3.72	3.90	11	PASS
	62	0.37	0.55	11	PASS
802.11ac VHT20	52	6.91	6.91	11	PASS
	60	6.99	6.99	11	PASS
	64	5.22	5.22	11	PASS
802.11ac VHT40	54	3.45	3.65	11	PASS
	62	0.74	0.94	11	PASS
802.11ac VHT80	58	-3.19	-2.86	11	PASS





## U-NII-2C

Mode	Channel Number	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	100	8.12	8.12	11	PASS
	120	5.89	5.89	11	PASS
	136	4.82	4.82	11	PASS
	140	3.97	3.97	11	PASS
802.11n HT20	100	7.06	7.17	11	PASS
	120	6.85	6.96	11	PASS
	140	2.61	2.72	11	PASS
802.11n HT40	102	-0.26	-0.08	11	PASS
	110	0.46	0.64	11	PASS
	118	3.87	4.05	11	PASS
	134	3.67	3.85	11	PASS
802.11ac VHT20	100	7.02	7.02	11	PASS
	120	6.66	6.66	11	PASS
	140	2.65	2.65	11	PASS
802.11ac VHT40	102	-0.37	-0.17	11	PASS
	110	0.38	0.58	11	PASS
	118	4.05	4.25	11	PASS
	134	3.53	3.73	11	PASS
802.11ac VHT80	106	-4.27	-3.94	11	PASS
	122	0.13	0.46	11	PASS




## U-NII-3

Mode	Channel Number	Read Value (dBm/470kHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	149	2.04	2.31	30	PASS
	157	5.24	5.51	30	PASS
	165	4.29	4.56	30	PASS
802.11n HT20	149	2.04	2.42	30	PASS
	157	3.75	4.13	30	PASS
	165	3.92	4.30	30	PASS
802.11n HT40	151	-3.22	-2.77	30	PASS
	159	0.14	0.59	30	PASS
802.11ac VHT20	149	2.08	2.35	30	PASS
	157	4.07	4.34	30	PASS
	165	4.22	4.49	30	PASS
802.11ac VHT40	151	-2.94	-2.47	30	PASS
	159	0.12	0.59	30	PASS
802.11ac VHT80	155	-6.62	-6.02	30	PASS


Note: PSD=Read Value+Duty cycle+10\*LOG(500/470) correction factor




U-NII-1, 802.11a, Channel No.: 36

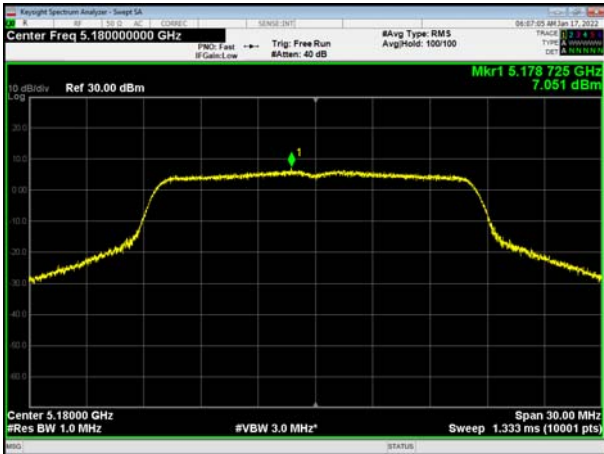


U-NII-1, 802.11n HT20, Channel No.: 36

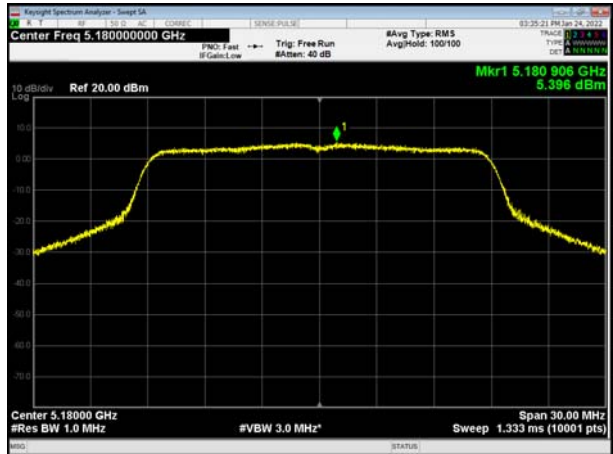


U-NII-1, 802.11a, Channel No.: 40

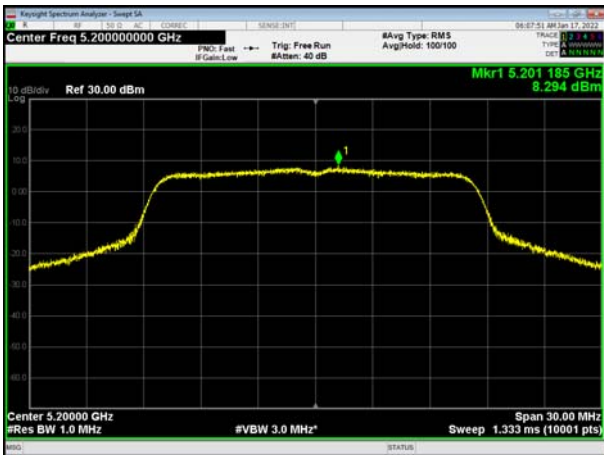


U-NII-1, 802.11n HT20, Channel No.: 40

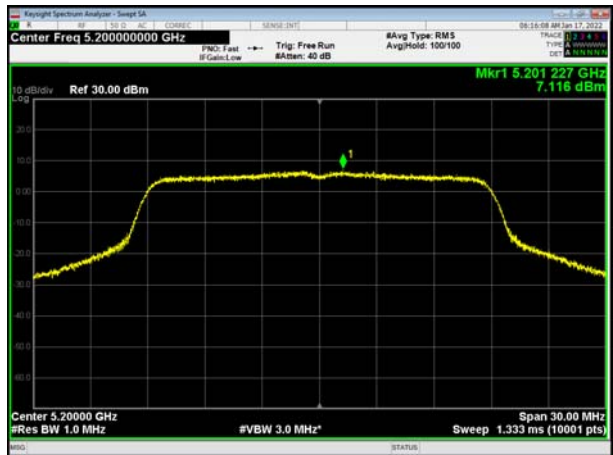

U-NII-1, 802.11a, Channel No.: 44

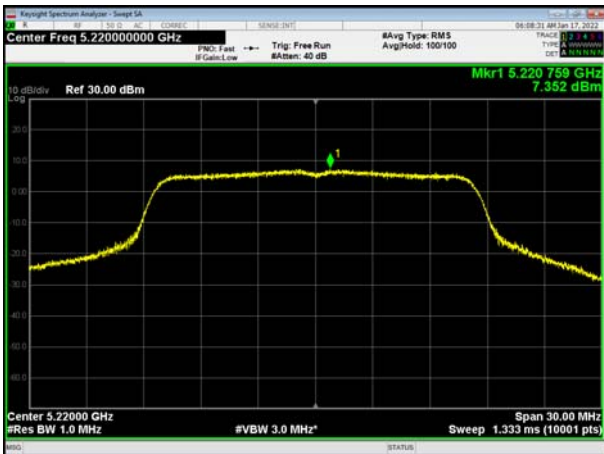


U-NII-1, 802.11n HT20, Channel No.: 48

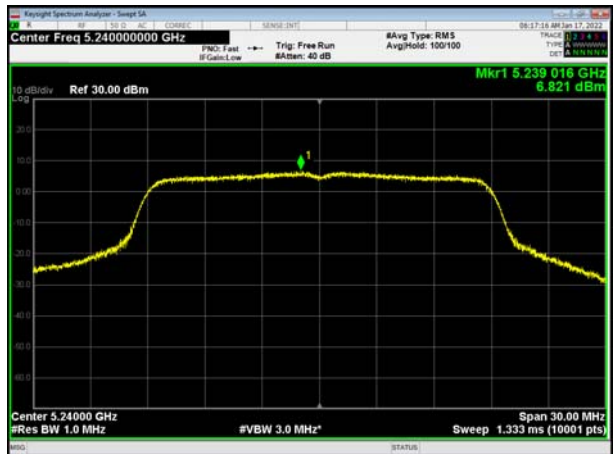





U-NII-1, 802.11a, Channel No.: 48

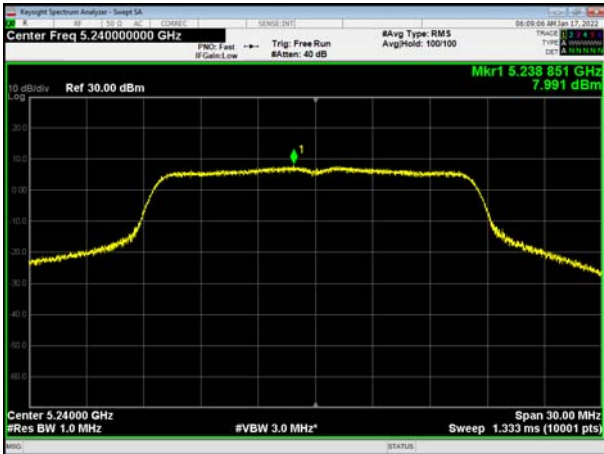


U-NII-1, 802.11ac VHT20, Channel No.: 36

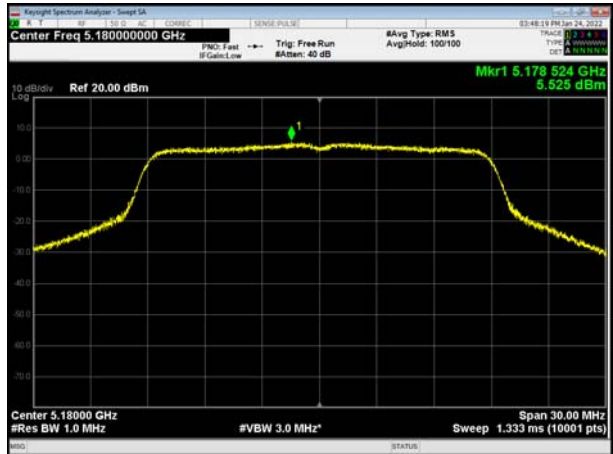


U-NII-1, 802.11n HT40, Channel No.: 38

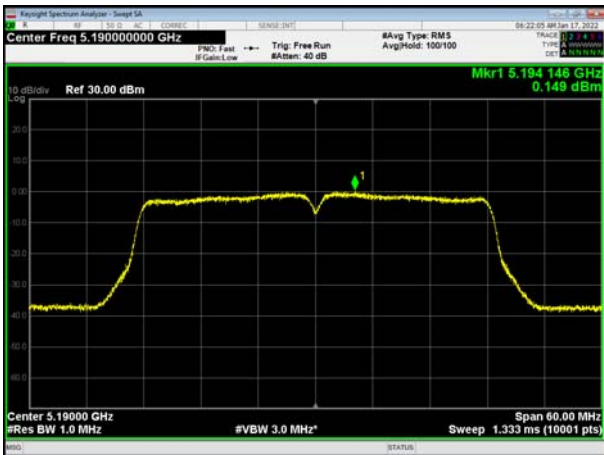


U-NII-1, 802.11ac VHT20, Channel No.: 40

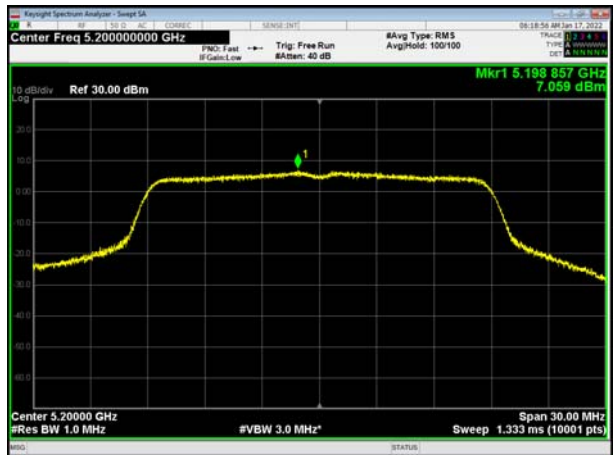

U-NII-1, 802.11n HT40, Channel No.: 46

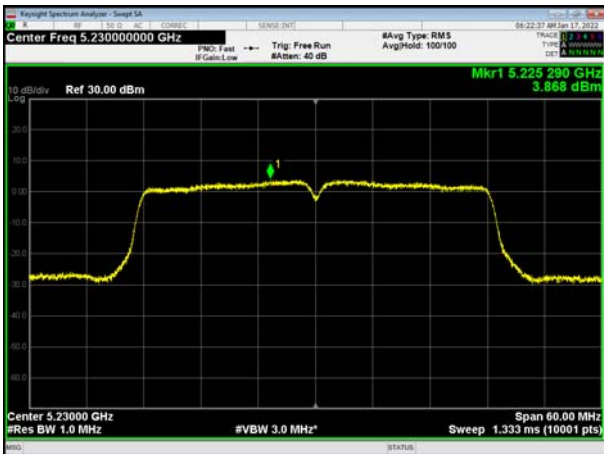


U-NII-1, 802.11ac VHT20, Channel No.: 48

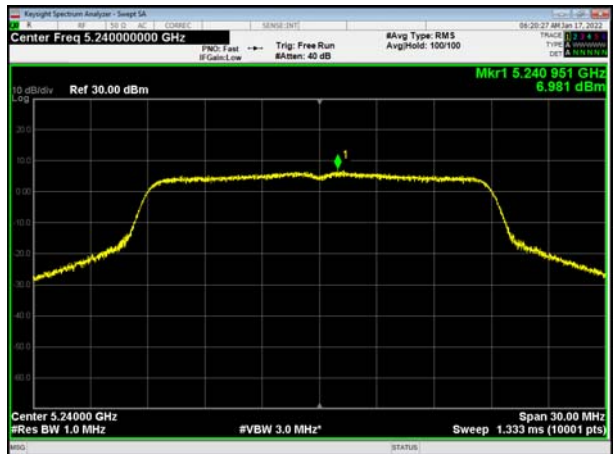





U-NII-1, 802.11ac VHT40, Channel No.: 38

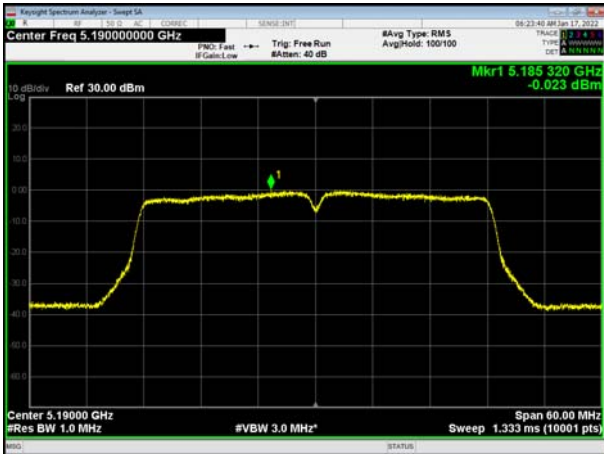


U-NII-1, 802.11ac VHT80, Channel No.: 42

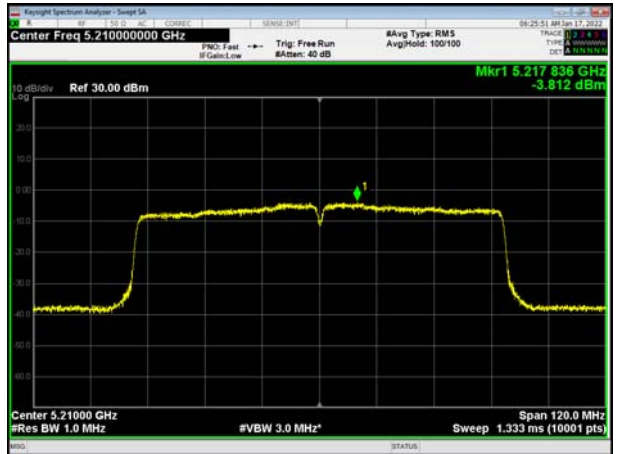


U-NII-1, 802.11ac VHT40, Channel No.: 46

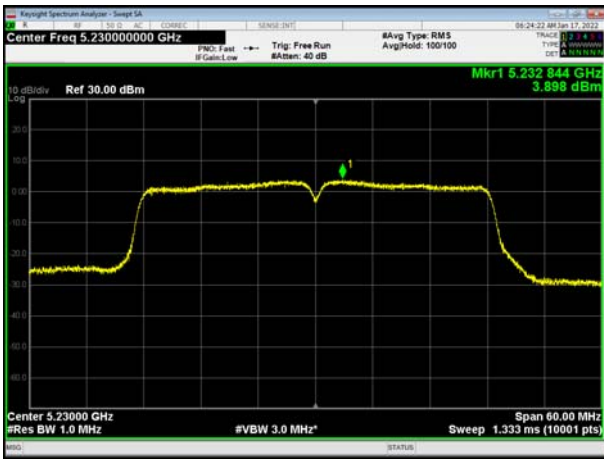


U-NII-2A, 802.11a, Channel No.: 52

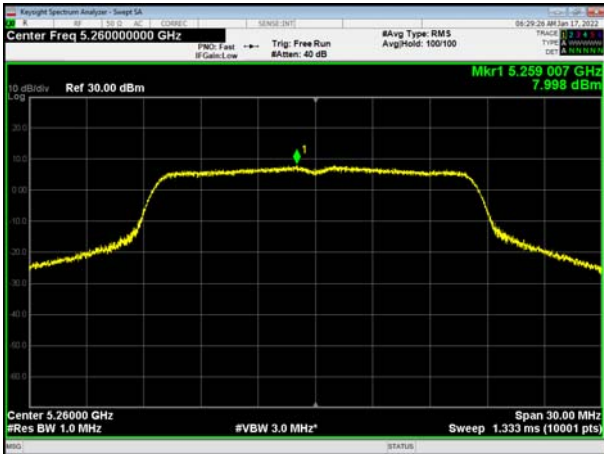


U-NII-2A, 802.11n HT20, Channel No.: 52

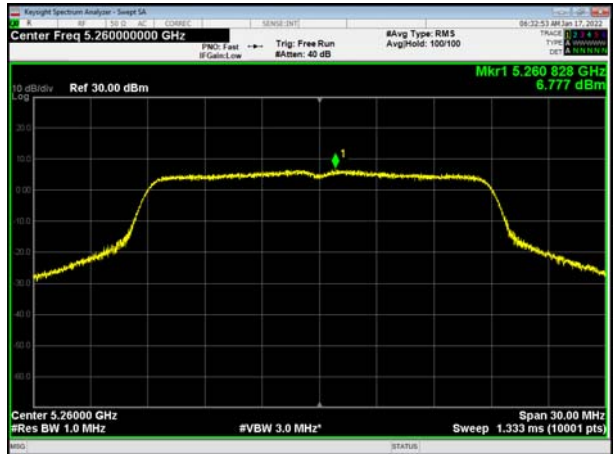


U-NII-2A, 802.11a, Channel No.: 56

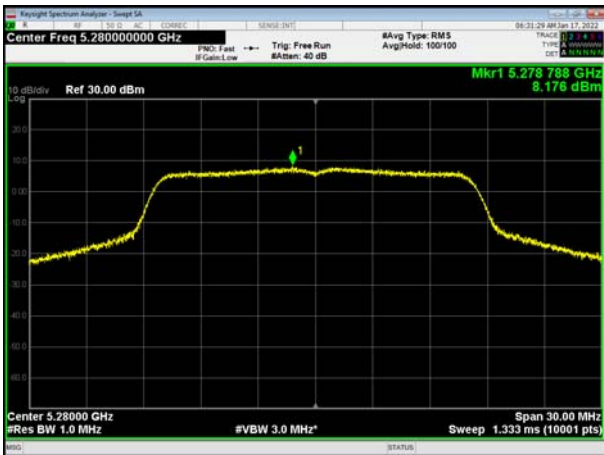


U-NII-2A, 802.11n HT20, Channel No.: 60

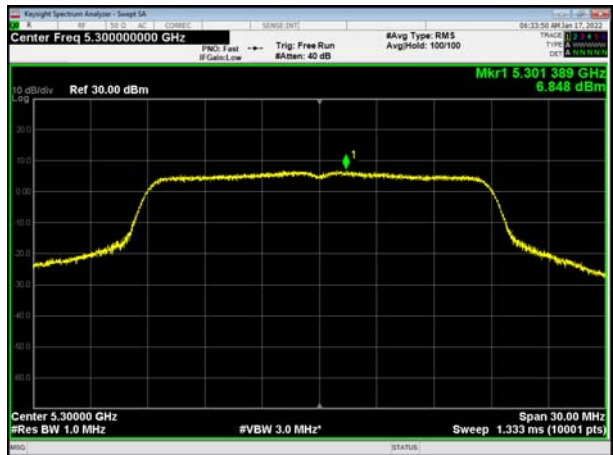

U-NII-2A, 802.11a, Channel No.: 60

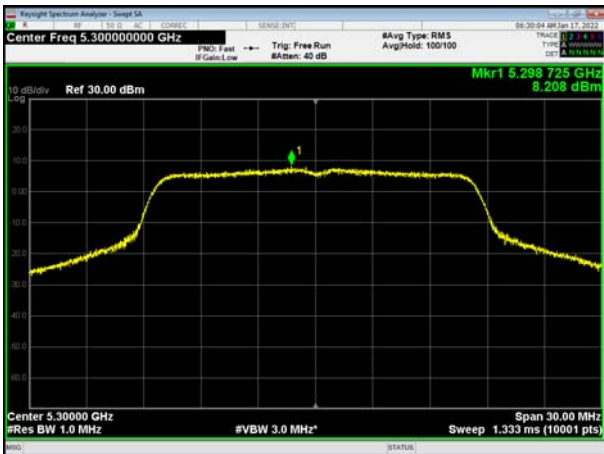


U-NII-2A, 802.11n HT20, Channel No.: 64

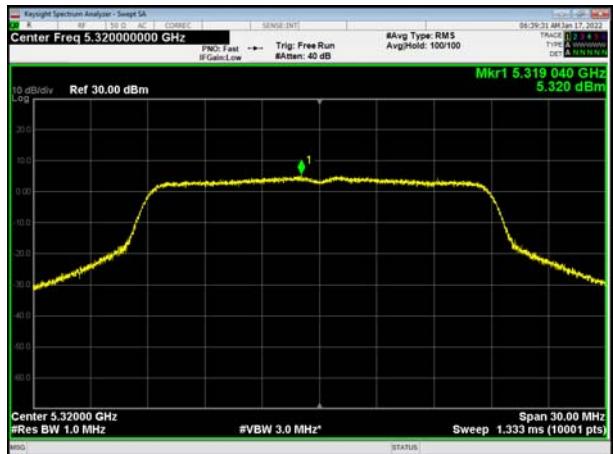





U-NII-2A, 802.11a, Channel No.: 64

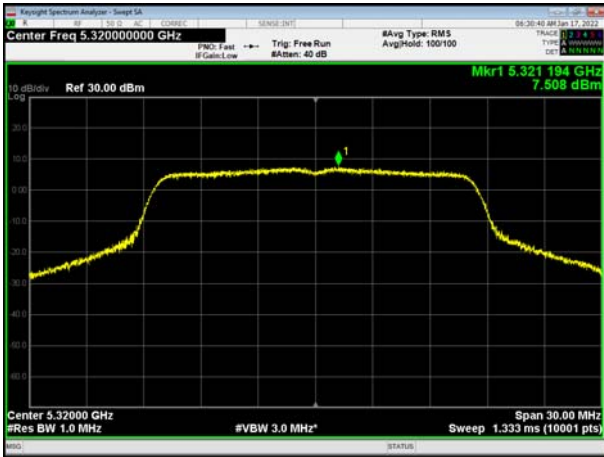


U-NII-2A, 802.11ac VHT20, Channel No.:52

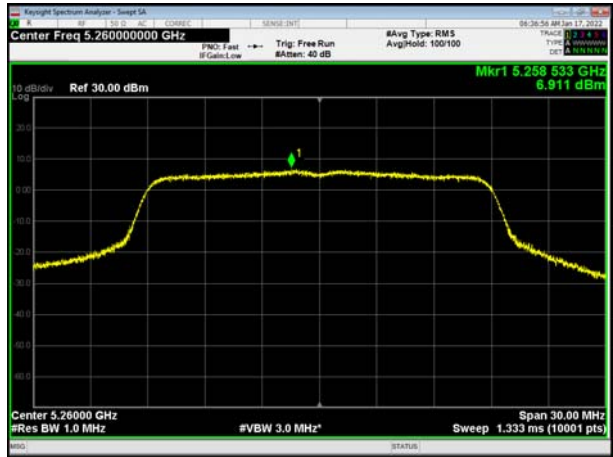


U-NII-2A, 802.11n HT40, Channel No.: 54

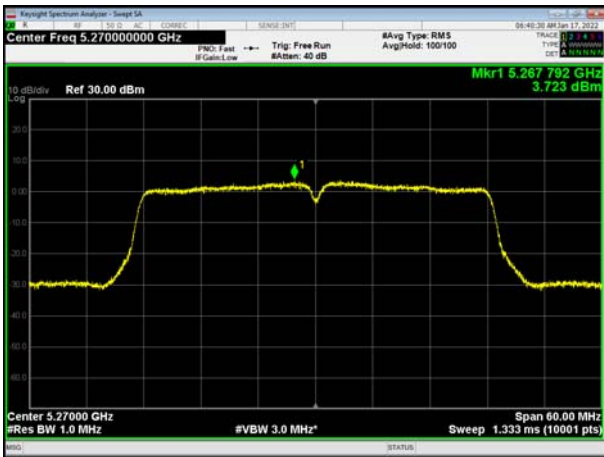


U-NII-2A, 802.11ac VHT20, Channel No.: 60

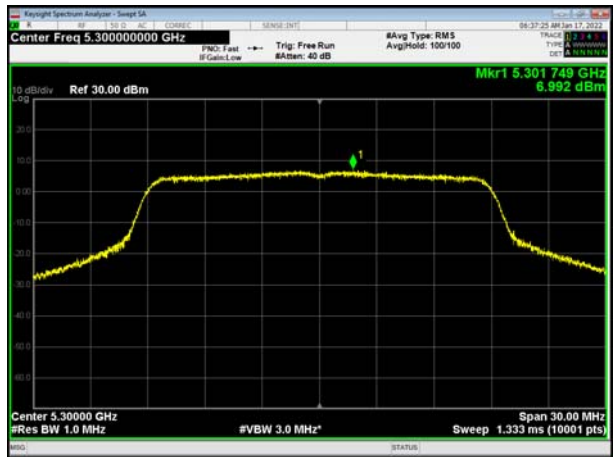

U-NII-2A, 802.11n HT40, Channel No.: 62

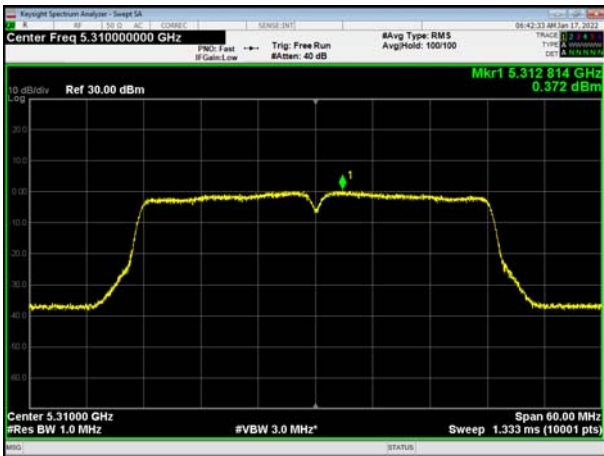


U-NII-2A, 802.11ac VHT20, Channel No.: 64

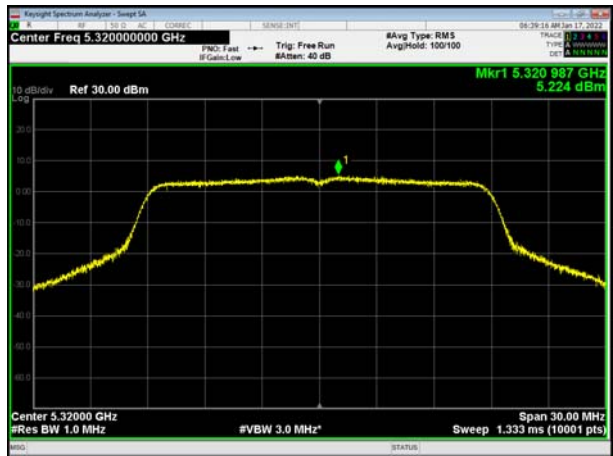





U-NII-2A, 802.11ac VHT40, Channel No.: 54

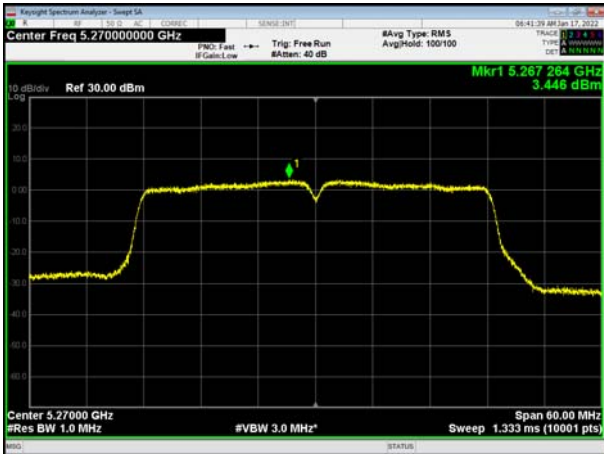

U-NII-2A, 802.11ac VHT80, Channel No.: 58

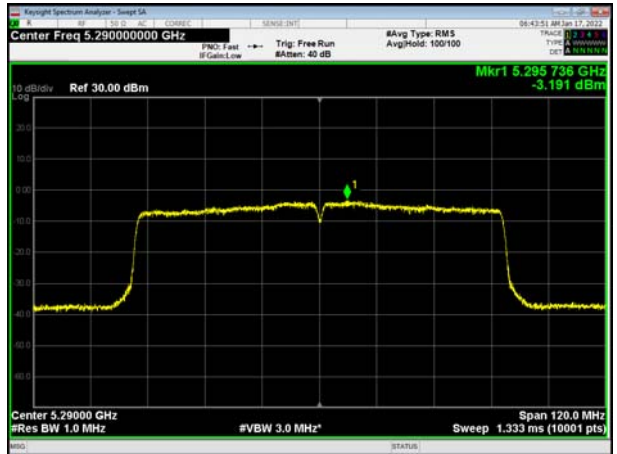


U-NII-2A, 802.11ac VHT40, Channel No.: 62

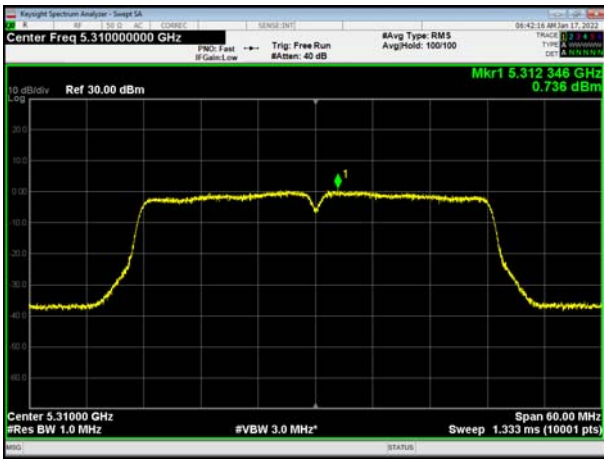





U-NII-2C, 802.11a, Channel No.: 100

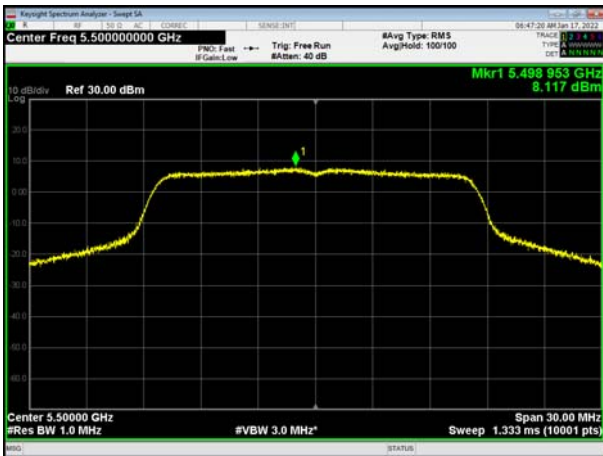

U-NII-2C, 802.11n HT20, Channel No.: 100

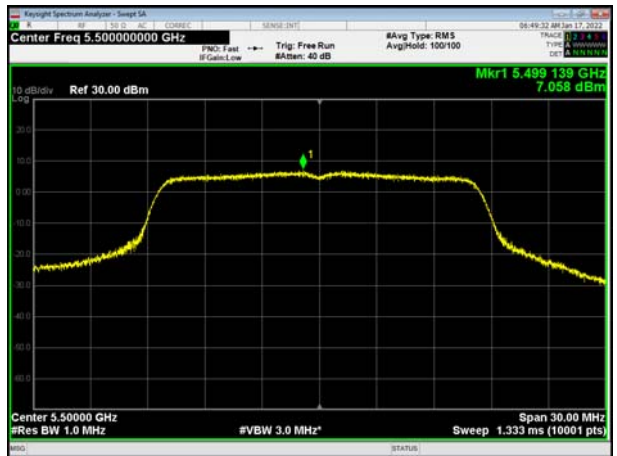


U-NII-2C, 802.11a, Channel No.: 120

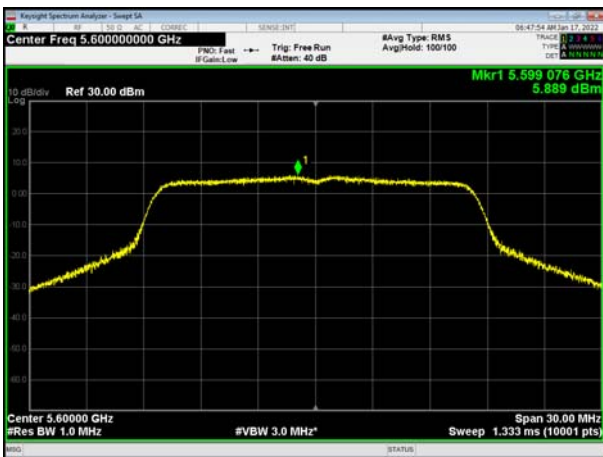


U-NII-2C, 802.11n HT20, Channel No.: 116









U-NII-2C, 802.11a, Channel No.: 136

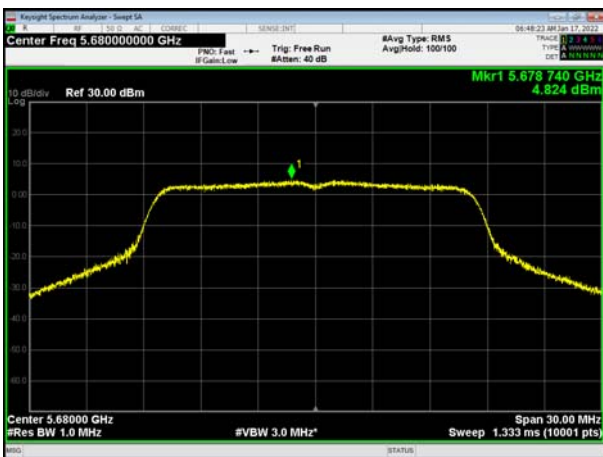


U-NII-2C, 802.11n HT20, Channel No.: 140

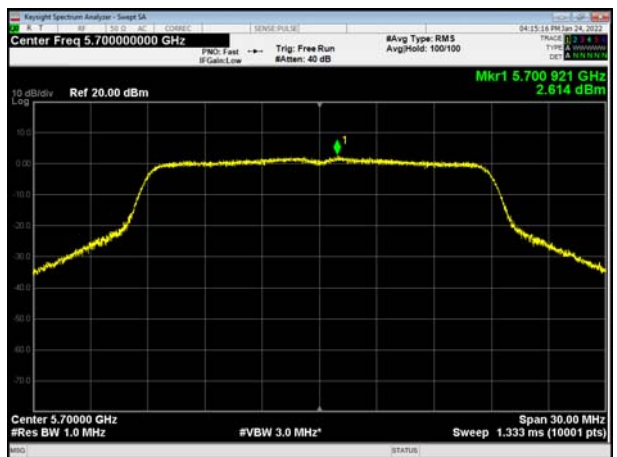


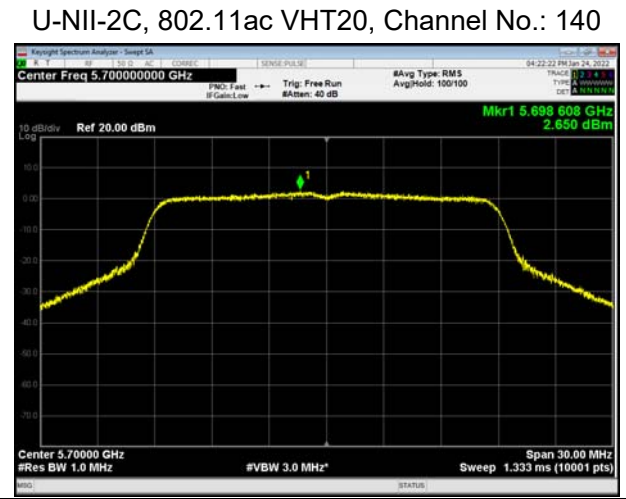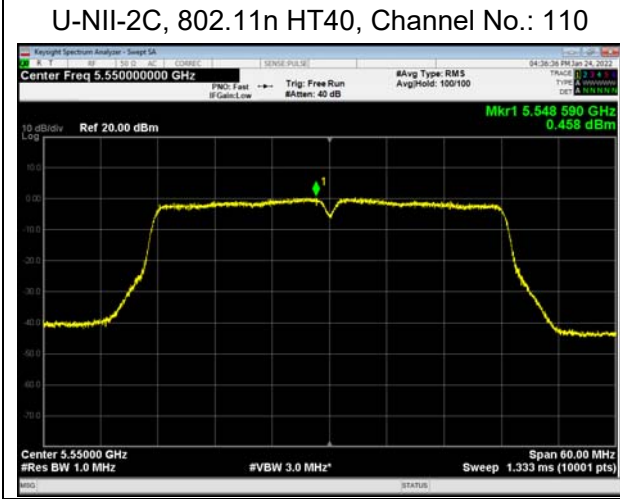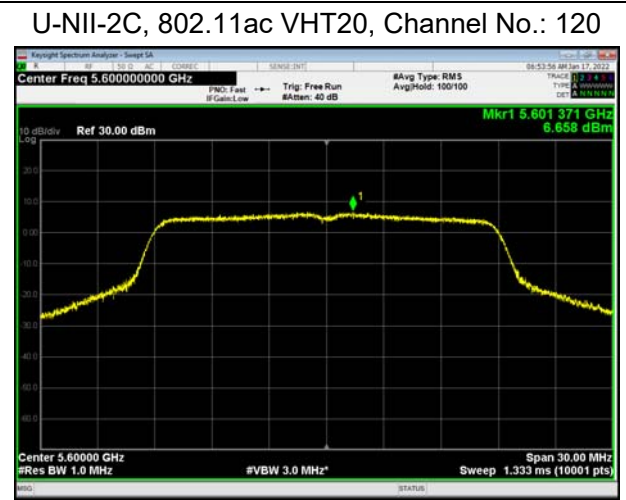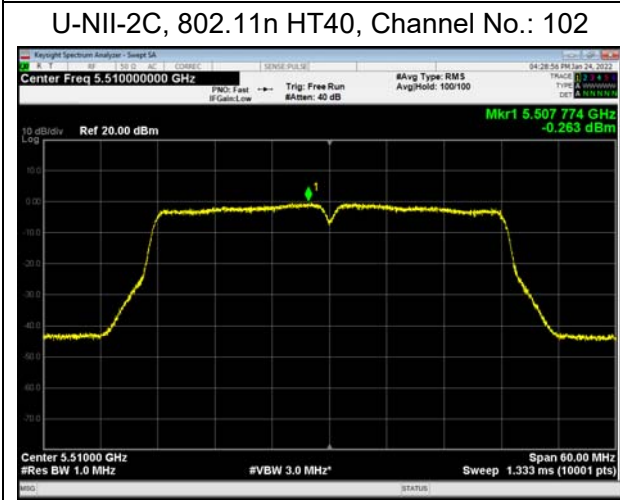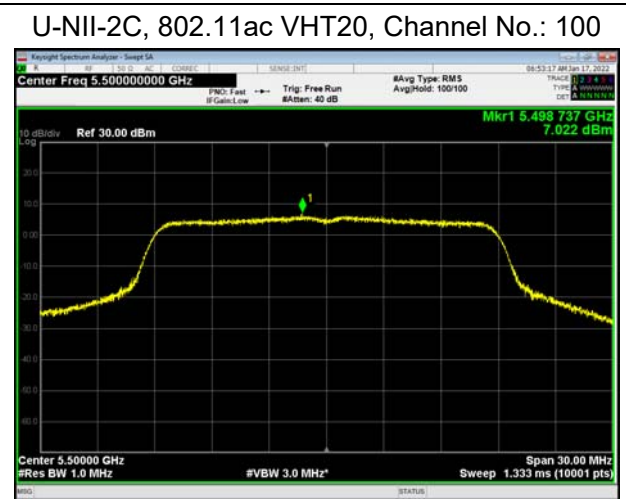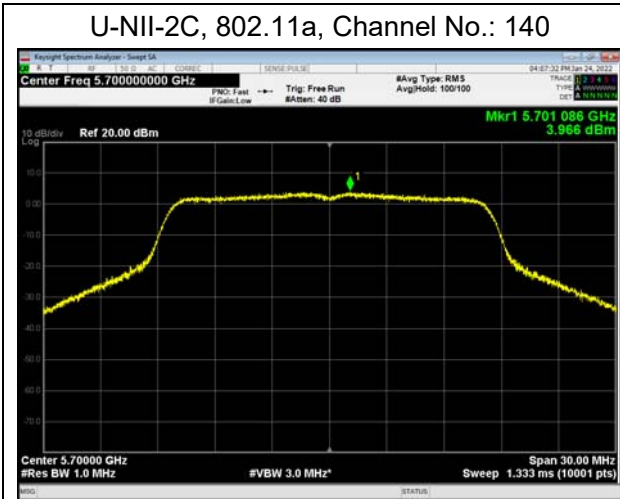


U-NII-2C, 802.11n HT40, Channel No.: 118

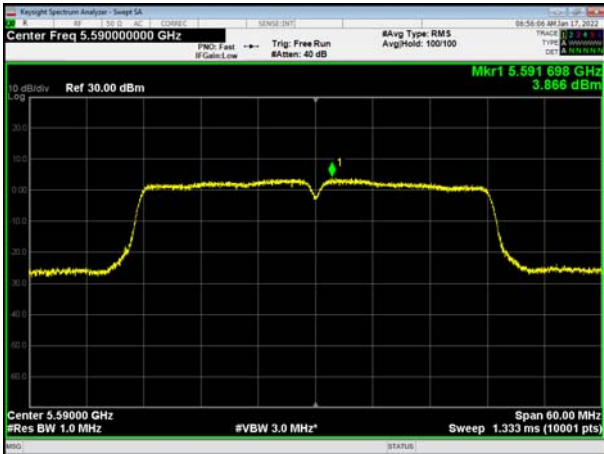


U-NII-2C, 802.11ac VHT40, Channel No.: 102

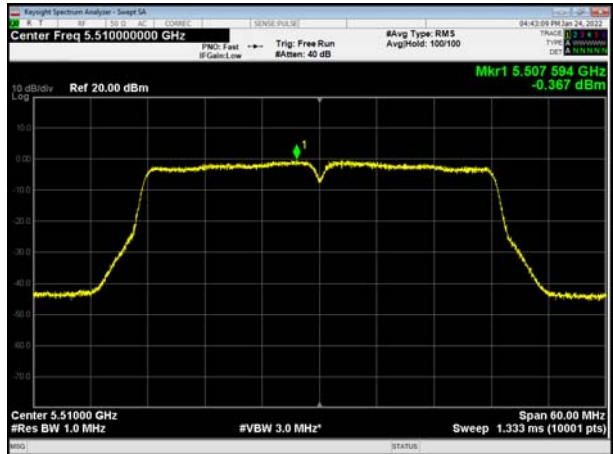


U-NII-2C, 802.11n HT40, Channel No.: 134

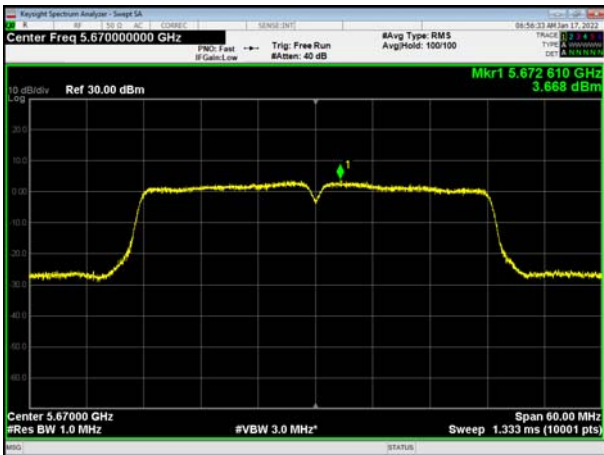


U-NII-2C, 802.11ac VHT40, Channel No.: 110


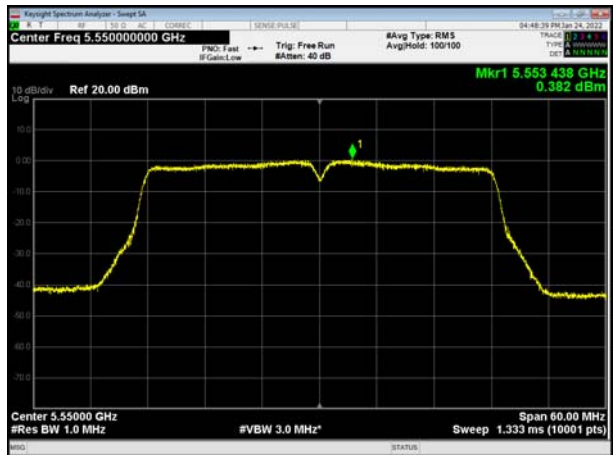


U-NII-2C, 802.11ac VHT40, Channel No.: 118

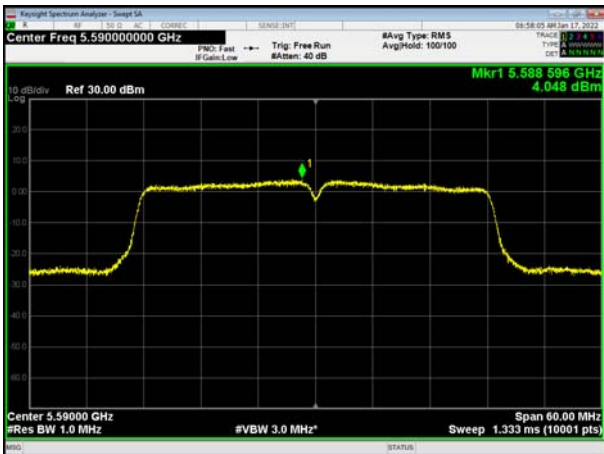


U-NII-2C, 802.11ac VHT80, Channel No.: 106

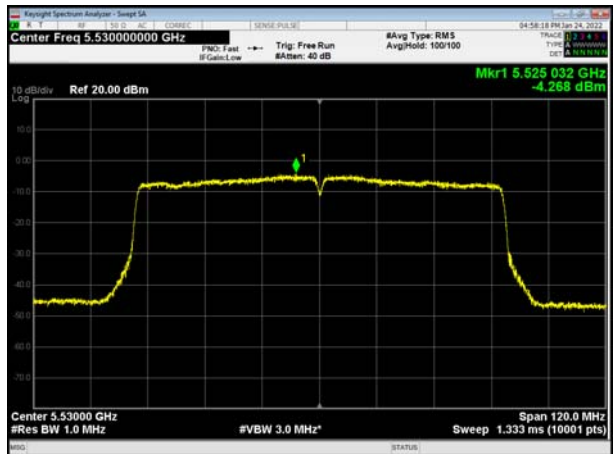


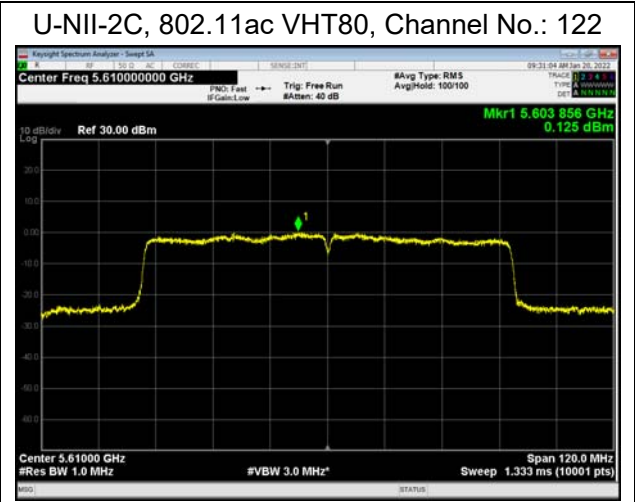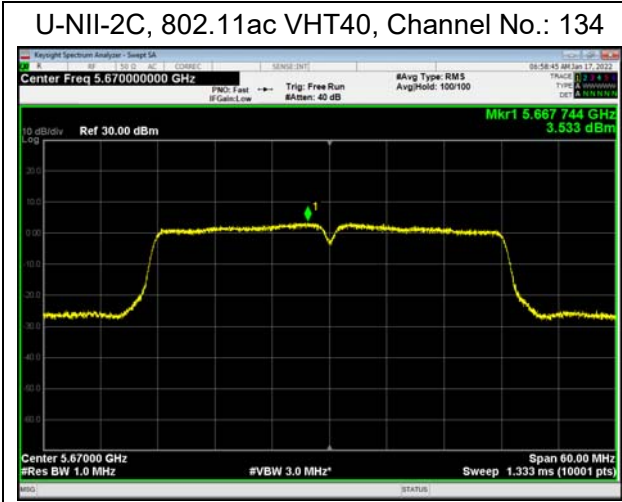


U-NII-3, 802.11a, Channel No.: 149

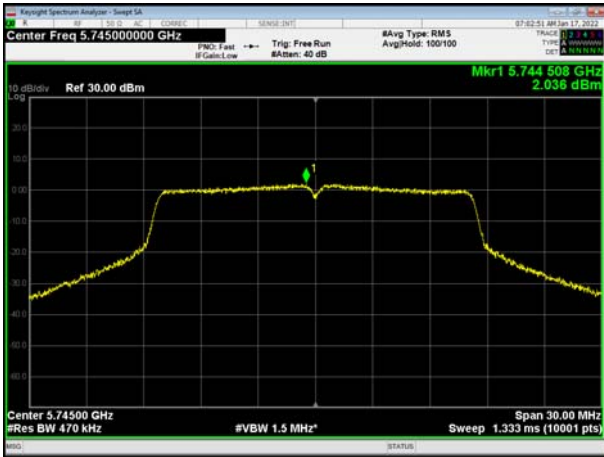


U-NII-3, 802.11n HT20, Channel No.: 149

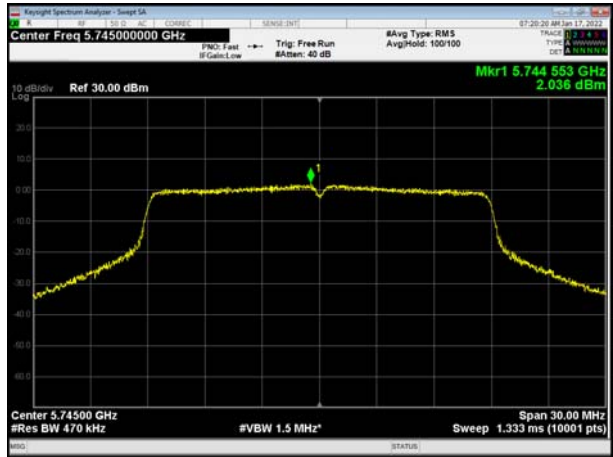


U-NII-3, 802.11a, Channel No.: 157

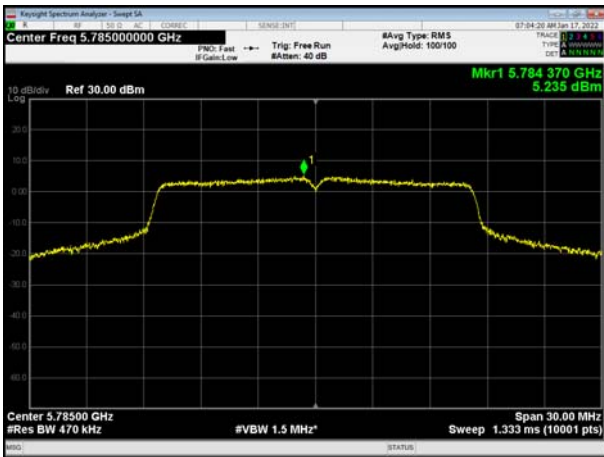


U-NII-3, 802.11n HT20, Channel No.: 157

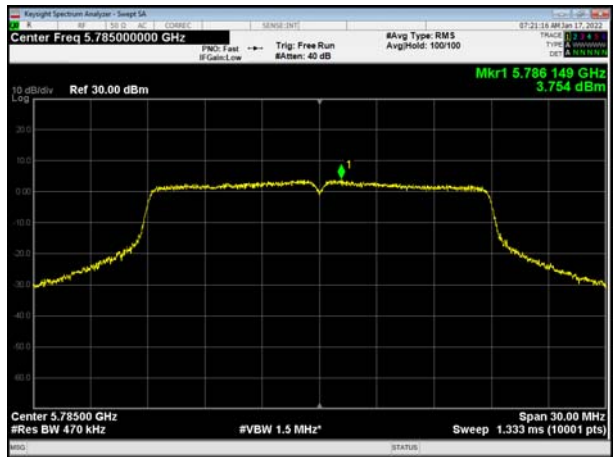

U-NII-3, 802.11a, Channel No.: 165

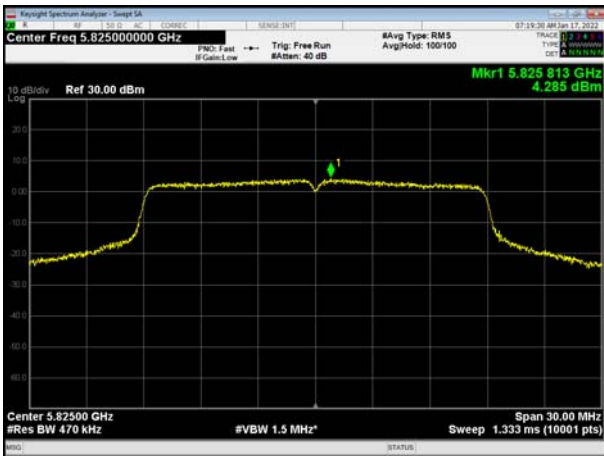


U-NII-3, 802.11n HT20, Channel No.: 165

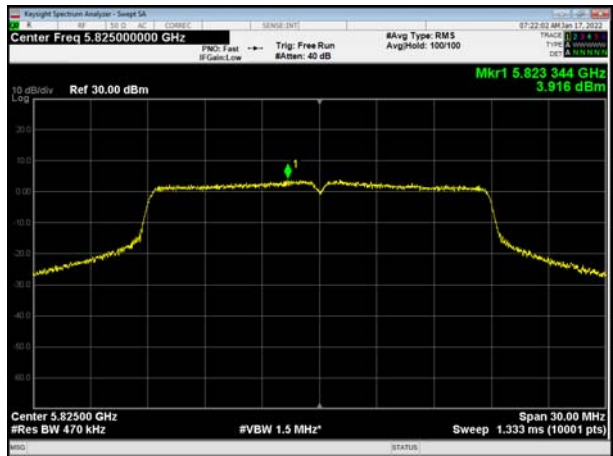







U-NII-3, 802.11n HT40, Channel No.: 151

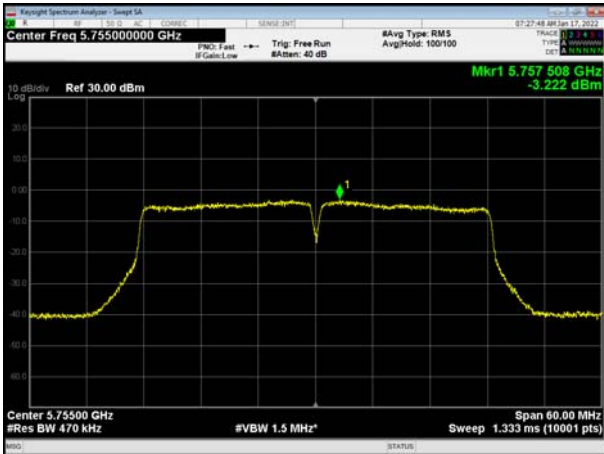


U-NII-3, 802.11ac VHT20, Channel No.: 149

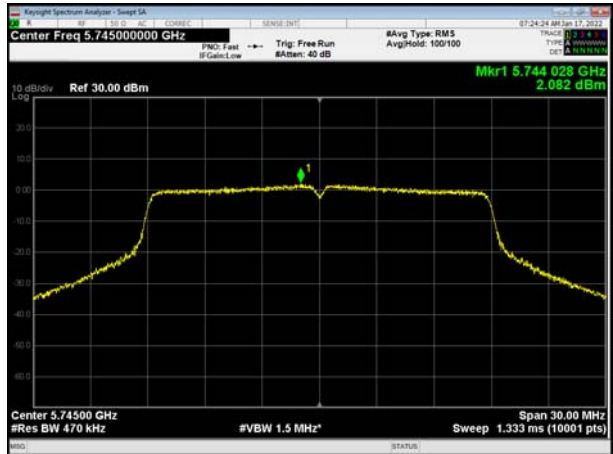


U-NII-3, 802.11n HT40, Channel No.: 159

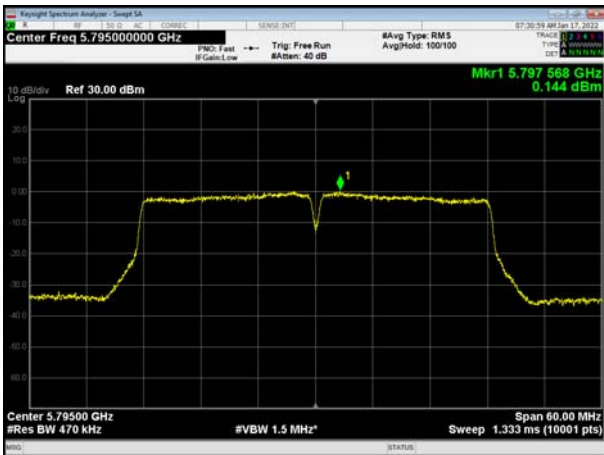


U-NII-3, 802.11ac VHT20, Channel No.: 157

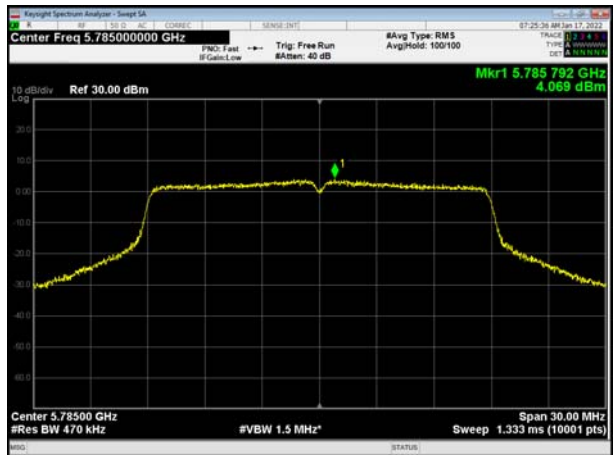



U-NII-3, 802.11ac VHT40, Channel No.: 151

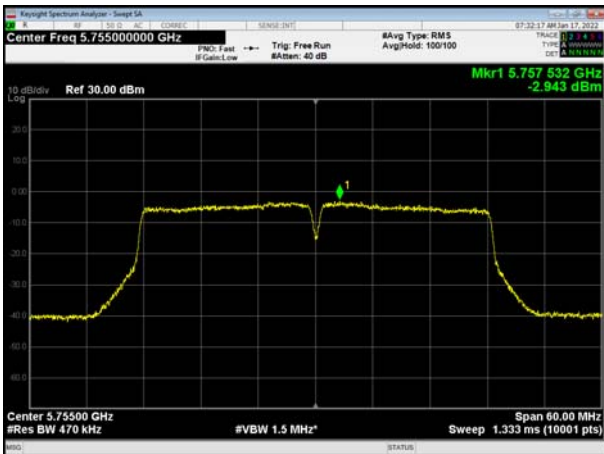

U-NII-3, 802.11ac VHT20, Channel No.: 165

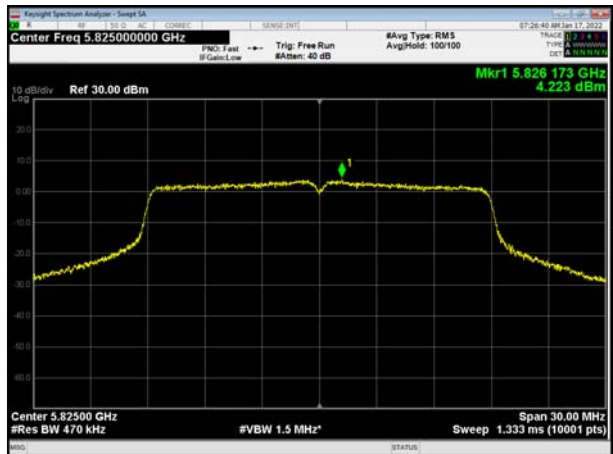



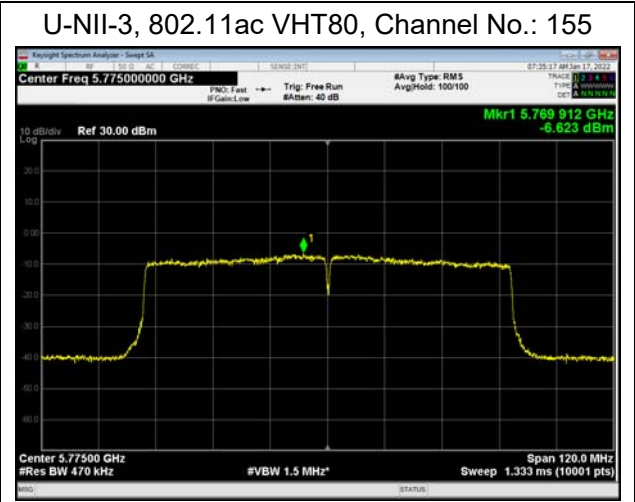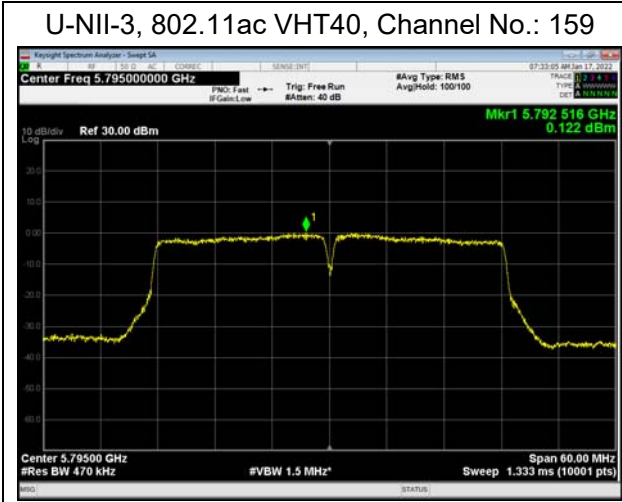

## 5.5. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where  $D$  is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific



emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.


3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than  $[1 / (\text{minimum transmitter on time})]$  and no less than 1 Hz.


The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.

The test is in transmitting mode.


9KHz~~~30MHz

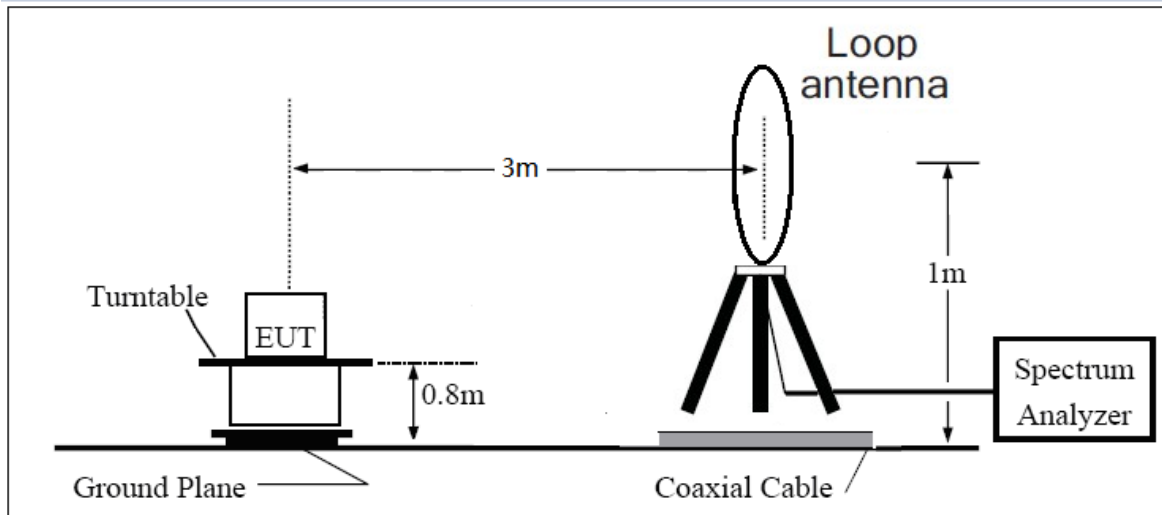

30MHz~~~ 1GHz

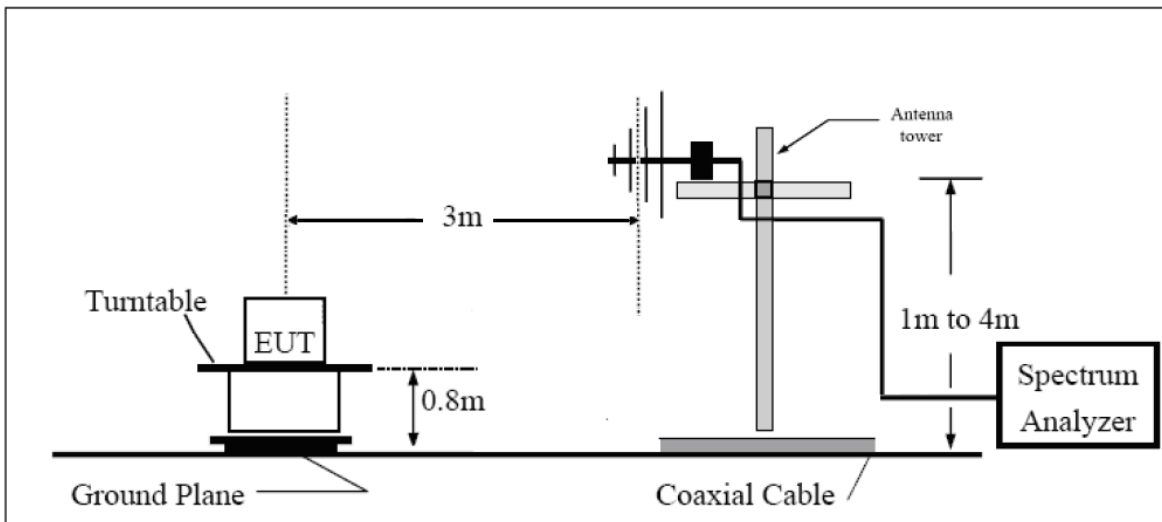

Above 1GHz

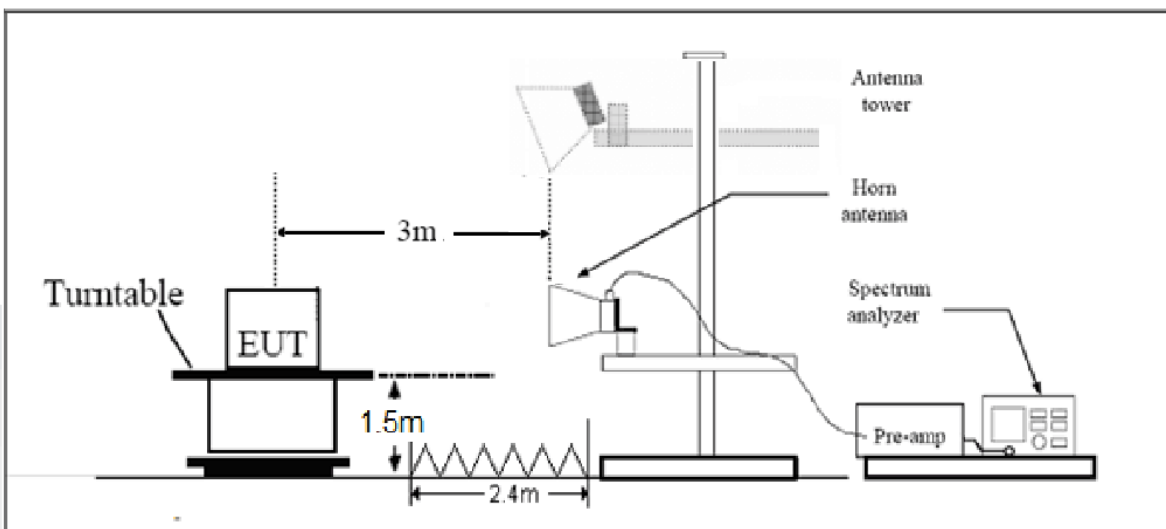

Note: Area side:2.4mX3.6m

**Limits**

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54



MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB



**Test Results:**

The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for V20MHz/V40MHz, therefore investigated worst case to representative mode in test report.


A font (Level in dB<sub>μV/m</sub>) in the test plot =(level in dB  $\mu$  V/m)

A font (Level in dB $\mu$ V) in the test plot =(level in dB  $\mu$  V/m)


**The signal beyond the limit is carrier.**

**U-NII-1**


**802.11a-Channel 36: Peak + Average**

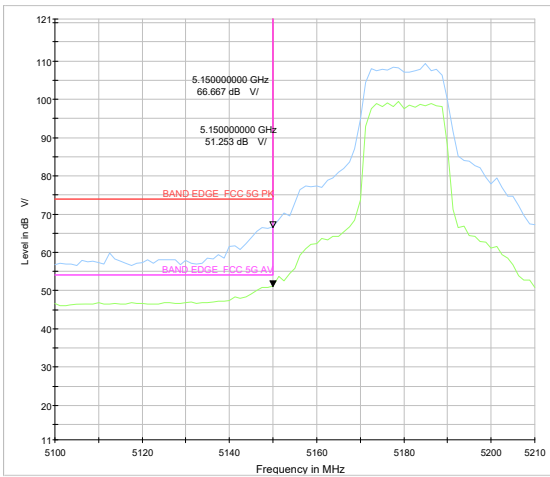


**802.11a-Channel 48: Peak + Average**

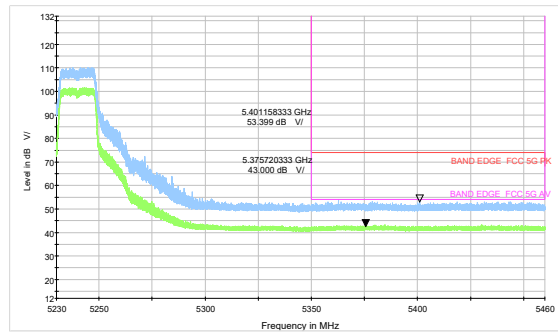


**802.11n HT20-Channel 36: Peak + Average**

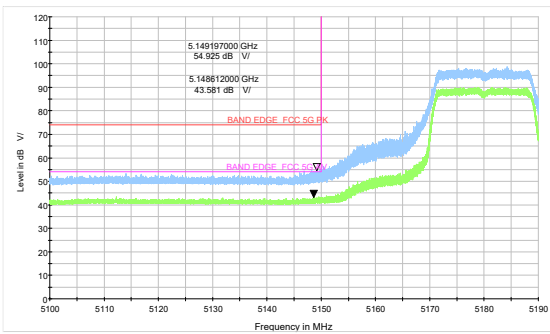


**802.11n HT20-Channel 48: Peak + Average**

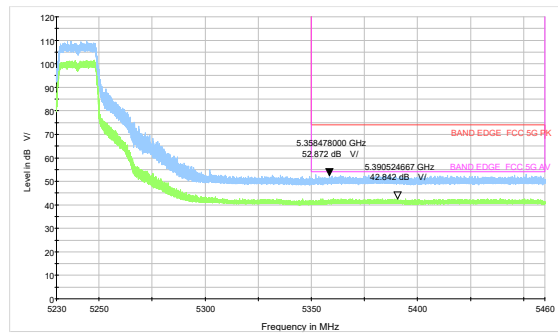

**802.11n HT40-Channel 38: Peak + Average**

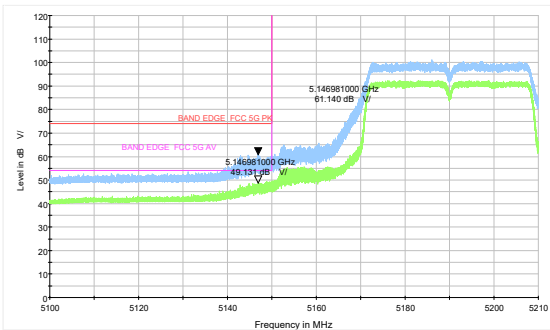


**802.11n HT40-Channel 46: Peak + Average**

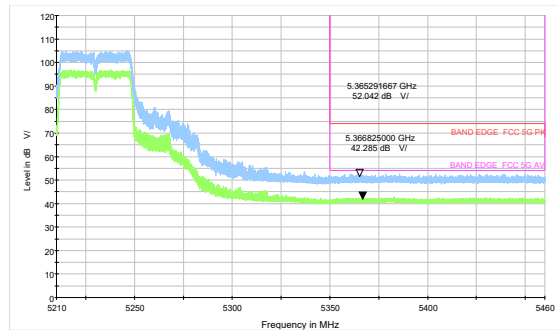






### 802.11ac VHT80 –Channel 42: Peak + Average

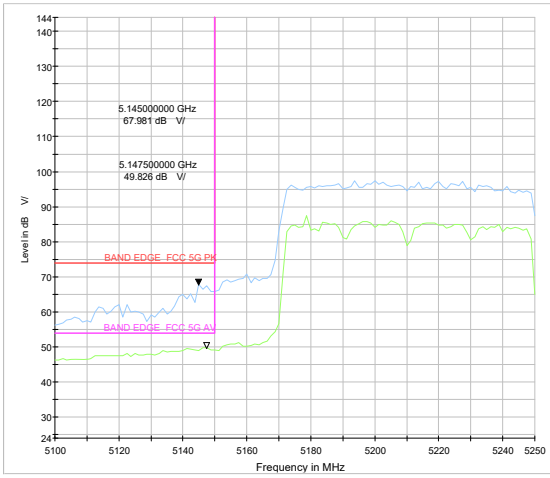


### U-NII-2A


#### 802.11a-Channel 52: Peak + Average

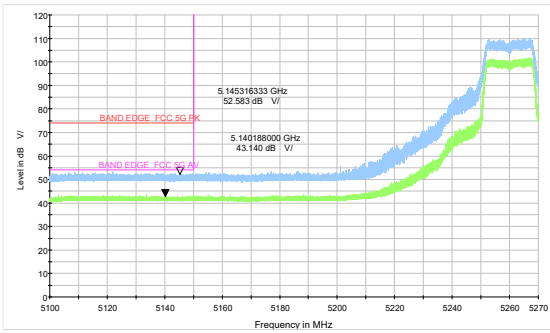


#### 802.11a-Channel 64: Peak + Average

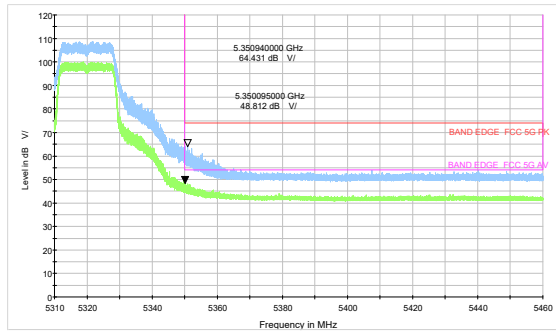


#### 802.11n HT20-Channel 52: Peak + Average

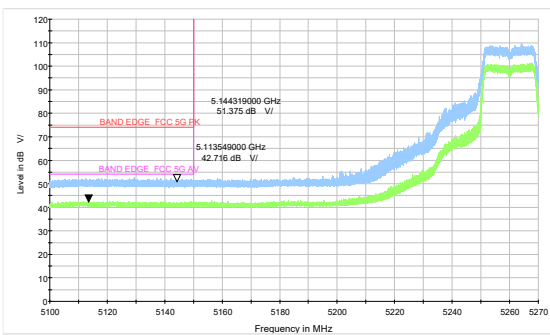


#### 802.11n HT20-Channel 64: Peak + Average

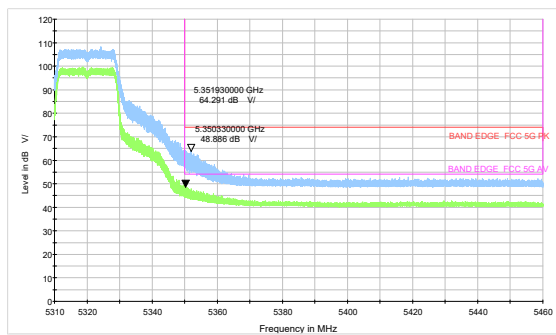


**802.11n HT40-Channel 54: Peak + Average**

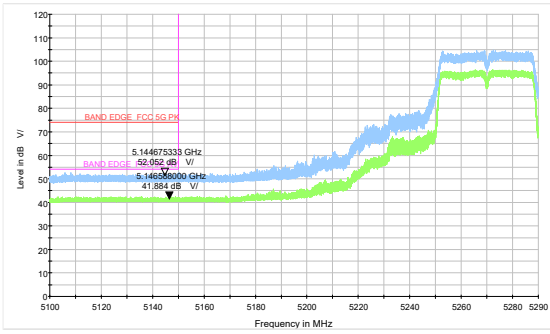

**802.11n HT40-Channel 62: Peak + Average**

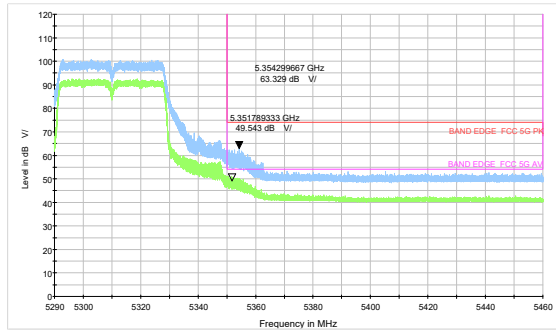


**802.11ac VHT80 -Channel 58: Peak + Average**

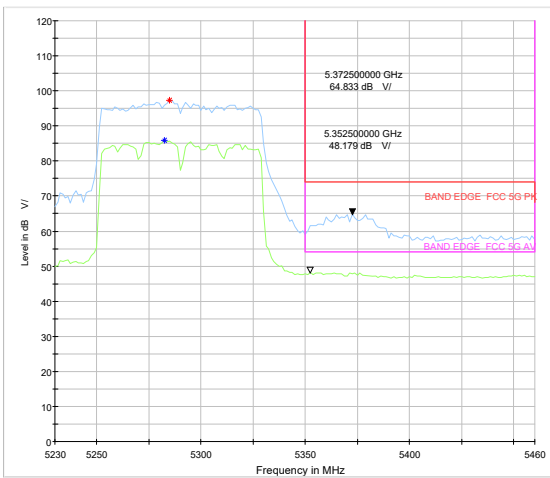




U-NII-2C


802.11a-Channel 100: Peak + Average

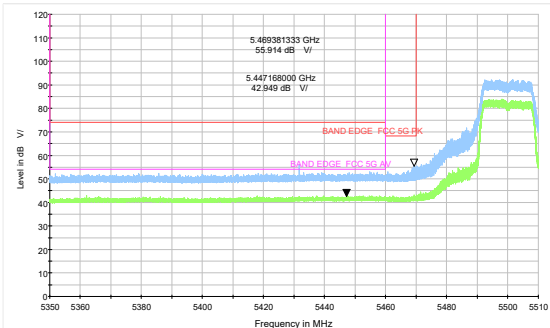


802.11n HT20-Channel 100: Peak + Average

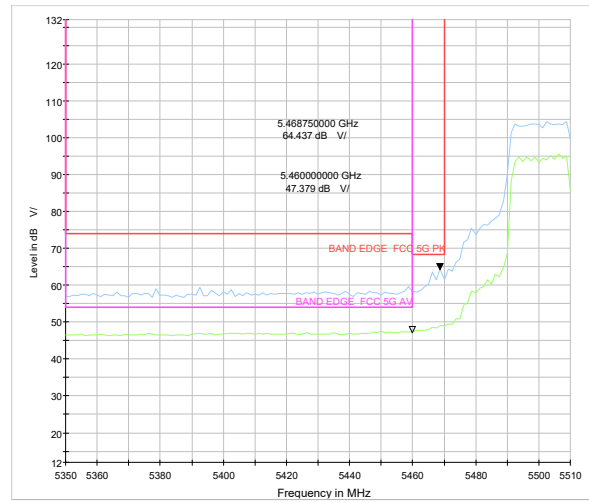


802.11a-Channel 140: Peak + Average

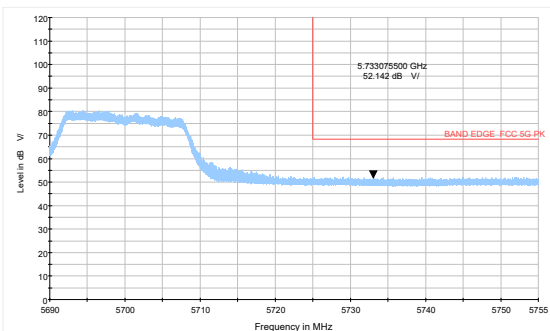

802.11n HT20-Channel 140: Peak + Average

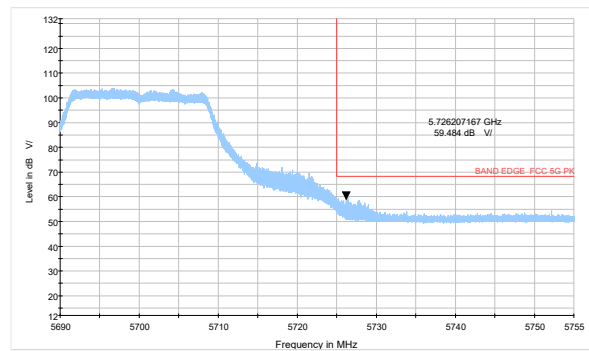

802.11n HT40-Channel 102: Peak + Average

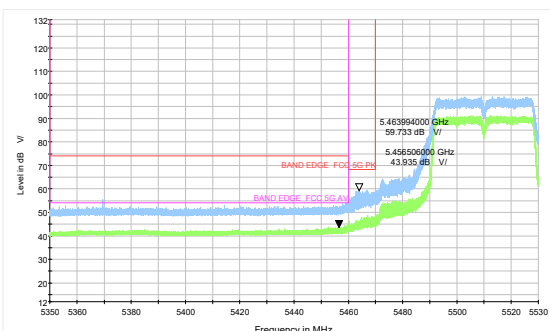

802.11ac VHT80 -Channel 106: Peak + Average

