



中国认可
国际互认
检测
TESTING
CNAS L0310



FCC SAR Compliance Test Report

Product Name: Smart Watch

Model: JPT-B19

Report No.: SYBH(Z-SAR)20210906003001-1

FCC ID: 2ATEYJPT-B19

Prepared by:
(Test Engineer)
2021-09-15

Dong Jiarui

Dong Jiarui

Reviewed by:
(Test Engineer)
2021-09-15

Lin Jiekai

Lin Jiekai

Approved by:
(Lab Manager)
2021-09-15

Sun Shaobin

Sun Shaobin

Date

Name

Signature

Reliability Laboratory of Huawei Technologies Co., Ltd.

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park,
Dongguan, Guangdong, 523808, P.R.C
Tel: +86 769 23830808 Fax: +86 769 23837628

※※ Notice ※※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03.
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
8. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).

Table of Contents

1	General Information.....	5
1.1	Statement of Compliance	5
1.2	RF exposure limits	6
1.3	EUT Description	7
1.3.1	General Description	8
1.4	Test specification(s)	9
1.5	Testing laboratory	9
1.6	Applicant and Manufacturer	9
1.7	Application details	9
1.8	Ambient Condition.....	9
2	SAR Measurement System	10
2.1	SAR Measurement Set-up	10
2.2	Test environment	11
2.3	Data Acquisition Electronics description.....	11
2.4	Probe description	12
2.5	Phantom description	13
2.6	Device holder description	14
2.7	Test Equipment List	15
3	SAR Measurement Procedure	17
3.1	Scanning procedure.....	17
3.2	Spatial Peak SAR Evaluation	18
3.3	Data Storage and Evaluation.....	19
4	System Verification Procedure	21
4.1	Tissue Verification.....	21
4.2	System Check.....	23
4.3	System check Procedure.....	24
5	SAR measurement variability and uncertainty	25
5.1	SAR measurement variability	25
5.2	SAR measurement uncertainty.....	25
6	SAR Test Configuration.....	26
6.1	Test Positions Configuration	26
6.1.1	10-g Extremity Exposure Condition	26
6.1.2	Next-to-mouth Exposure Condition.....	26
6.2	Wi-Fi Test Configuration	27
6.2.1	Initial Test Position Procedure	27
6.2.2	Initial Test Configuration Procedure	27
6.2.3	Sub Test Configuration Procedure	27
6.2.4	2.4G Wi-Fi SAR Test Procedures.....	28
7	SAR Measurement Results	29
7.1	Conducted power measurements.....	29
7.1.1	Conducted power of 2.4G Wi-Fi	29
7.1.2	Conducted power of BT	30
7.2	SAR measurement Results	31
7.2.1	SAR measurement Results of 2.4G Wi-Fi	33
7.2.2	SAR measurement Results of BT	33
7.2.3	Simultaneous Transmission Possibilities.....	34
7.2.4	SAR Summation Scenario	34
	Appendix A. System Check Plots.....	35
	Appendix B. SAR Measurement Plots.....	35
	Appendix C. Calibration Certificate	35
	Appendix D. Photo documentation.....	35
	Appendix E. Antenna Location	35



※※ Modified History ※※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2021-09-15	Dong Jiarui



1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during test are as below Table 1.

Band	Max Reported SAR(W/kg)	
	1-g Next to mouth(10mm)	10-g Extremity SAR (0mm)*
2.4G Wi-Fi	0.17	0.45
BT	0.07	0.16
The highest reported SAR for 1-g Next-to-mouth and 10-g Extremity SAR exposure conditions are 0.17 W/kg and 0.45 W/kg per KDB690783 D01.		

Table 1: Summary of test result

Note:

1)* For 10-g Extremity Exposure Condition operation, this device has been tested and meets the 10-g SAR limits of 4.0 W/kg for general population/ uncontrolled exposure according to IEEE C95.1:1991.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation

1.3 EUT Description

Device type :	Portable device		
Product Name:	Smart Watch		
Models:	JPT-B19		
SN :	C42B447108E0 C42B44710DCE C42B44712D7F		
Exposure category:	Uncontrolled environment / general population		
Hardware version :	R2		
Software version :	2.0.1.137		
Antenna type :	Internal antenna		
Test device production information	Identical Prototype		
Test modulation	Wi-Fi(DSSS/OFDM), BT(GFSK/π/4-DQPSK/8DPSK)		
Device Class :	B		
Supporting mode(s) and Operating frequency range(s)	Band	Tx (MHz)	Rx (MHz)
	2.4G Wi-Fi	2400-2483.5	
	BT	2400-2483.5	
	NFC	13.56	
Test channels (low-mid-high) :	11b:1-6-11		
	11g/n(20M):1-6-11		
	0-19-39-78(BT)		

Table 3: Device information and operating configuration

1.3.1 General Description

JPT-B19 is a smart watch; it can be communicated with mobile phone via Bluetooth. Watch also support alarm clock, intelligent user can judge the state of motion, scientific sleep monitoring, information assistance, heart rate monitoring, GPS functionalities and supports music playback and bluetooth calling. The BT/WIFI frequency is 2.4GHz.

Battery information:

Name	Manufacturer/trademark	Description
Li-polymer Battery	Huawei Technologies Co.,Ltd. (Manufacturer: Lishen)	HB532729ECW Rated Capacity:455mAh
	Huawei Technologies Co.,Ltd. (Manufacturer: NVT)	Nominal Voltage:3.82V Charging Voltage:4.40V

Difference description:

Compared with the previous prototype, the main changes are as follows: The BUCK circuit is added to the GPS core power supply, the high-voltage motor drive compatibility design is added, and the shape of the shielding cover window is adjusted. The others are the same as before.

According to the difference description above, the variant model JPT-B19 (New) SAR is tested at the worst case of the original model JPT-B19 SAR test report for each frequency band and exposure condition.

1.4 Test specification(s)

IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D01	General RF Exposure Guidance v06
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	NO.2 New City Avenue Songshan Lake Sci. & Tech. Industry Park, Dongguan, Guangdong, P.R.C
Telephone	+86 769 23830808
Fax	+86 769 23837628
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025.

1.6 Applicant and Manufacturer

Company Name	Huawei Device Co., Ltd
Address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808 P. R. China

1.7 Application details


Start Date of test	2021-07-20	2021-09-08
End Date of test	2021-08-03	2021-09-09

1.8 Ambient Condition

Ambient temperature	18°C – 25°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

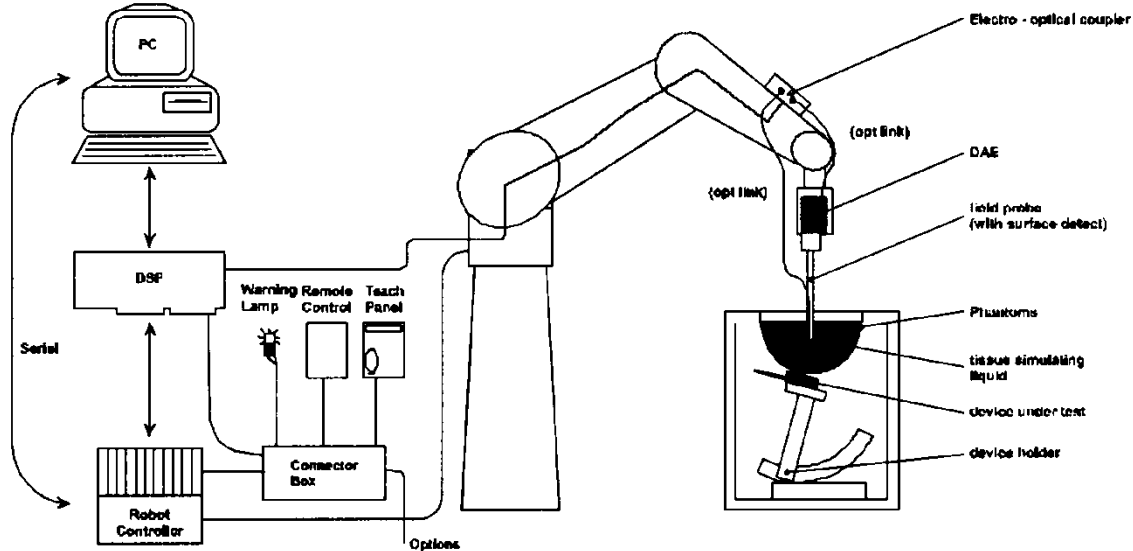

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.


Picture 1 of the photo documentation shows a complete view of the test environment. The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converted and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways Probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	


2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

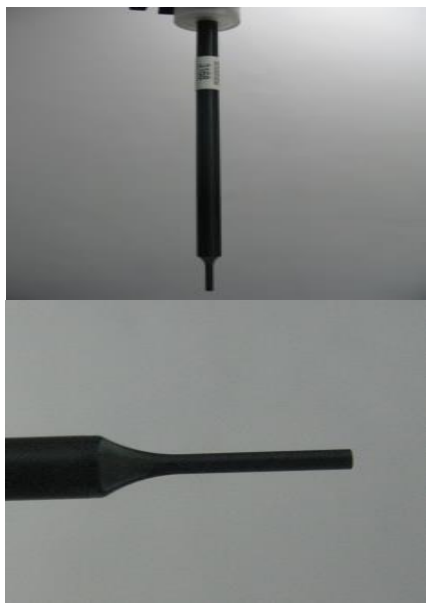
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	

2.5 Phantom description


SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	


The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

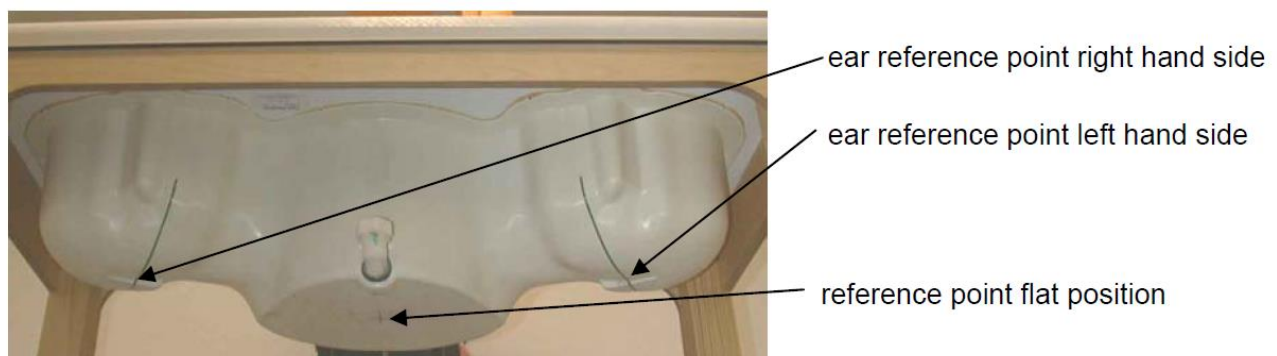


ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at > 3 GHz and a loss tangent ≤ 0.05 .

Modular Triple Flat Phantom

Shell Thickness (bottom plate)	2mm±0.2mm	
Filling Volume (Module)	approx. 8.1 liters (filling height: 155 mm)	
Dimensions	Length: 292 mm Width: 178 mm Height: 178 mm Useable area: 280 x 175 mm	
Measurement Areas	Flat phantom	

The Modular Flat Phantom consists of three identical modules that can be installed and removed separately without emptying the liquid. It is used for compliance testing of small wireless devices in body-worn configurations according to IEC 62209-2, etc.

2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\sigma=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period*
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	7350	2020-12-21	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1531	2021-02-24	One year
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2018-11-17	Three years
<input checked="" type="checkbox"/>	SPEAG	Software	DASY52	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM	1594	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	116265	2021-07-02	One year
<input checked="" type="checkbox"/>	Anritsu	Signal Analyzer	MS2690A	6261767335	2021-03-14	One year
<input checked="" type="checkbox"/>	SPEAG	Dielectric Probe Kit	DAK3.5	1143	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46629448	2021-07-02	One year
<input checked="" type="checkbox"/>	Keysight	Signal Generator	N5181A	MY50145341	2020-11-09	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	0423264	2021-07-03	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP2	105880	2021-03-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP8S	103084	2021-03-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP2	105879	2021-03-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP8S	103083	2021-03-13	One year

Table 4: List of Test and Measurement Equipment(Test date: 2021-07-20~2021-08-03)

	Manufacturer	Device	Type	Serial number	Date of last calibration	Valid period*
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2021-07-28	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1492	2021-07-28	One year
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	860	2018-11-17	Three years
<input checked="" type="checkbox"/>	SPEAG	Software	DASY52	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM	1475	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	116265	2021-07-02	One year
<input checked="" type="checkbox"/>	Anritsu	Signal Analyzer	MS2690A	6261767335	2021-03-14	One year
<input checked="" type="checkbox"/>	SPEAG	Dielectric Probe Kit	DAK3.5	1143	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46629448	2021-07-02	One year
<input checked="" type="checkbox"/>	Keysight	Signal Generator	N5181A	MY50145341	2020-11-09	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	0423264	2021-07-03	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP2	105880	2021-03-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP8S	103084	2021-03-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP2	105879	2021-03-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP8S	103083	2021-03-13	One year

Table 5: List of Test and Measurement Equipment(Test date: 2021-09-08~2021-09-09)

Note:

1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;



- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.
- 3) *All the equipment are within the valid period when the tests are performed.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- For power drift measurement, DASY software supports that the reference position can be either the selected section’s grid reference point or a user point. If the E-field of power reference measurement in the default grid reference point is very small, the test lab may set the reference position to the user point near the hotspot location to avoid large measurement uncertainty.
- The “surface check” measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per KDB865664 D01:

Frequency	Maximum Area Scan resolution ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan spatial resolution ($\Delta x_{Zoom}, \Delta y_{Zoom}$)	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

 H-field probes:
$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

- with V_i = compensated signal of channel i (i = x, y, z)
- $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/ (V/m)²] for E-field Probes
- ConvF = sensitivity enhancement in solution
- a_{ij} = sensor sensitivity factors for H-field probes
- f = carrier frequency [GHz]
- E_i = electric field strength of channel i in V/m
- H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

- with SAR = local specific absorption rate in mW/g
- E_{tot} = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

- with P_{pwe} = equivalent power density of a plane wave in mW/cm²
- E_{tot} = total electric field strength in V/m
- H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 6: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16MΩ+ resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Simulating Head Liquid (HBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Esters, Emulsifiers, Inhibitors	10-30%
Sodium salt	8-25%

Simulating Body Liquid (MBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Note: According to 201904 TCB workshop slides for RF Exposure Procedures, Procedures has permitted the use of single head tissue simulating liquid specified in IEC 62209-1 for all SAR tests. So the single head tissue simulating liquid is used for all SAR tests in this test report. The conservative $\pm 5\%$ tolerance is used in tissue dielectric parameters measurements.

Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Liquid Temp.	Test Date
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$		
2450MHz Head	2410	39.3	1.76	37.73	1.794	-3.99%	1.93%	22.5°C	2021/07/20
	2435	39.2	1.79	37.69	1.811	-3.85%	1.17%		
	2450	39.2	1.80	37.65	1.820	-3.95%	1.11%		
	2460	39.2	1.81	37.63	1.828	-4.01%	0.99%		
2450MHz Head	2410	39.3	1.76	37.58	1.791	-4.38%	1.76%	22.0°C	2021/08/02
	2435	39.2	1.79	37.61	1.810	-4.06%	1.12%		
	2450	39.2	1.80	37.60	1.819	-4.08%	1.06%		
	2460	39.2	1.81	37.57	1.826	-4.16%	0.88%		
2450MHz Head	2410	39.3	1.76	38.38	1.749	-2.34%	-0.62%	22.5°C	2021/09/08
	2435	39.2	1.79	38.33	1.761	-2.22%	-1.62%		
	2450	39.2	1.80	38.30	1.766	-2.30%	-1.89%		
	2460	39.2	1.81	38.29	1.771	-2.32%	-2.15%		

Table 7: Measured Tissue Parameter

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).

Dipole Information	System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10%)		Test Date
		1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	Δ1-g	Δ10-g	
SN								
860	2450MHz Head	53.10	24.70	50.80	24.00	-4.33%	-2.83%	2021/7/20
860	2450MHz Head	53.10	24.70	54.00	25.12	1.69%	1.70%	2021/8/2
860	2450MHz Head	53.10	24.70	48.80	22.68	-8.10%	-8.18%	2021/9/8

Table 8: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SAM. It is fed with a power of 250 mW (below 3GHz) or 100mW (3-6GHz). To adjust this power, a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

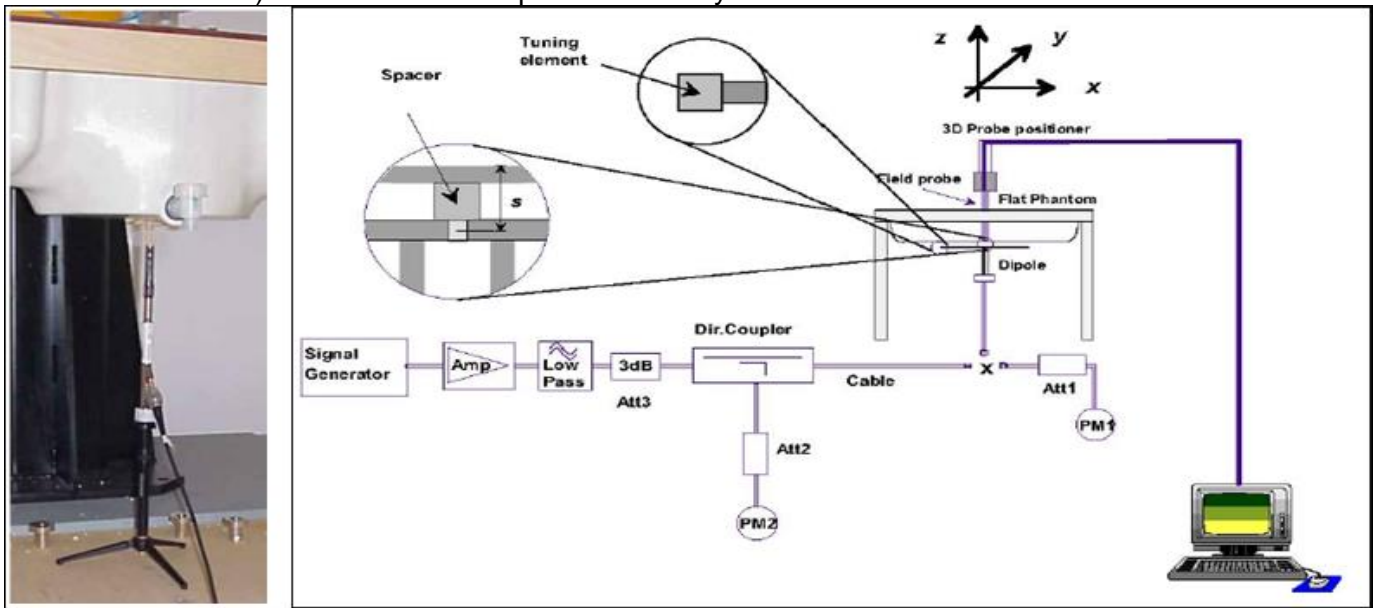

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in the following section.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 Test Positions Configuration

Per KDB 447498 D01, transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure requires 1-g SAR, and the wrist-worn condition requires 10-g extremity SAR. The 10-g extremity and 1-g SAR test exclusions may be applied to the wrist and face exposure conditions. When SAR evaluation is required, next to the mouth use is evaluated with the front of the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium. The wrist bands should be strapped together to represent normal use conditions. SAR for wrist exposure is evaluated with the back of the devices positioned in direct contact against a flat phantom fill with body tissue-equivalent medium. The wrist bands should be unstrapped and touching the phantom. The space introduced by the watch or wrist bands and the phantom must be representative of actual use conditions.

6.1.1 10-g Extremity Exposure Condition

The wrist watch requires extremity 10 gram SAR testing for the wrist (4.0 W/kg limit) with the back of the device in direct contact with the flat phantom. As the back side of this device can be well positioned in direct contact against a flat phantom, flat phantom testing is possible per KDB447498 D01.

6.1.2 Next-to-mouth Exposure Condition

The device also has a speaker mode, so head SAR testing (1.6 W/kg limit) of the front face of the device at a distance of 10mm from the flat phantom is appropriate per section 6.2 of KDB Publication 447498 D01.

6.2 Wi-Fi Test Configuration

For Wi-Fi SAR testing, a communication link is set up with the testing software for Wi-Fi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Per KDB248227 D01, a minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

6.2.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB248227 D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is $> 0.8\text{ W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

6.2.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or

fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

6.2.4 2.4G Wi-Fi SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB248227 D01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the *reported* SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB248227 D01). SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/g/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7 SAR Measurement Results

7.1 Conducted power measurements

7.1.1 Conducted power of 2.4G Wi-Fi

Mode	Duty cycle	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
					Max.		
802.11b	99%	1	2412	1Mbps	16.00	14.97	Yes
		6	2437		16.00	15.45	Yes
		11	2462		16.00	14.80	Yes
802.11g	99%	1	2412	6Mbps	14.00	13.91	No
		6	2437		14.00	13.96	No
		11	2462		14.00	13.40	No
802.11n 20M	99%	1	2412	MCS0	14.00	13.49	No
		6	2437		14.00	13.80	No
		11	2462		14.00	13.12	No

Table 9: Conducted power measurement results of 2.4G Wi-Fi

Note: The conducted power of Wi-Fi is measured with RMS detector.

7.1.2 Conducted power of BT

The output power of BT antenna is as the following:


BT	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	13.00	11.92	11.71	11.94
2DH5	12.00	9.37	9.63	9.65
3DH5	12.00	9.39	9.64	9.64

BT	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BT 4.0	13.00	11.78	11.81	12.04
BT 5.0	13.00	11.76	11.88	11.93

Table 10: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

Duty factor measured results:

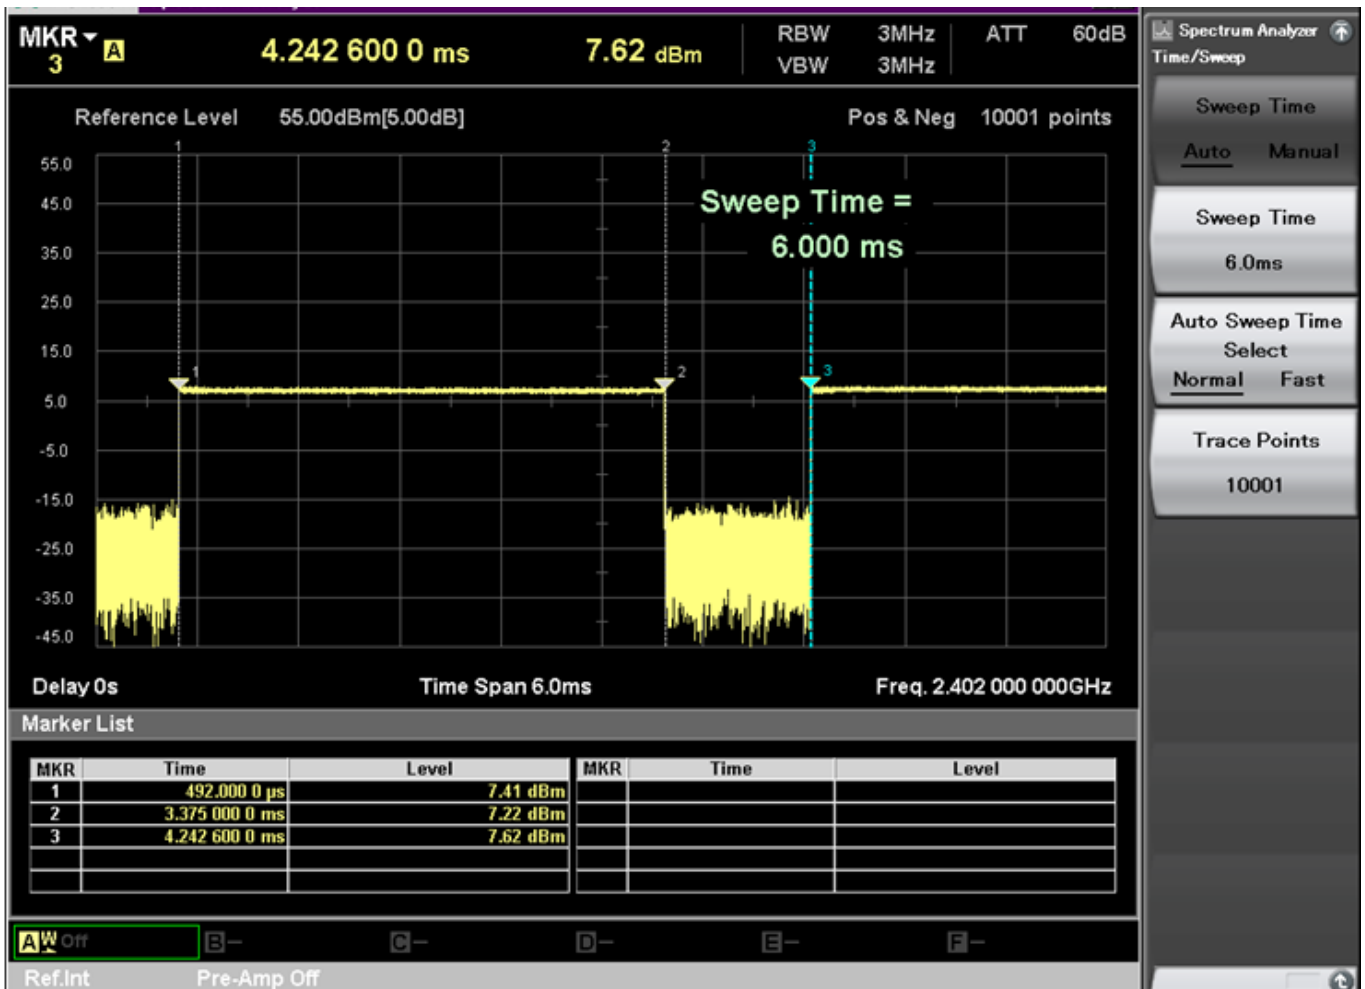

The duty cycle plot is shown above, so the duty cycle of bluetooth is calculated as below:

$$Duty\ cycle = \frac{pules\ width}{period} * 100\% = \frac{2.8830ms}{3.7506ms} * 100\% = 76.9\%$$

7.2 SAR measurement Results

General Notes:

- 1) Per KDB 447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB 447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.When the maximum output power variation across the required test channels is $> \frac{1}{2}\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
- 4) Per KDB 865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5\text{ W/kg}$, or $> 7.0\text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).
- 5) Devices with built-in NFC or similar functions that do not require separate SAR testing for these specific capabilities can generally be tested according to the SAR measurement procedures normally required for the device.

Wi-Fi Notes:

Per KDB 248227D01:

- 1) When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested..
- 2) When the DSSS *reported* SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 3) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations
- 4) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous



transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

BT Notes:

BT was configured to transmit maximum averaged power level and max duty cycle for each operation mode to be tested. If the actual duty cycle is <100%, the SAR test results should be scaled to 100% duty cycle to ensure SAR compliance.

7.2.1 SAR measurement Results of 2.4G Wi-Fi

Test Position	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured 1-g SAR (W/kg)	Measured 10-g SAR (W/kg)	Duty Cycle	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Note
Front side	10mm	6/2437	802.11b	0.039	0.019	99%	15.45	16.00	0.044	Battery 1#	/
Front side	10mm	6/2437	802.11b	0.001	0.001	99%	15.45	16.00	0.001	Battery 2#	/
Front side	10mm	6/2437	802.11b	0.101	0.051	99%	15.45	16.00	0.116	Battery 1# with silica gel trap	/
Front side	10mm	6/2437	802.11b	0.150	0.082	99%	15.45	16.00	0.172	Battery 1# with silica gel trap	New,Plot

Table 11: Next to mouth SAR test results of 2.4G Wi-Fi

Test Position	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured 1-g SAR (W/kg)	Measured 10-g SAR (W/kg)	Duty Cycle	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	Note
Back side	0mm	6/2437	802.11b	0.548	0.240	99%	15.45	16.00	0.272	Battery 1#	/
Back side	0mm	6/2437	802.11b	0.387	0.159	99%	15.45	16.00	0.180	Battery 2#	/
Back side	0mm	6/2437	802.11b	0.743	0.353	99%	15.45	16.00	0.405	Battery 1# with silica gel trap	/
Back side	0mm	6/2437	802.11b	0.868	0.394	99%	15.45	16.00	0.452	Battery 1# with silica gel trap	New, Plot

Table 12: 10g Extremity SAR test results of 2.4G Wi-Fi

Note: Per KDB248227D01, for SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test configuration procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

7.2.2 SAR measurement Results of BT

Test Position	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured 1-g SAR (W/kg)	Measured 10-g SAR (W/kg)	Duty Cycle	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Note
Front side	10mm	39/2441	DH5	0.001	0.001	77%	11.71	13.00	0.002	Battery 1#	/
Front side	10mm	39/2441	DH5	0.028	0.006	77%	11.71	13.00	0.049	Battery 2#	/
Front side	10mm	39/2441	DH5	0.037	0.018	77%	11.71	13.00	0.065	Battery 2# with silica gel trap	Plot
Front side	10mm	39/2441	DH5	0.035	0.017	77%	11.71	13.00	0.061	Battery 2# with silica gel trap	New

Table 13: Next to mouth SAR test results of BT

Test Position	Dist.	Test Channel /Freq.(MHz)	Test Mode	Measured 1-g SAR (W/kg)	Measured 10-g SAR (W/kg)	Duty Cycle	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	Note
Back side	0mm	39/2441	DH5	0.132	0.063	77%	11.71	13.00	0.110	Battery 1#	/
Back side	0mm	39/2441	DH5	0.115	0.047	77%	11.71	13.00	0.082	Battery 2#	/
Back side	0mm	39/2441	DH5	0.196	0.089	77%	11.71	13.00	0.155	Battery 1# with silica gel trap	Plot
Back side	0mm	39/2441	DH5	0.156	0.073	77%	11.71	13.00	0.128	Battery 1# with silica gel trap	New

Table 14: 10g Extremity SAR test results of BT

7.2.3 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Simultaneous Tx Combination	Next to mouth	10-g Extremity
1	Wi-Fi /BT+ NFC	Yes	Yes

Table 15: Simultaneous Transmission Possibilities

Note:

- 1) Wi-Fi 2.4G and Bluetooth share the same Tx antenna and can't transmit simultaneously.

7.2.4 SAR Summation Scenario

Band	1g Next to mouth SAR _{Max}	10-g Extremity SAR _{Max}
2.4G Wi-Fi	0.172	0.452
BT	0.065	0.155
NFC	/	/
Σ SAR	0.172	0.452
SAR Limit	1.6	4.0

Table 16: SAR Simultaneous Tx Combination

Note : Devices with built-in NFC or similar functions that do not require separate SAR testing for these specific capabilities can generally be tested according to the SAR measurement procedures normally required for the device.

Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01.

**Appendix A. System Check Plots****(Please See Appendix No.: SYBH(Z-SAR)20210906003001-1A, total: 4 pages)****Appendix B. SAR Measurement Plots****(Please See Appendix No.: SYBH(Z-SAR)20210906003001-1B, total: 5 pages)****Appendix C. Calibration Certificate****(Please See Appendix No.: SYBH(Z-SAR)20210906003001-1C, total: 67 pages)****Appendix D. Photo documentation****(Please See Appendix No.: SYBH(Z-SAR)20210906003001-1D, total: 5 pages)****Appendix E. Antenna Location****(Please See Appendix No.: SYBH(Z-SAR)20210906003001-1E, total: 1 page)**

End