



# RF Test Report

**Product Name: Smart Watch**

**Product Model: MIL-B19**

**Report Number: SYBH(Z-EMC)20210626012001-3**

**FCC ID: 2ATEYMIL-B19**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd.)**

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

Tel: +86 769 23830808 Fax: +86 769 23837628



## Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd.) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd.”, the both names have coexisted since 2009.
5. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
9. Normally, the test report is only responsible for the samples that have undergone the test.
10. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
11. If any question about this report, please contact the laboratory (PublicGCTC@huawei.com).



**Applicant:** Huawei Device Co., Ltd.  
**Address:** No.2 of Xincheng Road, Songshan Lake Zone,  
Dongguan, Guangdong 523808, People's Republic of  
China

**Date of Receipt Test Item:** 2021-07-15  
**Start Date of Test:** 2021-07-16  
**End Date of Test:** 2021-07-27

**Test Result:** Pass

<b>Prepared by (Test Engineer)</b>	<u>2021-07-27</u> Date	<u>Chang Lina</u> Name	<u><i>Chang Lina</i></u> Signature
<b>Reviewed by (Test Engineer)</b>	<u>2021-07-28</u> Date	<u>Rao Legian</u> Name	<u><i>Rao Legian</i></u> Signature
<b>Approved By (Lab Manager)</b>	<u>2021-07-28</u> Date	<u>He Hao</u> Name	<u><i>He Hao</i></u> Signature



## TABLE OF CONTENT

1.1	Further information .....	5
1.2	Document history .....	5
1.3	Test Site Information.....	6
1.4	EUT information .....	6
1.4.1	EUT Description .....	6
1.4.2	Overview of operational modes within a WPT system .....	7
1.4.3	Associated Equipment Used during Test .....	7
1.5	Applied Standards.....	7
2	Summary of Results .....	8
3	Test Results .....	9
3.1	AC Power-line Conducted Emissions .....	9
3.1.1	Test Procedure .....	9
3.1.2	Test Setup.....	10
3.1.3	Test Results .....	10
	Test Limit of AC Power Port .....	10
3.1.4	Test Data .....	11
3.2	Transmitter Radiated Emissions .....	12
3.2.1	Test Procedure .....	12
3.2.2	Test Setup.....	12
3.2.3	Test Results .....	13
3.2.4	Measurement Data .....	13
3.3	Occupied Bandwidth.....	14
3.3.1	E.U.T Operation.....	14
3.3.2	Test Setup.....	14
3.3.3	Measurement Data .....	15
4	Main Test Instruments.....	16
5	System Measurement Uncertainty .....	17



## 1.1 Further information

### Glossary

c

EUT	-	Equipment under test
EN	-	European Standard
ETSI	-	European Telecommunications Standard Institute
HW	-	Hardware
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
WPT	-	Wireless power transmission

## 1.2 Document history

Version	Applied changes	Date of release
V1.0	First report	2021-07-28



### 1.3 Test Site Information

Test Site 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Site Location:	No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

### 1.4 EUT information

#### 1.4.1 EUT Description

MIL-B19 is a smart watch; it can be communicated with mobile phone via Bluetooth. Watch also support alarm clock, intelligent user can judge the state of motion, scientific sleep monitoring, information assistance, heart rate monitoring, GPS functionalities and supports music playback and bluetooth calling. The BT/WIFI frequency is 2.4GHz.

EUT Description	
Product Name	Smart Watch
Model Number	MIL-B19
TX Frequency	2.4G WIFI: 2412MHz to 2462MHz Bluetooth: 2402MHz to 2480MHz WPT: 110.5kHz to 148kHz (2.75W) NFC:13.56MHz
RX Frequency	2.4G WIFI: 2412MHz to 2462MHz Bluetooth: 2402MHz to 2480MHz BDS: 1176.45MHz/1561.098MHz Galileo: 1176.45MHz/1575.42MHz GLONASS: 1597MHz to 1607MHz GPS: 1176.45MHz/1575.42MHz WPT: 110.5kHz to 148kHz (2.75W) NFC:13.56MHz
SN	CSNTQ21627000011
HW Version	R3
SW Version	2.0.1.137
EUT Accessory	
Watch Wireless Charger	Manufacturer: Huawei Devices Co., Ltd. Model: CP81-1 Input voltage: 5V
Li-polymer Battery	Manufacturer: Huawei Devices Co., Ltd. (NVT/Sunwoda) Battery Model: HB522025EFW Capacity: 292 mAh Rated Voltage:3.87V Charging Voltage:4.45V

Remark: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.



### 1.4.2 Overview of operational modes within a WPT system

Mode	
Mode	Wireless Charging (Adapter+ Wireless Charging Base+ Smart Watch)

### 1.4.3 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Calibrated Deadline	Cal interval (month)
Adapter	HW-050200U02	HUAWEI	B95532J4M00016	N/A	N/A

### 1.5 Applied Standards

Applied Rules:	47 CFR FCC Part 15, Subpart C
Test Method:	ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices



## 2 Summary of Results

Summary of Results				
Report Clause	Test Items	Standard Clause	Result	Site
3.1	AC Power-line Conducted Emissions	15.207	Pass	Site1
3.2	Transmitter Raidated Emssions	15.209	Pass	Site1
3.3	Occupied Bandwidth	2.1049	Pass	Site1

Note 1: If there is more than one adaptor, each one should be applied throughout the compliance test respectively, however, only the worst case will be recorded in this report.

During the measurement, the environmental conditions complied with the range listed as below.

Item	Required
Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospheric pressure	86kPa ~ 106kPa





### **3 Test Results**

#### **3.1 AC Power-line Conducted Emissions**

##### **3.1.1 Test Procedure**

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

The EUT communicates with the WPT client device, the EUT transmitter the maximum power which defined in specification of product. The Wireless Modem operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz.



### 3.1.2 Test Setup

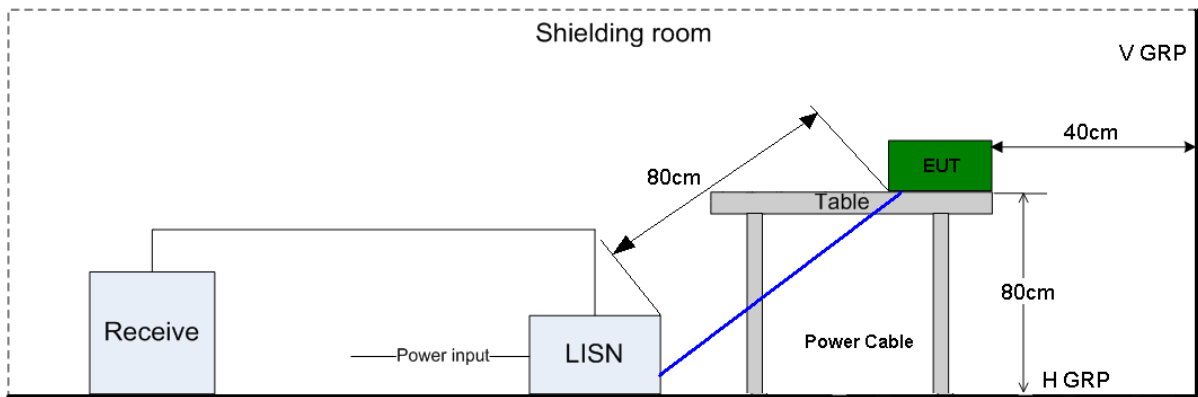


Figure 1. Test Set-up of conducted disturbance


### 3.1.3 Test Results

The EUT has met requirements for Conducted disturbance of power lines.  
 Limit: FCC § 15.207 (a)

Test Limit of AC Power Port		
Frequency range	150kHz ~ 30MHz	
Frequency	Voltage limits	
	QP (dB $\mu$ V)	AV (dB $\mu$ V)
0.15MHz~0.5MHz	66-56	56-46
0.5MHz-5MHz	56	46
5MHz~30MHz	60	50



### 3.1.4 Test Data

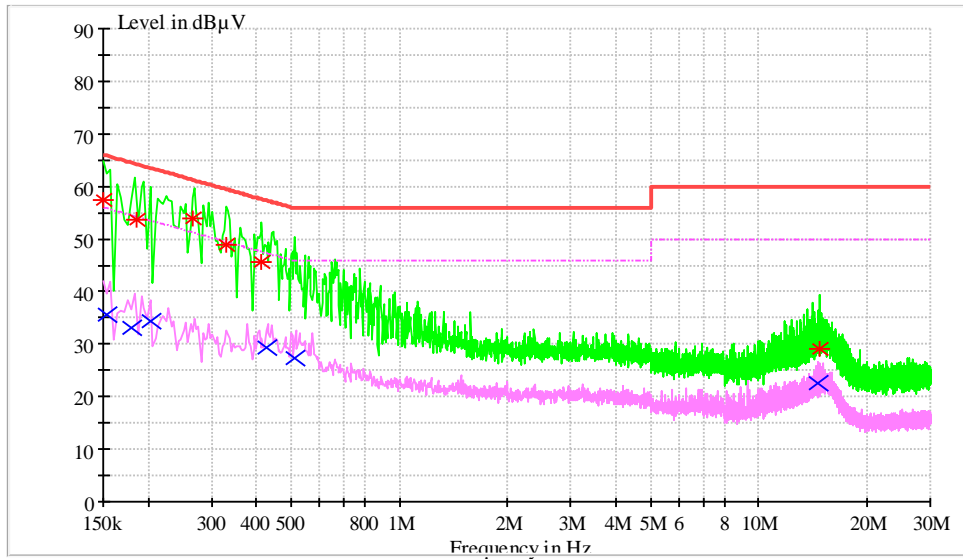

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Line	Transd dB	Margin dB	Limit dBµV	PE
0.150062	57.44	L1	9.7	8.56	66.00	FLO
0.185752	53.62	L1	9.7	10.60	64.22	FLO
0.266372	53.93	L1	9.7	7.30	61.23	FLO
0.330538	48.97	L1	9.7	10.47	59.44	FLO
0.410879	45.64	N	9.7	11.99	57.63	FLO
14.740447	29.08	N	10.5	30.92	60.00	FLO

#### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Line	Transd dB	Margin dB	Limit dBµV	PE
0.154259	35.56	L1	9.7	20.20	55.76	FLO
0.179361	33.22	L1	9.7	21.30	54.52	FLO
0.203171	34.27	L1	9.7	19.21	53.48	FLO
0.429387	29.39	L1	9.7	17.88	47.27	FLO
0.511981	27.23	L1	9.7	18.77	46.00	FLO
14.616516	22.59	N	10.5	27.41	50.00	FLO



## 3.2 Transmitter Radiated Emissions

### 3.2.1 Test Procedure

For frequency below 1GHz, the test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). The EUT was set-up on insulator 80cm above the Ground Plane.

The set-up and test methods were according to ANSI C63.10:2013. The Radiated Disturbance measurements were made using a Rohde and Schwarz Test Receiver and control software.

A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using a Quasi-Peak Detector below 1GHz, The maximal emission value was acquired by adjusting the turntable azimuth in accordance with the software setup. Normally, the azimuth range of turntable was 0° to 360°.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other nonmetallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized.

The EUT communicates with the WPT client device. The EUT operated on the typical channel.

Measurement bandwidth:  
9 KHz – 150 kHz: RBW=200 Hz  
150 KHz – 30 MHz: RBW= 9 kHz  
30 MHz- 1000 MHz: RBW= 120 kHz

### 3.2.2 Test Setup

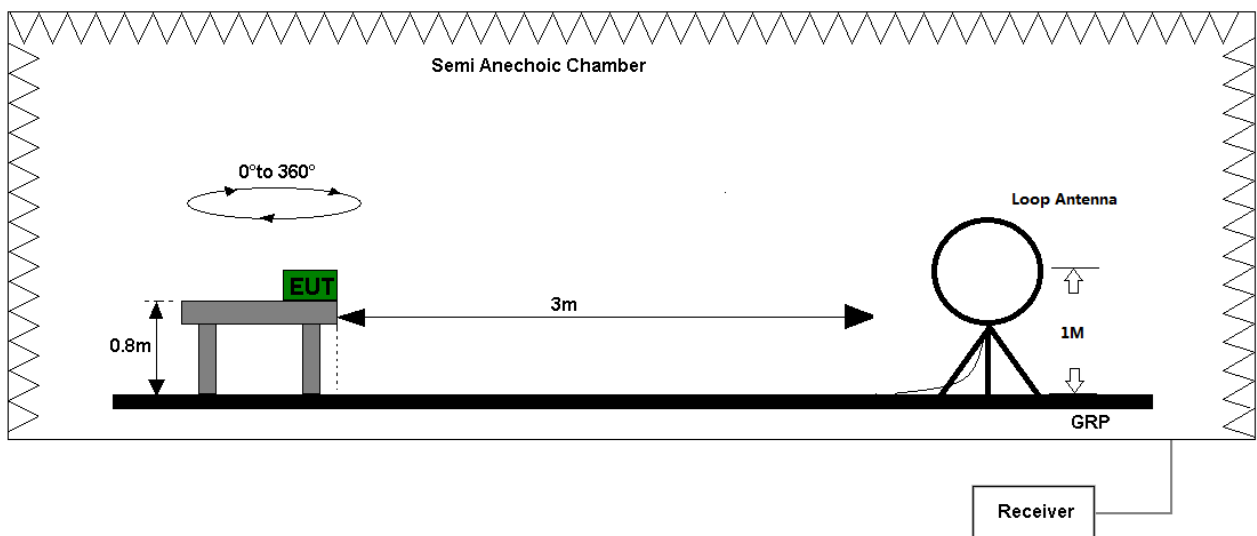


Figure 2. Test set-up of radiated disturbance(9KHz-30MHz )




### 3.2.3 Test Results

The EUT has met requirements for Transmitter Radiated Emissions.

Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance(m)
0.009-0.490	2400/F(KHz)=45.519 dBuV/m @300m 2400/F(KHz)=13.8 dBuV/m @300m	128.519 dBuV/m @3m 93.8 dBuV/m @3m
0.490-1.705	24000/F(KHz)=33.8 dBuV/m @30m 24000/F(KHz)=22.969 dBuV/m @30m	73.8 dBuV/m @3m 62.969 dBuV/m @3m
1.705-30.0	30=29.54 dBuV/m @30m	69.5 dBuV/m @3m

### 3.2.4 Measurement Data

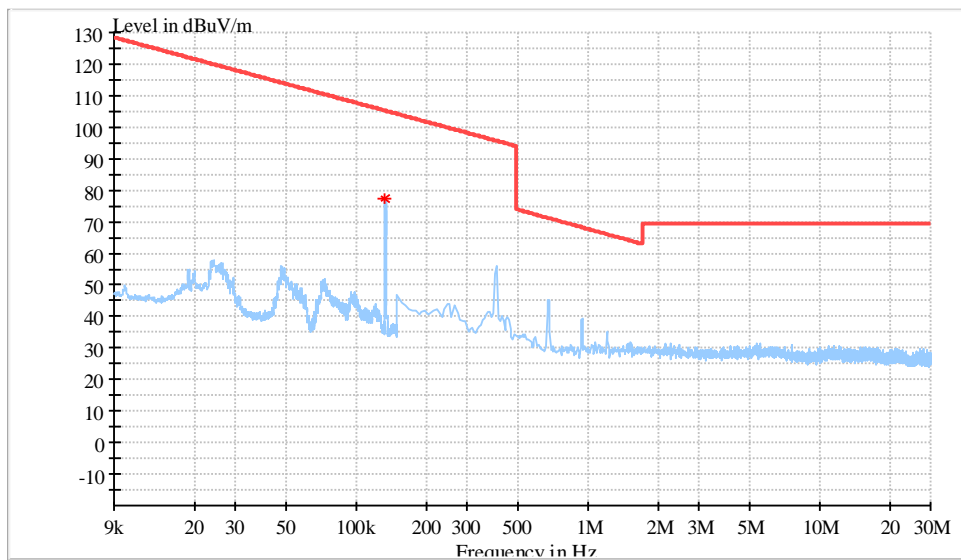

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)
0.133249	77.42	105.24	27.82



### 3.3 Occupied Bandwidth

#### 3.3.1 E.U.T Operation

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are report in this section.

The EUT communicates with the WPT client device. The EUT operated on the typical channel.

#### 3.3.2 Test Setup

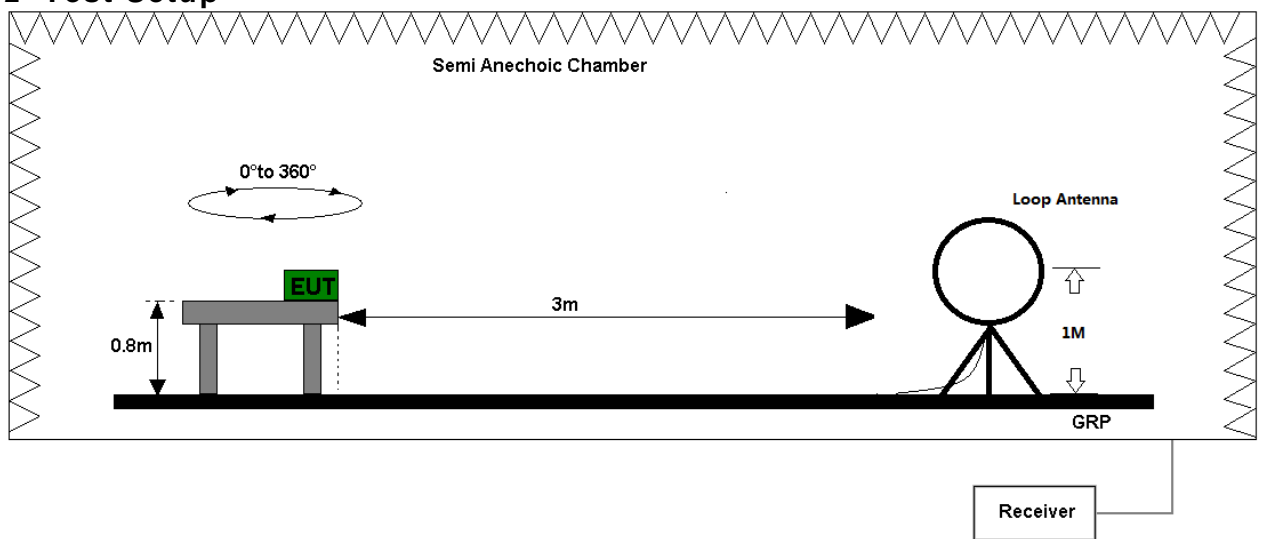


Figure 3. Test set-up of Occupied Bandwidth



### 3.3.3 Measurement Data

Test frequency (KHz)	99% bandwidth (kHz)	Result
138.742	2.757	PASS



#### 4 Main Test Instruments

Main Test Equipments						
Test item	Test Instrument	Model	S/N	Manufacturer	Calibrated deadline	Cal interval (month)
AC power-line Conducted Emissions	EMI Test receiver	ESU26	100150	R&S	Nov. 5, 2021	12
	LISN Line Impedance Stabilization Network	ENV216	100382	R&S	Jul. 12, 2022	12
Transmitter Radaited emissions& Occupied Bandwidth	Receiver	ESW44	101878	R&S	Jan. 30, 2022	12
	LOOP Antennas	HFH2-Z2	100262	R&S	Jan. 30, 2022	24
Software Information						
Test Item	Software Name		Manufacturer		Version	
AC power-line Conducted Emissions	EMC32		R&S		V9.25.0	
Transmitter Radaited emissions & Occupied Bandwidth	EMC32		R&S		V10.60.20	





## 5 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
AC power-line Conducted Emissions	U=2.30dB; k=2
Transmitter Radaited emissions	U=3.87dB; k=2

-----  
**END**