



### Radiated emission from 30MHz to 1000MHz

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

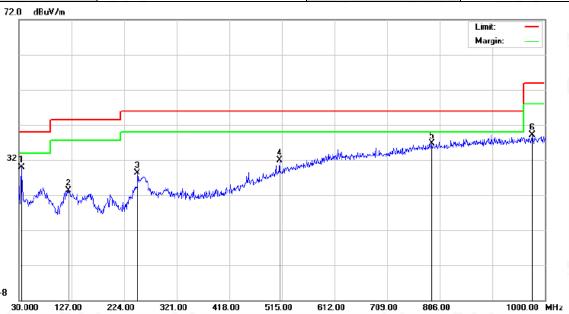


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		33.8800	17.59	12.29	29.88	40.00	-10.12	peak
2		121.1800	5.56	17.75	23.31	43.50	-20.19	peak
3		248.2500	13.88	14.34	28.22	46.00	-17.78	peak
4		510.1499	8.56	23.39	31.95	46.00	-14.05	peak
5	*	791.4500	6.41	30.22	36.63	46.00	-9.37	peak
6		975.7500	6.68	32.35	39.03	54.00	-14.97	peak

**RESULT: PASS** 





EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

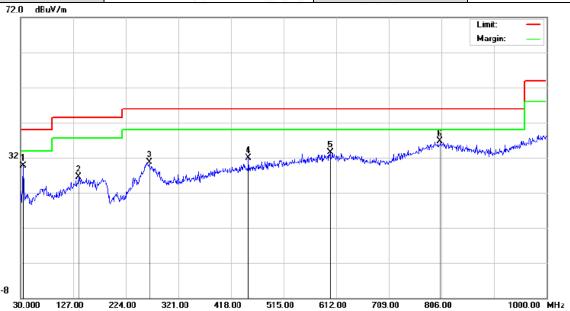

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		33.8800	17.32	12.29	29.61	40.00	-10.39	peak
2		136.6999	7.53	19.02	26.55	43.50	-16.95	peak
3		266.6800	11.80	18.85	30.65	46.00	-15.35	peak
4		450.0099	7.87	23.99	31.86	46.00	-14.14	peak
5		600.3600	6.57	26.94	33.51	46.00	-12.49	peak
6	*	803.0900	6.36	30.33	36.69	46.00	-9.31	peak

**Note:** All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



Page 151 of 188

### Radiated emission above 1GHz

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

#### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
10360.042	47.23	9.14	56.37	68.20	-11.83	peak
15540.063	41.59	10.22	51.81	74.00	-22.19	peak
15540.063	32.44	10.22	42.66	54.00	-11.34	AVG

### Factor = Antenna Factor + Cable Loss – Pre-amplifier.

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10360.042	48.25	9.14	57.39	68.20	-10.81	peak
15540.063	41.26	10.22	51.48	74.00	-22.52	peak
15540.063	32.87	10.22	43.09	54.00	-10.91	AVG

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 152 of 188

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

			1				
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	48.24	9.14	57.38	68.20	-10.82	peak	
15600.063	43.19	10.22	53.41	74.00	-20.59	peak	
15600.063	32.55	10.22	42.77	54.00	-11.23	AVG	

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Fraguenay	Motor Pooding	Factor	Emission Level	Limits	Morgin	
Frequency	Meter Reading	racioi	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	46.27	9.14	55.41	68.20	-12.79	peak
15600.063	40.35	10.22	50.57	74.00	-23.43	peak
15600.063	31.28	10.22	41.50	54.00	-12.50	AVG
Remark:		z.C	(8)			
actor = Anter	nna Factor + Cab	le Loss – Pre-ar	mplifier			



Page 153 of 188

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10480.042	48.16	9.27	57.43	68.20	-10.77	peak	
15720.063	42.37	10.38	52.75	74.00	-21.25	peak	
15720.063	32.68	10.38	43.06	54.00	-10.94	AVG	

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	<ul> <li>Value Type</li> </ul>
10480.042	46.29	9.27	55.56	68.20	-12.64	peak
15720.063	42.16	10.38	52.54	74.00	-21.46	peak
15720.063	31.97	10.38	42.35	54.00	-11.65	AVG



Page 154 of 188

/Inspection The test results

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5260MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10520.044	48.31	9.29	57.60	68.20	-10.60	peak
15780.066	42.15	10.42	52.57	74.00	-21.43	peak
15780.066	32.67	10.42	43.09	54.00	-10.91	AVG

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
10520.044	47.69	9.29	56.98	68.20	-11.22	peak
15780.066	41.36	10.42	51.78	74.00	-22.22	peak
15780.066	32.64	10.42	43.06	54.00	-10.94	AVG



Page 155 of 188

/Inspection The test results


EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5300MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10600.044	47.26	9.31	56.57	74.00	-17.43	peak
10600.044	38.16	9.31	47.47	54.00	-6.53	AVG
15900.066	42.47	10.44	52.91	74.00	-21.09	peak
15900.066	33.54	10.44	43.98	54.00	-10.02	AVG
Remark:					· · · · · · · · · · · · · · · · · · ·	
actor = Anter	nna Factor + Cab	e Loss – Pre-	amplifier.			(0)

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	$(dB\mu V/m)$	(dB)	value Type
48.34	9.31	57.65	74.00	-16.35	peak
37.12	9.31	46.43	54.00	-7.57	AVG
43.55	10.44	53.99	74.00	-20.01	peak
34.68	10.44	45.12	54.00	-8.88	AVG
(8)				O	
	(dBµV) 48.34 37.12 43.55	(dBµV) (dB) 48.34 9.31 37.12 9.31 43.55 10.44	(dBμV)     (dB)     (dBμV/m)       48.34     9.31     57.65       37.12     9.31     46.43       43.55     10.44     53.99	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)       48.34     9.31     57.65     74.00       37.12     9.31     46.43     54.00       43.55     10.44     53.99     74.00	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)     (dBμV/m)       48.34     9.31     57.65     74.00     -16.35       37.12     9.31     46.43     54.00     -7.57       43.55     10.44     53.99     74.00     -20.01



/Inspection The test results



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal/Vertical

#### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10640.044	46.23	9.35	55.58	74.00	-18.42	peak
10640.044	37.41	9.35	46.76	54.00	-7.24	AVG
15960.066	40.59	10.46	51.05	74.00	-22.95	peak
15960.066	31.58	10.46	42.04	54.00	-11.96	AVG

#### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10640.044	48.36	9.35	57.71	74.00	-16.29	peak
10640.044	39.51	9.35	48.86	54.00	9 -5.14	AVG
15960.066	42.15	10.46	52.61	74.00	-21.39	peak
15960.066	32.57	10.46	43.03	54.00	-10.97	AVG
Remark:		. (6)	(8)			
actor = Anter	na Factor + Cable	Loss – Pre-	amplifier.			



Page 157 of 188

/Inspection The test results

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11000.044	48.91	9.37	58.28	74.00	-15.72	peak
11000.044	39.64	9.37	49.01	54.00	-4.99	AVG
16500.066	43.59	10.48	54.07	68.20	-14.13	peak

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
48.34	9.37	57.71	74.00	-16.29	peak
40.15	9.37	49.52	54.00	-4.48	AVG
42.58	10.48	53.06	68.20	-15.14	peak
	a.C	(8)			
na Factor + Cabl	e Loss – Pre-ar	mplifier.			
	(dBµV) 48.34 40.15 42.58	(dBµV) (dB) 48.34 9.37 40.15 9.37 42.58 10.48	(dBμV)     (dB)     (dBμV/m)       48.34     9.37     57.71       40.15     9.37     49.52       42.58     10.48     53.06	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)       48.34     9.37     57.71     74.00       40.15     9.37     49.52     54.00       42.58     10.48     53.06     68.20	(dBμV)     (dB)     (dBμV/m)     (dBμV/m)     (dB)       48.34     9.37     57.71     74.00     -16.29       40.15     9.37     49.52     54.00     -4.48



Page 158 of 188

/Inspection The test results the test report.

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5600MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11200.044	49.25	9.38	58.63	74.00	-15.37	peak
11200.044	40.27	9.38	49.65	54.00	-4.35	AVG
16800.066	42.38	10.49	52.87	68.20	-15.33	peak

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11200.044	48.59	9.38	57.97	74.00	-16.03	peak
11200.044	40.37	9.38	49.75	54.00	-4.25	AVG
16800.066	42.81	10.49	53.30	68.20	-14.90	peak
Remark:					0	
actor = Anter	na Factor + Cable	Loss - Pre-a	mplifier.		G	8



Page 159 of 188

/Inspection The test results

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5700MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11400.044	48.37	9.39	57.76	74.00	-16.24	peak
11400.044	37.64	9.39	47.03	54.00	-6.97	AVG
17100.066	39.22	10.49	49.71	68.20	-18.49	peak

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11400.044	49.35	9.39	58.74	74.00	-15.26	peak
11400.044	40.21	9.39	49.60	54.00	-4.40	AVG
17100.066	42.37	10.49	52.86	68.20	-15.34	peak
Remark:		a.C	(8)			
actor = Anter	na Factor + Cab	le Loss – Pre-ar	mplifier.			



Page 160 of 188

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.042	46.25	9.42	55.67	74.00	-18.33	peak
11490.042	37.51	9.42	46.93	54.00	-7.07	AVG
17235.063	40.24	10.51	50.75	68.20	-17.45	peak
Remark:						
Factor = Anter	nna Factor + Cable	e Loss – Pre-	-amplifier.	8		

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11490.042	45.26	9.42	54.68	74.00	-19.32	peak
11490.042	36.27	9.42	45.69	54.00	-8.31	AVG
17235.063	40.27	10.51	50.78	68.20	-17.42	peak



Page 161 of 188

/Inspection The test results

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

(dB) (dB) 9.42	(dBµV/m)	(dBµV/m)	(dB)	Value Type
0.40				
25 9.42	55.67	74.00	-18.33	peak
9.42	44.69	54.00	-9.31	AVG
29 10.51	51.80	68.20	-16.40	peak

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	47.35	9.42	56.77	74.00	-17.23	peak
11570.042	37.16	9.42	46.58	54.00	-7.42	AVG
17355.063	42.38	10.51	52.89	68.20	-15.31	peak



Page 162 of 188

/Inspection he test results

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	48.16	9.62	52.98	74.00	-21.02	peak
11650.042	38.64	9.62	45.05	54.00	-8.95	AVG
17475.063	43.15	10.75	47.61	68.20	-26.39	peak
Remark:			-6	9		- C)
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.	(0)		

### RADIATED EMISSION ABOVE 1GHZ-Vertical

			1			
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.042	48.24	9.62	53.55	74.00	-20.45	peak
11650.042	36.27	9.62	47.64	54.00	-6.36	AVG
17475.063	41.19	10.75	48.61	68.20	-25.39	peak

**Note:** All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report.

Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.




# Test result for band edge emission at restricted bands

EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

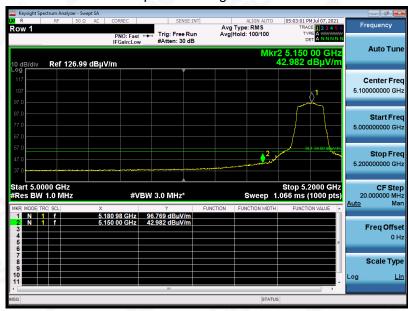

**RESULT: PASS** 

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



g/Inspection The test results



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




**RESULT: PASS** 




EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement

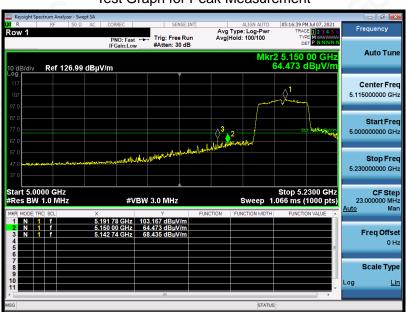

Test Graph for Average Measurement

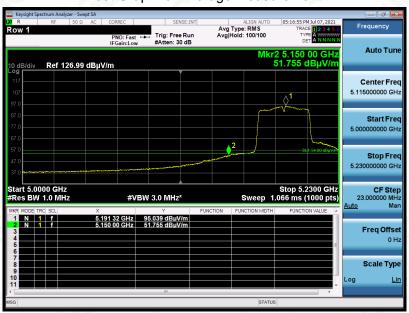

**RESULT: PASS** 



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5310MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

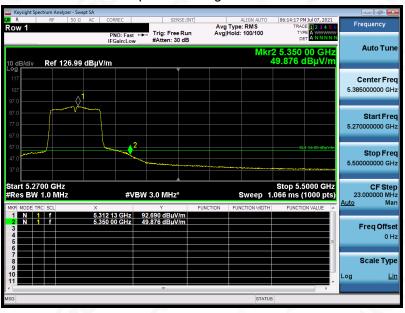

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Belloaded Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



EUT	Smart Touch Screen Terminal	Model Name CM800	
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5310MHz	Antenna	Vertical

Test Graph for Peak Measurement

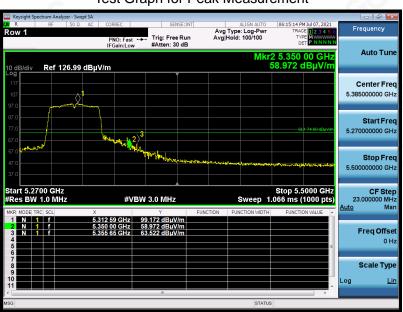

Test Graph for Average Measurement



**RESULT: PASS** 



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5510MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



EUT	Smart Touch Screen Terminal	Model Name CM800	
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5510MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




EUT	Smart Touch Screen Terminal	Model Name CM800	
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5290MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

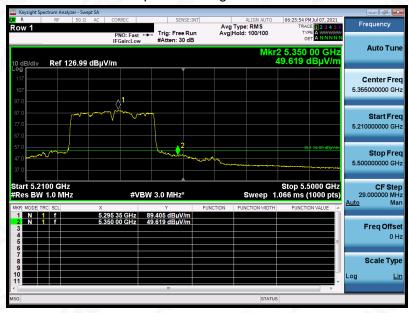

**RESULT: PASS** 




EUT	Smart Touch Screen Terminal	Model Name CM800	
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5290MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

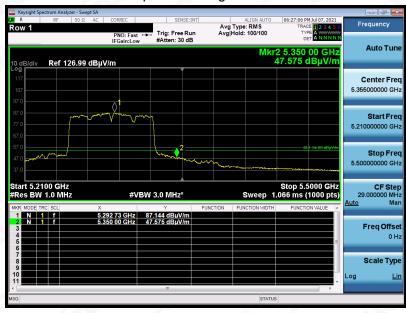



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5530MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



g/Inspection The test results



EUT	Smart Touch Screen Terminal	Model Name	CM800
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5530MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



**RESULT: PASS** 



Page 181 of 188

Note: 1. All the 20MHz bandwidth modulation had been tested, the 802.11a20 at 5180MHz, 5320 MHz, 5500MHz was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 at 5190MHz, 5310MHz, 5510MHz was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11AC80 at 5210MHz, 5290MHz, 5530MHz was the worst case and record in his test report.

- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.



Page 182 of 188

### 12. LINE CONDUCTED EMISSION TEST


### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum R	F Line Voltage
Frequency	Q.P (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

# 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

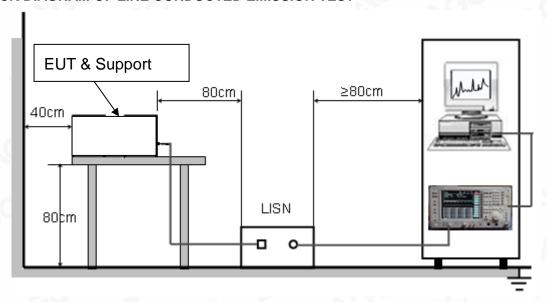

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/Inspectation of the report is not permitted without the written appropriation of AGE. The test presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 183 of 188

#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.



### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

### LINE CONDUCTED EMISSION TEST-L

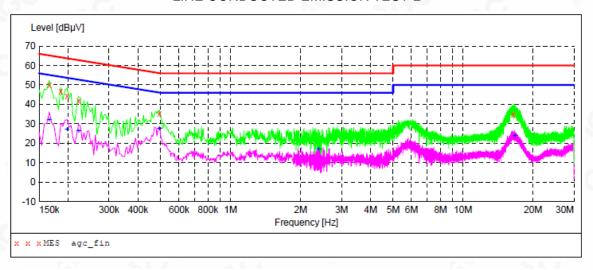

# MEASUREMENT RESULT: "agc fin"

2021/6/22 22:30

20	21/6/22 22:	30					
	Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
	MHZ	ασμν	αь	ασμν	αь		
	0.166000	50.20	12.4	65	15.0	QP	L1
	0.186000	46.80	12.4	64	17.4	QP	L1
	0.198000	44.40	12.4	64	19.3	QP	L1
	0.222000	41.70	12.4	63	21.0	QP	ь1
	0.494000	35.30	12.4	56	20.8	QP	ь1
	16.478000	34.70	14.5	60	25.3	QP	ь1

### MEASUREMENT RESULT: "agc fin2"


2021/6/22 22:30

2021/6/22 22:	30					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.166000	31.90	12.4	55	23.3	AV	L1
0.198000	27.10	12.4	54	26.6	AV	L1
0.222000	26.20	12.4	53	26.5	AV	L1
0.494000	27.70	12.4	46	18.4	AV	L1
2.394000	17.00	12.5	46	29.0	AV	L1
16.694000	24.00	14.5	50	26.0	AV	L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# LINE CONDUCTED EMISSION TEST-N

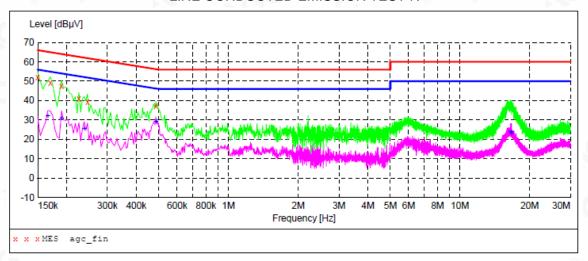

# MEASUREMENT RESULT: "agc fin"

2021/6/22 22:14

2021/6/22 22:	14					
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.150000	51.90	12.4	66	14.1	QP	N
0.170000	49.10	12.4	65	15.9	QP	N
0.190000	47.40	12.4	64	16.6	QP	N
0.226000	41.00	12.4	63	21.6	QP	N
0.246000	39.50	12.4	62	22.4	QP	N
0.486000	37.20	12.4	56	19.0	QP	N

### MEASUREMENT RESULT: "agc fin2"

2021/6/22 22:14

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.166000	32.10	12.4	55	23.1	AV	N
0.190000	30.70	12.4	54	23.3	AV	N
0.238000	25.60	12.4	52	26.6	AV	N
0.486000	29.20	12.4	46	17.0	AV	N
16.566000	23.80	14.5	50	26.2	AV	N
16.706000	23.10	14.5	50	26.9	AV	N

**RESULT: PASS** 



# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

LINE CONDUCTED EMISSION TEST SETUP



RADIATED EMISSION TEST SETUP BELOW 1GHZ






# RADIATED EMISSION TEST SETUP ABOVE 1GHZ



CONDUCTED TEST SETUP

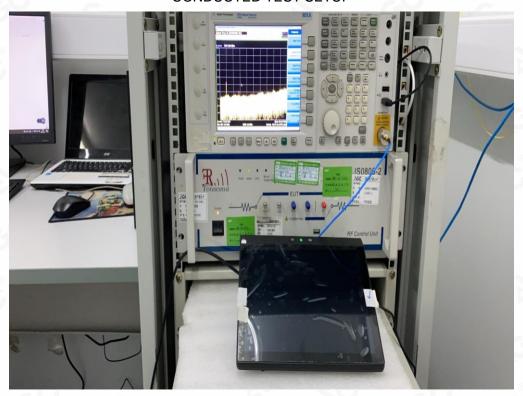

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 188 of 188

# **APPENDIX B: PHOTOGRAPHS OF EUT**

Refer to the Report No.: AGC11563210602AP01

----END OF REPORT----



#### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

he test report.