

RF Exposure Evaluation Report

Applicant: Ubio Labs, Inc.

Address of Applicant: 2821 Northup Way, Suite 250 Bellevue, WA 98004 USA

Equipment Under Test (EUT)

Product Name: Wireless Charging Stand

Model No.: AWC1093

Trade mark: ubiolabs

FCC ID: 2ATGY-AWC1093

Applicable standards: FCC CFR Title 47 Part 2 Subpart J Section 2.1091

Date of sample receipt: 16 Jun., 2020

Date of Test: 17 Jun., to 03 Jul., 2020

Date of report issue: 06 Jul., 2020

Test Result: PASS*

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	06 Jul., 2020	Original

Tested by: Yoyo Wu
Test Engineer

Date: 06 Jul., 2020

Reviewed by: Winner Zhang
Project Engineer

Date: 06 Jul., 2020

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 GENERAL INFORMATION.....	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.	4
4.3 OPERATING MODES	4
4.4 DESCRIPTION OF SUPPORT UNITS.....	4
4.5 MEASUREMENT UNCERTAINTY	4
4.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	4
4.7 LABORATORY FACILITY	5
4.8 LABORATORY LOCATION	5
4.9 TEST INSTRUMENTS LIST.....	5
5 TECHNICAL REQUIREMENTS SPECIFICATION IN FCC CFR TITLE 47 PART 2.1091	6
5.1 LIMITS	6
5.2 TEST SETUP BLOCK.....	6
5.3 LIMITS FOR GENERAL POPULATION/UNCONTROLLED EXPOSURE	6
5.4 TEST PROCEDURE.....	7
5.5 RESULT.....	8
5.6 CONCLUSION.....	13
6 TEST SETUP PHOTO	14

4 General Information

4.1 Client Information

Applicant:	Ubio Labs, Inc.
Address:	2821 Northup Way, Suite 250 Bellevue, WA 98004 USA
Factory:	SHENZHEN LANNENGSHITONG ELECTRONICS CO.,LTD
Address:	Floor3 No.40, Xinhe Road, Shangmugu Village, Pinghu Neighborhood, Longgang District, Shenzhen City, Guangdong Province, China.

4.2 General Description of E.U.T.

Product Name:	Wireless Charging Stand
Model No.:	AWC1093
Operation Frequency:	127.7kHz
Modulation technology:	Loading modulation
Antenna Type:	Coil Antenna
Power supply (Wireless Charger):	Input: 18V, 3.5A USB-A Output: 5V, 2.4A Wireless Output: 15W/ 10W / 7.5W/ 5W
AC adapter:	Model: CHG1147 Input: AC 110-240V, 50-60 Hz Output: 18V, 3.5A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

4.3 Operating Modes

Operating mode	Detail description
Full mode	Keep the EUT in Full mode

4.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Apple	Smart Phone	iPhone 11 Pro	N/A	BCG-E3305A

4.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Field Strength (9kHz ~ 30MHz)	± 2% (k=2)

4.6 Additions to, deviations, or exclusions from the method

No

4.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

4.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

4.9 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Electromagnetic field strength analyzer	Coliy Technology GmbH	E300	13945	12-25-2019	12-24-2020

5 Technical Requirements Specification in FCC CFR Title 47 Part 2.1091

5.1 Limits

Human exposure to RF emissions from mobile devices (47 CFR §2.1091) may be evaluated based on the MPE limits adopted by the FCC for electric and magnetic field strength and/or power density, as appropriate, since exposures are assumed to occur at distances of 20 cm or more from persons.


According to KDB 680106 D01 RF Exposure Wireless Charging Apps, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm for devices designed for typical desktop applications. E and H field strength measurements or numerical modelling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device.

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/ f ^{1.2}

Note: f is frequency in MHz.
 *Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

5.2 Test Setup Block

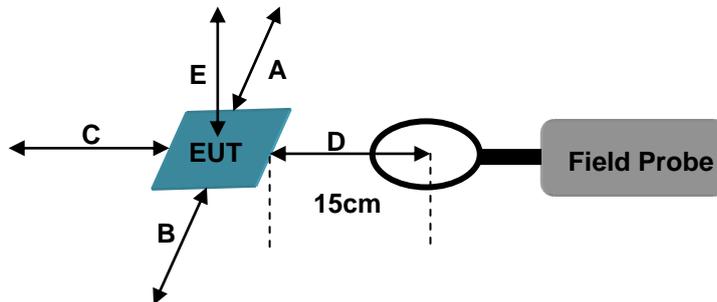

Remrak: The E300 probe antenna diameter is 15cm.

5.3 Limits For General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW /cm ²)	Averaging Time (minutes)
0.3 ~ 3.0	614	1.63	(100)*	30
3.0 ~ 30	824/f	2.19/f	(180/f ₂)*	30
30 ~ 300	27.5	0.073	0.2	30
300~1500	-	-	f/1500	30
1500~100000	-	-	1.0	30

5.4 Test Procedure

<p>KDB 680106 D01 Section 5(b):</p> <p>(1) Power transfer frequency is less than 1 MHz. -- Yes, the device operate in the frequency 127.7kHz.</p> <p>(2) Output power from each primary coil is less than or equal to 15 watts. -- Yes, the maximum output power of the primary coil is 15W.</p> <p>(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils. --No, the transfer system includes two primary coils.</p> <p>(4) Client device is placed directly in contact with the transmitter. -- Yes, client device is placed directly in contact with the transmitter.</p> <p>(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion). -- Yes, the DUT is a Wireless Charging mobile.</p> <p>(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit. --Yes the EUT field strength levels are less than 50% of the MPE limit.</p>
--

1. Installing the magnetic field probe and turn on the E300 power switch, select the magnetic field test mode and the A/m unit, select the peak detection mode, select the Max-Hold display.
2. Measured the ambient noise at this time and record.
3. Make DUT work at maximum transmit power.
4. During the measurement, the magnetic field probe centre of the E300 is kept in 15cm distance from each test surface of the wireless charging base, and recorded the measured values of the A, B, C, D, and E side are separately.
5. After all the measured values of the A, B, C, D, and E side are subtracted the background noise separately, they are the true magnetic field strength values at that point.
6. Replace the electric field test probe and select the electric field test mode and the V/m unit, select the peak detection mode, select the Max-Hold display.
7. Repeat step 3 to 5 and then get the strength of the electric field.

5.5 Result

a) Wireless 1 (Left side)

Magnetic Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	1	0.261	0.815	1.63
B	1	0.253	0.815	1.63
C	1	0.255	0.815	1.63
D	1	0.248	0.815	1.63
E	1	0.225	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	3	0.238	0.815	1.63
B	3	0.233	0.815	1.63
C	3	0.227	0.815	1.63
D	3	0.230	0.815	1.63
E	3	0.219	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	5	0.219	0.815	1.63
B	5	0.211	0.815	1.63
C	5	0.206	0.815	1.63
D	5	0.202	0.815	1.63
E	5	0.183	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	7	0.202	0.815	1.63
B	7	0.199	0.815	1.63
C	7	0.185	0.815	1.63
D	7	0.192	0.815	1.63
E	7	0.168	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	10	0.186	0.815	1.63
B	10	0.164	0.815	1.63
C	10	0.165	0.815	1.63
D	10	0.172	0.815	1.63
E	10	0.158	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	15	0.131	0.815	1.63
B	15	0.122	0.815	1.63
C	15	0.116	0.815	1.63
D	15	0.128	0.815	1.63
E	15	0.107	0.815	1.63

1. Electric Field Strength Measurement

MeasuredSide	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	15	27.13	307.00	614
B	15	26.58	307.00	614
C	15	26.91	307.00	614
D	15	26.02	307.00	614
E	15	24.33	307.00	614

b) Wireless 2 (Right side)

MagneticFieldStrengthMeasurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	1	0.275	0.815	1.63
B	1	0.266	0.815	1.63
C	1	0.251	0.815	1.63
D	1	0.256	0.815	1.63
E	1	0.238	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	3	0.240	0.815	1.63
B	3	0.243	0.815	1.63
C	3	0.233	0.815	1.63
D	3	0.236	0.815	1.63
E	3	0.224	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	5	0.226	0.815	1.63
B	5	0.221	0.815	1.63
C	5	0.213	0.815	1.63
D	5	0.216	0.815	1.63
E	5	0.195	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	7	0.219	0.815	1.63
B	7	0.206	0.815	1.63
C	7	0.199	0.815	1.63
D	7	0.203	0.815	1.63
E	7	0.174	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	10	0.192	0.815	1.63
B	10	0.167	0.815	1.63
C	10	0.166	0.815	1.63
D	10	0.178	0.815	1.63
E	10	0.162	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	15	0.136	0.815	1.63
B	15	0.129	0.815	1.63
C	15	0.130	0.815	1.63
D	15	0.122	0.815	1.63
E	20	0.118	0.815	1.63

Electric Field Strength Measurement

MeasuredSide	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	15	27.89	307.00	614
B	15	27.53	307.00	614
C	15	26.22	307.00	614
D	15	26.15	307.00	614
E	20	24.35	307.00	614

c) Wireless 1 +Wireless 2

MagneticFieldStrengthMeasurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	1	0.488	0.815	1.63
B	1	0.476	0.815	1.63
C	1	0.480	0.815	1.63
D	1	0.461	0.815	1.63
E	1	0.443	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	3	0.426	0.815	1.63
B	3	0.437	0.815	1.63
C	3	0.419	0.815	1.63
D	3	0.420	0.815	1.63
E	3	0.413	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	5	0.403	0.815	1.63
B	5	0.391	0.815	1.63
C	5	0.395	0.815	1.63
D	5	0.386	0.815	1.63
E	5	0.367	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	7	0.368	0.815	1.63
B	7	0.359	0.815	1.63
C	7	0.351	0.815	1.63
D	7	0.362	0.815	1.63
E	7	0.338	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	10	0.343	0.815	1.63
B	10	0.337	0.815	1.63
C	10	0.346	0.815	1.63
D	10	0.328	0.815	1.63
E	10	0.312	0.815	1.63

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	15	0.327	0.815	1.63
B	15	0.315	0.815	1.63
C	15	0.323	0.815	1.63
D	15	0.311	0.815	1.63
E	20	0.302	0.815	1.63

Electric Field Strength Measurement

MeasuredSide	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	15	51.37	307.00	614
B	15	51.06	307.00	614
C	15	51.18	307.00	614
D	15	50.96	307.00	614
E	20	48.67	307.00	614

5.6 Conclusion

The Real Value Less than Limit, so the SAR test is exclusion.

6 Test setup photo



-----End of report-----