

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: 2ATH4-MIST

Product: SMART PHONE

Trade Mark: N/A

Model Number: MIST

Family Model: N/A

Report No.: STR200609001005E

Prepared for

Alliance International group, Inc

43337 Isle Royal Street Fremont CA 94538 USA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street

Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
MEASUREMENT UNCERTAINTY	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
1.6 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3.TEST AND MEASUREMENT EQUIPMENT	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT	13
6. BANDEDGE AND EMISSION MASK	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.3 LTE BAND 4.....	24
8.4 LTE BAND 5.....	28

8.5 LTE BAND 7.....	30
8.5 LTE BAND 12	32
8.6 LTE BAND 17	34
8.7 LTE BAND 66	36
9. SPURIOUS RADIATION EMISSION	40
9.1 LTE BAND 2.....	42
9.2 LTE BAND 4.....	44
9.3 LTE BAND 5.....	46
9.4 LTE BAND 7.....	48
9.5 LTE BAND 12	50
9.6 LTE BAND 17	52
9.7 LTE BAND 66	54
10. FREQUENCY STABILITY	56
10.1 LTE BAND 2	57
10.2 LTE BAND 4	59
10.3 LTE BAND 5	61
10.4 LTE BAND 7	63
10.5 LTE BAND 12	65
10.6 LTE BAND 17	67
10.7 LTE BAND 66	69
11. PEAK-TO-AVERAGE RATIO.....	71
11.1 Description of the PAR Measurement.....	71
11.2 Measuring Instruments	71
11.3 Test Procedures.....	71
11.4 Test Setup.....	71

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	SMART PHONE
Trade Mark	N/A
Model Name	MIST
Family Model	N/A
Model Difference	N/A
FCC ID:	2ATH4-MIST
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2, 4, 5, 7, 12, 17, 66
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz; LTE FDD Band 66 Uplink: 1710MHz-1780MHz, Downlink: 2110MHz-2200MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	PIFA Antenna
Antenna gain:	Band 2: 0.4dBi, Band 4: 0.37dBi, Band 5: -0.23dBi, Band 7: 0.75dBi, Band 12: -1.37dBi, Band 17: -1.36dBi, Band 66: 0.38dBi
Power Supply:	DC 3.7V/1400mAh from Battery or DC 5V from Adapter.
Adapter:	Model: JML-0500100NZ-LW Input: 100V-240V 50/60Hz 0.3A Output: 5V --- 1.0A
Extreme Vol. Limits:	DC 3.4V to DC 4.4V (Nominal DC 3.7V) (Note 1)
HW Version	K31_MB_V1.2
SW Version	Mist_V9.0_20200703_1746

** Note1: The High Voltage 4.4V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ATH4-MIST** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 12, Band 17, Band 66

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	

2.1051 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark: 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items.			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	SMART PHONE	MIST	FCC ID: 2ATH4-MIST	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

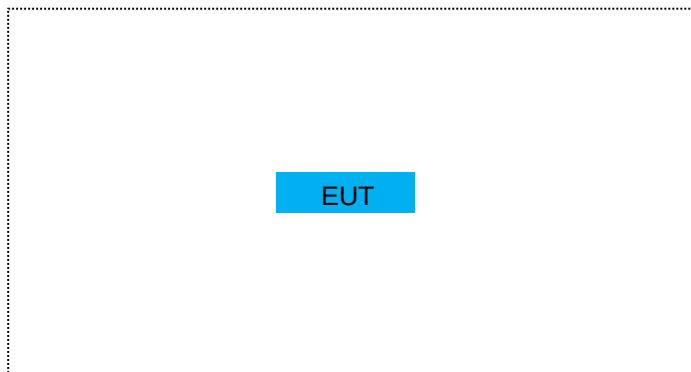


For Conducted Output Power

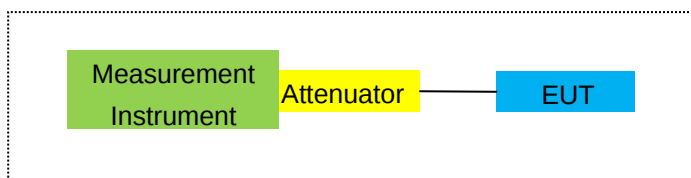

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

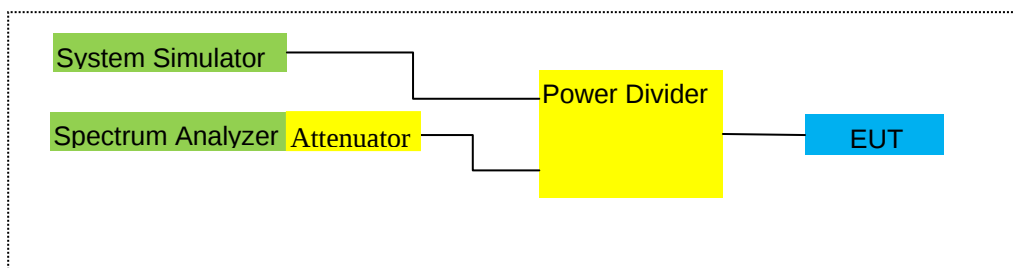

For Frequency Stability

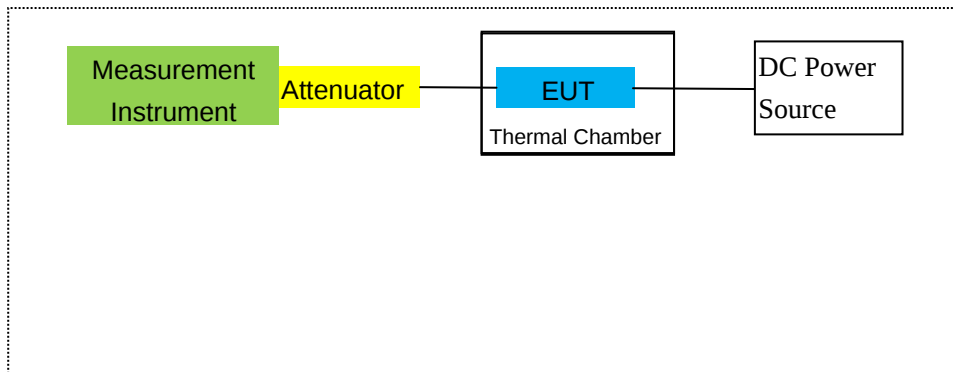

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.12.10	2020.12.09	1 year
7	Amplifier	EM	EM-30180	060538	2019.08.06	2020.08.05	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2019.08.06	2020.08.05	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2020.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2021.05.10	1 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2019.08.06	2020.08.05	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2017.06.06	2020.06.05	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2019.08.06	2020.08.05	1 year
29	Communication Tester	R&S	CMW500	148500	2020.05.11	2021.05.10	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".³

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- ☐ LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- ☐ LTE Band 2/4/5/7/12/17/66

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- ☐ Set display line
- ☐ Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

- ☐ LTE Band2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17
- LTE Band 66

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Midd	1850.7	-0.74	3.76	28.24	23.74	236.592	Horizontal	Pass
		1880	-0.51	3.91	28.22	23.80	239.883	Horizontal	Pass
		1909.3	-1.04	3.93	28.20	23.23	210.378	Horizontal	Pass
3.0MHz Band QPSK	1/#Midd	1851.5	-0.89	3.77	28.23	23.57	227.510	Horizontal	Pass
		1880	-0.74	3.91	28.24	23.59	228.560	Horizontal	Pass
		1908.5	-0.88	3.94	28.25	23.43	220.293	Horizontal	Pass
5.0MHz Band QPSK	1/#Midd	1852.5	-0.88	3.77	28.31	23.66	232.274	Horizontal	Pass
		1880	-0.65	3.91	28.22	23.66	232.274	Horizontal	Pass
		1907.5	-0.43	3.94	28.20	23.83	241.546	Horizontal	Pass
10.0MHz Band QPSK	1/#Midd	1855	-0.67	3.79	28.33	23.87	243.781	Horizontal	Pass
		1880	-1.08	3.95	28.22	23.19	208.449	Horizontal	Pass
		1905	-0.12	3.97	28.19	24.10	257.040	Horizontal	Pass
15.0MHz Band QPSK	1/#Midd	1857.5	-1.11	3.79	28.34	23.44	220.800	Horizontal	Pass
		1880	-0.68	3.95	28.22	23.59	228.560	Horizontal	Pass
		1902.5	-0.09	3.97	28.18	24.12	258.226	Horizontal	Pass
20.0MHz Band QPSK	1/#Midd	1860	-0.63	3.81	28.35	23.91	246.037	Horizontal	Pass
		1880	-0.71	3.96	28.22	23.55	226.464	Horizontal	Pass
		1900	-0.22	4.00	28.16	23.94	247.742	Horizontal	Pass
1.4MHz Band QPSK	1/#Midd	1850.7	-0.88	3.76	28.24	23.60	229.087	Vertical	Pass
		1880	-0.14	3.91	28.22	24.17	261.216	Vertical	Pass
		1909.3	-1.13	3.93	28.20	23.14	206.063	Vertical	Pass
3.0MHz Band QPSK	1/#Midd	1851.5	-0.81	3.77	28.23	23.65	231.739	Vertical	Pass
		1880	-1.06	3.91	28.24	23.27	212.324	Vertical	Pass
		1908.5	-0.17	3.94	28.25	24.14	259.418	Vertical	Pass
5.0MHz Band QPSK	1/#Midd	1852.5	-0.62	3.77	28.31	23.92	246.604	Vertical	Pass
		1880	-0.20	3.91	28.22	24.11	257.632	Vertical	Pass
		1907.5	-0.38	3.94	28.20	23.88	244.343	Vertical	Pass
10.0MHz Band	1/#Midd	1855	-0.74	3.79	28.33	23.80	239.883	Vertical	Pass
		1880	-1.10	3.95	28.22	23.17	207.491	Vertical	Pass

QPSK		1905	-1.19	3.97	28.19	23.03	200.909	Vertical	Pass
15.0MHz Band QPSK	1/#Midd	1857.5	-1.10	3.79	28.34	23.45	221.309	Vertical	Pass
		1880	-0.63	3.95	28.22	23.64	231.206	Vertical	Pass
		1902.5	-0.92	3.97	28.18	23.29	213.304	Vertical	Pass
20.0MHz Band QPSK	1/#Midd	1860	-1.17	3.81	28.35	23.37	217.270	Vertical	Pass
		1880	-0.98	3.96	28.22	23.28	212.814	Vertical	Pass
		1900	0.11	4.00	28.16	24.27	267.301	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.55	3.76	28.24	21.93	155.955	Horizontal	Pass
		1880	-2.39	3.91	28.22	21.92	155.597	Horizontal	Pass
		1909.3	-1.86	3.93	28.20	22.41	174.181	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-2.36	3.77	28.23	22.10	162.181	Horizontal	Pass
		1880	-1.83	3.91	28.24	22.50	177.828	Horizontal	Pass
		1908.5	-2.43	3.94	28.25	21.88	154.170	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-2.74	3.77	28.31	21.80	151.356	Horizontal	Pass
		1880	-2.00	3.91	28.22	22.31	170.216	Horizontal	Pass
		1907.5	-2.34	3.94	28.20	21.92	155.597	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-2.01	3.79	28.33	22.53	179.061	Horizontal	Pass
		1880	-2.02	3.95	28.22	22.25	167.880	Horizontal	Pass
		1905	-2.12	3.97	28.19	22.10	162.181	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-2.06	3.79	28.34	22.49	177.419	Horizontal	Pass
		1880	-1.98	3.95	28.22	22.29	169.434	Horizontal	Pass
		1902.5	-2.36	3.97	28.18	21.85	153.109	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	-2.11	3.81	28.35	22.43	174.985	Horizontal	Pass
		1880	-1.84	3.96	28.22	22.42	174.582	Horizontal	Pass
		1900	-1.98	4.00	28.16	22.18	165.196	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.52	3.76	28.24	21.96	157.036	Vertical	Pass
		1880	-2.38	3.91	28.22	21.93	155.955	Vertical	Pass
		1909.3	-2.40	3.93	28.20	21.87	153.815	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-1.82	3.77	28.23	22.64	183.654	Vertical	Pass
		1880	-1.95	3.91	28.24	22.38	172.982	Vertical	Pass
		1908.5	-2.19	3.94	28.25	22.12	162.930	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-2.34	3.77	28.31	22.20	165.959	Vertical	Pass
		1880	-1.84	3.91	28.22	22.47	176.604	Vertical	Pass
		1907.5	-1.69	3.94	28.20	22.57	180.717	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-1.96	3.79	28.33	22.58	181.134	Vertical	Pass
		1880	-2.01	3.95	28.22	22.26	168.267	Vertical	Pass
		1905	-2.23	3.97	28.19	21.99	158.125	Vertical	Pass
15.0MHz Band 16	1/#Mid	1857.5	-2.55	3.79	28.34	22.00	158.489	Vertical	Pass
		1880	-2.64	3.95	28.22	21.63	145.546	Vertical	Pass

QAM		1902.5	-2.56	3.97	28.18	21.65	146.218	Vertical	Pass
20.0MHz	1/#Mid	1860	-2.45	3.81	28.35	22.09	161.808	Vertical	Pass
Band 16		1880	-1.54	3.96	28.22	22.72	187.068	Vertical	Pass
QAM		1900	-2.46	4.00	28.16	21.70	147.911	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Midd	1710.7	-4.11	3.12	27.58	20.35	108.393	Horizontal	Pass
		1732.5	-4.30	3.27	27.61	20.04	100.925	Horizontal	Pass
		1754.3	-4.53	3.29	27.63	19.81	95.719	Horizontal	Pass
3.0MHz Band QPSK	1/#Midd	1711.5	-5.52	3.13	27.61	18.96	78.705	Horizontal	Pass
		1732.5	-5.60	3.27	27.61	18.74	74.817	Horizontal	Pass
		1753.5	-5.04	3.30	27.62	19.28	84.723	Horizontal	Pass
5.0MHz Band QPSK	1/#Midd	1712.5	-5.07	3.13	27.63	19.43	87.700	Horizontal	Pass
		1732.5	-5.87	3.27	27.61	18.47	70.307	Horizontal	Pass
		1752.5	-4.38	3.30	27.60	19.92	98.175	Horizontal	Pass
10.0MHz Band QPSK	1/#Midd	1715	-4.79	3.15	27.64	19.70	93.325	Horizontal	Pass
		1732.5	-3.80	3.31	27.61	20.50	112.202	Horizontal	Pass
		1750	-3.86	3.33	27.59	20.40	109.648	Horizontal	Pass
15.0MHz Band QPSK	1/#Midd	1717.5	-4.63	3.15	27.65	19.87	97.051	Horizontal	Pass
		1732.5	-4.37	3.31	27.61	19.93	98.401	Horizontal	Pass
		1747.5	-4.60	3.33	27.57	19.64	92.045	Horizontal	Pass
20.0MHz Band QPSK	1/#Midd	1720	-4.97	3.17	27.66	19.52	89.536	Horizontal	Pass
		1732.5	-3.94	3.32	27.61	20.35	108.393	Horizontal	Pass
		1745	-4.79	3.36	27.56	19.41	87.297	Horizontal	Pass
1.4MHz Band QPSK	1/#Midd	1710.7	-4.77	3.12	27.58	19.69	93.111	Vertical	Pass
		1732.5	-5.21	3.27	27.61	19.13	81.846	Vertical	Pass
		1754.3	-4.98	3.29	27.63	19.36	86.298	Vertical	Pass
3.0MHz Band QPSK	1/#Midd	1711.5	-4.03	3.13	27.61	20.45	110.917	Vertical	Pass
		1732.5	-3.97	3.27	27.61	20.37	108.893	Vertical	Pass
		1753.5	-3.96	3.30	27.62	20.36	108.643	Vertical	Pass
5.0MHz Band QPSK	1/#Midd	1712.5	-5.49	3.13	27.63	19.01	79.616	Vertical	Pass
		1732.5	-5.08	3.27	27.61	19.26	84.333	Vertical	Pass
		1752.5	-5.14	3.30	27.60	19.16	82.414	Vertical	Pass
10.0MHz Band	1/#Midd	1715	-5.46	3.15	27.64	19.03	79.983	Vertical	Pass
		1732.5	-5.22	3.31	27.61	19.08	80.910	Vertical	Pass

QPSK		1750	-4.05	3.33	27.59	20.21	104.954	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-5.03	3.15	27.65	19.47	88.512	Vertical	Pass
		1732.5	-4.48	3.31	27.61	19.82	95.940	Vertical	Pass
		1747.5	-4.75	3.33	27.57	19.49	88.920	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1720	-4.95	3.17	27.66	19.54	89.950	Vertical	Pass
		1732.5	-3.32	3.32	27.61	20.97	125.026	Vertical	Pass
		1745	-4.53	3.36	27.56	19.67	92.683	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-4.00	3.12	27.58	20.46	111.173	Horizontal	Pass
		1732.5	-4.22	3.27	27.61	20.12	102.802	Horizontal	Pass
		1754.3	-4.60	3.29	27.63	19.74	94.189	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-5.25	3.13	27.61	19.23	83.753	Horizontal	Pass
		1732.5	-6.05	3.27	27.61	18.29	67.453	Horizontal	Pass
		1753.5	-5.42	3.30	27.62	18.90	77.625	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-5.55	3.13	27.63	18.95	78.524	Horizontal	Pass
		1732.5	-5.56	3.27	27.61	18.78	75.509	Horizontal	Pass
		1752.5	-4.17	3.30	27.60	20.13	103.039	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-4.85	3.15	27.64	19.64	92.045	Horizontal	Pass
		1732.5	-4.73	3.31	27.61	19.57	90.573	Horizontal	Pass
		1750	-5.36	3.33	27.59	18.90	77.625	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-5.09	3.15	27.65	19.41	87.297	Horizontal	Pass
		1732.5	-3.74	3.31	27.61	20.56	113.763	Horizontal	Pass
		1747.5	-4.29	3.33	27.57	19.95	98.855	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-4.71	3.17	27.66	19.78	95.060	Horizontal	Pass
		1732.5	-3.96	3.32	27.61	20.33	107.895	Horizontal	Pass
		1745	-4.64	3.36	27.56	19.56	90.365	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-4.52	3.12	27.58	19.94	98.628	Vertical	Pass
		1732.5	-4.42	3.27	27.61	19.92	98.175	Vertical	Pass
		1754.3	-4.69	3.29	27.63	19.65	92.257	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-5.02	3.13	27.61	19.46	88.308	Vertical	Pass
		1732.5	-5.80	3.27	27.61	18.54	71.450	Vertical	Pass
		1753.5	-5.12	3.30	27.62	19.20	83.176	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-5.40	3.13	27.63	19.10	81.283	Vertical	Pass
		1732.5	-4.98	3.27	27.61	19.36	86.298	Vertical	Pass
		1752.5	-5.14	3.30	27.60	19.16	82.414	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-3.94	3.15	27.64	20.55	113.501	Vertical	Pass
		1732.5	-4.73	3.31	27.61	19.57	90.573	Vertical	Pass
		1750	-4.53	3.33	27.59	19.73	93.972	Vertical	Pass
15.0MHz Band 16	1/#Mid	1717.5	-4.44	3.15	27.65	20.06	101.391	Vertical	Pass
		1732.5	-5.31	3.31	27.61	18.99	79.250	Vertical	Pass

QAM		1747.5	-4.06	3.33	27.57	20.18	104.232	Vertical	Pass
20.0MHz	1/#Mid	1720	-4.18	3.17	27.66	20.31	107.399	Vertical	Pass
Band 16		1732.5	-3.64	3.32	27.61	20.65	116.145	Vertical	Pass
QAM		1745	-3.73	3.36	27.56	20.47	111.429	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	824.7	1.78	2.01	19.68	2.15	17.30	53.703	Horizontal	Pass
		836.5	1.56	2.01	19.77	2.15	17.17	52.119	Horizontal	Pass
		848.3	1.06	2.02	19.82	2.15	16.71	46.881	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	825.5	1.86	2.01	19.70	2.15	17.40	54.954	Horizontal	Pass
		836.5	1.13	2.01	19.77	2.15	16.74	47.206	Horizontal	Pass
		847.5	2.02	2.02	19.81	2.15	17.66	58.345	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	826.5	2.22	2.01	19.71	2.15	17.77	59.841	Horizontal	Pass
		836.5	1.85	2.01	19.77	2.15	17.46	55.719	Horizontal	Pass
		846.5	2.13	2.02	19.79	2.15	17.75	59.566	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	829	1.35	2.01	19.73	2.15	16.92	49.204	Horizontal	Pass
		836.5	1.89	2.01	19.77	2.15	17.50	56.234	Horizontal	Pass
		844	0.94	2.02	19.78	2.15	16.55	45.186	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	824.7	2.27	2.01	19.68	2.15	17.79	60.117	Vertical	Pass
		836.5	1.69	2.01	19.77	2.15	17.30	53.703	Vertical	Pass
		848.3	1.27	2.02	19.82	2.15	16.92	49.204	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	825.5	0.81	2.01	19.70	2.15	16.35	43.152	Vertical	Pass
		836.5	1.90	2.01	19.77	2.15	17.51	56.364	Vertical	Pass
		847.5	1.69	2.02	19.81	2.15	17.33	54.075	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	826.5	1.60	2.01	19.71	2.15	17.15	51.880	Vertical	Pass
		836.5	0.36	2.01	19.77	2.15	15.97	39.537	Vertical	Pass
		846.5	2.19	2.02	19.79	2.15	17.81	60.395	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	829	2.39	2.01	19.73	2.15	17.96	62.517	Vertical	Pass
		836.5	1.25	2.01	19.77	2.15	16.86	48.529	Vertical	Pass
		844	1.53	2.02	19.78	2.15	17.14	51.761	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Midd	824.7	2.09	2.01	19.68	2.15	17.61	57.677	Horizontal	Pass
		836.5	2.16	2.01	19.77	2.15	17.77	59.841	Horizontal	Pass
		848.3	1.10	2.02	19.82	2.15	16.75	47.315	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Midd	825.5	1.82	2.01	19.70	2.15	17.36	54.450	Horizontal	Pass
		836.5	1.74	2.01	19.77	2.15	17.35	54.325	Horizontal	Pass
		847.5	1.34	2.02	19.81	2.15	16.98	49.888	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Midd	826.5	2.16	2.01	19.71	2.15	17.71	59.020	Horizontal	Pass
		836.5	1.39	2.01	19.77	2.15	17.00	50.119	Horizontal	Pass
		846.5	1.92	2.02	19.79	2.15	17.54	56.754	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Midd	829	1.89	2.01	19.73	2.15	17.46	55.719	Horizontal	Pass
		836.5	1.46	2.01	19.77	2.15	17.07	50.933	Horizontal	Pass
		844	1.30	2.02	19.78	2.15	16.91	49.091	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Midd	824.7	1.95	2.01	19.68	2.15	17.47	55.847	Vertical	Pass
		836.5	1.18	2.01	19.77	2.15	16.79	47.753	Vertical	Pass
		848.3	1.11	2.02	19.82	2.15	16.76	47.424	Vertical	Pass
3.0MHz Band 16 QAM	1/#Midd	825.5	1.65	2.01	19.70	2.15	17.19	52.360	Vertical	Pass
		836.5	2.06	2.01	19.77	2.15	17.67	58.479	Vertical	Pass
		847.5	0.76	2.02	19.81	2.15	16.40	43.652	Vertical	Pass
5.0MHz Band 16 QAM	1/#Midd	826.5	1.32	2.01	19.71	2.15	16.87	48.641	Vertical	Pass
		836.5	1.54	2.01	19.77	2.15	17.15	51.880	Vertical	Pass
		846.5	1.80	2.02	19.79	2.15	17.42	55.208	Vertical	Pass
10.0MHz Band 16 QAM	1/#Midd	829	1.90	2.01	19.73	2.15	17.47	55.847	Vertical	Pass
		836.5	2.19	2.01	19.77	2.15	17.80	60.256	Vertical	Pass
		844	1.14	2.02	19.78	2.15	16.75	47.315	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	2502.5	-3.13	4.54	27.75	20.08	101.859	Horizontal	Pass
		2535	-3.28	4.69	27.72	19.75	94.406	Horizontal	Pass
		2567.5	-3.02	4.71	27.71	19.98	99.541	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	-3.23	4.55	27.76	19.98	99.541	Horizontal	Pass
		2535	-3.74	4.69	27.72	19.29	84.918	Horizontal	Pass
		2565	-3.56	4.72	27.70	19.42	87.498	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-3.21	4.55	27.77	20.01	100.231	Horizontal	Pass
		2535	-3.10	4.69	27.72	19.93	98.401	Horizontal	Pass
		2562.5	-3.89	4.72	27.69	19.08	80.910	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	-3.28	4.57	27.78	19.93	98.401	Horizontal	Pass
		2535	-3.47	4.73	27.72	19.52	89.536	Horizontal	Pass
		2560	-3.04	4.75	27.68	19.89	97.499	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	-4.01	4.54	27.75	19.20	83.176	Vertical	Pass
		2535	-3.57	4.69	27.72	19.46	88.308	Vertical	Pass
		2567.5	-4.03	4.71	27.71	18.97	78.886	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	-3.44	4.55	27.76	19.77	94.842	Vertical	Pass
		2535	-3.06	4.69	27.72	19.97	99.312	Vertical	Pass
		2565	-4.21	4.72	27.70	18.77	75.336	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-3.11	4.55	27.77	20.11	102.565	Vertical	Pass
		2535	-3.91	4.69	27.72	19.12	81.658	Vertical	Pass
		2562.5	-2.94	4.72	27.69	20.03	100.693	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	-3.31	4.57	27.78	19.90	97.724	Vertical	Pass
		2535	-2.56	4.73	27.72	20.43	110.408	Vertical	Pass
		2560	-2.94	4.75	27.68	19.99	99.770	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	-4.46	4.54	27.75	18.75	74.989	Horizontal	Pass
		2535	-3.56	4.69	27.72	19.47	88.512	Horizontal	Pass
		2567.5	-3.21	4.71	27.71	19.79	95.280	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-3.71	4.55	27.76	19.50	89.125	Horizontal	Pass
		2535	-3.47	4.69	27.72	19.56	90.365	Horizontal	Pass
		2565	-3.79	4.72	27.70	19.19	82.985	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-3.86	4.55	27.77	19.36	86.298	Horizontal	Pass
		2535	-3.73	4.69	27.72	19.30	85.114	Horizontal	Pass
		2562.5	-3.37	4.72	27.69	19.60	91.201	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-3.48	4.57	27.78	19.73	93.972	Horizontal	Pass
		2535	-3.28	4.73	27.72	19.71	93.541	Horizontal	Pass
		2560	-3.78	4.75	27.68	19.15	82.224	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-4.23	4.54	27.75	18.98	79.068	Vertical	Pass
		2535	-3.74	4.69	27.72	19.29	84.918	Vertical	Pass
		2567.5	-4.25	4.71	27.71	18.75	74.989	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-4.27	4.55	27.76	18.94	78.343	Vertical	Pass
		2535	-4.05	4.69	27.72	18.98	79.068	Vertical	Pass
		2565	-3.05	4.72	27.70	19.93	98.401	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-3.7	4.55	27.77	19.37	86.497	Vertical	Pass
		2535	-3.58	4.69	27.72	19.45	88.105	Vertical	Pass
		2562.5	-3.92	4.72	27.69	19.05	80.353	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-3.35	4.57	27.78	19.86	96.828	Vertical	Pass
		2535	-3.04	4.73	27.72	19.95	98.855	Vertical	Pass
		2560	-3.71	4.75	27.68	19.22	83.560	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Antenna Gain	Correction	Max. ERP	Max. ERP	Polarization Of	
			(dBm)	(dBm)	(dB)	(dB)	Average	Average	Max. ERP	
							(dBm)	(mW)		
1.4MHz Band QPSK	1/#Mid	699.7	2.31	1.91	19.21	2.15	17.46	55.719	Vertical	Pass
		707.5	1.45	1.91	19.26	2.15	16.65	46.238	Vertical	Pass
		715.3	0.94	1.93	19.34	2.15	16.20	41.687	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	700.5	1.38	1.91	19.21	2.15	16.53	44.978	Vertical	Pass
		707.5	0.96	1.91	19.26	2.15	16.16	41.305	Vertical	Pass
		714.5	1.17	1.93	19.34	2.15	16.43	43.954	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	701.5	1.00	1.91	19.23	2.15	16.17	41.400	Vertical	Pass
		707.5	1.61	1.91	19.26	2.15	16.81	47.973	Vertical	Pass
		713.5	1.02	1.92	19.33	2.15	16.28	42.462	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	704	1.21	1.91	19.25	2.15	16.40	43.652	Vertical	Pass
		707.5	1.45	1.91	19.26	2.15	16.65	46.238	Vertical	Pass
		711	1.59	1.92	19.32	2.15	16.84	48.306	Vertical	Pass
1.4MHz Band QPSK	1/#Mid	699.7	1.39	1.91	19.21	2.15	16.54	45.082	Horizontal	Pass
		707.5	0.81	1.91	19.26	2.15	16.01	39.902	Horizontal	Pass
		715.3	0.86	1.93	19.34	2.15	16.12	40.926	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	700.5	0.96	1.91	19.21	2.15	16.11	40.832	Horizontal	Pass
		707.5	0.97	1.91	19.26	2.15	16.17	41.400	Horizontal	Pass
		714.5	2.00	1.93	19.34	2.15	17.26	53.211	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	701.5	1.58	1.91	19.23	2.15	16.75	47.315	Horizontal	Pass
		707.5	1.82	1.91	19.26	2.15	17.02	50.350	Horizontal	Pass
		713.5	1.94	1.92	19.33	2.15	17.20	52.481	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	704	2.70	1.91	19.25	2.15	17.89	61.518	Horizontal	Pass
		707.5	0.86	1.91	19.26	2.15	16.06	40.365	Horizontal	Pass
		711	0.99	1.92	19.32	2.15	16.24	42.073	Horizontal	Pass

Radiated Power (EIRP) for Band 12										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level	Cable Loss	Anten na Gain	Corre ction	Max. ERP	Max. ERP	Polarizati on Of Max. ERP	
			(dBm)	(dBm)	(dB)	(dB)	Averag e	Averag e		
1.4MHz Band 16 QAM	1/#M id	699.7	1.36	1.91	19.21	2.15	16.51	44.771	Vertical	Pass
		707.5	0.99	1.91	19.26	2.15	16.19	41.591	Vertical	Pass
		715.3	0.93	1.93	19.34	2.15	16.19	41.591	Vertical	Pass
3.0MHz Band 16 QAM	1/#M id	700.5	1.99	1.91	19.21	2.15	17.14	51.761	Vertical	Pass
		707.5	1.76	1.91	19.26	2.15	16.96	49.659	Vertical	Pass
		714.5	2.07	1.93	19.34	2.15	17.33	54.075	Vertical	Pass
5.0MHz Band 16 QAM	1/#M id	701.5	2.15	1.91	19.23	2.15	17.32	53.951	Vertical	Pass
		707.5	2.24	1.91	19.26	2.15	17.44	55.463	Vertical	Pass
		713.5	1.61	1.92	19.33	2.15	16.87	48.641	Vertical	Pass
10.0MH z Band 16 QAM	1/#M id	704	2.01	1.91	19.25	2.15	17.20	52.481	Vertical	Pass
		707.5	1.29	1.91	19.26	2.15	16.49	44.566	Vertical	Pass
		711	2.59	1.92	19.32	2.15	17.84	60.814	Vertical	Pass
1.4MHz Band 16 QAM	1/#M id	699.7	1.31	1.91	19.21	2.15	16.46	44.259	Horizontal	Pass
		707.5	1.28	1.91	19.26	2.15	16.48	44.463	Horizontal	Pass
		715.3	1.57	1.93	19.34	2.15	16.83	48.195	Horizontal	Pass
3.0MHz Band 16 QAM	1/#M id	700.5	2.47	1.91	19.21	2.15	17.62	57.810	Horizontal	Pass
		707.5	2.67	1.91	19.26	2.15	17.87	61.235	Horizontal	Pass
		714.5	2.26	1.93	19.34	2.15	17.52	56.494	Horizontal	Pass
5.0MHz Band 16 QAM	1/#M id	701.5	1.76	1.91	19.23	2.15	16.93	49.317	Horizontal	Pass
		707.5	2.13	1.91	19.26	2.15	17.33	54.075	Horizontal	Pass
		713.5	2.32	1.92	19.33	2.15	17.58	57.280	Horizontal	Pass
10.0MH z Band 16 QAM	1/#M id	704	2.18	1.91	19.25	2.15	17.37	54.576	Horizontal	Pass
		707.5	2.73	1.91	19.26	2.15	17.93	62.087	Horizontal	Pass
		711	1.99	1.92	19.32	2.15	17.24	52.966	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 17

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/16	706.5	2.25	1.91	19.23	2.15	17.42	55.208	Vertical	Pass
		710	2.42	1.91	19.26	2.15	17.62	57.810	Vertical	Pass
		713.5	3.09	1.92	19.33	2.15	18.35	68.391	Vertical	Pass
10.0MHz Band QPSK	1/16	709	1.21	1.91	19.25	2.15	16.40	43.652	Vertical	Pass
		710	2.15	1.91	19.26	2.15	17.35	54.325	Vertical	Pass
		711	3.14	1.92	19.32	2.15	18.39	69.024	Vertical	Pass
5.0MHz Band QPSK	1/16	706.5	2.66	1.91	19.23	2.15	17.83	60.674	Horizontal	Pass
		710	2.62	1.91	19.26	2.15	17.82	60.534	Horizontal	Pass
		713.5	1.97	1.92	19.33	2.15	17.23	52.845	Horizontal	Pass
10.0MHz Band QPSK	1/16	709	2.29	1.91	19.25	2.15	17.48	55.976	Horizontal	Pass
		710	3.46	1.91	19.26	2.15	18.66	73.451	Horizontal	Pass
		711	2.71	1.92	19.32	2.15	17.96	62.517	Horizontal	Pass

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Midd	706.5	2.18	1.91	19.23	2.15	17.35	54.325	Vertical	Pass
		710	1.84	1.91	19.26	2.15	17.04	50.582	Vertical	Pass
		713.5	1.62	1.92	19.33	2.15	16.88	48.753	Vertical	Pass
10.0MHz Band 16 QAM	1/#Midd	709	1.71	1.91	19.25	2.15	16.90	48.978	Vertical	Pass
		710	1.14	1.91	19.26	2.15	16.34	43.053	Vertical	Pass
		711	1.64	1.92	19.32	2.15	16.89	48.865	Vertical	Pass
5.0MHz Band 16 QAM	1/#Midd	706.5	1.25	1.91	19.23	2.15	16.42	43.73	Horizontal	Pass
		710	1.92	1.91	19.26	2.15	17.12	51.523	Horizontal	Pass
		713.5	2.29	1.92	19.33	2.15	17.55	56.885	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Midd	709	1.16	1.91	19.25	2.15	16.35	43.152	Horizontal	Pass
		710	2.89	1.91	19.26	2.15	18.09	64.417	Horizontal	Pass
		711	2.11	1.92	19.32	2.15	17.36	54.450	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.7 LTE BAND 66

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Midd	1710.7	-1.03	3.12	27.58	23.43	220.293	Horizontal	Pass
		1745	-1.82	3.27	27.61	22.52	178.649	Horizontal	Pass
		1779.3	-1.25	3.29	27.63	23.09	203.704	Horizontal	Pass
3.0MHz Band QPSK	1/#Midd	1711.5	-2.62	3.13	27.61	21.86	153.462	Horizontal	Pass
		1745	-2.59	3.27	27.61	21.75	149.624	Horizontal	Pass
		1778.5	-2.18	3.30	27.62	22.14	163.682	Horizontal	Pass
5.0MHz Band QPSK	1/#Midd	1712.5	-1.76	3.13	27.63	22.74	187.932	Horizontal	Pass
		1745	-2.64	3.27	27.61	21.70	147.911	Horizontal	Pass
		1777.5	-1.29	3.30	27.60	23.01	199.986	Horizontal	Pass
10.0MHz Band QPSK	1/#Midd	1715	-0.81	3.15	27.64	23.68	233.346	Horizontal	Pass
		1745	-1.35	3.31	27.61	22.95	197.242	Horizontal	Pass
		1775	-1.11	3.33	27.59	23.15	206.538	Horizontal	Pass
15.0MHz Band QPSK	1/#Midd	1717.5	-1.66	3.15	27.65	22.84	192.309	Horizontal	Pass
		1745	-1.51	3.31	27.61	22.79	190.108	Horizontal	Pass
		1772.5	-1.45	3.33	27.57	22.79	190.108	Horizontal	Pass
20.0MHz Band QPSK	1/#Midd	1720	-1.11	3.17	27.66	23.38	217.771	Horizontal	Pass
		1745	-1.50	3.32	27.61	22.79	190.108	Horizontal	Pass
		1770	-1.11	3.36	27.56	23.09	203.704	Horizontal	Pass
1.4MHz Band QPSK	1/#Midd	1710.7	-1.56	3.12	27.58	22.90	194.984	Vertical	Pass
		1745	-1.96	3.27	27.61	22.38	172.982	Vertical	Pass
		1779.3	-2.06	3.29	27.63	22.28	169.044	Vertical	Pass
3.0MHz Band QPSK	1/#Midd	1711.5	-1.46	3.13	27.61	23.02	200.447	Vertical	Pass
		1745	-0.85	3.27	27.61	23.49	223.357	Vertical	Pass
		1778.5	-1.54	3.30	27.62	22.78	189.671	Vertical	Pass
5.0MHz Band QPSK	1/#Midd	1712.5	-2.88	3.13	27.63	21.62	145.211	Vertical	Pass
		1745	-2.22	3.27	27.61	22.12	162.930	Vertical	Pass
		1777.5	-1.64	3.30	27.60	22.66	184.502	Vertical	Pass
10.0MHz Band QPSK	1/#Midd	1715	-1.58	3.15	27.64	22.91	195.434	Vertical	Pass
		1745	-1.39	3.31	27.61	22.91	195.434	Vertical	Pass
		1775	-1.12	3.33	27.59	23.14	206.063	Vertical	Pass

15.0MHz z Band QPSK	1/#Mid	1717.5	-1.83	3.15	27.65	22.67	184.927	Vertical	Pass
		1745	-1.34	3.31	27.61	22.96	197.697	Vertical	Pass
		1772.5	-1.73	3.33	27.57	22.51	178.238	Vertical	Pass
20.0MHz z Band QPSK	1/#Mid	1720	-1.90	3.17	27.66	22.59	181.552	Vertical	Pass
		1745	-0.58	3.32	27.61	23.71	234.963	Vertical	Pass
		1770	-1.32	3.36	27.56	22.88	194.089	Vertical	Pass

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-2.69	3.12	27.58	21.77	150.314	Horizontal	Pass
		1745	-2.10	3.27	27.61	22.24	167.494	Horizontal	Pass
		1779.3	-2.49	3.29	27.63	21.85	153.109	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-3.97	3.13	27.61	20.51	112.460	Horizontal	Pass
		1745	-4.09	3.27	27.61	20.25	105.925	Horizontal	Pass
		1778.5	-3.13	3.30	27.62	21.19	131.522	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-4.41	3.13	27.63	20.09	102.094	Horizontal	Pass
		1745	-3.43	3.27	27.61	20.91	123.310	Horizontal	Pass
		1777.5	-2.47	3.30	27.60	21.83	152.405	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-2.79	3.15	27.64	21.70	147.911	Horizontal	Pass
		1745	-2.70	3.31	27.61	21.60	144.544	Horizontal	Pass
		1775	-2.69	3.33	27.59	21.57	143.549	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-2.32	3.15	27.65	22.18	165.196	Horizontal	Pass
		1745	-1.85	3.31	27.61	22.45	175.792	Horizontal	Pass
		1772.5	-1.98	3.33	27.57	22.26	168.267	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-2.76	3.17	27.66	21.73	148.936	Horizontal	Pass
		1745	-2.44	3.32	27.61	21.85	153.109	Horizontal	Pass
		1770	-3.00	3.36	27.56	21.20	131.826	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-1.97	3.12	27.58	22.49	177.419	Vertical	Pass
		1745	-2.17	3.27	27.61	22.17	164.816	Vertical	Pass
		1779.3	-2.92	3.29	27.63	21.42	138.676	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-3.28	3.13	27.61	21.20	131.826	Vertical	Pass
		1745	-3.03	3.27	27.61	21.31	135.207	Vertical	Pass
		1778.5	-3.08	3.30	27.62	21.24	133.045	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-4.12	3.13	27.63	20.38	109.144	Vertical	Pass
		1745	-3.35	3.27	27.61	20.99	125.603	Vertical	Pass
		1777.5	-2.94	3.30	27.60	21.36	136.773	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-1.92	3.15	27.64	22.57	180.717	Vertical	Pass
		1745	-2.93	3.31	27.61	21.37	137.088	Vertical	Pass
		1775	-2.17	3.33	27.59	22.09	161.808	Vertical	Pass
15.0MHz Band 16	1/#Mid	1717.5	-2.29	3.15	27.65	22.21	166.341	Vertical	Pass
		1745	-3.15	3.31	27.61	21.15	130.317	Vertical	Pass

QAM		1772.5	-2.45	3.33	27.57	21.79	151.008	Vertical	Pass
20.0MHz	1/#Mid	1720	-2.22	3.17	27.66	22.27	168.655	Vertical	Pass
Band 16		1745	-2.61	3.32	27.61	21.68	147.231	Vertical	Pass
QAM		1770	-1.56	3.36	27.56	22.64	183.654	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10} (P \text{ [Watts]})$.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10} (P \text{ [Watts]})$, where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- ☐ LTE Band 2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17
LTE Band 66

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-49.49	4.04	33.51	-20.02	-13	-7.02	Horizontal
3701.4	-54.65	4.04	33.51	-25.18	-13	-12.18	Vertical
5552.1	-50.47	5.24	35.84	-19.87	-13	-6.87	Vertical
5552.1	-51.94	5.24	35.84	-21.34	-13	-8.34	Horizontal
108.3	-50.67	1.39	17.57	-34.49	-13	-21.49	Vertical
225.8	-70.84	1.77	16.11	-56.50	-13	-43.50	Horizontal
Test Results for Mid Channel 1732.5MHz							
3760.0	-52.50	4.04	33.56	-22.98	-13	-9.98	Horizontal
3760.0	-52.50	4.04	33.56	-22.98	-13	-9.98	Vertical
5640.0	-51.19	5.24	35.91	-20.52	-13	-7.52	Vertical
5640.0	-58.61	5.24	35.91	-27.94	-13	-14.94	Horizontal
89.3	-66.61	1.36	15.21	-52.76	-13	-39.76	Vertical
105.0	-52.13	1.36	17.09	-36.40	-13	-23.40	Horizontal
Test Results for High Channel 1754.3MHz							
3818.6	-56.63	4.04	34.00	-26.67	-13	-13.67	Horizontal
3818.6	-51.97	4.04	34.00	-22.01	-13	-9.01	Vertical
5727.9	-50.61	5.24	36.04	-19.81	-13	-6.81	Vertical
5727.9	-55.85	5.24	36.04	-25.05	-13	-12.05	Horizontal
257.4	-64.98	1.57	17.03	-49.52	-13	-36.52	Vertical
238.7	-65.81	1.39	16.33	-50.87	-13	-37.87	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-50.37	4.07	33.54	-20.90	-13	-7.90	Horizontal
3720.0	-45.62	4.07	33.54	-16.15	-13	-3.15	Vertical
5580.0	-47.34	5.28	35.86	-16.76	-13	-3.76	Vertical
5580.0	-48.88	5.28	35.86	-18.30	-13	-5.30	Horizontal
184.3	-64.85	1.66	15.77	-50.74	-13	-37.74	Vertical
144.2	-50.59	1.53	15.91	-36.21	-13	-23.21	Horizontal
Test Results for Mid Channel 1732.5MHz							
3760.0	-53.28	4.04	33.56	-23.76	-13	-10.76	Horizontal
3760.0	-49.66	4.04	33.56	-20.14	-13	-7.14	Vertical
5640.0	-49.93	5.24	35.91	-19.26	-13	-6.26	Vertical
5640.0	-49.08	5.24	35.91	-18.41	-13	-5.41	Horizontal
166.6	-70.21	1.68	17.01	-54.88	-13	-41.88	Vertical
227.9	-64.57	1.65	15.00	-51.22	-13	-38.22	Horizontal
Test Results for High Channel 1754.3MHz							
3800.0	-52.65	4.04	34.00	-22.69	-13	-9.69	Horizontal
3800.0	-48.01	4.04	34.00	-18.05	-13	-5.05	Vertical
5700.0	-53.15	5.24	36.04	-22.35	-13	-9.35	Vertical
5700.0	-49.91	5.24	36.04	-19.11	-13	-6.11	Horizontal
87.8	-62.66	1.66	15.16	-49.16	-13	-36.16	Vertical
145.5	-67.44	1.73	16.39	-52.78	-13	-39.78	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-52.08	4.02	29.80	-26.30	-13	-13.30	Horizontal
3421.4	-53.60	4.02	29.80	-27.82	-13	-14.82	Vertical
5132.1	-47.36	5.24	35.84	-16.76	-13	-3.76	Vertical
5132.1	-51.19	5.24	35.84	-20.59	-13	-7.59	Horizontal
257.9	-52.93	1.38	15.61	-38.70	-13	-25.70	Vertical
107.3	-54.41	1.36	17.77	-38.00	-13	-25.00	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-50.37	4.03	30.00	-24.40	-13	-11.40	Horizontal
3465.0	-53.96	4.03	30.00	-27.99	-13	-14.99	Vertical
5197.5	-48.75	5.25	35.86	-18.14	-13	-5.14	Vertical
5197.5	-49.35	5.25	35.86	-18.74	-13	-5.74	Horizontal
152.2	-61.56	1.58	16.81	-46.33	-13	-33.33	Vertical
246.6	-58.10	1.40	17.18	-42.32	-13	-29.32	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-52.01	4.05	30.01	-26.05	-13	-13.05	Horizontal
3508.6	-46.34	4.05	30.01	-20.38	-13	-7.38	Vertical
5262.9	-51.91	5.26	35.86	-21.31	-13	-8.31	Vertical
5262.9	-50.06	5.26	35.86	-19.46	-13	-6.46	Horizontal
246.3	-59.34	1.40	15.03	-45.71	-13	-32.71	Vertical
162.1	-60.72	1.49	16.84	-45.37	-13	-32.37	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-51.52	4.02	29.80	-25.74	-13	-12.74	Horizontal
3440.0	-54.25	4.02	29.80	-28.47	-13	-15.47	Vertical
5160.0	-54.54	5.24	35.84	-23.94	-13	-10.94	Vertical
5160.0	-54.72	5.24	35.84	-24.12	-13	-11.12	Horizontal
146.3	-70.31	1.38	17.09	-54.60	-13	-41.60	Vertical
261.2	-67.63	1.74	16.85	-52.52	-13	-39.52	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-49.53	4.03	30.00	-23.56	-13	-10.56	Horizontal
3465.0	-52.50	4.03	30.00	-26.53	-13	-13.53	Vertical
5197.5	-46.86	5.25	35.86	-16.25	-13	-3.25	Vertical
5197.5	-54.17	5.25	35.86	-23.56	-13	-10.56	Horizontal
232.2	-65.14	1.41	17.04	-49.51	-13	-36.51	Vertical
151.6	-54.72	1.32	15.50	-40.54	-13	-27.54	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-51.63	2.91	27.68	-26.86	-13	-13.86	Horizontal
3490.0	-52.39	2.91	27.68	-27.62	-13	-14.62	Vertical
5235.0	-54.17	5.26	35.86	-23.57	-13	-10.57	Vertical
5235.0	-57.31	5.26	35.86	-26.71	-13	-13.71	Horizontal
263.5	-55.41	1.34	16.90	-39.85	-13	-26.85	Vertical
142.8	-69.29	1.56	16.20	-54.65	-13	-41.65	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-49.59	2.78	27.50	-24.87	-13	-11.87	Horizontal
1649.4	-56.96	2.78	27.50	-32.24	-13	-19.24	Vertical
2474.1	-52.87	2.90	27.80	-27.97	-13	-14.97	Vertical
2474.1	-48.58	2.90	27.80	-23.68	-13	-10.68	Horizontal
255.2	-60.09	1.39	15.89	-45.59	-13	-32.59	Vertical
86.1	-65.01	1.78	17.20	-49.59	-13	-36.59	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-49.50	2.80	27.48	-24.82	-13	-11.82	Horizontal
1673.0	-49.40	2.80	27.48	-24.72	-13	-11.72	Vertical
2509.5	-56.83	2.91	27.70	-32.04	-13	-19.04	Vertical
2509.5	-53.02	2.91	27.70	-28.23	-13	-15.23	Horizontal
101.5	-64.19	1.51	17.39	-48.31	-13	-35.31	Vertical
246.3	-57.67	1.68	17.84	-41.51	-13	-28.51	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-54.75	2.82	27.43	-30.14	-13	-17.14	Horizontal
1696.6	-51.67	2.82	27.43	-27.06	-13	-14.06	Vertical
2544.9	-53.07	2.92	27.74	-28.25	-13	-15.25	Vertical
2544.9	-52.43	2.92	27.74	-27.61	-13	-14.61	Horizontal
247.4	-62.18	1.75	15.53	-48.40	-13	-35.40	Vertical
102.9	-68.64	1.59	17.25	-52.98	-13	-39.98	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-50.66	2.78	27.50	-25.94	-13	-12.94	Horizontal
1658.0	-50.22	2.78	27.50	-25.50	-13	-12.50	Vertical
2487.0	-56.32	2.90	27.80	-31.42	-13	-18.42	Vertical
2487.0	-56.06	2.90	27.80	-31.16	-13	-18.16	Horizontal
274.2	-47.73	1.39	15.23	-33.89	-13	-20.89	Vertical
92.6	-62.76	1.59	15.25	-49.10	-13	-36.10	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-49.24	2.80	27.48	-24.56	-13	-11.56	Horizontal
1673.0	-57.29	2.80	27.48	-32.61	-13	-19.61	Vertical
2509.5	-57.81	2.91	27.70	-33.02	-13	-20.02	Vertical
2509.5	-57.15	2.91	27.70	-32.36	-13	-19.36	Horizontal
228.8	-70.15	1.44	17.61	-53.98	-13	-40.98	Vertical
211.4	-48.99	1.59	15.36	-35.22	-13	-22.22	Horizontal
Test Results for High Channel 844MHz							
1688.0	-48.94	2.82	27.43	-24.33	-13	-11.33	Horizontal
1688.0	-53.67	2.82	27.43	-29.06	-13	-16.06	Vertical
2532.0	-56.74	2.92	27.74	-31.92	-13	-18.92	Vertical
2532.0	-55.66	2.92	27.74	-30.84	-13	-17.84	Horizontal
84.4	-64.79	1.41	16.44	-49.76	-13	-36.76	Vertical
227.3	-56.29	1.33	16.47	-41.15	-13	-28.15	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-67.31	5.23	35.81	-36.73	-25	-11.73	Horizontal
5005.0	-68.95	5.23	35.81	-38.37	-25	-13.37	Vertical
7507.5	-63.24	5.67	36.85	-32.06	-25	-7.06	Vertical
7507.5	-68.16	5.67	36.85	-36.98	-25	-11.98	Horizontal
213.6	-64.16	1.63	15.92	-49.87	-25	-24.87	Vertical
319.6	-62.50	1.52	15.74	-48.28	-25	-23.28	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-68.10	5.23	35.82	-37.51	-25	-12.51	Horizontal
5070.0	-70.16	5.23	35.82	-39.57	-25	-14.57	Vertical
7605.0	-66.20	5.67	36.85	-35.02	-25	-10.02	Vertical
7605.0	-65.71	5.67	36.85	-34.53	-25	-9.53	Horizontal
269.3	-76.14	1.47	15.48	-62.13	-25	-37.13	Vertical
544.9	-82.24	1.52	16.16	-67.60	-25	-42.60	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-67.92	5.24	35.83	-37.33	-25	-12.33	Horizontal
5135.0	-63.27	5.24	35.83	-32.68	-25	-7.68	Vertical
7702.5	-65.93	5.68	36.87	-34.74	-25	-9.74	Vertical
7702.5	-63.41	5.68	36.87	-32.22	-25	-7.22	Horizontal
409.3	-67.19	1.71	15.87	-53.03	-25	-28.03	Vertical
563.5	-74.18	1.55	16.32	-59.41	-25	-34.41	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-63.29	5.23	35.82	-32.70	-25	-7.70	Horizontal
5020.0	-64.51	5.23	35.82	-33.92	-25	-8.92	Vertical
7530.0	-63.57	5.67	36.86	-32.38	-25	-7.38	Vertical
7530.0	-68.20	5.67	36.86	-37.01	-25	-12.01	Horizontal
281.9	-74.38	1.55	15.91	-60.02	-25	-35.02	Vertical
256.5	-72.16	1.60	16.19	-57.57	-25	-32.57	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-65.96	5.23	35.82	-35.37	-25	-10.37	Horizontal
5070.0	-66.94	5.23	35.82	-36.35	-25	-11.35	Vertical
7605.0	-63.20	5.67	36.85	-32.02	-25	-7.02	Vertical
7605.0	-62.05	5.67	36.85	-30.87	-25	-5.87	Horizontal
523.9	-66.50	1.77	16.85	-51.42	-25	-26.42	Vertical
435.4	-70.38	1.33	17.97	-53.74	-25	-28.74	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-70.03	5.24	35.83	-39.44	-25	-14.44	Horizontal
5120.0	-68.39	5.24	35.83	-37.80	-25	-12.80	Vertical
7680.0	-68.48	5.70	36.88	-37.30	-25	-12.30	Vertical
7680.0	-65.74	5.70	36.88	-34.56	-25	-9.56	Horizontal
238.8	-74.83	1.71	17.36	-59.18	-25	-34.18	Vertical
335.4	-62.71	1.73	17.25	-47.19	-25	-22.19	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-54.27	2.60	27.20	-29.67	-13	-16.67	Horizontal
1399.4	-48.89	2.60	27.20	-24.29	-13	-11.29	Vertical
2099.1	-51.20	2.85	27.54	-26.51	-13	-13.51	Vertical
2099.1	-49.98	2.85	27.54	-25.29	-13	-12.29	Horizontal
241.5	-58.73	1.61	15.74	-44.60	-13	-31.60	Vertical
162.2	-48.05	1.42	16.24	-33.23	-13	-20.23	Horizontal
Test Results For Mid Channel 707.5MHz							
1415.0	-53.18	2.61	27.28	-28.51	-13	-15.51	Horizontal
1415.0	-50.97	2.61	27.28	-26.30	-13	-13.30	Vertical
2122.5	-55.20	2.87	27.59	-30.48	-13	-17.48	Vertical
2122.5	-57.59	2.87	27.59	-32.87	-13	-19.87	Horizontal
100.9	-65.96	1.30	16.07	-51.19	-13	-38.19	Vertical
126.4	-49.43	1.61	15.84	-35.20	-13	-22.20	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-55.33	2.63	27.28	-30.68	-13	-17.68	Horizontal
1430.6	-56.48	2.63	27.28	-31.83	-13	-18.83	Vertical
2145.9	-53.88	2.88	27.60	-29.16	-13	-16.16	Vertical
2145.9	-52.44	2.88	27.60	-27.72	-13	-14.72	Horizontal
100.4	-65.12	1.41	16.77	-49.76	-13	-36.76	Vertical
161.1	-53.32	1.75	16.13	-38.94	-13	-25.94	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408.0	-48.21	2.61	27.26	-23.56	-13	-10.56	Horizontal
1408.0	-54.11	2.61	27.26	-29.46	-13	-16.46	Vertical
2112.0	-49.16	2.87	27.58	-24.45	-13	-11.45	Vertical
2112.0	-52.93	2.87	27.58	-28.22	-13	-15.22	Horizontal
169.7	-58.64	1.32	17.18	-42.78	-13	-29.78	Vertical
241.2	-47.87	1.75	16.52	-33.10	-13	-20.10	Horizontal
Test Results for Mid Channel 707.5MHz							
1415.0	-49.84	2.61	27.28	-25.17	-13	-12.17	Horizontal
1415.0	-52.98	2.61	27.28	-28.31	-13	-15.31	Vertical
2122.5	-52.53	2.87	27.59	-27.81	-13	-14.81	Vertical
2122.5	-45.58	2.87	27.59	-20.86	-13	-7.86	Horizontal
268.1	-48.42	1.63	15.15	-34.90	-13	-21.90	Vertical
88.0	-49.00	1.42	16.15	-34.27	-13	-21.27	Horizontal
Test Results for High Channel 711MHz							
1422.0	-49.85	2.62	27.28	-25.19	-13	-12.19	Horizontal
1422.0	-52.96	2.62	27.28	-28.30	-13	-15.30	Vertical
2133.0	-54.50	2.87	27.60	-29.77	-13	-16.77	Vertical
2133.0	-53.37	2.87	27.60	-28.64	-13	-15.64	Horizontal
119.1	-59.79	1.45	15.55	-45.69	-13	-32.69	Vertical
233.3	-56.95	1.48	17.94	-40.49	-13	-27.49	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413.0	-53.88	2.61	27.28	-29.21	-13	-16.21	Horizontal
1413.0	-52.03	2.61	27.28	-27.36	-13	-14.36	Vertical
2119.5	-55.39	2.87	27.59	-30.67	-13	-17.67	Vertical
2119.5	-49.13	2.87	27.59	-24.41	-13	-11.41	Horizontal
202.8	-71.41	1.67	16.15	-56.93	-13	-43.93	Vertical
95.6	-66.52	1.80	16.87	-51.45	-13	-38.45	Horizontal
Test Results For Mid Channel 710MHz							
1420.0	-51.27	2.62	27.30	-26.59	-13	-13.59	Horizontal
1420.0	-56.10	2.62	27.30	-31.42	-13	-18.42	Vertical
2130.0	-53.94	2.87	27.62	-29.19	-13	-16.19	Vertical
2130.0	-53.51	2.87	27.62	-28.76	-13	-15.76	Horizontal
269.5	-57.71	1.47	16.63	-42.55	-13	-29.55	Vertical
229.4	-66.97	1.59	17.70	-50.86	-13	-37.86	Horizontal
Test Results for High Channel 713.5MHz							
1427.0	-55.20	2.66	27.28	-30.58	-13	-17.58	Horizontal
1427.0	-50.54	2.66	27.28	-25.92	-13	-12.92	Vertical
2140.5	-50.51	2.88	27.60	-25.79	-13	-12.79	Vertical
2140.5	-52.13	2.88	27.60	-27.41	-13	-14.41	Horizontal
194.1	-68.06	1.69	15.13	-54.62	-13	-41.62	Vertical
191.3	-64.52	1.71	15.12	-51.11	-13	-38.11	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418.0	-46.36	2.62	27.30	-21.68	-13	-8.68	Horizontal
1418.0	-47.62	2.62	27.30	-22.94	-13	-9.94	Vertical
2127.0	-53.55	2.87	27.62	-28.80	-13	-15.80	Vertical
2127.0	-46.85	2.87	27.62	-22.10	-13	-9.10	Horizontal
102.4	-57.30	1.60	17.61	-41.29	-13	-28.29	Vertical
173.7	-57.56	1.31	16.37	-42.50	-13	-29.50	Horizontal
Test Results for Mid Channel 710MHz							
1420.0	-42.26	2.62	27.30	-17.58	-13	-4.58	Horizontal
1420.0	-53.91	2.62	27.30	-29.23	-13	-16.23	Vertical
2130.0	-47.99	2.87	27.62	-23.24	-13	-10.24	Vertical
2130.0	-47.95	2.87	27.62	-23.20	-13	-10.20	Horizontal
174.6	-63.97	1.31	17.80	-47.48	-13	-34.48	Vertical
122.9	-50.03	1.57	15.53	-36.07	-13	-23.07	Horizontal
Test Results for High Channel 711MHz							
1422.0	-54.50	2.62	27.30	-29.82	-13	-16.82	Horizontal
1422.0	-43.7	2.62	27.30	-19.17	-13	-6.17	Vertical
2133.0	-50.78	2.87	27.62	-26.03	-13	-13.03	Vertical
2133.0	-53.12	2.87	27.62	-28.37	-13	-15.37	Horizontal
258.9	-67.44	1.63	16.48	-52.59	-13	-39.59	Vertical
213.9	-52.15	1.53	15.84	-37.84	-13	-24.84	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.7 LTE BAND 66

QPSK EIRP POWER FOR LTE BAND 66 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-56.90	5.23	35.81	-26.32	-13	-13.32	Horizontal
3421.4	-50.76	5.23	35.81	-20.18	-13	-7.18	Vertical
5132.1	-53.42	5.67	36.85	-22.24	-13	-9.24	Vertical
5132.1	-55.51	5.67	36.85	-24.33	-13	-11.33	Horizontal
233.6	-57.85	1.77	17.99	-41.63	-13	-28.63	Vertical
273.6	-64.59	1.74	17.54	-48.79	-13	-35.79	Horizontal
Test Results For Mid Channel 710MHz							
3490.0	-49.96	5.23	35.82	-19.37	-13	-6.37	Horizontal
3490.0	-52.90	5.23	35.82	-22.31	-13	-9.31	Vertical
5235.0	-52.00	5.67	36.85	-20.82	-13	-7.82	Vertical
5235.0	-54.55	5.67	36.85	-23.37	-13	-10.37	Horizontal
131.1	-55.13	1.55	16.69	-39.99	-13	-26.99	Vertical
260.9	-56.04	1.74	15.39	-42.39	-13	-29.39	Horizontal
Test Results for High Channel 713.5MHz							
3558.6	-48.89	5.24	35.83	-18.30	-13	-5.30	Horizontal
3558.6	-49.16	5.24	35.83	-18.57	-13	-5.57	Vertical
5337.9	-52.06	5.68	36.87	-20.87	-13	-7.87	Vertical
5337.9	-56.84	5.68	36.87	-25.65	-13	-12.65	Horizontal
164.6	-61.91	1.58	17.90	-45.59	-13	-32.59	Vertical
276.0	-65.76	1.52	15.18	-52.10	-13	-39.10	Horizontal

QPSK EIRP POWER FOR LTE BAND 66 (20MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-47.51	5.23	35.82	-16.92	-13	-3.92	Horizontal
3440.0	-49.54	5.23	35.82	-18.95	-13	-5.95	Vertical
5160.0	-48.96	5.67	36.86	-17.77	-13	-4.77	Vertical
5160.0	-48.36	5.67	36.86	-17.17	-13	-4.17	Horizontal
91.9	-54.33	1.52	16.38	-39.47	-13	-26.47	Vertical
274.5	-51.81	1.73	15.06	-38.48	-13	-25.48	Horizontal
Test Results for Mid Channel 710MHz							
3490.0	-49.04	5.23	35.82	-18.45	-13	-5.45	Horizontal
3490.0	-55.06	5.23	35.82	-24.47	-13	-11.47	Vertical
5235.0	-50.28	5.67	36.85	-19.10	-13	-6.10	Vertical
5235.0	-51.99	5.67	36.85	-20.81	-13	-7.81	Horizontal
85.6	-65.83	1.32	16.13	-51.02	-13	-38.02	Vertical
195.8	-56.04	1.79	17.76	-40.07	-13	-27.07	Horizontal
Test Results for High Channel 711MHz							
3540.0	-47.99	5.24	35.83	-17.40	-13	-4.40	Horizontal
3540.0	-50.82	5.24	35.83	-20.23	-13	-7.23	Vertical
5310.0	-56.14	5.70	36.88	-24.96	-13	-11.96	Vertical
5310.0	-55.92	5.70	36.88	-24.74	-13	-11.74	Horizontal
265.5	-65.81	1.66	17.49	-49.98	-13	-36.98	Vertical
161.2	-56.73	1.76	15.83	-42.66	-13	-29.66	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- ☐ Temp. = -30° to $+50^{\circ}\text{C}$
- ☐ Voltage = low voltage, DC 3.4V, Normal, DC 3.7V and High voltage, DC 4.4V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- ☐ LTE Band 2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17
LTE Band 66

RESULTS

See the following pages.

10.1 LTE BAND 2

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1880	-13.18	-0.007011	2.5
3.7	1880	-12.77	-0.006793	2.5
4.4	1880	-9.51	-0.005059	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	-12.14	-0.006457	2.5
Extreme (50C)	1880	-10.80	-0.005745	2.5
Extreme (40C)	1880	-15.74	-0.008372	2.5
Extreme (30C)	1880	-9.59	-0.005101	2.5
Extreme (10C)	1880	-16.25	-0.008644	2.5
Extreme (0C)	1880	-9.52	-0.005064	2.5
Extreme (-10C)	1880	-16.07	-0.008548	2.5
Extreme (-20C)	1880	-12.93	-0.006878	2.5
Extreme (-30C)	1880	-9.04	-0.004809	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1880	-6.96	-0.003702	2.5
3.7	1880	-4.24	-0.002255	2.5
4.4	1880	-2.22	-0.001181	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	-3.92	-0.002085	2.5
Extreme (50C)	1880	-9.13	-0.004856	2.5
Extreme (40C)	1880	-4.65	-0.002473	2.5
Extreme (30C)	1880	-2.64	-0.001404	2.5
Extreme (10C)	1880	-10.91	-0.005803	2.5
Extreme (0C)	1880	-3.27	-0.001739	2.5
Extreme (-10C)	1880	-11.06	-0.005883	2.5
Extreme (-20C)	1880	-8.48	-0.004511	2.5
Extreme (-30C)	1880	-4.15	-0.002207	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1732.5	-4.19	-0.002418	2.5
3.7	1732.5	-7.45	-0.004300	2.5
4.4	1732.5	-5.57	-0.003215	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	-5.39	-0.003111	2.5
Extreme (50C)	1732.5	-5.19	-0.002996	2.5
Extreme (40C)	1732.5	-2.57	-0.001483	2.5
Extreme (30C)	1732.5	-0.24	-0.000139	2.5
Extreme (10C)	1732.5	1.54	0.000889	2.5
Extreme (0C)	1732.5	-1.64	-0.000947	2.5
Extreme (-10C)	1732.5	-1.26	-0.000727	2.5
Extreme (-20C)	1732.5	-3.18	-0.001835	2.5
Extreme (-30C)	1732.5	-7.19	-0.004150	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1732.5	-6.49	-0.003746	2.5
3.7	1732.5	-2.59	-0.001495	2.5
4.4	1732.5	-4.72	-0.002724	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	-10.16	-0.005864	2.5
Extreme (50C)	1732.5	-10.38	-0.005991	2.5
Extreme (40C)	1732.5	-7.28	-0.004202	2.5
Extreme (30C)	1732.5	-7.46	-0.004306	2.5
Extreme (10C)	1732.5	-5.79	-0.003342	2.5
Extreme (0C)	1732.5	-8.02	-0.004629	2.5
Extreme (-10C)	1732.5	-9.46	-0.005460	2.5
Extreme (-20C)	1732.5	-4.73	-0.002730	2.5
Extreme (-30C)	1732.5	-8.16	-0.004710	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	836.5	-2.88	-0.003443	2.5
3.7	836.5	-4.39	-0.005248	2.5
4.4	836.5	0.59	0.000705	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	-6.16	-0.007364	2.5
Extreme (50C)	836.5	1.27	0.001518	2.5
Extreme (40C)	836.5	-4.99	-0.005965	2.5
Extreme (30C)	836.5	-1.28	-0.001530	2.5
Extreme (10C)	836.5	3.08	0.003682	2.5
Extreme (0C)	836.5	0.43	0.000514	2.5
Extreme (-10C)	836.5	-4.23	-0.005057	2.5
Extreme (-20C)	836.5	-1.73	-0.002068	2.5
Extreme (-30C)	836.5	-6.32	-0.007555	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	836.5	-7.1	-0.008488	2.5
3.7	836.5	-7.32	-0.008751	2.5
4.4	836.5	-1.75	-0.002092	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	-1.47	-0.001757	2.5
Extreme (50C)	836.5	-6.60	-0.007890	2.5
Extreme (40C)	836.5	-5.77	-0.006898	2.5
Extreme (30C)	836.5	-7.32	-0.008751	2.5
Extreme (10C)	836.5	-11.21	-0.013401	2.5
Extreme (0C)	836.5	-2.76	-0.003299	2.5
Extreme (-10C)	836.5	-1.40	-0.001674	2.5
Extreme (-20C)	836.5	-10.22	-0.012218	2.5
Extreme (-30C)	836.5	-6.33	-0.007567	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	2535	36.89	0.014552	2.5
3.7	2535	37.71	0.014876	2.5
4.4	2535	37.01	0.014600	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	36.41	0.014363	2.5
Extreme (50C)	2535	35.38	0.013957	2.5
Extreme (40C)	2535	42.35	0.016706	2.5
Extreme (30C)	2535	33.22	0.013105	2.5
Extreme (10C)	2535	40.81	0.016099	2.5
Extreme (0C)	2535	36.23	0.014292	2.5
Extreme (-10C)	2535	36.34	0.014335	2.5
Extreme (-20C)	2535	40.64	0.016032	2.5
Extreme (-30C)	2535	34.24	0.013507	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	2535	-23.21	-0.009156	2.5
3.7	2535	-21.94	-0.008655	2.5
4.4	2535	-24.44	-0.009641	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	-23.42	-0.009239	2.5
Extreme (50C)	2535	-20.09	-0.007925	2.5
Extreme (40C)	2535	-20.50	-0.008087	2.5
Extreme (30C)	2535	-23.35	-0.009211	2.5
Extreme (10C)	2535	-18.47	-0.007286	2.5
Extreme (0C)	2535	-25.53	-0.010071	2.5
Extreme (-10C)	2535	-23.00	-0.009073	2.5
Extreme (-20C)	2535	-27.00	-0.010651	2.5
Extreme (-30C)	2535	-24.79	-0.009779	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	707.5	-7.52	-0.010629	2.5
3.7	707.5	-5.85	-0.008269	2.5
4.4	707.5	-6.00	-0.008481	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	-8.23	-0.011633	2.5
Extreme (50C)	707.5	-8.15	-0.011519	2.5
Extreme (40C)	707.5	-1.79	-0.002530	2.5
Extreme (30C)	707.5	-4.98	-0.007039	2.5
Extreme (10C)	707.5	-2.78	-0.003929	2.5
Extreme (0C)	707.5	-7.10	-0.010035	2.5
Extreme (-10C)	707.5	-6.34	-0.008961	2.5
Extreme (-20C)	707.5	-9.10	-0.012862	2.5
Extreme (-30C)	707.5	-5.86	-0.008283	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 16QAM, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	707.5	-7.09	-0.010021	2.5
3.7	707.5	-4.37	-0.006177	2.5
4.4	707.5	-5.78	-0.008170	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	-3.43	-0.004848	2.5
Extreme (50C)	707.5	-3.26	-0.004608	2.5
Extreme (40C)	707.5	-5.08	-0.007180	2.5
Extreme (30C)	707.5	-6.82	-0.009640	2.5
Extreme (10C)	707.5	-3.05	-0.004311	2.5
Extreme (0C)	707.5	-1.53	-0.002163	2.5
Extreme (-10C)	707.5	-5.32	-0.007519	2.5
Extreme (-20C)	707.5	-8.66	-0.012240	2.5
Extreme (-30C)	707.5	-10.36	-0.014643	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 17

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	710.0	-9.15	-0.012887	2.5
3.7	710.0	-3.98	-0.005606	2.5
4.4	710.0	-10.56	-0.014873	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	710.0	-8.94	-0.012592	2.5
Extreme (50C)	710.0	-8.55	-0.012042	2.5
Extreme (40C)	710.0	-4.80	-0.006761	2.5
Extreme (30C)	710.0	-4.88	-0.006873	2.5
Extreme (10C)	710.0	-7.70	-0.010845	2.5
Extreme (0C)	710.0	-6.24	-0.008789	2.5
Extreme (-10C)	710.0	-3.80	-0.005352	2.5
Extreme (-20C)	710.0	-12.09	-0.017028	2.5
Extreme (-30C)	710.0	-4.94	-0.006958	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 16QAM, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.4	710.0	-7.35	-0.010352	2.5
3.7	710.0	-4.44	-0.006254	2.5
4.4	710.0	-10.45	-0.014718	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	710.0	-9.74	-0.013718	2.5
Extreme (50C)	710.0	-3.70	-0.005211	2.5
Extreme (40C)	710.0	-7.94	-0.011183	2.5
Extreme (30C)	710.0	-10.72	-0.015099	2.5
Extreme (10C)	710.0	-7.66	-0.010789	2.5
Extreme (0C)	710.0	-7.24	-0.010197	2.5
Extreme (-10C)	710.0	-11.05	-0.015563	2.5
Extreme (-20C)	710.0	-3.12	-0.004394	2.5
Extreme (-30C)	710.0	-5.81	-0.008183	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.7 LTE BAND 66

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 QPSK, (CH 132322 RB size 50 RB Offset 0 20MHz BANDWIDTH)				
3.4	1745	-0.31	-0.000178	2.5
3.7	1745	4.58	0.002625	2.5
4.4	1745	1.87	0.001072	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 QPSK, (CH 132322 RB size 50 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1745	2.02	0.001158	2.5
Extreme (50C)	1745	4.08	0.002338	2.5
Extreme (40C)	1745	2.81	0.001610	2.5
Extreme (30C)	1745	2.18	0.001249	2.5
Extreme (10C)	1745	4.16	0.002384	2.5
Extreme (0C)	1745	-3.63	-0.002080	2.5
Extreme (-10C)	1745	-2.06	-0.001181	2.5
Extreme (-20C)	1745	-3.21	-0.001840	2.5
Extreme (-30C)	1745	1.21	0.000693	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 16QAM, (CH 132322 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.4	1745	1.45	0.000831	2.5
3.7	1745	-0.57	-0.000327	2.5
4.4	1745	3.24	0.001857	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 66 QPSK, (CH 132322 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1745	5.37	0.003077	2.5
Extreme (50C)	1745	0.04	0.000023	2.5
Extreme (40C)	1745	3.98	0.002281	2.5
Extreme (30C)	1745	1.49	0.000854	2.5
Extreme (10C)	1745	-0.15	-0.000086	2.5
Extreme (0C)	1745	-0.33	-0.000189	2.5
Extreme (-10C)	1745	1.14	0.000653	2.5
Extreme (-20C)	1745	1.21	0.000693	2.5
Extreme (-30C)	1745	3.49	0.002000	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

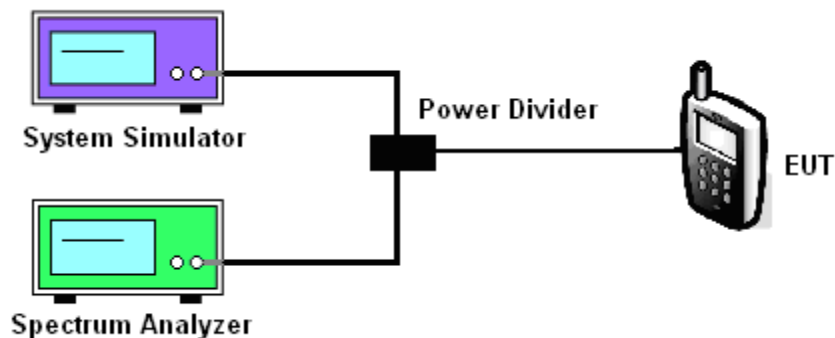

MODES TESTED

- ☒ LTE Band 2/4/5/7/12/17/66
☐

Test data reference attachment.

----END OF REPORT----