

EMC Test Report

regarding

USA: CFR Title 47, Part 15.247/15.109 (Emissions)
Canada: IC RSS-247/GENe (Emissions)

for



HUBB

Category: Vehicular DTS Transceiver

Judgments:

FCC 15.247, ISED RSS-247v2 Compliant

Testing Completed: June 16, 2023



Prepared for:

Sensata Technologies

Unit 11, Antrim Technology Park, Antrim Northern Ireland BT41 1QS United Kingdom

Phone: +44 28 9448 2181, Fax: +44 28 9446 8440

Contact: Michael Maingot, mmaingot@sensata.com

Data Rec./Rev. by: John Nantz
John Nantz
Rpt. Prep./Rev. by: John Nantz
John Nantz

Rpt. Auth. by: Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE
Date of Issue: June 26, 2023

Revision History

Rev. No.	Date	Details	Revised By
r0	June 26, 2023	Initial Release.	J. Nantz
r1	July 15, 2023	Clarify manuf. settings.	J. Nantz

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	4
1.1 Laboratory Authorization	4
1.2 Report Retention	4
1.3 Subcontracted Testing	4
1.4 Test Data	4
1.5 Limitation of Results	4
1.6 Copyright	4
1.7 Endorsements	4
1.8 Test Location	5
1.9 Traceability and Equipment Used	5
2 Test Specifications and Procedures	6
2.1 Test Specification and General Procedures	6
3 Configuration and Identification of the Equipment Under Test	7
3.1 Description and Declarations	7
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	8
3.1.4 Test Samples	8
3.1.5 Functional Exerciser	8
3.1.6 Modifications Made	9
3.1.7 Production Intent	9
3.1.8 Declared Exemptions and Additional Product Notes	9
4 Emissions	10
4.1 General Test Procedures	10
4.1.1 Radiated Test Setup and Procedures	10
4.1.2 Conducted Emissions Test Setup and Procedures	12
4.1.3 Power Supply Variation	12
4.2 Intentional Emissions	13
4.2.1 Duty and Transmission Cycle, Pulsed Operation	13
4.2.2 Fundamental Emission Bandwidth	14
4.2.3 Effective Isotropic Radiated Power	17
4.2.4 Power Spectral Density	18
4.3 Unintentional Emissions	21
4.3.1 Restricted Band Transmit Chain Spurious Emissions	21
4.3.2 OOB Transmit Chain Spurious Emissions	25
5 Measurement Uncertainty and Accreditation Documents	26

List of Tables

1	Test Site List.	5
2	Equipment List.	5
3	EUT Declarations.	7
4	Pulsed Emission Characteristics (Duty Cycle).	13
5	Intentional Emission Bandwidth.	14
6	Radiated Power Results.	17
7	Power Spectral Density Results.	18
8	Transmit Chain Spurious Emissions.	21
8	Transmit Chain Spurious Emissions.	22
8	Transmit Chain Spurious Emissions.	23
8	Transmit Chain Spurious Emissions.	24
9	Measurement Uncertainty.	26

List of Figures

1	Photos of EUT.	7
2	EUT Test Configuration Diagram.	8
3	Radiated Emissions Diagram of the EUT.	10
4	Radiated Emissions Test Setup Photograph(s).	11
5	Conducted RF Test Setup Photograph(s).	12
6	Example Pulsed Emission Characteristics (Duty Cycle).	13
7	Example Intentional Emission Bandwidth Plots.	15
7	Example Intentional Emission Bandwidth Plots.	16
8	Power Spectral Density Plots.	19
8	Power Spectral Density Plots.	20
9	Worst Case Transmitter OOB Emissions Measured.	25
10	Accreditation Documents	26

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until June 2033.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSC

1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
EMI Receiver	R & S / ESW26	101313	RSESW2601	RS / October-2023
Spectrum Analyzer	R & S / FSV30	101660	RSFSV30001	RS / Apr-2024
Spec. Analyzer 70GHz	Anritsu / MS2760A	1705006	ANMS2760A1	ANR / Sept-2023
Pk/Avg Pwr Mtr	BK Prec. / RFP3008	620C22101	BKPM300801	BK / Mar-2024
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2023
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2023
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2024
K-Band Horn	JEF / NRL Std.	001	HRNK01	AHD / Jul-2024
Power Meter	R & S / NRP50S	101087	RSNRP50	RS / Nov-2024

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Sensata Technologies is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Sensata Technologies HUBB for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247/15.109
Canada	ISED Canada	IC RSS-247/GENe

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2013	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
KDB 558074 D01 v05r02	"GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES "
KDB 662911 D01v02r01	"Emissions Testing of Transmitters with Multiple Outputs in the Same Band"
KDB 662911 D02 v01	"MIMO with Cross-Polarized Antenna"
TP0102RA	"AHD Internal Document TP0102 - Radiated Emissions Test Procedure"

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The equipment under test is a vehicle wireless gateway module containing WLAN and THREAD DTS transceivers and a 433.92 MHz receiver. The EUT is approximately 16 x 12 x 3 cm in dimension, and is depicted in Figure 1. It is powered by 13.5 VDC nominal vehicular power system. The EUT is used in a motor vehicle as a gateway module to receive TPM sensor data and communicate this data via WLAN and/or THREAD to other on vehicle modules. Table 3 outlines provider declared EUT specifications.

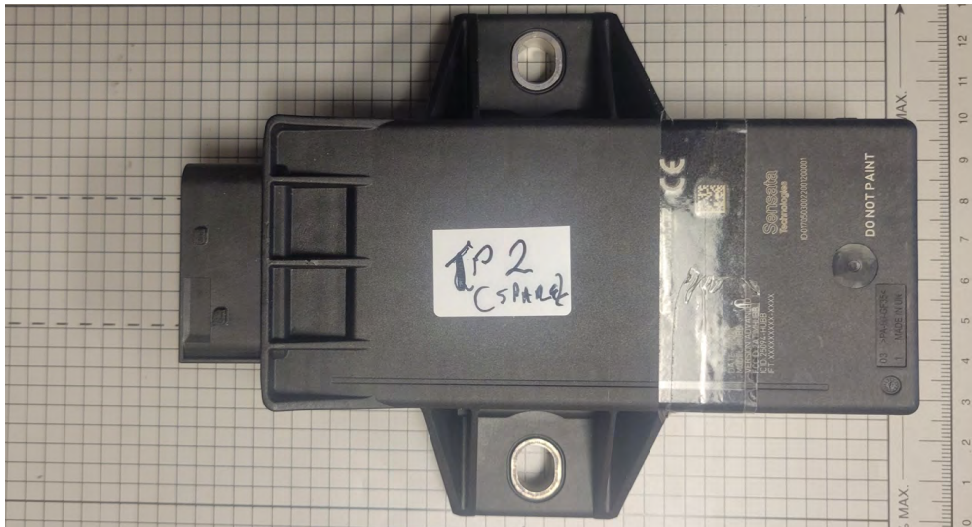


Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations	
Equipment Type:	Vehicular DTS Transceiver
Country of Origin:	Not Declared
Nominal Supply:	13.5 VDC nominal
Oper. Temp Range:	-40°C to +85°C
Frequency Range:	RF: 433.92 MHz, WLAN/THREAD: (2400 – 2483.5 MHz)
Antenna Dimension:	Integral
Antenna Type:	PCB Trace (PIFA)
Antenna Gain:	WLAN: 3.8 dBi max. THREAD: 4.4 dBi max.
Number of Channels:	WLAN g/n20: (1-11), THREAD: (11-26)
Channel Spacing:	5 MHz
Alignment Range:	Not Declared
Type of Modulation:	WLAN: 802.11 g/n(20)SISO, THREAD: OQPSK
United States	
FCC ID Number:	2ATIMHUBB
Classification:	DTS
Canada	
IC Number:	25094-HUBB
Classification:	Other

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

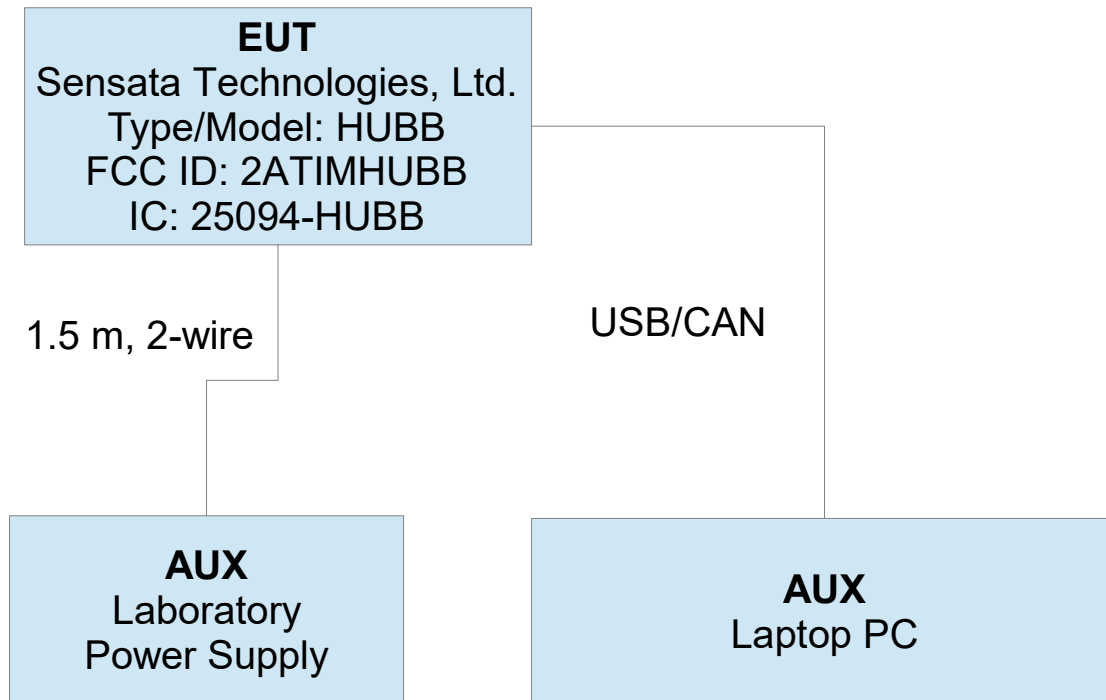


Figure 2: EUT Test Configuration Diagram.

3.1.2 Modes of Operation

The EUT employs a 2.4 GHz WLAN 11g/n(20) DTS transceiver and a 2.4 GHz THREAD DTS transceiver, along with a 433.92 MHz receiver for Tire Pressure Monitoring (TPM) signals. The WLAN radio includes two antenna ports (only one of which is used) and the THREAD thread radio has only a single port. All DTS antennas are PCB traces - the 433.92 MHz receiver employs a metal frame antenna.

3.1.3 Variants

There is only a single variant of the EUT, as tested.

3.1.4 Test Samples

Two samples of the EUT were provided in total, one normal (production ready) sample (SN: TP2) with integral antennas and one with the WLAN and THREAD antennas replaced by coaxial cable connections (SN:COND1). Each sample provided was capable of receiving radio instructions via CAN + USB interface to a personal computer. The manufacturer provided software tools and firmware needed to place the EUT radio into test and normal operating modes.

3.1.5 Functional Exerciser

Normal functionality was confirmed by measurement of transmitted signals.

3.1.6 Modifications Made

In pretesting it was determined that the output power settings for the WLAN radio must be set to a value of 60 and the THREAD radio power setting must be adjusted to 8 in order to meet band-edge intermodulation requirements. These power settings were selected by the manufacturer for final testing. The manufacturer also selected to firmware deactivate the WLAN Loop antenna. (The WLAN radio employs 2 PCB trace antennas (PIFA and Loop) for diversity which are software selectable from within the chipset).

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

The EUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and IC correspondence on ICES-003). UHF Receiver emissions for this product are addressed separately by the manufacturer under SDoC procedures.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

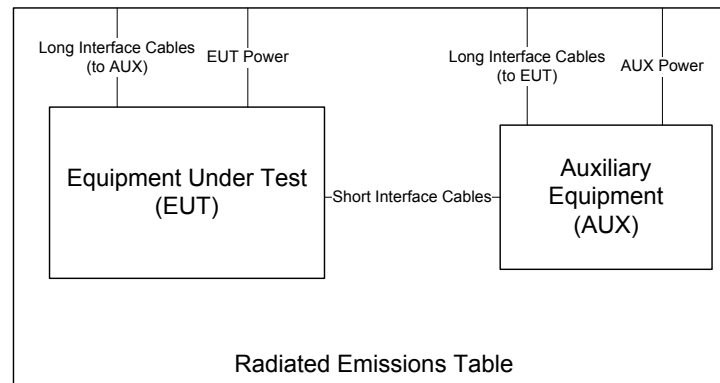


Figure 3: Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISED SPR-002 section 5.2 are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4×5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to $\text{dB}\mu\text{V}/\text{m}$ at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(\text{dBm}) = E_{3m}(\text{dB}\mu\text{V}/\text{m}) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.



Figure 4: Radiated Emissions Test Setup Photograph(s).

4.1.2 Conducted Emissions Test Setup and Procedures

Transmit Antenna Port Conducted Emissions At least one sample EUT supplied for testing was provided with a 50Ω antenna port. Conducted transmit chain emissions measurements (where applicable) are made by connecting the EUT antenna port directly to the test receiver port. Photographs of the test setup employed are depicted in Figure 5.



Figure 5: Conducted RF Test Setup Photograph(s).

4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

4.2 Intentional Emissions

4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 4: Pulsed Emission Characteristics (Duty Cycle).

Test Date: 1-Jun-23
Test Engineer: John Nantz
EUT: Sensata HUBB
Meas. Distance: Conducted

Test Mode Pulsed Operation / Average Measurement Duty Cycle								
R0	Mode	Data Rate Mbps	Voltage V	Oper. Freq MHz	Pulse Length ms	Pulse Period ms	Duty Cycle %	Power Duty Correction dB
R1	802.11g SISO	6.0	13.4	2437	2.035	2.048	99	0.0
R2	802.11n(20) SISO	7.2	13.4	2437	1.892	1.907	99	0.0
R3	THREAD	0.25	13.4	2440	100.000	100.000	100	0.0
#	C1	C2	C3	C4	C5	C6	C7	C8

* Duty Cycle is measured in line with DTS guidance 558074 D01 v5 r02 section 6(b) for averaging only over full-power transmission pulses.

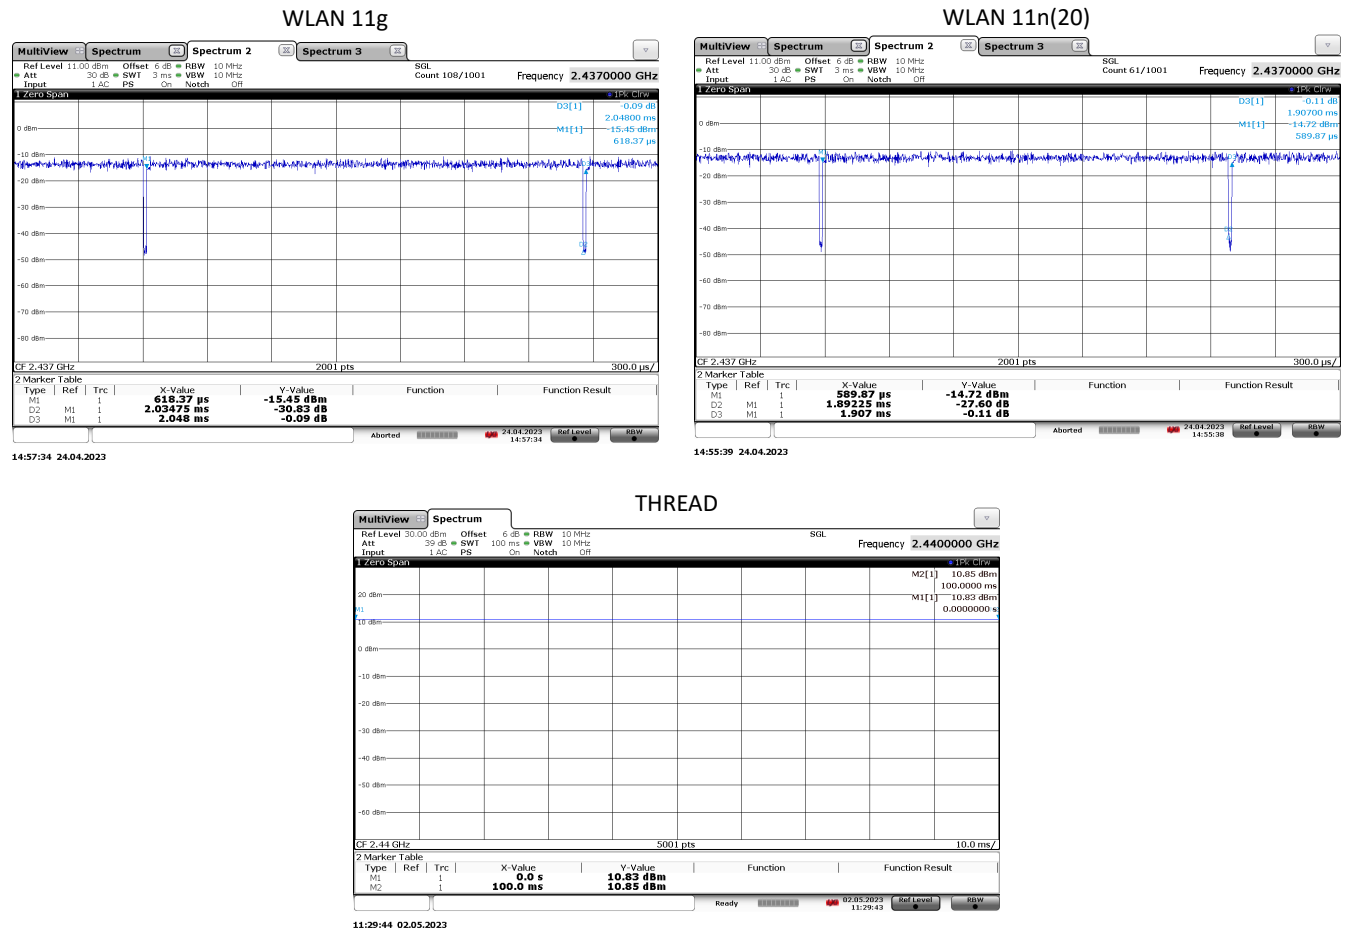


Figure 6: Example Pulsed Emission Characteristics (Duty Cycle).

4.2.2 Fundamental Emission Bandwidth


Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 6 dB bandwidth is measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 5. Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 7.

Table 5: Intentional Emission Bandwidth.

Test Date: 1-Jun-23
Test Engineer: John Nantz
EUT: Sensata HUBB
Meas. Distance: Conducted


Occupied Bandwidth								
Transmit Mode	Data Rate (Mbps)	Path A / B	Voltage (V)	Oper. Freq (MHz)	6 dB BW (MHz)	6 dB BW Limit (MHz)	99% OBW (MHz)	Pass/Fail
802.11G SISO	6.0	A	13.4	2412.0	13.81	0.50	16.30	Pass
				2437.0	14.11	0.50	16.48	Pass
				2462.0	13.89	0.50	16.34	Pass
802.11n(20) SISO	7.2	A	13.4	2412.0	13.77	0.50	17.42	Pass
				2437.0	13.63	0.50	17.53	Pass
				2462.0	13.98	0.50	17.46	Pass
Thread	0.25	A	13.4	2405.0	1.67	0.50	2.25	Pass
				2440.0	1.67	0.50	2.25	Pass
				2480.0	1.65	0.50	2.26	Pass
C1	C2	C3	C4	C5	C6	C7	C8	C9

WLAN 11g

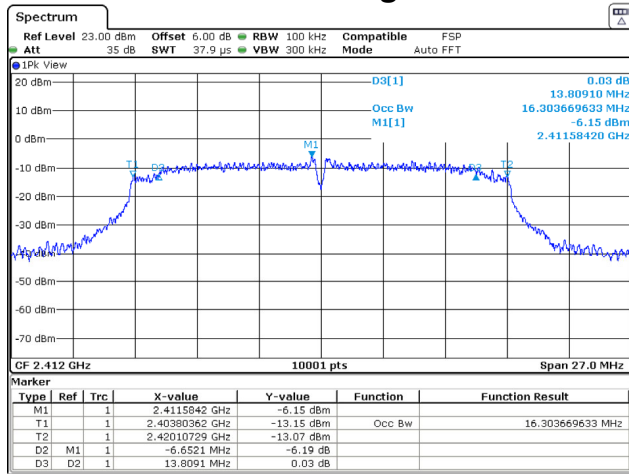


Date: 9 JUN 2023 15:20:10


WLAN 11n(20)

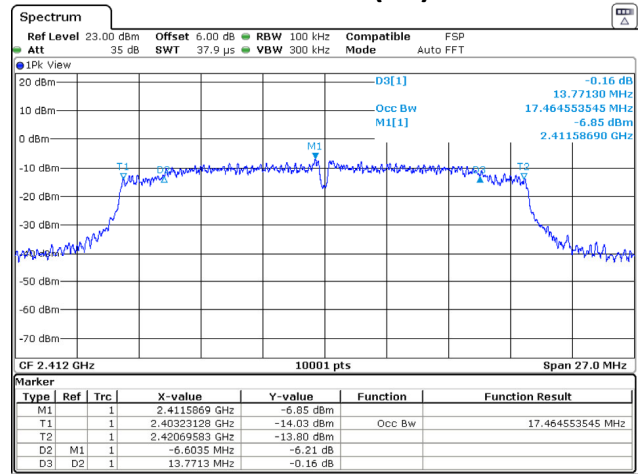


Date: 9 JUN 2023 15:38:49

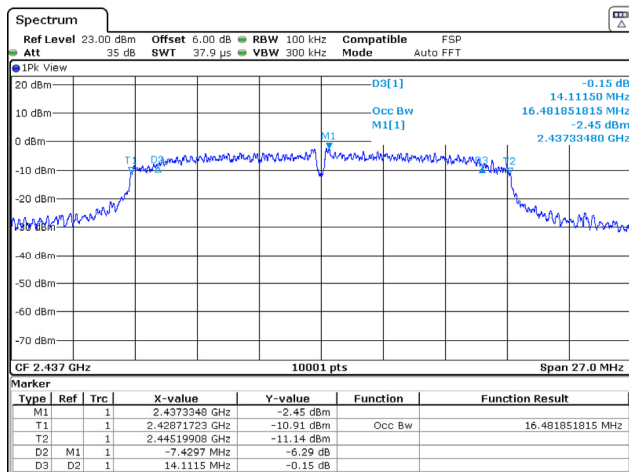


Date: 9 JUN 2023 15:23:05

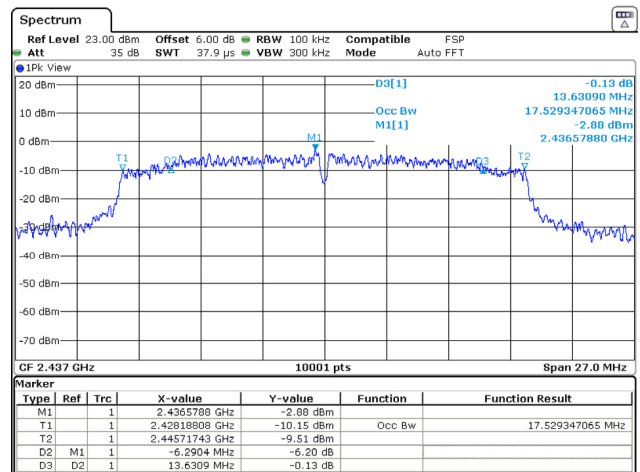

Date: 9 JUN 2023 15:35:08

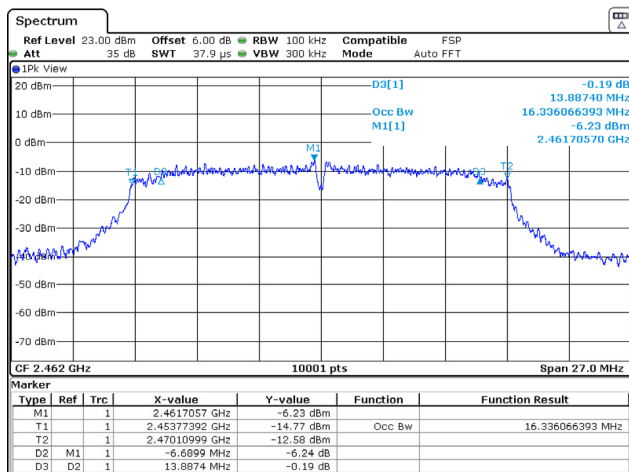


Date: 9 JUN 2023 15:28:16

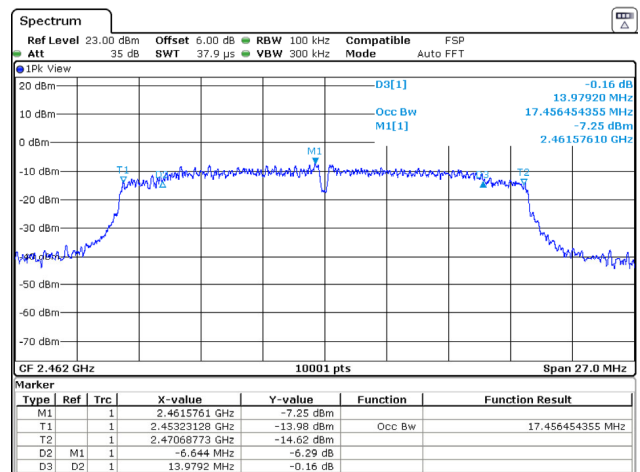


Date: 9 JUN 2023 15:31:37

Figure 7(a): Example Intentional Emission Bandwidth Plots.


THREAD

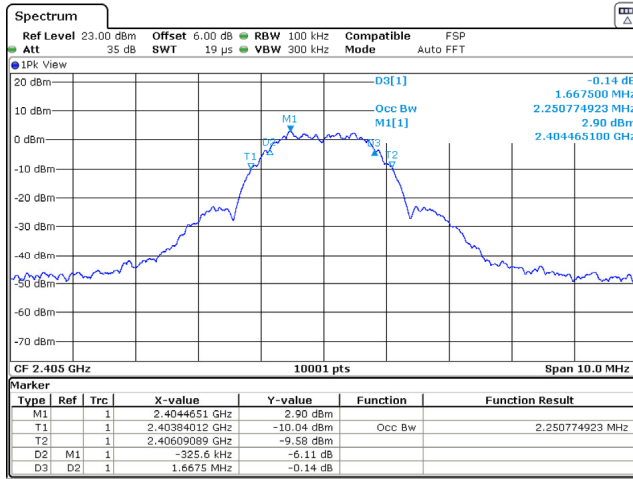

Date: 9 JUN 2023 15:48:49

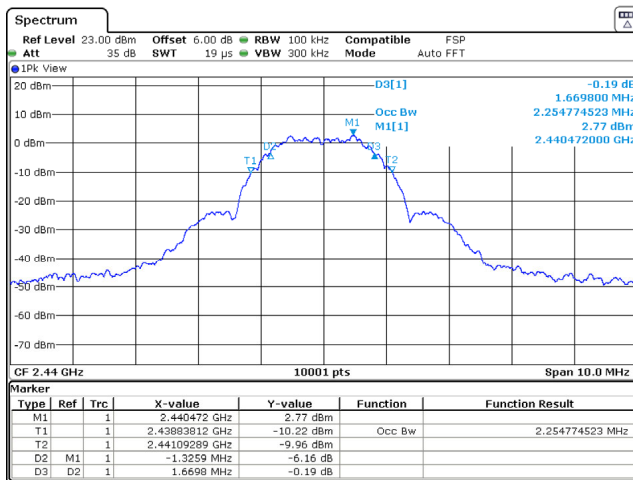

Date: 9 JUN 2023 15:51:23

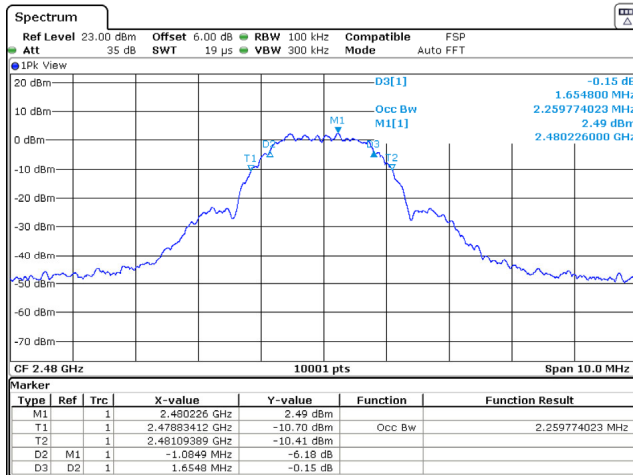

Date: 9 JUN 2023 15:52:36

Figure 7(b): Example Intentional Emission Bandwidth Plots.

4.2.3 Effective Isotropic Radiated Power

The EUT’s radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. The results of this testing are summarized in Table 6.

Table 6: Radiated Power Results.

Test Date: 9-Jun-23
Test Engineer: John Nantz
EUT: Sensata HUBB
Meas. Distance: Conducted

Fundamental Power													
#	Mode	Channel	Freq. MHz	Path A / B	Pout (Pk) dBm	Pout (Avg) dBm	Duty dB	Pout(Avg) + Duty dBm	Ant Gain dBi	EIRP (Avg) dBm	EIRP (Avg) Limit dBm	Pass dB	Comments
R1	802.11G SISO	1	2412.0	A	15.8	6.7	0.0	6.7	3.8	10.5	36.0	25.5	
R2		6	2437.0		16.8	10.5	0.0	10.5	3.8	14.3	36.0	21.7	
R3		11	2462.0		15.9	6.6	0.0	6.6	3.8	10.4	36.0	25.6	
R4	802.11n(20) SISO	1	2412.0	A	15.7	6.3	0.0	6.3	3.8	10.1	36.0	25.9	
R5		6	2437.0		16.8	10.1	0.0	10.1	3.8	13.9	36.0	22.1	
R6		11	2462.0		15.7	6.2	0.0	6.2	3.8	10.0	36.0	26.0	
R7	Thread	11	2405.0	A	7.2	6.9		6.9	4.4	11.3	36.0	24.7	
R8		18	2440.0		7.0	6.7		6.7	4.4	11.1	36.0	24.9	
R9		26	2480.0		6.6	6.4		6.4	4.4	10.8	36.0	25.2	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13

ROW COLUMN

- All C6 Measured conducted from radio conducted sample. Avg Power measured per DTS Guidance 558074 D01 v5 r02 Section 8.3.2.2 / ANSI C63.10 11.9.2.3.1 (AVGPM)
- All C5 Measured conducted from radio conducted sample. Pk Power measured per DTS Guidance 558074 D01 v5 r02 Section 8.3.1.3 / ANSI C63.10 11.9.1.3 (PKPM1)
- All C9 Maximum Antenna Gain across Band. For MIMO, Gain = Gain_dBi + 10*log10(N), N = 2 antennas.

4.2.4 Power Spectral Density


For this test, the EUT was attached directly to the test receiver. Following FCC DTS measurement procedures, the emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. The results of this testing are summarized in Table 7. Plots showing how these measurements were made are depicted in Figure 8.

Table 7: Power Spectral Density Results.


Frequency Range 2400-2483.5	Detector Pk	IF Bandwidth 3 kHz	Video Bandwidth 10 kHz	Test Date: 8-Jun-23
				Test Engineer: John Nantz
				EUT: Sensata HUBB
				Meas. Distance: Conducted

Power Spectral Density										
R0	Mode	Path A / B	Channel	Frequency (MHz)	Ant. Used	PK PSDcond (meas) (dBm/3kHz)	Duty dB	PSDcond (calc) (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass By (dB)
R1	802.11G SISO	A	1	2412	Cond.	-15.0	0.0	-15.0	8.00	23.0
R2			6	2437	Cond.	-10.8	0.0	-10.8	8.00	18.8
R3			11	2462	Cond.	-15.1	0.0	-15.1	8.00	23.1
R4	802.11n(20) SISO	A	1	2412.0	Cond.	-15.9	0.0	-15.9	8.00	23.9
R5			6	2437.0	Cond.	-12.3	0.0	-12.3	8.00	20.3
R6			11	2462.0	Cond.	-16.1	0.0	-16.1	8.00	24.1
R7	Thread	A	11	2405.0	Cond.	-8.3	0.0	-8.3	8.00	16.3
R8			18	2440.0	Cond.	-8.6	0.0	-8.6	8.00	16.6
R9			26	2480.0	Cond.	-9.0	0.0	-9.0	8.00	17.0
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10


ROW COLUMN
 All C6 PSD measured conducted following DTS guidance 558074 D01 v5 r02 8.4 / ANSI C63.10 11.10 PKPSD procedure.
 All C7 Not applicable for PKPSD measurements

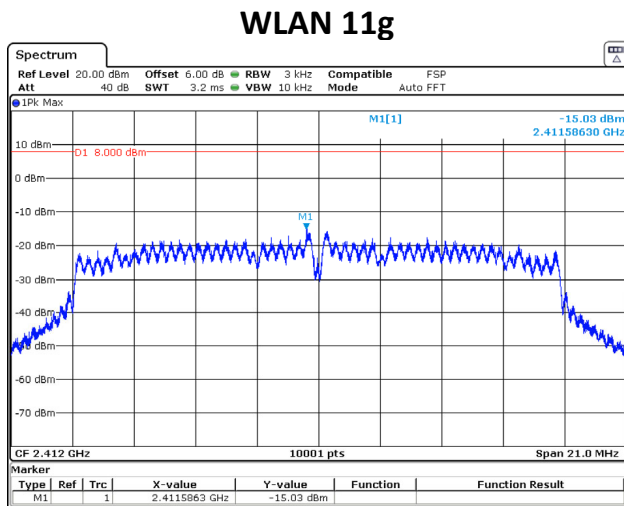


Date: 14 JUN 2023 10:14:08

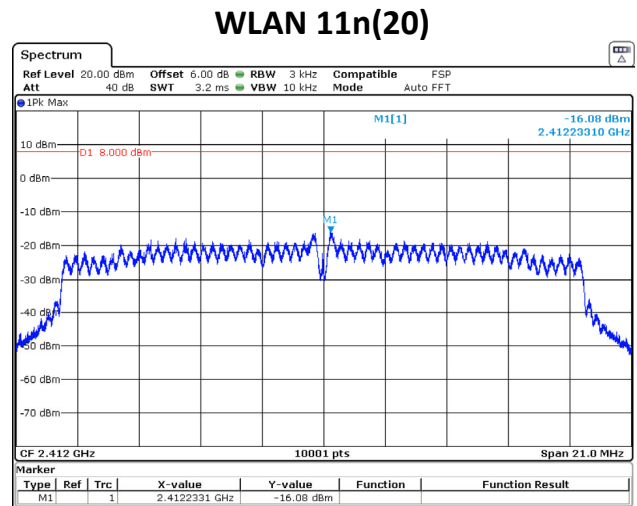


Date: 14 JUN 2023 10:21:17

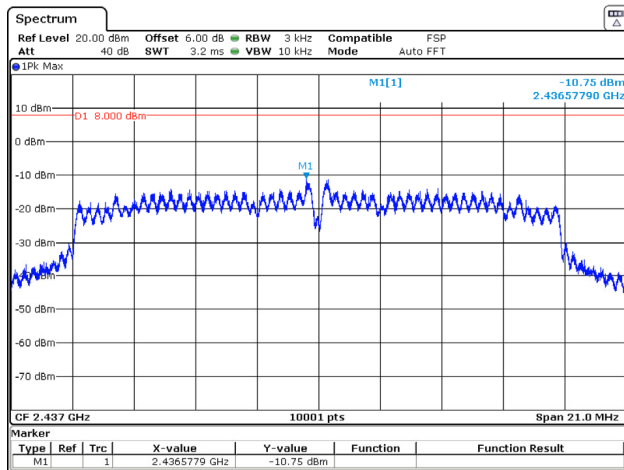


Date: 14 JUN 2023 10:15:40

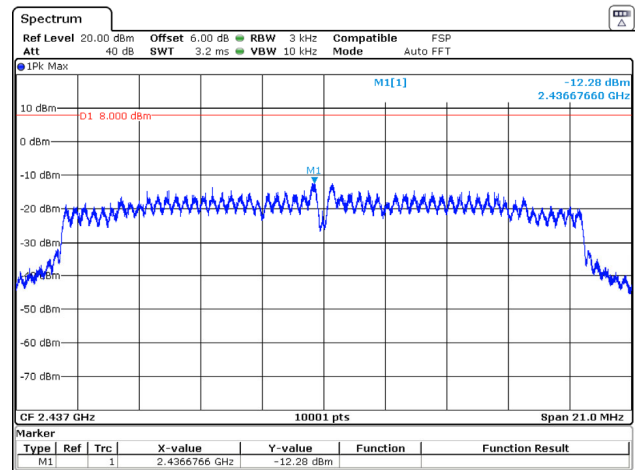

Date: 14 JUN 2023 10:20:04

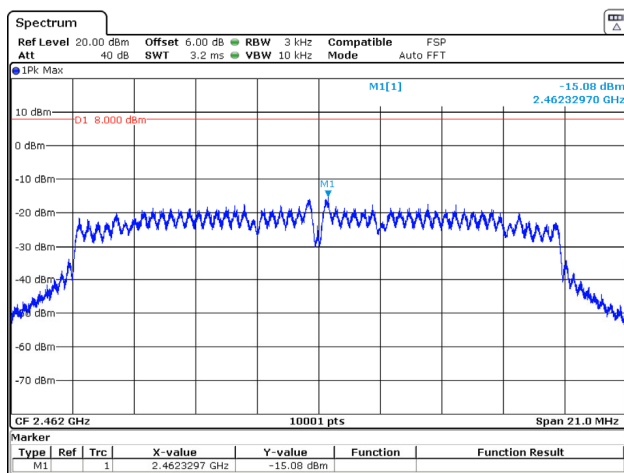


Date: 14 JUN 2023 10:17:46

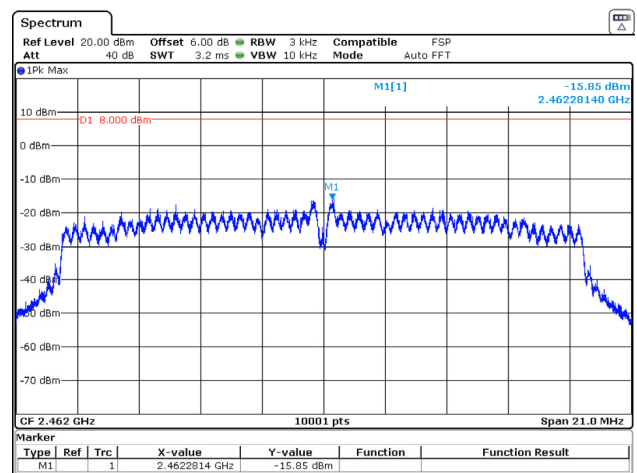


Date: 14 JUN 2023 10:19:05

Figure 8(a): Power Spectral Density Plots.


THREAD

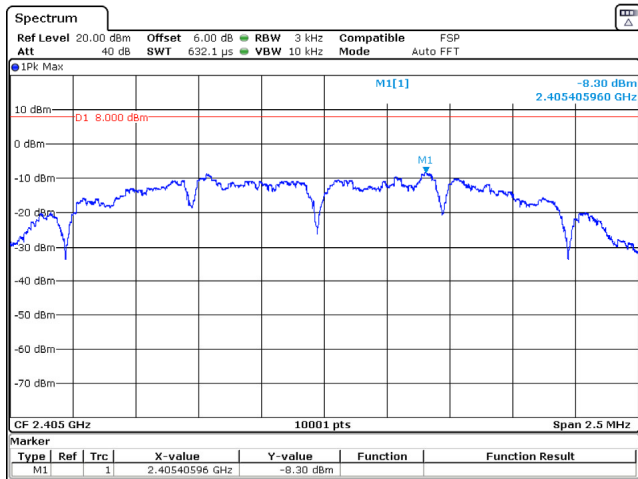

Date: 14 JUN 2023 10:23:52

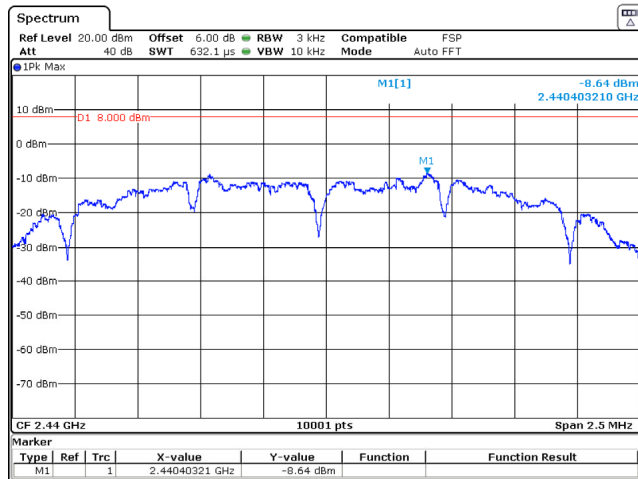

Date: 14 JUN 2023 10:25:03

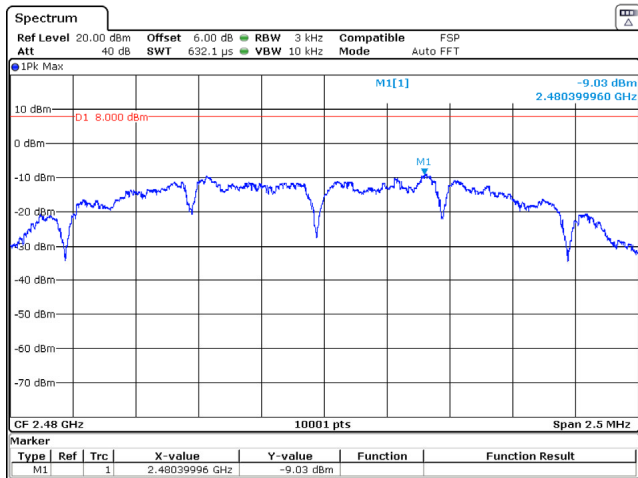

Date: 14 JUN 2023 10:25:54


Figure 8(b): Power Spectral Density Plots.

4.3 Unintentional Emissions

4.3.1 Restricted Band Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 8. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 8(a): Transmit Chain Spurious Emissions.

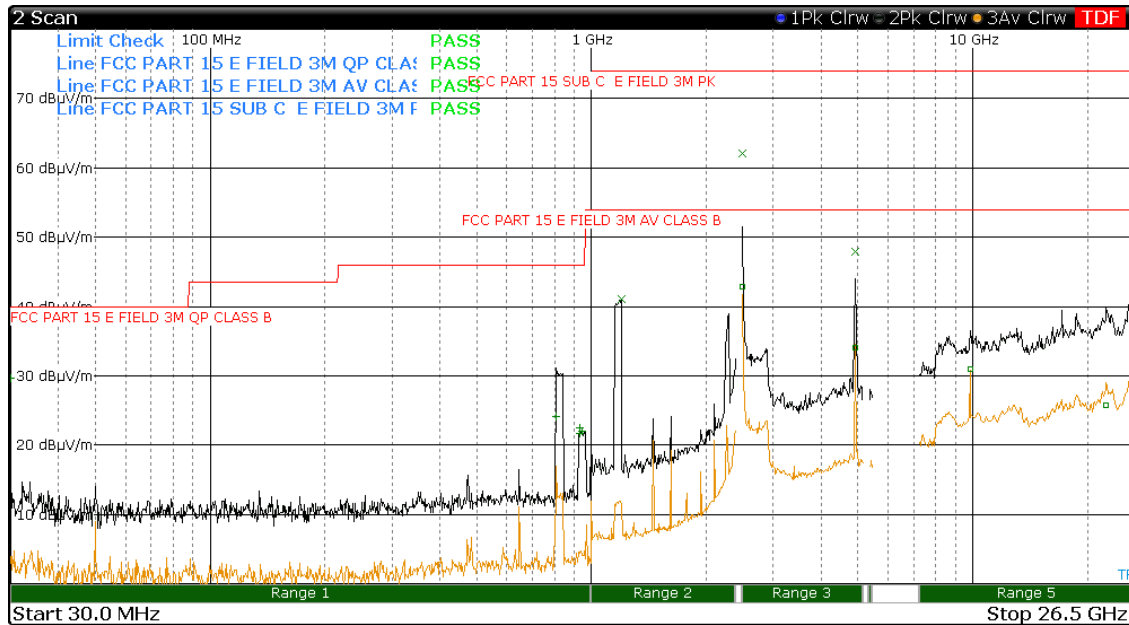


Frequency Range 30 >= f > 1000 MHz f < 1000 MHz	Det Pk/QPk Pk/Avg	IF Bandwidth 100 kHz 1 MHz	Video Bandwidth 300 kHz 3 MHz	Test Date: 3-Jun-23	Test Engineer: John Nantz
				EUT: Sensata HUBB	Meas. Distance: Conducted

Transmitter Spurious in Restricted Bands															FCC/IC
#	Mode	Path A / B	Frequency		Output Power		Ant Gain dBi	GR Factor dB	Avg Duty Factor dB	Electric Field @ 3m				Pass dB	Comments
			Start MHz	Stop MHz	Pk dBm	Avg dBm				Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m		
R1	Fundamental Restricted Band Edge (Low Side)														
R2	802.11G	A	2390.0	2390.0	-33.3	-52.8	3.8	0.0	0.0	61.9	74.0	42.4	54.0	11.6	max all - L,M,H channels
R4	Fundamental Restricted Band Edge (High Side)														
R5	802.11G	A	2483.5	2483.5	-33.1	-52.4	3.8	0.0	0.0	62.1	74.0	42.8	54.0	11.2	max all - L,M,H channels
R7															
R8	802.11G	max	30	88	-64.8		3.8	4.7	0.0	30.4			40	9.6	max all - L,M,H channels
R9	802.11G	max	88	216	-72.3		3.8	4.7	0.0	22.9			43	20.1	max all - L,M,H channels
R10	802.11G	max	216	1000	-69.7		3.8	4.7	0.0	25.5			46	20.5	max all - L,M,H channels
R14	802.11G	max	1000.0	4000.0	-53.0	-64.1	3.8	0.0	0.0	42.2	74.0	31.1	54.0	22.9	max all - L,M,H channels
R15	802.11G	max	4824.0	4824.0	-45.0	-60.6	3.8	0.0	0.0	50.2	74.0	34.6	54.0	19.4	
R16	802.11G	max	4874.0	4874.0	-40.9	-53.7	3.8	0.0	0.0	54.3	74.0	41.5	54.0	12.5	
R17	802.11G	max	4924.0	4924.0	-47.4	-61.2	3.8	0.0	0.0	47.8	74.0	34.1	54.0	20.0	
R18	802.11G	max	4000.0	6000.0	-40.9	-53.7	3.8	0.0	0.0	54.3	74.0	41.5	54.0	12.5	max all - L,M,H channels
R19	802.11G	max	6000.0	8400.0	-55.4	-65.1	3.8	0.0	0.0	39.8	74.0	30.1	54.0	23.9	max all - L,M,H channels
R20	802.11G	max	8400.0	12500.0	-52.9	-62.6	3.8	0.0	0.0	42.3	74.0	32.7	54.0	21.3	max all - L,M,H channels
R21	802.11G	max	12500.0	26000.0	-60.5	-69.5	3.8	0.0	0.0	34.7	74.0	25.7	54.0	28.3	max all - L,M,H channels
R21	802.11G	max	12500.0	26000.0	-60.5	-69.5	3.8	0.0	0.0	34.7	74.0	25.7	54.0	28.3	max all - L,M,H channels
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15

ROW COLUMN
 All C5/C6 Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12
 All C8 Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (e)
 All C10/C12 Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)

Table 8(b): Transmit Chain Spurious Emissions.

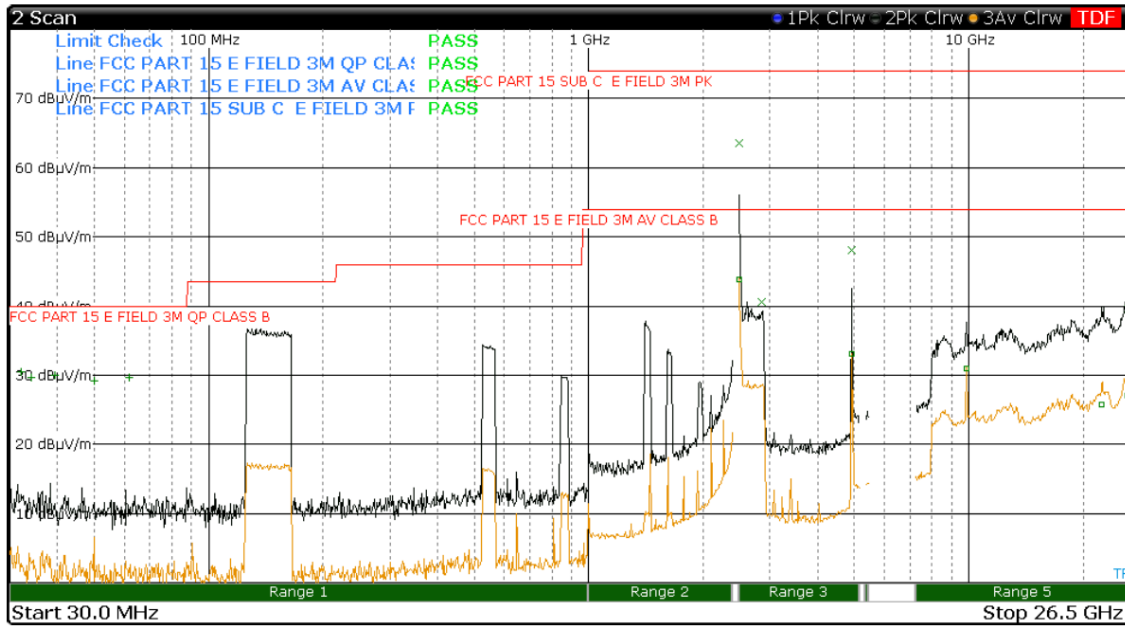

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	3-Jun-23
30 >= f > 1000 MHz	Pk/QPk	100 kHz	300 kHz	Test Engineer:	John Nantz
f < 1000 MHz	Pk/Avg	1 MHz	3 MHz	EUT:	Sensata HUBB
				Meas. Distance:	Conducted

Transmitter Spurious in Restricted Bands																FCC/IC
#	Mode	Path A / B	Frequency		Output Power		Ant Gain dBi	GR Factor	Avg Duty Factor dB	Electric Field @ 3m				Pass dB	Comments	
			Start MHz	Stop MHz	Pk dBm	Avg dBm				Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m			
R1	Fundamental Restricted Band Edge (Low Side)															
R2	802.11n(20) SISO	A	2390.0	2390.0	-29.8	-51.2	3.8	0.0	0.0	65.4	74.0	44.0	54.0	8.6	max all - L,M,H channels	
R4	Fundamental Restricted Band Edge (High Side)															
R5	802.11n(20) SISO	A	2483.5	2483.5	-31.6	-51.3	3.8	0.0	0.0	63.6	74.0	43.9	54.0	10.1	max all - L,M,H channels	
R7																
R8	802.11n(20) SISO	max	30	88	-64.7		3.8	4.7	0.0	30.5			40	9.5	max all - L,M,H channels	
R9	802.11n(20) SISO	max	88	216	-67.0		3.8	4.7	0.0	28.2			43	14.8	max all - L,M,H channels	
R10	802.11n(20) SISO	max	216	1000	-65.1		3.8	4.7	0.0	30.1			46	15.9	max all - L,M,H channels	
R14	802.11n(20) SISO	max	1000.0	4000.0	-55.0	-66.7	3.8	0.0	0.0	40.2	74.0	28.5	54.0	25.5	max all - L,M,H channels	
R15	802.11n(20) SISO	max	4824.0	4824.0	-46.8	-61.5	3.8	0.0	0.0	48.4	74.0	33.7	54.0	20.3		
R16	802.11n(20) SISO	max	4874.0	4874.0	-40.1	-55.0	3.8	0.0	0.0	55.1	74.0	40.2	54.0	13.8		
R17	802.11n(20) SISO	max	4924.0	4924.0	-47.1	-62.2	3.8	0.0	0.0	48.1	74.0	33.0	54.0	21.0		
R18	802.11n(20) SISO	max	4000.0	6000.0	-51.1	-62.7	3.8	0.0	0.0	44.1	74.0	32.5	54.0	21.5	max all - L,M,H channels	
R19	802.11n(20) SISO	max	6000.0	8400.0	-55.4	-65.1	3.8	0.0	0.0	39.8	74.0	30.1	54.0	23.9	max all - L,M,H channels	
R20	802.11n(20) SISO	max	8400.0	12500.0	-53.0	-62.7	3.8	0.0	0.0	42.2	74.0	32.5	54.0	21.5	max all - L,M,H channels	
R21	802.11n(20) SISO	max	12500.0	26000.0	-60.2	-69.5	3.8	0.0	0.0	35.0	74.0	25.7	54.0	28.3	max all - L,M,H channels	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	


ROW COLUMN

All C5/C6 Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12

All C8 Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (e)

All C10/C12 Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)

Table 8(c): Transmit Chain Spurious Emissions.

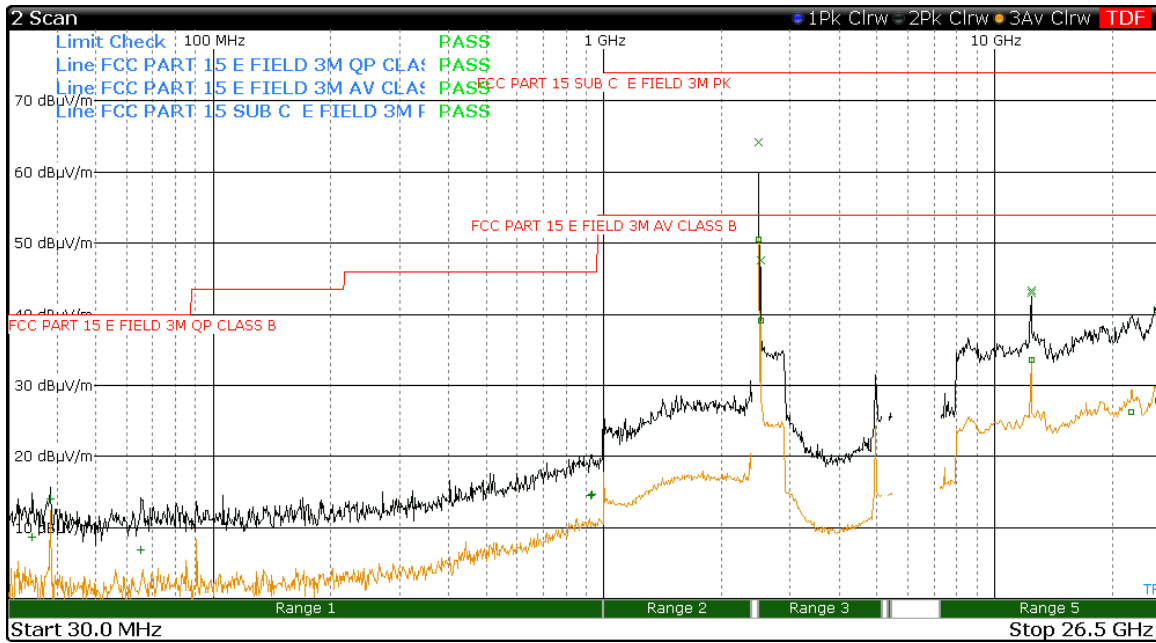

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	3-Jun-23
30 >= f > 1000 MHz	Pk/QPk	100 kHz	300 kHz	Test Engineer:	John Nantz
f < 1000 MHz	Pk/Avg	1 MHz	3 MHz	EUT:	Sensata HUBB
				Meas. Distance:	Conducted

Transmitter Spurious in Restricted Bands															FCC/IC
#	Mode	Path A / B	Frequency		Output Power		Ant Gain dBi	GR Factor dB	Avg Duty Factor dB	Electric Field @ 3m				Pass dB	Comments
			Start MHz	Stop MHz	Pk dBm	Avg dBm				Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m		
R1	Fundamental Restricted Band Edge (Low Side)														
R2	THREAD	N/A	2390.0	2390.0	-54.8	-66.5	4.4	0.0	0.0	40.4	74.0	28.7	54.0	25.3	max all - L,M,H channels
R3	Fundamental Restricted Band Edge (High Side)														
R4	THREAD	N/A	2483.5	2483.5	-31.1	-44.7	4.4	0.0	0.0	64.1	74.0	50.6	54.0	3.4	max all - L,M,H channels
R5															
R6	THREAD	N/A	30	88	-79.3		4.4	4.7	0.0	15.9			40	24.1	max all - L,M,H channels
R7	THREAD	N/A	88	216	-78.9		4.4	4.7	0.0	16.3			43	26.7	max all - L,M,H channels
R8	THREAD	N/A	216	1000	-80.6		4.4	4.7	0.0	14.6			46	31.4	max all - L,M,H channels
R9	THREAD	N/A	1000.0	4000.0	-47.1	-53.3	4.4	0.0	0.0	48.1	74.0	41.9	54.0	12.1	max all - L,M,H channels
R10	THREAD	N/A	4824.0	4824.0	-54.3	-62.2	4.4	0.0	0.0	40.9	74.0	33.0	54.0	21.0	
R11	THREAD	N/A	4874.0	4874.0	-56.3	-64.0	4.4	0.0	0.0	38.9	74.0	31.2	54.0	22.8	
R12	THREAD	N/A	4924.0	4924.0	-55.0	-64.6	4.4	0.0	0.0	40.2	74.0	30.6	54.0	23.4	
R13	THREAD	N/A	4000.0	6000.0	-54.3	-62.2	4.4	0.0	0.0	40.9	74.0	33.0	54.0	21.0	max all - L,M,H channels
R14	THREAD	N/A	6000.0	8400.0	-55.3	-65.1	4.4	0.0	0.0	39.9	74.0	30.1	54.0	23.9	max all - L,M,H channels
R15	THREAD	N/A	8400.0	12500.0	-50.4	-61.5	4.4	0.0	0.0	44.8	74.0	33.7	54.0	20.3	max all - L,M,H channels
R16	THREAD	N/A	12500.0	26000.0	-55.7	-69.0	4.4	0.0	0.0	39.5	74.0	26.2	54.0	27.8	max all - L,M,H channels
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15

ROW COLUMN

All C5/C6 Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12

All C8 Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (c)

All C10/C12 Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)

Table 8(d): Transmit Chain Spurious Emissions.

Frequency Range
 30 >= f > 1000 MHz
 f < 1000 MHz

Det
 Pk/QPk
 Pk/Avg

IF Bandwidth
 100 kHz
 1 MHz

Video Bandwidth
 300 kHz
 3 MHz

Test Date: 31-May-23
Test Engineer: J. Nantz
EUT: Sensata HUBB
Meas. Distance: 3 m, Radiated

Simultaneous Transmitter - Inter-modulation Measurements														FCC/IC	
#	Mode	Frequency		OATS Table		Test Antenna			Electric Field @ 3m				Pass	Comments	
		Start MHz	Stop MHz	Ht m	Angle deg	QN	Pol H/V	Ka dBm	Kg dBm	Meas. Pk dBuV/m	Limit Pk dBuV/m	Meas. Avg dBuV/m			Limit Avg dBuV/m
R1	Intermod - Restricted Band (Low Side / High Side)														
R2	802.11g + THREAD	2389.8	2389.8	1.5	.0	HQR1TO18S01	H/V	32.1	-0.3	63.2	74.0	53.6	54.0	0.4	L,M,H channels, both
R3	802.11g + THREAD	2489.0	2489.0	1.5	.0	HQR1TO18S01	H/V	32.9	-0.3	61.8	74.0	51.9	54.0	2.1	L,M,H channels, both
R4	Intermod - Restricted Band (Low Side / High Side)														
R5	802.11n + THREAD	2375.6	2375.6	1.5	.0	HQR1TO18S01	H/V	32.0	-0.3	62.5	74.0	53.2	54.0	0.8	L,M,H channels, both
R6	802.11n + THREAD	2483.5	2483.5	1.5	.0	HQR1TO18S01	H/V	32.8	-0.3	62.4	74.0	52.4	54.0	1.6	L,M,H channels, both
#	C1	C2	C3	C4	C5	C6		C7	C8	C9	C10	C11	C12	C13	C14

4.3.2 OOB Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) in the worst cases are provided in Figure 9 below.

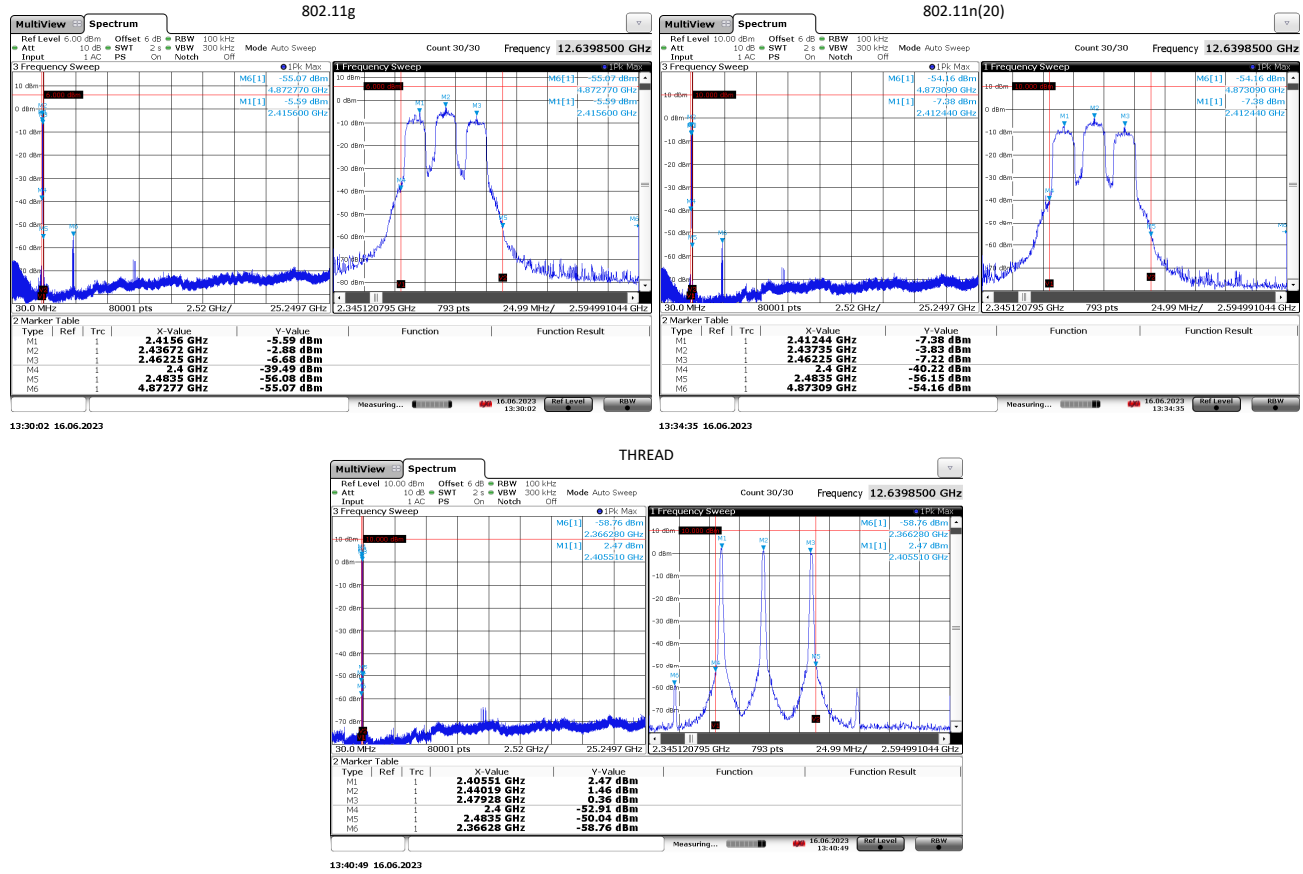


Figure 9: Worst Case Transmitter OOB Emissions Measured.

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 9: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.9 \text{ dB}$
Radiated Emm. Amplitude ($f < 30 \text{ MHz}$)	$\pm 3.1 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 4.0 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 5.2 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm 3.7 \text{ dB}$

[†]Ref: CISPR 16-4-2:2011+A1:2014



Figure 10: Accreditation Documents