
Antenna specification

Antenna Specification Mobile communication terminal antenna

Customer Name: Si rui
Product Name: Rearview mirror -WIFI antenna
Material Code: 3-WIFI-2450-01

Contractor			Date: 2022 / 09 / 28
RF	construction	auditor	QC

Product category and product model overview

Category

This mobile communication terminal antenna is unipolarProduct model overview,This report mainly Outlines the electrical results of the antenna designed by the Rearview Mirror project.


The antenna design frequency band is:**2400M-2500M&5150M-5850M** .

Technical index and experimental equipment

Technical index

Product electrical performance index	
Operating Frequency	2400 ~ 2500 MHz 5150~ 5850 MHz
SWR	2400~2500MHz: <3.0 5150~5850MHz: <3.0
Antenna Gain	2400-2500MHz: 2dBi 5150-5850MHz: 2dBi
Radiant Efficiency	2400 ~ 2450 MHz : > 20 % 5150 ~ 5850 MHz : > 20 %
Impedance	50 ohm
Product material description	
FPC+Coaxial line	Coaxial line electrolytic copper +PI+0.81 coaxial line
Product environment description	
Operation temperature	- 30°C ~ + 85 °C
Storage Temperature	- 30°C ~ + 85 °C

2.4G-5.8G Passive standing wave pattern


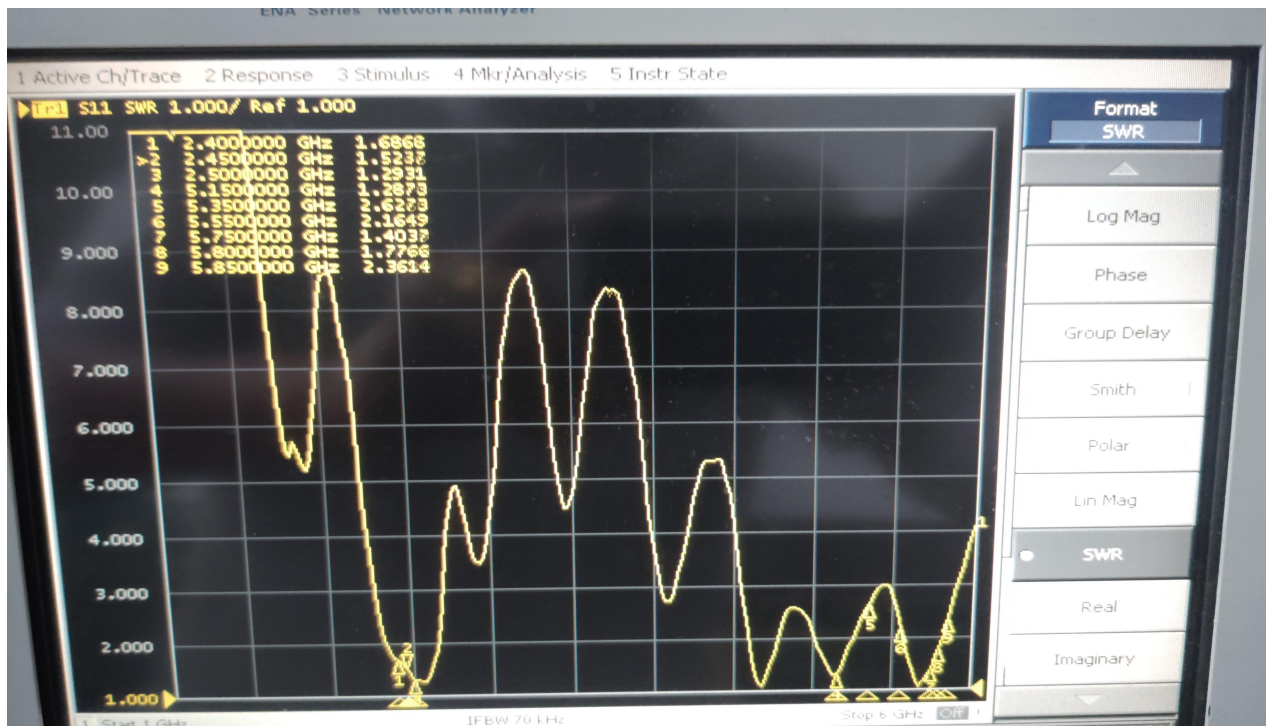




Active test data:



2.4G WIFI	WIFI-B(11M)		
Channel	1	6	11
TRP	12.69	12.06	12.41
TIS			-68.05



5.8G WIFI	WIFI-A(54M)		
Channel	36	64	157
TRP	9.06	9.98	9.37
TIS			-69.02


2D /3D :

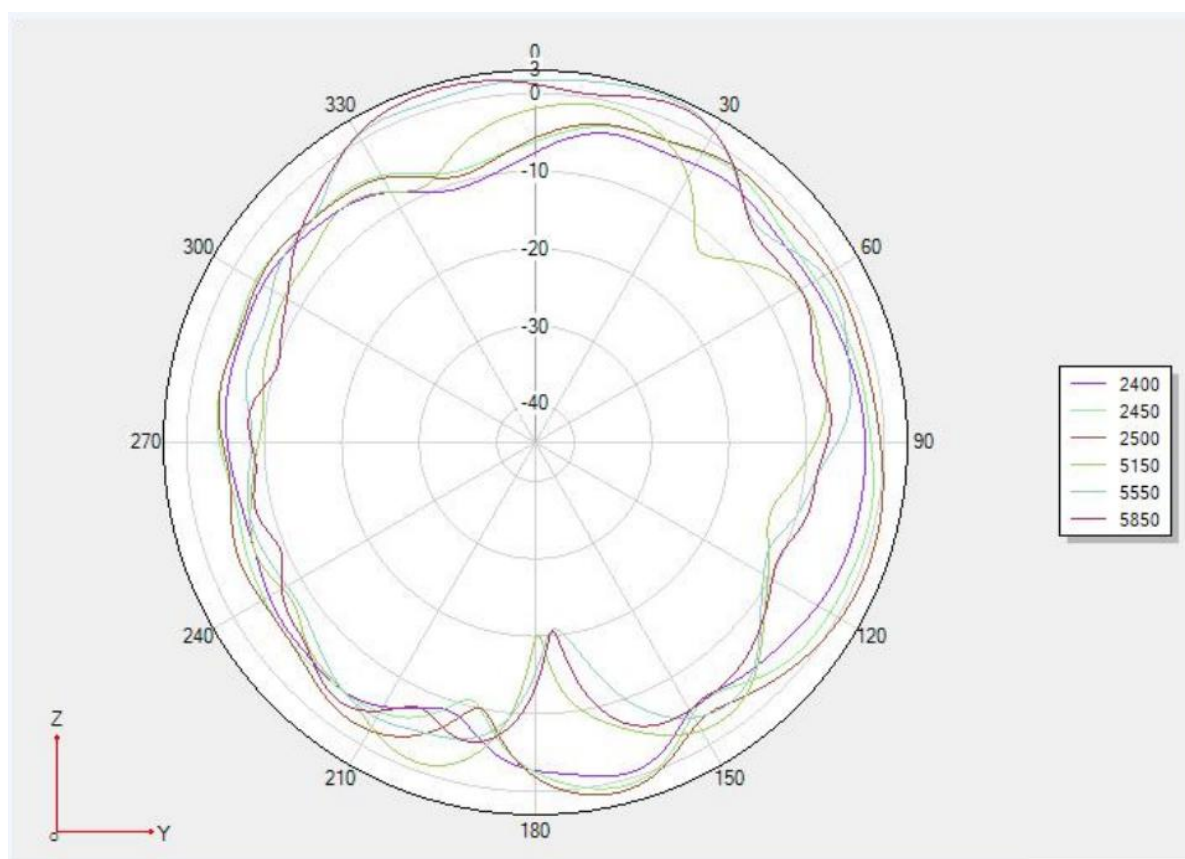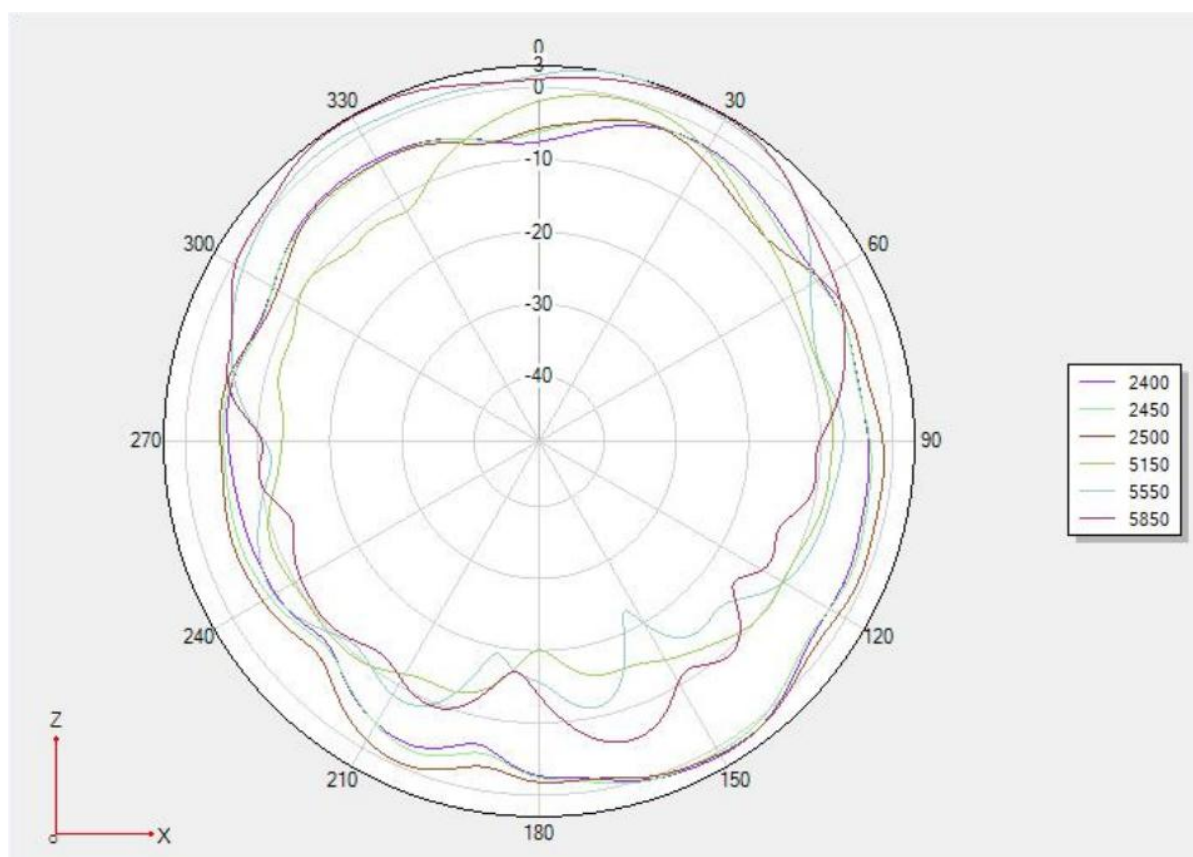

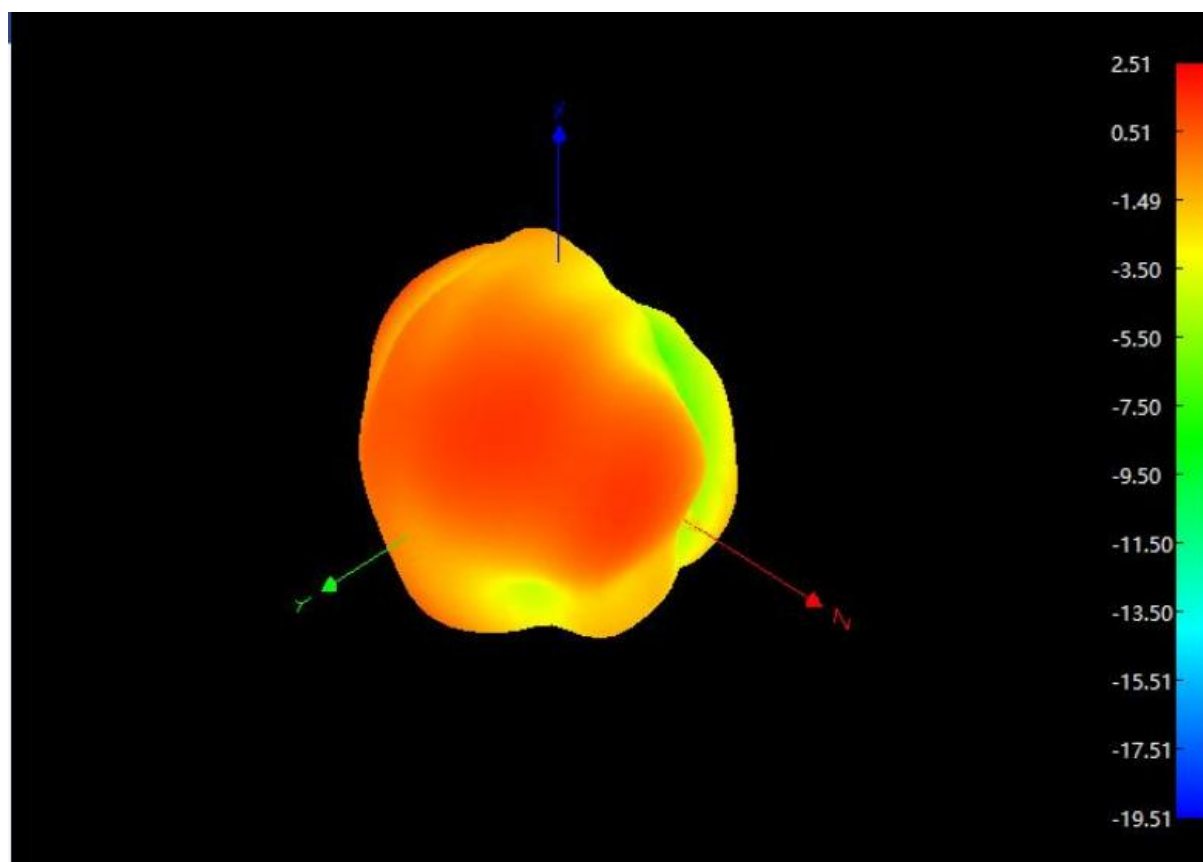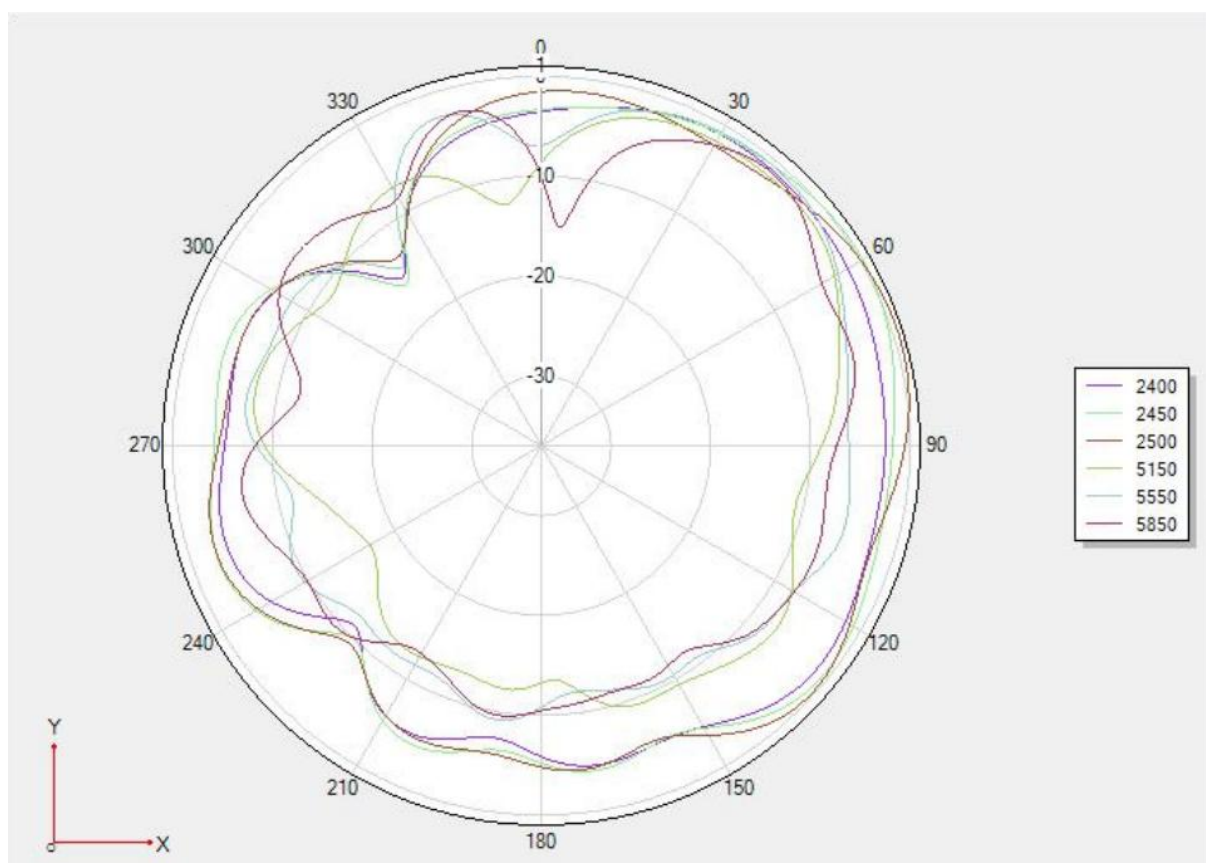

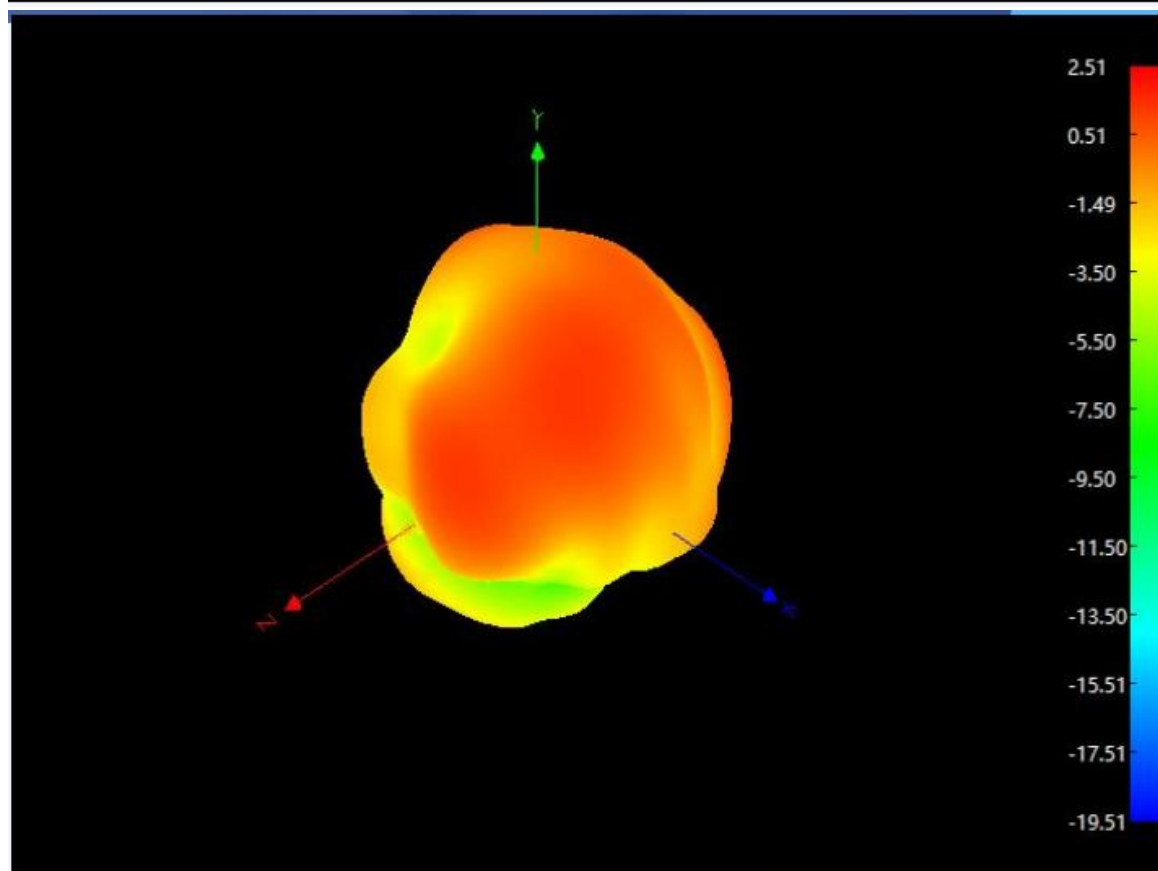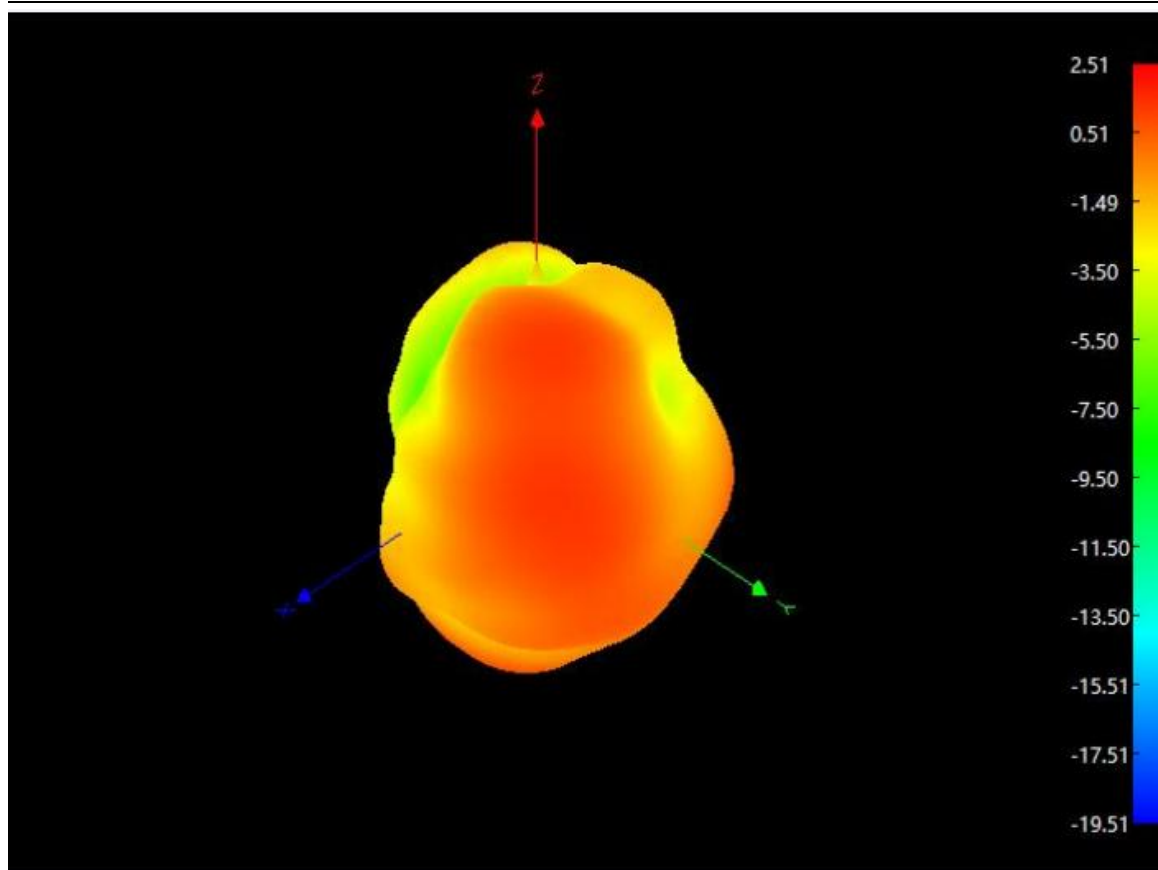

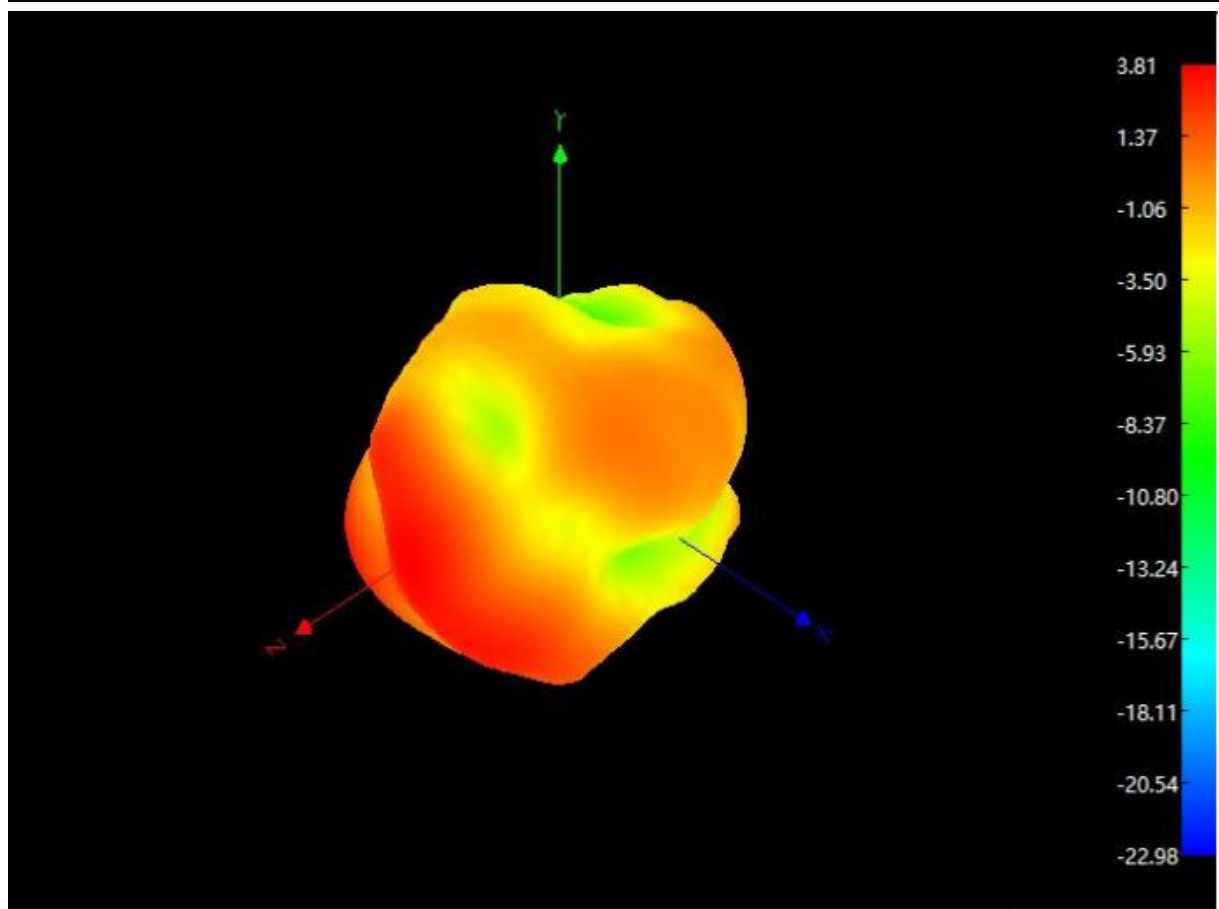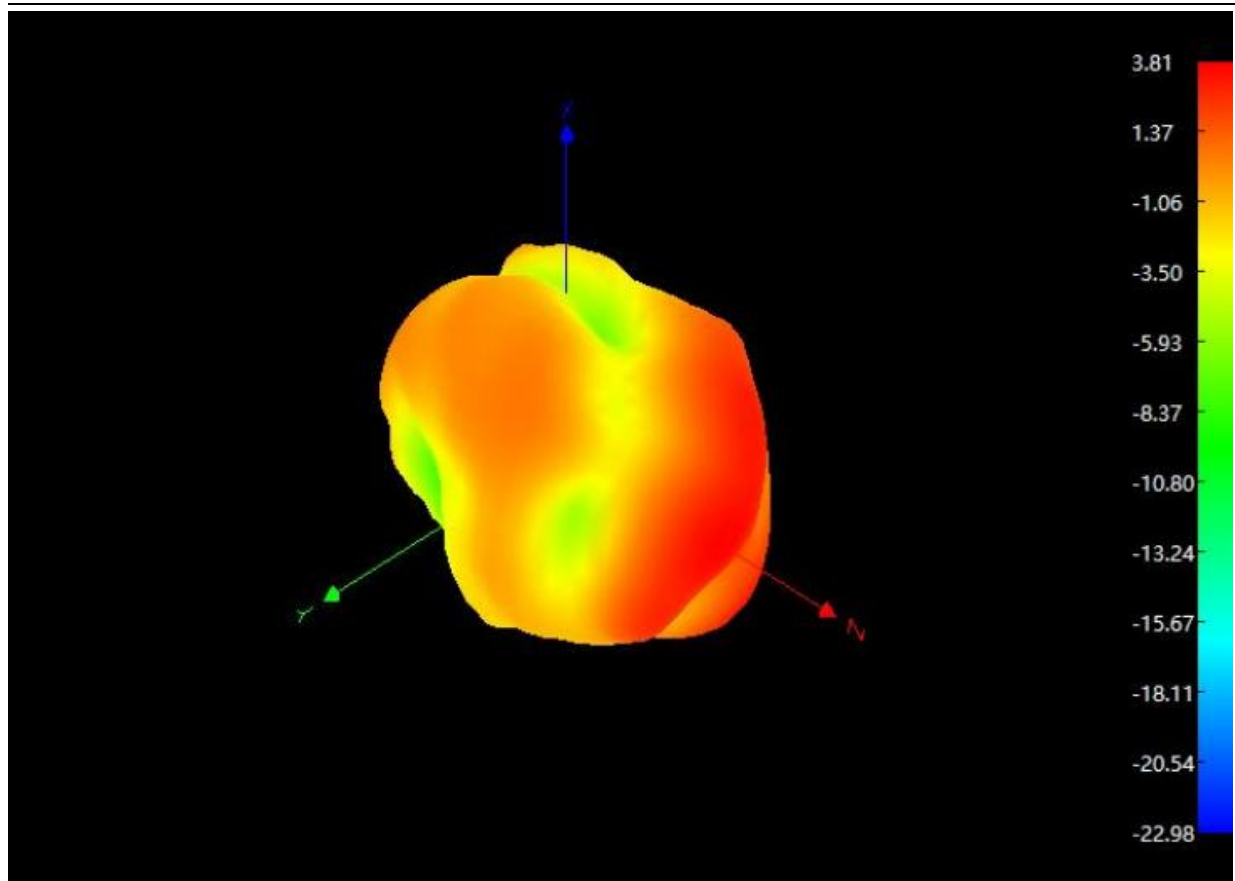

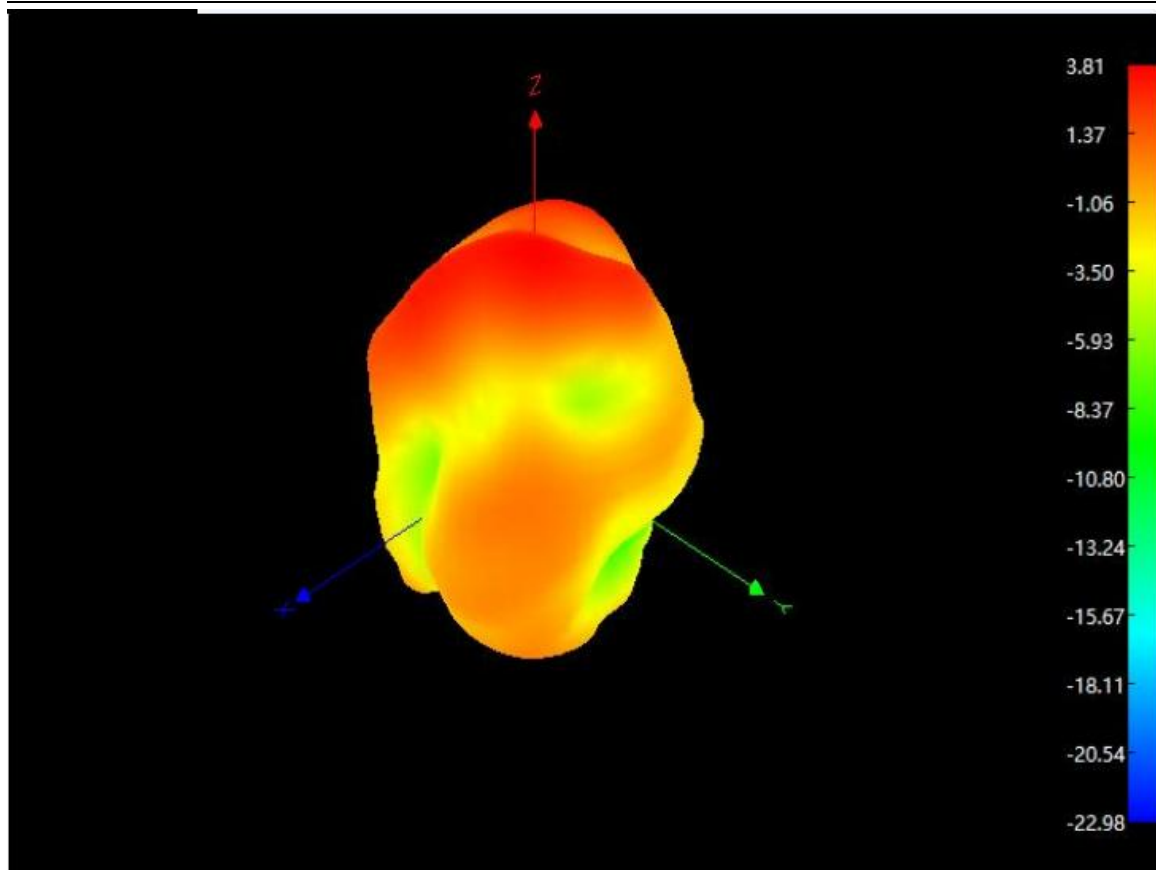

Antenna structure diagram:

