

# FCC CERTIFICATION TEST REPORT

## FOR

<b>Applicant</b>	:	LJ ELECTRONICS TECHNOLOGY LIMITED
<b>Address</b>	:	No.1, Wukouyan 1st Street, Jiujiang Watertown, changping town, DongGuan City, China
<b>Equipment under Test</b>	:	Sub GHz FSK/OOK Transceiver Module
<b>Model No.</b>	:	LJ1269H-915
<b>Trade Mark</b>	:	LJelect
<b>FCC ID</b>	:	2ATKS-1269H
<b>Manufacturer</b>	:	LJ ELECTRONICS TECHNOLOGY LIMITED
<b>Address</b>	:	No.1, Wukouyan 1st Street, Jiujiang Watertown, changping town, DongGuan City, China

**Issued By: Dongguan Dongdian Testing Service Co., Ltd.**

**Add.:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,  
Dongguan City, Guangdong Province, China, 523808

**Tel.:** +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

# REPORT

## Table of Contents

	Test report declares.....	3
1.	Summary of Test Results.....	5
2.	General Test Information .....	6
2.1.	Description of EUT .....	6
2.2.	Accessories of EUT.....	6
2.3.	Assistant equipment used for test.....	6
2.4.	Block diagram of EUT configuration for test.....	6
2.5.	Test environment conditions .....	6
2.6.	Deviations of test standard.....	7
2.7.	Test laboratory .....	7
2.8.	Measurement uncertainty.....	7
3.	Equipment Used During Test.....	8
4.	20 dB Bandwidth .....	10
4.1.	Block diagram of test setup.....	10
4.2.	Limits .....	10
4.3.	Test procedure .....	10
4.4.	Test result.....	10
4.5.	Original test data .....	11
5.	Radiated Emission .....	13
5.1.	Block diagram of test setup.....	13
5.2.	Limit.....	14
5.3.	Test procedure .....	15
5.4.	Test result.....	16
6.	Power Line Conducted Emission.....	54
6.1.	Block diagram of test setup.....	54
6.2.	Power line conducted emission limits .....	54
6.3.	Test procedure .....	54
6.4.	Test result.....	55
7.	Antenna Requirements .....	56
7.1.	Limit.....	56
7.2.	Result .....	56

## Test Report Declare

<b>Applicant</b>	:	LJ ELECTRONICS TECHNOLOGY LIMITED
<b>Address</b>	:	No.1, Wukouyan 1st Street, Jiujiang Watertown, changping town, DongGuan City, China
<b>Equipment under Test</b>	:	Sub GHz FSK/OOK Transceiver Module
<b>Model No.</b>	:	LJ1269H-915
<b>Trade mark</b>	:	LJelect
<b>Manufacturer</b>	:	LJ ELECTRONICS TECHNOLOGY LIMITED
<b>Address</b>	:	No.1, Wukouyan 1st Street, Jiujiang Watertown, changping town, DongGuan City, China

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C.

### Test procedure used:

ANSI C63.10:2013.

### We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

<b>Report No:</b>	DDT-R21121703-1E01		
<b>Date of Receipt:</b>	Jan. 17, 2022	<b>Date of Test:</b>	Jan. 17, 2022 ~ Feb. 25, 2022

**Prepared By:**

*Sam Li*

**Sam Li/Engineer**

**Approved By:**



**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Feb. 28, 2022	

## 1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
20 dB Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.249 ANSI C63.10:2013	Pass
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	N/A
Antenna requirement	FCC Part 15: 15.203	Pass

Note: N/A represents not applicable

## 2. General Test Information

### 2.1. Description of EUT

EUT* Name	: Sub GHz FSK/OOK Transceiver Module
Model Number	: LJ1269H-915
EUT function description	: Please reference user manual of this device
Power supply	: DC 3.3V
Operation frequency	: 902.5 MHz, 915.5 MHz, 927.5 MHz
Modulation	: FSK
Antenna Gain	: Ant1: 1.3dBi : Ant2: 1.1dBi : Ant3: 1.8dBi
Sample Type	: Series production
Serial Number	: N/A

Note: EUT is the abbreviation of equipment under test.

### 2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

### 2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

### 2.4. Block diagram of EUT configuration for test

Tx Mode:



### 2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

## 2.6. Deviations of test standard

No deviation.

## 2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com).

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

## 2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 <sup>-8</sup> (Antenna couple method)
	5.5 × 10 <sup>-8</sup> (Conducted method)
Conducted Spurious Emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3×10 <sup>-8</sup>
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission Test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

### 3. Equipment Used During Test


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input type="checkbox"/> <b>RF Connected Test (Tonscend RF Measurement System 1#)</b>					
Spectrum analyzer	R&S	FSU26	200071	Sep. 02, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Sep. 02, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 18, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	158060010	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
<input checked="" type="checkbox"/> <b>RF Connected Test (Tonscend RF Measurement System 3#)</b>					
Signal analyzer	R&S	FSQ26	101272	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.77.0518	N/A	N/A
<input type="checkbox"/> <b>RF Connected Test (Tonscend RF Measurement System 4#)</b>					
MXA SignalAnalyzer	Agilent	N9020A	MY49100362	Sep. 02, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Jun. 01, 2021	1 Year
MXG Vector Signal Generator	Agilent	N5182B	MY59100192	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 18, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	2118060485	Oct. 18, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.6.88.0330	N/A	N/A
<input checked="" type="checkbox"/> <b>Radiation 3#chamber</b>					
EMI Test Receiver	R&S	ESU	100472	Jun. 01, 2021	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 19, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Aug. 07, 2021	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 17, 2021	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 08, 2021	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Sep. 02, 2021	1 Year



Pre-amplifier	COM-POWER	PAM-840A	461369	Mar. 15, 2021	1 Year
Test software	Audix	E3	V 6.1.1.1	N/A	N/A
<input type="checkbox"/> <b>Power Line Conducted Emissions Test 1#</b>					
Test Receiver	R&S	ESCI	100551	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101109	Sep. 02, 2021	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 02, 2021	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 02, 2021	1 Year
LISN 3	SCHWARZBECK	NSLK 8163	00017	Sep. 02, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
<input type="checkbox"/> <b>Power Line Conducted Emissions Test 2#</b>					
Test Receiver	R&S	ESCI	101028	Sep. 02, 2021	1 Year
LISN 1	R&S	ENV216	101170	Sep. 02, 2021	1 Year
Pulse Limiter	R&S	KH43101	431011801568-1 2#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	RG214-5	N/A	Jun. 01, 2021	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

## 4. 20 dB Bandwidth

### 4.1. Block diagram of test setup

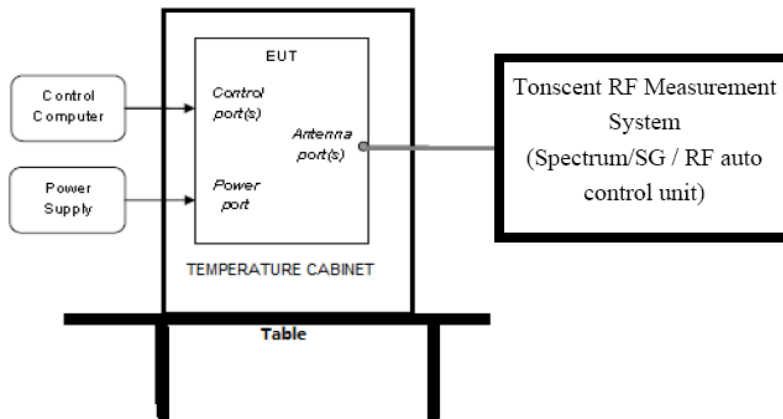

### 4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:
 


RBW:	3 kHz
VBW:	10 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, measure the 20dB bandwidth of signal.

### 4.4. Test result

Mode	Freq (MHz)	20 dB bandwidth Result (kHz)	Limit (kHz)	Conclusion
FSK	902.5	86.538	/	Pass
FSK	915.5	86.538	/	Pass
FSK	927.5	86.538	/	Pass

### 4.5. Original test data

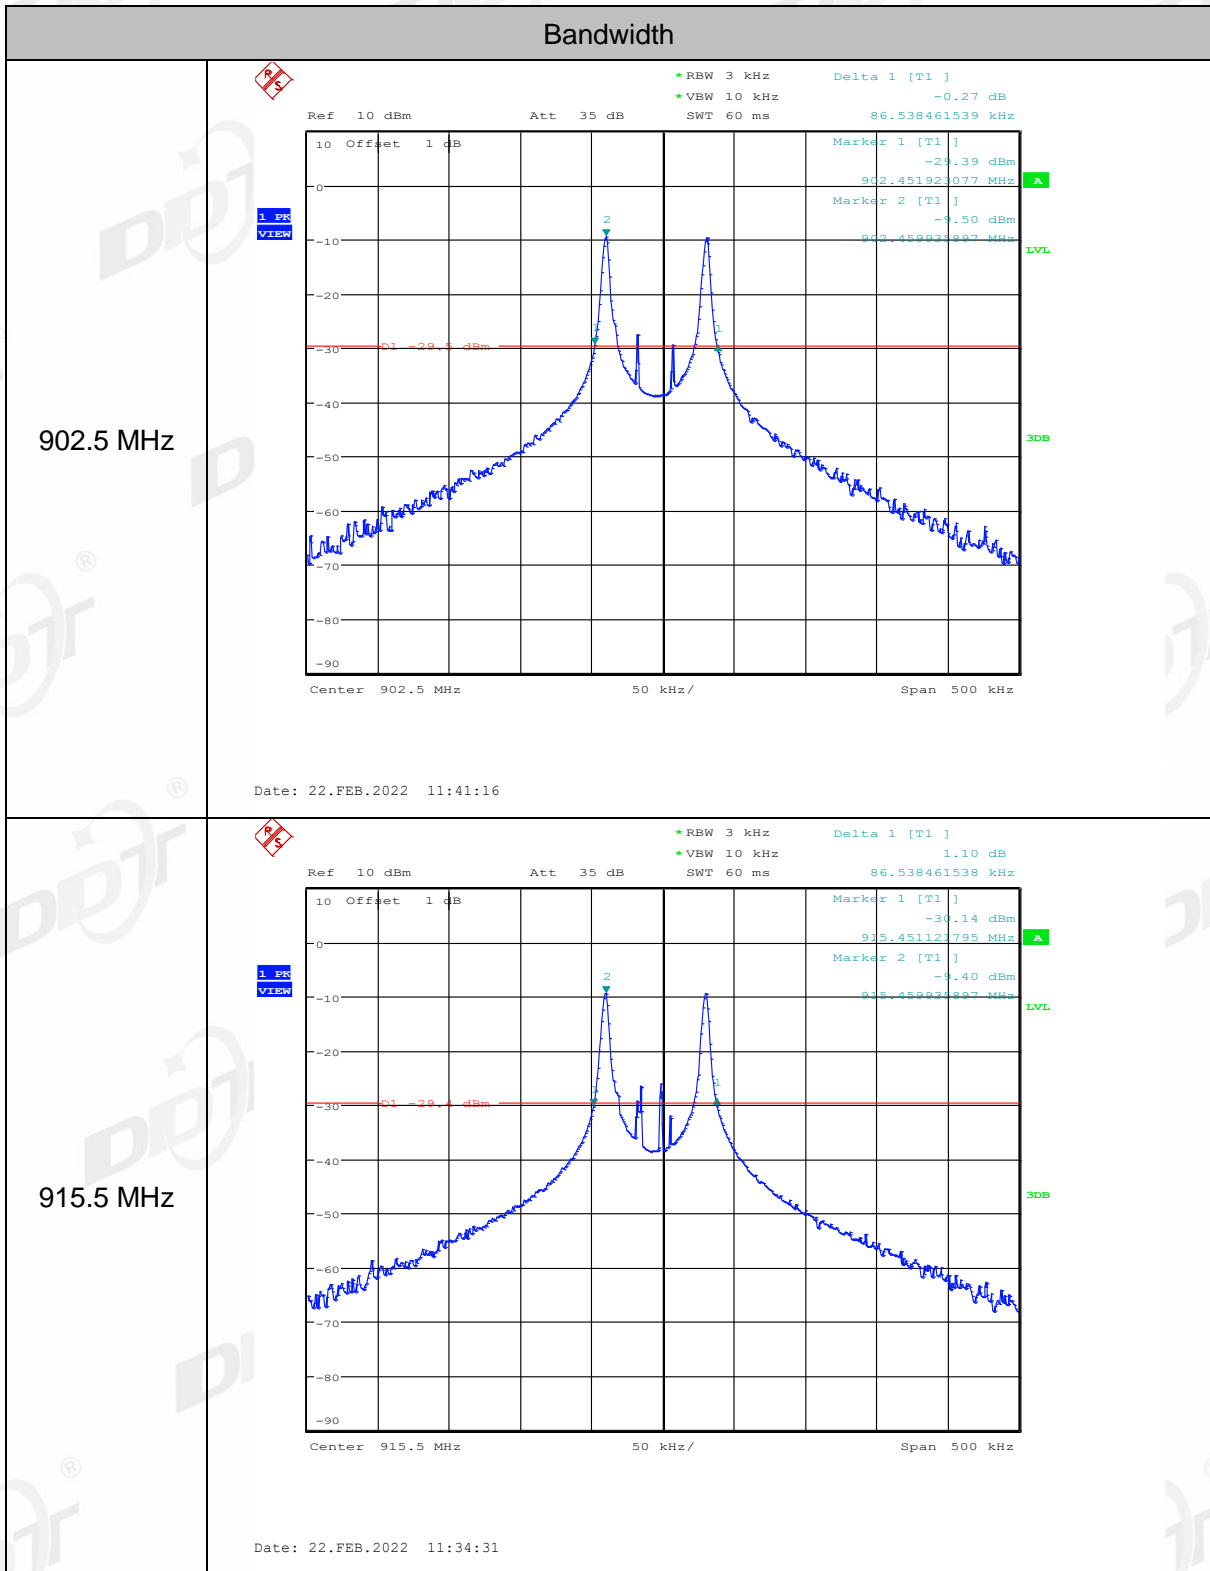


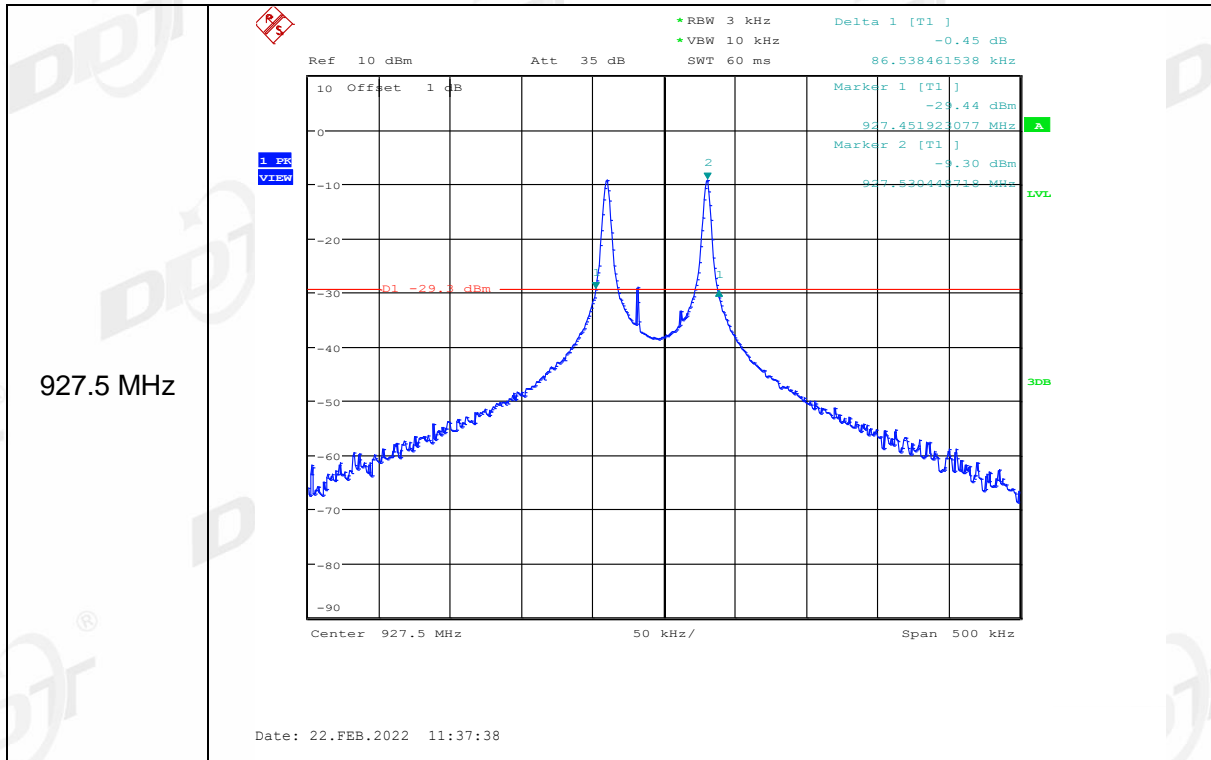


## 5. Radiated Emission

### 5.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

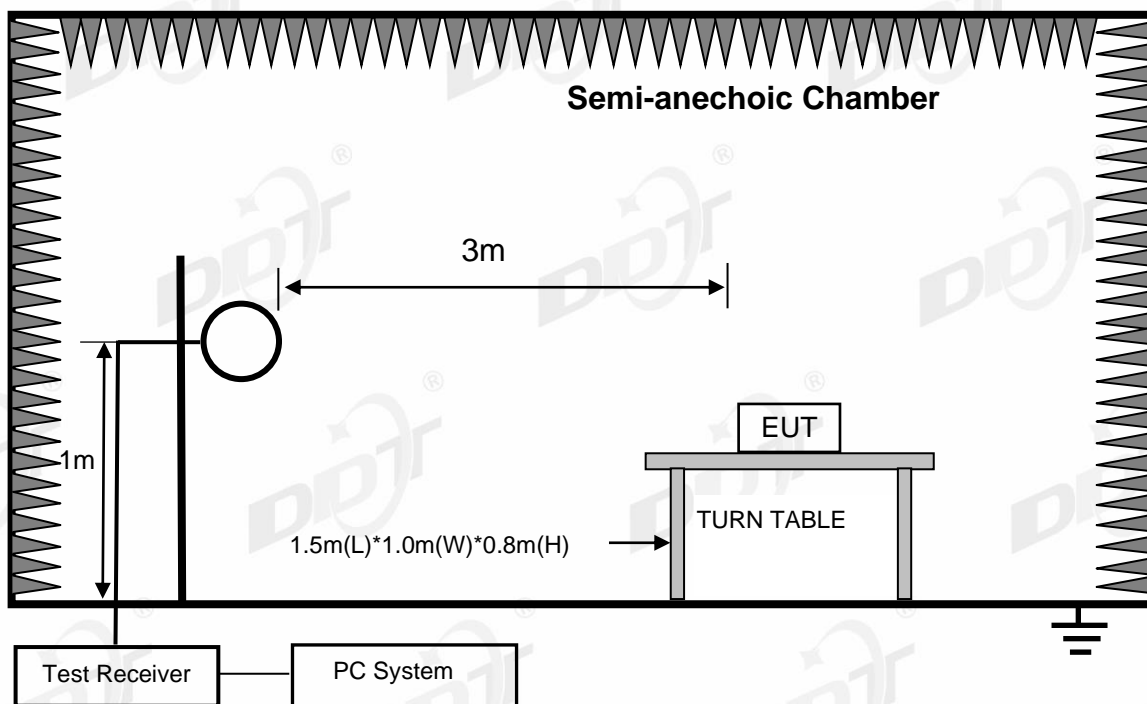

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

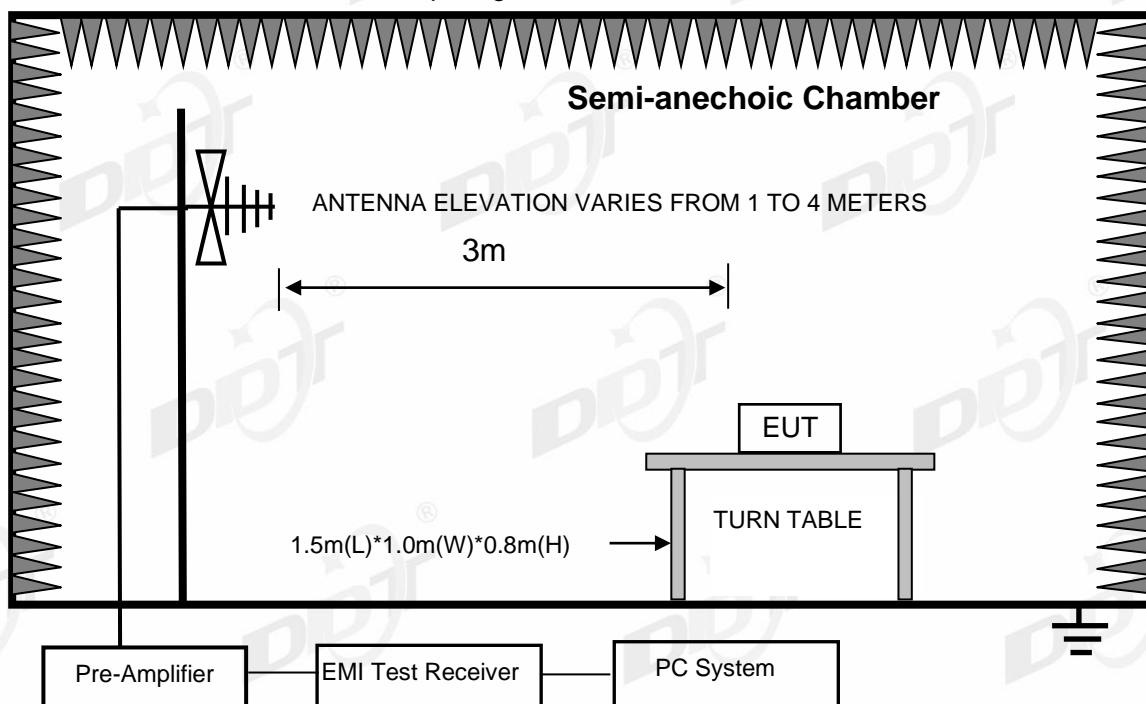

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

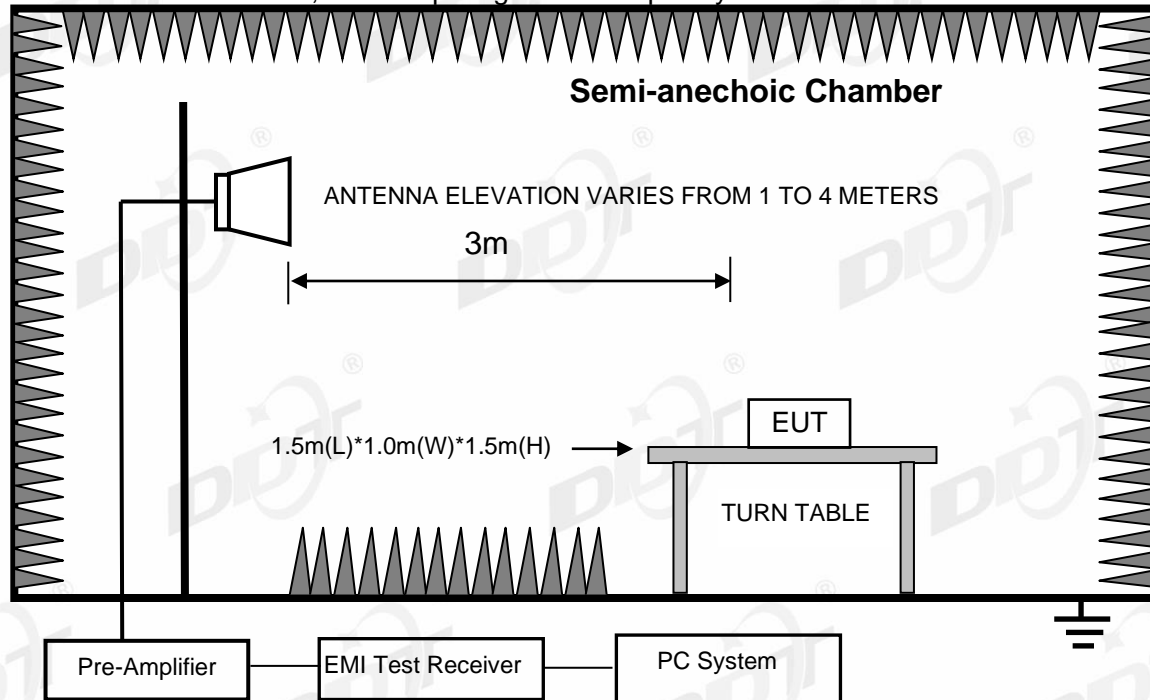

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

## 5.2. Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000 MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Field Strength of Fundamental emission for 902 MHz-928 MHz	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Quasi-Peak)	
Field Strength of Harmonics	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark:

- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V}/\text{m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz, radiated emission limits in these three bands are based on measurements employing an average detector.

### 5.3. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.4
- (3) Test antenna was located 3 m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Change power supply range from 85% to 115% of the rated supply voltage
  - (d) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9 kHz to 10 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz, so below final test was performed with frequency range from 30 MHz to 10 GHz.
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions from 30 MHz to 1 GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.
- (7) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; according ANSI C63.10:2013 clause 4.1.4.2 procedure for average measure.
- (8) For fundamental frequency test, set spectrum analyzer's RBW = 100 kHz, VBW = 300 kHz. Peak detector for pre-test, then read the QP Level in spectrum analyzer and record.

#### 5.4. Test result

##### **Pass. (See below detailed test result)**

All the emissions except fundamental emission from 9 kHz to 10 GHz were comply with 15.209 limit.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 10 GHz and recorded in below.

Note2: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. Other emission levels are attenuated 20 dB below the limit, so it does not record in the report.



**Field Strength of the Fundamental Signal****Ant 1:**

Freq. (MHz)	Read level (dB $\mu$ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization
902.5	59.41	22.17	6.49	88.07	94.00	-5.93	HORIZONTAL
902.5	53.05	22.17	6.49	81.71	94.00	-12.29	VERTICAL
915.5	58.09	22.40	6.51	87.00	94.00	-7.00	HORIZONTAL
915.5	51.99	22.40	6.51	80.90	94.00	-13.10	VERTICAL
927.5	56.52	22.40	6.53	85.45	94.00	-8.55	HORIZONTAL
927.5	50.98	22.40	6.53	79.91	94.00	-14.09	VERTICAL
Result: Pass							

**Ant 2:**

Freq. (MHz)	Read level (dB $\mu$ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization
902.5	58.02	22.17	6.49	86.68	94.00	-7.32	HORIZONTAL
902.5	56.46	22.17	6.49	85.12	94.00	-8.88	VERTICAL
915.5	56.44	22.40	6.51	85.35	94.00	-8.65	HORIZONTAL
915.5	55.39	22.40	6.51	84.30	94.00	-9.70	VERTICAL
927.5	54.69	22.40	6.53	83.62	94.00	-10.38	HORIZONTAL
927.5	53.93	22.40	6.53	82.86	94.00	-11.14	VERTICAL
Result: Pass							

**Ant 3:**

Freq. (MHz)	Read level (dB $\mu$ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Polarization
902.5	63.32	22.17	6.49	91.98	94.00	-2.02	HORIZONTAL
902.5	60.01	22.17	6.49	88.67	94.00	-5.33	VERTICAL
915.5	61.00	22.40	6.51	89.91	94.00	-4.09	HORIZONTAL
915.5	58.50	22.40	6.51	87.41	94.00	-6.59	VERTICAL
927.5	57.11	22.40	6.53	86.04	94.00	-7.96	HORIZONTAL
927.5	55.39	22.40	6.53	84.32	94.00	-9.68	VERTICAL
Result: Pass							


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

## Radiated Emission test (below 1GHz) TR-4-E-009 Radiated Emission Test Result

<b>Test Site</b> : DDT 3m Chamber 3# <b>Test Date</b> : 2022-03-14 <b>EUT</b> : Sub GHz FSK/OOK Transceiver Module <b>Power Supply</b> : Battery <b>Condition</b> : Temp:24.5°C,Humi:55%,Press:100.1kPa <b>Memo</b> : 902.5MHz Ant1	C:\E3 6.11\2022 Report Data\Q21121703-1E MD1269H-915\FCC BELOW 1G.EM6 <b>Tested By</b> : Kennys Zhang <b>Model Number</b> : LJ1269H-915 <b>Test Mode</b> : Tx Mode <b>Antenna/Distance</b> : 2021 VLUB 9163 3#/3m/VERTICAL
--	---

Data:  
25

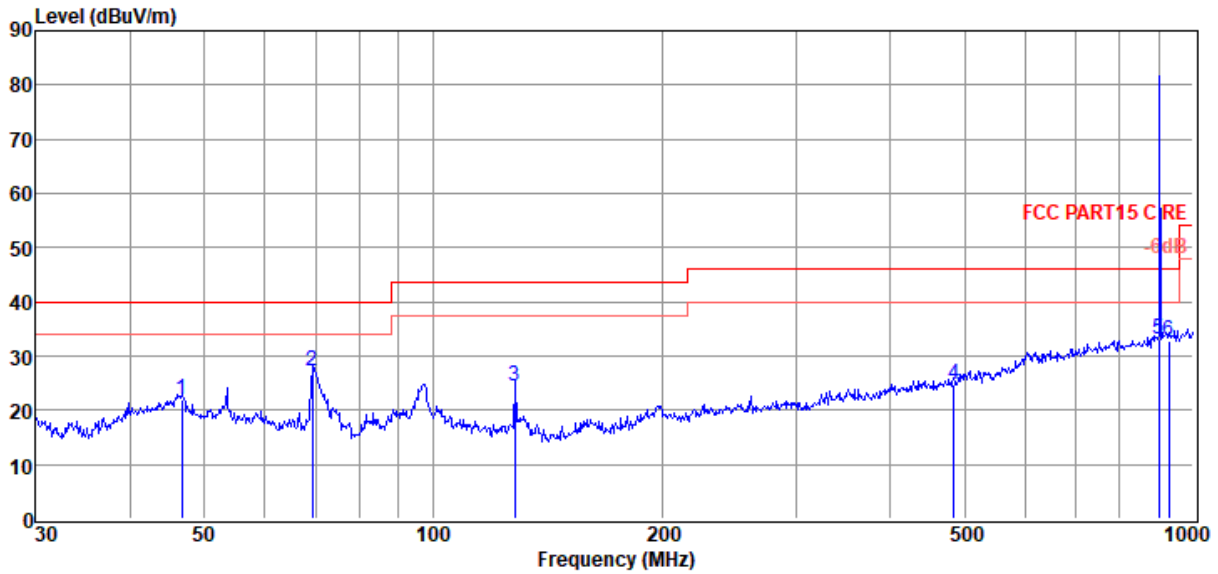


Item (Mark)	Freq. (MHz)	Read Level (dB $\mu$ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Detector	Polarization
1	46.67	4.20	14.20	3.65	22.05	40.00	-17.95	QP	VERTICAL
2	69.36	14.54	9.00	3.82	27.36	40.00	-12.64	QP	VERTICAL
3	128.11	11.22	9.00	4.15	24.37	43.50	-19.13	QP	VERTICAL
4	483.91	2.93	16.48	5.43	24.84	46.00	-21.16	QP	VERTICAL
5	902.00	4.46	22.14	6.48	33.08	46.00	-12.92	QP	VERTICAL
6	928.00	3.89	22.40	6.53	32.82	46.00	-13.18	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 902.5MHz Ant1

Data:  
26

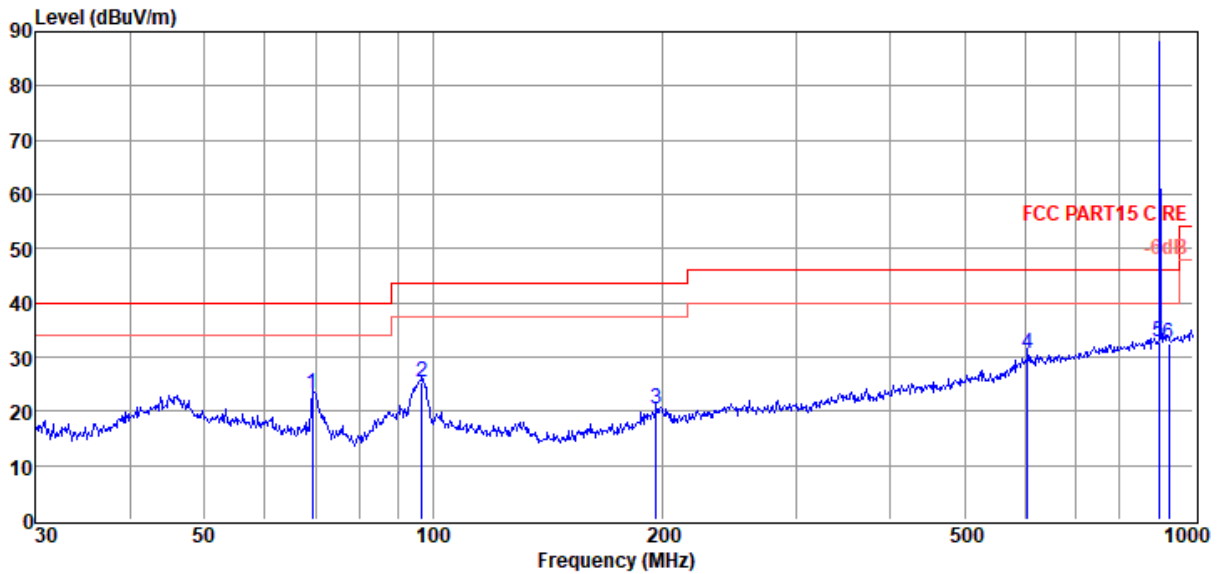


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.36	10.41	9.00	3.82	23.23	40.00	-16.77	QP	HORIZONTAL
2	96.78	9.98	11.35	3.97	25.30	43.50	-18.20	QP	HORIZONTAL
3	196.51	4.08	11.80	4.44	20.32	43.50	-23.18	QP	HORIZONTAL
4	605.66	5.68	19.20	5.75	30.63	46.00	-15.37	QP	HORIZONTAL
5	902.00	4.11	22.14	6.48	32.73	46.00	-13.27	QP	HORIZONTAL
6	928.00	3.56	22.40	6.53	32.49	46.00	-13.51	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-11 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 915.5MHz Ant1

Data:  
27

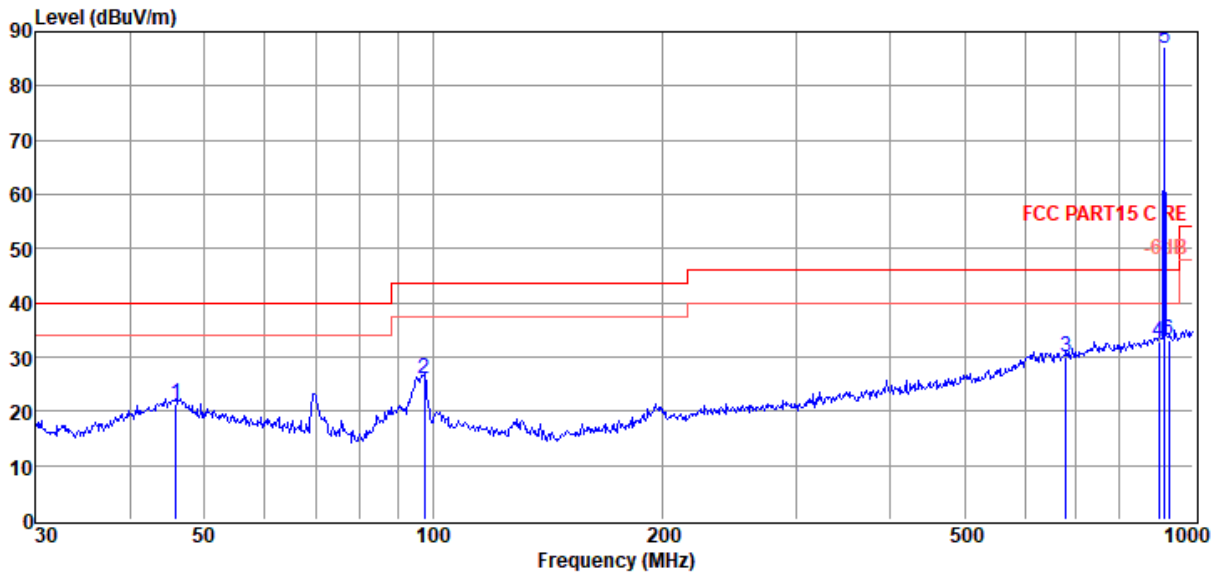


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	45.86	2.99	14.67	3.65	21.31	40.00	-18.69	QP	HORIZONTAL
2	97.46	10.51	11.45	3.97	25.93	43.50	-17.57	QP	HORIZONTAL
3	679.96	4.77	19.40	5.94	30.11	46.00	-15.89	QP	HORIZONTAL
4	902.00	4.18	22.14	6.48	32.80	46.00	-13.20	QP	HORIZONTAL
5	915.50	58.09	22.40	6.51	87.00	/	/	Peak	HORIZONTAL
6	928.00	4.17	22.40	6.53	33.10	46.00	-12.90	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-11 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 915.5MHz Ant1

Data:  
28

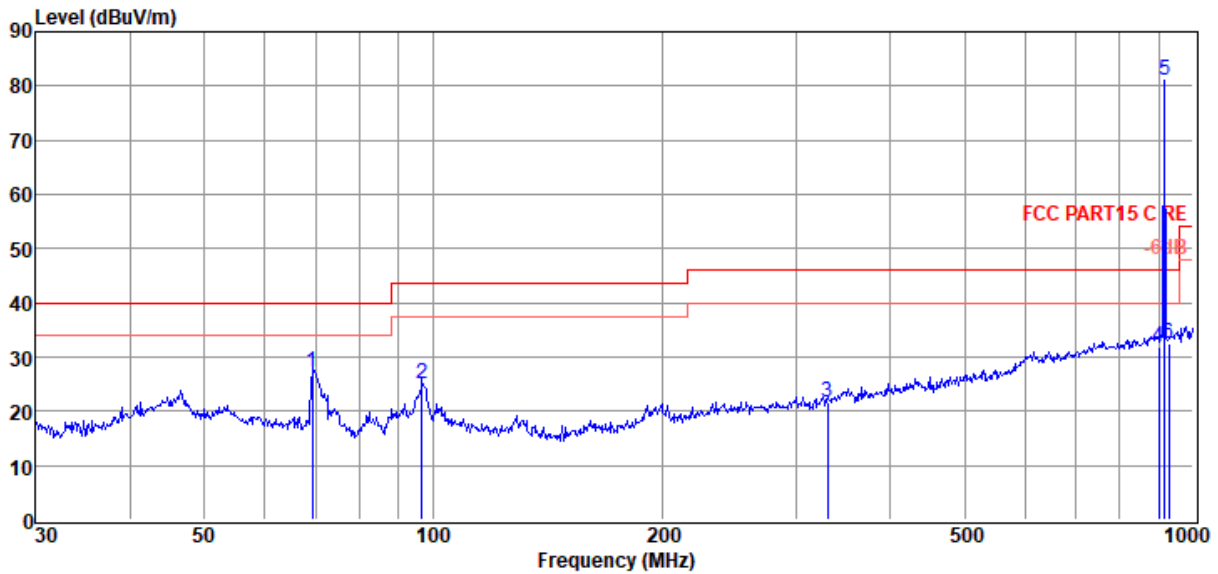


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.36	14.29	9.00	3.82	27.11	40.00	-12.89	QP	VERTICAL
2	96.78	9.63	11.35	3.97	24.95	43.50	-18.55	QP	VERTICAL
3	330.20	2.66	14.10	4.93	21.69	46.00	-24.31	QP	VERTICAL
4	902.00	3.32	22.14	6.48	31.94	46.00	-14.06	QP	VERTICAL
5	915.50	51.99	22.40	6.51	80.90	/	/	QP	VERTICAL
6	928.00	3.60	22.40	6.53	32.53	46.00	-13.47	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 927.5MHz Ant1

Data:  
29

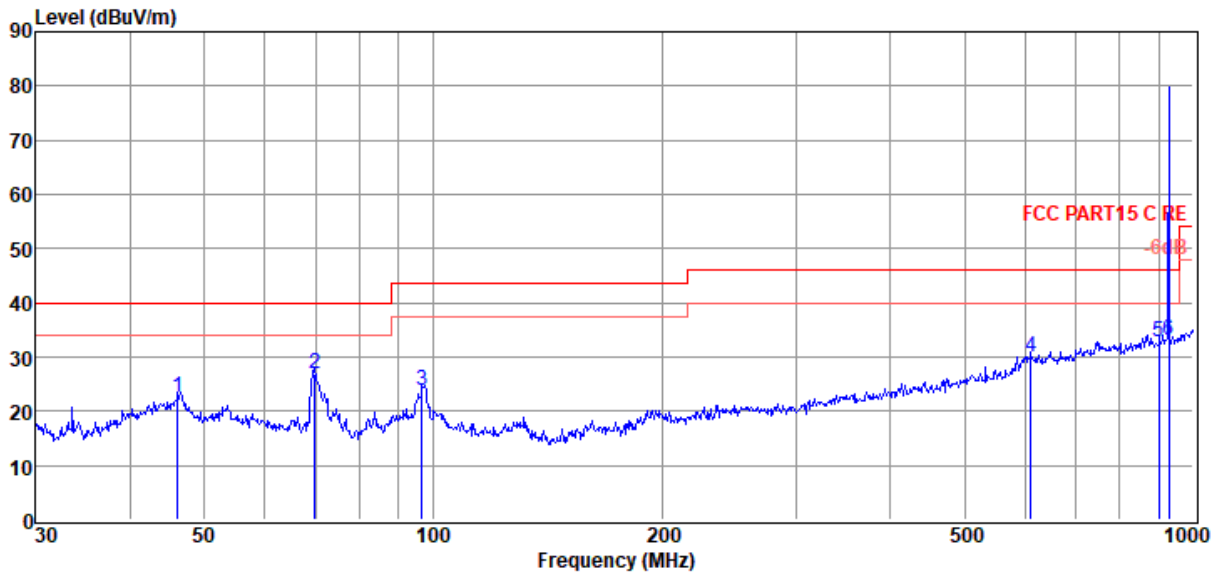

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.18	4.39	14.49	3.65	22.53	40.00	-17.47	QP	VERTICAL
2	69.85	14.09	9.00	3.82	26.91	40.00	-13.09	QP	VERTICAL
3	96.78	8.42	11.35	3.97	23.74	43.50	-19.76	QP	VERTICAL
4	612.06	4.95	19.16	5.77	29.88	46.00	-16.12	QP	VERTICAL
5	902.00	4.05	22.14	6.48	32.67	46.00	-13.33	QP	VERTICAL
6	928.00	4.11	22.40	6.53	33.04	46.00	-12.96	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6

**Test Date** : 2022-03-14

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL

**Memo** : 927.5MHz Ant1

Data:  
30

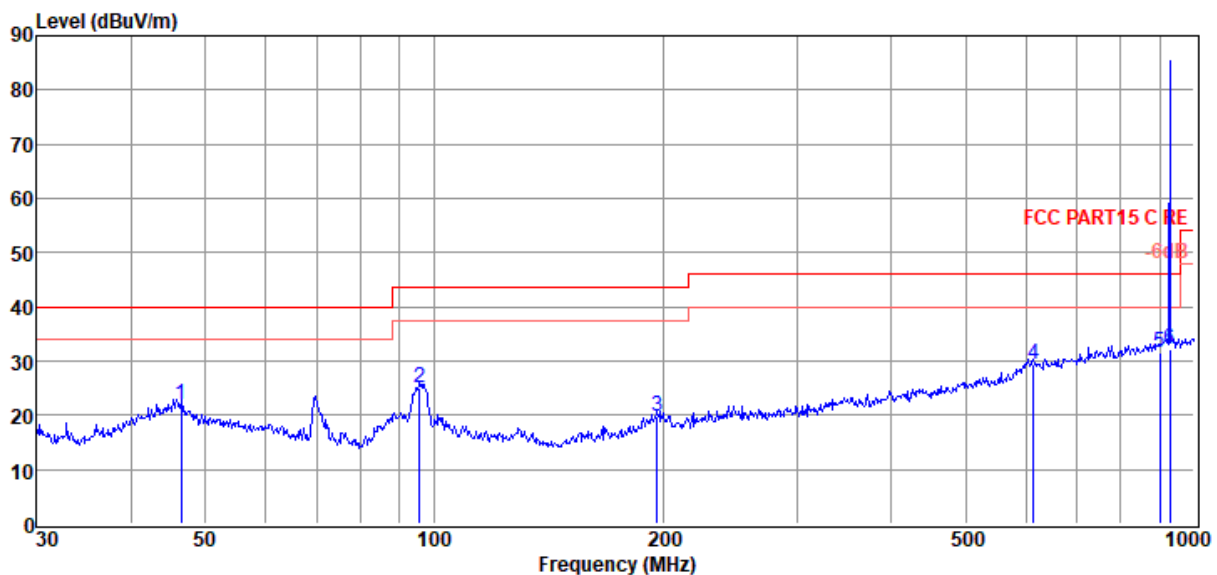

Item (Mark)	Freq. (MHz)	Read Level (dB $\mu$ V)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Detector	Polarization
1	46.50	4.00	14.30	3.65	21.95	40.00	-18.05	QP	HORIZONTAL
2	95.76	9.76	11.18	3.96	24.90	43.50	-18.60	QP	HORIZONTAL
3	196.51	3.59	11.80	4.44	19.83	43.50	-23.67	QP	HORIZONTAL
4	614.21	4.49	19.12	5.78	29.39	46.00	-16.61	QP	HORIZONTAL
5	902.00	3.03	22.14	6.48	31.65	46.00	-14.35	QP	HORIZONTAL
6	928.00	3.28	22.40	6.53	32.21	46.00	-13.79	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 902.5MHz Ant2

Data:  
19

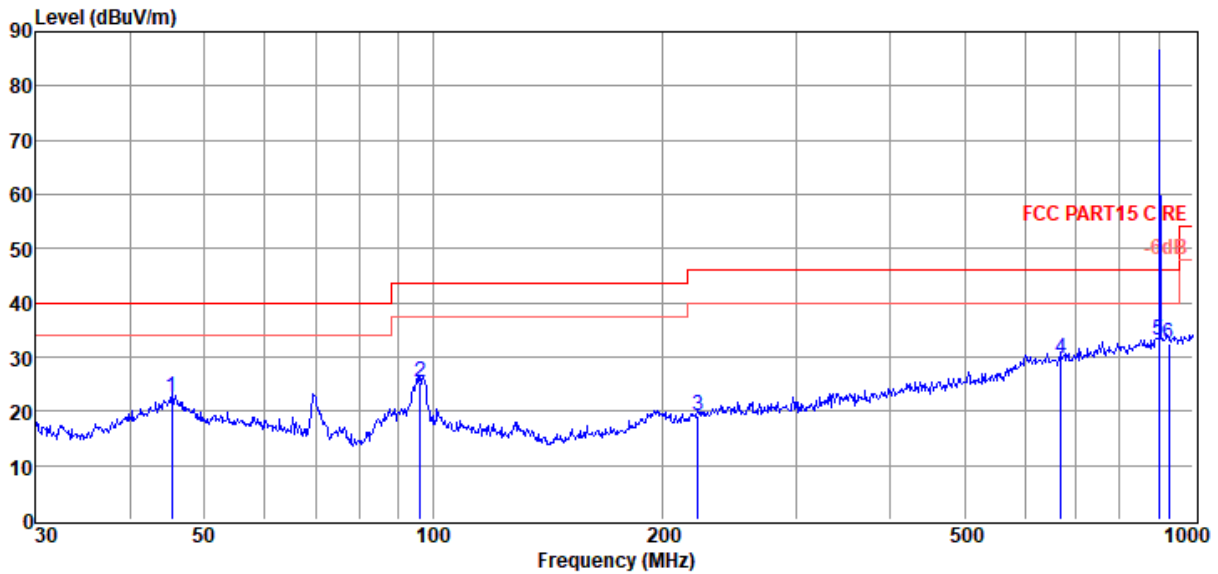

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	45.38	3.98	14.91	3.65	22.54	40.00	-17.46	QP	HORIZONTAL
2	96.10	10.17	11.22	3.96	25.35	43.50	-18.15	QP	HORIZONTAL
3	222.95	3.08	11.64	4.55	19.27	46.00	-26.73	QP	HORIZONTAL
4	670.49	4.61	19.31	5.91	29.83	46.00	-16.17	QP	HORIZONTAL
5	902.00	4.48	22.14	6.48	33.10	46.00	-12.90	QP	HORIZONTAL
6	928.00	3.52	22.40	6.53	32.45	46.00	-13.55	QP	HORIZONTAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 902.5MHz Ant2

Data:  
20

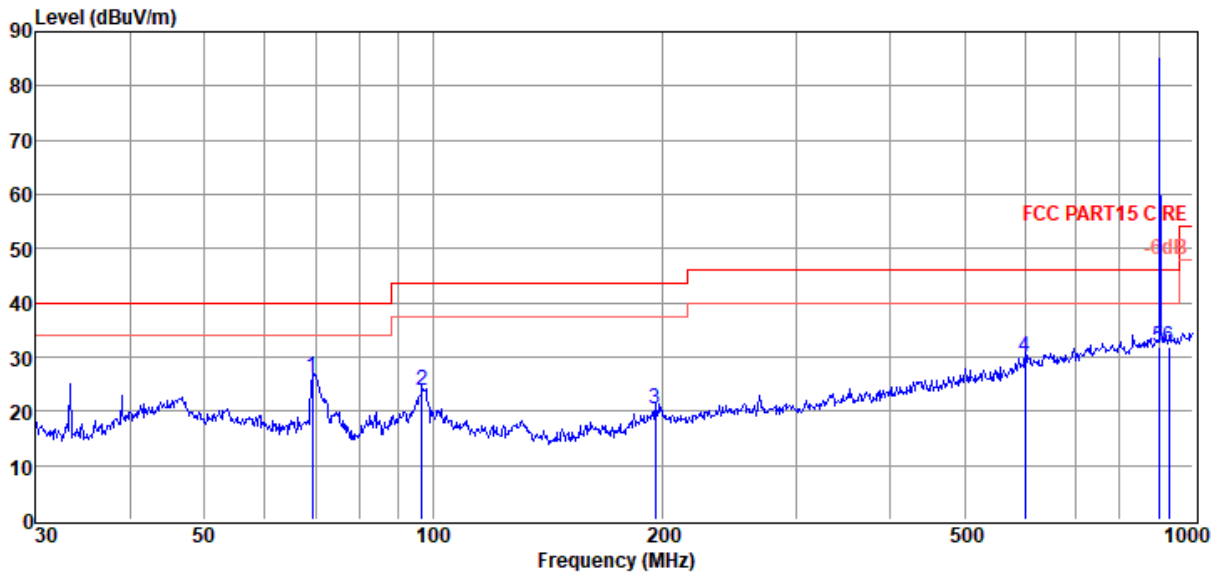


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.36	13.55	9.00	3.82	26.37	40.00	-13.63	QP	VERTICAL
2	96.78	8.35	11.35	3.97	23.67	43.50	-19.83	QP	VERTICAL
3	195.82	4.34	11.78	4.44	20.56	43.50	-22.94	QP	VERTICAL
4	601.43	5.02	19.13	5.74	29.89	46.00	-16.11	QP	VERTICAL
5	902.00	3.38	22.14	6.48	32.00	46.00	-14.00	QP	VERTICAL
6	928.00	3.03	22.40	6.53	31.96	46.00	-14.04	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-11 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 915.5MHz Ant2

Data:  
21

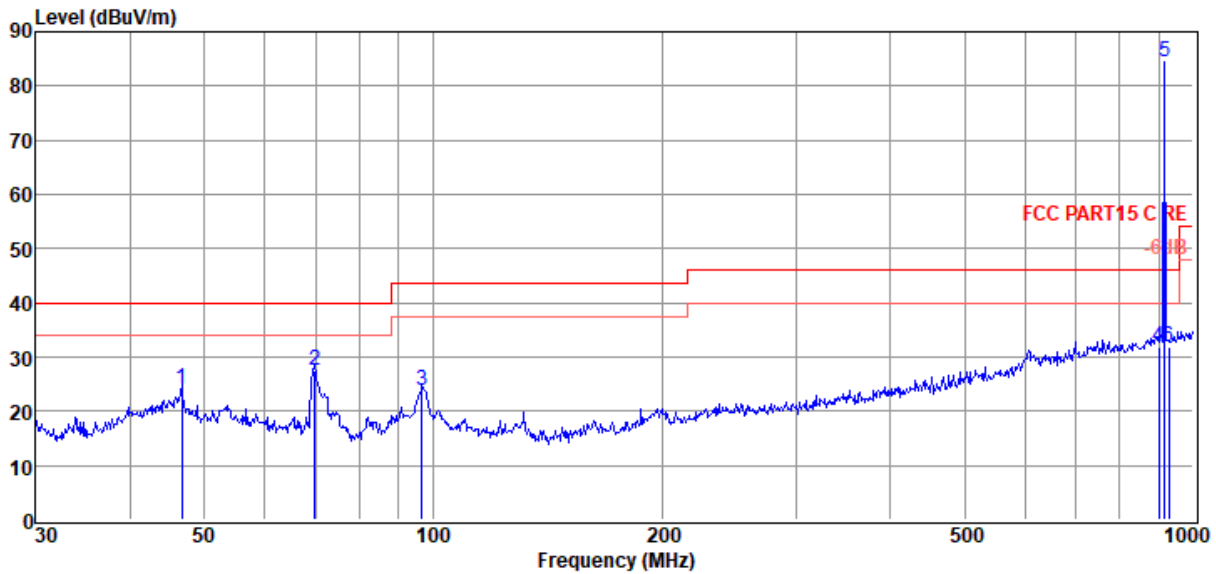


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.67	6.15	14.20	3.65	24.00	40.00	-16.00	QP	VERTICAL
2	69.85	14.86	9.00	3.82	27.68	40.00	-12.32	QP	VERTICAL
3	96.78	8.48	11.35	3.97	23.80	43.50	-19.70	QP	VERTICAL
4	902.00	3.22	22.14	6.48	31.84	46.00	-14.16	QP	VERTICAL
5	915.50	55.39	22.40	6.51	84.30	/	/	QP	VERTICAL
6	928.00	2.88	22.40	6.53	31.81	46.00	-14.19	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-11 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 915.5MHz Ant2

Data:  
22

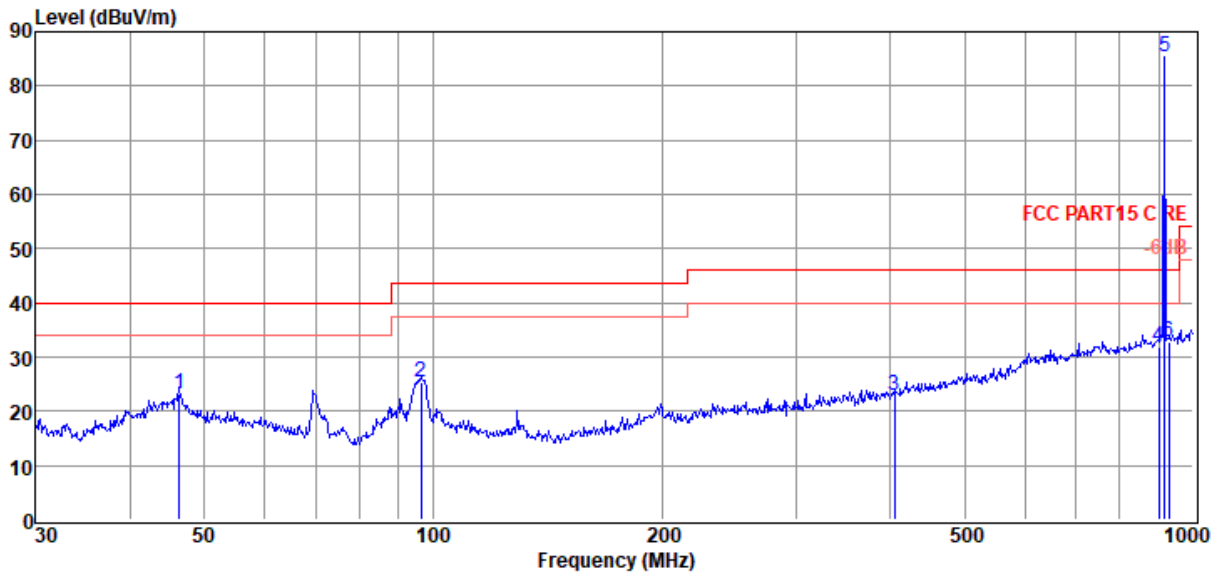


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.34	5.29	14.40	3.65	23.34	40.00	-16.66	QP	HORIZONTAL
2	96.44	10.01	11.29	3.96	25.26	43.50	-18.24	QP	HORIZONTAL
3	404.67	2.05	15.59	5.17	22.81	46.00	-23.19	QP	HORIZONTAL
4	902.00	3.12	22.14	6.48	31.74	46.00	-14.26	QP	HORIZONTAL
5	915.50	56.44	22.40	6.51	85.35	/	/	QP	HORIZONTAL
6	928.00	3.81	22.40	6.53	32.74	46.00	-13.26	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 927.5MHz Ant2

Data:  
23

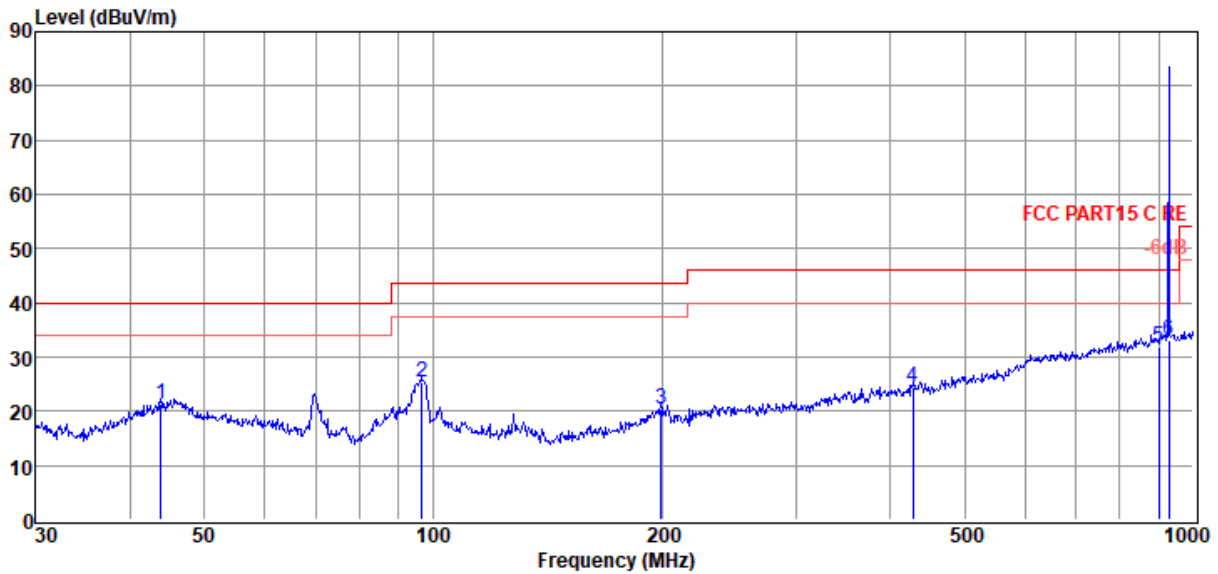


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	43.81	2.77	14.89	3.64	21.30	40.00	-18.70	QP	HORIZONTAL
2	96.78	9.92	11.35	3.97	25.24	43.50	-18.26	QP	HORIZONTAL
3	199.29	3.91	11.97	4.45	20.33	43.50	-23.17	QP	HORIZONTAL
4	428.02	3.19	16.06	5.25	24.50	46.00	-21.50	QP	HORIZONTAL
5	902.00	3.31	22.14	6.48	31.93	46.00	-14.07	QP	HORIZONTAL
6	928.00	4.26	22.40	6.53	33.19	46.00	-12.81	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 927.5MHz Ant2

Data:  
24

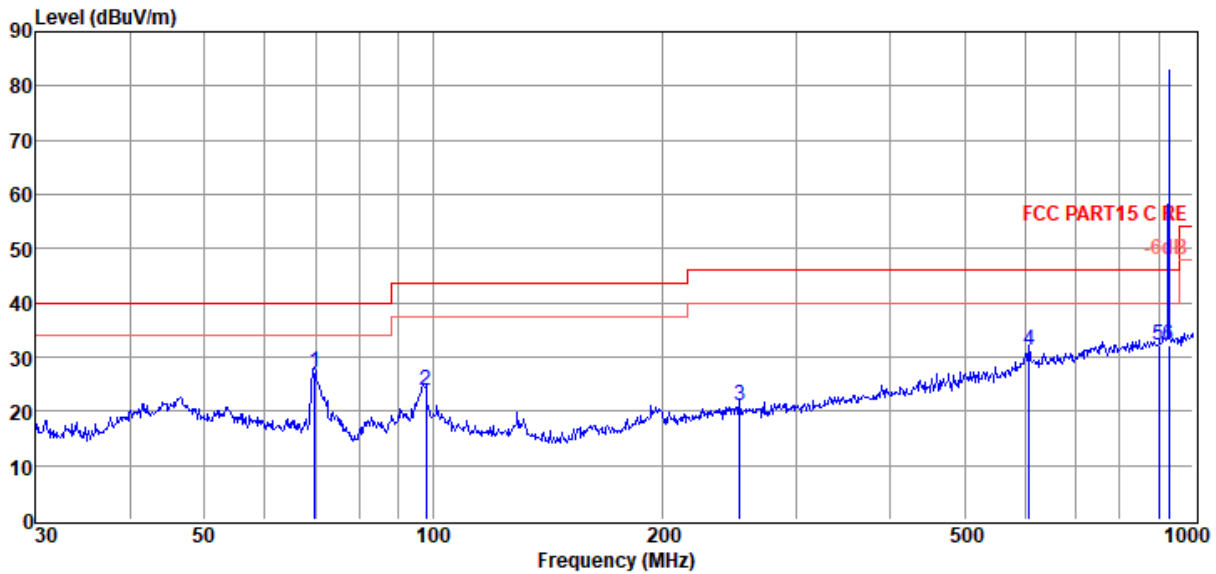


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.85	14.32	9.00	3.82	27.14	40.00	-12.86	QP	VERTICAL
2	97.80	8.38	11.48	3.97	23.83	43.50	-19.67	QP	VERTICAL
3	252.95	3.67	12.62	4.66	20.95	46.00	-25.05	QP	VERTICAL
4	607.79	6.29	19.20	5.76	31.25	46.00	-14.75	QP	VERTICAL
5	902.00	3.42	22.14	6.48	32.04	46.00	-13.96	QP	VERTICAL
6	928.00	3.38	22.40	6.53	32.31	46.00	-13.69	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 902.5MHz Ant3

Data:  
13

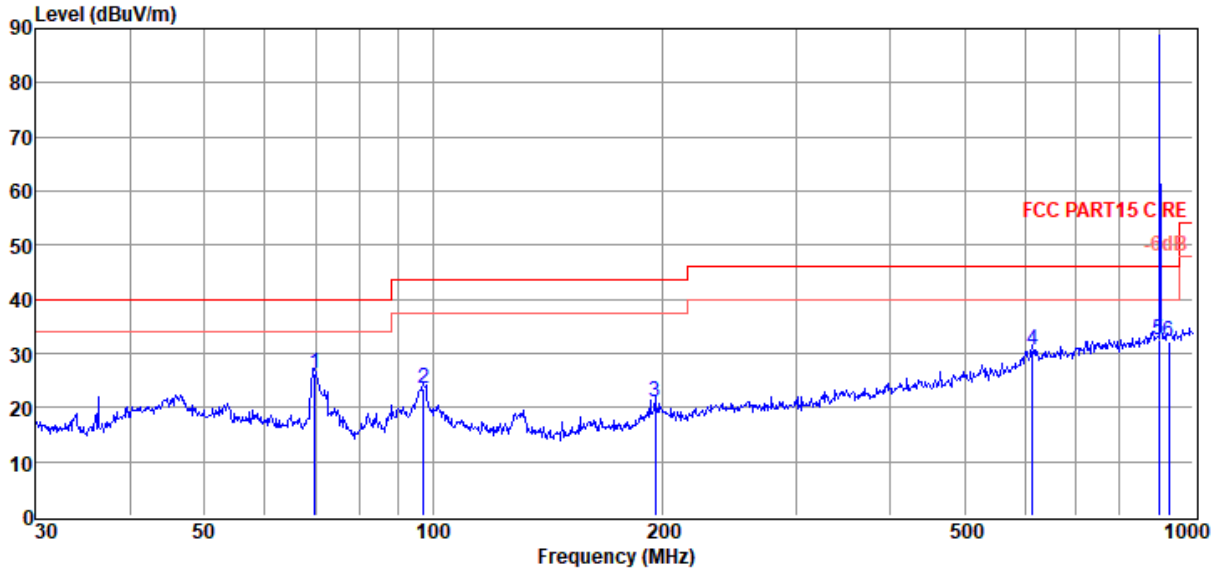


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.85	13.47	9.00	3.82	26.29	40.00	-13.71	QP	VERTICAL
2	97.12	8.14	11.41	3.97	23.52	43.50	-19.98	QP	VERTICAL
3	195.82	4.82	11.78	4.44	21.04	43.50	-22.46	QP	VERTICAL
4	614.21	5.64	19.12	5.78	30.54	46.00	-15.46	QP	VERTICAL
5	902.00	3.84	22.14	6.48	32.46	46.00	-13.54	QP	VERTICAL
6	928.00	3.39	22.40	6.53	32.32	46.00	-13.68	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 902.5MHz Ant3

Data:  
14

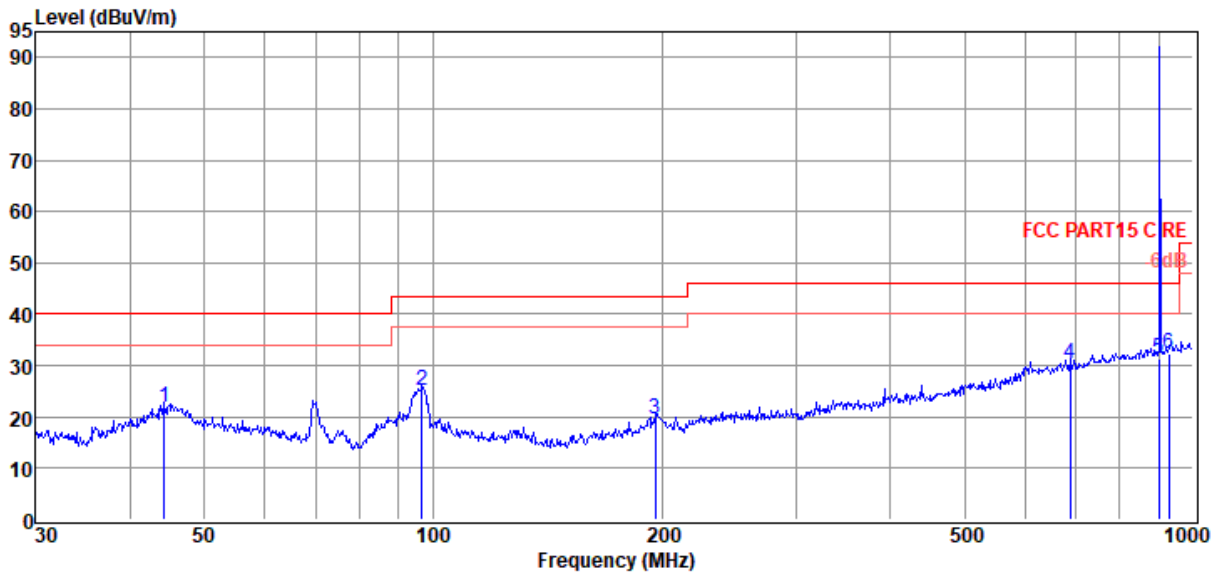


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	44.28	3.09	15.03	3.64	21.76	40.00	-18.24	QP	HORIZONTAL
2	96.78	9.93	11.35	3.97	25.25	43.50	-18.25	QP	HORIZONTAL
3	195.82	3.46	11.78	4.44	19.68	43.50	-23.82	QP	HORIZONTAL
4	689.57	5.01	19.40	5.96	30.37	46.00	-15.63	QP	HORIZONTAL
5	902.00	2.65	22.14	6.48	31.27	46.00	-14.73	QP	HORIZONTAL
6	928.00	3.32	22.40	6.53	32.25	46.00	-13.75	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-11 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 915.5MHz Ant3

Data:  
15

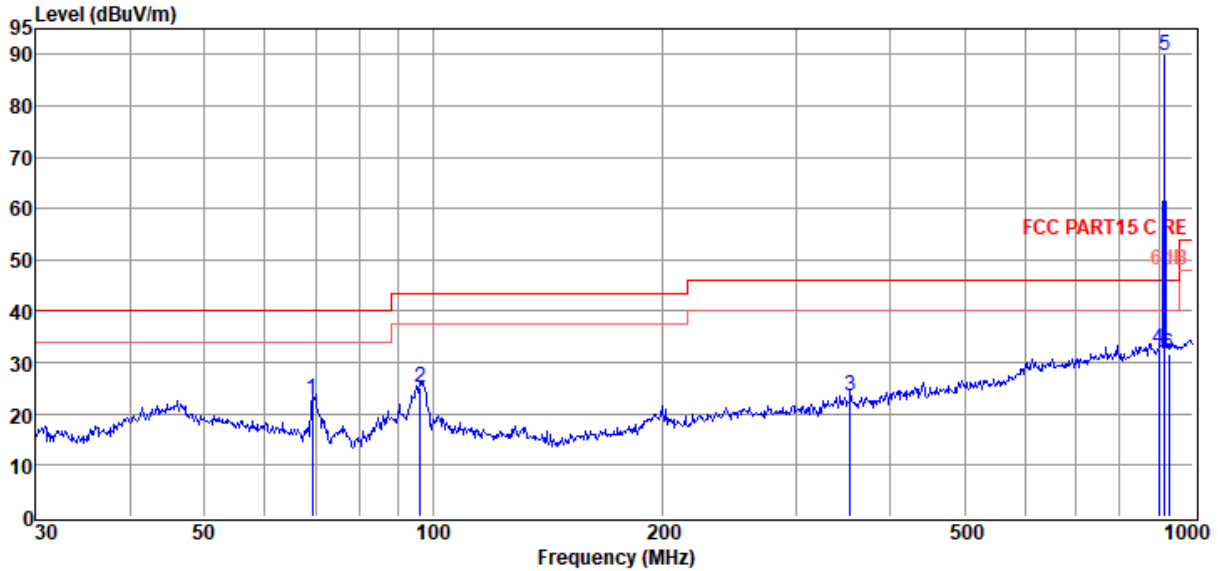

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.36	9.94	9.00	3.82	22.76	40.00	-17.24	QP	HORIZONTAL
2	96.10	9.96	11.22	3.96	25.14	43.50	-18.36	QP	HORIZONTAL
3	354.18	3.35	15.02	5.01	23.38	46.00	-22.62	QP	HORIZONTAL
4	902.00	4.14	22.14	6.48	32.76	46.00	-13.24	QP	HORIZONTAL
5	915.50	61.00	22.40	6.51	89.91	/	/	QP	HORIZONTAL
6	928.00	2.83	22.40	6.53	31.76	46.00	-14.24	QP	HORIZONTAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-11 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL  
**Memo** : 915.5MHz Ant3

Data:  
16

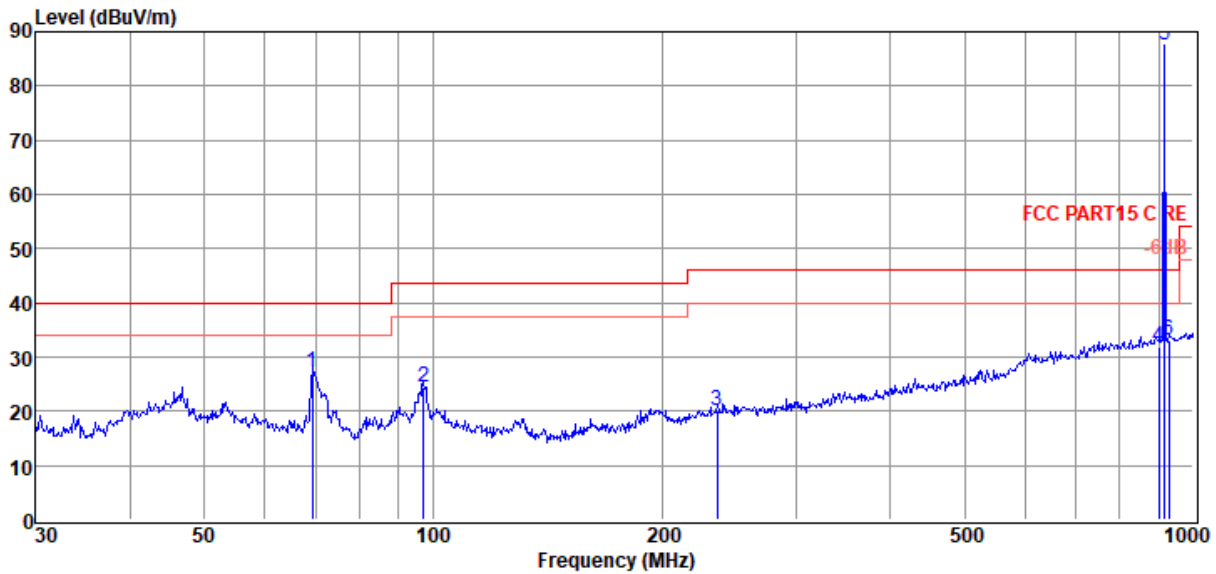

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.36	14.48	9.00	3.82	27.30	40.00	-12.70	QP	VERTICAL
2	97.12	8.90	11.41	3.97	24.28	43.50	-19.22	QP	VERTICAL
3	236.65	3.05	12.37	4.60	20.02	46.00	-25.98	QP	VERTICAL
4	902.00	3.26	22.14	6.48	31.88	46.00	-14.12	QP	VERTICAL
5	915.50	58.50	22.40	6.51	87.41	/	/	QP	VERTICAL
6	928.00	4.14	22.40	6.53	33.07	46.00	-12.93	QP	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6

**Test Date** : 2022-03-14

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 VLUB 9163 3#/3m/VERTICAL

**Memo** : 927.5MHz Ant3

Data:  
17

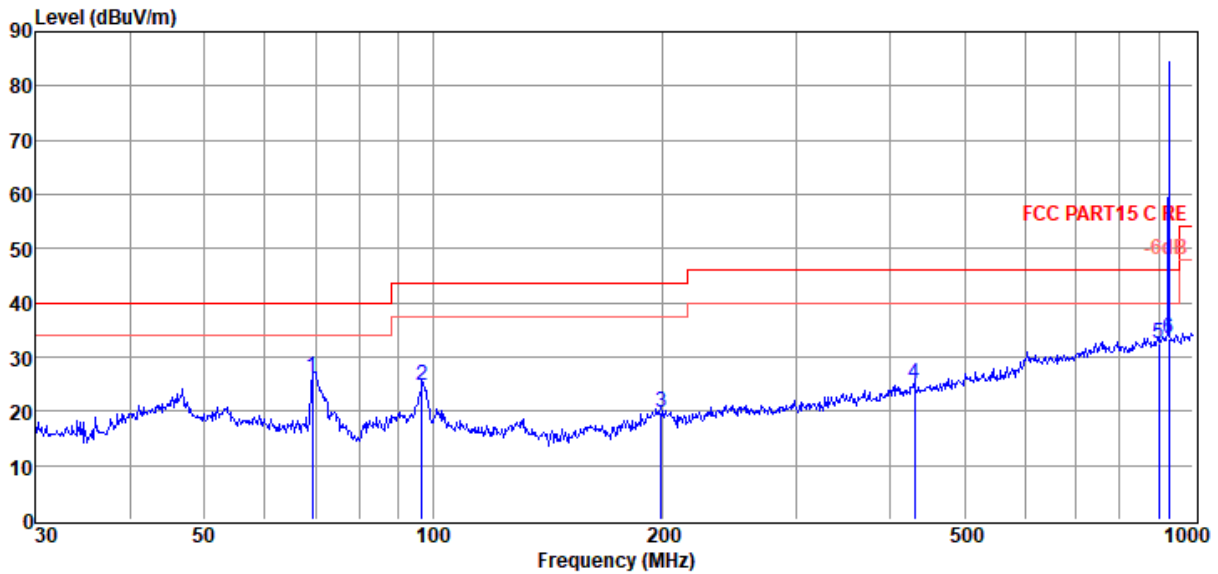

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.36	13.35	9.00	3.82	26.17	40.00	-13.83	QP	VERTICAL
2	96.78	9.36	11.35	3.97	24.68	43.50	-18.82	QP	VERTICAL
3	199.29	3.34	11.97	4.45	19.76	43.50	-23.74	QP	VERTICAL
4	429.52	3.64	16.09	5.26	24.99	46.00	-21.01	QP	VERTICAL
5	902.00	3.85	22.14	6.48	32.47	46.00	-13.53	QP	VERTICAL
6	928.00	4.38	22.40	6.53	33.31	46.00	-12.69	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC BELOW 1G.EM6  
**Test Date** : 2022-03-14 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 VLUB 9163 3#/3m/HORIZONTAL  
**Memo** : 927.5MHz Ant3

Data:  
18

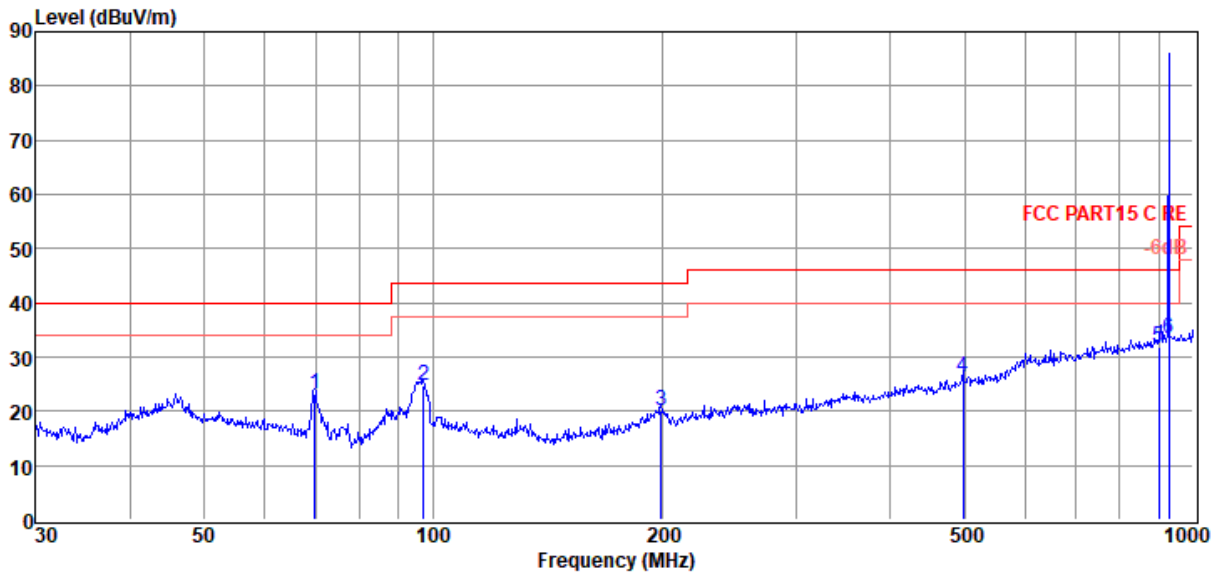


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	69.85	10.29	9.00	3.82	23.11	40.00	-16.89	QP	HORIZONTAL
2	97.12	9.50	11.41	3.97	24.88	43.50	-18.62	QP	HORIZONTAL
3	199.29	3.79	11.97	4.45	20.21	43.50	-23.29	QP	HORIZONTAL
4	497.68	3.92	17.01	5.47	26.40	46.00	-19.60	QP	HORIZONTAL
5	902.00	3.09	22.14	6.48	31.71	46.00	-14.29	QP	HORIZONTAL
6	928.00	4.32	22.40	6.53	33.25	46.00	-12.75	QP	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## Radiated Emission test (above 1GHz) TR-4-E-009 Radiated Emission Test Result

<b>Test Site</b> : DDT 3m Chamber 3# <b>Test Date</b> : 2022-02-25 <b>EUT</b> : Sub GHz FSK/OOK Transceiver Module <b>Power Supply</b> : Battery <b>Condition</b> : Temp:24.5°C,Humi:55%,Press:100.1kPa <b>Memo</b> : 902.5MHz Ant 1	C:\E3 6.111\2022 Report Data\Q21121703-1E MD1269H-915\FCC ABOVE 1G .EM6 <b>Tested By</b> : Kennys Zhang <b>Model Number</b> : LJ1269H-915 <b>Test Mode</b> : Tx Mode <b>Antenna/Distance</b> : 2021 BBHA 9120D 3#/3m/HORIZONTAL
---	---

Data: 26

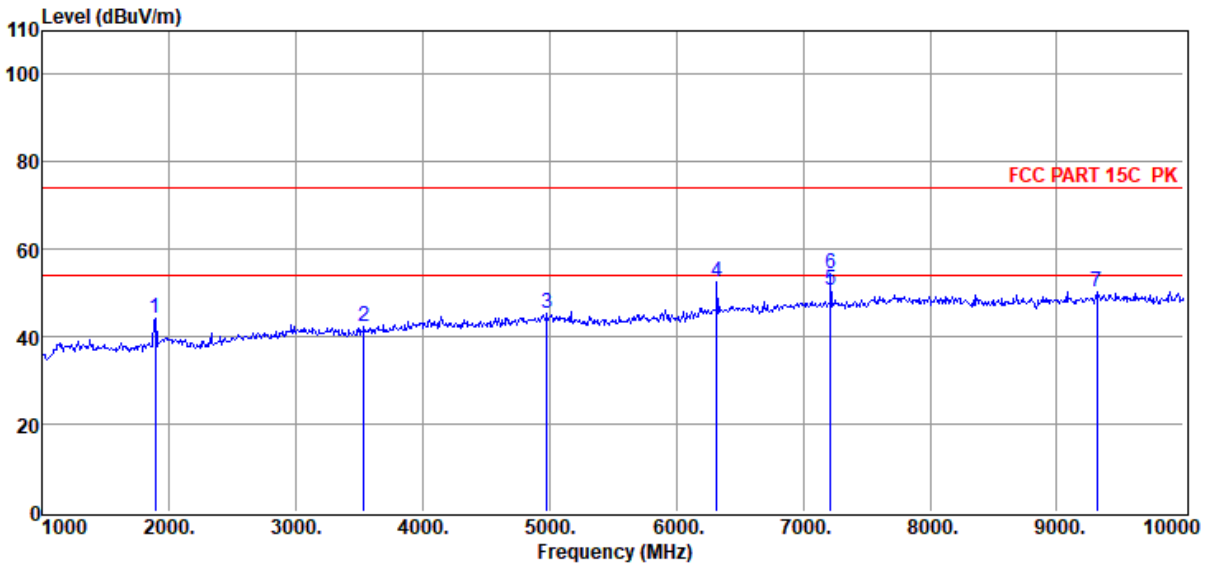


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	54.73	26.42	39.24	1.55	0.66	44.12	74.00	-29.88	Peak	HORIZONTAL
2	3538.00	50.21	29.53	40.06	1.72	0.83	42.23	74.00	-31.77	Peak	HORIZONTAL
3	4978.00	49.23	33.03	40.40	2.53	0.91	45.30	74.00	-28.70	Peak	HORIZONTAL
4	6319.00	53.69	34.77	40.24	3.18	1.07	52.47	74.00	-21.53	Peak	HORIZONTAL
5	7219.00	50.08	36.18	39.72	3.07	0.98	50.59	54.00	-3.41	Average	HORIZONTAL
6	7219.00	54.02	36.18	39.72	3.07	0.98	54.53	74.00	-19.47	Peak	HORIZONTAL
7	9316.00	46.97	38.55	40.12	3.51	1.24	50.15	74.00	-23.85	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6  
**Test Date** : 2022-02-25 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 902.5MHz Ant 1

Data: 27

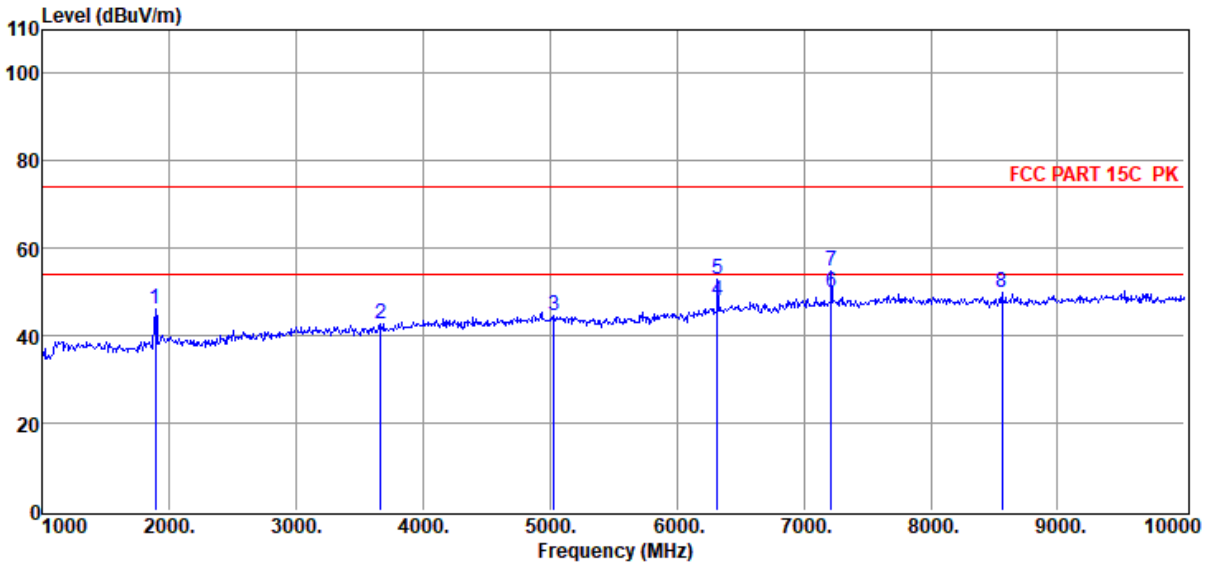

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	56.71	26.42	39.24	1.55	0.66	46.10	74.00	-27.90	Peak	VERTICAL
2	3664.00	50.22	29.96	40.10	1.83	0.84	42.75	74.00	-31.25	Peak	VERTICAL
3	5032.00	48.46	33.08	40.40	2.54	0.92	44.60	74.00	-29.40	Peak	VERTICAL
4	6319.00	49.18	34.77	40.24	3.18	1.07	47.96	54.00	-6.04	Average	VERTICAL
5	6319.00	54.06	34.77	40.24	3.18	1.07	52.84	74.00	-21.16	Peak	VERTICAL
6	7219.00	49.25	36.18	39.72	3.07	0.98	49.76	54.00	-4.24	Average	VERTICAL
7	7219.00	54.42	36.18	39.72	3.07	0.98	54.93	74.00	-19.07	Peak	VERTICAL
8	8560.00	47.63	37.86	39.86	3.23	1.18	50.04	74.00	-23.96	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#  
**Test Date** : 2022-02-25  
**EUT** : Sub GHz FSK/OOK Transceiver Module  
**Power Supply** : Battery  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa  
**Memo** : 915.5MHz Ant 1

**C:\E3 6.111\2022 Report Data\Q21121703-1E MD1269H-915\FCC ABOVE 1G .EM6**  
**Tested By** : Kennys Zhang  
**Model Number** : LJ1269H-915  
**Test Mode** : Tx Mode  
**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

Data: 28

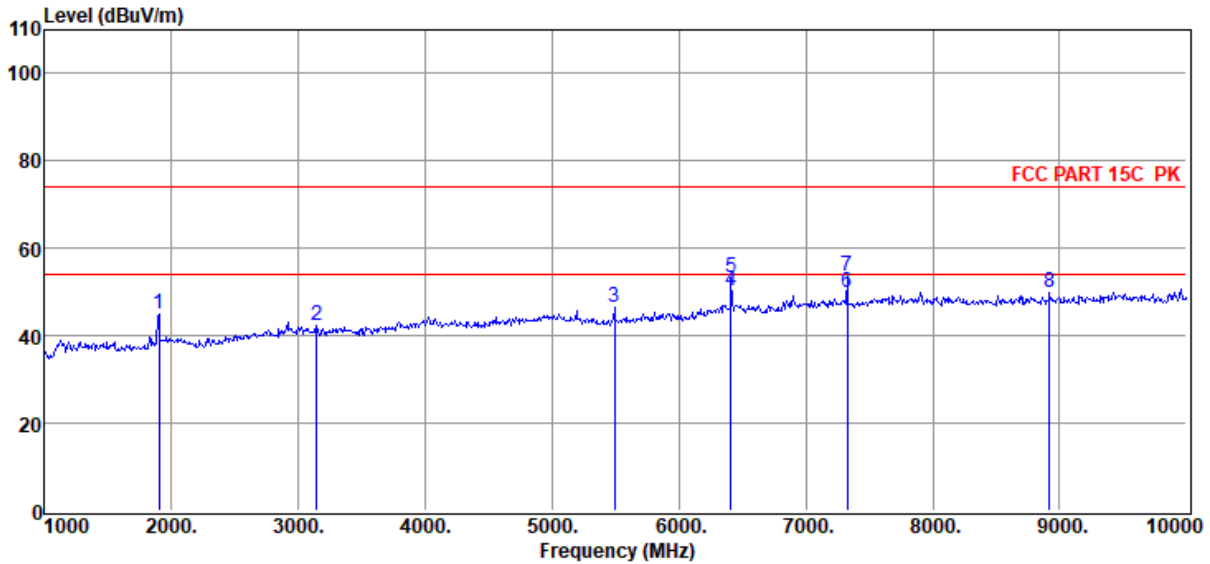

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1900.00	55.42	26.44	39.25	1.56	0.66	44.83	74.00	-29.17	Peak	VERTICAL
2	3142.00	50.08	29.47	39.94	1.82	0.80	42.23	74.00	-31.77	Peak	VERTICAL
3	5491.00	50.41	32.81	40.45	2.57	1.02	46.36	74.00	-27.64	Peak	VERTICAL
4	6409.00	51.37	34.98	40.17	3.23	1.05	50.46	54.00	-3.54	Average	VERTICAL
5	6409.00	54.33	34.98	40.17	3.23	1.05	53.42	74.00	-20.58	Peak	VERTICAL
6	7327.00	49.28	36.26	39.73	3.10	1.01	49.92	54.00	-4.08	Average	VERTICAL
7	7327.00	53.15	36.26	39.73	3.10	1.01	53.79	74.00	-20.21	Peak	VERTICAL
8	8920.00	46.90	38.22	39.89	3.31	1.18	49.72	74.00	-24.28	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 915.5MHz Ant 1

Data: 29

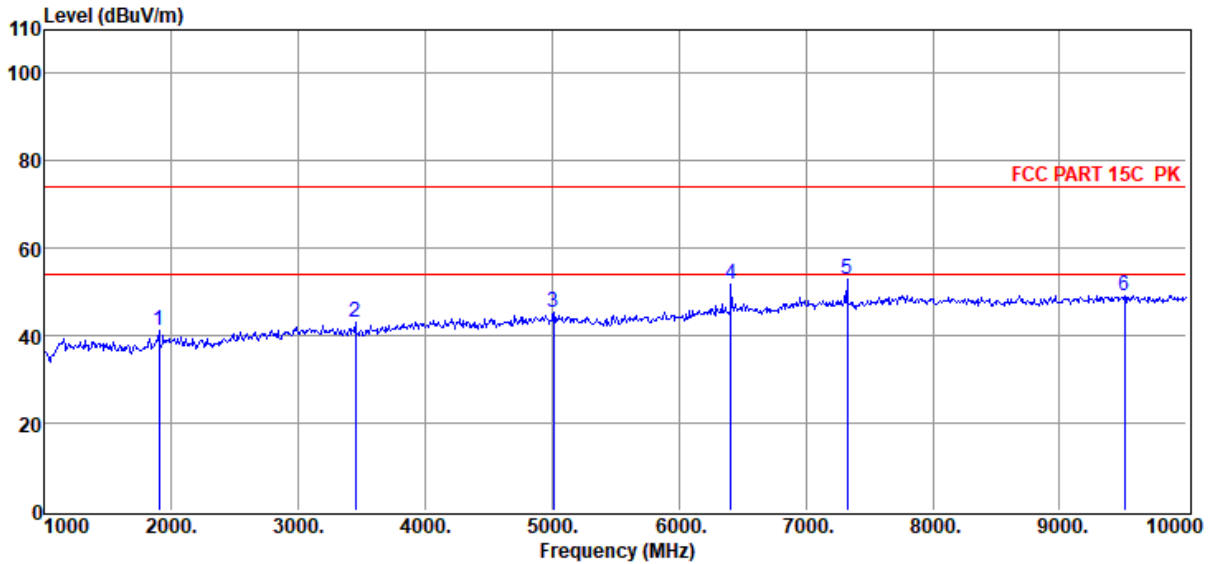

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1900.00	51.94	26.44	39.25	1.56	0.66	41.35	74.00	-32.65	Peak	HORIZONTAL
2	3448.00	51.21	29.41	40.03	1.71	0.82	43.12	74.00	-30.88	Peak	HORIZONTAL
3	5014.00	49.03	33.09	40.40	2.54	0.91	45.17	74.00	-28.83	Peak	HORIZONTAL
4	6409.00	52.56	34.98	40.17	3.23	1.05	51.65	74.00	-22.35	Peak	HORIZONTAL
5	7327.00	52.12	36.26	39.73	3.10	1.01	52.76	74.00	-21.24	Peak	HORIZONTAL
6	9514.00	45.97	38.69	40.26	3.62	1.28	49.30	74.00	-24.70	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 928.5MHz Ant 1

Data: 30

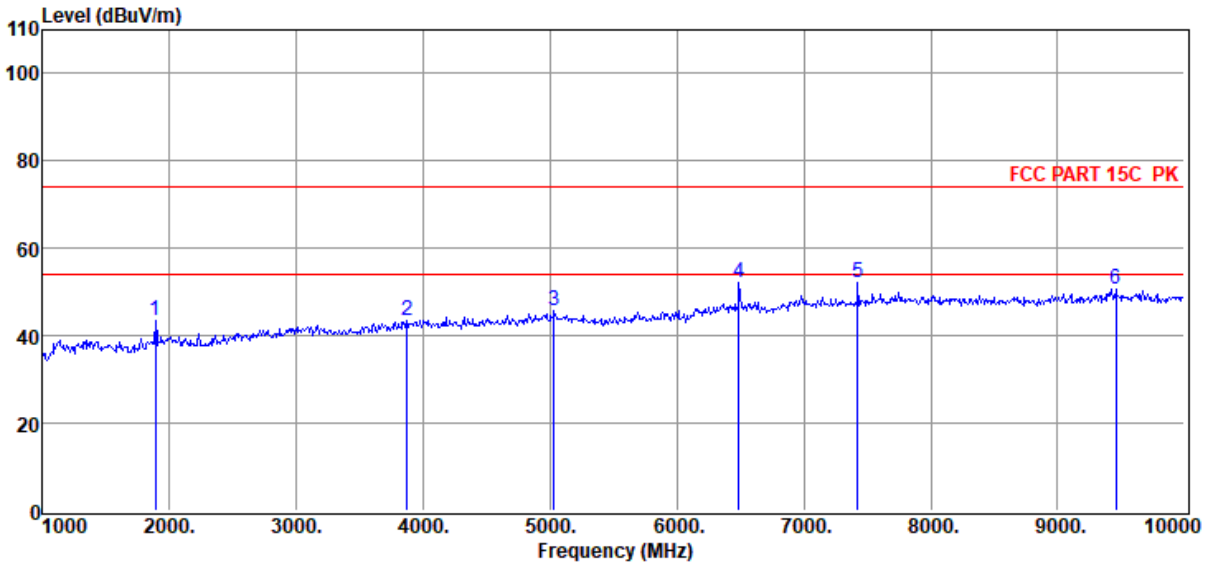

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	54.27	26.42	39.24	1.55	0.66	43.66	74.00	-30.34	Peak	HORIZONTAL
2	3871.00	50.06	30.66	40.16	2.00	0.85	43.41	74.00	-30.59	Peak	HORIZONTAL
3	5032.00	49.63	33.08	40.40	2.54	0.92	45.77	74.00	-28.23	Peak	HORIZONTAL
4	6490.00	52.84	35.18	40.11	3.27	1.04	52.22	74.00	-21.78	Peak	HORIZONTAL
5	7426.00	51.36	36.34	39.74	3.12	1.04	52.12	74.00	-21.88	Peak	HORIZONTAL
6	9460.00	47.28	38.67	40.22	3.60	1.27	50.60	74.00	-23.40	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#  
**Test Date** : 2022-02-25  
**EUT** : Sub GHz FSK/OOK Transceiver Module  
**Power Supply** : Battery  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa  
**Memo** : 928.5MHz Ant 1

**C:\E3 6.111\2022 Report Data\Q21121703-1E MD1269H-915\FCC ABOVE 1G .EM6**  
**Tested By** : Kennys Zhang  
**Model Number** : LJ1269H-915  
**Test Mode** : Tx Mode  
**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

Data: 31

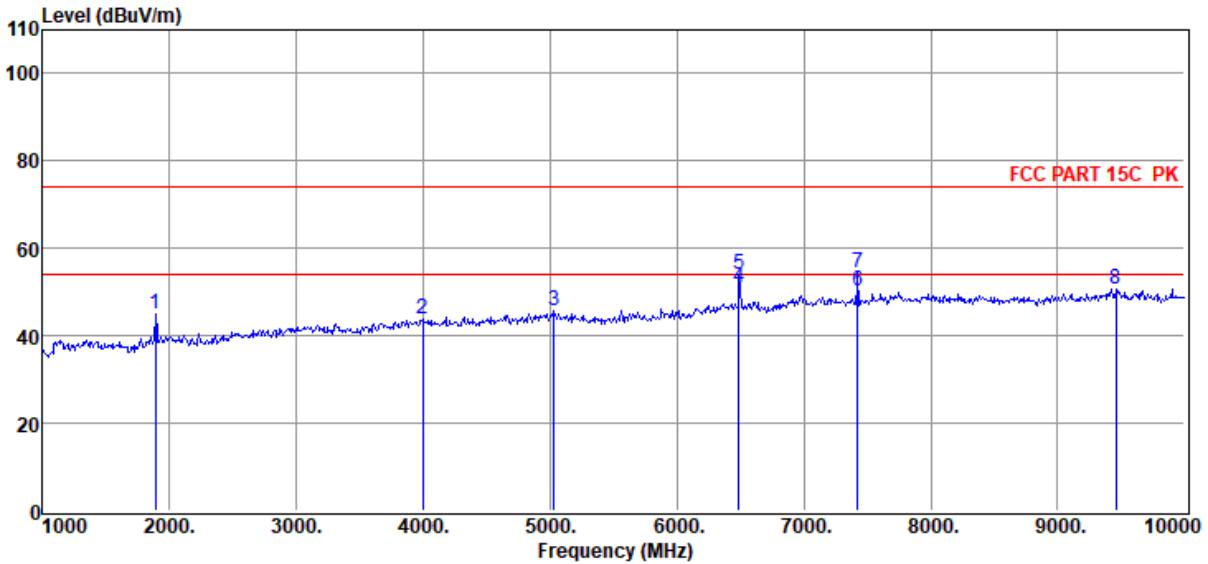


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	55.43	26.42	39.24	1.55	0.66	44.82	74.00	-29.18	Peak	VERTICAL
2	3997.00	50.06	31.09	40.20	2.11	0.86	43.92	74.00	-30.08	Peak	VERTICAL
3	5032.00	49.63	33.08	40.40	2.54	0.92	45.77	74.00	-28.23	Peak	VERTICAL
4	6490.00	51.48	35.18	40.11	3.27	1.04	50.86	54.00	-3.14	Average	VERTICAL
5	6490.00	54.53	35.18	40.11	3.27	1.04	53.91	74.00	-20.09	Peak	VERTICAL
6	7426.00	49.60	36.34	39.74	3.12	1.04	50.36	54.00	-3.64	Average	VERTICAL
7	7426.00	53.55	36.34	39.74	3.12	1.04	54.31	74.00	-19.69	Peak	VERTICAL
8	9460.00	47.28	38.67	40.22	3.60	1.27	50.60	74.00	-23.40	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6  
**Test Date** : 2022-02-25 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 902.5MHz Ant 2

Data: 32

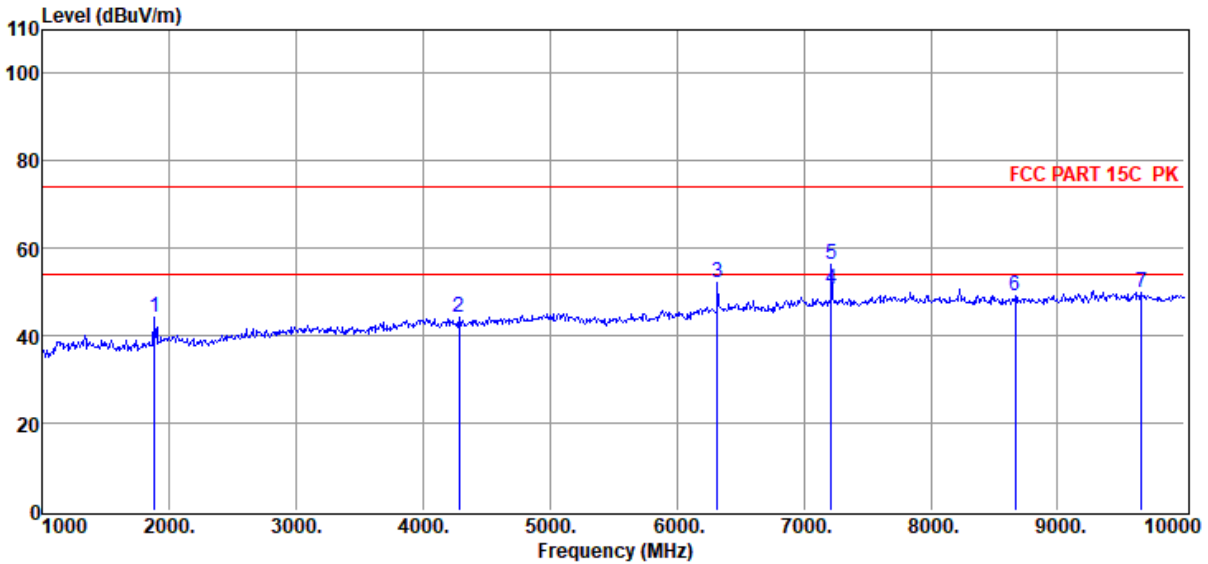

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1882.00	54.73	26.39	39.22	1.55	0.66	44.11	74.00	-29.89	Peak	VERTICAL
2	4285.00	50.07	31.33	40.26	2.25	0.87	44.26	74.00	-29.74	Peak	VERTICAL
3	6319.00	53.20	34.77	40.24	3.18	1.07	51.98	74.00	-22.02	Peak	VERTICAL
4	7219.00	50.02	36.18	39.72	3.07	0.98	50.53	54.00	-3.47	Average	VERTICAL
5	7219.00	55.73	36.18	39.72	3.07	0.98	56.24	74.00	-17.76	Peak	VERTICAL
6	8668.00	46.65	37.97	39.87	3.26	1.18	49.19	74.00	-24.81	Peak	VERTICAL
7	9658.00	46.69	38.61	40.36	3.64	1.31	49.89	74.00	-24.11	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 902.5MHz Ant 2

Data: 33

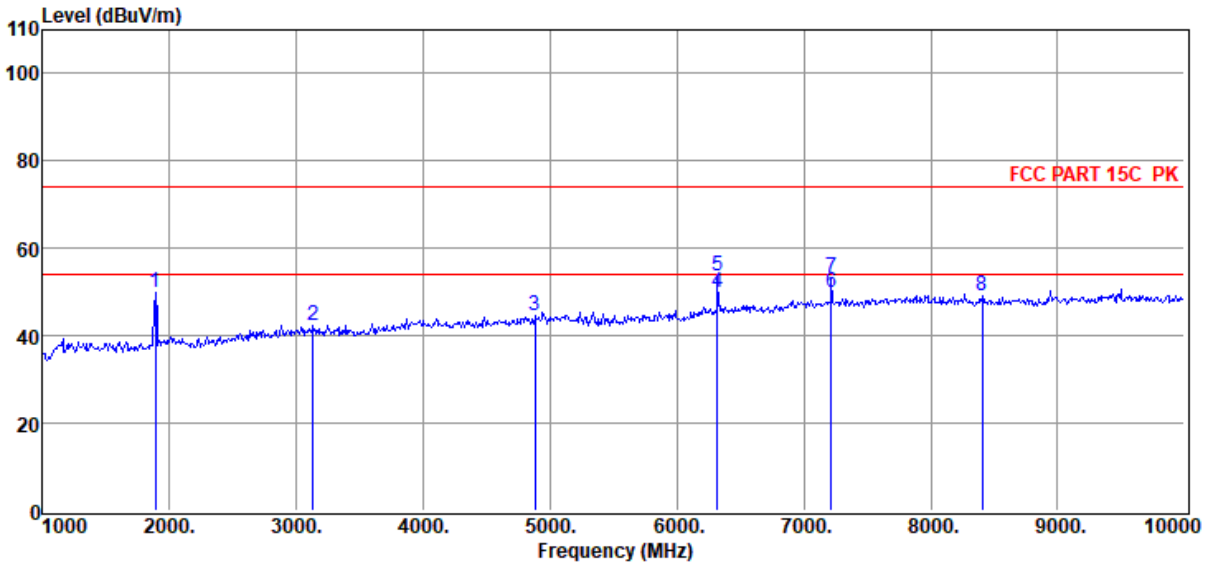

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	60.49	26.42	39.24	1.55	0.66	49.88	74.00	-24.12	Peak	HORIZONTAL
2	3133.00	50.10	29.47	39.94	1.82	0.80	42.25	74.00	-31.75	Peak	HORIZONTAL
3	4879.00	48.86	32.71	40.38	2.50	0.90	44.59	74.00	-29.41	Peak	HORIZONTAL
4	6319.00	51.08	34.77	40.24	3.18	1.07	49.86	54.00	-4.14	Average	HORIZONTAL
5	6319.00	54.92	34.77	40.24	3.18	1.07	53.70	74.00	-20.30	Peak	HORIZONTAL
6	7219.00	49.28	36.18	39.72	3.07	0.98	49.79	54.00	-4.21	Average	HORIZONTAL
7	7219.00	52.76	36.18	39.72	3.07	0.98	53.27	74.00	-20.73	Peak	HORIZONTAL
8	8407.00	46.91	37.65	39.84	3.21	1.18	49.11	74.00	-24.89	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 915.5MHz Ant 2

Data: 34

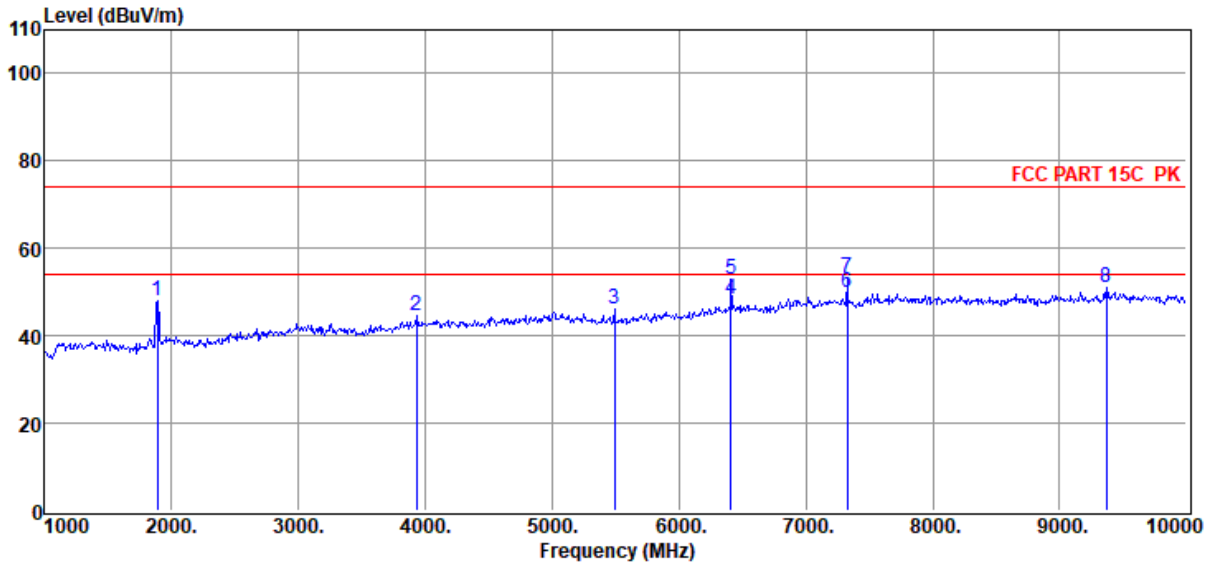

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	58.72	26.42	39.24	1.55	0.66	48.11	74.00	-25.89	Peak	HORIZONTAL
2	3934.00	50.98	30.88	40.18	2.05	0.86	44.59	74.00	-29.41	Peak	HORIZONTAL
3	5491.00	50.05	32.81	40.45	2.57	1.02	46.00	74.00	-28.00	Peak	HORIZONTAL
4	6409.00	49.28	34.98	40.17	3.23	1.05	48.37	54.00	-5.63	Average	HORIZONTAL
5	6409.00	53.72	34.98	40.17	3.23	1.05	52.81	74.00	-21.19	Peak	HORIZONTAL
6	7327.00	49.18	36.26	39.73	3.10	1.01	49.82	54.00	-4.18	Average	HORIZONTAL
7	7327.00	52.81	36.26	39.73	3.10	1.01	53.45	74.00	-20.55	Peak	HORIZONTAL
8	9370.00	47.62	38.60	40.16	3.54	1.25	50.85	74.00	-23.15	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 915.5MHz Ant 2

Data: 35

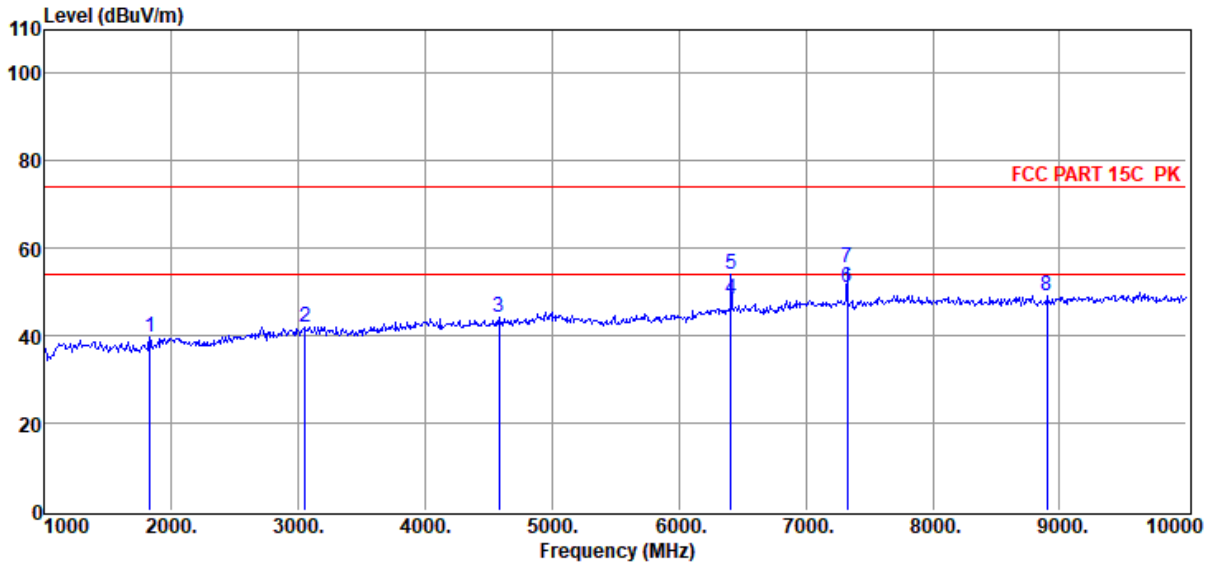

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1828.00	50.47	26.25	39.14	1.52	0.65	39.75	74.00	-34.25	Peak	VERTICAL
2	3052.00	49.84	29.49	39.92	1.85	0.79	42.05	74.00	-31.95	Peak	VERTICAL
3	4582.00	49.46	31.76	40.32	2.39	0.89	44.18	74.00	-29.82	Peak	VERTICAL
4	6409.00	49.28	34.98	40.17	3.23	1.05	48.37	54.00	-5.63	Average	VERTICAL
5	6409.00	54.91	34.98	40.17	3.23	1.05	54.00	74.00	-20.00	Peak	VERTICAL
6	7327.00	50.28	36.26	39.73	3.10	1.01	50.92	54.00	-3.08	Average	VERTICAL
7	7327.00	55.11	36.26	39.73	3.10	1.01	55.75	74.00	-18.25	Peak	VERTICAL
8	8902.00	46.35	38.20	39.89	3.31	1.18	49.15	74.00	-24.85	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6  
**Test Date** : 2022-02-25 **Tested By** : Kennys Zhang  
**EUT** : Sub GHz FSK/OOK Transceiver Module **Model Number** : LJ1269H-915  
**Power Supply** : Battery **Test Mode** : Tx Mode  
**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 928.5MHz Ant 2

Data: 36

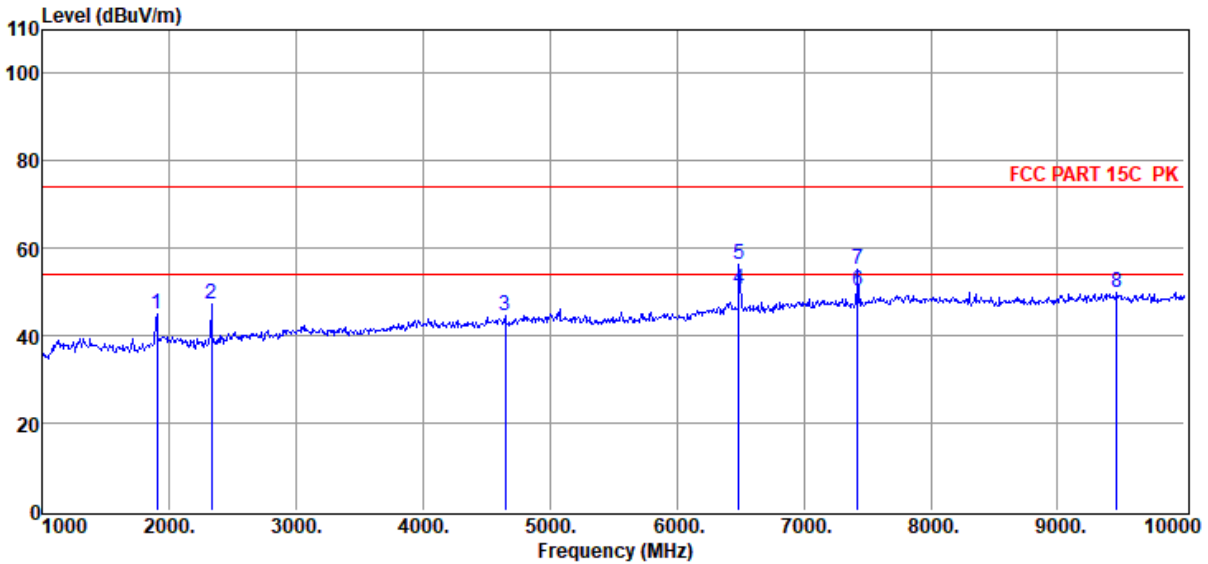

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1900.00	55.50	26.44	39.25	1.56	0.66	44.91	74.00	-29.09	Peak	VERTICAL
2	2332.00	56.97	27.30	39.57	1.69	0.72	47.11	74.00	-26.89	Peak	VERTICAL
3	4645.00	49.56	31.96	40.33	2.41	0.89	44.49	74.00	-29.51	Peak	VERTICAL
4	6490.00	51.34	35.18	40.11	3.27	1.04	50.72	54.00	-3.28	Average	VERTICAL
5	6490.00	57.08	35.18	40.11	3.27	1.04	56.46	74.00	-17.54	Peak	VERTICAL
6	7426.00	49.52	36.34	39.74	3.12	1.04	50.28	54.00	-3.72	Average	VERTICAL
7	7426.00	54.27	36.34	39.74	3.12	1.04	55.03	74.00	-18.97	Peak	VERTICAL
8	9469.00	46.63	38.68	40.23	3.60	1.27	49.95	74.00	-24.05	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 928.5MHz Ant 2

Data: 37

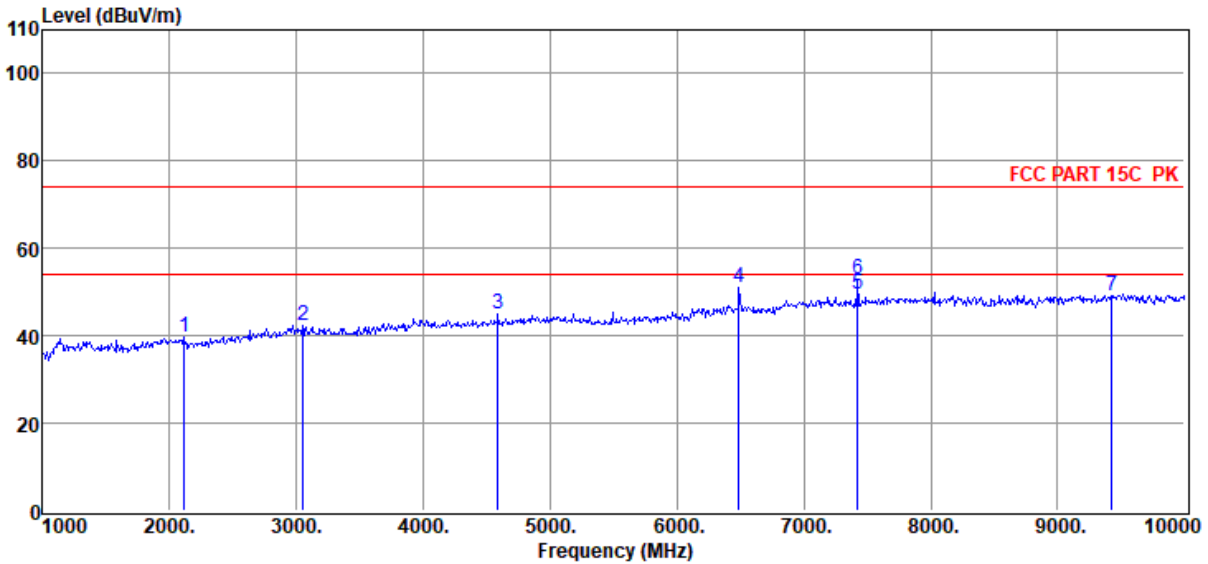

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2116.00	49.87	26.91	39.46	1.63	0.69	39.64	74.00	-34.36	Peak	HORIZONTAL
2	3052.00	49.99	29.49	39.92	1.85	0.79	42.20	74.00	-31.80	Peak	HORIZONTAL
3	4591.00	50.11	31.79	40.32	2.39	0.89	44.86	74.00	-29.14	Peak	HORIZONTAL
4	6490.00	51.69	35.18	40.11	3.27	1.04	51.07	74.00	-22.93	Peak	HORIZONTAL
5	7426.00	48.95	36.34	39.74	3.12	1.04	49.71	54.00	-4.29	Average	HORIZONTAL
6	7426.00	52.10	36.34	39.74	3.12	1.04	52.86	74.00	-21.14	Peak	HORIZONTAL
7	9424.00	45.89	38.64	40.20	3.58	1.26	49.17	74.00	-24.83	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 902.5MHz Ant 3

Data: 38

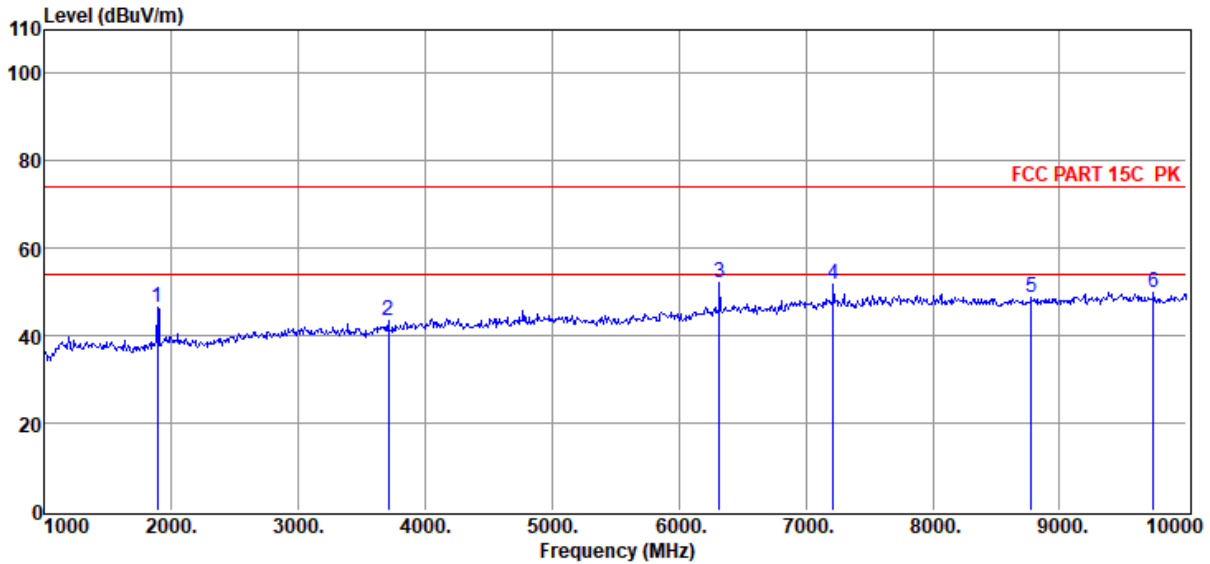

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	57.05	26.42	39.24	1.55	0.66	46.44	74.00	-27.56	Peak	HORIZONTAL
2	3709.00	50.90	30.11	40.11	1.87	0.84	43.61	74.00	-30.39	Peak	HORIZONTAL
3	6319.00	53.29	34.77	40.24	3.18	1.07	52.07	74.00	-21.93	Peak	HORIZONTAL
4	7219.00	51.16	36.18	39.72	3.07	0.98	51.67	74.00	-22.33	Peak	HORIZONTAL
5	8776.00	45.98	38.08	39.88	3.28	1.18	48.64	74.00	-25.36	Peak	HORIZONTAL
6	9739.00	46.63	38.56	40.42	3.64	1.32	49.73	74.00	-24.27	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 902.5MHz Ant 3

Data: 39

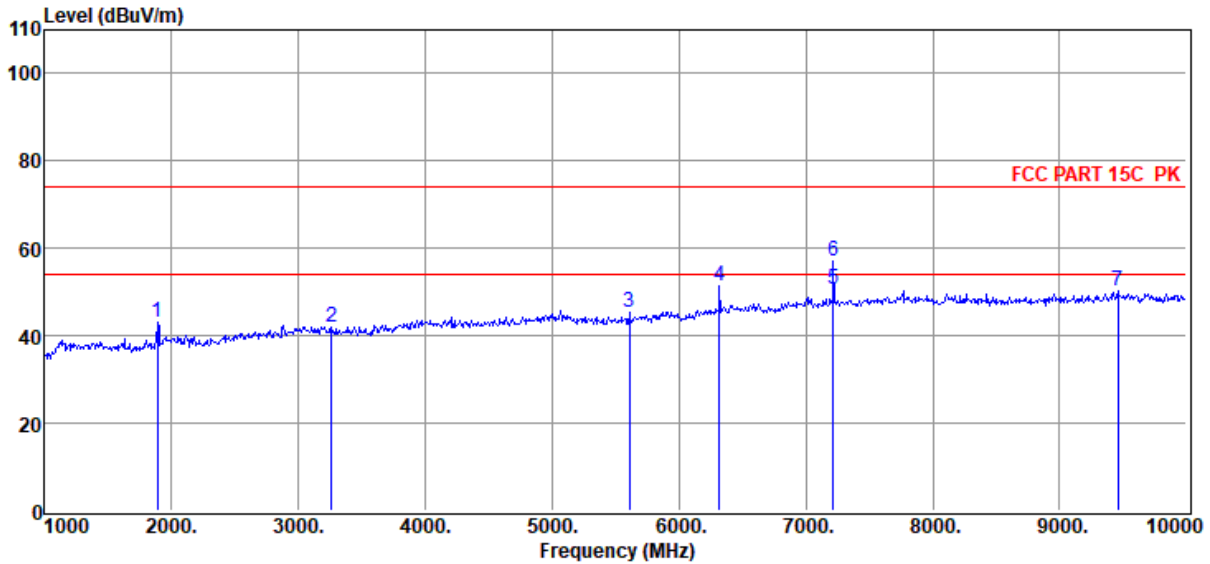

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	53.70	26.42	39.24	1.55	0.66	43.09	74.00	-30.91	Peak	VERTICAL
2	3259.00	49.85	29.45	39.98	1.78	0.81	41.91	74.00	-32.09	Peak	VERTICAL
3	5608.00	48.86	33.06	40.46	2.67	1.05	45.18	74.00	-28.82	Peak	VERTICAL
4	6319.00	52.47	34.77	40.24	3.18	1.07	51.25	74.00	-22.75	Peak	VERTICAL
5	7219.00	50.05	36.18	39.72	3.07	0.98	50.56	54.00	-3.44	Average	VERTICAL
6	7219.00	56.70	36.18	39.72	3.07	0.98	57.21	74.00	-16.79	Peak	VERTICAL
7	9460.00	46.86	38.67	40.22	3.60	1.27	50.18	74.00	-23.82	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 915.5MHz Ant 3

Data: 40

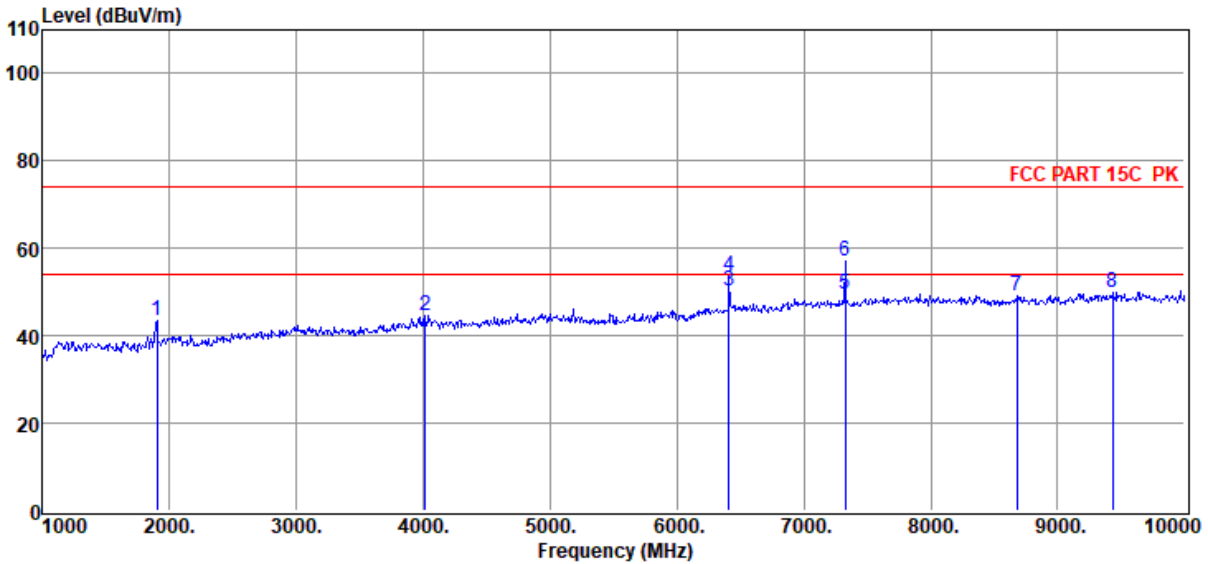

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1900.00	54.15	26.44	39.25	1.56	0.66	43.56	74.00	-30.44	Peak	VERTICAL
2	4015.00	50.62	31.11	40.20	2.12	0.86	44.51	74.00	-29.49	Peak	VERTICAL
3	6409.00	51.28	34.98	40.17	3.23	1.05	50.37	54.00	-3.63	Average	VERTICAL
4	6409.00	54.64	34.98	40.17	3.23	1.05	53.73	74.00	-20.27	Peak	VERTICAL
5	7327.00	48.74	36.26	39.73	3.10	1.01	49.38	54.00	-4.62	Average	VERTICAL
6	7327.00	56.34	36.26	39.73	3.10	1.01	56.98	74.00	-17.02	Peak	VERTICAL
7	8677.00	46.62	37.98	39.87	3.26	1.18	49.17	74.00	-24.83	Peak	VERTICAL
8	9433.00	46.48	38.65	40.20	3.58	1.26	49.77	74.00	-24.23	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 915.5MHz Ant 3

Data: 41

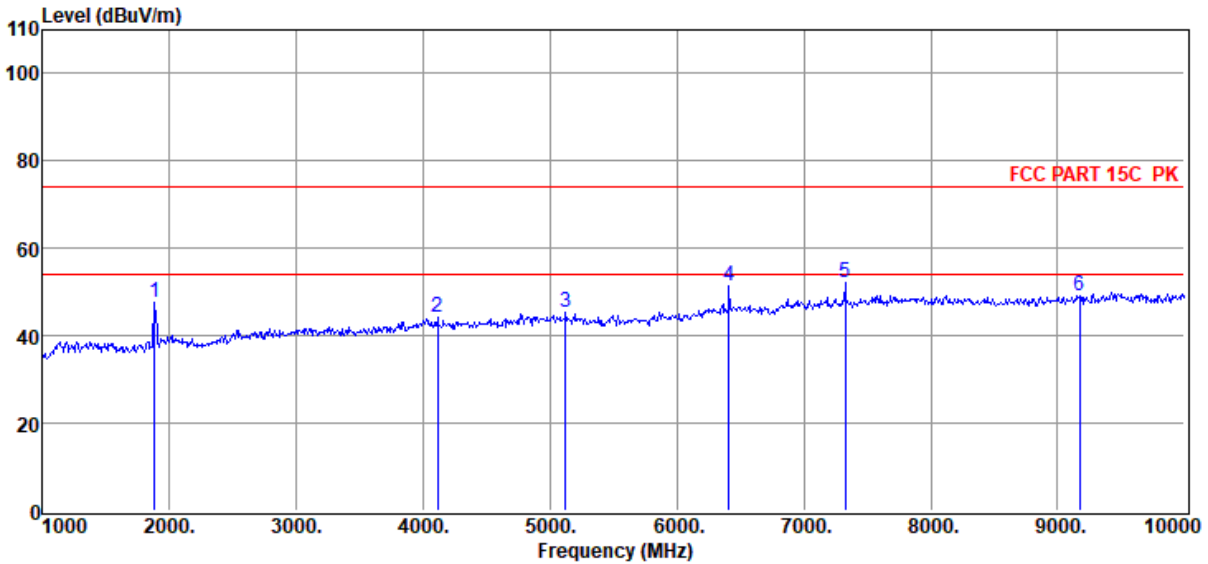

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	1882.00	58.34	26.39	39.22	1.55	0.66	47.72	74.00	-26.28	Peak	HORIZONTAL
2	4114.00	50.29	31.19	40.22	2.17	0.87	44.30	74.00	-29.70	Peak	HORIZONTAL
3	5122.00	49.27	33.03	40.41	2.55	0.94	45.38	74.00	-28.62	Peak	HORIZONTAL
4	6409.00	52.20	34.98	40.17	3.23	1.05	51.29	74.00	-22.71	Peak	HORIZONTAL
5	7327.00	51.49	36.26	39.73	3.10	1.01	52.13	74.00	-21.87	Peak	HORIZONTAL
6	9172.00	46.23	38.44	40.02	3.43	1.21	49.29	74.00	-24.71	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 927.5MHz Ant 3

Data: 42

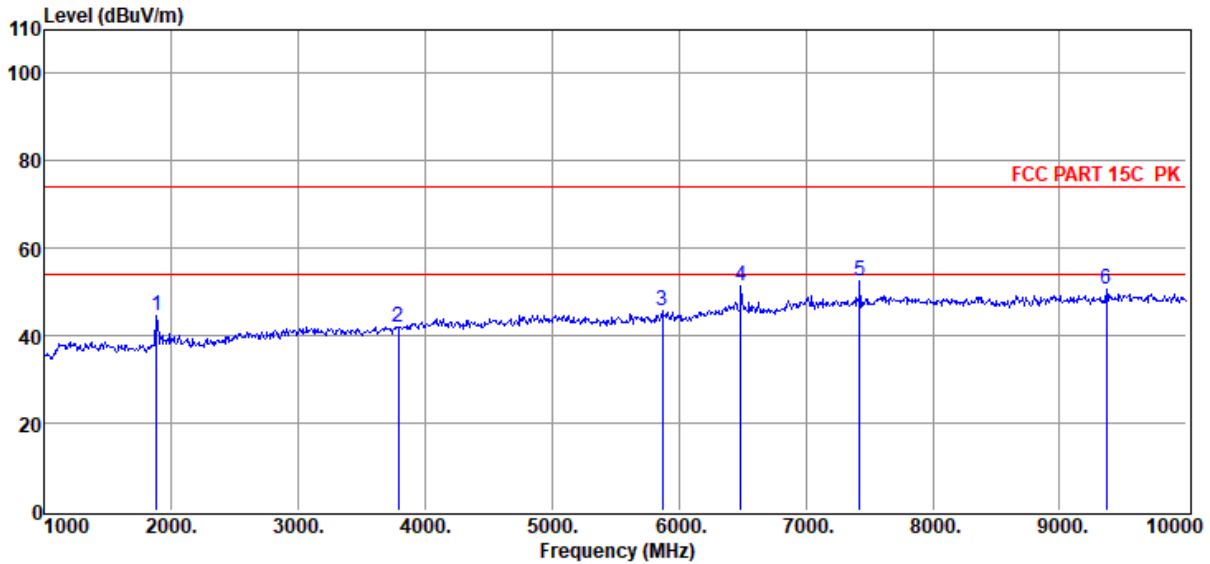

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1882.00	55.29	26.39	39.22	1.55	0.66	44.67	74.00	-29.33	Peak	HORIZONTAL
2	3790.00	49.07	30.39	40.14	1.93	0.85	42.10	74.00	-31.90	Peak	HORIZONTAL
3	5869.00	48.70	33.69	40.49	2.91	1.11	45.92	74.00	-28.08	Peak	HORIZONTAL
4	6490.00	52.13	35.18	40.11	3.27	1.04	51.51	74.00	-22.49	Peak	HORIZONTAL
5	7426.00	51.67	36.34	39.74	3.12	1.04	52.43	74.00	-21.57	Peak	HORIZONTAL
6	9370.00	47.24	38.60	40.16	3.54	1.25	50.47	74.00	-23.53	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

C:\E3 6.111\2022 Report Data\Q21121703-1E  
MD1269H-915\FCC ABOVE 1G .EM6

**Test Date** : 2022-02-25

**Tested By** : Kennys Zhang

**EUT** : Sub GHz FSK/OOK Transceiver Module

**Model Number** : LJ1269H-915

**Power Supply** : Battery


**Test Mode** : Tx Mode

**Condition** : Temp:24.5°C,Humi:55%,Press:100.1kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 927.5MHz Ant 3

Data: 43

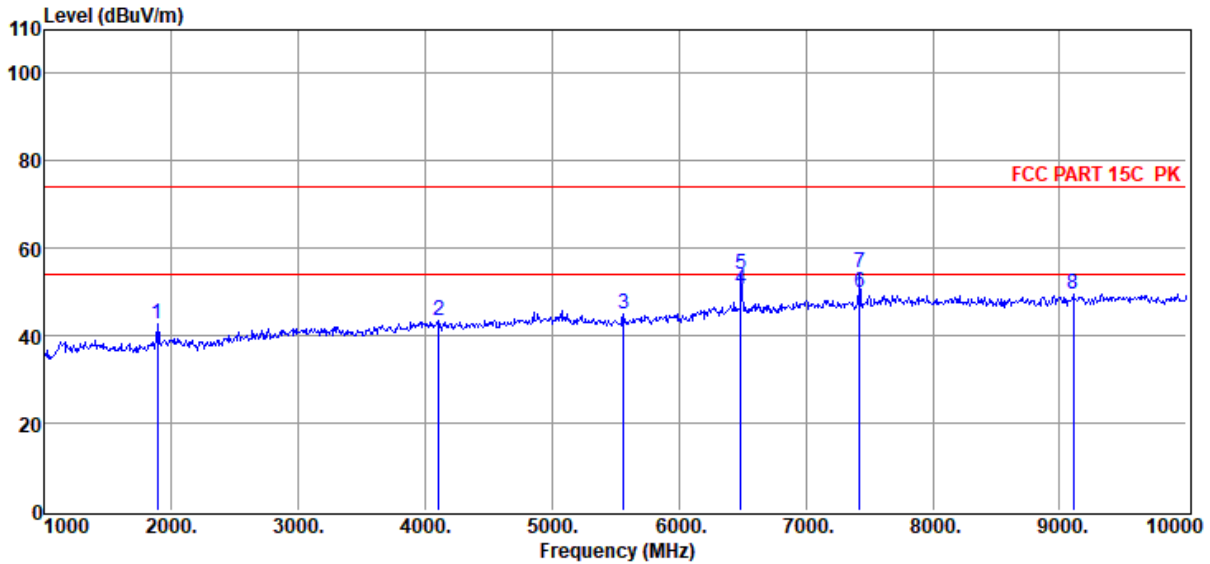

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1891.00	53.48	26.42	39.24	1.55	0.66	42.87	74.00	-31.13	Peak	VERTICAL
2	4105.00	49.41	31.18	40.22	2.16	0.87	43.40	74.00	-30.60	Peak	VERTICAL
3	5563.00	48.85	32.95	40.46	2.63	1.04	45.01	74.00	-28.99	Peak	VERTICAL
4	6490.00	51.46	35.18	40.11	3.27	1.04	50.84	54.00	-3.16	Average	VERTICAL
5	6490.00	54.74	35.18	40.11	3.27	1.04	54.12	74.00	-19.88	Peak	VERTICAL
6	7426.00	49.00	36.34	39.74	3.12	1.04	49.76	54.00	-4.24	Average	VERTICAL
7	7426.00	53.56	36.34	39.74	3.12	1.04	54.32	74.00	-19.68	Peak	VERTICAL
8	9109.00	46.36	38.39	39.98	3.39	1.20	49.36	74.00	-24.64	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 6. Power Line Conducted Emission

### 6.1. Block diagram of test setup

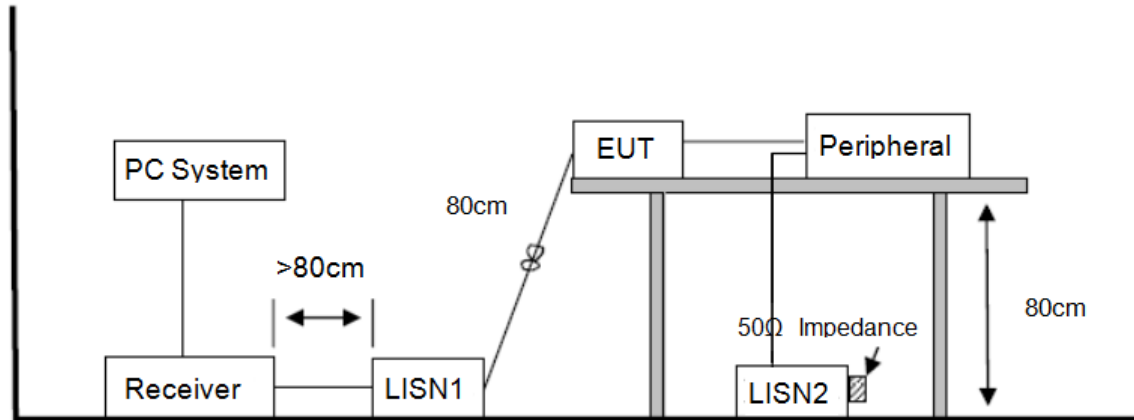

### 6.2. Power line conducted emission limits

Frequency	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 6.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level. The EUT configuration and worse cable configuration of the above highest emission levels were

recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### **6.4. Test result**

**Pass. (See below detailed test result)**

Not applicable, since EUT is battery-powered.

## 7. Antenna Requirements

### 7.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2. Result

The antenna used for this product is Integral Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.8 dBi.

**END OF REPORT**