

# TEST REPORT

**Applicant:** DI HONG LONG TOYS

**Address of Applicant:** Xiajiao Wuliting Industrial Zone Chenghai District, Shantou City Guangdong Province, China

**Manufacturer:** DI HONG LONG TOYS

**Address of Manufacturer:** Xiajiao Wuliting Industrial Zone Chenghai District, Shantou City Guangdong Province, China

**Equipment Under Test (EUT)**

Product Name: RC CAR TOYS

Model No.: DH-8198A, DH-8300D, DH-8189-1D, DH-8289A, DH-8309, DH-8201, DH-8220, DH-8300, DH-8301, DH-8199, DH-8198, DH-8289, DH-8197, DH-8193, DH-8195, DH-8069, DH-8216, DH-8305, DH-8182, DH-8219

**FCC ID:** 2ATMLDH8309

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.227

**Date of sample receipt:** July 10, 2023

**Date of Test:** July 11-27, 2023

**Date of report issued:** July 27, 2023

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
01	July 27, 2023	Original

Prepared By:




Date:

July 27, 2023

Project Engineer

Check By:

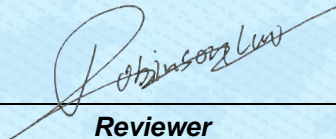

Date:

July 27, 2023

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	6
5.3 DESCRIPTION OF SUPPORT UNITS.....	6
5.4 TEST FACILITY.....	6
5.5 TEST LOCATION.....	6
6 EQUIPMENT LIST.....	7
7 RADIO SPECTRUM TECHNICAL REQUIREMENT.....	9
7.1 ANTENNA REQUIREMENT.....	9
7.1.1 Test Requirement:.....	9
7.1.2 Conclusion.....	9
8 RADIO SPECTRUM MATTER TEST RESULTS.....	10
8.1 20DB BANDWIDTH.....	10
8.1.1 E.U.T. Operation.....	10
8.1.2 Test Setup Diagram.....	10
8.1.3 Measurement Procedure and Data.....	10
8.2 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.227(A)).....	11
8.2.1 E.U.T. Operation.....	11
8.2.2 Test Setup Diagram.....	11
8.2.3 Measurement Procedure and Data.....	11
8.3 RADIATED EMISSIONS.....	13
8.3.1 E.U.T. Operation.....	14
8.3.2 Test Setup Diagram.....	14
8.3.3 Measurement Procedure and Data.....	14
9 TEST SETUP PHOTO.....	17
10 EUT CONSTRUCTIONAL DETAILS.....	17



## 4 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.227	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
20dB Bandwidth	47 CFR Part 15, Subpart C 15.227	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Field Strength of the Fundamental Signal (15.227(a))	47 CFR Part 15, Subpart C 15.227	ANSI C63.10 (2013) Section 6.4	47 CFR Part 15, Subpart C 15.227(a)	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.227	ANSI C63.10 (2013) Section 6.4&6.5	47 CFR Part 15, Subpart C 15.227(b) & C 15.209	Pass

Remark:

Pass: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	RC CAR TOYS
Model No.:	DH-8198A, DH-8300D, DH-8189-1D, DH-8289A, DH-8309, DH-8201, DH-8220, DH-8300, DH-8301, DH-8199, DH-8198, DH-8289, DH-8197, DH-8193, DH-8195, DH-8069, DH-8216, DH-8305, DH-8182, DH-8219
Test Model No:	DH-8198A
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Serial No.:	N/A
Test sample(s) ID:	GTS2023070118-1
Sample(s) Status:	Engineer sample
Operation Frequency:	27.145MHz
Channel Number:	1
Modulation:	FM
Antenna type:	Horn antenna
Antenna gain:	1dBi(Declared by applicant)
Power supply:	TX: DC 3.0V (1.5V x 2 "AA" Size Batteries)

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.
3. The report is for TX device only.

## 5.2 Test mode

Transmitter mode	Keep the EUT in transmitting with modulation mode.
Remark: New battery is used during all test.	

## 5.3 Description of Support Units

None.
-------

## 5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>● <b>FCC—Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li><li>● <b>ISED—Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing</li><li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li></ul>
--

## 5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960



## 6 Equipment List

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial Cable	GTS	N/A	GTS213	April 21, 2023	April 20, 2024
8	Coaxial Cable	GTS	N/A	GTS211	April 21, 2023	April 20, 2024
9	Coaxial cable	GTS	N/A	GTS210	April 21, 2023	April 20, 2024
10	Coaxial Cable	GTS	N/A	GTS212	April 21, 2023	April 20, 2024
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
12	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
13	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
14	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
15	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 30, 2022	Oct. 29, 2023
16	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 30, 2022	Oct. 29, 2023
17	FSV-Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 13, 2023	March 12, 2024
18	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
19	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS668	Dec. 20, 2022	Dec.19, 2023
20	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 19, 2023	April 18, 2024

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 14, 2023	April 13, 2024
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 14, 2023	April 13, 2024
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 14, 2023	April 13, 2024
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 14, 2023	April 13, 2024
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 14, 2023	April 13, 2024
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 14, 2023	April 13, 2024
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 14, 2023	April 13, 2024
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 19, 2023	April 18, 2024

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 19, 2023	April 18, 2024



## 7 Radio Spectrum Technical Requirement

### 7.1 Antenna Requirement

#### 7.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

#### 7.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is hose antenna, reference to the appendix II for details.

## 8 Radio Spectrum Matter Test Results

### 8.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215  
 Test Method: ANSI C63.10 (2013) Section 6.9


#### 8.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 55 % RH Atmospheric Pressure: 1005 mbar

Test mode Transmitter mode: Keep the EUT in transmitting with modulation mode.


#### 8.1.2 Test Setup Diagram

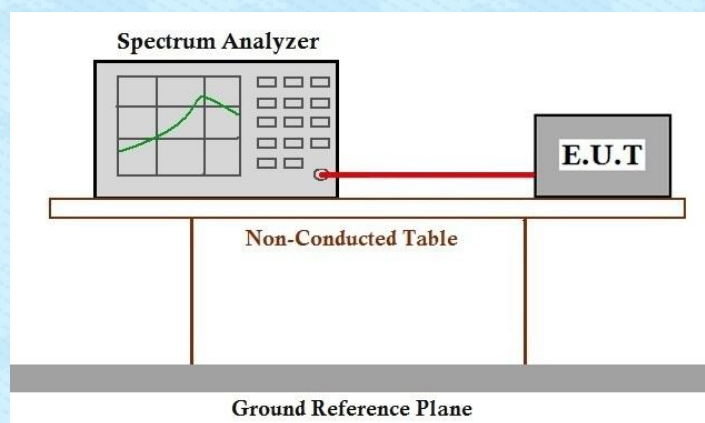

#### 8.1.3 Measurement Procedure and Data

Mode	Frequency (MHz)	-20dB Bandwidth (kHz)	Limit	Conclusion
TX	27.145	199.0	N/A	Pass

Test plot as follows:

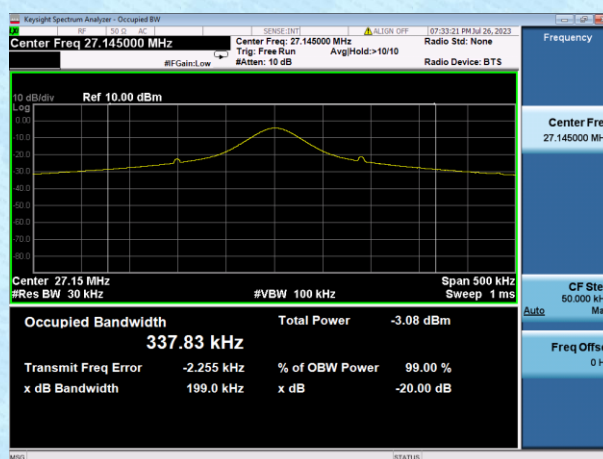


## 8.2 Field Strength of the Fundamental Signal (15.227(a))

Test Requirement	47 CFR Part 15, Subpart C 15.227(a)
Test Method:	ANSI C63.10 (2013) Section 6.4
Measurement Distance:	3m
Limit:	≤ 10000 microvolts/meter at 3 meters, the emission limit is based on measurement instrumentation employing an average Detector. The provisions in §15.35 for limiting peak emissions apply.

### 8.2.1 E.U.T. Operation

Operating Environment:					
Temperature:	25 °C	Humidity:	55 % RH	Atmospheric Pressure:	1000 mbar
Test mode	Transmitter mode: Keep the EUT in transmitting with modulation mode.				

### 8.2.2 Test Setup Diagram

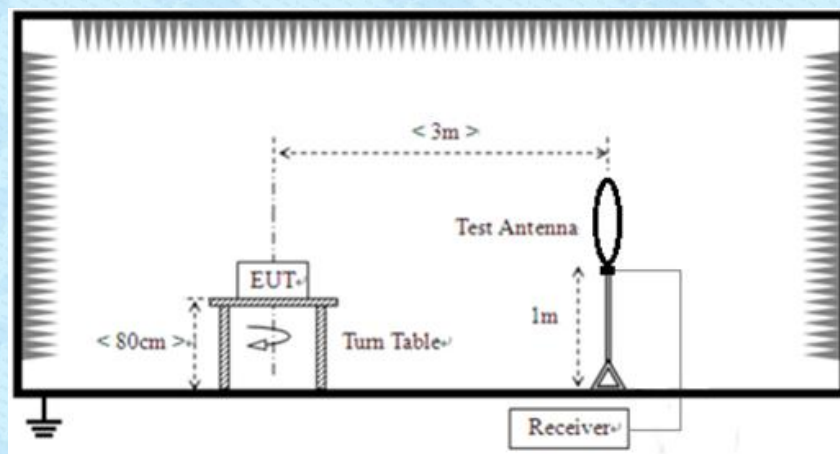


### 8.2.3 Measurement Procedure and Data

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is fixed at one meter
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- e. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Facto



**Measurement data:**

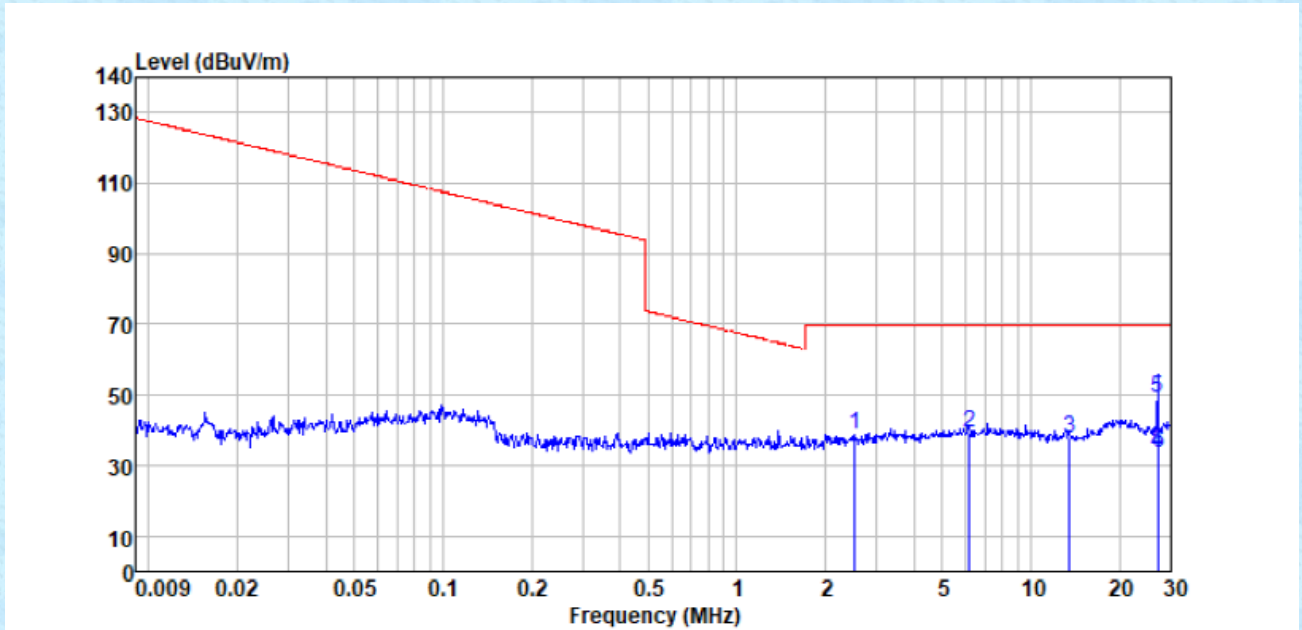

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark
2.527	17.46	20.84	0.39	0.00	38.69	69.54	-30.85	PK
6.168	18.10	20.85	0.45	0.00	39.40	69.54	-30.14	PK
13.548	16.50	20.57	0.51	0.00	37.58	69.54	-31.96	PK
26.960	12.66	20.59	0.55	0.00	33.80	69.54	-35.74	QP
27.145	28.05	20.57	0.55	0.00	49.17	100.00	-50.83	Peak
27.280	12.32	20.54	0.55	0.00	33.41	69.54	-36.13	QP

**Remarks:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the above measurement data were shown in the report.

### 8.3 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.227(b) & C 15.209  
 Test Method: ANSI C63.10 (2013) Section 6.4&6.5  
 Measurement Distance: 3m  
 Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz and 110-490kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for above 1000MHz. Radiated emission limits above 1000MHz is based on measurements employing an average detector.


### 8.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C      Humidity: 50 % RH      Atmospheric Pressure: 1000 mbar

Test mode      Transmitter mode: Keep the EUT in transmitting with modulation mode.

### 8.3.2 Test Setup Diagram

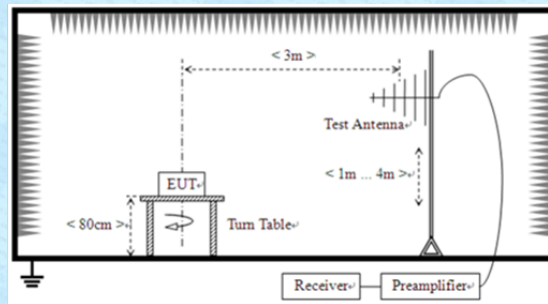

### 8.3.3 Measurement Procedure and Data

- The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.


Remark:  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$




Measurement data:

■ 30MHz~1GHz

Mode:	Transmitting mode	Polarization:	Horizontal
-------	-------------------	---------------	------------

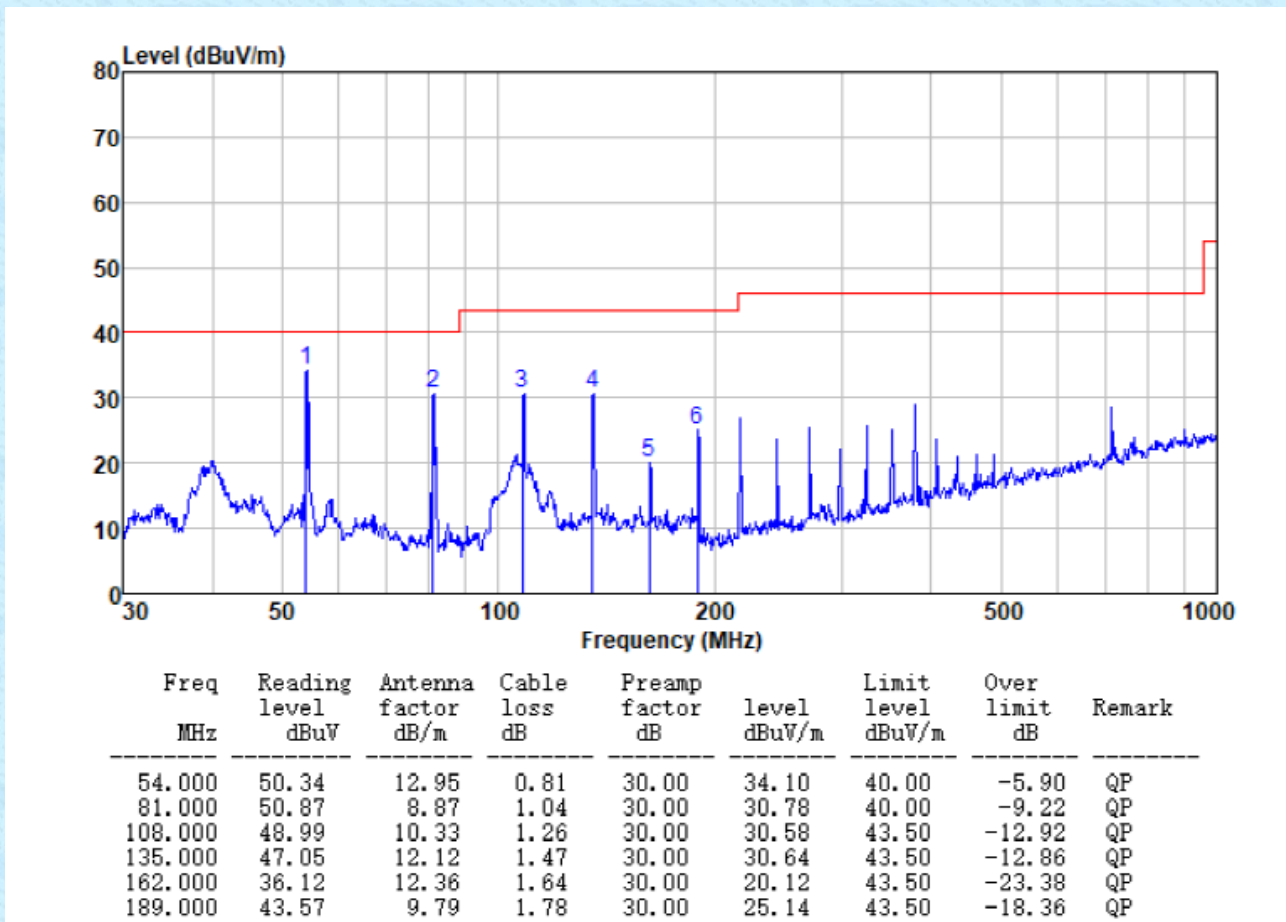

<b>Mode:</b>	<b>Transmitting mode</b>	<b>Polarization:</b>	<b>Vertical</b>
--------------	--------------------------	----------------------	-----------------

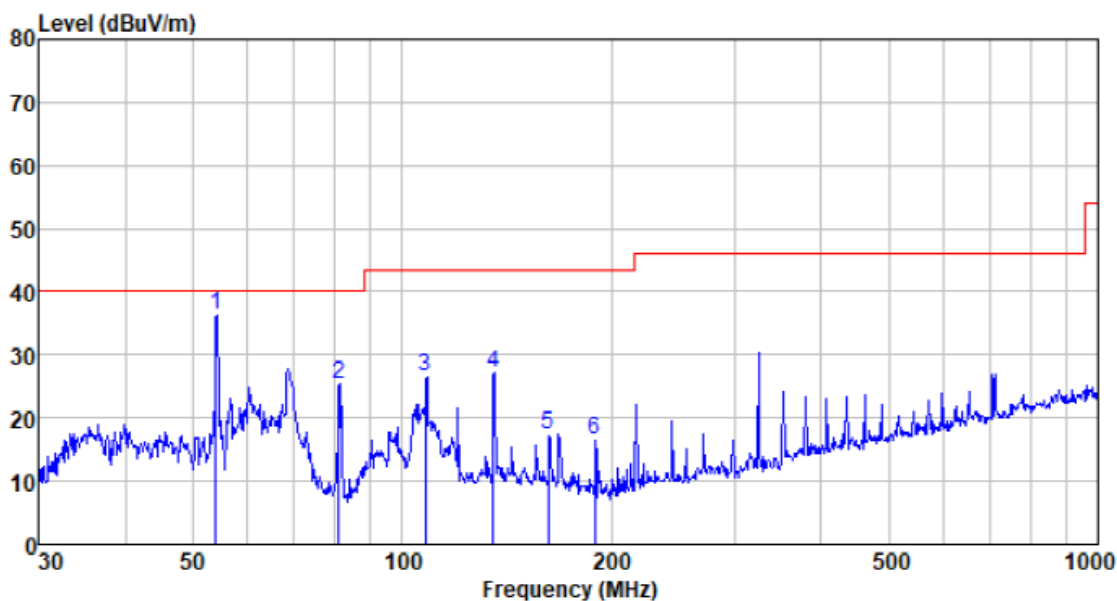

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
54.000	52.42	12.95	0.81	30.00	36.18	40.00	-3.82	QP
81.000	45.38	8.87	1.04	30.00	25.29	40.00	-14.71	QP
108.000	45.07	10.33	1.26	30.00	26.66	43.50	-16.84	QP
135.000	43.66	12.12	1.47	30.00	27.25	43.50	-16.25	QP
162.000	33.32	12.36	1.64	30.00	17.32	43.50	-26.18	QP
189.000	35.09	9.79	1.78	30.00	16.66	43.50	-26.84	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

## **9 Test Setup Photo**

Reference to the **appendix I** for details.

## **10 EUT Constructional Details**

Reference to the **appendix II** for details.

-----End-----