



# FCC TEST REPORT

**Test report  
On Behalf of  
Dongguan Fulun Electronics Co.,Limited  
For  
Wireless Charger  
Model No.: W01, PP6966HP, PP6965FR, PP6965FRTX  
FCC ID: 2ATOY-W01**

**Prepared for :** Dongguan Fulun Electronics Co.,Limited  
4-8/F, Building B, Xinbosheng Industrial Park, No.5 Xinyuan S Rd, Tangxia,  
Dongguan.CN

**Prepared By :** Shenzhen Tongzhou Testing Co.,Ltd  
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang  
Street, Longhua, Shenzhen, China

**Date of Test:** Jun. 2, 2020 ~ Jun. 11, 2020

**Date of Report:** Jun. 12, 2020

**Report Number:** TZ200601394-E1

The test report apply only to the specific sample(s) tested under stated test conditions  
It is not permitted to copy extracts of these test result without the written permission of the test  
laboratory.



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Dongguan Fulun Electronics Co.,Limited  
Address ..... : 4-8/F, Building B, Xinbosheng Industrial Park, No.5 Xinyuan S Rd,  
Tangxia, Dongguan.CN  
**Manufacture's Name**..... : Dongguan Fulun Electronics Co.,Limited  
Address ..... : 4-8/F, Building B, Xinbosheng Industrial Park, No.5 Xinyuan S Rd,  
Tangxia, Dongguan.CN

### Product description

Trade Mark ..... : BarbetSound  
Product name ..... : Wireless Charger  
Model and/or type reference : W01, PP6966HP, PP6965FR, PP6965FRTX

**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C (Section 15.209),  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
Date (s) of performance of tests ..... : Jun. 2, 2020 ~ Jun. 11, 2020  
Date of Issue..... : Jun. 12, 2020  
Test Result..... : **Pass**

Testing Engineer : Nancy Li  
(Nancy Li)

Technical Manager : Hugo Chen  
(Hugo Chen)

Authorized Signatory : Andy Zhang  
(Andy Zhang)



<b>Table of Contents</b>		<b>Page</b>
<b>1 TEST SUMMARY</b> .....		<b>4</b>
1.1	TEST PROCEDURES AND RESULTS .....	4
1.2	TEST FACILITY .....	4
1.3	MEASUREMENT UNCERTAINTY.....	4
<b>2 GENERAL INFORMATION</b> .....		<b>5</b>
2.1	General Description of EUT .....	5
2.2	Operation of EUT during testing .....	6
2.3	Description of Test Setup.....	6
2.4	Measurement Instruments List.....	7
<b>3 CONDUCTED EMISSION TEST</b> .....		<b>8</b>
3.1	Block Diagram of Test Setup .....	8
3.2	Conducted Power Line Emission Limit.....	8
3.3	Test Procedure .....	8
3.4	Test Result.....	8
<b>4 Occupied Bandwidth</b> .....		<b>11</b>
4.1	Block Diagram of Test Setup .....	11
4.2	Rules and specifications .....	11
4.3	Test Procedure .....	11
4.4	Test Result.....	11
<b>5 RADIA TED EMISSIONS</b> .....		<b>13</b>
5.1	Block Diagram of Test Setup .....	13
5.2	Rules and specifications .....	14
5.3	Test Procedure .....	15
5.4	Test Result.....	15
<b>6 ANTENNA REQUIREMENT</b> .....		<b>18</b>
<b>7 PHOTOGRAPH OF TEST</b> .....		<b>19</b>
7.1	Radiated Emission .....	19
7.2	Conducted Emission .....	20
<b>8 PHOTOGRAPH OF EUT</b> .....		<b>21</b>



## 1 TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	COMPLIANT
RADIATED EMISSION TEST	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

### 1.2 TEST FACILITY

Test Firm : Shenzhen Tongzhou Testing Co.,Ltd

Address 1th Floor, Building 1, Haomai High-tech Park, Huating Road 387,  
Dalang Street, Longhua, Shenzhen, China

### 1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2



## 2 GENERAL INFORMATION

### 2.1 General Description of EUT

Equipment	Wireless Charger
Model Name	W01, PP6966HP, PP6965FR, PP6965FRTX
Serial No.	N/A
Model Difference	All the same except for the model name and colour
Trade Mark	BarbetSound
FCC ID	2ATOY-W01
Antenna Type	Coil Antenna
Antenna Gain	0dBi
Operation frequency	110 – 205 KHz
Modulation Type	ASK
Power Rating	Input: 5V $\overline{=}$ 2A Output: 5V $\overline{=}$ 1A
Test Sample ID	TZ200601394-1#




## 2.2 Operation of EUT during testing

Test Modes:		
Mode 1	AC/DC Adapter (5V/2A) + EUT + MobilePhone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (5V/2A) + EUT + MobilePhone (Battery Status: <50%)	Pre-tested
Mode 3	AC/DC Adapter (5V/2A) + EUT + MobilePhone (Battery Status: 100%)	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

## 2.3 Description of Test Setup

Operation of EUT during testing

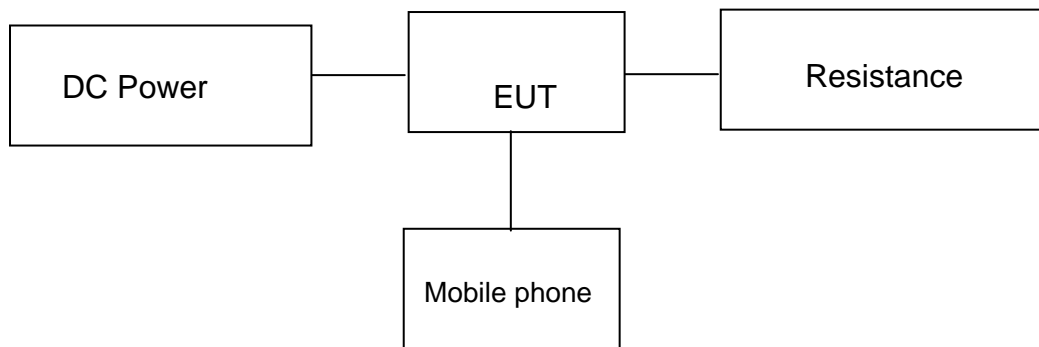

Setup: Transmission mode

- Mobile phone information  
Model: iPhone XR  
Manufacturer: iPhone
- Wireless loading information  
Model: Q7-T




## 2.4 Measurement Instruments List

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	Wideband Antenna	schwarzbeck	VULB 9163	958	2019/11/16	2022/11/15
2	EMI Test Receiver	R&S	ESCI	100849/003	2020/1/2	2021/1/1
3	Controller	MF	MF7802	N/A	N/A	N/A
4	RF Cable(below 1GHz)	HUBER+SUHNER	RG214	N/A	2020/1/2	2021/1/1
5	RF Cable(above 1GHz)	HUBER+SUHNER	RG214	N/A	2020/1/2	2021/1/1
6	RE test software	Tonscend	JS32-RE	V2.0.2.0	N/A	N/A
7	Loop Antenna	schwarzbeck	FMZB 1519 B	23	2019/11/16	2022/11/15
8	Artificial Mains	ROHDE & SCHWARZ	ENV 216	101333-IP	2020/1/2	2021/1/1
9	EMI Test Software	ROHDE & SCHWARZ	ESK1	V1.71	N/A	N/A
10	MXA Signal Analyzer	Keysight	N9020A	MY52091623	2020/1/2	2021/1/1

### 3 CONDUCTED EMISSION TEST

#### 3.1 Block Diagram of Test Setup

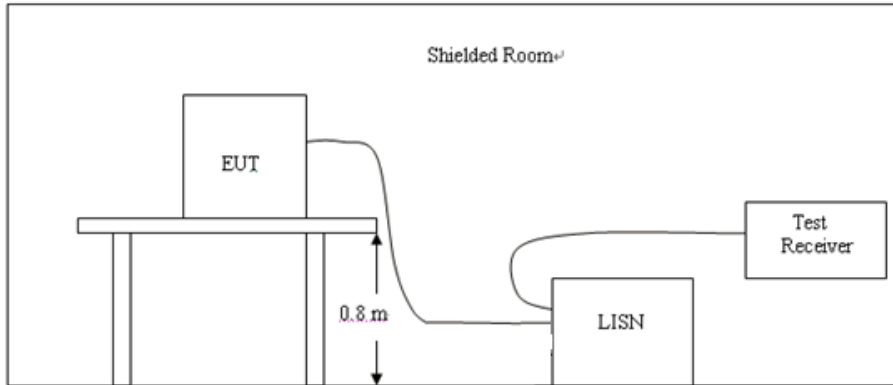

#### 3.2 Conducted Power Line Emission Limit

According to FCC Part 15.207(a)

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207 Line Conducted Emission Limit is same as above table.

#### 3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes

#### 3.4 Test Result

PASS






Temperature	22.8°C	Humidity	55%
Test Engineer	Tony Luo	Configurations	Mode 1

Please refer to following diagram for individual

Test Specification: Line

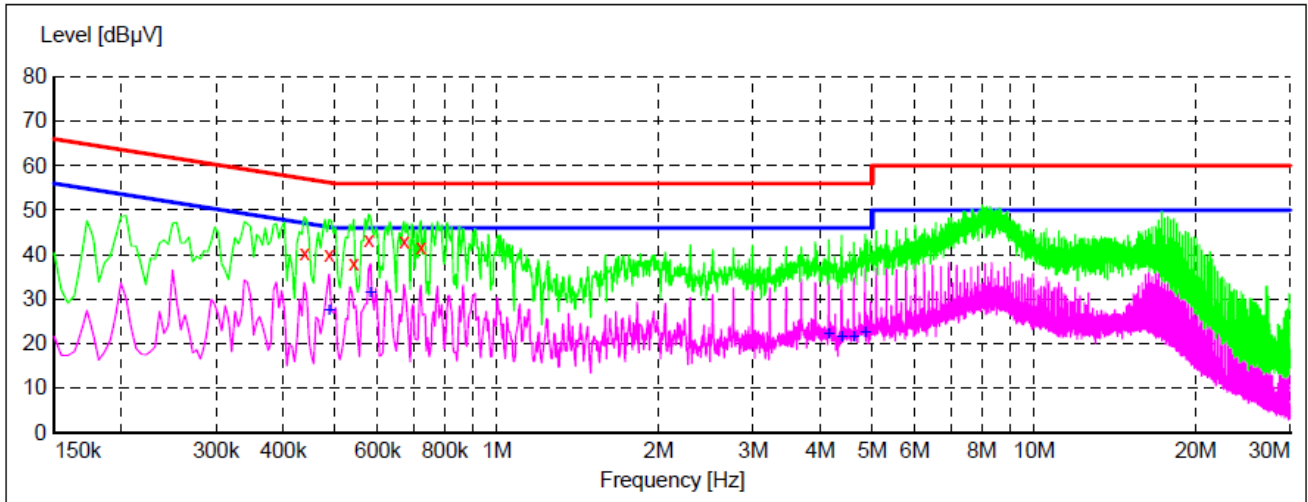


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.438000	40.50	10.0	57	16.6	QP	L1	GND
0.487500	40.10	10.0	56	16.1	QP	L1	GND
0.541500	38.00	9.9	56	18.0	QP	L1	GND
0.577500	43.40	9.9	56	12.6	QP	L1	GND
0.672000	43.10	9.9	56	12.9	QP	L1	GND
0.721500	41.60	9.9	56	14.4	QP	L1	GND

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.487500	27.30	10.0	46	18.9	AV	L1	GND
0.582000	31.40	9.9	46	14.6	AV	L1	GND
4.150500	22.20	9.7	46	23.8	AV	L1	GND
4.384500	21.40	9.8	46	24.6	AV	L1	GND
4.618500	21.40	9.8	46	24.6	AV	L1	GND
4.848000	22.50	9.8	46	23.5	AV	L1	GND

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Test Specification: Neutral

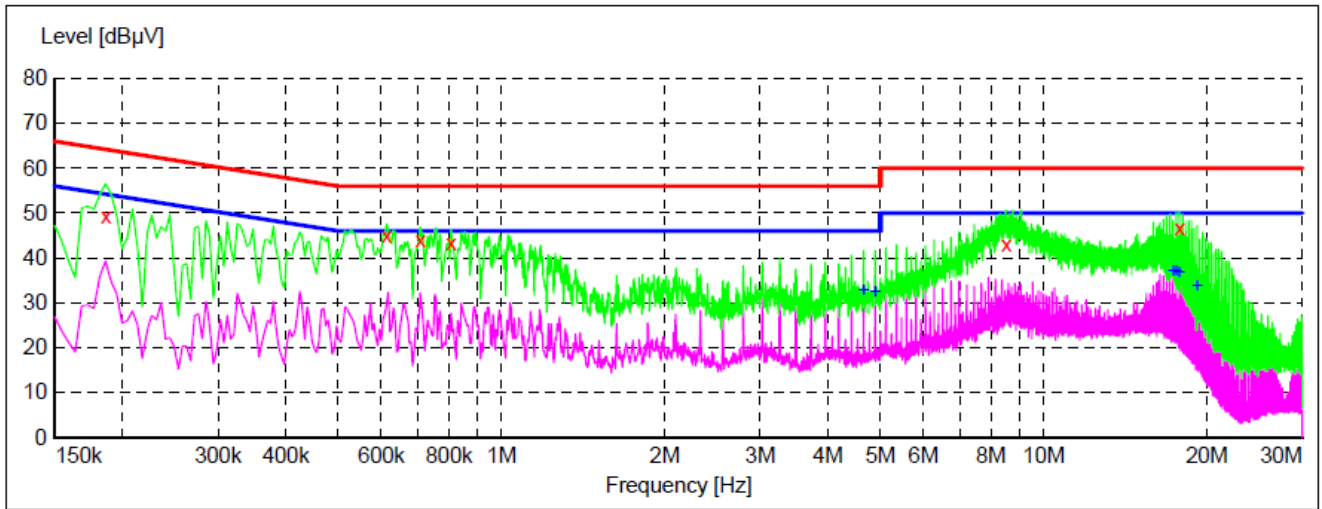


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	49.40	10.4	64	14.8	QP	N	GND
0.613500	45.10	9.9	56	10.9	QP	N	GND
0.708000	43.80	9.9	56	12.2	QP	N	GND
0.807000	43.20	9.8	56	12.8	QP	N	GND
8.529000	43.10	9.8	60	16.9	QP	N	GND
17.799000	46.70	10.2	60	13.3	QP	N	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
4.654500	32.60	9.8	46	13.4	AV	N	GND
4.888500	32.50	9.8	46	13.5	AV	N	GND
17.335500	37.10	10.1	50	12.9	AV	N	GND
17.569500	37.00	10.1	50	13.0	AV	N	GND
17.799000	36.60	10.2	50	13.4	AV	N	GND
19.198500	33.80	10.3	50	16.2	AV	N	GND

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

## 4 OCCUPIED BANDWIDTH

### 4.1 Block Diagram of Test Setup

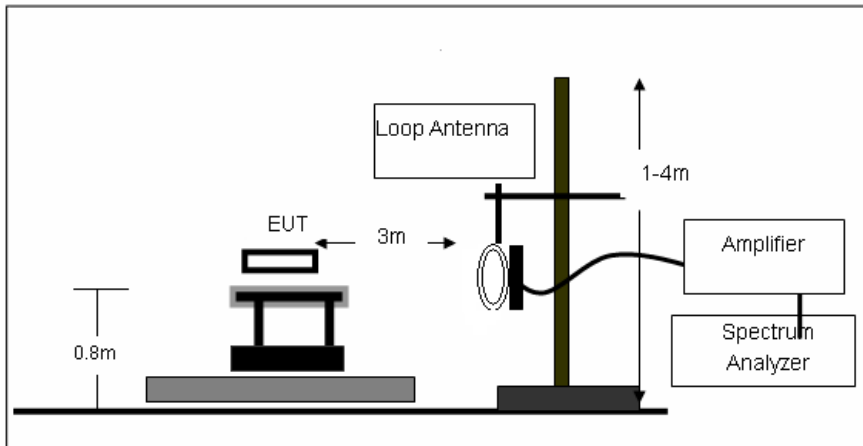

### 4.2 Rules and specifications

CFR 47 Part 15.215(c)

ANSI C63.10-2013

### 4.3 Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

### 4.4 Test Result PASS

Temperature	22.8°C	Humidity	55%
Test Engineer	Tony Luo	Configurations	Mode 1

Mode	Freq (KHz)	20dB Bandwidth (Hz)	Limit (kHz)	Conclusion
Tx Mode	145	167.75	/	PASS




\*RBW 10 Hz      Marker 1 [T1 ]  
\*VBW 30 Hz      34.74 dBμV  
SWT 5 s      144.491350000 kHz

Ref 80 dBμV

\*Att 0 dB

1 PK  
MAXH

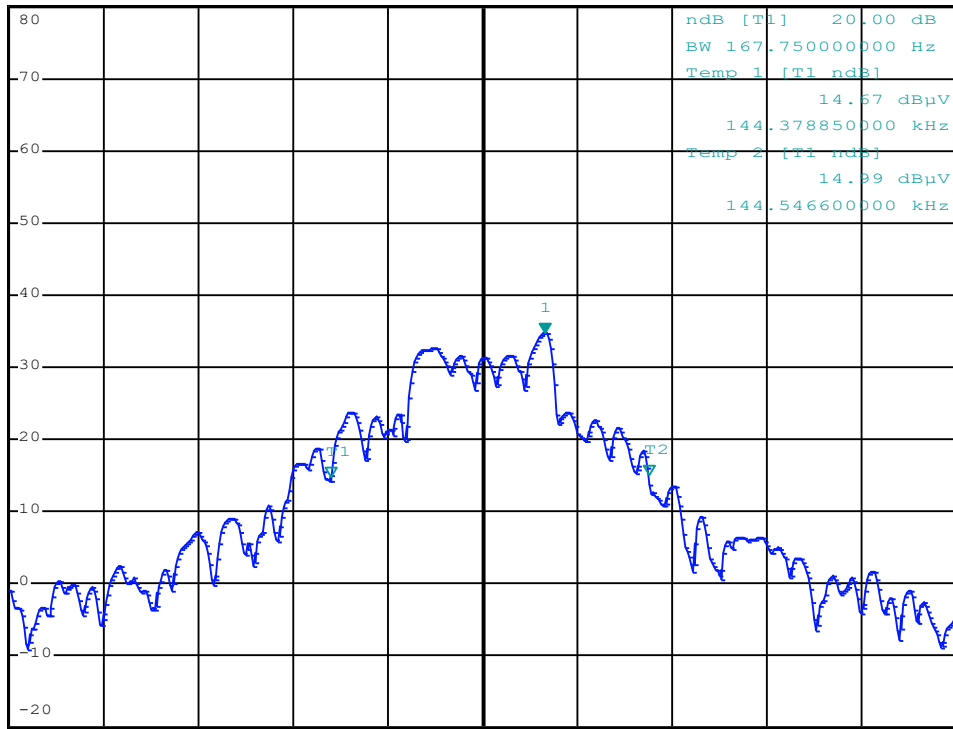



Center 144.4586 kHz

50 Hz/

Span 500 Hz

## 5 RADIA TED EMISSIONS

### 5.1 Block Diagram of Test Setup

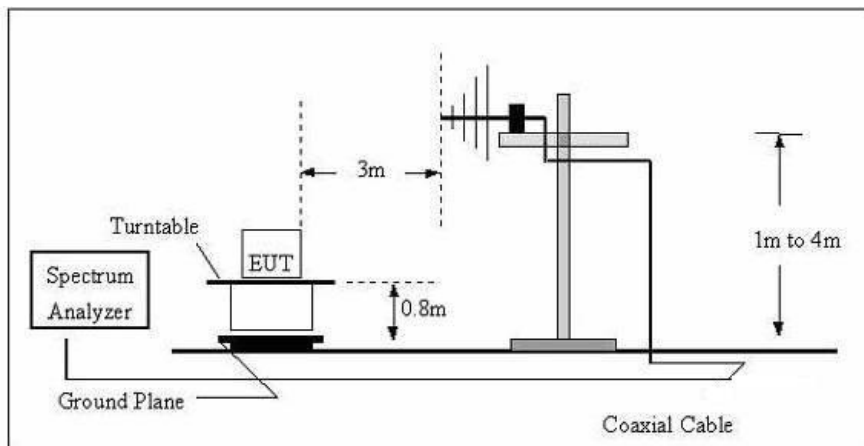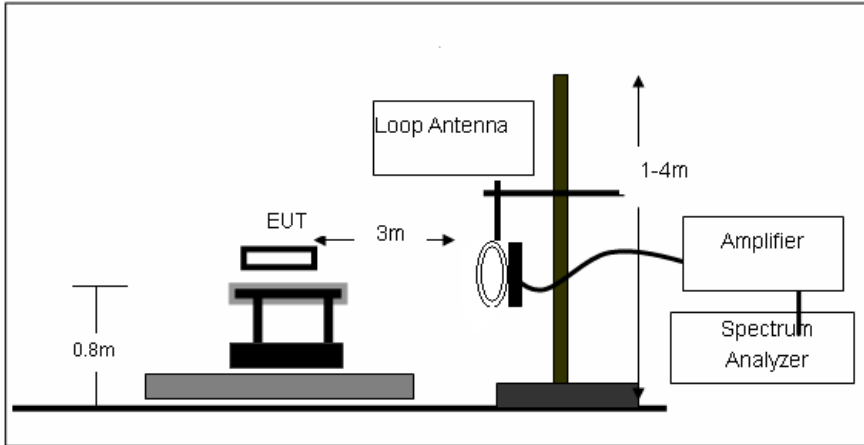



## 5.2 Rules and specifications

CFR 47 Part 15, section 15.205

Only spurious emissions are permitted in any of the frequency bands listed the tables in these sections.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

CFR 47 Part 15, section 15.209

The emissions from an intentional radiator shall not exceed the limits in the tables in these sections using an average detector

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F (kHz)	300
0.490–1.705	24000/F (kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	$20\log(2400/F(KHz))+40\log(300/3)$	3
0.490-1.705	$20\log(24000/F(KHz))+40\log(30/3)$	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3

CFR 47 Part 15, section 15.35

When average radiated emission measurements are specified, the limit on the peak level of the radio Frequency emission is 20dB above the maximum permitted average emission limit.

Transmitter Spurious Emissions 9KHz-30MHz			
	9-150KHz	150-490KHz	490KHz-30MHz
Resolution Bandwidth	200Hz	9KHz	9KHz
Video Bandwidth	2KHz	100KHz	100KHz
Detector	Peak	Peak	Peak
Trace Mode	Max Hold	Max Hold	Max Hold
Sweep Time	Auto	Auto	Auto



### 5.3 Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurement are extrapolated to 300m and 30m distance respectively, by 40dB/decade, According to part 15.31(f)(2), per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

### 5.4 Test Result

PASS

Temperature	22.8°C	Humidity	55%
Test Engineer	Tony Luo	Configurations	Mode 1

For 9KHz-30MHz

Note: Measured at both 0 degree and 90 degree, recorded worst case at 90 degree.

Freq. (MHz)	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
0.107	Peak	11.54	20.8	32.34	107.02	74.68
0.145	Peak	55.36	20.8	76.16	105.67	29.51
0.435	Peak	33.01	20.41	53.42	96.12	42.70
12.782	Peak	12.60	20.41	33.01	69.50	36.49


Remark : Actual FS = Reading + Factor;

Margin = Limits - Actual FS



For 30MHz-1GHz

Antenna polarity: V

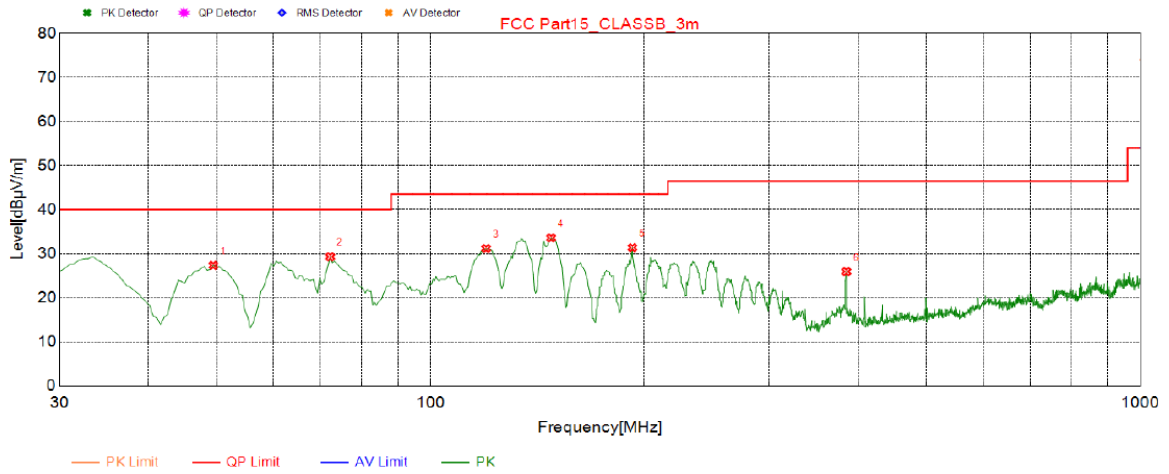


Suspected List								
NO.	Freq. [MHz]	Result Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle[°]	Polarity
1	49.400	27.35	-14.15	40.00	12.65	100	112	Vertical
2	72.195	29.31	-18.62	40.00	10.69	100	84	Vertical
3	119.725	31.19	-17.59	43.50	12.31	100	227	Vertical
4	147.855	33.6	-19.18	43.50	9.90	100	333	Vertical
5	192.475	31.36	-16.20	43.50	12.14	100	338	Vertical
6	385.505	25.95	-10.44	46.50	20.55	100	33	Vertical

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level





Antenna polarity: H

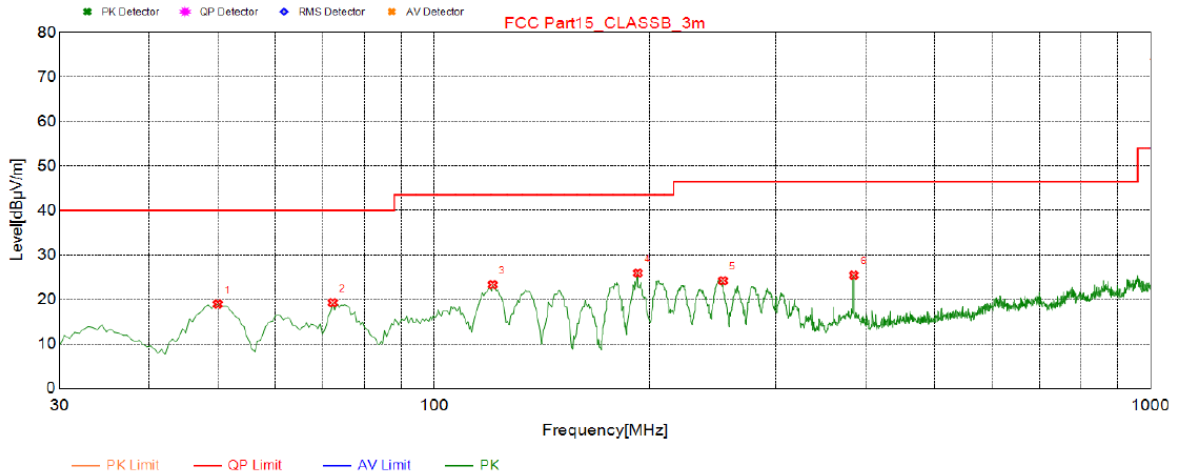

Suspected List								
NO.	Freq. [MHz]	Result Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	49.885	18.94	-14.18	40.00	21.06	300	27	Horizontal
2	72.195	19.27	-18.62	40.00	20.73	300	356	Horizontal
3	120.695	23.3	-17.74	43.50	20.20	300	281	Horizontal
4	192.475	25.93	-16.20	43.50	17.57	100	53	Horizontal
5	253.100	24.22	-13.80	46.50	22.28	100	228	Horizontal
6	385.505	25.46	-10.44	46.50	21.04	300	286	Horizontal

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



## 6 ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction


The antenna used in this product is a Coil Antenna, The directional gains of antenna used for transmitting is 0dBi.

### ANTENNA

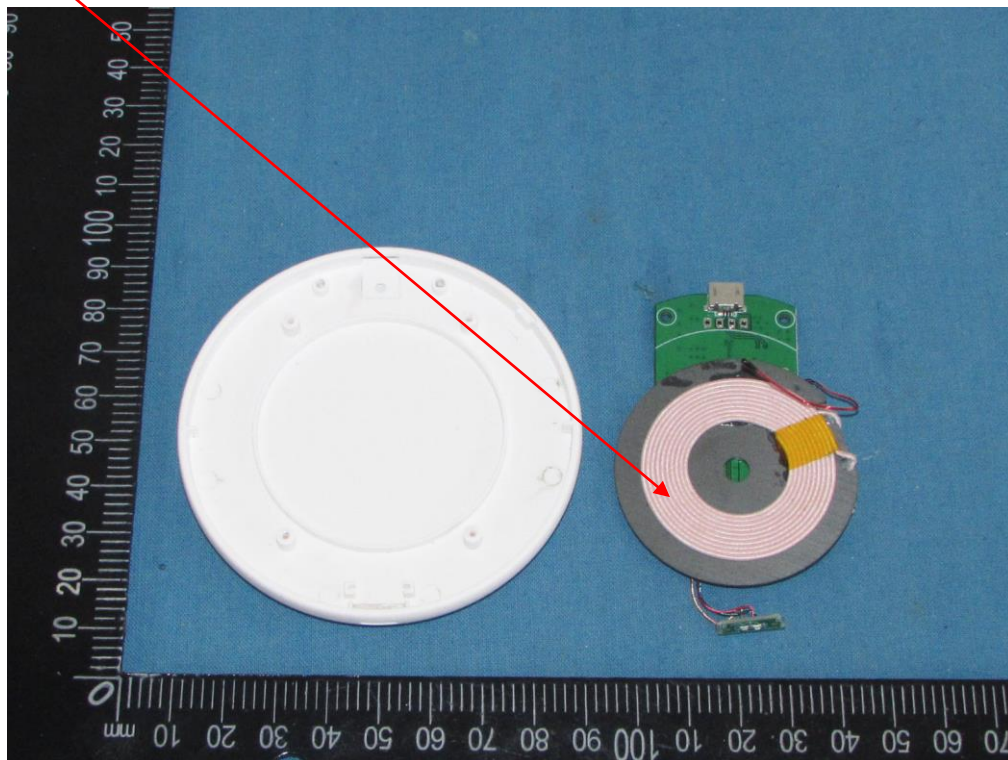

## 7 PHOTOGRAPH OF TEST

### 7.1 Radiated Emission

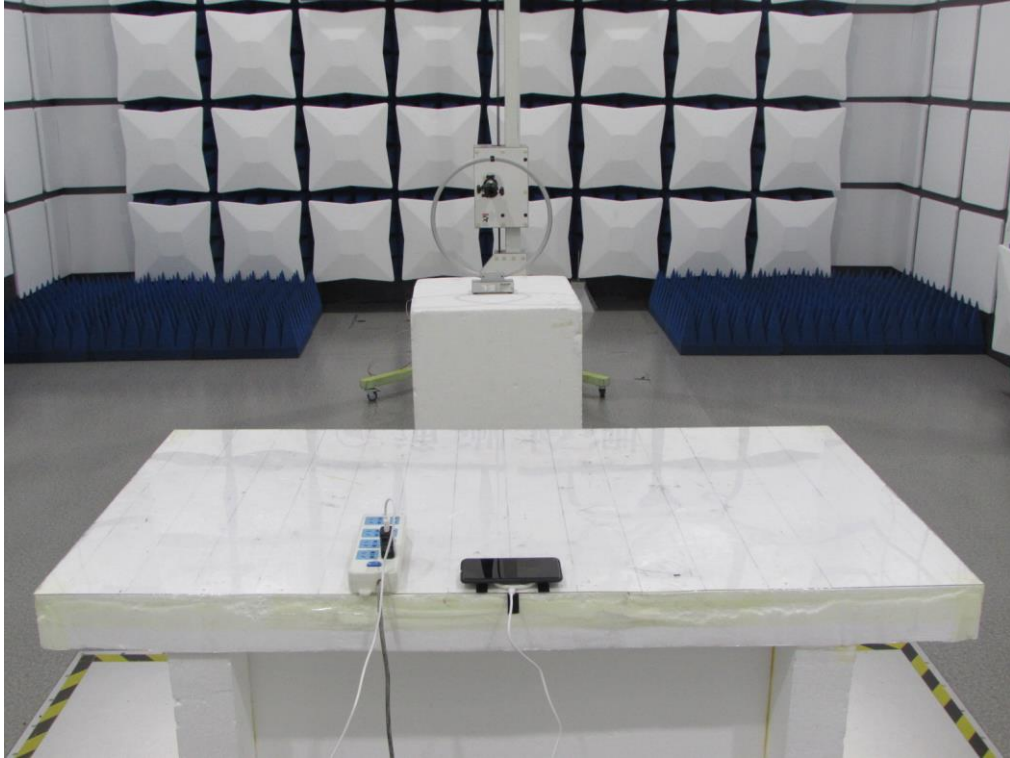



## 7.2 Conducted Emission




## 8 PHOTOGRAPH OF EUT

### External Photos










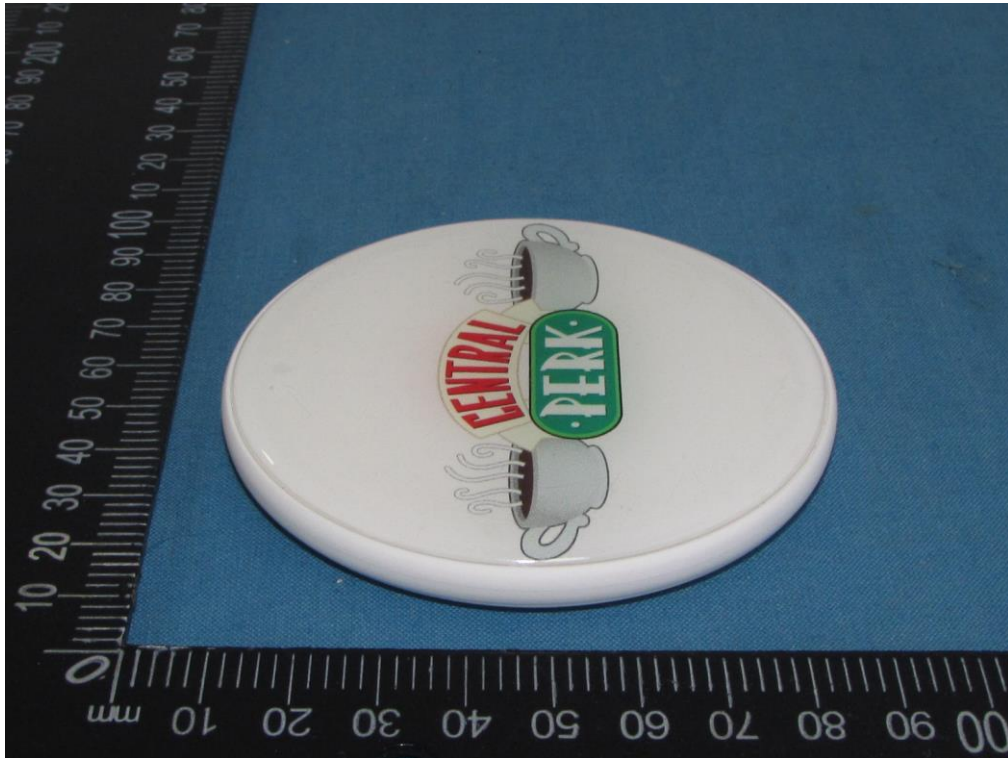








### Internal Photos

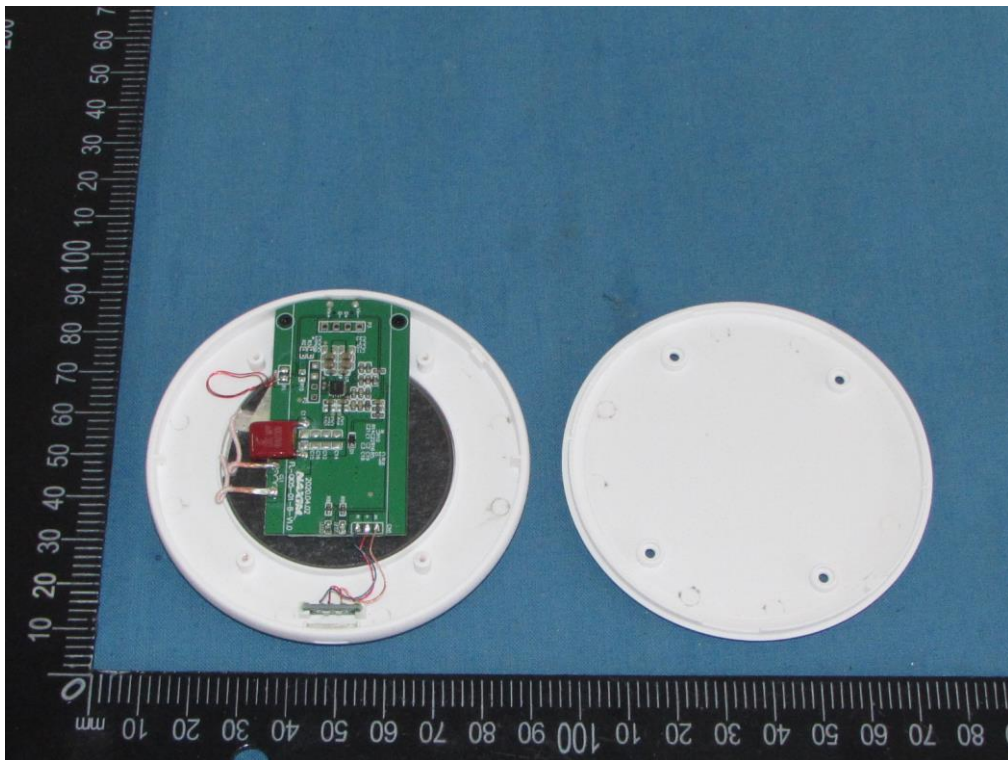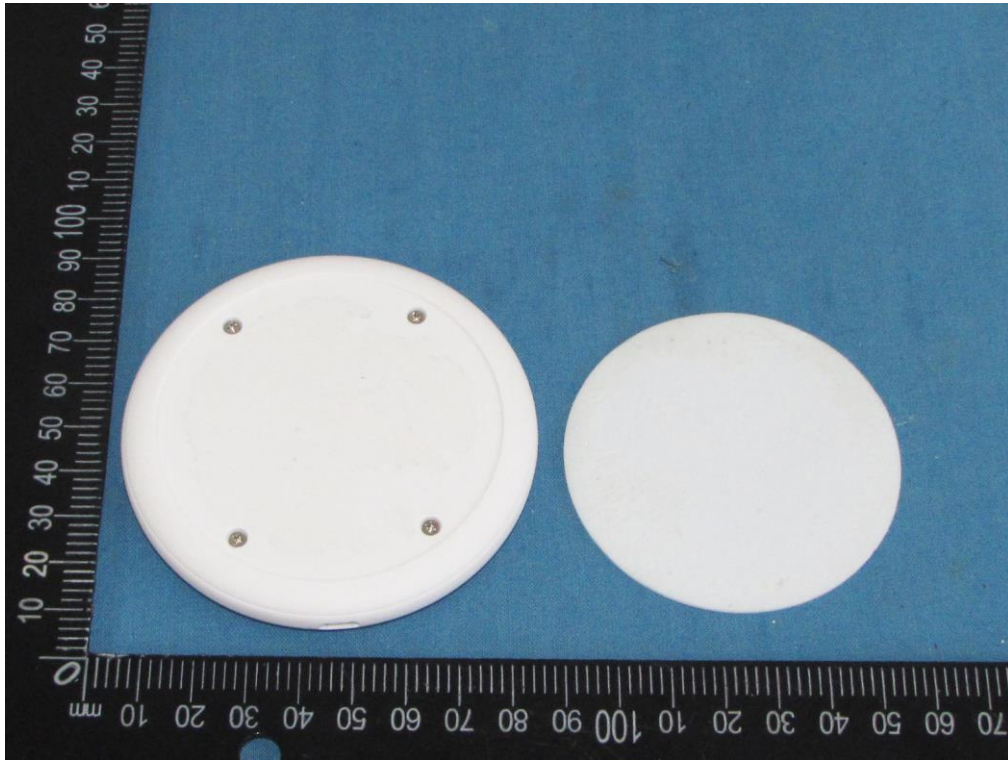

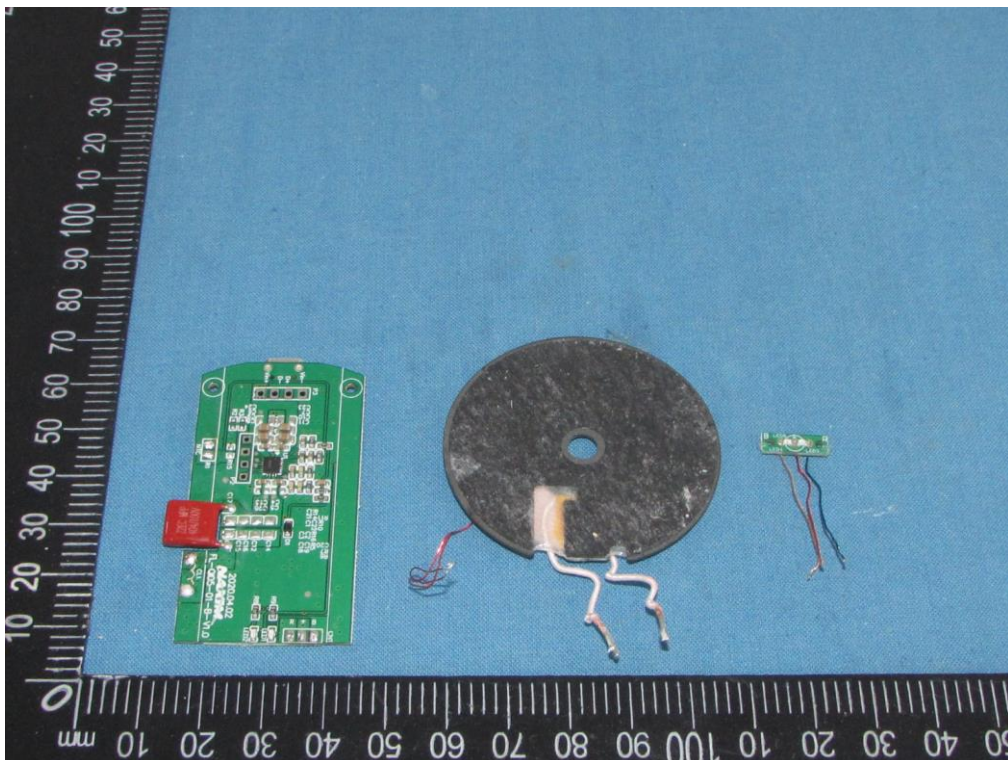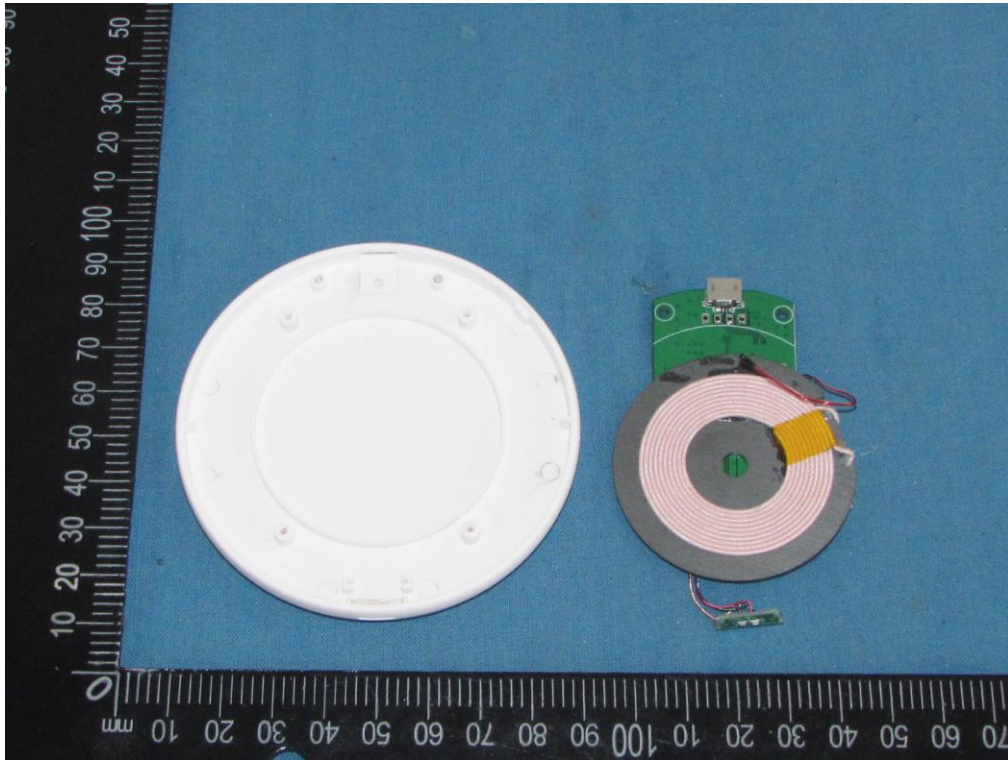

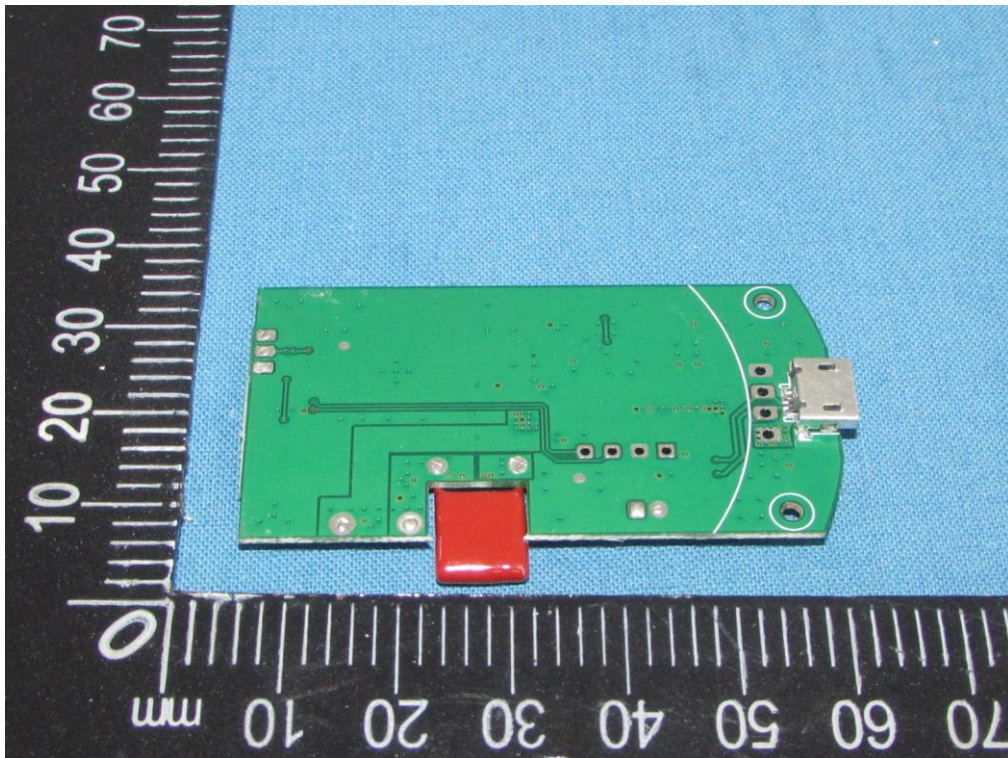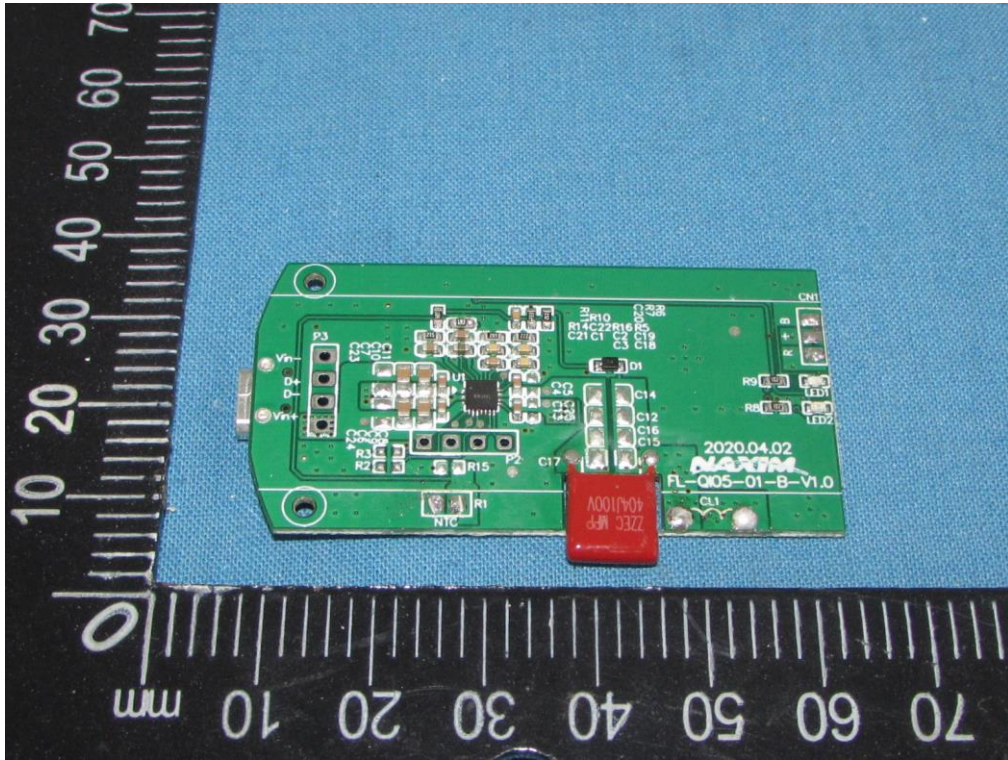

※※※※※THE END※※※※※