



## KSIGN(Guangdong) Testing Co, Ltd.

First Floor West Side, Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu Village, Shatou Community, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, P. R. China  
Tel.: +(86) 755-2985 2678 Fax: +(86) 755-2985 2397 E-mail: info@gdkesign.cn Website: www.gdkesign.com

# TEST REPORT

Report No..... : KS2003S00020E

FCC ID..... : 2ATQ9-K2

Applicant..... : Dongguan Gorsun Electronics Co.,Ltd

Address..... : No.140 Chashi Road, Tangjiao Village, Chashan Town, Dongguan, China

Manufacturer..... : Dongguan Gorsun Electronics Co.,Ltd

Address..... : No.140 Chashi Road, Tangjiao Village, Chashan Town, Dongguan, China

Product Name..... : Wireless Earphones

Trade Mark..... : N/A

Model/Type reference..... : K2

Listed Model(s)..... : N/A

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of Receipt..... : Mar.11, 2020

Date of Test Date..... : Mar.11, 2020-Mar.17, 2020

Date of issue..... : Mar.17, 2020

Test result..... : Pass

Compiled by:

(Printed name+signature)

Emiya Lin

Emiya Lin

Supervised by:

( Printed name+signature)

Kelly Cheng

Kelly Cheng

Approved by:

( Printed name+signature)

Cary Luo

Cary Luo



Testing Laboratory Name..... : KSIGN(Guangdong) Testing Co., Ltd.

Address..... : First Floor West Side, Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu Village, Shatou Community, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, P. R. China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by K SIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to K SIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

**TABLE OF CONTENTS****Page**

<b>1. TEST SUMMARY.....</b>	<b>3</b>
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. OPERATION STATE.....	8
2.4. MEASUREMENT INSTRUMENTS LIST.....	9
2.5. TEST SOFTWARE.....	9
<b>3. TEST ITEM AND RESULTS.....</b>	<b>10</b>
3.1. ANTENNA REQUIREMENT.....	10
3.2. CONDUCTED EMISSION.....	11
3.3. PEAK OUTPUT POWER.....	14
3.4. 99% OCCUPIED BANDWIDTH & 20dB BANDWIDTH.....	19
3.5. CARRIER FREQUENCIES SEPARATION.....	28
3.6. NUMBER OF HOPPING CHANNEL.....	31
3.7. DWELL TIME.....	33
3.8. BAND EDGE EMISSIONS(RADIATED).....	36
3.9. BAND EDGE AND SPURIOUS EMISSION (CONDUCTED).....	41
3.10. RADIATED SPURIOUS EMISSIONS.....	46
3.11. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	57
<b>4. EUT TEST PHOTOS.....</b>	<b>58</b>
<b>5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....</b>	<b>59</b>

## 1. TEST SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

### 1.2. Report version

Revised No.	Date of issue	Description
01	Mar.17, 2020	Original

### 1.3. Test Description

FCC Part 15 Subpart C(15.247)			
Test Item	Standard Section	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Emiya Lin
Conducted Emission	15.207	Pass	Emiya Lin
Restricted Bands	15.205	Pass	Emiya Lin
Hopping Channel Separation	15.247(a)(1)	Pass	Emiya Lin
Dwell Time	15.247(a)(1)	Pass	Emiya Lin
Peak Output Power	15.247(b)(1)	Pass	Emiya Lin
Number of Hopping Frequency	15.247(b)(1)	Pass	Emiya Lin
Band Edge Emissions	15.247(d)	Pass	Emiya Lin
Radiated Spurious Emission	15.247(c)&15.209	Pass	Emiya Lin
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)	Pass	Emiya Lin
Pseudorandom Frequency Hopping Sequence	15.247 (a)(1)	Pass	Emiya Lin

Note: The measurement uncertainty is included in the test result.

## 1.4. Test Facility

### Address of the report laboratory

#### **KSIGN(Guangdong) Testing Co., Ltd.**

First Floor West Side, Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu Village, Shatou Community, Shajing Street, Bao'an District, Shenzhen City, Guangdong Province, P. R. China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### **A2LA-Lab Cert. No.: 5457.01**

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **IC Registration No.: CN0096**

The 3m alternate test site of KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: CN0096

#### **FCC-Registration No.: CN1272**

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the KSIGN(Guangdong) Testing Co., Ltd. system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. Below is the best measurement capability for KSIGN(Guangdong) Testing Co., Ltd.

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	2.80 dB	(1)

**Note (1):** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Dongguan Gorsun Electronics Co.,Ltd
Address:	No.140 Chashi Road, Tangjiao Village, Chashan Town, Dongguan, China
Manufacturer:	Dongguan Gorsun Electronics Co.,Ltd
Address:	No.140 Chashi Road, Tangjiao Village, Chashan Town, Dongguan, China

### 2.2. General Description of EUT

Product Name:	Wireless Earphones
Marketing Name:	N/A
Model/Type reference:	K2
Listed Model(s):	N/A
Model Difference:	N/A
Power Source:	DC 5V output from the USB port
Power supply(Battery):	DC 3.7V 60mAh from Li-ion Battery
Hardware version:	K2_V7
Software version:	N/A
<b>Bluetooth 5.0</b>	
Modulation:	GFSK(DH5), $\pi/4$ -DQPSK(2DH5)
Operation frequency:	2402MHz~2480MHz
Max Peak Output Power:	DH5 : 1.40dBm 2DH5 : 2.21dBm
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	-0.58dBi
Note: Left earphone was tested	

## 2.3. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
⋮	⋮
38	2440
<b>39</b>	<b>2441</b>
40	2442
⋮	⋮
77	2479
<b>78</b>	<b>2480</b>

Note: The display in grey were the channel selected for testing.

### Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



## 2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
1	Spectrum Analyzer	R&S	FSV40-N	101798	Apr.25, 2020
2	Vector Signal Generator	Agilent	N5182A	MY50142520	Apr.10, 2020
3	Analog Signal Generator	HP	83752A	3344A00337	Apr.10, 2020
4	Power Sensor	Agilent	E9304A	MY50390009	Apr.10, 2020
5	Power Sensor	Agilent	E9300A	MY41498315	Apr.10, 2020
6	Wideband Radio Communication Tester	R&S	CMU200	115297	Apr.10, 2020
7	Climate Chamber	Angul	AGNH80L	1903042120	Apr.10, 2020
8	Dual Output DC Power Supply	Agilent	E3646A	MY40009992	Apr.10, 2020
9	RF Control Unit	Tonscend	JS0806-2	/	Apr.10, 2020

Transmitter spurious emissions & Receiver spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESR	102525	Apr.10, 2020
2	High Pass Filter	Chengdu E-Microwave	OHF-3-18-S	0E01901038	Apr.15, 2020
3	High Pass Filter	Chengdu E-Microwave	OHF-6.5-18-S	0E01901039	Apr.15, 2020
4	Spectrum Analyzer	HP	8593E	3831U02087	Apr.10, 2020
5	Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	01230	Apr.17, 2020
6	Loop Antenna	Beijin ZHINAN	ZN30900C	18050	Apr.17, 2020
7	Horn Antenna	R&S	Sep-60	69483	Apr.10, 2020
8	Spectrum Analyzer	R&S	FSV40-N	101798	Apr.25, 2020
9	Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	Apr.10, 2020
10	Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	Apr.10, 2020
11	Pre-Amplifier	EMCI	EMC051835SE	980662	Apr.17, 2020
12	Power Meter	Agilent	E4419B	GB41293710	Apr.10, 2020

Note:

1)The Cal. Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

## 2.5. Test Software

Software name	Model	Version
Conducted emission Measurement Software	EZ-EMC	EMC-Con 3A1.1
Radiated emission Measurement Software	EZ-EMC	FA-03A.2.RE
Bluetooth and WIFI Test System	JS1120-3	2.5.77.0418

### 3. TEST ITEM AND RESULTS

#### 3.1. Antenna requirement

##### Requirement

**FCC CFR Title 47 Part 15 Subpart C Section 15.203:**


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

##### Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

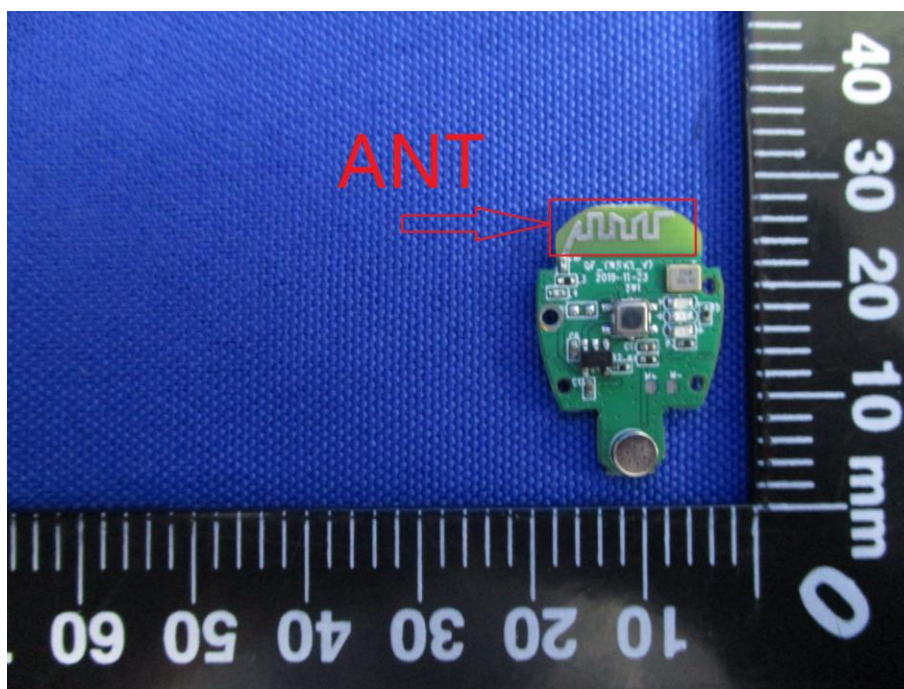

## 3.2. Conducted Emission

### Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### Test Configuration

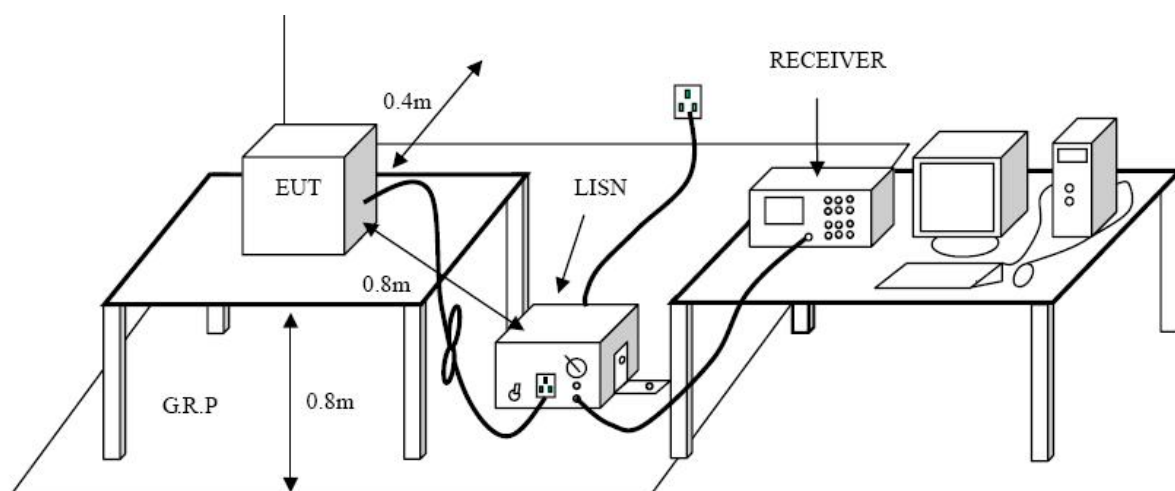

### Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment.  
The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

### Test Mode:


Please refer to the clause

### Test Results

Pre-scan DH5, 2DH5 modulation, and found the 2DH5 modulation 2402MHz which it is worse case, so only show the test data for worse case.

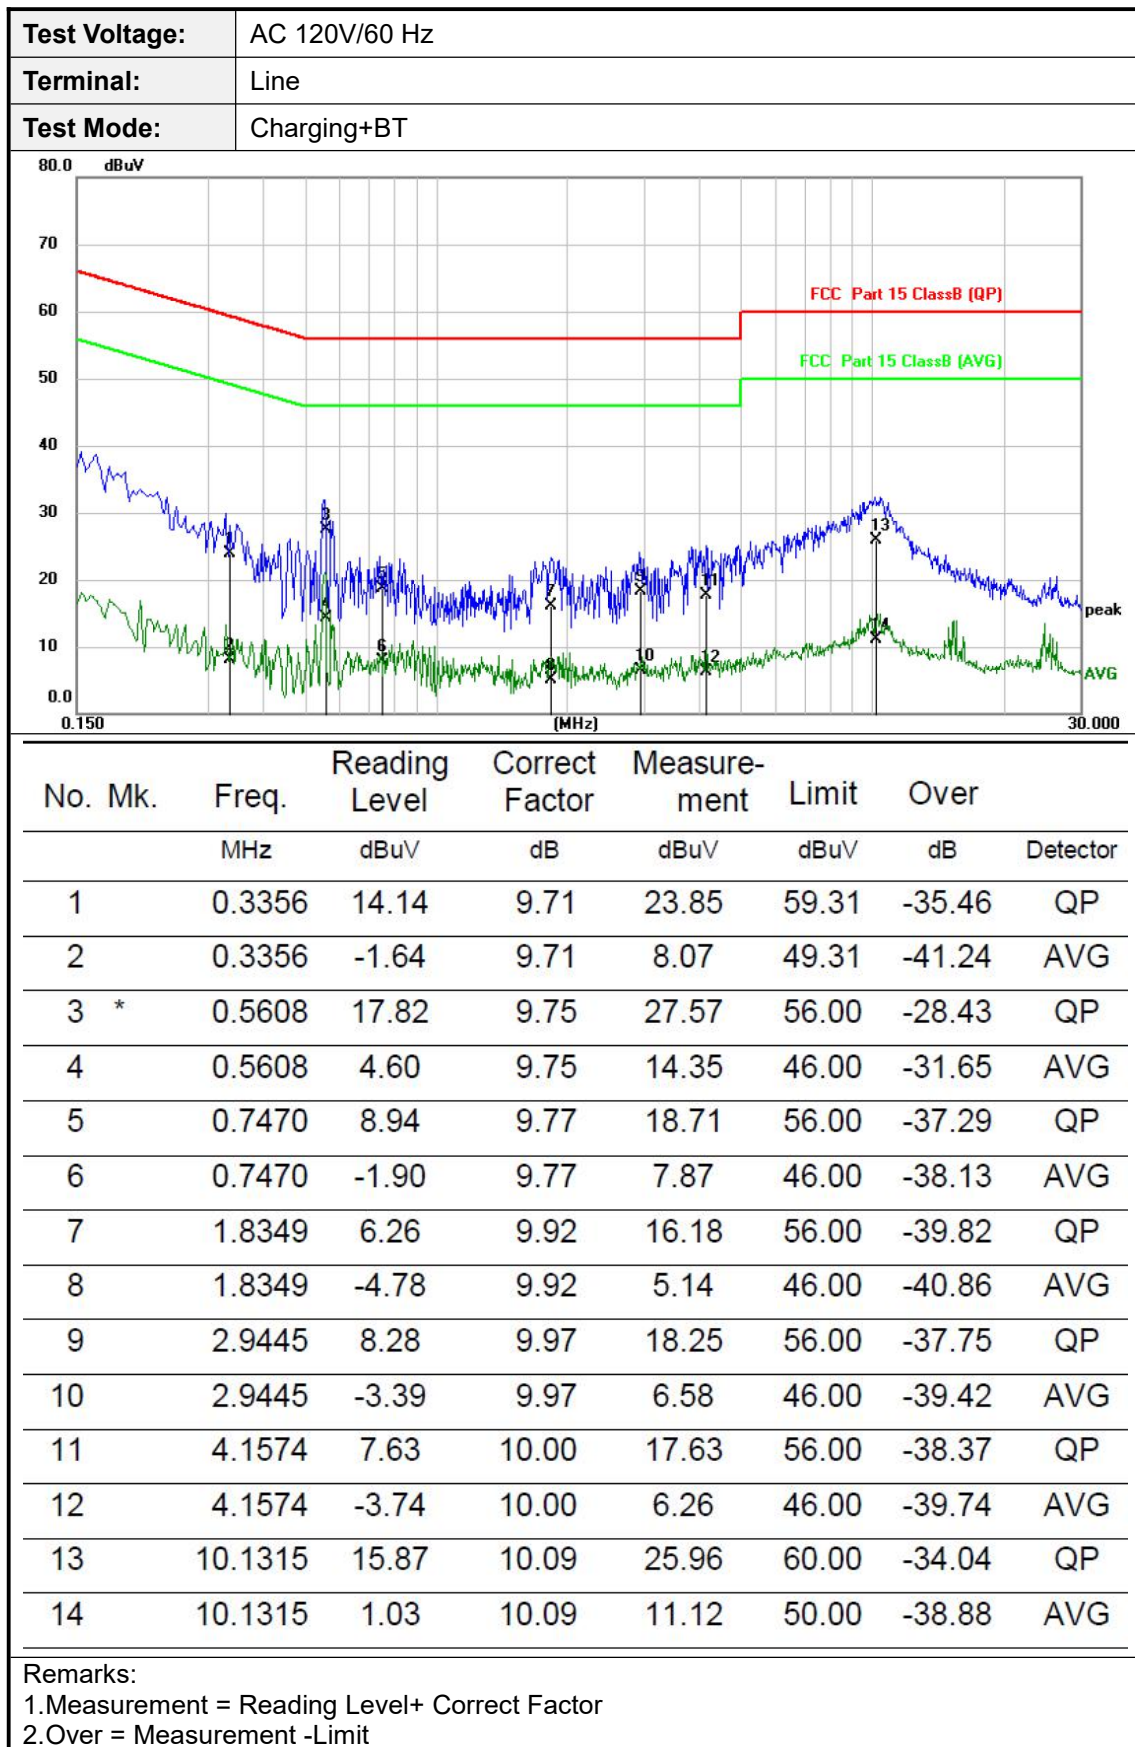



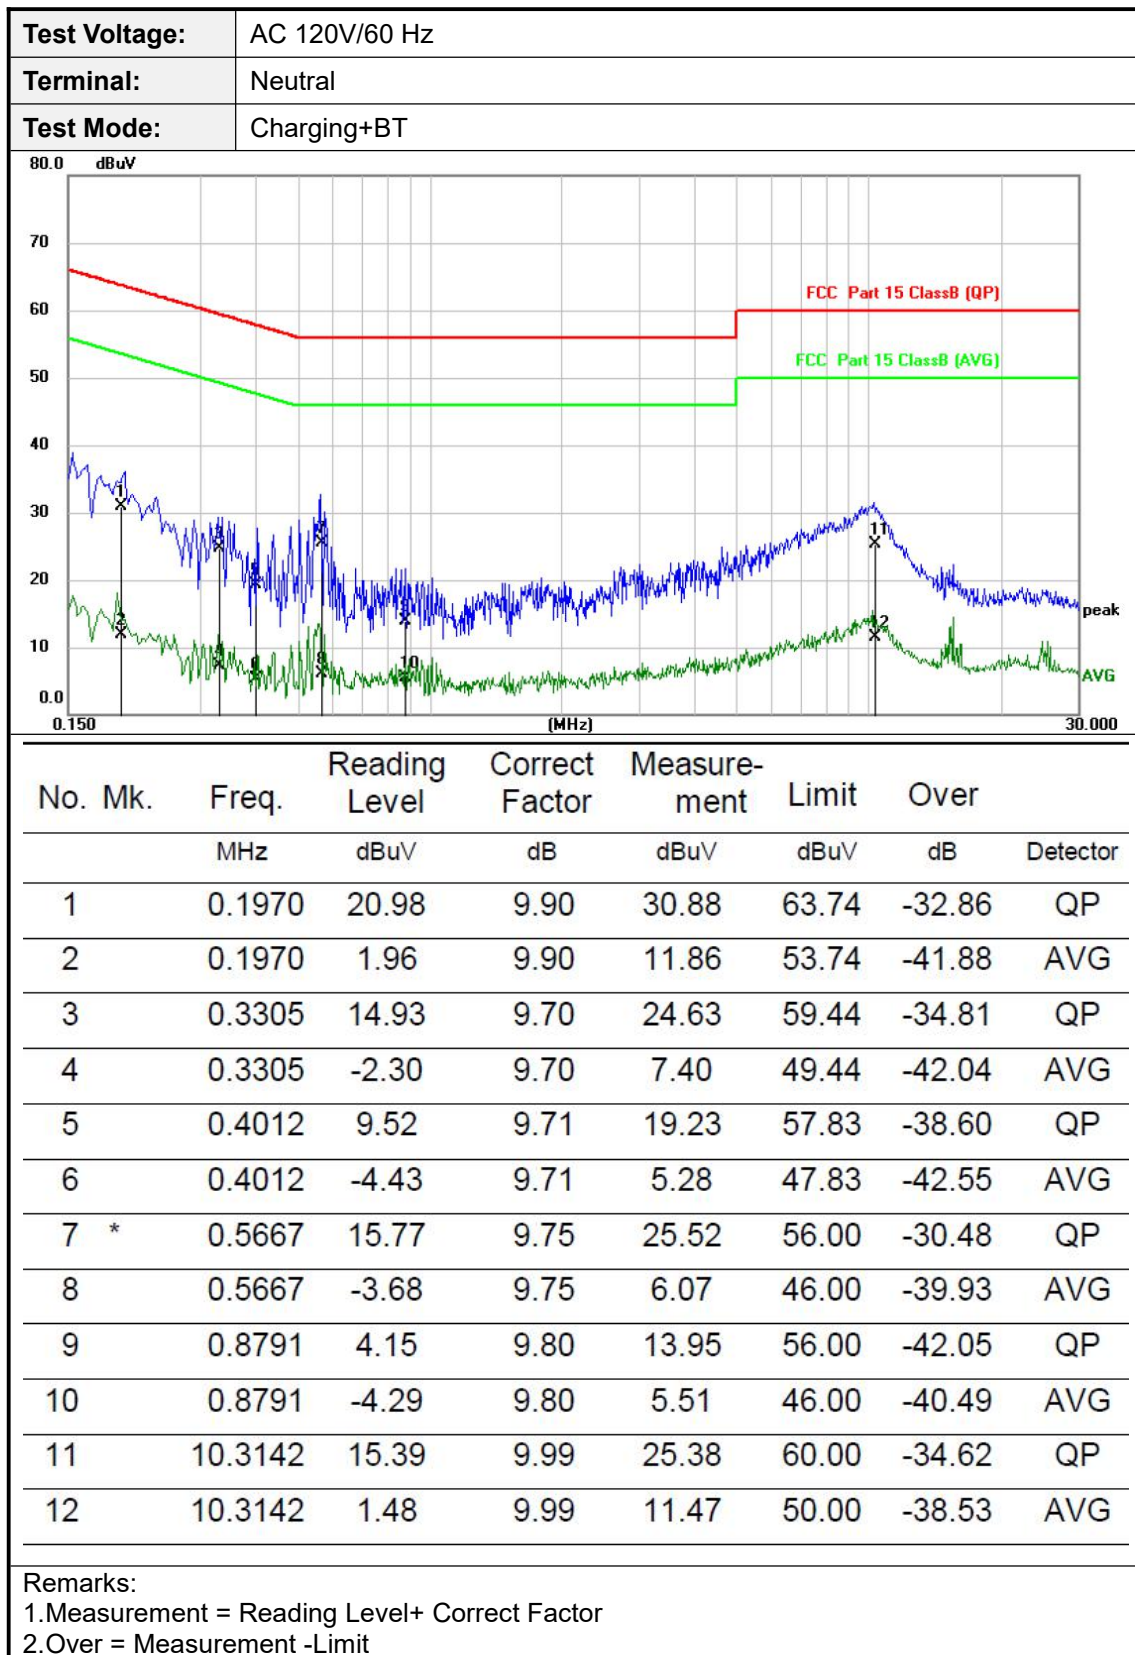


### 3.3. Peak Output Power

#### Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

#### Test Configuration

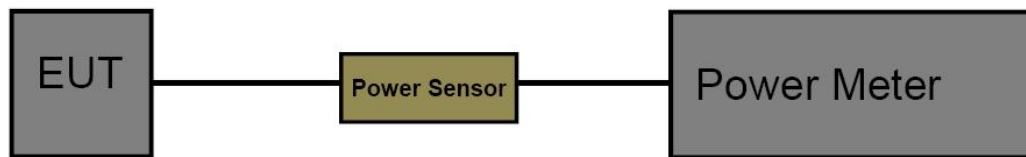


#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:  
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
RBW=3 MHz, VBW=10 MHz for bandwidth more than 1MHz.


#### Test Mode

Please refer to the clause 2.3

#### Test Result

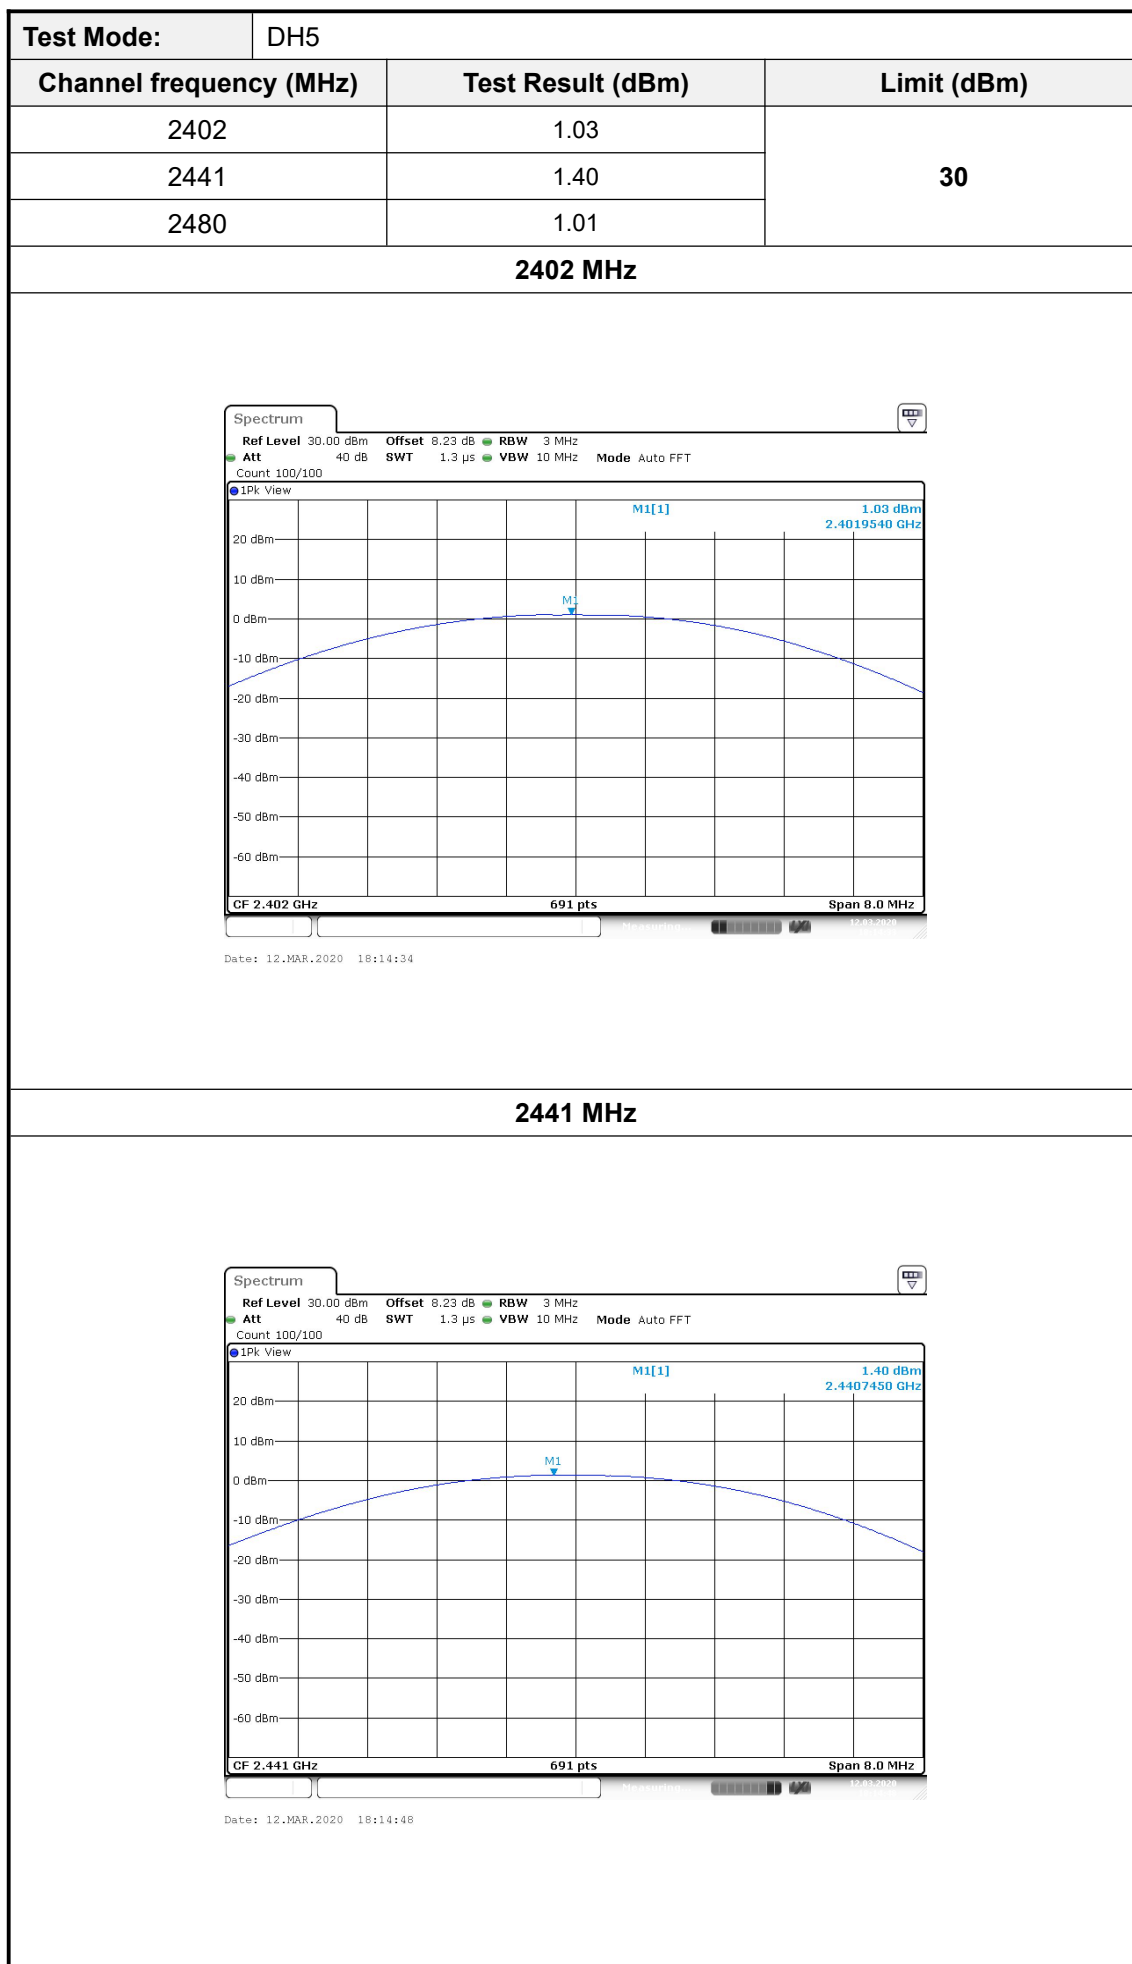


## 2480 MHz

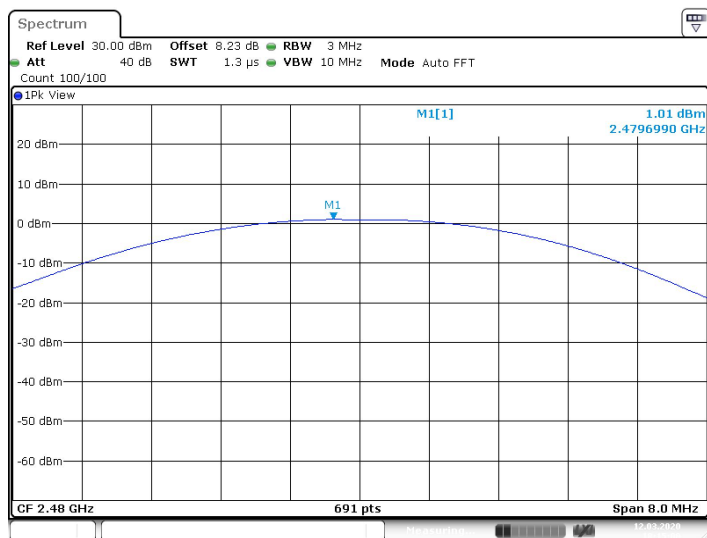


Date: 12.MAR.2020 18:15:00



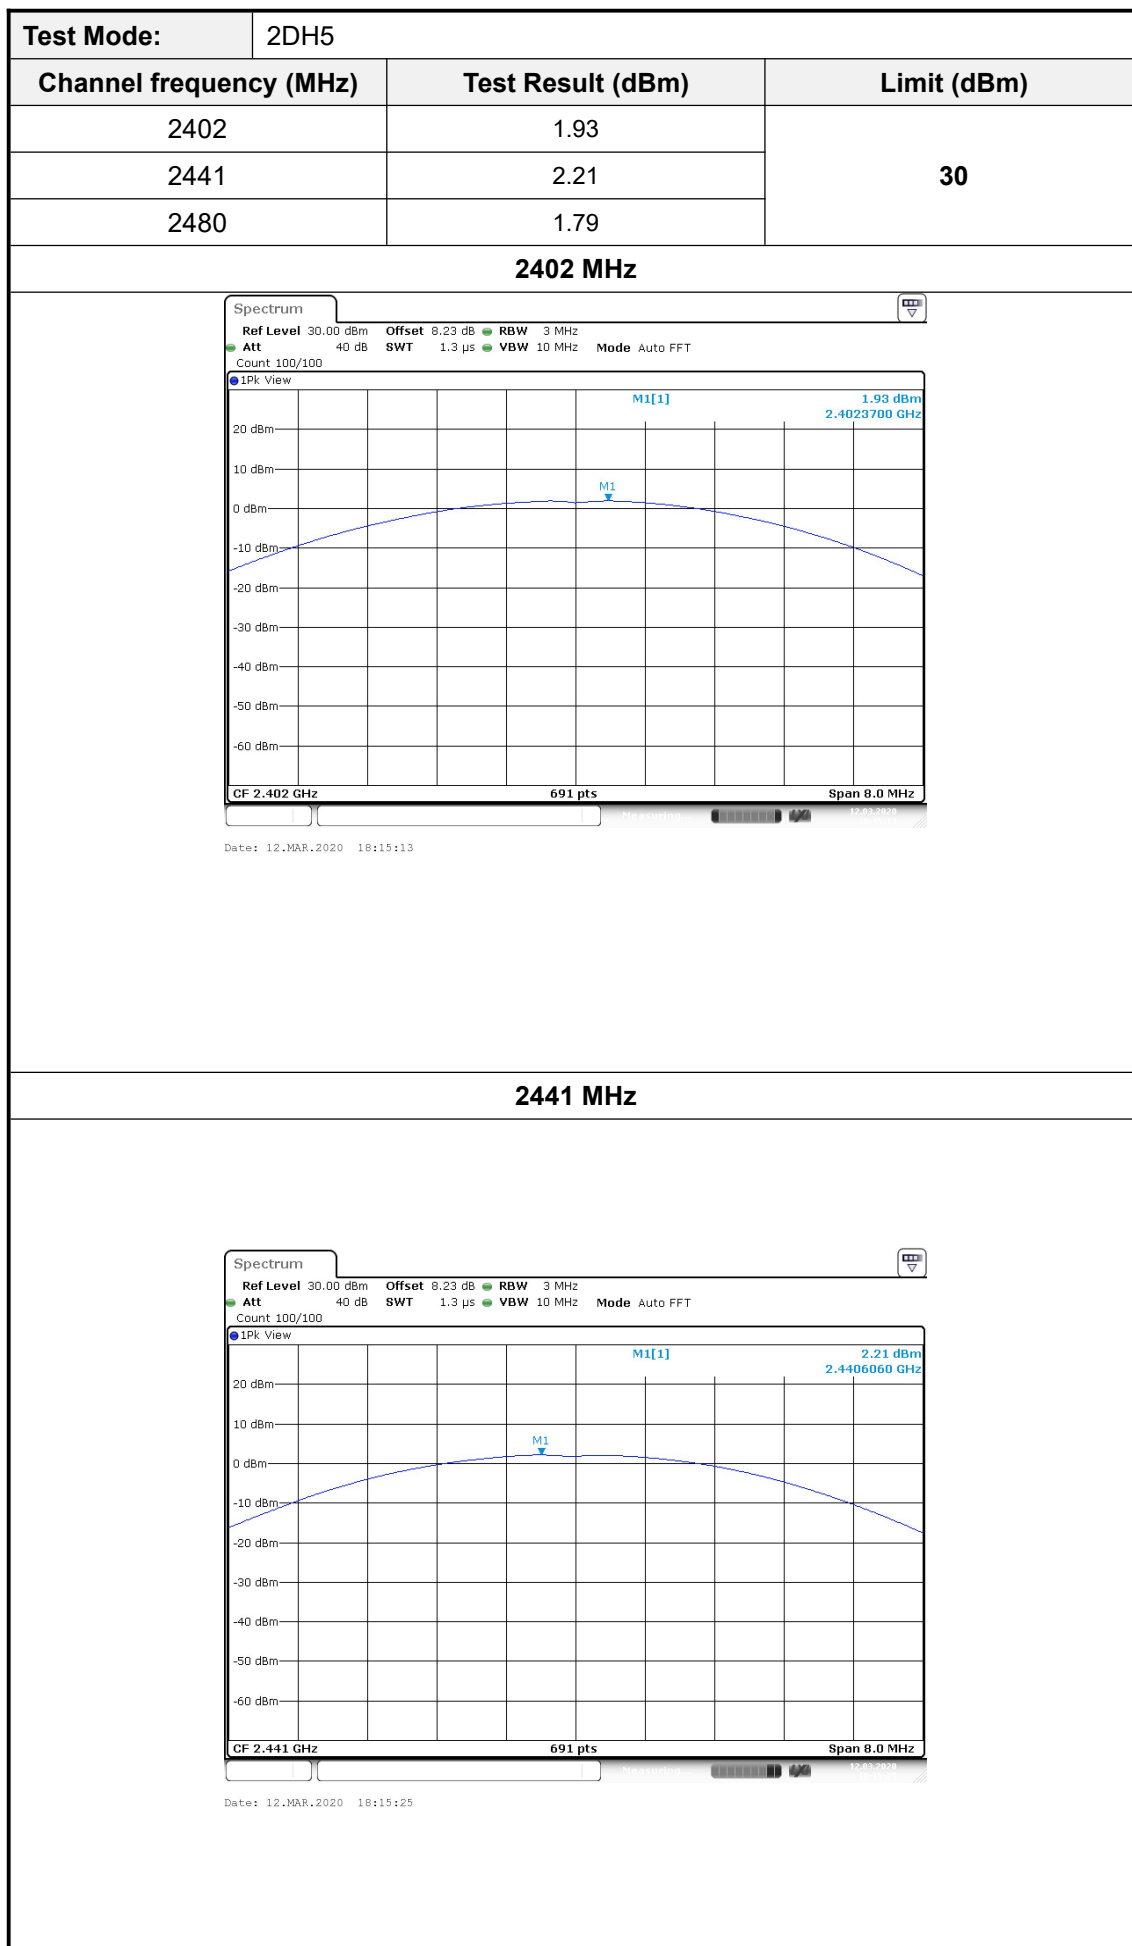

## 2480 MHz

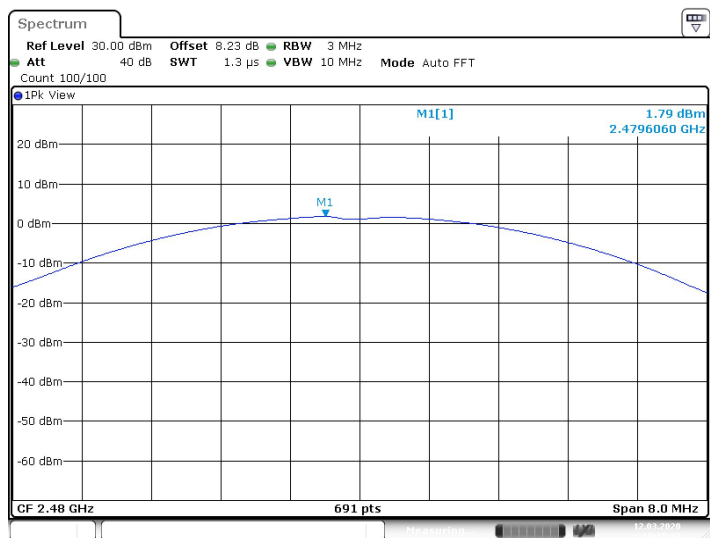


Date: 12.MAR.2020 18:15:36

### 3.4. 99% Occupied Bandwidth & 20dB Bandwidth

#### Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	$\leq 1$ MHz (20dB bandwidth)	2400~2483.5

#### Test Configuration

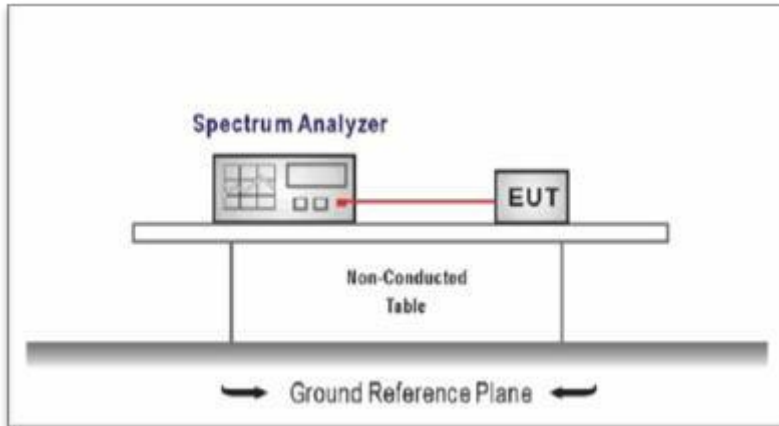

#### Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:  
20dB Bandwidth
  - Set RBW = 30 kHz.
  - Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - Detector = Peak.
  - Trace mode = Max hold.
  - Sweep = Auto couple.

99% Occupied Bandwidth

- Set RBW = 20 kHz.
- Set the video bandwidth (VBW) =100 kHz.
- Detector = Peak.
- Trace mode = Max hold.
- Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


#### Test Mode

Please refer to the clause 2.3.


#### Test Results

Test Mode:	DH5			
Channel frequency (MHz)	20dB Bandwidth [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	0.864	2401.544	2402.408	PASS
2441	0.864	2440.544	2441.408	PASS
2480	0.864	2479.544	2480.408	PASS


### 2402 MHz

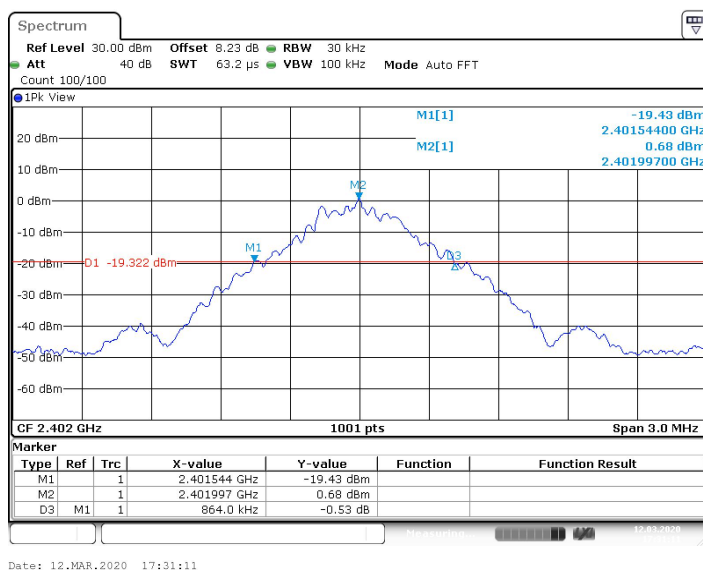

### 2441 MHz

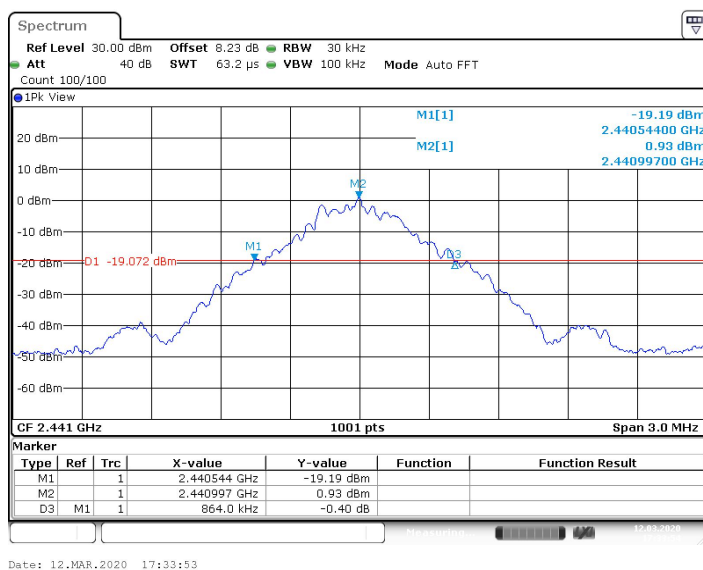


## 2480 MHz

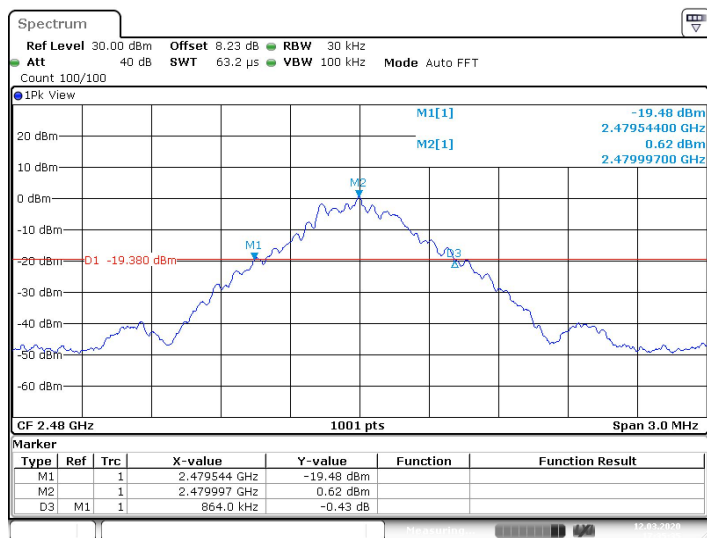


<b>Test Mode:</b>	2DH5			
Channel frequency (MHz)	20dB Bandwidth [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	1.227	2401.376	2402.603	PASS
2441	1.227	2440.376	2441.603	PASS
2480	1.230	2479.373	2480.603	PASS


### 2402 MHz

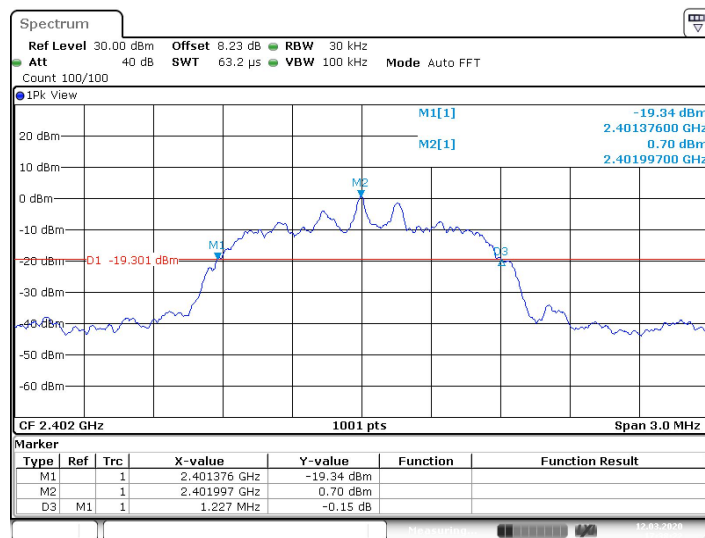


### 2441 MHz

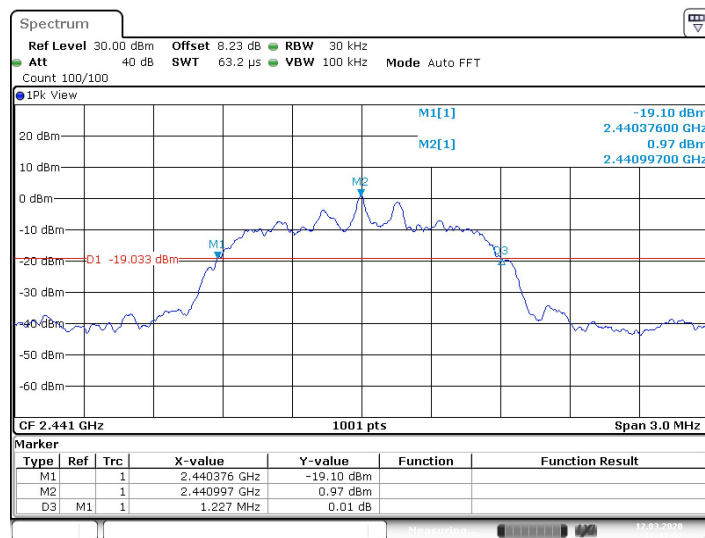

## 2480 MHz

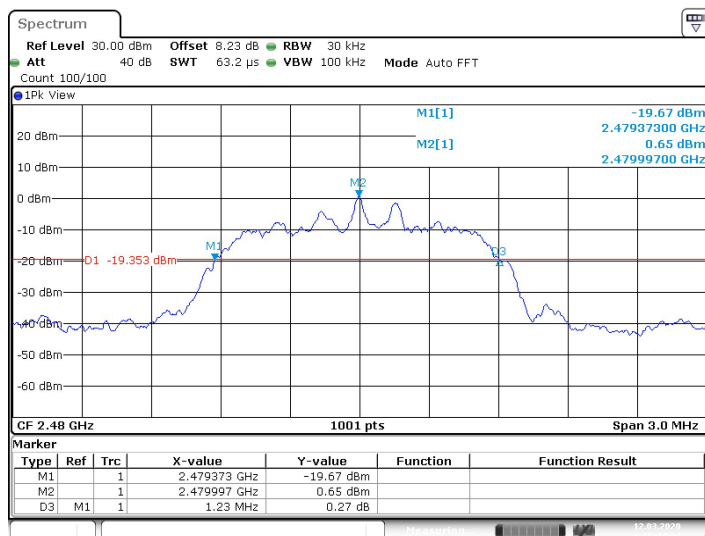


Date: 12.MAR.2020 17:44:34

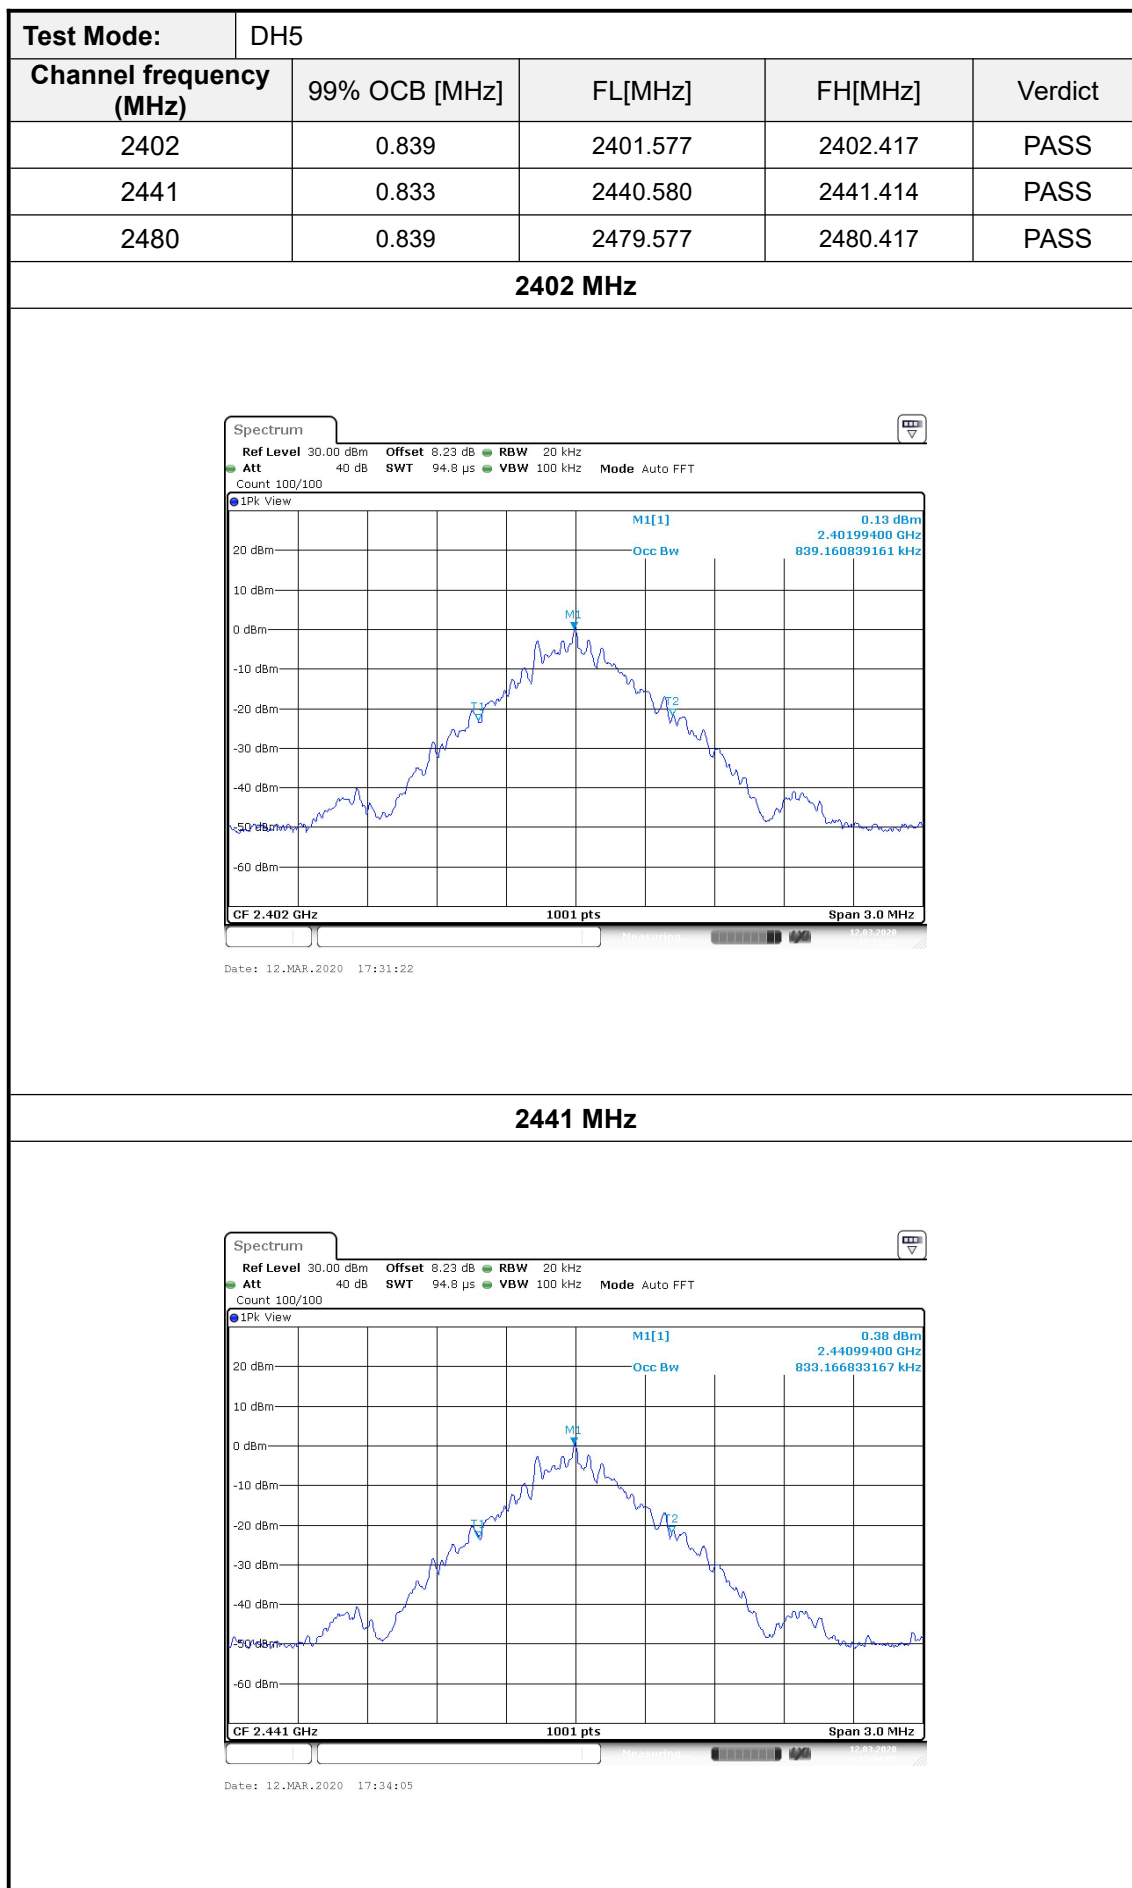




## 2480 MHz

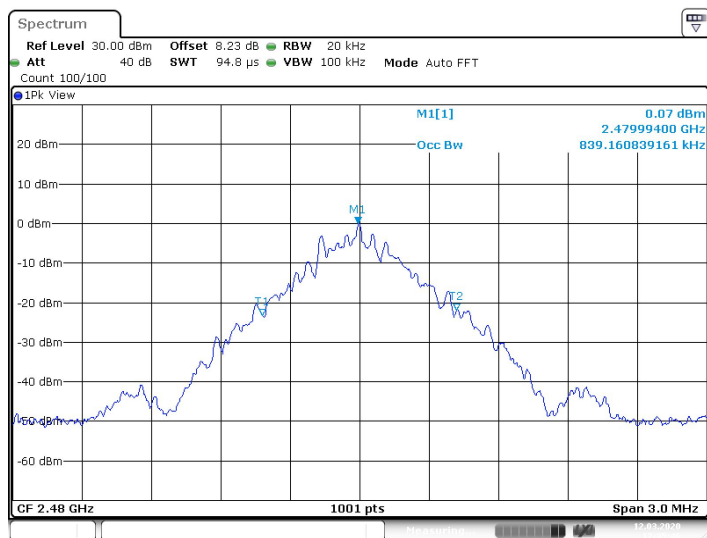


Test Mode:	2DH5			
Channel frequency (MHz)	99% OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
2402	1.169	2401.410	2402.578	PASS
2441	1.172	2440.410	2441.581	PASS
2480	1.172	2479.410	2480.581	PASS


### 2402 MHz

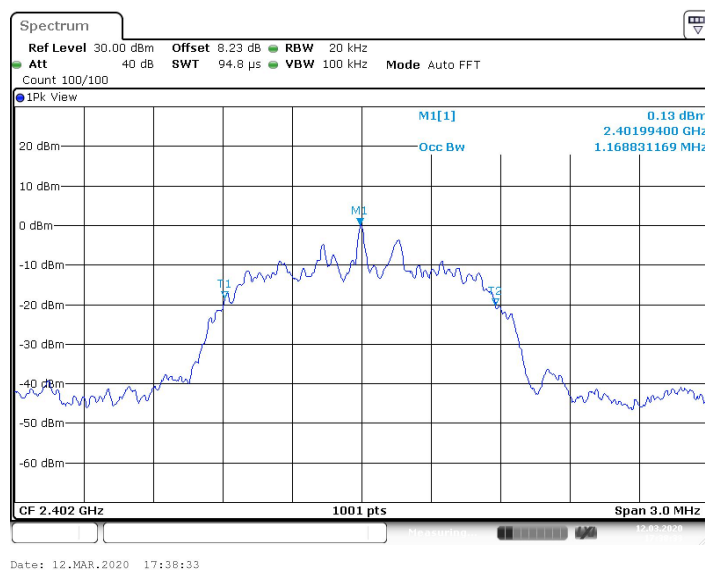

### 2441 MHz

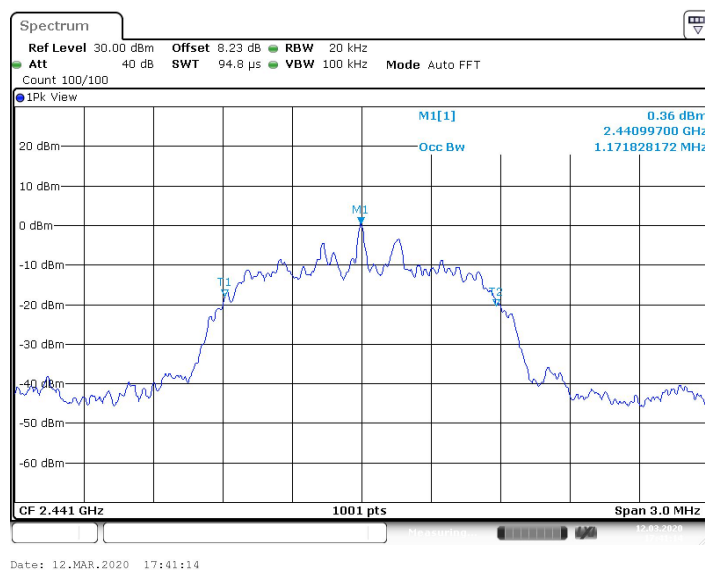

## 2480 MHz

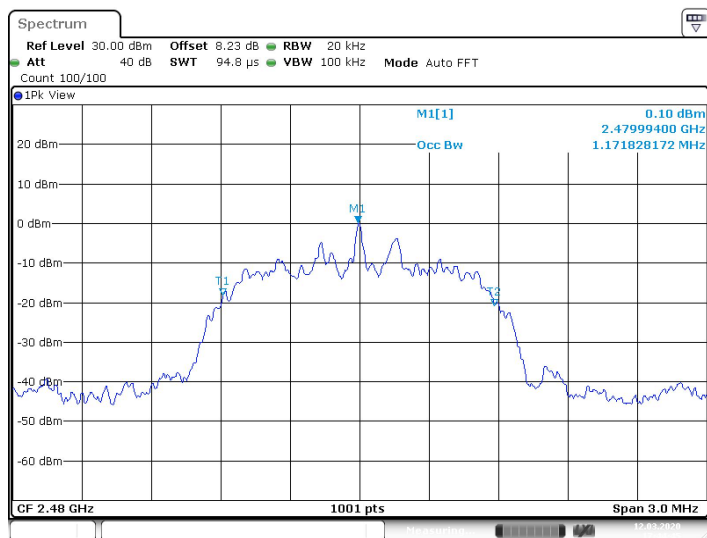

Date: 12.MAR.2020 17:44:46

### 3.5. Carrier Frequencies Separation


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the  $\frac{2}{3} \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

#### Test Configuration

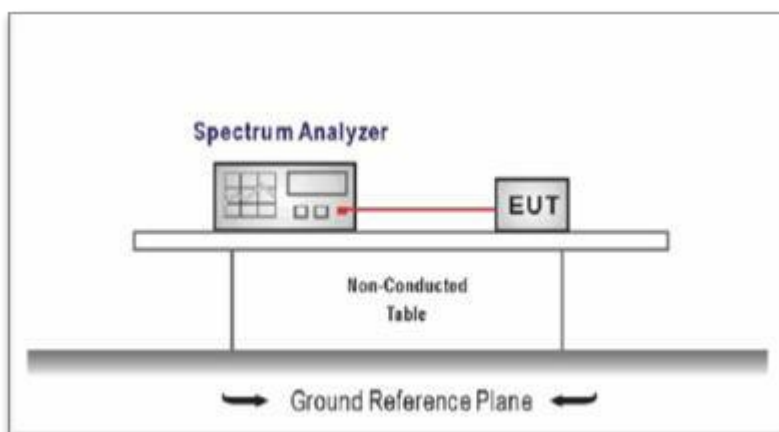

#### Test Procedure


1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Set RBW = 100 kHz.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.


NOTE: The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test, and found the middle channel which is the worse case, so only show the test date for worse case.

#### Test Mode

Please refer to the clause 2.3.

#### Test Results

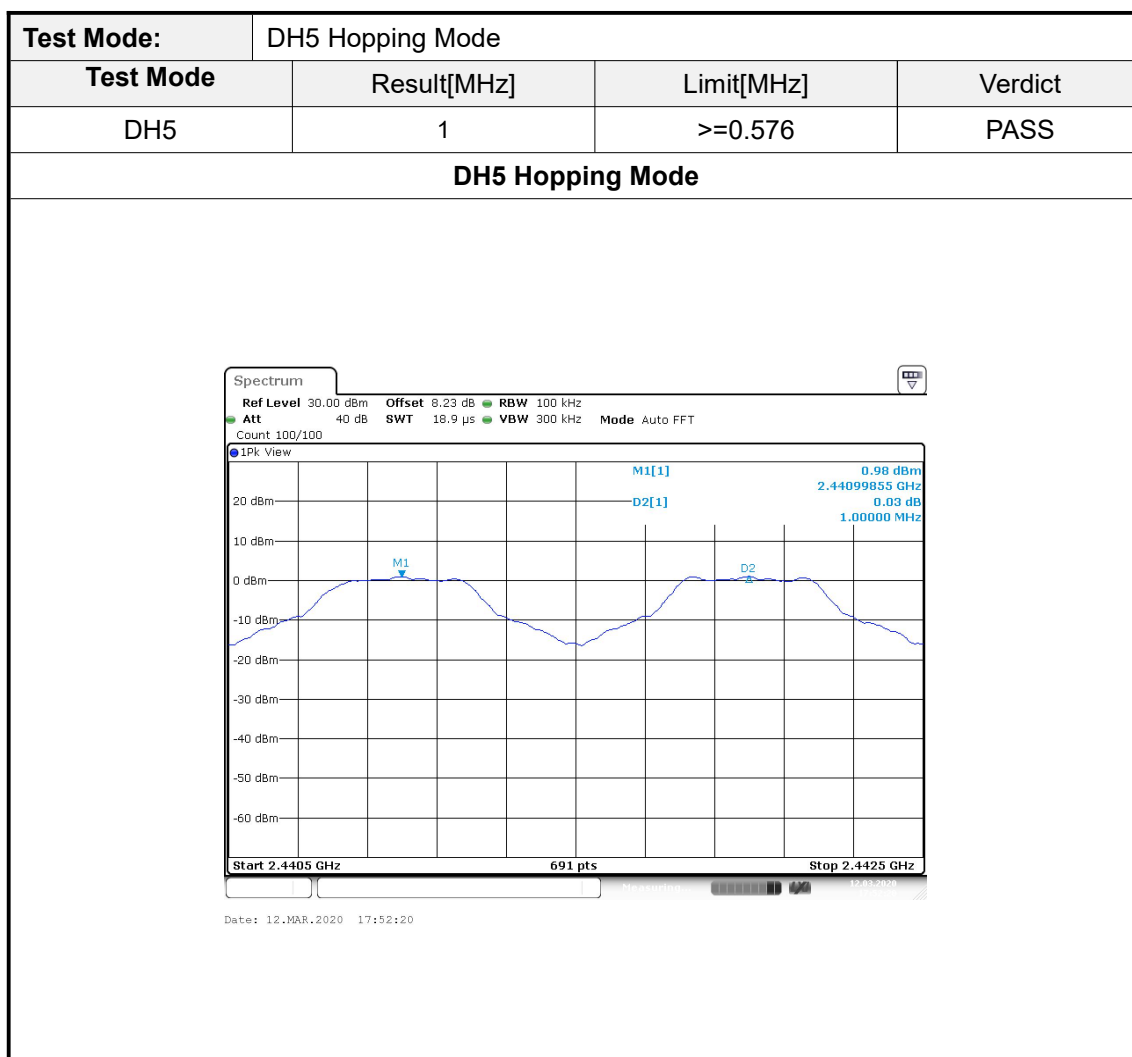

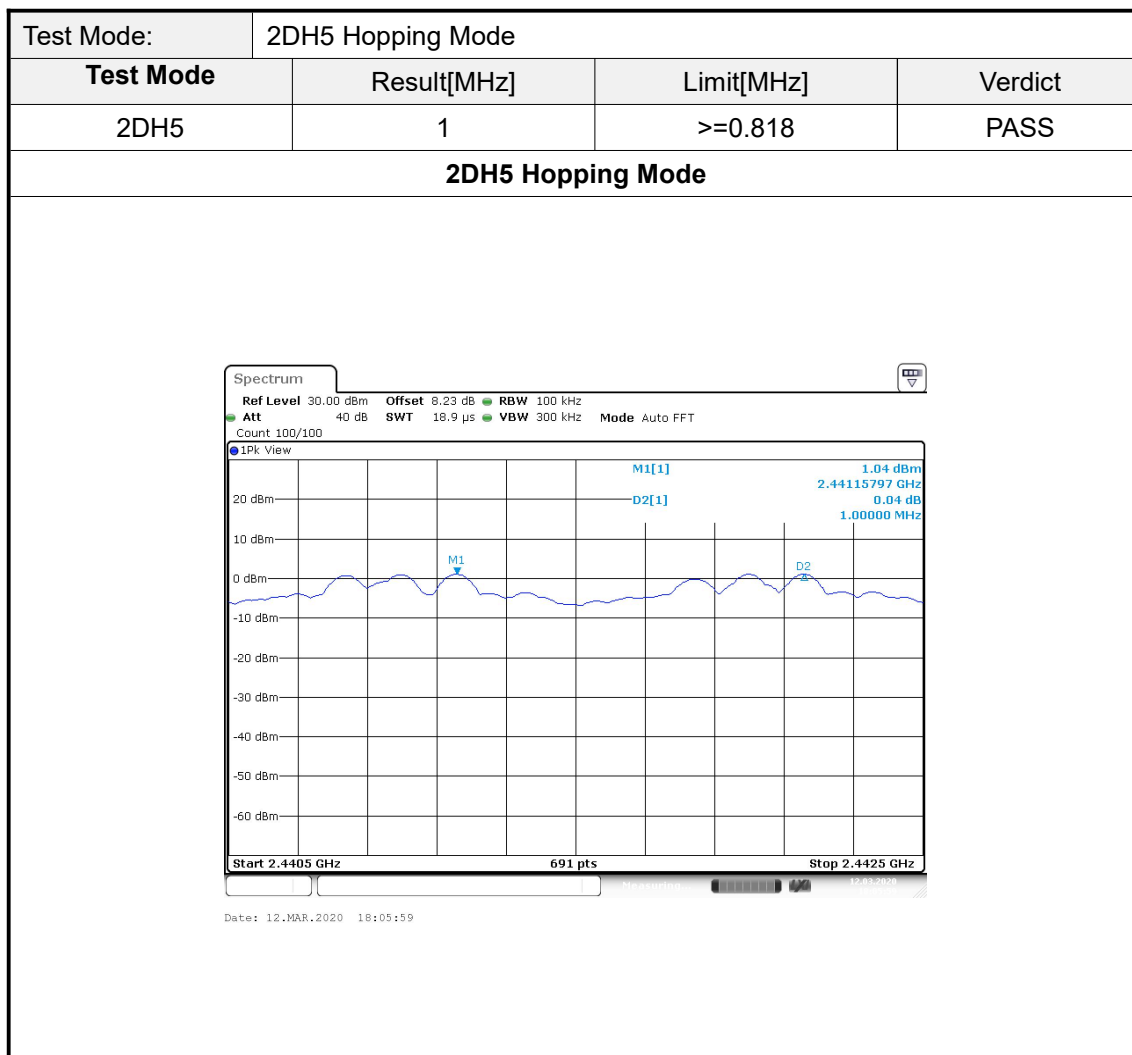


### 3.6. Number of Hopping Channel

#### Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

#### Test Configuration

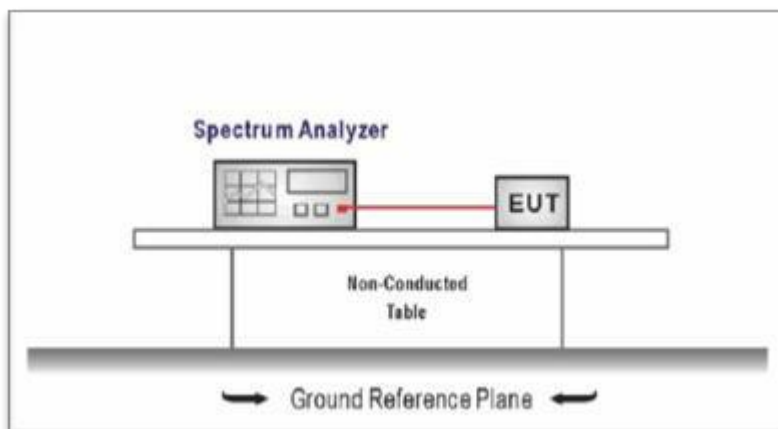


#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Peak Detector: RBW=100 kHz, VBW $\geq$ RBW, Sweep time= Auto.

#### Test Mode

Please refer to the clause 2.3.

#### Test Result

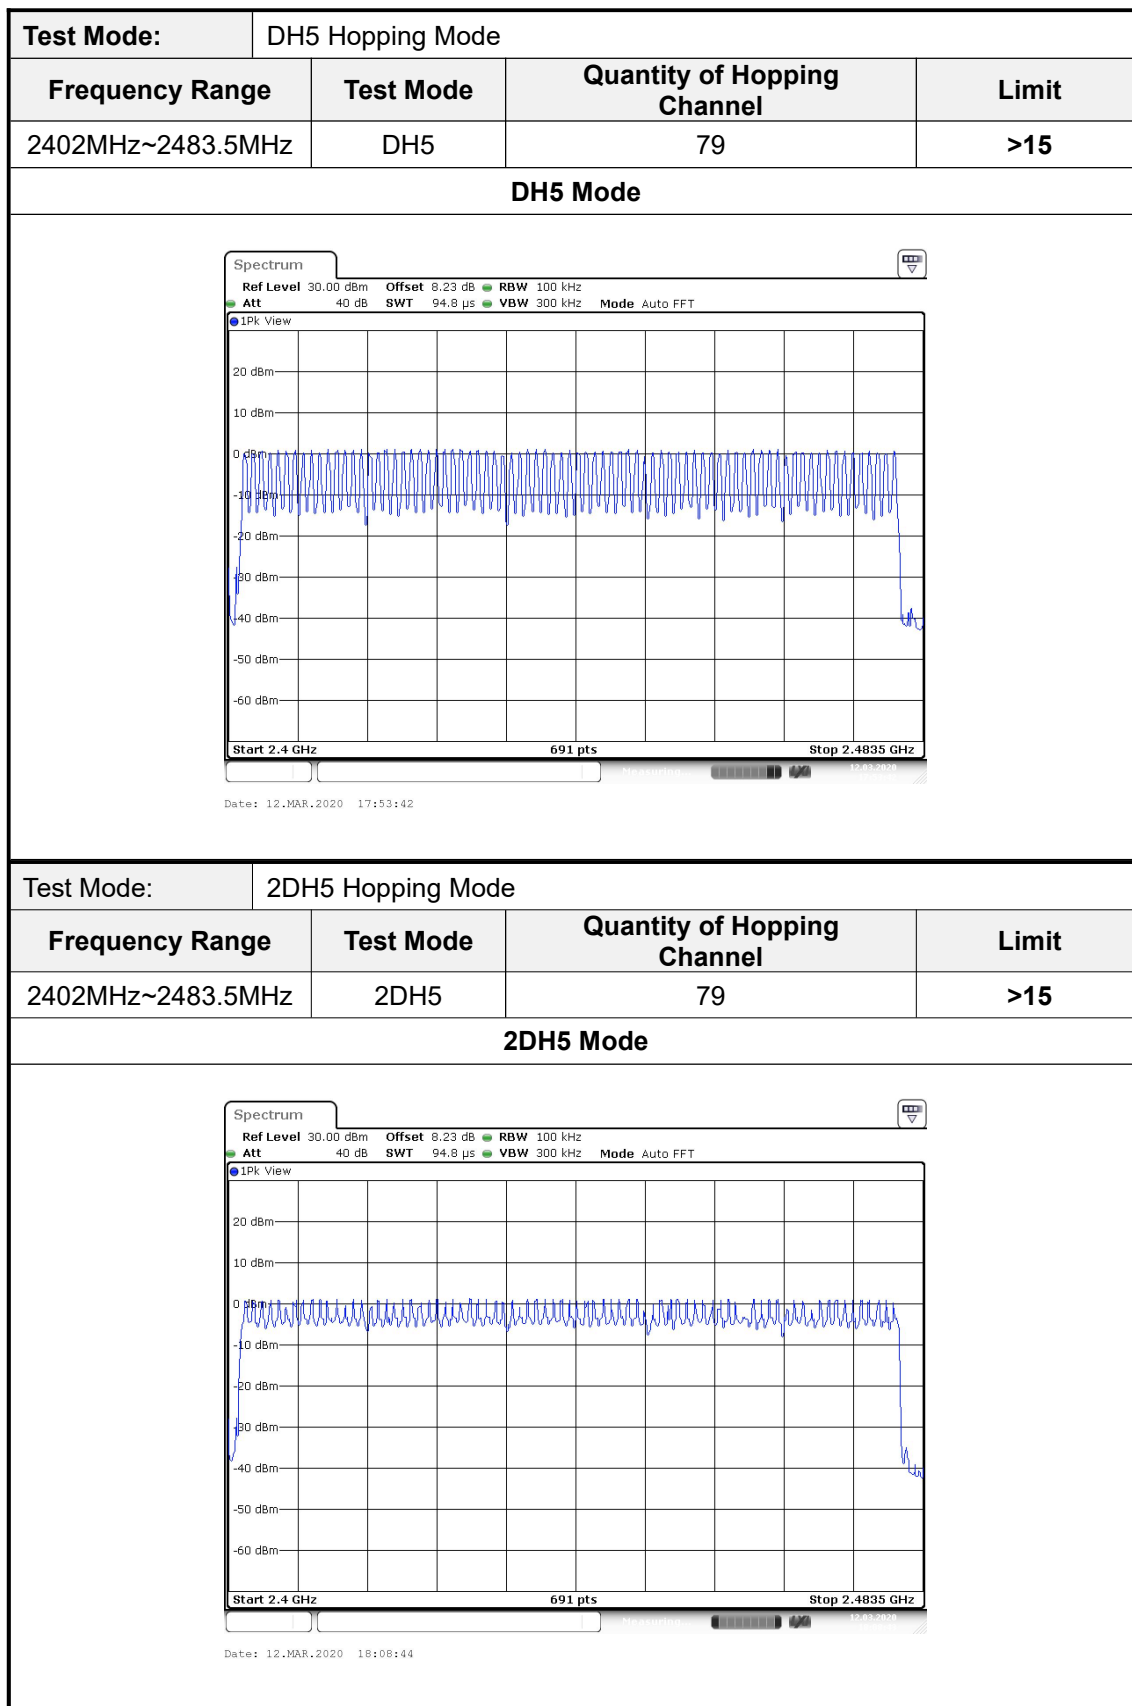




### 3.7. Dwell Time

#### Limit

Section	Test Item	Limit
15.247(a)(1)	Average Time of Occupancy	0.4 sec

#### Test Configuration

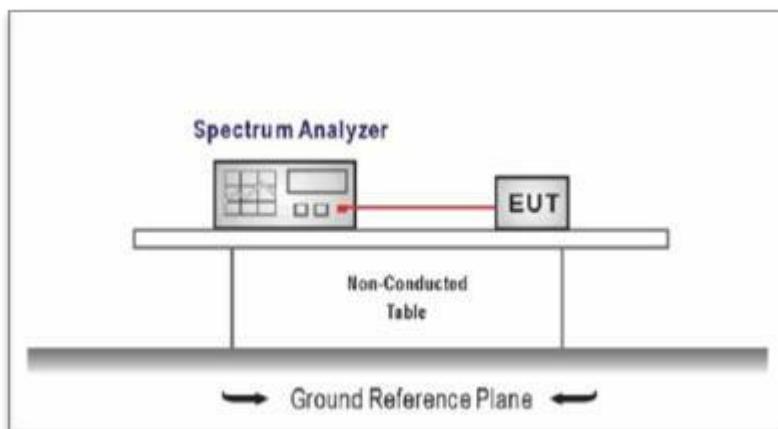

#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Spectrum Setting: RBW=1MHz, VBW $\geq$ RBW.
  - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
  - (3) Sweep Time is more than once pulse time.
  - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
  - (5) Measure the maximum time duration of one single pulse.
  - (6) Set the EUT for packet transmitting.

#### Test Mode

Please refer to the clause 2.3

#### Test Result


Note:


1.We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.

2.Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  2  $\div$  79)  $\times$ 31.6 Second for DH1, 2DH1, 3DH1

Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  4  $\div$  79)  $\times$ 31.6 Second for DH3, 2DH3, 3DH3

Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$ 31.6 Second for DH5, 2DH5, 3DH5

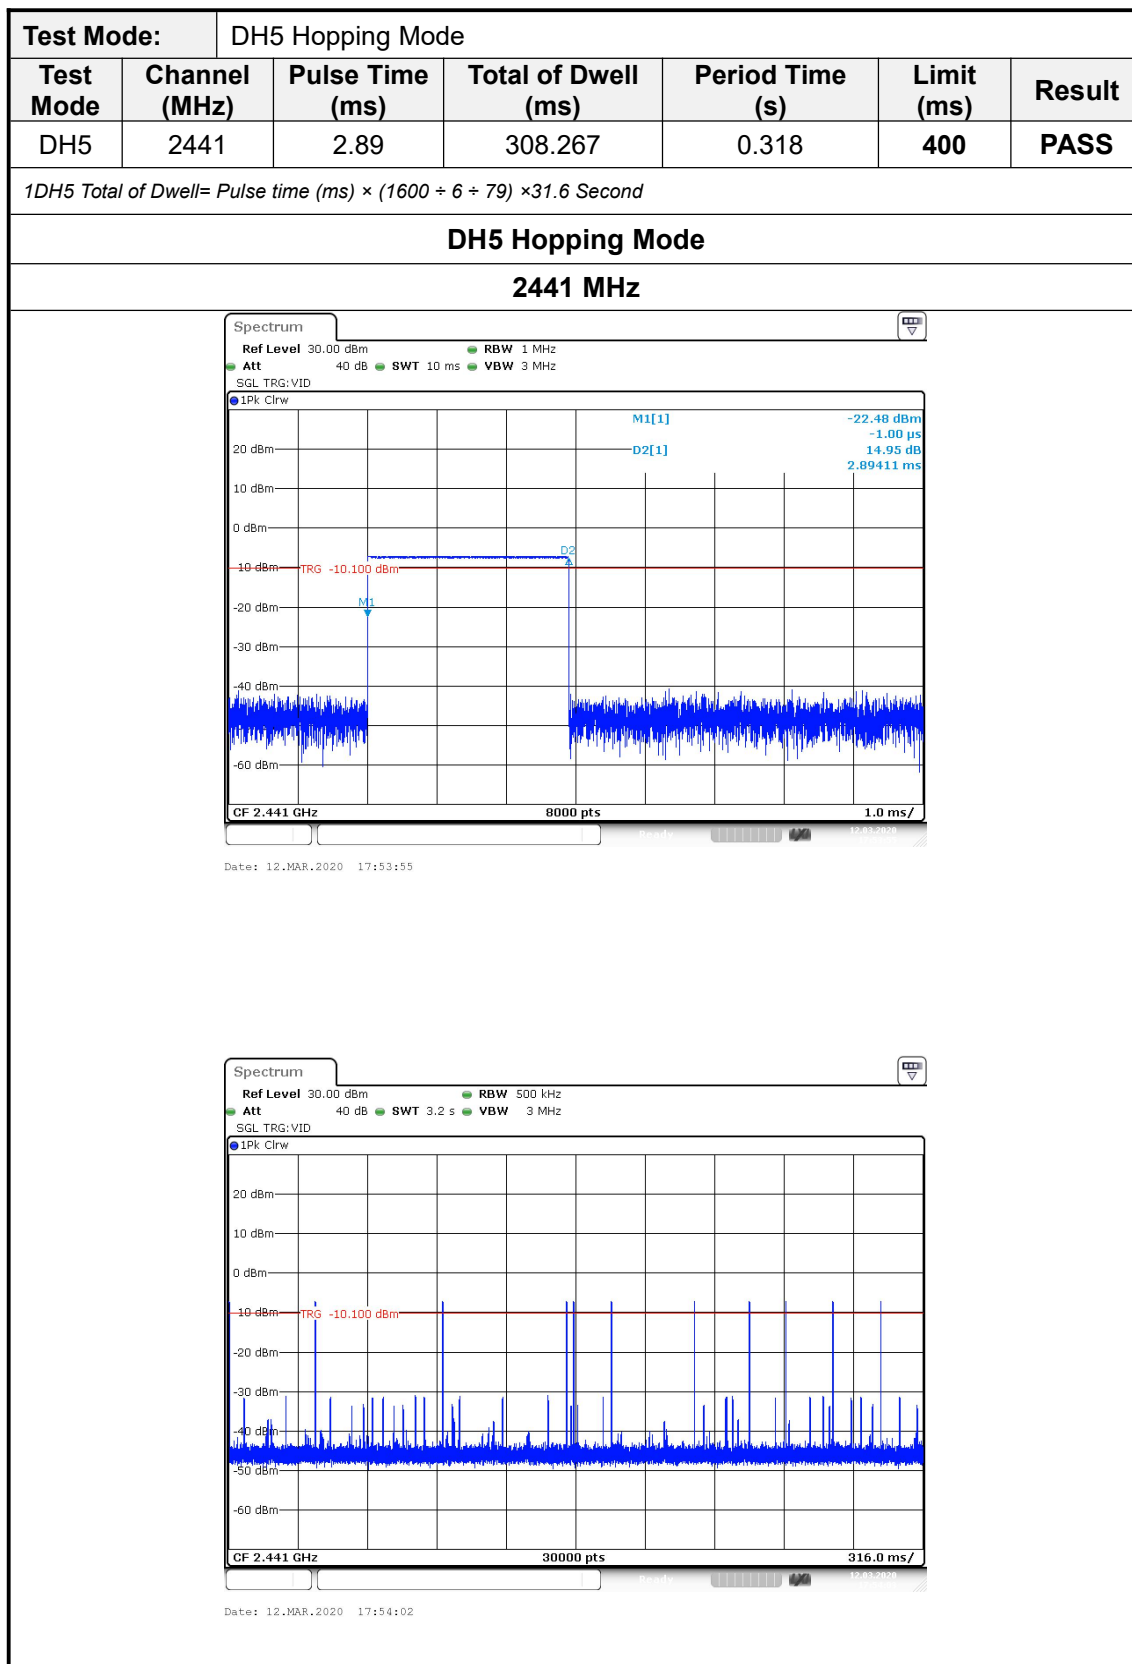

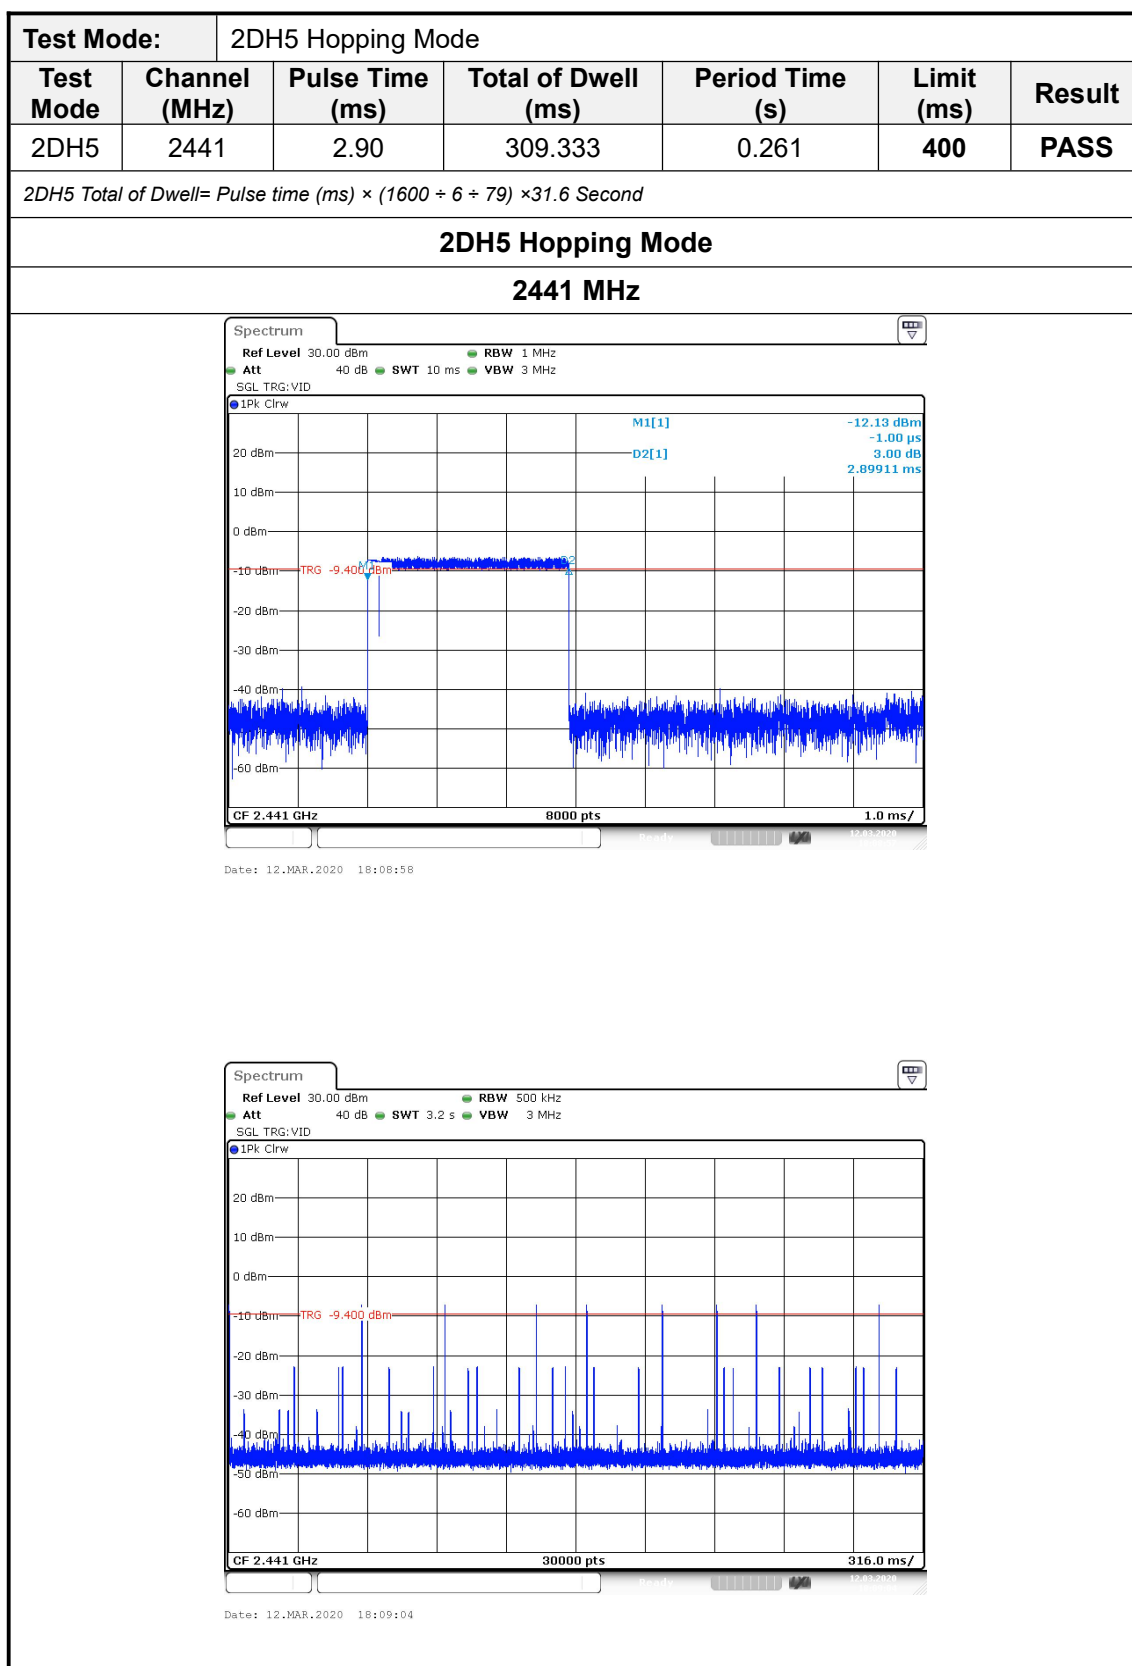


### 3.8. Band Edge Emissions(Radiated)

#### Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54
<b>Note: All restriction bands have been tested, only the worst case is reported.</b>		

#### Test Configuration

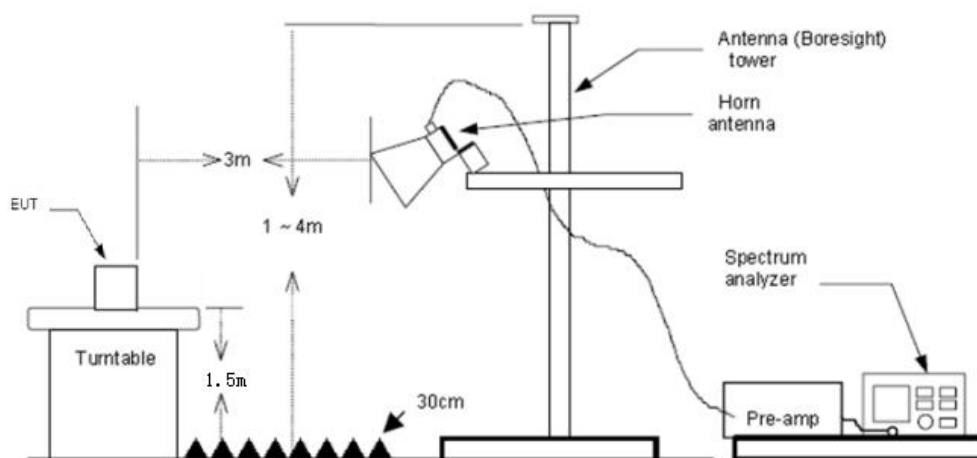

#### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.  
RBW=1MHz, VBW=10Hz with Average Detector for Average Value.

#### Test Mode

Please refer to the clause 2.3.

#### Test Results

Note:

- 1.Measurement = Reading level + Correct Factor  
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2.Pre-scan DH5, 2DH5 modulation, and found the 2DH5 modulation which it is worse case, so only show the test data for worse case.