

TEST REPORT

FCC ID: 2ATQI-HI-FICLASSIC

Product: 2.1 CH SPEAKER

Model No.: HI-FI SYSTEM CLASSIC MIC

Additional Model No.: TPT-MIC21091, HI-FI CLASSIC MIC

Trade Mark: Wings Mobile

Report No.: TCT200831E043

Issued Date: Nov. 03, 2020

Issued for:

Wings Mobile Telecom SL

c/Beethoven 15, piso 4, Barcelona, 08021 Spain

Issued By:

Shenzhen Tongce Testing Lab.

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China**

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: *This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.*

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. General Information.....	6
4.1. Test environment and mode	6
4.2. Description of Support Units	6
5. Facilities and Accreditations	7
5.1. Facilities	7
5.2. Location.....	7
5.3. Measurement Uncertainty	7
6. Test Results and Measurement Data	8
6.1. Antenna requirement	8
6.2. Conducted Emission.....	9
6.3. Maximum Radiated Output Power	12
6.4. Occupied Bandwidth.....	14
6.5. Necessary Bandwidth Spurious Emissions	16
6.6. Radiated Spurious Emission Measurement	18
6.7. Frequency Stability Measurement.....	25

Appendix A: Photographs of Test Setup


Appendix B: Photographs of EUT

1. Test Certification

Product:	2.1 CH SPEAKER
Model No.:	HI-FI SYSTEM CLASSIC MIC
Additional Model No.:	TPT-MIC2109W, HI-FI CLASSIC MIC
Trade Mark:	Wings Mobile
Applicant:	Wings Mobile Telecom SL
Address:	c/Beethoven 15, piso 4, Barcelona, 08021 Spain
Manufacturer:	SHENZHEN TENPAITON ELECTRONIC CO., LTD
Address:	Unit D 5F, Yinxiang Building, Xiang Technology Industrial Park, Juiwei, Xixiang, Bao'An, Shenzhen, China
Date of Test:	Sep. 01, 2020 – Nov. 03, 2020
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.236 ANSI C63.10:2013

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Aaron Mo

Date:

Nov. 03, 2020

Reviewed By:



Beryl Zhao

Date:

Nov. 03, 2020

Approved By:



Tomsin

Date:

Nov. 03, 2020

2. Test Result Summary

Requirement	CFR 47 Section	Result
AC Power Line Conducted Emission	§15.207	PASS
Output Power	§15.236 (d)	PASS
Occupied Bandwidth	§15.236 (f)	PASS
Necessary Bandwidth Spurious Emissions	§15.236 (g)	PASS
Spurious Emission	§15.236 (g)	PASS
Frequency Stability	§15.236 (f)(3)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	2.1 CH SPEAKER
Model No.:	HI-FI SYSTEM CLASSIC MIC
Additional Model No.:	TPT-MIC2109W, HI-FI CLASSIC MIC
Trade Mark:	Wings Mobile
Operation Frequency:	210MHz
Number of Channel:	1
Modulation Technology:	FM
Antenna Type:	Internal Antenna
Antenna Gain:	0dBi
Power Supply:	DC 3V
Remark:	All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

4. General Information

4.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.0 °C	25.0 °C
Humidity:	55 % RH	55 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery	

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.


No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

E.U.T Antenna:

The antenna is an internal antenna which permanently attached, and the best case gain of the antenna is 0dBi.

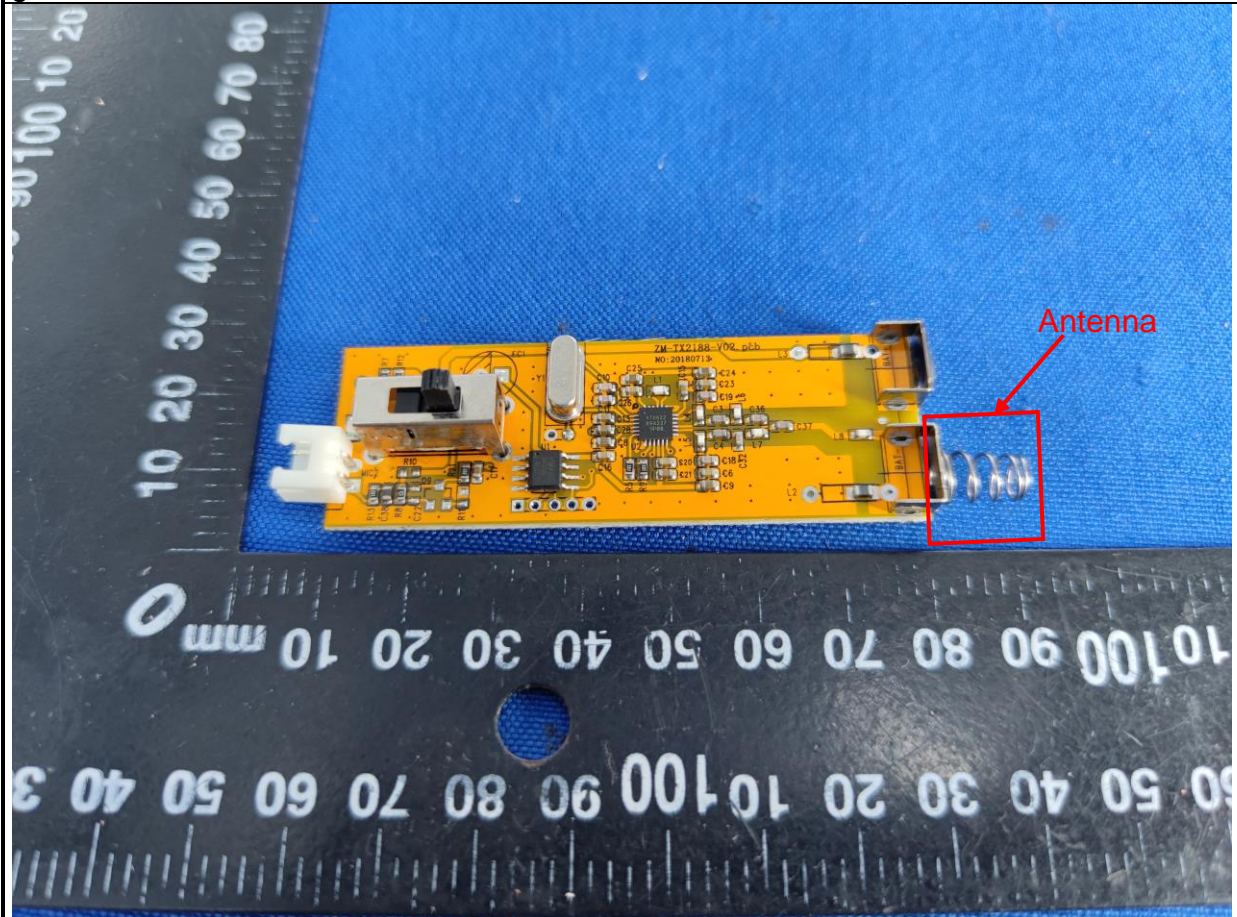

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	N/A														

6.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESPI	101402	Jul. 27, 2021
LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2021
Line-5	TCT	CE-05	N/A	Sep. 02, 2021
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Not applicable to this device, which is powered by battery

6.3. Maximum Radiated Output Power

6.3.1. Test Specification

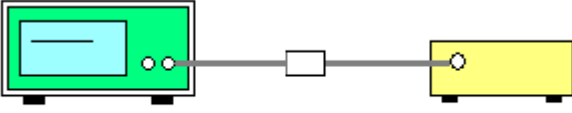Test Requirement:	FCC Part15 C Section 15.236 (d)
Test Method:	ANSI C63.10:2013
Limit:	50 mW EIRP
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Measure the conducted output power and record the results in the test report.
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Frequency (MHz)	Conducted Output Power (dBm)	Antenna Gain	EIRP (dBm)	EIRP Limit (dBm)	Result
210	-0.61	0	-0.61	17.00	PASS

Note: EIRP = Conducted Output Power + Antenna Gain


Test plots as follows:

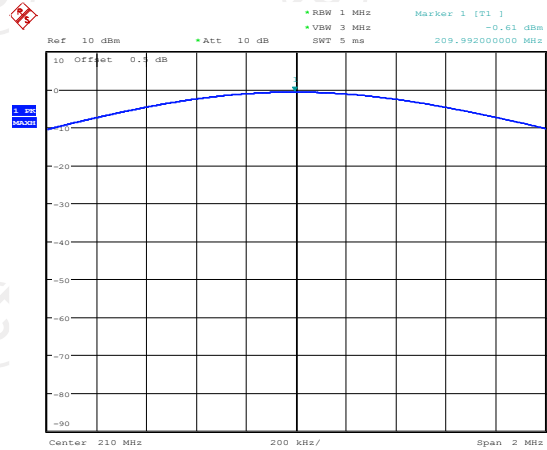

Date: 21.OCT.2020 14:54:26

6.4. Occupied Bandwidth

6.4.1. Test Specification

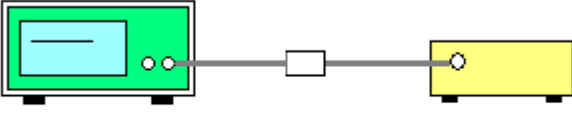Test Requirement:	FCC Part15 C Section 15.236 (f)
Test Method:	ANSI C63.10:2013
Limit:	not exceed 200 kHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. Set to the maximum power setting and enable the EUT transmit continuously. 2. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. 3. Use the 99% power bandwidth function and record the results in the test report.
Test Result:	PASS

6.4.2. Test Instruments


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.4.3. Test data

Frequency (MHz)	Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
210	60.6	200	PASS



Test plots as follows:

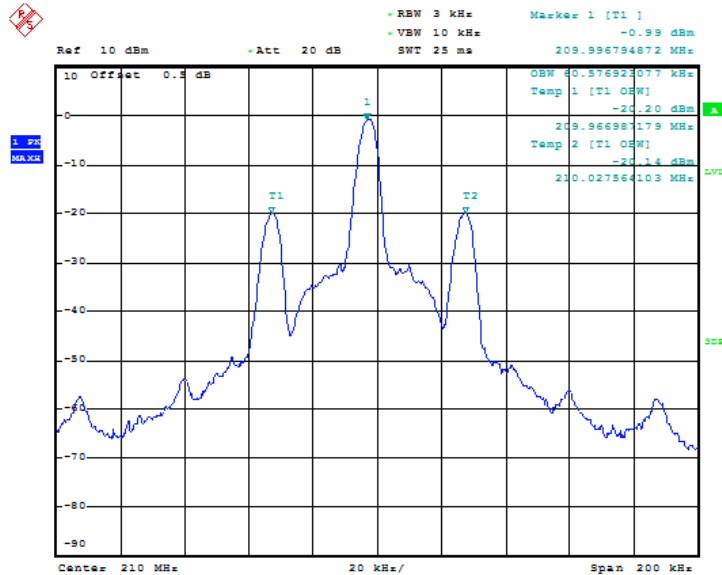

Date: 19.OCT.2020 16:27:12

6.5. Necessary Bandwidth Spurious Emissions

6.5.1. Test Specification

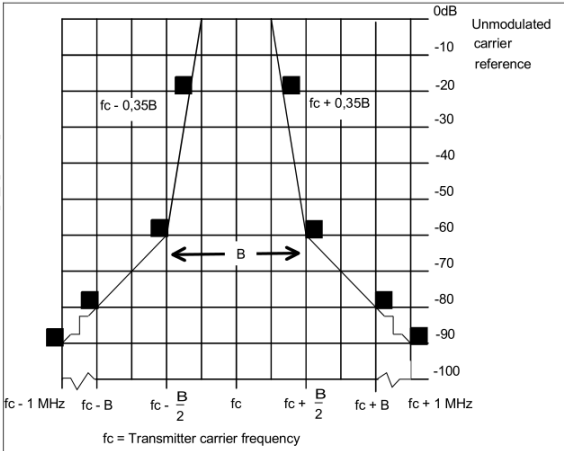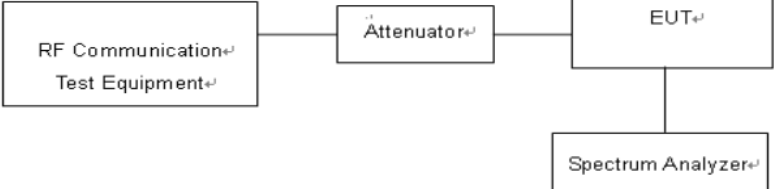Test Requirement:	FCC Part15 C Section 15.236 (g)
Test Method:	ANSI C63.10:2013
Limit:	<p>Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3.1.2 of ETSI EN 300 422-1 V1.4.2 (2011-08)</p> 
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be adjusted to 8 dB below the limiting threshold (-8 dB (lim)) as declared by the manufacturer. 2. The corresponding audio output level from the demodulator shall be measured and recorded. 3. The input impedance of the noise meter shall be sufficiently high to avoid more than 0.1 dB change in input level when the meter is switched between input and output. 4. The audio input level shall be increased by 20 dB, i.e. to +12 dB (lim), and the corresponding change in output level shall be measured. It shall be checked that the audio output level has increased by ≤ 10 dB. If this condition is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and

	<p>is defined as -8 dB (lim).</p> <p>5. Measure the input level at the transmitter required to give +12 dB (lim).</p> <p>6. The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:</p> <ul style="list-style-type: none"> - centre frequency: f_c: Transmitter (Tx) nominal frequency; - dispersion (Span): $f_c - 1$ MHz to $f_c + 1$ MHz; - Resolution BandWidth (RBW): 1 kHz; - Video BandWidth (VBW): 1 kHz; - detector: Peak hold.
Test Result:	PASS


6.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSU	200054	Sep. 11, 2021
Signal Generator	Agilent	N5182A	MY47420221	Sep. 11, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test data

Test plots as follows:

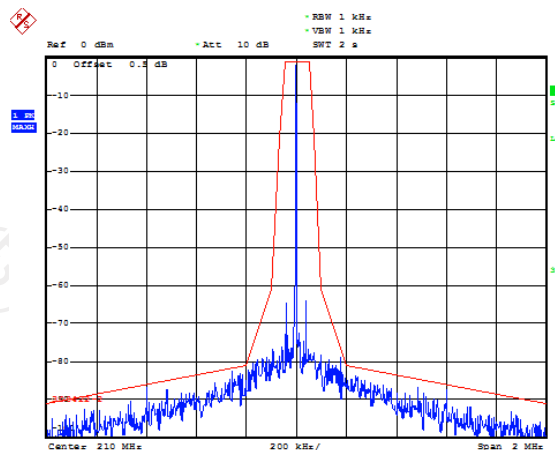


Date: 8.NOV.2020 16:22:39


6.6. Radiated Spurious Emission Measurement

6.6.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.236 (g)				
Test Method:	ANSI C63.10: 2013				
Frequency Range:	9 kHz to 2 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	State	Frequency			
		47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz	
	Operation	4 nW	250 nW	1 µW	
	Standby	2 nW	2 nW	20 nW	
Test setup:	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>0.8m</p> <p>Turn table</p> <p>1m</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre-Amplifier</p> <p>Receiver</p>				
	30MHz to 1GHz				

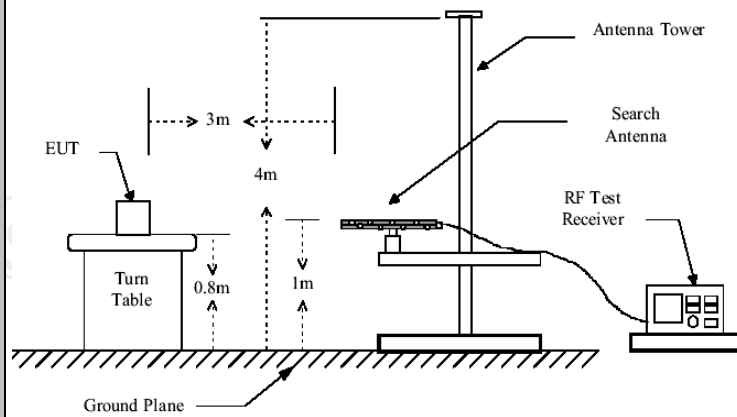

Above 1GHz

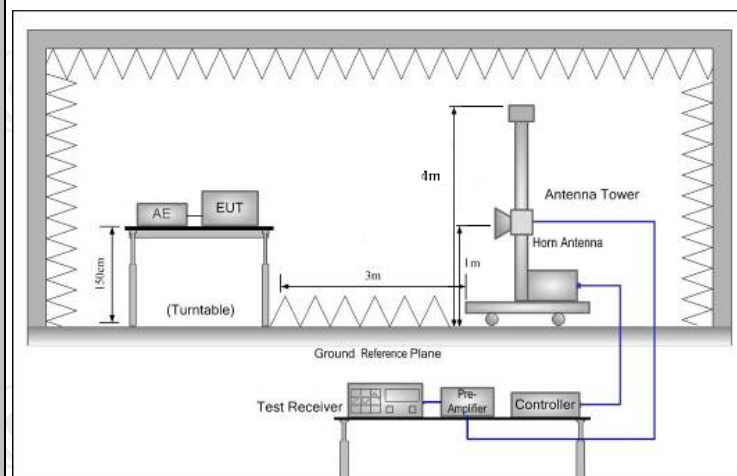

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for

	<p>receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=120 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement.</p> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test results:	PASS

6.6.2. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 27, 2021
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2021
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 02, 2021
Pre-amplifier	HP	8447D	2727A05017	Sep. 02, 2021
Loop antenna	ZHINAN	ZN30900A	12024	Oct. 27, 2020
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 04, 2022
Antenna Mast	Keleto	RE-AM	N/A	N/A
Line-4	RE-high-04	TCT	N/A	Sep. 02, 2021
Line-8	RE-01	TCT	N/A	Jul. 27, 2021
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test Data


Please refer to following diagram for individual
Below 1GHz

Horizontal:

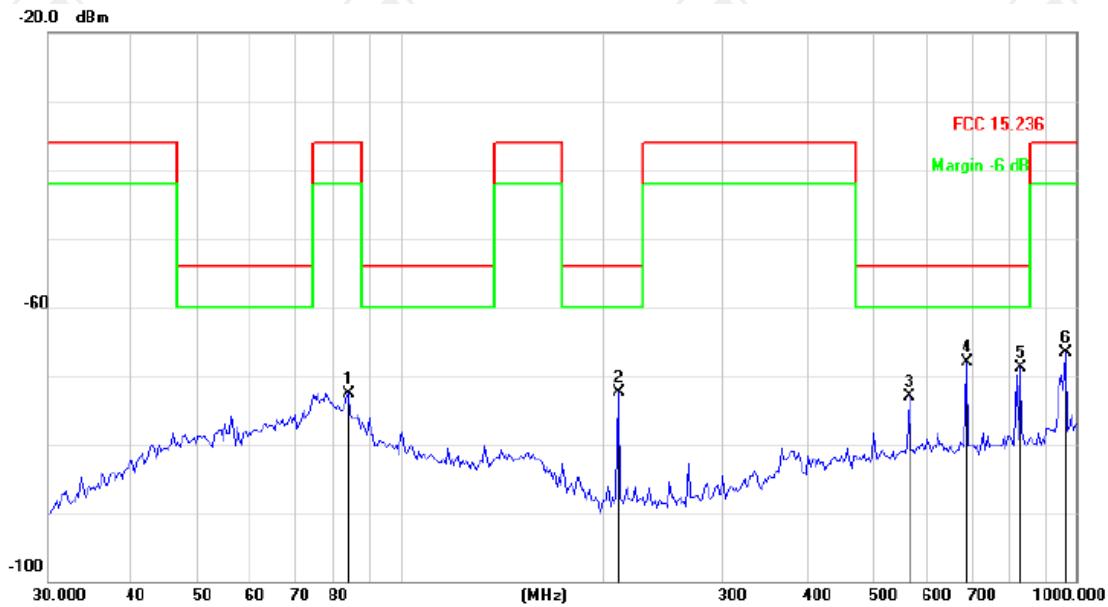

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		83.6937	-58.30	-14.38	-72.68	-36.00	-36.68	peak
2		210.1294	-58.68	-13.72	-72.40	-54.00	-18.40	peak
3		565.9776	-66.47	-6.60	-73.07	-54.00	-19.07	peak
4	*	689.0510	-62.57	-5.49	-68.06	-54.00	-14.06	peak
5		827.1795	-64.61	-4.21	-68.82	-54.00	-14.82	peak
6		965.4742	-63.69	-2.97	-66.66	-36.00	-30.66	peak

Vertical:

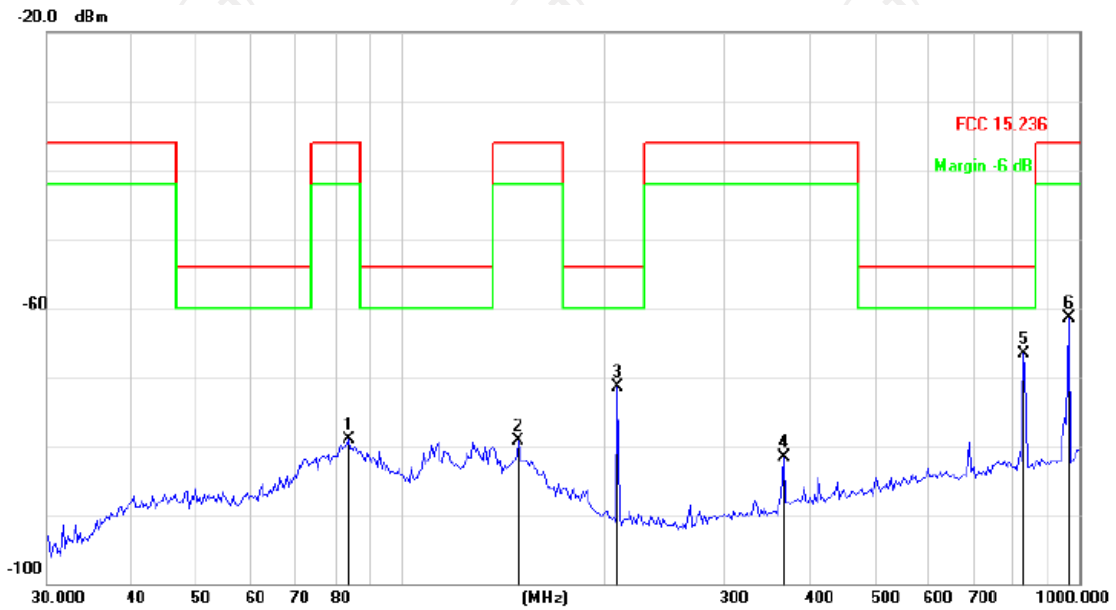

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		83.6937	-64.68	-14.38	-79.06	-36.00	-43.06	peak
2		148.9175	-63.05	-16.24	-79.29	-36.00	-43.29	peak
3		208.6580	-57.64	-13.76	-71.40	-54.00	-17.40	peak
4		366.0866	-72.19	-9.45	-81.64	-36.00	-45.64	peak
5	*	827.1795	-62.47	-4.21	-66.68	-54.00	-12.68	peak
6		965.4742	-58.56	-2.97	-61.53	-36.00	-25.53	peak

Above 1GHz

Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1010.40	V	-42.13	-30.00	PASS
1212.60	V	-47.21		
--	--	--		
1010.40	H	-41.91		
1212.60	H	-48.02		
--	--	--		

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted at the frequency range 25 MHz to 4 GHz for equipment operating on frequencies below 1 GHz.
3. Data of measurement shown "--" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.

6.7. Frequency Stability Measurement

6.7.1. Test Specification

Test Requirement:	FCC Part15 Section 15.236 (f)(3)
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS

6.7.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSQ40	200061	Sep. 11, 2021
Programable tempratuce and humidity chamber	JQ	JQ-2000	N/A	Sep. 02, 2021
DC power supply	Kingrang	KR3005K	N/A	Sep. 02, 2021
RF Cable (9KHz-26.5GHz)	TCT	RE-06	N/A	Sep. 11, 2021
Antenna Connector	TCT	RFC-01	N/A	Sep. 11, 2021

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test data

Test plots as follows:

Temperature (°C)	Voltage (VDC)	Measurement Frequency (MHz)	Delta Frequency (Hz)	Limit (Hz)	Result
50	3.7V	210.0086	8600	10100	PASS
40		210.0064	6400	10100	PASS
30		210.0066	6600	10100	PASS
20		210.0071	7100	10100	PASS
10		210.0038	3800	10100	PASS
0		210.0042	4200	10100	PASS
-10		210.0076	7600	10100	PASS
-20		210.0084	8400	10100	PASS
20		3.145	210.0055	5500	10100
	3.7	210.0034	3400	10100	PASS
	4.255	210.0051	5100	10100	PASS



Note: Limit(Hz)= 0.00005*Frequency(Hz)=0.00005*202*10⁶=10100(Hz)

Appendix A: Photographs of Test Setup

Product: 2.1 CH SPEAKER

Model: HI-FI SYSTEM CLASSIC MIC

Radiated Emission

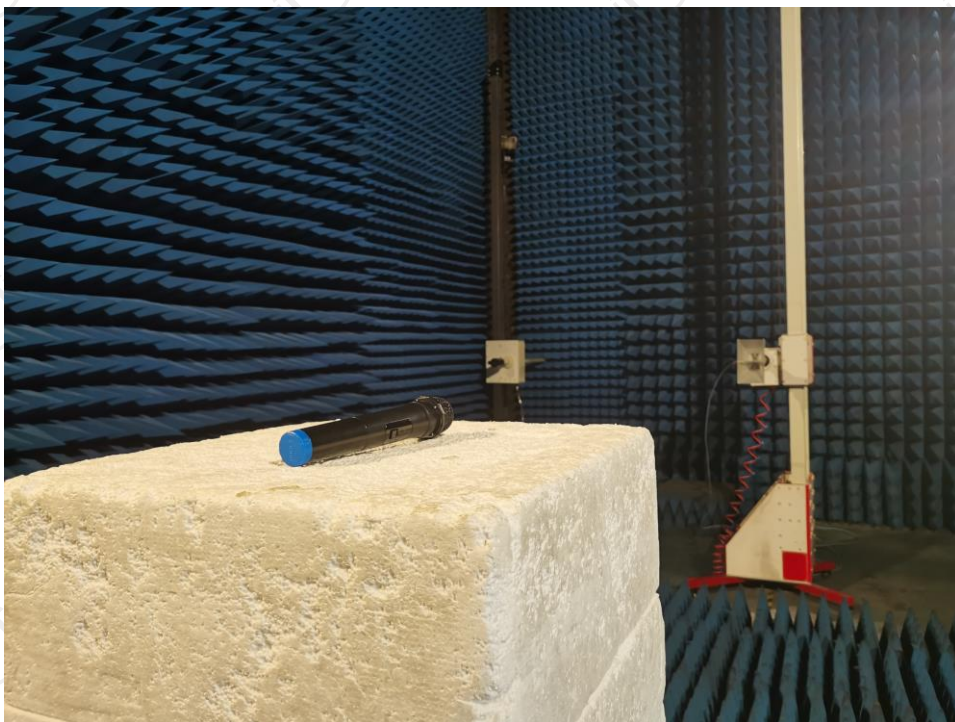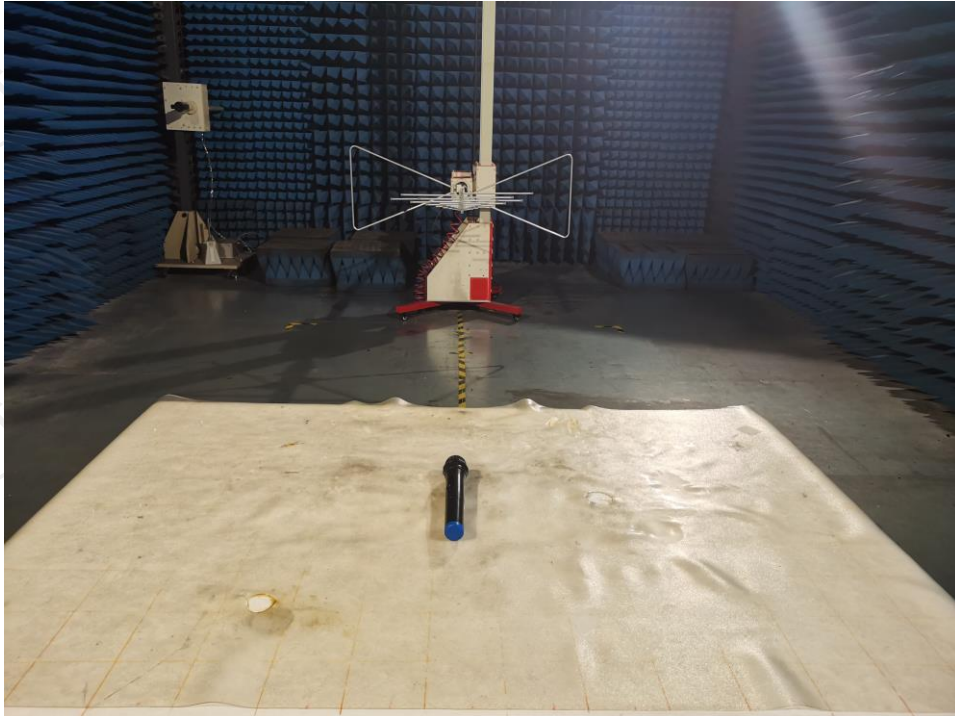


Appendix B: Photographs of EUT
Product: 2.1 CH SPEAKER
Model: HI-FI SYSTEM CLASSIC MIC
External Photos









Product: 2.1 CH SPEAKER
Model: HI-FI SYSTEM CLASSIC MIC
Internal Photos

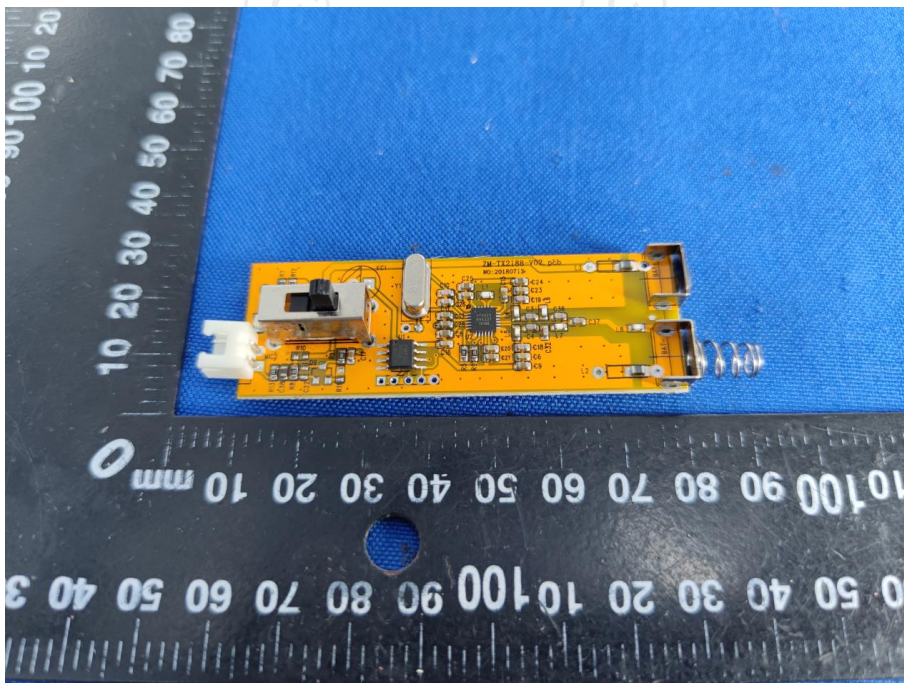

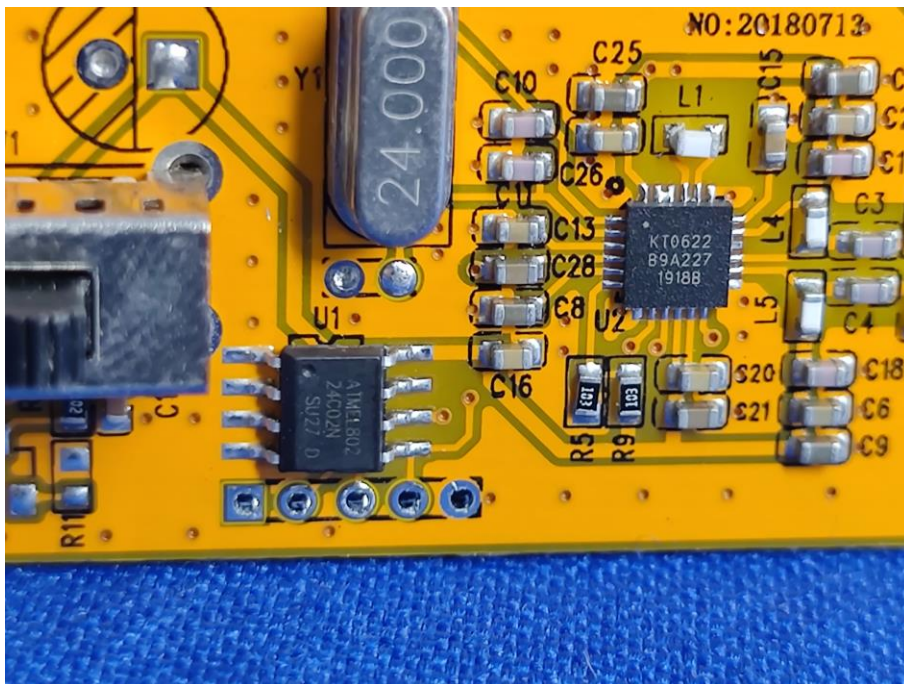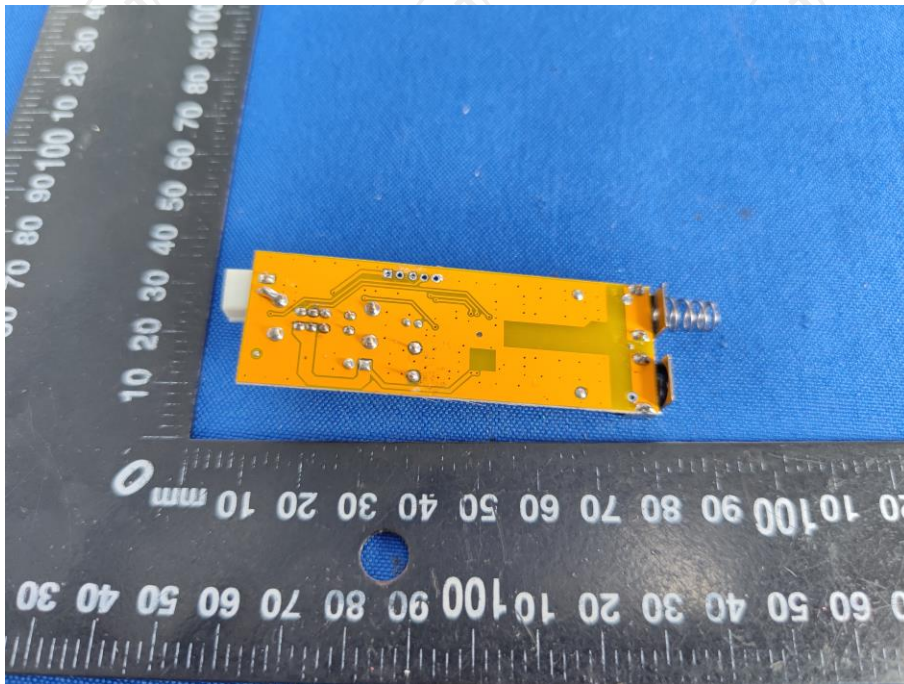

*******END OF REPORT*******