

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Tablet

ISSUED TO
Evoov Products Company, LLC

2651 Fairfax Avenue Culver City, CA 90232

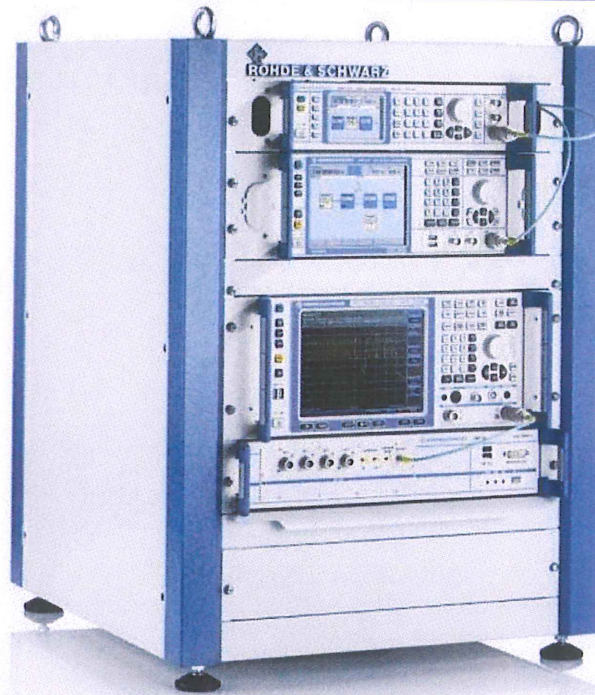

Prepared by: Heng Aiping
Heng Aiping
(Engineer)

Date: Sep. 03, 2019

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: Sep. 03, 2019

Report No.: BL-SZ1970029-604

EUT Name: Tablet

Model Name: EV-A-133-1 (refer section 2.4)

Brand Name: EVOO

Test Standard: 47 CFR Part 15 Subpart E

FCC ID: 2ATQQEV-A-133-1

Test Conclusion: Pass

Test Date: Jul. 02, 2019 ~ Jul. 26, 2019

Date of Issue: Sep. 03, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Sep. 03, 2019</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant	5
2.2	Manufacturer	5
2.3	Factory	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
2.6	Additional Instructions	7
2.7	Channel List	9
3	SUMMARY OF TEST RESULTS	11
3.1	Test Standards	11
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List	12
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
5	TEST ITEMS	17
5.1	RF Output Power	17
5.2	Emission Bandwidth and 6 dB Bandwidth	18
5.3	Power Spectral density (PSD)	19
5.4	Conducted Emission	20
5.5	Radiated Spurious Emissions and Band Edge (Restricted-band)	21

5.6	Frequency Stability.....	26
ANNEX A	TEST RESULT	27
A.1	RF Output Power	27
A.2	Emission Bandwidth & 99% Bandwidth	29
A.3	6 dB Bandwidth	31
A.4	Power Spectral Density	32
A.5	Conducted Emissions	34
A.6	Radiated Spurious Emissions and Band Edge (Restricted-band).....	36
A.7	Frequency Stability.....	81
ANNEX B	TEST SETUP PHOTOS	83
ANNEX C	EUT EXTERNAL PHOTOS	83
ANNEX D	EUT INTERNAL PHOTOS	83

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v4.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	Evoo Products Company, LLC
Address	2651 Fairfax Avenue Culver City, CA 90232

2.2 Manufacturer

Manufacturer	HeYuan Vastking Electronic Co., Ltd.
Address	No.13, Hepu Road, Yuancheng, Heyuan, Guangdong

2.3 Factory

Factory	HeYuan Vastking Electronic Co., Ltd.
Address	No.13, Hepu Road, Yuancheng, Heyuan, Guangdong

2.4 General Description for Equipment under Test (EUT)

EUT Name	Tablet
Model Name Under Test	EV-A-133-1
Series Model Name	EV-A-133-1-BK, EV-A-133-1-SL
Description of Model name differentiation	1. Difference appearance color; 2. Difference Model Name;
Hardware Version	H1S3G_V1
Software Version	Android 9.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth 4.1 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20/40) FM, GPS
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	Band I: 5150 MHz to 5250 MHz, Band II: 5250 MHz to 5350 MHz, Band III: 5470 MHz to 5725 MHz Band IV: 5725 MHz to 5850 MHz
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Modulation technology	OFDM
Modulation Type	64QAM, 16QAM, BPSK, QPSK
Product Type	Indoor for IC standard Mobile and portable for FCC standard
Transfer Rate (Mbps) (Single RF path)	802.11a: 54/ 48/ 36 / 24 / 18/12 / 9/ 6 Mbps 802.11n: up to 150 Mbps
Channel Bandwidth	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz
Maximum Output Power	Band I: 15.78 dBm Band II: 15.70 dBm Band III: 16.69 dBm Band IV: 15.81 dBm
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	PIFA Antenna
Antenna Gain	Band I: 5150 MHz to 5250 MHz: 1.5 dBi Band II: 5250 MHz to 5350 MHz: 1.5 dBi Band III: 5470 MHz to 5725 MHz: 1.5 dBi Band IV: 5725 MHz to 5850 MHz: 1.5 dBi
About the Product	The equipment is Tablet, intended for used with information technology equipment.

2.6 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	N/A		
Support Units (Software installation media)	Description	Manufacturer	Model
	Tablet	HeYuan Vastking Electronic Co., Ltd.	EV-A-133-1


Band I (5150 - 5250 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH36	5180	17
11a	CH44	5220	17
11a	CH48	5240	17
11n (HT20)	CH36	5180	17
11n (HT20)	CH44	5220	17
11n (HT20)	CH48	5240	17
11n (HT40)	CH38	5190	14
11n (HT40)	CH46	5230	17

Band II (5250 - 5350 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH52	5260	17
11a	CH60	5300	17
11a	CH64	5320	17
11n (HT20)	CH52	5260	17
11n (HT20)	CH60	5300	17
11n (HT20)	CH64	5320	17
11n (HT40)	CH54	5270	17
11n (HT40)	CH62	5310	17

Band III (5470 - 5725 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH100	5500	17
11a	CH116	5580	17
11a	CH140	5700	17
11a	CH144	5720	17
11n (HT20)	CH100	5500	17
11n (HT20)	CH116	5580	17
11n (HT20)	CH140	5700	17
11n (HT20)	CH144	5720	17
11n (HT40)	CH102	5510	17
11n (HT40)	CH118	5590	17
11n (HT40)	CH134	5670	17
11n (HT40)	CH142	5700	17

Band IV (5725 - 5850 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	CH149	5745	17
11a	CH157	5785	17
11a	CH165	5825	17
11n (HT20)	CH149	5745	17
11n (HT20)	CH157	5785	17
11n (HT20)	CH165	5825	17
11n (HT40)	CH151	5755	17
11n (HT40)	CH159	5795	17

Run Software

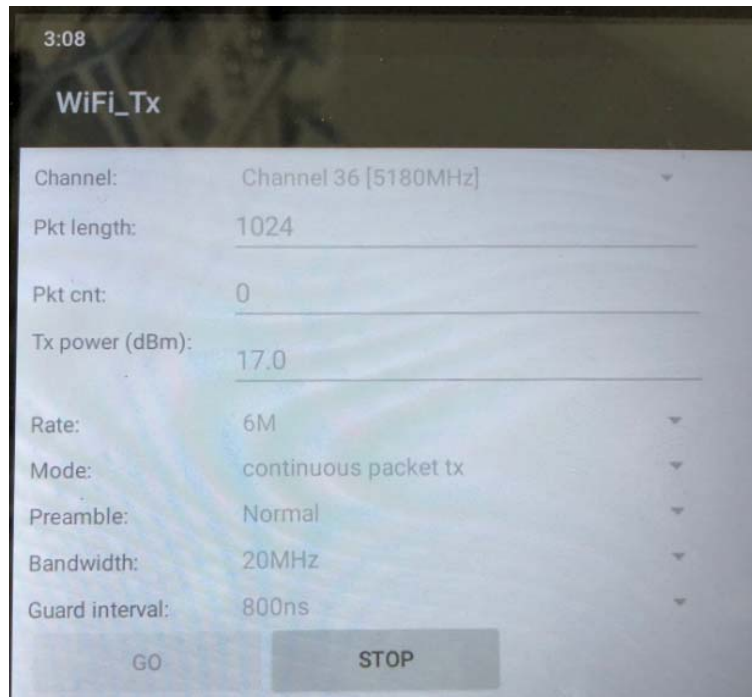

2.7 Channel List

20 MHz		40 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	134	5670
64	5320	151	5755
100	5500	159	5795
104	5520		
108	5540		
112	5560		
116	5580		
132	5660		
136	5680		
140	5700		
149	5745		
153	5765		
157	5785		
161	5805		
165	5825		

Note: Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz. This restriction is for the protection of weather radars operating in this band.

The Lowest frequency, the middle frequency and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)

Band I (5150 - 5250 MHz)			Band II (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	52	Low	5260
44	Mid	5220	60	Mid	5300
48	High	5240	64	High	5320

Band III (5470 - 5725 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
100	Low	5500	149	Low	5745
116	Mid	5580	157	Mid	5785
140	High	5700	165	High	5825
144	High	5720			

For 802.11n (HT40)

Band I (5150 - 5250 MHz)			Band II (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	54	Low	5270
46	High	5230	62	High	5310

Band III (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
102	Low	5510	151	Low	5755
118	Mid	5590	159	High	5795
134	High	5670			
142	High	5700			

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Modulation Type	Band I	Band II	Band III	Band IV
				Channel	Channel	Channel	Channel
RF Output Power	11a	6	BPSK	48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	142/134/118/102	159/151
Emission Bandwidth & 99% Occupied Bandwidth	11a	6	BPSK	48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	142/134/118/102	159/151
6 dB bandwidth	11a	6	BPSK	N/A	N/A	N/A	165/157/149
	11n(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11n(40 MHz)	13.5		N/A	N/A	N/A	159/151
Power Spectral Density	11a	6	BPSK	48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	142/134/118/102	159/151
Radiated Spurious Emissions	11a	6	BPSK	48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	144/140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	142/134/118/102	159/151
Band Edge (Restricted-band)	11a	6	BPSK	48/36	64/52	144/140/100	165/149
	11n(20 MHz)	6.5		48/36	64/52	144/140/100	165/149
	11n(40 MHz)	13.5		46/38	62/54	142/102	159/151
Frequency Stability	Unmodulated	N/A	N/A	36	N/A	N/A	165

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E (10-1-16 Edition)	Unlicensed National Information Infrastructure Devices
2	KDB Publication 789033 D02v01r04	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note1}
2	RF Output Power	15.407(a)	ANNEX A.1	Pass
3	Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	ANNEX A.2	Pass
4	6 dB bandwidth	15.407(e)	ANNEX A.3	Pass
5	Power Spectral Density	15.407(a)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emissions and Band Edge (Restricted-band)	15.407(b)	ANNEX A.6	Pass
8	Frequency Stability	15.407(g)	ANNEX A.7	Pass
9	Receiver Spurious Emissions	--	--	N/A ^{Note2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
	LT (Low Temperature)	-20°C
	HT (High Temperature)	+60°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V
	LV (Low Voltage)	3.3 V
	HV (High Voltage)	4.0 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2019.06.13	2020.06.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2019.06.13	2020.06.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.16	2019.11.15
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2019.06.13	2020.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2019.06.13	2020.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2019.06.13	2020.06.12
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2019.06.13	2020.06.12
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2019.06.18	2020.06.16
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2019.07.02	2020.07.01
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna- Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2018.08.22	2020.08.21
Test Antenna- Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.22	2020.07.21
Test Antenna- Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2019.06.21	2020.06.20
Test Antenna- Horn (18-40 GHz)	A-INFO	LB- 180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2019.02.21	2021.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2018.07.19	2020.07.18
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.06.13	2020.06.12
Power Amplifier	OPHIR RF	5225F	1037	2019.02.28	2020.02.27

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Power Amplifier	OPHIR RF	5273F	1016	2019.02.28	2020.02.27
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2019.06.14	2020.06.13
Mouth Simulator	B&K	4227	2423931	2018.11.19	2019.11.18
Sound Calibrator	B&K	4231	2430337	2018.11.19	2019.11.18
Sound Level Meter	B&K	NL-20	00844023	2018.11.19	2019.11.18
Ear Simulator	B&K	4185	2409449	2018.11.19	2019.11.18
Ear Simulator	B&K	4195	2418189	2018.11.19	2019.11.18
Audio analyzer	B&K	UPL 16	100129	2018.11.19	2019.11.18

4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

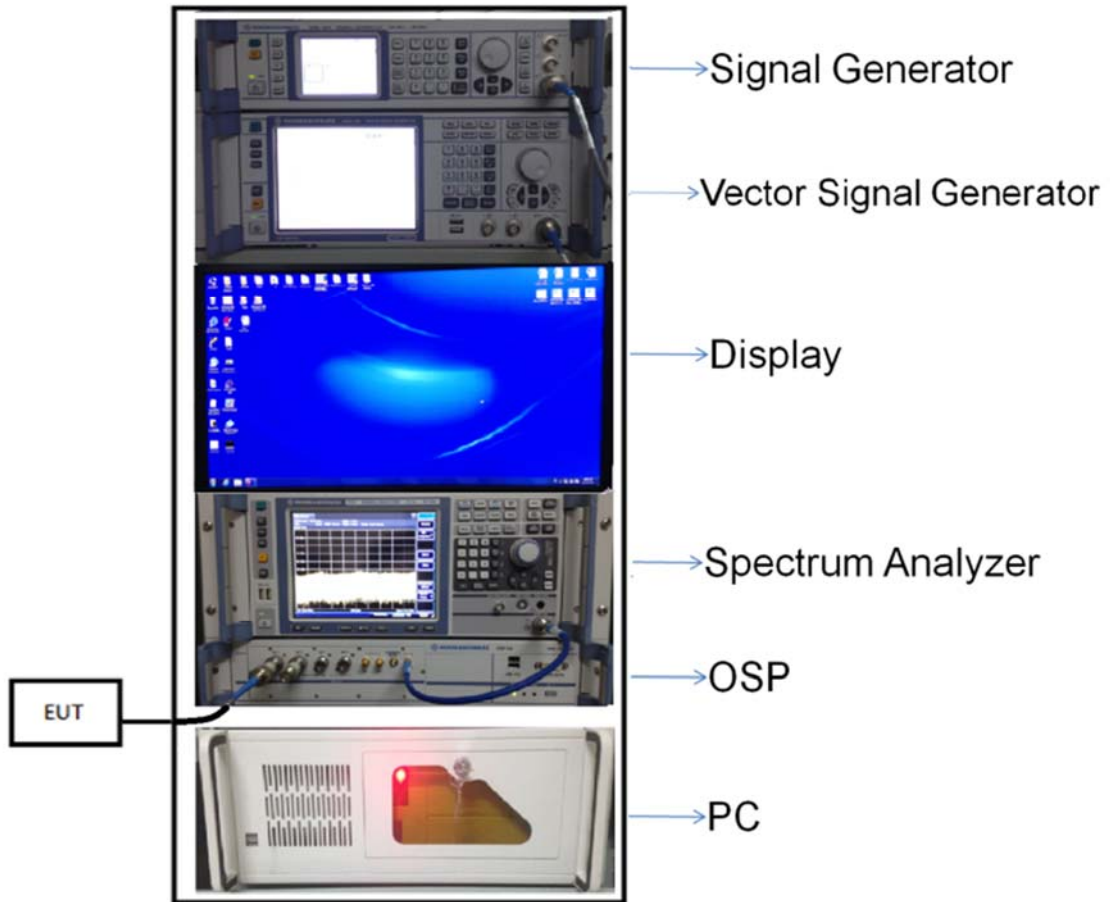


(Diagram 1)

4.4.2 For AC Power Supply Port Test

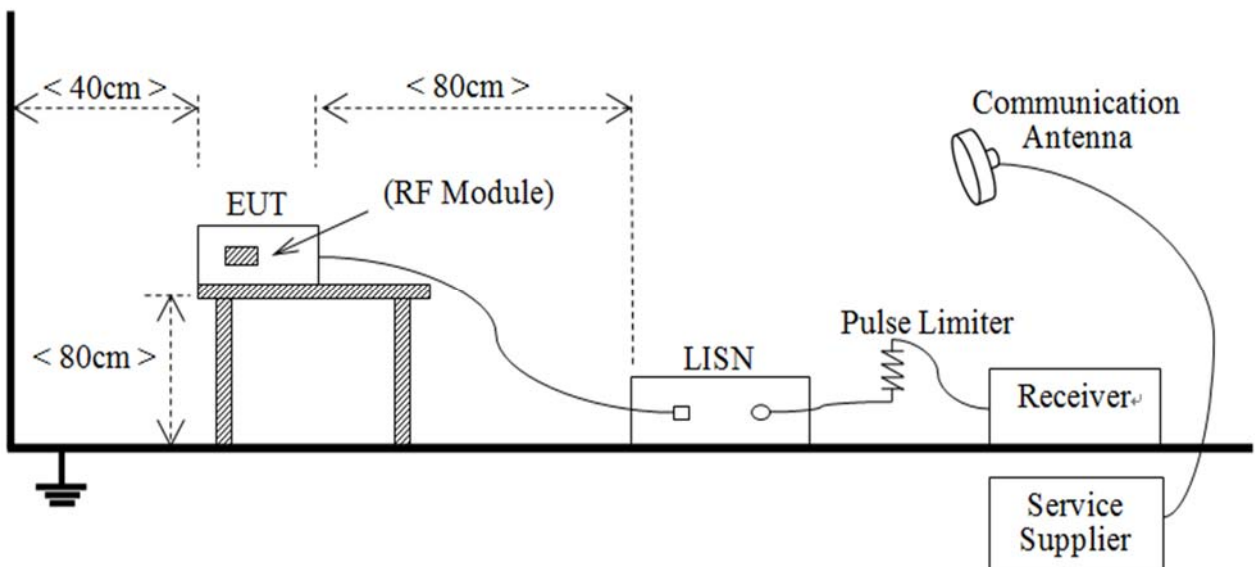


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

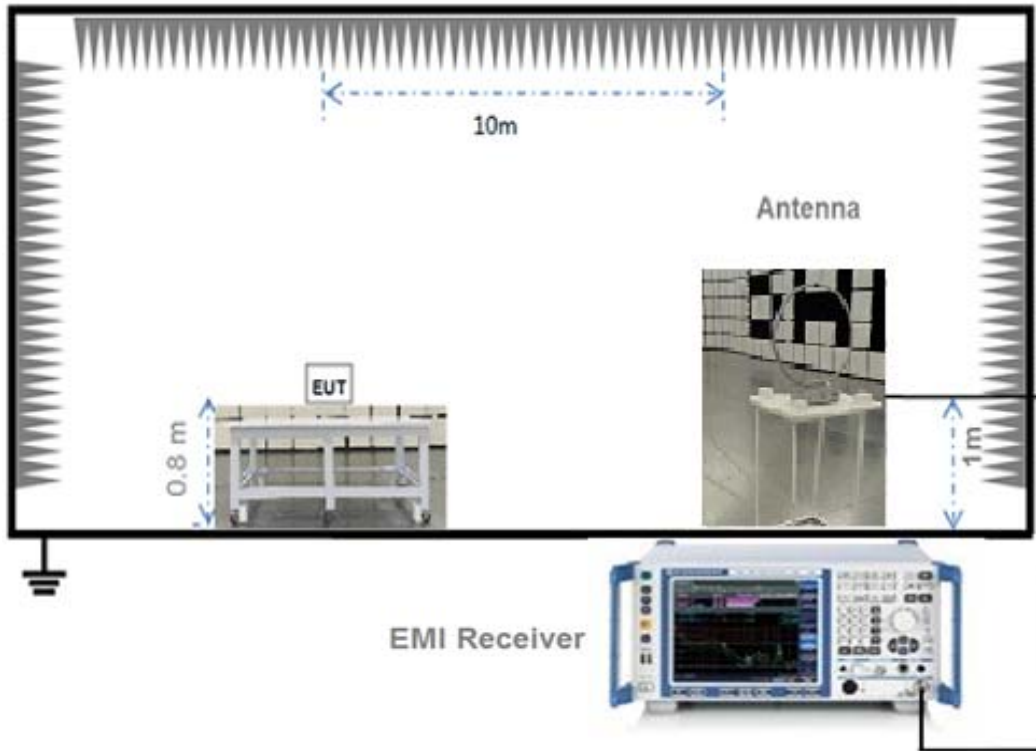


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

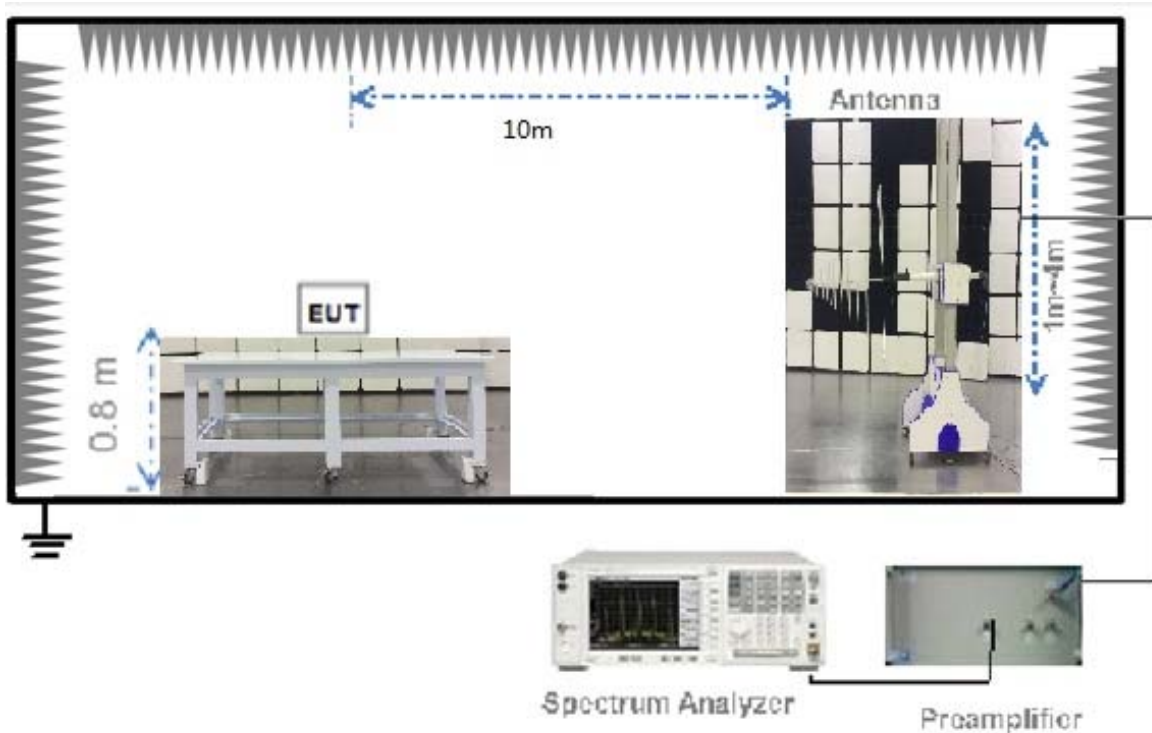


(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

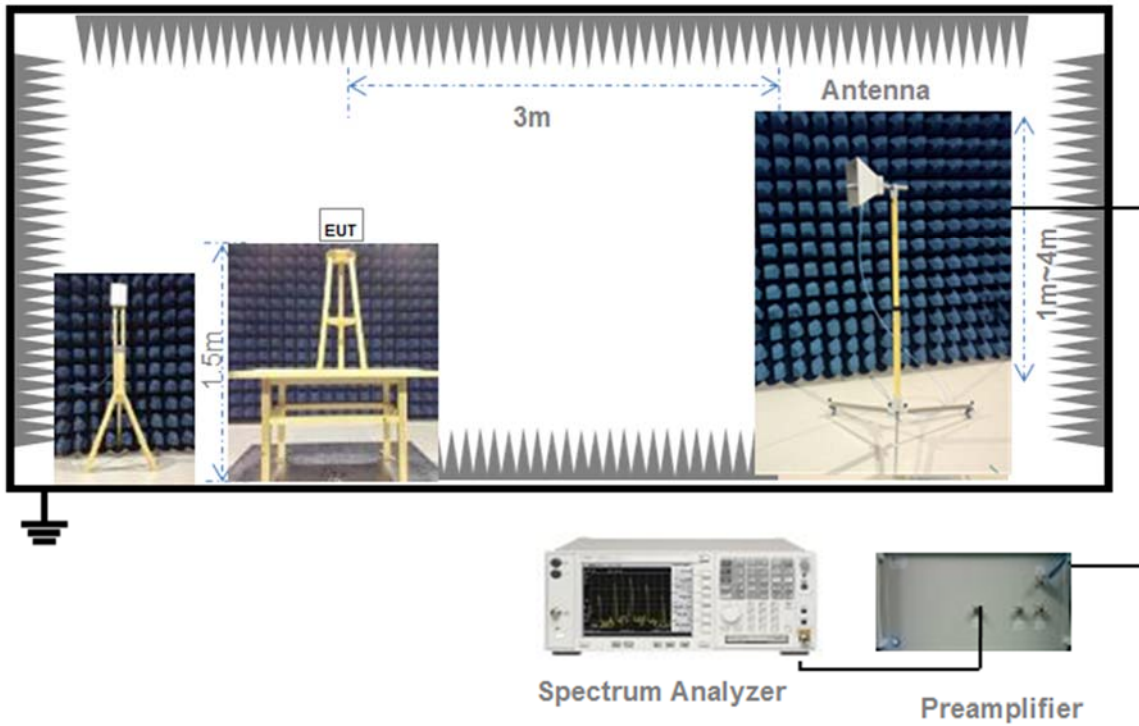

(Diagram 5)

4.4.6 For Frequency Stability Test

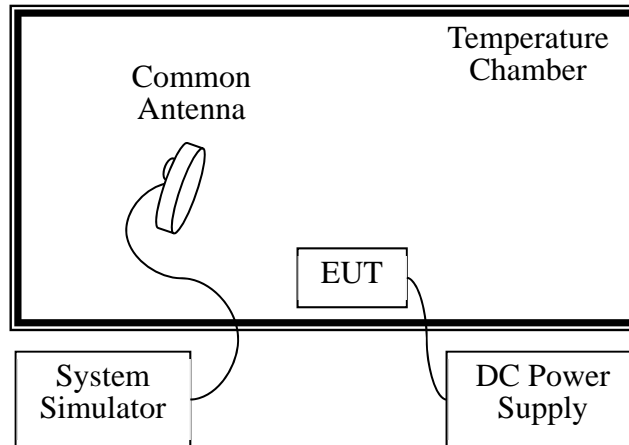

(Diagram 6)

5 TEST ITEMS

5.1 RF Output Power

5.1.1 Test Limit

FCC §15.407(a)

The maximum conducted output power should not exceed:

Frequency Band (MHz)	Limit
5150-5250	250 mW
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 26 dB emissions bandwidth in MHz.	

RSS-247, 6.2

The maximum conducted output power shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 99% emissions bandwidth in MHz.	

The maximum e.i.r.p. shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	200 mW or 10 dBm + 10log B, whichever is less.
5250-5350	1W or 17 dBm + 10log B, whichever is less.
5470-5725	1W or 17 dBm + 10log B, whichever is less.
5725-5850	N/A
Note: Where "B" is the 99% emissions bandwidth in MHz.	

5.1.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

The maximum peak conducted output power may be measured using a broadband Average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

The E.I.R.P used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Emission Bandwidth and 6 dB Bandwidth

5.2.1 Limit

FCC §15.407(a), RSS-247, 6.2

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2.2 Test Setup

The test setup photo please refer to 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set VBW $\geq 3 \times$ RBW,
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set Span = 1.5 times to 5.0 times the OBW
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = Max hold.
5. Use the 99% power bandwidth function of the instrument.

6 dB bandwidth

1. Set RBW = 100 kHz, VBW = 300 kHz.
2. Detector = Peak. Trace mode = Max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.4 Test Result

Please refer to ANNEX A.2 and ANNEX A.3.

5.3 Power Spectral density (PSD)

5.3.1 Limit

FCC §15.407(a)

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	11 dBm/MHz
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

RSS-247, 6.2

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

The e.i.r.p. spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	10 dBm/MHz
5250-5350	N/A
5470-5725	N/A
5725-5850	N/A

5.3.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.

1. Set RBW = 510 kHz/1 MHz, VBW \geq 3*RBW, Sweep time = Auto, Detector = RMS.
2. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak marker function to determine the maximum amplitude level.
4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.3.4 Test Result

Please refer to ANNEX A.4.

5.4 Conducted Emission

5.4.1 Limit

FCC §15.207, RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.4.2 Test Setup

The section 4.4.2 (Diagram 2) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.4.4 Test Result

Please refer to ANNEX A.5.

5.5 Radiated Spurious Emissions and Band Edge (Restricted-band)

5.5.1 Limit

FCC §15.209 & 15.407(b), RSS-247, 6.2

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note¹: The Limit for radiated test was performed according to FCC Part 15C

Note²: The tighter limit applies at the band edge.

Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5150 - 5250	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5250 - 5350	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5470 - 5725	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5725 - 5850	<p>All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength.

5.5.2 Test Setup

The section 4.4.3-4.4.5 (Diagram 3 - Diagram 5) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band

emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5.4 Test Result

Please refer to ANNEX A.6.

5.6 Frequency Stability

5.6.1 Limit

FCC §15.407(g)

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

5.6.2 Test Setup

The section 4.4.6 (Diagram 6) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT is installed in an environment test chamber with external power source.

Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.

A sufficient stabilization period at each temperatures is used prior to each frequency measurement.

When temperature is stabled, measure the frequency stability.

The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage.

Change setting of chamber and external power source to complete all conditions.

5.6.4 Test Result

Please refer to ANNEX A.7.

ANNEX A TEST RESULT

A.1 RF Output Power

Note 1: For FCC standard, if transmitting antennas of directional gain greater than 6 dBi are used, all band maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Data

Conducted Power

Band I (5150 - 5250 MHz)						
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH36	5180	15.18	32.93	250	Pass
11a	CH44	5220	14.76	29.90	250	Pass
11a	CH48	5240	15.78	37.81	250	Pass
11n (HT20)	CH36	5180	15.17	32.89	250	Pass
11n (HT20)	CH44	5220	14.76	29.93	250	Pass
11n (HT20)	CH48	5240	15.75	37.59	250	Pass
11n (HT40)	CH38	5190	11.61	14.50	250	Pass
11n (HT40)	CH46	5230	15.34	34.23	250	Pass

Band II (5250 - 5350 MHz)							
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (mW)	FCC: 11 dBm + 10log B (mW)	FCC Limit (mW)	Verdict
11a	CH52	5260	15.58	36.11	250	250	Pass
11a	CH60	5300	15.07	32.11	252	252	Pass
11a	CH64	5320	15.70	37.12	249	249	Pass
11n (HT20)	CH52	5260	15.62	36.48	253	253	Pass
11n (HT20)	CH60	5300	15.03	31.85	258	258	Pass
11n (HT20)	CH64	5320	15.69	37.07	251	251	Pass
11n (HT40)	CH54	5270	15.38	34.55	577	577	Pass
11n (HT40)	CH62	5310	15.47	35.27	539	539	Pass

Band III (5470 - 5725 MHz)							
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (mW)	FCC: 11 dBm + 10log B (mW)	FCC Limit (mW)	Verdict
11a	CH100	5500	16.32	42.82	248	248	Pass
11a	CH116	5580	16.23	41.94	248	248	Pass
11a	CH140	5700	16.08	40.52	251	251	Pass
11a	CH144	5720	15.69	37.04	248	248	Pass
11n (HT20)	CH100	5500	16.33	42.96	248	248	Pass
11n (HT20)	CH116	5580	16.37	43.36	250	250	Pass
11n (HT20)	CH140	5700	16.06	40.37	251	251	Pass
11n (HT20)	CH144	5720	15.74	37.50	250	250	Pass
11n (HT40)	CH102	5510	16.69	46.71	250	250	Pass
11n (HT40)	CH118	5590	16.60	45.72	250	250	Pass
11n (HT40)	CH134	5670	16.47	44.40	251	251	Pass
11n (HT40)	CH142	5700	16.16	41.34	511	511	Pass

Band IV (5725 - 5850 MHz)						
Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH149	5745	15.63	36.53	1000	Pass
11a	CH157	5785	15.68	36.95	1000	Pass
11a	CH165	5825	14.96	31.31	1000	Pass
11n (HT20)	CH149	5745	15.57	36.06	1000	Pass
11n (HT20)	CH157	5785	15.81	38.11	1000	Pass
11n (HT20)	CH165	5825	14.93	31.12	1000	Pass
11n (HT40)	CH151	5755	15.74	37.53	1000	Pass
11n (HT40)	CH159	5795	15.70	37.19	1000	Pass

A.2 Emission Bandwidth & 99% Bandwidth

Note: Test plots please refer to the document "Annex No.: BL-SZ1970029-604 Data Part 1.pdf".

Test Data

Band I (5150 - 5250 MHz)				
Mode	Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH36	5180	21.60	16.85
11a	CH44	5220	21.28	16.73
11a	CH48	5240	20.40	16.73
11n (HT20)	CH36	5180	21.52	17.83
11n (HT20)	CH44	5220	21.96	17.77
11n (HT20)	CH48	5240	20.76	17.77
11n (HT40)	CH38	5190	40.30	36.12
11n (HT40)	CH46	5230	40.30	36.58

Band II (5250 - 5350 MHz)				
Mode	Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH52	5260	19.84	16.67
11a	CH60	5300	20.04	16.67
11a	CH64	5320	19.76	16.67
11n (HT20)	CH52	5260	20.12	17.71
11n (HT20)	CH60	5300	20.48	17.71
11n (HT20)	CH64	5320	19.96	17.66
11n (HT40)	CH54	5270	45.80	36.35
11n (HT40)	CH62	5310	42.80	36.35

Band III (5470 - 5725 MHz)				
Mode	Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH100	5500	19.68	16.61
11a	CH116	5580	19.72	16.61
11a	CH140	5700	19.92	16.61
11a	CH144	5720	19.72	16.61
11n (HT20)	CH100	5500	19.88	17.66
11n (HT20)	CH116	5580	19.92	17.60
11n (HT20)	CH140	5700	19.84	17.66
11n (HT20)	CH144	5720	19.96	17.66
11n (HT40)	CH102	5510	40.60	36.24
11n (HT40)	CH118	5590	40.50	36.24
11n (HT40)	CH134	5670	40.40	36.24
11n (HT40)	CH142	5700	40.90	36.24

Band IV (5725 - 5850 MHz)				
Mode	Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH149	5745	19.64	16.61
11a	CH157	5785	19.60	16.56
11a	CH165	5825	19.56	16.61
11n (HT20)	CH149	5745	19.88	17.60
11n (HT20)	CH157	5785	19.88	17.60
11n (HT20)	CH165	5825	19.84	17.66
11n (HT40)	CH151	5755	40.50	36.24
11n (HT40)	CH159	5795	41.10	36.24

A.3 6 dB Bandwidth

Note: Test plots please refer to the document "Annex No.: BL-SZ1970029-604 Data Part 2.pdf".

Test Data

Band IV (5725 - 5850 MHz)					
Mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (kHz)	Verdict
11a	CH149	5745	16.47	500	Pass
11a	CH157	5785	16.42	500	Pass
11a	CH165	5825	16.47	500	Pass
11n (HT20)	CH149	5745	17.67	500	Pass
11n (HT20)	CH157	5785	17.67	500	Pass
11n (HT20)	CH165	5825	17.67	500	Pass
11n (HT40)	CH151	5755	32.87	500	Pass
11n (HT40)	CH159	5795	35.77	500	Pass

A.4 Power Spectral Density

Note: Test plots please refer to the document "Annex No.: BL-SZ1970029-604 Data Part 3.pdf".

Test Data

Note¹: The RBW used in Band IV is 1 MHz, and the PSD factor is: $10 \cdot \log(500 \text{ kHz/RBW}) = -3 \text{ dBm}$.

Band I (5150 - 5250 MHz)					
Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	FCC Limit (dBm/MHz)	Verdict
11a	CH149	5745	3.48	11.00	Pass
11a	CH157	5785	3.98	11.00	Pass
11a	CH165	5825	4.30	11.00	Pass
11n (HT20)	CH149	5745	3.87	11.00	Pass
11n (HT20)	CH157	5785	3.53	11.00	Pass
11n (HT20)	CH165	5825	3.85	11.00	Pass
11n (HT40)	CH151	5755	-3.76	11.00	Pass
11n (HT40)	CH159	5795	-3.39	11.00	Pass

Band II (5250 - 5350 MHz)					
Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	FCC Limit (dBm/MHz)	Verdict
11a	CH52	5260	4.72	11.00	Pass
11a	CH60	5300	4.01	11.00	Pass
11a	CH64	5320	4.38	11.00	Pass
11n (HT20)	CH52	5260	4.06	11.00	Pass
11n (HT20)	CH60	5300	3.72	11.00	Pass
11n (HT20)	CH64	5320	4.15	11.00	Pass
11n (HT40)	CH54	5270	-0.03	11.00	Pass
11n (HT40)	CH62	5310	-0.74	11.00	Pass

Band III (5470 - 5725 MHz)					
Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	FCC Limit (dBm/MHz)	Verdict
11a	CH100	5500	3.74	11.00	Pass
11a	CH116	5580	4.58	11.00	Pass
11a	CH140	5700	4.65	11.00	Pass
11a	CH144	5720	4.39	11.00	Pass
11n (HT20)	CH100	5500	4.96	11.00	Pass
11n (HT20)	CH116	5580	4.65	11.00	Pass
11n (HT20)	CH140	5700	4.63	11.00	Pass
11n (HT20)	CH144	5720	3.67	11.00	Pass
11n (HT40)	CH102	5510	1.11	11.00	Pass
11n (HT40)	CH118	5590	1.34	11.00	Pass
11n (HT40)	CH134	5670	-0.40	11.00	Pass
11n (HT40)	CH142	5700	0.94	11.00	Pass

Band IV (5725 - 5850 MHz)					
Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	FCC Limit (dBm/500 kHz)	Verdict
11a	CH149	5745	1.48	30.00	Pass
11a	CH157	5785	1.92	30.00	Pass
11a	CH165	5825	0.98	30.00	Pass
11n (HT20)	CH149	5745	1.65	30.00	Pass
11n (HT20)	CH157	5785	1.30	30.00	Pass
11n (HT20)	CH165	5825	1.18	30.00	Pass
11n (HT40)	CH151	5755	-1.85	30.00	Pass
11n (HT40)	CH159	5795	-1.76	30.00	Pass

A.5 Conducted Emissions


Note¹: The EUT is working in the Normal link mode.

Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_ Class B

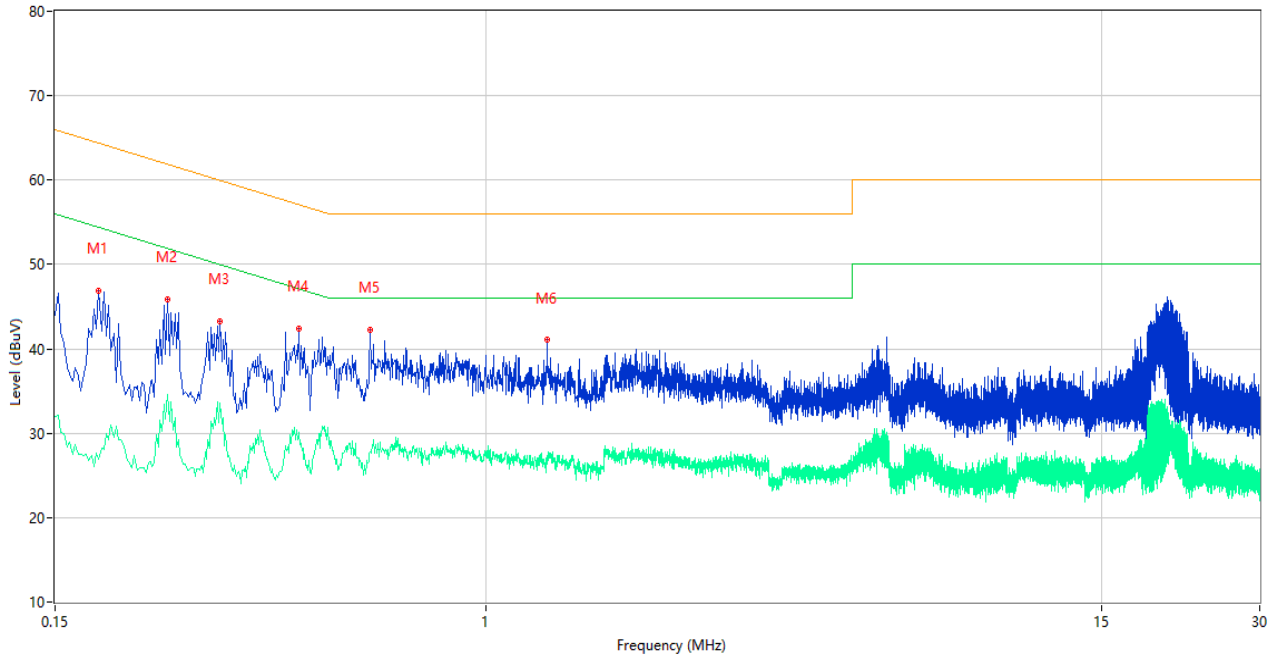

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.182	46.90	10.39	64.39	-17.49	Peak	L	Pass
1**	0.182	26.94	10.39	54.39	-27.45	AV	L	Pass
2	0.246	45.89	10.34	61.89	-16.00	Peak	L	Pass
2**	0.246	34.65	10.34	51.89	-17.24	AV	L	Pass
3	0.310	43.30	10.33	59.97	-16.67	Peak	L	Pass
3**	0.310	33.59	10.33	49.97	-16.38	AV	L	Pass
4	0.438	42.46	10.31	57.10	-14.64	Peak	L	Pass
4**	0.438	30.07	10.31	47.10	-17.03	AV	L	Pass
5	0.600	42.25	10.28	56.00	-13.75	Peak	L	Pass
5**	0.600	27.77	10.28	46.00	-18.23	AV	L	Pass
6	1.306	41.04	10.25	56.00	-14.96	Peak	L	Pass
6**	1.306	27.33	10.25	46.00	-18.67	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

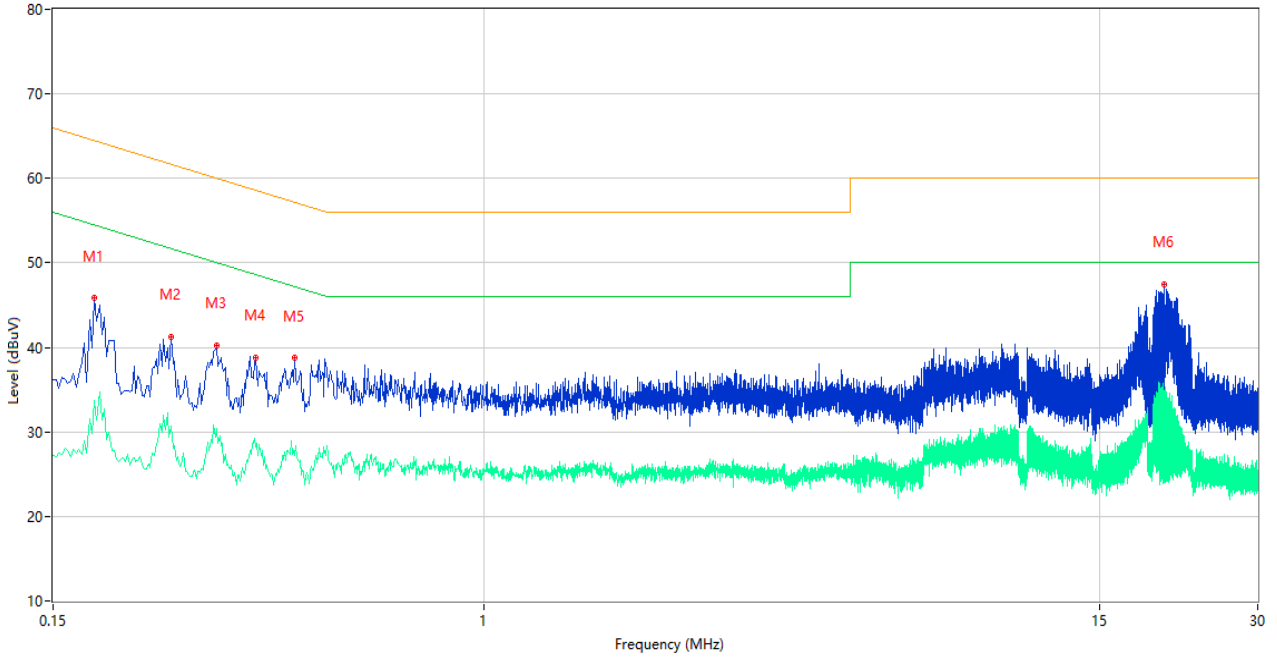

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.180	45.83	10.39	64.49	-18.66	Peak	N	Pass
1**	0.180	33.76	10.39	54.49	-20.73	AV	N	Pass
2	0.252	41.28	10.34	61.69	-20.41	Peak	N	Pass
2**	0.252	30.64	10.34	51.69	-21.05	AV	N	Pass
3	0.308	40.28	10.33	60.02	-19.74	Peak	N	Pass
3**	0.308	30.41	10.33	50.02	-19.61	AV	N	Pass
4	0.366	38.79	10.30	58.59	-19.80	Peak	N	Pass
4**	0.366	28.23	10.30	48.59	-20.36	AV	N	Pass
5	0.434	38.74	10.31	57.18	-18.44	Peak	N	Pass
5**	0.434	27.22	10.31	47.18	-19.96	AV	N	Pass
6	19.920	47.48	10.55	60.00	-12.52	Peak	N	Pass
6**	19.920	34.03	10.55	50.00	-15.97	AV	N	Pass

A.6 Radiated Spurious Emissions and Band Edge (Restricted-band)

Test Data


Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.4, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz.


30 MHz to 1 GHz, ANT V

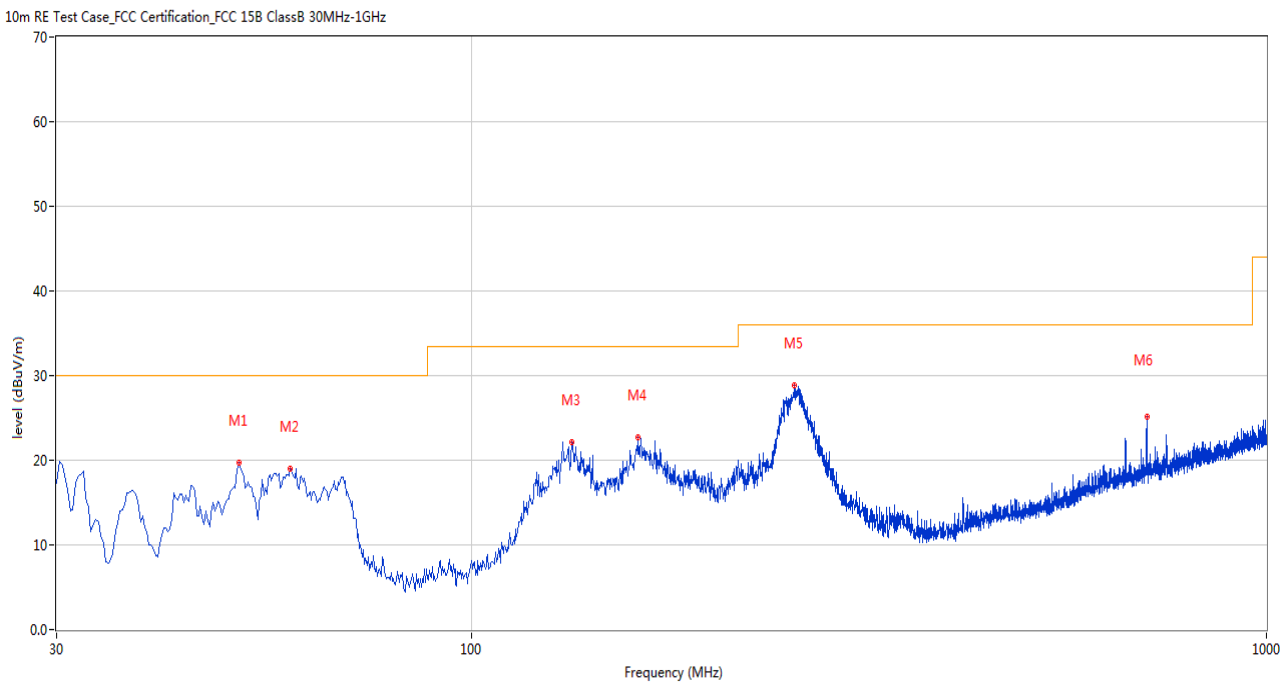

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	50.850	19.66	-27.24	30.0	-10.34	Peak	212.00	200	Vertical	Pass
2	59.093	18.95	-27.77	30.0	-11.05	Peak	193.00	200	Vertical	Pass
3	133.522	22.21	-26.98	33.5	-11.29	Peak	274.00	100	Vertical	Pass
4	161.887	22.75	-25.90	33.5	-10.75	Peak	186.00	100	Vertical	Pass
5	254.741	28.84	-27.22	36.0	-7.16	Peak	205.00	100	Vertical	Pass
6	706.891	25.08	-15.93	36.0	-10.92	Peak	359.00	200	Vertical	Pass

30 MHz to 1 GHz, ANT H

10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

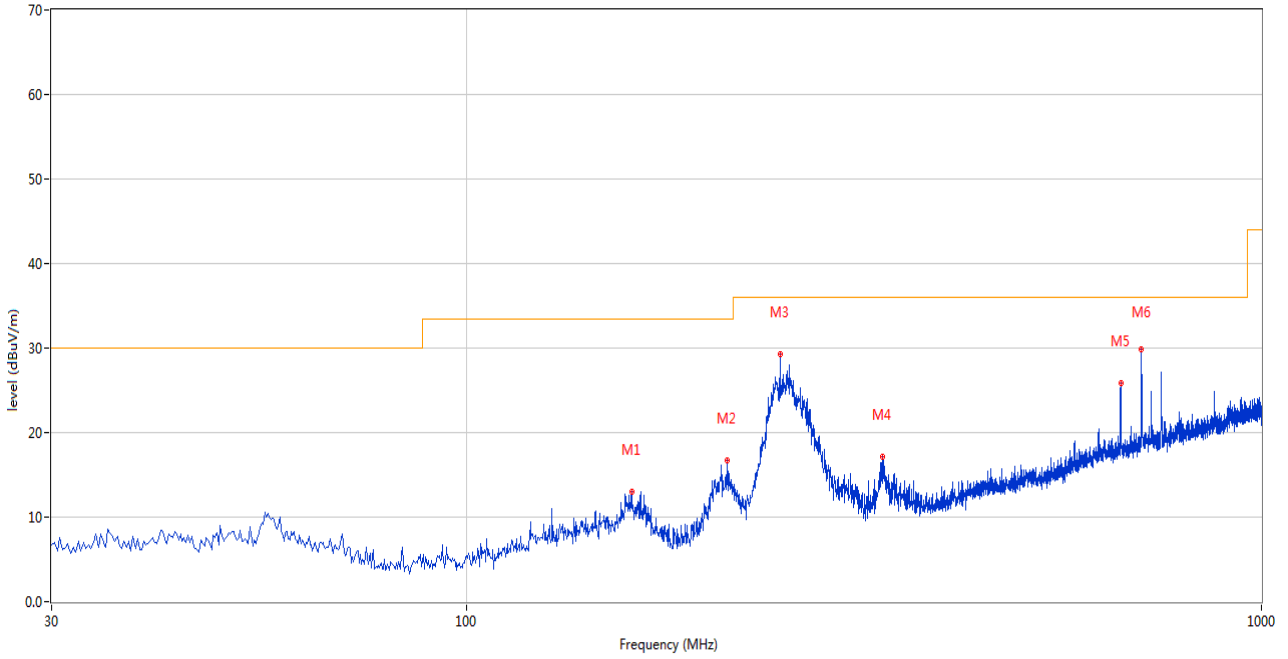

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	161.160	12.94	-25.87	33.5	-20.56	Peak	299.00	200	Horizontal	Pass
2	212.314	16.74	-29.01	33.5	-16.76	Peak	117.00	200	Horizontal	Pass
3	247.711	29.34	-27.49	36.0	-6.66	Peak	268.00	200	Horizontal	Pass
4	333.049	17.09	-24.69	36.0	-18.91	Peak	255.00	200	Horizontal	Pass
5	664.949	25.79	-16.68	36.0	-10.21	Peak	360.00	200	Horizontal	Pass
6	706.163	29.90	-15.90	36.0	-6.10	Peak	249.00	100	Horizontal	Pass

Note: The spurious from 18G-40G is noise only, do not show on the report.

1 GHz to 18 GHz, Band I 11a ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1225.000	26.94	-16.87	54.0	-27.06	AV	37.00	100	Vertical	Pass
1	1225.000	38.19	-16.87	74.0	-35.81	Peak	37.00	100	Vertical	Pass
2**	2720.500	34.67	-7.53	54.0	-19.33	AV	19.00	100	Vertical	Pass
2	2720.500	45.84	-7.53	74.0	-28.16	Peak	19.00	100	Vertical	Pass
3**	5179.000	90.89	0.40	--	90.89	AV	290.00	100	Vertical	N/A
3	5179.000	98.66	0.40	--	-191.34	Peak	290.00	100	Vertical	N/A
4**	7654.063	41.11	0.52	54.0	-12.89	AV	160.00	100	Vertical	Pass
4	7654.063	52.50	0.52	74.0	-21.50	Peak	160.00	100	Vertical	Pass
5**	12262.688	46.50	6.58	54.0	-7.50	AV	264.00	100	Vertical	Pass
5	12262.688	58.31	6.58	74.0	-15.69	Peak	264.00	100	Vertical	Pass
6**	15722.812	46.39	10.89	54.0	-7.61	AV	287.00	100	Vertical	Pass
6	15722.812	56.08	10.89	74.0	-17.92	Peak	287.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11a ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1470.500	28.55	-16.22	54.0	-25.45	AV	281.00	100	Horizontal	Pass
1	1470.500	39.30	-16.22	74.0	-34.70	Peak	281.00	100	Horizontal	Pass
2**	2766.500	34.22	-8.98	54.0	-19.78	AV	126.00	100	Horizontal	Pass
2	2766.500	45.41	-8.98	74.0	-28.59	Peak	126.00	100	Horizontal	Pass
3**	5183.000	98.17	0.32	--	98.17	AV	118.00	100	Horizontal	N/A
3	5183.000	105.87	0.32	--	-12.13	Peak	118.00	100	Horizontal	N/A
4**	7553.438	41.51	0.60	54.0	-12.49	AV	150.00	100	Horizontal	Pass
4	7553.438	52.86	0.60	74.0	-21.14	Peak	150.00	100	Horizontal	Pass
5**	12077.250	45.33	4.85	54.0	-8.67	AV	207.00	100	Horizontal	Pass
5	12077.250	56.91	4.85	74.0	-17.09	Peak	207.00	100	Horizontal	Pass
6**	15973.500	47.86	13.60	54.0	-6.14	AV	167.00	100	Horizontal	Pass
6	15973.500	56.84	13.60	74.0	-17.16	Peak	167.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11a ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1502.000	27.70	-16.57	54.0	-26.30	AV	68.00	100	Vertical	Pass
1	1502.000	39.34	-16.57	74.0	-34.66	Peak	68.00	100	Vertical	Pass
2**	2852.000	34.33	-8.96	54.0	-19.67	AV	81.00	100	Vertical	Pass
2	2852.000	45.29	-8.96	74.0	-28.71	Peak	81.00	100	Vertical	Pass
3**	5198.000	91.54	0.41	--	91.54	AV	283.00	100	Vertical	N/A
3	5198.000	99.56	0.41	--	-183.44	Peak	283.00	100	Vertical	N/A
4**	7531.875	42.51	1.66	54.0	-11.49	AV	4.00	100	Vertical	Pass
4	7531.875	53.09	1.66	74.0	-20.91	Peak	4.00	100	Vertical	Pass
5**	12252.625	46.13	6.38	54.0	-7.87	AV	329.00	100	Vertical	Pass
5	12252.625	57.06	6.38	74.0	-16.94	Peak	329.00	100	Vertical	Pass
6**	15961.687	48.72	13.63	54.0	-5.28	AV	78.00	100	Vertical	Pass
6	15961.687	56.84	13.63	74.0	-17.16	Peak	78.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11a ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1579.500	28.56	-16.21	54.0	-25.44	AV	228.00	100	Horizontal	Pass
1	1579.500	38.89	-16.21	74.0	-35.11	Peak	228.00	100	Horizontal	Pass
2**	2795.000	34.33	-8.36	54.0	-19.67	AV	280.00	100	Horizontal	Pass
2	2795.000	45.63	-8.36	74.0	-28.37	Peak	280.00	100	Horizontal	Pass
3**	5198.000	98.45	0.41	--	98.45	AV	109.00	100	Horizontal	N/A
3	5198.000	105.84	0.41	--	-3.16	Peak	109.00	100	Horizontal	N/A
4**	7530.438	42.71	1.50	54.0	-11.29	AV	225.00	100	Horizontal	Pass
4	7530.438	52.88	1.50	74.0	-21.12	Peak	225.00	100	Horizontal	Pass
5**	12330.250	46.56	6.93	54.0	-7.44	AV	138.00	100	Horizontal	Pass
5	12330.250	57.40	6.93	74.0	-16.60	Peak	138.00	100	Horizontal	Pass
6**	15960.375	47.11	13.64	54.0	-6.89	AV	228.00	100	Horizontal	Pass
6	15960.375	56.60	13.64	74.0	-17.40	Peak	228.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11a ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1379.000	27.96	-16.28	54.0	-26.04	AV	208.00	100	Vertical	Pass
1	1379.000	39.92	-16.28	74.0	-34.08	Peak	208.00	100	Vertical	Pass
2**	2722.500	34.44	-7.60	54.0	-19.56	AV	268.00	100	Vertical	Pass
2	2722.500	45.64	-7.60	74.0	-28.36	Peak	268.00	100	Vertical	Pass
3**	5242.000	94.43	0.44	--	94.43	AV	301.00	100	Vertical	N/A
3	5242.000	101.48	0.44	--	-199.52	Peak	301.00	100	Vertical	N/A
4**	7539.062	43.02	2.01	54.0	-10.98	AV	283.00	100	Vertical	Pass
4	7539.062	54.35	2.01	74.0	-19.65	Peak	283.00	100	Vertical	Pass
5**	12068.625	44.79	4.64	54.0	-9.21	AV	179.00	100	Vertical	Pass
5	12068.625	56.62	4.64	74.0	-17.38	Peak	179.00	100	Vertical	Pass
6**	15926.250	46.71	13.41	54.0	-7.29	AV	296.00	100	Vertical	Pass
6	15926.250	56.33	13.41	74.0	-17.67	Peak	296.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11a ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1400.500	27.95	-16.36	54.0	-26.05	AV	79.00	100	Horizontal	Pass
1	1400.500	38.94	-16.36	74.0	-35.06	Peak	79.00	100	Horizontal	Pass
2**	4077.000	40.80	-0.75	54.0	-13.20	AV	163.00	100	Horizontal	Pass
2	4077.000	50.85	-0.75	74.0	-23.15	Peak	163.00	100	Horizontal	Pass
3**	5236.000	97.93	0.20	--	97.93	AV	121.00	100	Horizontal	N/A
3	5236.000	106.51	0.20	--	-14.49	Peak	121.00	100	Horizontal	N/A
4**	7610.937	41.51	-0.06	54.0	-12.49	AV	272.00	100	Horizontal	Pass
4	7610.937	53.03	-0.06	74.0	-20.97	Peak	272.00	100	Horizontal	Pass
5**	10861.125	45.49	5.17	54.0	-8.51	AV	204.00	100	Horizontal	Pass
5	10861.125	56.84	5.17	74.0	-17.16	Peak	204.00	100	Horizontal	Pass
6**	15953.812	46.83	13.62	54.0	-7.17	AV	321.00	100	Horizontal	Pass
6	15953.812	56.00	13.62	74.0	-18.00	Peak	321.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11n20 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1519.500	28.65	-16.28	54.0	-25.35	AV	318.00	100	Vertical	Pass
1	1519.500	39.67	-16.28	74.0	-34.33	Peak	318.00	100	Vertical	Pass
2**	2803.000	34.51	-8.53	54.0	-19.49	AV	35.00	100	Vertical	Pass
2	2803.000	45.31	-8.53	74.0	-28.69	Peak	35.00	100	Vertical	Pass
3**	5182.000	90.93	0.30	--	90.93	AV	290.00	100	Vertical	N/A
3	5182.000	98.18	0.30	--	-191.82	Peak	290.00	100	Vertical	N/A
4**	7541.938	42.86	1.73	54.0	-11.14	AV	212.00	100	Vertical	Pass
4	7541.938	52.67	1.73	74.0	-21.33	Peak	212.00	100	Vertical	Pass
5**	12292.875	46.37	7.36	54.0	-7.63	AV	87.00	100	Vertical	Pass
5	12292.875	56.86	7.36	74.0	-17.14	Peak	87.00	100	Vertical	Pass
6**	15966.937	47.03	13.62	54.0	-6.97	AV	214.00	100	Vertical	Pass
6	15966.937	56.39	13.62	74.0	-17.61	Peak	214.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11n20 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1515.500	28.60	-16.55	54.0	-25.40	AV	90.00	100	Horizontal	Pass
1	1515.500	39.36	-16.55	74.0	-34.64	Peak	90.00	100	Horizontal	Pass
2**	3962.000	38.95	-3.21	54.0	-15.05	AV	360.00	100	Horizontal	Pass
2	3962.000	49.89	-3.21	74.0	-24.11	Peak	360.00	100	Horizontal	Pass
3**	5181.000	97.73	0.28	--	97.73	AV	119.00	100	Horizontal	N/A
3	5181.000	105.83	0.28	--	-13.17	Peak	119.00	100	Horizontal	N/A
4**	7582.188	42.25	0.85	54.0	-11.75	AV	42.00	100	Horizontal	Pass
4	7582.188	54.17	0.85	74.0	-19.83	Peak	42.00	100	Horizontal	Pass
5**	12249.750	45.89	6.27	54.0	-8.11	AV	66.00	100	Horizontal	Pass
5	12249.750	57.11	6.27	74.0	-16.89	Peak	66.00	100	Horizontal	Pass
6**	15970.875	47.34	13.61	54.0	-6.66	AV	242.00	100	Horizontal	Pass
6	15970.875	56.85	13.61	74.0	-17.15	Peak	242.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11n20 ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1568.500	28.25	-16.22	54.0	-25.75	AV	354.00	100	Vertical	Pass
1	1568.500	39.35	-16.22	74.0	-34.65	Peak	354.00	100	Vertical	Pass
2**	4259.000	40.24	-1.48	54.0	-13.76	AV	360.00	100	Vertical	Pass
2	4259.000	51.28	-1.48	74.0	-22.72	Peak	360.00	100	Vertical	Pass
3**	5201.000	91.88	0.38	--	91.88	AV	282.00	100	Vertical	N/A
3	5201.000	100.51	0.38	--	-181.49	Peak	282.00	100	Vertical	N/A
4**	7534.750	43.28	2.01	54.0	-10.72	AV	306.00	100	Vertical	Pass
4	7534.750	53.59	2.01	74.0	-20.41	Peak	306.00	100	Vertical	Pass
5**	12333.125	46.88	6.76	54.0	-7.12	AV	144.00	100	Vertical	Pass
5	12333.125	56.79	6.76	74.0	-17.21	Peak	144.00	100	Vertical	Pass
6**	15935.438	46.49	13.52	54.0	-7.51	AV	187.00	100	Vertical	Pass
6	15935.438	56.33	13.52	74.0	-17.67	Peak	187.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11n20 ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1536.000	28.31	-16.41	54.0	-25.69	AV	361.00	100	Horizontal	Pass
1	1536.000	39.40	-16.41	74.0	-34.60	Peak	361.00	100	Horizontal	Pass
2**	2789.500	34.15	-8.51	54.0	-19.85	AV	238.00	100	Horizontal	Pass
2	2789.500	45.18	-8.51	74.0	-28.82	Peak	238.00	100	Horizontal	Pass
3**	5199.000	98.59	0.43	--	98.59	AV	122.00	100	Horizontal	N/A
3	5199.000	106.85	0.43	--	-15.15	Peak	122.00	100	Horizontal	N/A
4**	7324.875	42.59	0.83	54.0	-11.41	AV	274.00	100	Horizontal	Pass
4	7324.875	53.82	0.83	74.0	-20.18	Peak	274.00	100	Horizontal	Pass
5**	12271.313	46.49	6.48	54.0	-7.51	AV	247.00	100	Horizontal	Pass
5	12271.313	57.33	6.48	74.0	-16.67	Peak	247.00	100	Horizontal	Pass
6**	15734.625	47.09	11.26	54.0	-6.91	AV	338.00	100	Horizontal	Pass
6	15734.625	56.75	11.26	74.0	-17.25	Peak	338.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11n20 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1139.000	27.17	-17.46	54.0	-26.83	AV	223.00	100	Vertical	Pass
1	1139.000	40.00	-17.46	74.0	-34.00	Peak	223.00	100	Vertical	Pass
2**	2799.000	34.94	-8.31	54.0	-19.06	AV	250.00	100	Vertical	Pass
2	2799.000	45.97	-8.31	74.0	-28.03	Peak	250.00	100	Vertical	Pass
3**	5239.000	93.57	0.30	--	93.57	AV	277.00	100	Vertical	N/A
3	5239.000	100.86	0.30	--	-176.14	Peak	277.00	100	Vertical	N/A
4**	7539.062	43.30	2.01	54.0	-10.70	AV	290.00	100	Vertical	Pass
4	7539.062	53.46	2.01	74.0	-20.54	Peak	290.00	100	Vertical	Pass
5**	12258.375	46.41	6.58	54.0	-7.59	AV	314.00	100	Vertical	Pass
5	12258.375	56.83	6.58	74.0	-17.17	Peak	314.00	100	Vertical	Pass
6**	15961.687	47.80	13.63	54.0	-6.20	AV	267.00	100	Vertical	Pass
6	15961.687	57.10	13.63	74.0	-16.90	Peak	267.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11n20 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1563.500	28.30	-16.22	54.0	-25.70	AV	1.00	100	Horizontal	Pass
1	1563.500	39.13	-16.22	74.0	-34.87	Peak	1.00	100	Horizontal	Pass
2**	2828.500	34.61	-8.77	54.0	-19.39	AV	177.00	100	Horizontal	Pass
2	2828.500	45.74	-8.77	74.0	-28.26	Peak	177.00	100	Horizontal	Pass
3**	5238.000	98.81	0.19	--	98.81	AV	113.00	100	Horizontal	N/A
3	5238.000	106.99	0.19	--	-6.01	Peak	113.00	100	Horizontal	N/A
4**	7534.750	43.30	2.01	54.0	-10.70	AV	361.00	100	Horizontal	Pass
4	7534.750	53.25	2.01	74.0	-20.75	Peak	361.00	100	Horizontal	Pass
5**	12356.125	46.58	5.97	54.0	-7.42	AV	48.00	100	Horizontal	Pass
5	12356.125	56.51	5.97	74.0	-17.49	Peak	48.00	100	Horizontal	Pass
6**	15741.187	47.16	11.39	54.0	-6.84	AV	244.00	100	Horizontal	Pass
6	15741.187	56.20	11.39	74.0	-17.80	Peak	244.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11n40 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1598.000	28.32	-16.34	54.0	-25.68	AV	111.00	100	Vertical	Pass
1	1598.000	39.19	-16.34	74.0	-34.81	Peak	111.00	100	Vertical	Pass
2**	2831.500	34.72	-8.77	54.0	-19.28	AV	196.00	100	Vertical	Pass
2	2831.500	45.74	-8.77	74.0	-28.26	Peak	196.00	100	Vertical	Pass
3**	5184.000	87.83	0.40	--	87.83	AV	290.00	100	Vertical	N/A
3	5184.000	95.85	0.40	--	-194.15	Peak	290.00	100	Vertical	N/A
4**	8303.813	42.28	2.23	54.0	-11.72	AV	186.00	100	Vertical	Pass
4	8303.813	53.66	2.23	74.0	-20.34	Peak	186.00	100	Vertical	Pass
5**	12271.313	47.20	6.48	54.0	-6.80	AV	313.00	100	Vertical	Pass
5	12271.313	57.62	6.48	74.0	-16.38	Peak	313.00	100	Vertical	Pass
6**	15728.062	46.81	11.05	54.0	-7.19	AV	230.00	100	Vertical	Pass
6	15728.062	56.35	11.05	74.0	-17.65	Peak	230.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11n40 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1557.500	28.06	-16.25	54.0	-25.94	AV	183.00	100	Horizontal	Pass
1	1557.500	39.01	-16.25	74.0	-34.99	Peak	183.00	100	Horizontal	Pass
2**	2767.000	34.46	-9.02	54.0	-19.54	AV	55.00	100	Horizontal	Pass
2	2767.000	45.38	-9.02	74.0	-28.62	Peak	55.00	100	Horizontal	Pass
3**	5183.000	95.64	0.32	--	95.64	AV	121.00	100	Horizontal	N/A
3	5183.000	103.56	0.32	--	-17.44	Peak	121.00	100	Horizontal	N/A
4**	8303.813	42.69	2.23	54.0	-11.31	AV	87.00	100	Horizontal	Pass
4	8303.813	53.77	2.23	74.0	-20.23	Peak	87.00	100	Horizontal	Pass
5**	12294.313	46.45	7.34	54.0	-7.55	AV	113.00	100	Horizontal	Pass
5	12294.313	57.05	7.34	74.0	-16.95	Peak	113.00	100	Horizontal	Pass
6**	15737.250	47.04	11.34	54.0	-6.96	AV	-1.00	100	Horizontal	Pass
6	15737.250	57.00	11.34	74.0	-17.00	Peak	-1.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band I 11n40 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1577.000	28.54	-16.23	54.0	-25.46	AV	249.00	100	Vertical	Pass
1	1577.000	39.09	-16.23	74.0	-34.91	Peak	249.00	100	Vertical	Pass
2**	2722.500	34.50	-7.60	54.0	-19.50	AV	258.00	100	Vertical	Pass
2	2722.500	45.68	-7.60	74.0	-28.32	Peak	258.00	100	Vertical	Pass
3**	5235.000	90.36	0.13	--	90.36	AV	290.00	100	Vertical	N/A
3	5235.000	98.47	0.13	--	-191.53	Peak	290.00	100	Vertical	N/A
4**	8250.625	42.14	1.73	54.0	-11.86	AV	352.00	100	Vertical	Pass
4	8250.625	53.05	1.73	74.0	-20.95	Peak	352.00	100	Vertical	Pass
5**	12330.250	47.08	6.93	54.0	-6.92	AV	67.00	100	Vertical	Pass
5	12330.250	57.96	6.93	74.0	-16.04	Peak	67.00	100	Vertical	Pass
6**	15980.063	47.02	13.57	54.0	-6.98	AV	230.00	100	Vertical	Pass
6	15980.063	55.61	13.57	74.0	-18.39	Peak	230.00	100	Vertical	Pass

1 GHz to 18 GHz, Band I 11n40 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1523.500	28.37	-16.44	54.0	-25.63	AV	281.00	100	Horizontal	Pass
1	1523.500	39.14	-16.44	74.0	-34.86	Peak	281.00	100	Horizontal	Pass
2**	2814.500	34.93	-8.74	54.0	-19.07	AV	357.00	100	Horizontal	Pass
2	2814.500	45.20	-8.74	74.0	-28.80	Peak	357.00	100	Horizontal	Pass
3**	5240.000	96.26	0.46	--	96.26	AV	119.00	100	Horizontal	N/A
3	5240.000	104.20	0.46	--	-14.80	Peak	119.00	100	Horizontal	N/A
4**	7540.500	42.71	1.96	54.0	-11.29	AV	117.00	100	Horizontal	Pass
4	7540.500	53.19	1.96	74.0	-20.81	Peak	117.00	100	Horizontal	Pass
5**	12302.937	46.66	7.09	54.0	-7.34	AV	0.00	100	Horizontal	Pass
5	12302.937	57.18	7.09	74.0	-16.82	Peak	0.00	100	Horizontal	Pass
6**	15959.063	47.80	13.64	54.0	-6.20	AV	27.00	100	Horizontal	Pass
6	15959.063	56.64	13.64	74.0	-17.36	Peak	27.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11a ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1535.500	28.16	-16.48	54.0	-25.84	AV	347.00	100	Vertical	Pass
1	1535.500	38.99	-16.48	74.0	-35.01	Peak	347.00	100	Vertical	Pass
2**	4083.000	40.55	-0.62	54.0	-13.45	AV	96.00	100	Vertical	Pass
2	4083.000	50.75	-0.62	74.0	-23.25	Peak	96.00	100	Vertical	Pass
3**	5261.000	94.91	0.58	--	94.91	AV	278.00	100	Vertical	N/A
3	5261.000	102.75	0.58	--	-175.25	Peak	278.00	100	Vertical	N/A
4**	7531.875	43.09	1.66	54.0	-10.91	AV	0.00	100	Vertical	Pass
4	7531.875	53.51	1.66	74.0	-20.49	Peak	0.00	100	Vertical	Pass
5**	12354.688	46.38	5.96	54.0	-7.62	AV	37.00	100	Vertical	Pass
5	12354.688	56.97	5.96	74.0	-17.03	Peak	37.00	100	Vertical	Pass
6**	15567.938	45.93	9.87	54.0	-8.07	AV	-1.00	100	Vertical	Pass
6	15567.938	56.48	9.87	74.0	-17.52	Peak	-1.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11a ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1347.500	28.26	-16.21	54.0	-25.74	AV	211.00	100	Horizontal	Pass
1	1347.500	38.64	-16.21	74.0	-35.36	Peak	211.00	100	Horizontal	Pass
2**	2815.000	34.69	-8.83	54.0	-19.31	AV	225.00	100	Horizontal	Pass
2	2815.000	45.34	-8.83	74.0	-28.66	Peak	225.00	100	Horizontal	Pass
3**	5258.000	99.38	0.42	--	99.38	AV	121.00	100	Horizontal	N/A
3	5258.000	106.86	0.42	--	-14.14	Peak	121.00	100	Horizontal	N/A
4**	8154.313	42.38	2.89	54.0	-11.62	AV	37.00	100	Horizontal	Pass
4	8154.313	53.43	2.89	74.0	-20.57	Peak	37.00	100	Horizontal	Pass
5**	12327.375	46.55	6.91	54.0	-7.45	AV	21.00	100	Horizontal	Pass
5	12327.375	56.90	6.91	74.0	-17.10	Peak	21.00	100	Horizontal	Pass
6**	15970.875	47.72	13.61	54.0	-6.28	AV	119.00	100	Horizontal	Pass
6	15970.875	57.48	13.61	74.0	-16.52	Peak	119.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11a ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1536.500	28.38	-16.33	54.0	-25.62	AV	259.00	100	Vertical	Pass
1	1536.500	38.69	-16.33	74.0	-35.31	Peak	259.00	100	Vertical	Pass
2**	4096.000	40.83	-1.22	54.0	-13.17	AV	74.00	100	Vertical	Pass
2	4096.000	50.64	-1.22	74.0	-23.36	Peak	74.00	100	Vertical	Pass
3**	5299.000	94.77	-0.19	--	94.77	AV	280.00	100	Vertical	N/A
3	5299.000	102.07	-0.19	--	-177.93	Peak	280.00	100	Vertical	N/A
4**	7531.875	43.17	1.66	54.0	-10.83	AV	167.00	100	Vertical	Pass
4	7531.875	53.08	1.66	74.0	-20.92	Peak	167.00	100	Vertical	Pass
5**	12336.000	46.84	6.60	54.0	-7.16	AV	209.00	100	Vertical	Pass
5	12336.000	57.38	6.60	74.0	-16.62	Peak	209.00	100	Vertical	Pass
6**	15775.313	46.79	11.54	54.0	-7.21	AV	-1.00	100	Vertical	Pass
6	15775.313	57.15	11.54	74.0	-16.85	Peak	-1.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11a ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1585.500	28.39	-16.52	54.0	-25.61	AV	207.00	100	Horizontal	Pass
1	1585.500	38.83	-16.52	74.0	-35.17	Peak	207.00	100	Horizontal	Pass
2**	2713.000	34.30	-8.13	54.0	-19.70	AV	248.00	100	Horizontal	Pass
2	2713.000	45.10	-8.13	74.0	-28.90	Peak	248.00	100	Horizontal	Pass
3**	5298.000	98.35	-0.20	--	98.35	AV	120.00	100	Horizontal	N/A
3	5298.000	105.50	-0.20	--	-14.50	Peak	120.00	100	Horizontal	N/A
4**	7368.000	42.54	0.79	54.0	-11.46	AV	42.00	100	Horizontal	Pass
4	7368.000	53.10	0.79	74.0	-20.90	Peak	42.00	100	Horizontal	Pass
5**	12330.250	46.90	6.93	54.0	-7.10	AV	184.00	100	Horizontal	Pass
5	12330.250	57.48	6.93	74.0	-16.52	Peak	184.00	100	Horizontal	Pass
6**	15743.813	47.85	11.31	54.0	-6.15	AV	207.00	100	Horizontal	Pass
6	15743.813	56.79	11.31	74.0	-17.21	Peak	207.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11a ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1587.000	28.21	-16.25	54.0	-25.79	AV	133.00	100	Vertical	Pass
1	1587.000	39.37	-16.25	74.0	-34.63	Peak	133.00	100	Vertical	Pass
2**	2836.500	35.05	-9.12	54.0	-18.95	AV	153.00	100	Vertical	Pass
2	2836.500	45.93	-9.12	74.0	-28.07	Peak	153.00	100	Vertical	Pass
3**	5319.000	94.91	-0.93	--	94.91	AV	285.00	100	Vertical	N/A
3	5319.000	103.19	-0.93	--	-181.81	Peak	285.00	100	Vertical	N/A
4**	8446.125	42.29	1.98	54.0	-11.71	AV	60.00	100	Vertical	Pass
4	8446.125	54.50	1.98	74.0	-19.50	Peak	60.00	100	Vertical	Pass
5**	12294.313	46.62	7.34	54.0	-7.38	AV	39.00	100	Vertical	Pass
5	12294.313	57.14	7.34	74.0	-16.86	Peak	39.00	100	Vertical	Pass
6**	15978.750	47.14	13.58	54.0	-6.86	AV	267.00	100	Vertical	Pass
6	15978.750	56.90	13.58	74.0	-17.10	Peak	267.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11a ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1518.500	28.47	-16.28	54.0	-25.53	AV	94.00	100	Horizontal	Pass
1	1518.500	39.26	-16.28	74.0	-34.74	Peak	94.00	100	Horizontal	Pass
2**	4153.000	40.59	-1.08	54.0	-13.41	AV	287.00	100	Horizontal	Pass
2	4153.000	50.67	-1.08	74.0	-23.33	Peak	287.00	100	Horizontal	Pass
3**	5321.000	97.10	-0.91	--	97.10	AV	119.00	100	Horizontal	N/A
3	5321.000	105.26	-0.91	--	-13.74	Peak	119.00	100	Horizontal	N/A
4**	8139.937	42.15	1.96	54.0	-11.85	AV	82.00	100	Horizontal	Pass
4	8139.937	52.75	1.96	74.0	-21.25	Peak	82.00	100	Horizontal	Pass
5**	12324.500	46.49	6.88	54.0	-7.51	AV	253.00	100	Horizontal	Pass
5	12324.500	56.63	6.88	74.0	-17.37	Peak	253.00	100	Horizontal	Pass
6**	15968.250	47.78	13.61	54.0	-6.22	AV	275.00	100	Horizontal	Pass
6	15968.250	56.23	13.61	74.0	-17.77	Peak	275.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11n20 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1583.500	28.31	-16.23	54.0	-25.69	AV	139.00	100	Vertical	Pass
1	1583.500	38.90	-16.23	74.0	-35.10	Peak	139.00	100	Vertical	Pass
2**	2791.000	34.26	-8.43	54.0	-19.74	AV	78.00	100	Vertical	Pass
2	2791.000	45.75	-8.43	74.0	-28.25	Peak	78.00	100	Vertical	Pass
3**	5261.000	94.34	0.58	--	94.34	AV	285.00	100	Vertical	N/A
3	5261.000	102.78	0.58	--	-182.22	Peak	285.00	100	Vertical	N/A
4**	7327.750	42.93	1.02	54.0	-11.07	AV	35.00	100	Vertical	Pass
4	7327.750	53.51	1.02	74.0	-20.49	Peak	35.00	100	Vertical	Pass
5**	12596.187	46.30	7.05	54.0	-7.70	AV	351.00	100	Vertical	Pass
5	12596.187	57.31	7.05	74.0	-16.69	Peak	351.00	100	Vertical	Pass
6**	15738.563	47.63	11.38	54.0	-6.37	AV	201.00	100	Vertical	Pass
6	15738.563	56.55	11.38	74.0	-17.45	Peak	201.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11n20 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1606.500	28.36	-16.22	54.0	-25.64	AV	145.00	100	Horizontal	Pass
1	1606.500	39.15	-16.22	74.0	-34.85	Peak	145.00	100	Horizontal	Pass
2**	4175.000	40.37	-0.98	54.0	-13.63	AV	295.00	100	Horizontal	Pass
2	4175.000	51.36	-0.98	74.0	-22.64	Peak	295.00	100	Horizontal	Pass
3**	5259.000	99.17	0.41	--	99.17	AV	123.00	100	Horizontal	N/A
3	5259.000	106.28	0.41	--	-16.72	Peak	123.00	100	Horizontal	N/A
4**	7533.313	43.11	1.92	54.0	-10.89	AV	106.00	100	Horizontal	Pass
4	7533.313	53.67	1.92	74.0	-20.33	Peak	106.00	100	Horizontal	Pass
5**	12330.250	47.06	6.93	54.0	-6.94	AV	361.00	100	Horizontal	Pass
5	12330.250	56.59	6.93	74.0	-17.41	Peak	361.00	100	Horizontal	Pass
6**	15987.937	46.56	12.95	54.0	-7.44	AV	244.00	100	Horizontal	Pass
6	15987.937	56.60	12.95	74.0	-17.40	Peak	244.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11n20 ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1570.500	28.05	-16.41	54.0	-25.95	AV	114.00	100	Vertical	Pass
1	1570.500	39.10	-16.41	74.0	-34.90	Peak	114.00	100	Vertical	Pass
2**	4097.000	40.35	-1.37	54.0	-13.65	AV	326.00	100	Vertical	Pass
2	4097.000	51.30	-1.37	74.0	-22.70	Peak	326.00	100	Vertical	Pass
3**	5298.000	94.02	-0.20	--	94.02	AV	283.00	100	Vertical	N/A
3	5298.000	102.11	-0.20	--	-180.89	Peak	283.00	100	Vertical	N/A
4**	7539.062	43.42	2.01	54.0	-10.58	AV	112.00	100	Vertical	Pass
4	7539.062	52.71	2.01	74.0	-21.29	Peak	112.00	100	Vertical	Pass
5**	12325.937	46.57	6.89	54.0	-7.43	AV	246.00	100	Vertical	Pass
5	12325.937	57.51	6.89	74.0	-16.49	Peak	246.00	100	Vertical	Pass
6**	15737.250	47.03	11.34	54.0	-6.97	AV	221.00	100	Vertical	Pass
6	15737.250	56.20	11.34	74.0	-17.80	Peak	221.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11n20 ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1480.000	28.71	-16.38	54.0	-25.29	AV	254.00	100	Horizontal	Pass
1	1480.000	39.36	-16.38	74.0	-34.64	Peak	254.00	100	Horizontal	Pass
2**	2253.000	32.21	-10.95	54.0	-21.79	AV	93.00	100	Horizontal	Pass
2	2253.000	44.65	-10.95	74.0	-29.35	Peak	93.00	100	Horizontal	Pass
3**	5301.000	97.66	-0.35	--	97.66	AV	127.00	100	Horizontal	N/A
3	5301.000	105.54	-0.35	--	-21.46	Peak	127.00	100	Horizontal	N/A
4**	8198.875	42.63	2.65	54.0	-11.37	AV	10.00	100	Horizontal	Pass
4	8198.875	52.99	2.65	74.0	-21.01	Peak	10.00	100	Horizontal	Pass
5**	11584.187	45.06	5.63	54.0	-8.94	AV	73.00	100	Horizontal	Pass
5	11584.187	57.17	5.63	74.0	-16.83	Peak	73.00	100	Horizontal	Pass
6**	15733.313	46.80	11.22	54.0	-7.20	AV	331.00	100	Horizontal	Pass
6	15733.313	56.65	11.22	74.0	-17.35	Peak	331.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11n20 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1529.500	28.26	-16.42	54.0	-25.74	AV	321.00	100	Vertical	Pass
1	1529.500	38.74	-16.42	74.0	-35.26	Peak	321.00	100	Vertical	Pass
2**	4110.000	40.73	-0.72	54.0	-13.27	AV	329.00	100	Vertical	Pass
2	4110.000	50.83	-0.72	74.0	-23.17	Peak	329.00	100	Vertical	Pass
3**	5321.000	94.49	-0.91	--	94.49	AV	274.00	100	Vertical	N/A
3	5321.000	103.25	-0.91	--	-170.75	Peak	274.00	100	Vertical	N/A
4**	7365.125	43.24	1.14	54.0	-10.76	AV	115.00	100	Vertical	Pass
4	7365.125	53.25	1.14	74.0	-20.75	Peak	115.00	100	Vertical	Pass
5**	12268.438	46.52	6.47	54.0	-7.48	AV	137.00	100	Vertical	Pass
5	12268.438	56.93	6.47	74.0	-17.07	Peak	137.00	100	Vertical	Pass
6**	15743.813	46.86	11.31	54.0	-7.14	AV	230.00	100	Vertical	Pass
6	15743.813	56.66	11.31	74.0	-17.34	Peak	230.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11n20 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1530.500	28.42	-16.42	54.0	-25.58	AV	295.00	100	Horizontal	Pass
1	1530.500	39.62	-16.42	74.0	-34.38	Peak	295.00	100	Horizontal	Pass
2**	2837.500	34.27	-9.21	54.0	-19.73	AV	78.00	100	Horizontal	Pass
2	2837.500	45.35	-9.21	74.0	-28.65	Peak	78.00	100	Horizontal	Pass
3**	5321.000	96.23	-0.91	--	96.23	AV	112.00	100	Horizontal	N/A
3	5321.000	104.72	-0.91	--	-7.28	Peak	112.00	100	Horizontal	N/A
4**	8394.375	42.82	1.76	54.0	-11.18	AV	240.00	100	Horizontal	Pass
4	8394.375	53.43	1.76	74.0	-20.57	Peak	240.00	100	Horizontal	Pass
5**	12336.000	46.87	6.60	54.0	-7.13	AV	292.00	100	Horizontal	Pass
5	12336.000	57.34	6.60	74.0	-16.66	Peak	292.00	100	Horizontal	Pass
6**	15977.437	47.14	13.59	54.0	-6.86	AV	235.00	100	Horizontal	Pass
6	15977.437	57.07	13.59	74.0	-16.93	Peak	235.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11n40 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1411.000	28.51	-16.21	54.0	-25.49	AV	167.00	100	Vertical	Pass
1	1411.000	39.80	-16.21	74.0	-34.20	Peak	167.00	100	Vertical	Pass
2**	4180.000	40.59	-1.08	54.0	-13.41	AV	201.00	100	Vertical	Pass
2	4180.000	51.12	-1.08	74.0	-22.88	Peak	201.00	100	Vertical	Pass
3**	5276.000	92.09	0.82	--	92.09	AV	282.00	100	Vertical	N/A
3	5276.000	100.77	0.82	--	-181.23	Peak	282.00	100	Vertical	N/A
4**	7541.938	43.03	1.73	54.0	-10.97	AV	261.00	100	Vertical	Pass
4	7541.938	53.01	1.73	74.0	-20.99	Peak	261.00	100	Vertical	Pass
5**	12363.312	46.41	6.05	54.0	-7.59	AV	242.00	100	Vertical	Pass
5	12363.312	57.37	6.05	74.0	-16.63	Peak	242.00	100	Vertical	Pass
6**	15974.813	47.56	13.59	54.0	-6.44	AV	76.00	100	Vertical	Pass
6	15974.813	56.29	13.59	74.0	-17.71	Peak	76.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11n40 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1477.500	27.99	-16.55	54.0	-26.01	AV	1.00	100	Horizontal	Pass
1	1477.500	39.52	-16.55	74.0	-34.48	Peak	1.00	100	Horizontal	Pass
2**	4065.000	39.65	-1.64	54.0	-14.35	AV	132.00	100	Horizontal	Pass
2	4065.000	50.86	-1.64	74.0	-23.14	Peak	132.00	100	Horizontal	Pass
3**	5263.000	95.52	0.45	--	95.52	AV	114.00	100	Horizontal	N/A
3	5263.000	104.90	0.45	--	-9.10	Peak	114.00	100	Horizontal	N/A
4**	7365.125	43.26	1.14	54.0	-10.74	AV	161.00	100	Horizontal	Pass
4	7365.125	53.00	1.14	74.0	-21.00	Peak	161.00	100	Horizontal	Pass
5**	12333.125	47.11	6.76	54.0	-6.89	AV	25.00	100	Horizontal	Pass
5	12333.125	56.83	6.76	74.0	-17.17	Peak	25.00	100	Horizontal	Pass
6**	15760.874	45.81	10.86	54.0	-8.19	AV	26.00	100	Horizontal	Pass
6	15760.874	56.05	10.86	74.0	-17.95	Peak	26.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band II 11n40 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1567.500	28.36	-16.31	54.0	-25.64	AV	329.00	100	Vertical	Pass
1	1567.500	38.94	-16.31	74.0	-35.06	Peak	329.00	100	Vertical	Pass
2**	4078.000	40.61	-0.52	54.0	-13.39	AV	280.00	100	Vertical	Pass
2	4078.000	51.80	-0.52	74.0	-22.20	Peak	280.00	100	Vertical	Pass
3**	5316.000	91.53	-0.72	--	91.53	AV	280.00	100	Vertical	N/A
3	5316.000	98.98	-0.72	--	-181.02	Peak	280.00	100	Vertical	N/A
4**	9331.625	43.69	3.60	54.0	-10.31	AV	284.00	100	Vertical	Pass
4	9331.625	55.22	3.60	74.0	-18.78	Peak	284.00	100	Vertical	Pass
5**	12331.688	47.02	6.85	54.0	-6.98	AV	284.00	100	Vertical	Pass
5	12331.688	57.27	6.85	74.0	-16.73	Peak	284.00	100	Vertical	Pass
6**	15973.500	47.26	13.60	54.0	-6.74	AV	273.00	100	Vertical	Pass
6	15973.500	56.25	13.60	74.0	-17.75	Peak	273.00	100	Vertical	Pass

1 GHz to 18 GHz, Band II 11n40 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1506.500	28.11	-16.61	54.0	-25.89	AV	97.00	100	Horizontal	Pass
1	1506.500	39.13	-16.61	74.0	-34.87	Peak	97.00	100	Horizontal	Pass
2**	2808.500	34.66	-8.62	54.0	-19.34	AV	28.00	100	Horizontal	Pass
2	2808.500	45.78	-8.62	74.0	-28.22	Peak	28.00	100	Horizontal	Pass
3**	5306.000	95.24	-0.28	--	95.24	AV	117.00	100	Horizontal	N/A
3	5306.000	102.73	-0.28	--	-14.27	Peak	117.00	100	Horizontal	N/A
4**	7506.000	41.82	0.96	54.0	-12.18	AV	118.00	100	Horizontal	Pass
4	7506.000	52.54	0.96	74.0	-21.46	Peak	118.00	100	Horizontal	Pass
5**	12106.000	45.61	5.27	54.0	-8.39	AV	361.00	100	Horizontal	Pass
5	12106.000	56.43	5.27	74.0	-17.57	Peak	361.00	100	Horizontal	Pass
6**	15976.125	47.12	13.59	54.0	-6.88	AV	175.00	100	Horizontal	Pass
6	15976.125	57.55	13.59	74.0	-16.45	Peak	175.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11a ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1169.500	27.10	-17.20	54.0	-26.90	AV	140.00	100	Vertical	Pass
1	1169.500	38.55	-17.20	74.0	-35.45	Peak	140.00	100	Vertical	Pass
2**	4185.000	40.76	-0.97	54.0	-13.24	AV	322.00	100	Vertical	Pass
2	4185.000	51.24	-0.97	74.0	-22.76	Peak	322.00	100	Vertical	Pass
3**	5497.000	90.40	1.26	--	90.40	AV	286.00	100	Vertical	N/A
3	5497.000	98.88	1.26	--	-187.12	Peak	286.00	100	Vertical	N/A
4**	7537.625	42.73	1.77	54.0	-11.27	AV	0.00	100	Vertical	Pass
4	7537.625	54.46	1.77	74.0	-19.54	Peak	0.00	100	Vertical	Pass
5**	12261.250	46.29	6.61	54.0	-7.71	AV	56.00	100	Vertical	Pass
5	12261.250	56.93	6.61	74.0	-17.07	Peak	56.00	100	Vertical	Pass
6**	15732.000	46.77	11.18	54.0	-7.23	AV	270.00	100	Vertical	Pass
6	15732.000	55.82	11.18	74.0	-18.18	Peak	270.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11a ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1592.500	28.26	-16.25	54.0	-25.74	AV	206.00	100	Horizontal	Pass
1	1592.500	39.53	-16.25	74.0	-34.47	Peak	206.00	100	Horizontal	Pass
2**	4078.000	41.01	-0.52	54.0	-12.99	AV	163.00	100	Horizontal	Pass
2	4078.000	51.64	-0.52	74.0	-22.36	Peak	163.00	100	Horizontal	Pass
3**	5501.000	95.71	0.73	--	95.71	AV	18.00	100	Horizontal	N/A
3	5501.000	103.55	0.73	--	85.55	Peak	18.00	100	Horizontal	N/A
4**	7494.500	42.31	1.05	54.0	-11.69	AV	11.00	100	Horizontal	Pass
4	7494.500	52.95	1.05	74.0	-21.05	Peak	11.00	100	Horizontal	Pass
5**	12334.562	47.14	6.68	54.0	-6.86	AV	106.00	100	Horizontal	Pass
5	12334.562	56.99	6.68	74.0	-17.01	Peak	106.00	100	Horizontal	Pass
6**	15966.937	47.81	13.62	54.0	-6.19	AV	-1.00	100	Horizontal	Pass
6	15966.937	57.37	13.62	74.0	-16.63	Peak	-1.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11a ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1333.000	28.54	-16.27	54.0	-25.46	AV	74.00	100	Vertical	Pass
1	1333.000	39.36	-16.27	74.0	-34.64	Peak	74.00		Vertical	Pass
2**	4201.000	40.01	-1.97	54.0	-13.99	AV	171.00	100	Vertical	Pass
2	4201.000	52.08	-1.97	74.0	-21.92	Peak	171.00	100	Vertical	Pass
3**	5582.000	92.81	0.41	--	92.81	AV	293.00	100	Vertical	N/A
3	5582.000	100.29	0.41	--	-192.71	Peak	293.00	100	Vertical	N/A
4**	7359.375	42.88	0.78	54.0	-11.12	AV	71.00	100	Vertical	Pass
4	7359.375	53.64	0.78	74.0	-20.36	Peak	71.00	100	Vertical	Pass
5**	12272.750	46.71	6.53	54.0	-7.29	AV	254.00	100	Vertical	Pass
5	12272.750	56.95	6.53	74.0	-17.05	Peak	254.00	100	Vertical	Pass
6**	15968.250	47.65	13.61	54.0	-6.35	AV	264.00	100	Vertical	Pass
6	15968.250	56.99	13.61	74.0	-17.01	Peak	264.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11a ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1511.500	28.37	-16.40	54.0	-25.63	AV	26.00	100	Horizontal	Pass
1	1511.500	39.11	-16.40	74.0	-34.89	Peak	26.00	100	Horizontal	Pass
2**	2835.500	35.00	-8.89	54.0	-19.00	AV	317.00	100	Horizontal	Pass
2	2835.500	45.59	-8.89	74.0	-28.41	Peak	317.00	100	Horizontal	Pass
3**	5578.000	97.84	0.88	--	97.84	AV	3.00	100	Horizontal	N/A
3	5578.000	106.02	0.88	--	103.02	Peak	3.00	100	Horizontal	N/A
4**	8296.625	42.22	1.93	54.0	-11.78	AV	337.00	100	Horizontal	Pass
4	8296.625	53.35	1.93	74.0	-20.65	Peak	337.00	100	Horizontal	Pass
5**	12292.875	46.37	7.36	54.0	-7.63	AV	337.00	100	Horizontal	Pass
5	12292.875	56.79	7.36	74.0	-17.21	Peak	337.00	100	Horizontal	Pass
6**	15984.000	46.63	13.26	54.0	-7.37	AV	31.00	100	Horizontal	Pass
6	15984.000	56.69	13.26	74.0	-17.31	Peak	31.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11a ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1590.500	28.06	-16.34	54.0	-25.94	AV	234.00	100	Vertical	Pass
1	1590.500	39.22	-16.34	74.0	-34.78	Peak	234.00	100	Vertical	Pass
2**	4144.000	40.18	-1.41	54.0	-13.82	AV	322.00	100	Vertical	Pass
2	4144.000	52.34	-1.41	74.0	-21.66	Peak	322.00	100	Vertical	Pass
3**	5699.000	88.85	0.65	--	88.85	AV	322.00	100	Vertical	N/A
3	5699.000	97.07	0.65	--	-224.93	Peak	322.00	100	Vertical	N/A
4**	7529.000	42.81	1.47	54.0	-11.19	AV	4.00	100	Vertical	Pass
4	7529.000	53.07	1.47	74.0	-20.93	Peak	4.00	100	Vertical	Pass
5**	12262.688	46.59	6.58	54.0	-7.41	AV	32.00	100	Vertical	Pass
5	12262.688	57.05	6.58	74.0	-16.95	Peak	32.00	100	Vertical	Pass
6**	15973.500	47.44	13.60	54.0	-6.56	AV	130.00	100	Vertical	Pass
6	15973.500	56.98	13.60	74.0	-17.02	Peak	130.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11a ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1340.500	28.32	-16.49	54.0	-25.68	AV	61.00	100	Horizontal	Pass
1	1340.500	39.53	-16.49	74.0	-34.47	Peak	61.00	100	Horizontal	Pass
2**	4245.000	40.18	-1.59	54.0	-13.82	AV	214.00	100	Horizontal	Pass
2	4245.000	50.89	-1.59	74.0	-23.11	Peak	214.00	100	Horizontal	Pass
3**	5697.000	95.17	0.46	--	95.17	AV	102.00	100	Horizontal	N/A
3	5697.000	103.51	0.46	--	1.51	Peak	102.00	100	Horizontal	N/A
4**	7362.250	42.84	0.75	54.0	-11.16	AV	255.00	100	Horizontal	Pass
4	7362.250	52.96	0.75	74.0	-21.04	Peak	255.00	100	Horizontal	Pass
5**	12297.187	46.43	7.31	54.0	-7.57	AV	172.00	100	Horizontal	Pass
5	12297.187	56.96	7.31	74.0	-17.04	Peak	172.00	100	Horizontal	Pass
6**	16159.875	47.32	14.10	54.0	-6.68	AV	210.00	100	Horizontal	Pass
6	16159.875	57.61	14.10	74.0	-16.39	Peak	210.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11a ANT V High channel-144

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1500.500	28.21	-16.55	54.0	-25.79	AV	146.00	100	Vertical	Pass
1	1500.500	39.15	-16.55	74.0	-34.85	Peak	146.00	100	Vertical	Pass
2**	4141.000	40.88	-1.49	54.0	-13.12	AV	-1.00	100	Vertical	Pass
2	4141.000	51.06	-1.49	74.0	-22.94	Peak	-1.00	100	Vertical	Pass
3**	5718.000	88.13	0.75	--	88.13	AV	289.00	100	Vertical	N/A
3	5718.000	95.83	0.75	--	-193.17	Peak	289.00	100	Vertical	N/A
4**	7362.250	42.57	0.75	54.0	-11.43	AV	0.00	100	Vertical	Pass
4	7362.250	53.23	0.75	74.0	-20.77	Peak	0.00	100	Vertical	Pass
5**	12294.313	46.28	7.34	54.0	-7.72	AV	248.00	100	Vertical	Pass
5	12294.313	57.71	7.34	74.0	-16.29	Peak	248.00	100	Vertical	Pass
6**	15982.687	46.96	13.37	54.0	-7.04	AV	187.00	100	Vertical	Pass
6	15982.687	57.14	13.37	74.0	-16.86	Peak	187.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11a ANT H High channel-144

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1490.000	28.30	-16.47	54.0	-25.70	AV	1.00	100	Horizontal	Pass
1	1490.000	39.20	-16.47	74.0	-34.80	Peak	1.00	100	Horizontal	Pass
2**	4105.000	41.32	-1.23	54.0	-12.68	AV	248.00	100	Horizontal	Pass
2	4105.000	51.33	-1.23	74.0	-22.67	Peak	248.00	100	Horizontal	Pass
3**	5719.000	96.35	0.82	--	96.35	AV	95.00	100	Horizontal	N/A
3	5719.000	104.45	0.82	--	9.45	Peak	95.00	100	Horizontal	N/A
4**	7580.750	42.58	0.98	54.0	-11.42	AV	165.00	100	Horizontal	Pass
4	7580.750	52.45	0.98	74.0	-21.55	Peak	165.00	100	Horizontal	Pass
5**	12340.312	46.66	6.36	54.0	-7.34	AV	165.00	100	Horizontal	Pass
5	12340.312	57.54	6.36	74.0	-16.46	Peak	165.00	100	Horizontal	Pass
6**	15968.250	47.52	13.61	54.0	-6.48	AV	334.00	100	Horizontal	Pass
6	15968.250	56.49	13.61	74.0	-17.51	Peak	334.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n20 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1606.500	28.64	-16.22	54.0	-25.36	AV	320.00	100	Vertical	Pass
1	1606.500	39.24	-16.22	74.0	-34.76	Peak	320.00	100	Vertical	Pass
2**	4154.000	40.96	-1.15	54.0	-13.04	AV	178.00	100	Vertical	Pass
2	4154.000	50.66	-1.15	74.0	-23.34	Peak	178.00	100	Vertical	Pass
3**	5499.000	90.89	0.92	--	90.89	AV	284.00	100	Vertical	N/A
3	5499.000	98.69	0.92	--	-185.31	Peak	284.00	100	Vertical	N/A
4**	7349.313	42.46	0.40	54.0	-11.54	AV	5.00	100	Vertical	Pass
4	7349.313	53.00	0.40	74.0	-21.00	Peak	5.00	100	Vertical	Pass
5**	12337.438	47.21	6.52	54.0	-6.79	AV	90.00	100	Vertical	Pass
5	12337.438	57.17	6.52	74.0	-16.83	Peak	90.00	100	Vertical	Pass
6**	15741.187	48.00	11.39	54.0	-6.00	AV	83.00	100	Vertical	Pass
6	15741.187	56.50	11.39	74.0	-17.50	Peak	83.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n20 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1607.000	28.32	-16.21	54.0	-25.68	AV	361.00	100	Horizontal	Pass
1	1607.000	39.36	-16.21	74.0	-34.64	Peak	361.00	100	Horizontal	Pass
2**	4144.000	40.24	-1.41	54.0	-13.76	AV	176.00	100	Horizontal	Pass
2	4144.000	51.42	-1.41	74.0	-22.58	Peak	176.00	100	Horizontal	Pass
3**	5499.000	95.78	0.92	--	95.78	AV	25.00	100	Horizontal	N/A
3	5499.000	103.42	0.92	--	78.42	Peak	25.00	100	Horizontal	N/A
4**	7536.187	43.19	1.91	54.0	-10.81	AV	328.00	100	Horizontal	Pass
4	7536.187	53.00	1.91	74.0	-21.00	Peak	328.00	100	Horizontal	Pass
5**	12256.938	45.98	6.53	54.0	-8.02	AV	207.00	100	Horizontal	Pass
5	12256.938	57.01	6.53	74.0	-16.99	Peak	207.00	100	Horizontal	Pass
6**	15970.875	47.28	13.61	54.0	-6.72	AV	70.00	100	Horizontal	Pass
6	15970.875	56.82	13.61	74.0	-17.18	Peak	70.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n20 ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1485.000	28.28	-16.43	54.0	-25.72	AV	319.00	100	Vertical	Pass
1	1485.000	39.56	-16.43	74.0	-34.44	Peak	319.00	100	Vertical	Pass
2**	4079.000	40.95	-0.62	54.0	-13.05	AV	341.00	100	Vertical	Pass
2	4079.000	50.76	-0.62	74.0	-23.24	Peak	341.00	100	Vertical	Pass
3**	5578.000	92.39	0.88	--	92.39	AV	295.00	100	Vertical	N/A
3	5578.000	99.19	0.88	--	-195.81	Peak	295.00	100	Vertical	N/A
4**	7526.125	42.50	1.23	54.0	-11.50	AV	356.00	100	Vertical	Pass
4	7526.125	53.79	1.23	74.0	-20.21	Peak	356.00	100	Vertical	Pass
5**	12311.562	46.10	6.68	54.0	-7.90	AV	41.00	100	Vertical	Pass
5	12311.562	57.22	6.68	74.0	-16.78	Peak	41.00	100	Vertical	Pass
6**	15977.437	47.44	13.59	54.0	-6.56	AV	50.00	100	Vertical	Pass
6	15977.437	56.75	13.59	74.0	-17.25	Peak	50.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n20 ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1562.500	28.66	-16.23	54.0	-25.34	AV	60.00	100	Horizontal	Pass
1	1562.500	39.36	-16.23	74.0	-34.64	Peak	60.00	100	Horizontal	Pass
2**	4288.000	40.67	-1.08	54.0	-13.33	AV	-1.00	100	Horizontal	Pass
2	4288.000	51.54	-1.08	74.0	-22.46	Peak	-1.00	100	Horizontal	Pass
3**	5581.000	97.13	0.45	--	97.13	AV	13.00	100	Horizontal	N/A
3	5581.000	105.57	0.45	--	92.57	Peak	13.00	100	Horizontal	N/A
4**	7530.438	43.20	1.50	54.0	-10.80	AV	351.00	100	Horizontal	Pass
4	7530.438	53.21	1.50	74.0	-20.79	Peak	351.00	100	Horizontal	Pass
5**	11821.375	45.20	5.61	54.0	-8.80	AV	322.00	100	Horizontal	Pass
5	11821.375	57.26	5.61	74.0	-16.74	Peak	322.00	100	Horizontal	Pass
6**	15968.250	47.95	13.61	54.0	-6.05	AV	247.00	100	Horizontal	Pass
6	15968.250	56.99	13.61	74.0	-17.01	Peak	247.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n20 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1547.000	28.45	-16.37	54.0	-25.55	AV	235.00	100	Vertical	Pass
1	1547.000	38.76	-16.37	74.0	-35.24	Peak	235.00	100	Vertical	Pass
2**	4105.000	40.57	-1.23	54.0	-13.43	AV	38.00	100	Vertical	Pass
2	4105.000	51.28	-1.23	74.0	-22.72	Peak	38.00	100	Vertical	Pass
3**	5702.000	88.40	0.40	--	88.40	AV	323.00	100	Vertical	N/A
3	5702.000	96.03	0.40	--	-226.97	Peak	323.00	100	Vertical	N/A
4**	7576.437	41.62	0.72	54.0	-12.38	AV	180.00	100	Vertical	Pass
4	7576.437	53.19	0.72	74.0	-20.81	Peak	180.00	100	Vertical	Pass
5**	12271.313	46.63	6.48	54.0	-7.37	AV	56.00	100	Vertical	Pass
5	12271.313	57.36	6.48	74.0	-16.64	Peak	56.00	100	Vertical	Pass
6**	15733.313	46.89	11.22	54.0	-7.11	AV	336.00	100	Vertical	Pass
6	15733.313	56.50	11.22	74.0	-17.50	Peak	336.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n20 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1597.500	28.03	-16.39	54.0	-25.97	AV	113.00	100	Horizontal	Pass
1	1597.500	39.84	-16.39	74.0	-34.16	Peak	113.00	100	Horizontal	Pass
2**	4168.000	40.13	-1.04	54.0	-13.87	AV	44.00	100	Horizontal	Pass
2	4168.000	50.57	-1.04	74.0	-23.43	Peak	44.00	100	Horizontal	Pass
3**	5699.000	96.23	0.65	--	96.23	AV	108.00	100	Horizontal	N/A
3	5699.000	103.69	0.65	--	-4.31	Peak	108.00	100	Horizontal	N/A
4**	8148.562	42.39	2.37	54.0	-11.61	AV	361.00	100	Horizontal	Pass
4	8148.562	53.41	2.37	74.0	-20.59	Peak	361.00	100	Horizontal	Pass
5**	12248.313	45.99	6.18	54.0	-8.01	AV	144.00	100	Horizontal	Pass
5	12248.313	56.95	6.18	74.0	-17.05	Peak	144.00	100	Horizontal	Pass
6**	15746.437	46.57	11.23	54.0	-7.43	AV	278.00	100	Horizontal	Pass
6	15746.437	56.28	11.23	74.0	-17.72	Peak	278.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n20 ANT V High channel-144

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1516.000	28.34	-16.48	54.0	-25.66	AV	273.00	100	Vertical	Pass
1	1516.000	39.67	-16.48	74.0	-34.33	Peak	273.00	100	Vertical	Pass
2**	4261.000	40.57	-1.22	54.0	-13.43	AV	138.00	100	Vertical	Pass
2	4261.000	51.61	-1.22	74.0	-22.39	Peak	138.00	100	Vertical	Pass
3**	5721.000	87.77	0.67	--	87.77	AV	287.00	100	Vertical	N/A
3	5721.000	95.75	0.67	--	-191.25	Peak	287.00	100	Vertical	N/A
4**	7520.375	42.11	0.46	54.0	-11.89	AV	97.00	100	Vertical	Pass
4	7520.375	52.92	0.46	74.0	-21.08	Peak	97.00	100	Vertical	Pass
5**	12330.250	46.87	6.93	54.0	-7.13	AV	161.00	100	Vertical	Pass
5	12330.250	56.68	6.93	74.0	-17.32	Peak	161.00	100	Vertical	Pass
6**	15963.000	47.35	13.63	54.0	-6.65	AV	265.00	100	Vertical	Pass
6	15963.000	57.55	13.63	74.0	-16.45	Peak	265.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n20 ANT H High channel-144

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1466.000	28.82	-16.40	54.0	-25.18	AV	318.00	100	Horizontal	Pass
1	1466.000	39.14	-16.40	74.0	-34.86	Peak	318.00	100	Horizontal	Pass
2**	4082.000	40.45	-0.60	54.0	-13.55	AV	327.00	100	Horizontal	Pass
2	4082.000	51.06	-0.60	74.0	-22.94	Peak	327.00	100	Horizontal	Pass
3**	5722.000	96.55	0.69	--	96.55	AV	112.00	100	Horizontal	N/A
3	5722.000	104.06	0.69	--	-7.94	Peak	112.00	100	Horizontal	N/A
4**	7540.500	43.03	1.96	54.0	-10.97	AV	24.00	100	Horizontal	Pass
4	7540.500	53.12	1.96	74.0	-20.88	Peak	24.00	100	Horizontal	Pass
5**	12577.500	46.18	7.22	54.0	-7.82	AV	93.00	100	Horizontal	Pass
5	12577.500	56.85	7.22	74.0	-17.15	Peak	93.00	100	Horizontal	Pass
6**	15998.437	46.23	12.11	54.0	-7.77	AV	310.00	100	Horizontal	Pass
6	15998.437	56.28	12.11	74.0	-17.72	Peak	310.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n40 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1359.500	28.25	-16.36	54.0	-25.75	AV	0.00	100	Vertical	Pass
1	1359.500	39.72	-16.36	74.0	-34.28	Peak	0.00	100	Vertical	Pass
2**	4178.000	40.59	-0.95	54.0	-13.41	AV	221.00	100	Vertical	Pass
2	4178.000	51.32	-0.95	74.0	-22.68	Peak	221.00	100	Vertical	Pass
3**	5503.000	87.86	0.51	--	87.86	AV	282.00	100	Vertical	N/A
3	5503.000	95.92	0.51	--	-186.08	Peak	282.00	100	Vertical	N/A
4**	7530.438	42.71	1.50	54.0	-11.29	AV	266.00	100	Vertical	Pass
4	7530.438	52.76	1.50	74.0	-21.24	Peak	266.00	100	Vertical	Pass
5**	12328.813	47.44	6.93	54.0	-6.56	AV	276.00	100	Vertical	Pass
5	12328.813	57.56	6.93	74.0	-16.44	Peak	276.00	100	Vertical	Pass
6**	15741.187	46.56	11.39	54.0	-7.44	AV	288.00	100	Vertical	Pass
6	15741.187	55.97	11.39	74.0	-18.03	Peak	288.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n40 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1505.000	27.97	-16.57	54.0	-26.03	AV	120.00	100	Horizontal	Pass
1	1505.000	39.42	-16.57	74.0	-34.58	Peak	120.00	100	Horizontal	Pass
2**	4151.000	40.62	-1.06	54.0	-13.38	AV	97.00	100	Horizontal	Pass
2	4151.000	51.16	-1.06	74.0	-22.84	Peak	97.00	100	Horizontal	Pass
3**	5521.000	92.91	0.20	--	92.91	AV	5.00	100	Horizontal	N/A
3	5521.000	101.27	0.20	--	96.27	Peak	5.00	100	Horizontal	N/A
4**	7526.125	42.65	1.23	54.0	-11.35	AV	234.00	100	Horizontal	Pass
4	7526.125	52.97	1.23	74.0	-21.03	Peak	234.00	100	Horizontal	Pass
5**	12333.125	46.79	6.76	54.0	-7.21	AV	309.00	100	Horizontal	Pass
5	12333.125	57.19	6.76	74.0	-16.81	Peak	309.00	100	Horizontal	Pass
6**	15741.187	46.98	11.39	54.0	-7.02	AV	360.00	100	Horizontal	Pass
6	15741.187	56.15	11.39	74.0	-17.85	Peak	360.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n40 ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1531.000	28.16	-16.42	54.0	-25.84	AV	0.00	100	Vertical	Pass
1	1531.000	39.06	-16.42	74.0	-34.94	Peak	0.00	100	Vertical	Pass
2**	2727.000	34.22	-7.75	54.0	-19.78	AV	156.00	100	Vertical	Pass
2	2727.000	44.67	-7.75	74.0	-29.33	Peak	156.00	100	Vertical	Pass
3**	5586.000	88.77	0.28	--	88.77	AV	282.00	100	Vertical	N/A
3	5586.000	96.61	0.28	--	84.61	Peak	282.00	100	Vertical	N/A
4**	7635.375	41.68	0.07	54.0	-12.32	AV	266.00	100	Vertical	Pass
4	7635.375	52.83	0.07	74.0	-21.17	Peak	266.00	100	Vertical	Pass
5**	12337.438	46.53	6.52	54.0	-7.47	AV	256.00	100	Vertical	Pass
5	12337.438	56.82	6.52	74.0	-17.18	Peak	256.00	100	Vertical	Pass
6**	15745.125	47.25	11.27	54.0	-6.75	AV	288.00	100	Vertical	Pass
6	15745.125	56.03	11.27	74.0	-17.97	Peak	288.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n40 ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1459.500	28.65	-16.29	54.0	-25.35	AV	120.00	100	Horizontal	Pass
1	1459.500	39.10	-16.29	74.0	-34.90	Peak	120.00	100	Horizontal	Pass
2**	2232.000	33.13	-11.21	54.0	-20.87	AV	60	100	Horizontal	Pass
2	2232.000	43.52	-11.21	74.0	-30.48	Peak	60	100	Horizontal	Pass
3**	5596.000	92.55	0.09	--	92.55	AV	5.00	100	Horizontal	N/A
3	5596.000	100.69	0.09	--	88.69	Peak	5.00	100	Horizontal	N/A
4**	7370.875	42.08	0.67	54.0	-11.92	AV	234.00	100	Horizontal	Pass
4	7370.875	53.78	0.67	74.0	-20.22	Peak	234.00	100	Horizontal	Pass
5**	12300.063	46.50	7.27	54.0	-7.50	AV	300.00	100	Horizontal	Pass
5	12300.063	57.34	7.27	74.0	-16.66	Peak	300.00	100	Horizontal	Pass
6**	15931.500	47.50	13.48	54.0	-6.50	AV	360.00	100	Horizontal	Pass
6	15931.500	57.14	13.48	74.0	-16.86	Peak	360.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n40 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1485.500	28.65	-16.35	54.0	-25.35	AV	119.00	100	Vertical	Pass
1	1485.500	39.22	-16.35	74.0	-34.78	Peak	119.00	100	Vertical	Pass
2**	4077.000	40.57	-0.75	54.0	-13.43	AV	2.00	100	Vertical	Pass
2	4077.000	50.80	-0.75	74.0	-23.20	Peak	2.00	100	Vertical	Pass
3**	5664.000	85.81	0.99	--	85.81	AV	290.00	100	Vertical	N/A
3	5664.000	94.03	0.99	--	-195.97	Peak	290.00	100	Vertical	N/A
4**	7544.813	42.77	1.50	54.0	-11.23	AV	140.00	100	Vertical	Pass
4	7544.813	53.04	1.50	74.0	-20.96	Peak	140.00	100	Vertical	Pass
5**	10856.813	45.60	5.19	54.0	-8.40	AV	240.00	100	Vertical	Pass
5	10856.813	57.02	5.19	74.0	-16.98	Peak	240.00	100	Vertical	Pass
6**	15973.500	47.68	13.60	54.0	-6.32	AV	344.00	100	Vertical	Pass
6	15973.500	56.92	13.60	74.0	-17.08	Peak	344.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n40 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1546.500	28.14	-16.42	54.0	-25.86	AV	337.00	100	Horizontal	Pass
1	1546.500	40.58	-16.42	74.0	-33.42	Peak	337.00	100	Horizontal	Pass
2**	4202.000	40.29	-1.99	54.0	-13.71	AV	78.00	100	Horizontal	Pass
2	4202.000	51.40	-1.99	74.0	-22.60	Peak	78.00	100	Horizontal	Pass
3**	5677.000	93.10	1.38	--	93.10	AV	116.00	100	Horizontal	N/A
3	5677.000	100.56	1.38	--	-15.44	Peak	116.00	100	Horizontal	N/A
4**	7547.687	42.19	1.04	54.0	-11.81	AV	112.00	100	Horizontal	Pass
4	7547.687	53.03	1.04	74.0	-20.97	Peak	112.00	100	Horizontal	Pass
5**	12420.813	45.78	5.99	54.0	-8.22	AV	191.00	100	Horizontal	Pass
5	12420.813	57.08	5.99	74.0	-16.92	Peak	191.00	100	Horizontal	Pass
6**	15965.625	47.47	13.62	54.0	-6.53	AV	211.00	100	Horizontal	Pass
6	15965.625	56.60	13.62	74.0	-17.40	Peak	211.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band III 11n40 ANT V High channel-142

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1531.000	28.26	-16.42	54.0	-25.74	AV	145.00	100	Vertical	Pass
1	1531.000	39.00	-16.42	74.0	-35.00	Peak	145.00	100	Vertical	Pass
2**	4155.000	40.18	-1.17	54.0	-13.82	AV	203.00	100	Vertical	Pass
2	4155.000	50.94	-1.17	74.0	-23.06	Peak	203.00	100	Vertical	Pass
3**	5719.000	85.28	0.82	--	85.28	AV	286.00	100	Vertical	N/A
3	5719.000	93.24	0.82	--	-192.76	Peak	286.00	100	Vertical	N/A
4**	7533.313	43.19	1.92	54.0	-10.81	AV	17.00	100	Vertical	Pass
4	7533.313	52.86	1.92	74.0	-21.14	Peak	17.00	100	Vertical	Pass
5**	12328.813	46.96	6.93	54.0	-7.04	AV	65.00	100	Vertical	Pass
5	12328.813	57.18	6.93	74.0	-16.82	Peak	65.00	100	Vertical	Pass
6**	15964.313	47.47	13.63	54.0	-6.53	AV	330.00	100	Vertical	Pass
6	15964.313	56.65	13.63	74.0	-17.35	Peak	330.00	100	Vertical	Pass

1 GHz to 18 GHz, Band III 11n40 ANT H High channel-142

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1553.500	28.05	-16.42	54.0	-25.95	AV	257.00	100	Horizontal	Pass
1	1553.500	38.95	-16.42	74.0	-35.05	Peak	257.00	100	Horizontal	Pass
2**	4078.000	40.95	-0.52	54.0	-13.05	AV	245.00	100	Horizontal	Pass
2	4078.000	51.10	-0.52	74.0	-22.90	Peak	245.00	100	Horizontal	Pass
3**	5712.000	93.08	0.70	--	93.08	AV	113.00	100	Horizontal	N/A
3	5712.000	100.79	0.70	--	-12.21	Peak	113.00	100	Horizontal	N/A
4**	7533.313	42.76	1.92	54.0	-11.24	AV	59.00	100	Horizontal	Pass
4	7533.313	53.80	1.92	74.0	-20.20	Peak	59.00	100	Horizontal	Pass
5**	12328.813	47.03	6.93	54.0	-6.97	AV	0.00	100	Horizontal	Pass
5	12328.813	56.92	6.93	74.0	-17.08	Peak	0.00	100	Horizontal	Pass
6**	15956.437	47.01	13.63	54.0	-6.99	AV	230.00	100	Horizontal	Pass
6	15956.437	56.82	13.63	74.0	-17.18	Peak	230.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11a ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1332.500	28.26	-16.21	54.0	-25.74	AV	325.00	100	Vertical	Pass
1	1332.500	38.62	-16.21	74.0	-35.38	Peak	325.00	100	Vertical	Pass
2**	4090.000	40.74	-0.80	54.0	-13.26	AV	357.00	100	Vertical	Pass
2	4090.000	50.84	-0.80	74.0	-23.16	Peak	357.00	100	Vertical	Pass
3**	5744.000	88.94	1.19	--	88.94	AV	287.00	100	Vertical	N/A
3	5744.000	96.65	1.19	--	-190.35	Peak	287.00	100	Vertical	N/A
4**	7540.500	42.74	1.96	54.0	-11.26	AV	230.00	100	Vertical	Pass
4	7540.500	53.50	1.96	74.0	-20.50	Peak	230.00	100	Vertical	Pass
5**	12501.313	46.50	6.50	54.0	-7.50	AV	230.00	100	Vertical	Pass
5	12501.313	56.99	6.50	74.0	-17.01	Peak	230.00	100	Vertical	Pass
6**	15960.375	47.28	13.64	54.0	-6.72	AV	-1.00	100	Vertical	Pass
6	15960.375	57.12	13.64	74.0	-16.88	Peak	-1.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11a ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1407.000	28.32	-16.32	54.0	-25.68	AV	139.00	100	Horizontal	Pass
1	1407.000	40.03	-16.32	74.0	-33.97	Peak	139.00	100	Horizontal	Pass
2**	2756.000	34.02	-8.54	54.0	-19.98	AV	139.00	100	Horizontal	Pass
2	2756.000	45.52	-8.54	74.0	-28.48	Peak	139.00	100	Horizontal	Pass
3**	5746.000	97.05	1.28	--	97.05	AV	100.00	100	Horizontal	N/A
3	5746.000	104.91	1.28	--	4.91	Peak	100.00	100	Horizontal	N/A
4**	9169.188	44.01	3.09	54.0	-9.99	AV	62.00	100	Horizontal	Pass
4	9169.188	54.78	3.09	74.0	-19.22	Peak	62.00	100	Horizontal	Pass
5**	12256.938	46.17	6.53	54.0	-7.83	AV	134.00	100	Horizontal	Pass
5	12256.938	57.07	6.53	74.0	-16.93	Peak	134.00	100	Horizontal	Pass
6**	15973.500	47.99	13.60	54.0	-6.01	AV	104.00	100	Horizontal	Pass
6	15973.500	57.79	13.60	74.0	-16.21	Peak	104.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11a ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1544.500	28.12	-16.52	54.0	-25.88	AV	293.00	100	Vertical	Pass
1	1544.500	38.66	-16.52	74.0	-35.34	Peak	293.00	100	Vertical	Pass
2**	2765.000	34.54	-8.88	54.0	-19.46	AV	361.00	100	Vertical	Pass
2	2765.000	45.62	-8.88	74.0	-28.38	Peak	361.00	100	Vertical	Pass
3**	5788.000	88.91	1.00	--	88.91	AV	292.00	100	Vertical	N/A
3	5788.000	96.53	1.00	--	-195.47	Peak	292.00	100	Vertical	N/A
4**	8221.875	42.34	2.33	54.0	-11.66	AV	65.00	100	Vertical	Pass
4	8221.875	53.08	2.33	74.0	-20.92	Peak	65.00	100	Vertical	Pass
5**	10852.500	45.97	5.19	54.0	-8.03	AV	42.00	100	Vertical	Pass
5	10852.500	56.37	5.19	74.0	-17.63	Peak	42.00	100	Vertical	Pass
6**	15964.313	47.31	13.63	54.0	-6.69	AV	358.00	100	Vertical	Pass
6	15964.313	56.84	13.63	74.0	-17.16	Peak	358.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11a ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1346.000	28.32	-16.36	54.0	-25.68	AV	151.00	100	Horizontal	Pass
1	1346.000	39.88	-16.36	74.0	-34.12	Peak	151.00	100	Horizontal	Pass
2**	4305.000	40.42	-1.49	54.0	-13.58	AV	17.00	100	Horizontal	Pass
2	4305.000	52.71	-1.49	74.0	-21.29	Peak	17.00	100	Horizontal	Pass
3**	5783.000	97.36	1.18	--	97.36	AV	99.00	100	Horizontal	N/A
3	5783.000	105.51	1.18	--	6.51	Peak	99.00	100	Horizontal	N/A
4**	7533.313	42.88	1.92	54.0	-11.12	AV	293.00	100	Horizontal	Pass
4	7533.313	52.93	1.92	74.0	-21.07	Peak	293.00	100	Horizontal	Pass
5**	10823.750	45.76	5.14	54.0	-8.24	AV	26.00	100	Horizontal	Pass
5	10823.750	56.85	5.14	74.0	-17.15	Peak	26.00	100	Horizontal	Pass
6**	15968.250	47.33	13.61	54.0	-6.67	AV	196.00	100	Horizontal	Pass
6	15968.250	56.52	13.61	74.0	-17.48	Peak	196.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11a ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1485.500	28.46	-16.35	54.0	-25.54	AV	262.00	100	Vertical	Pass
1	1485.500	39.42	-16.35	74.0	-34.58	Peak	262.00	100	Vertical	Pass
2**	4097.000	40.34	-1.37	54.0	-13.66	AV	63.00	100	Vertical	Pass
2	4097.000	51.16	-1.37	74.0	-22.84	Peak	63.00	100	Vertical	Pass
3**	5824.000	89.20	0.98	--	89.20	AV	288.00	100	Vertical	N/A
3	5824.000	97.08	0.98	--	-190.92	Peak	288.00	100	Vertical	N/A
4**	7494.500	42.05	1.05	54.0	-11.95	AV	346.00	100	Vertical	Pass
4	7494.500	53.02	1.05	74.0	-20.98	Peak	346.00	100	Vertical	Pass
5**	12499.875	46.63	6.52	54.0	-7.37	AV	66.00	100	Vertical	Pass
5	12499.875	57.21	6.52	74.0	-16.79	Peak	66.00	100	Vertical	Pass
6**	15738.563	47.73	11.38	54.0	-6.27	AV	317.00	100	Vertical	Pass
6	15738.563	56.42	11.38	74.0	-17.58	Peak	317.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11a ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1552.500	28.15	-16.32	54.0	-25.85	AV	246.00	100	Horizontal	Pass
1	1552.500	38.98	-16.32	74.0	-35.02	Peak	246.00	100	Horizontal	Pass
2**	4092.000	40.49	-1.16	54.0	-13.51	AV	5.00	100	Horizontal	Pass
2	4092.000	51.53	-1.16	74.0	-22.47	Peak	5.00	100	Horizontal	Pass
3**	5827.000	98.21	0.69	--	98.21	AV	109.00	100	Horizontal	N/A
3	5827.000	105.88	0.69	--	-3.12	Peak	109.00	100	Horizontal	N/A
4**	7294.688	43.22	1.71	54.0	-10.78	AV	361.00	100	Horizontal	Pass
4	7294.688	53.38	1.71	74.0	-20.62	Peak	361.00	100	Horizontal	Pass
5**	11221.937	44.09	4.40	54.0	-9.91	AV	326.00	100	Horizontal	Pass
5	11221.937	56.13	4.40	74.0	-17.87	Peak	326.00	100	Horizontal	Pass
6**	15780.563	47.49	11.70	54.0	-6.51	AV	166.00	100	Horizontal	Pass
6	15780.563	56.43	11.70	74.0	-17.57	Peak	166.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11n20 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1579.000	28.28	-16.19	54.0	-25.72	AV	175.00	100	Vertical	Pass
1	1579.000	40.06	-16.19	74.0	-33.94	Peak	175.00	100	Vertical	Pass
2**	4074.000	40.45	-1.11	54.0	-13.55	AV	359.00	100	Vertical	Pass
2	4074.000	50.94	-1.11	74.0	-23.06	Peak	359.00	100	Vertical	Pass
3**	5744.000	88.51	1.19	--	88.51	AV	292.00	100	Vertical	N/A
3	5744.000	95.74	1.19	--	-196.26	Peak	292.00	100	Vertical	N/A
4**	7365.125	42.85	1.14	54.0	-11.15	AV	41.00	100	Vertical	Pass
4	7365.125	53.40	1.14	74.0	-20.60	Peak	41.00	100	Vertical	Pass
5**	11092.563	45.53	6.07	54.0	-8.47	AV	343.00	100	Vertical	Pass
5	11092.563	56.59	6.07	74.0	-17.41	Peak	343.00	100	Vertical	Pass
6**	15968.250	47.40	13.61	54.0	-6.60	AV	-1.00	100	Vertical	Pass
6	15968.250	57.68	13.61	74.0	-16.32	Peak	-1.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11n20 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1544.500	28.06	-16.52	54.0	-25.94	AV	361.00	100	Horizontal	Pass
1	1544.500	38.80	-16.52	74.0	-35.20	Peak	361.00	100	Horizontal	Pass
2**	4139.000	40.35	-1.60	54.0	-13.65	AV	360.00	100	Horizontal	Pass
2	4139.000	51.08	-1.60	74.0	-22.92	Peak	360.00	100	Horizontal	Pass
3**	5744.000	96.73	1.19	--	96.73	AV	101.00	100	Horizontal	N/A
3	5744.000	104.77	1.19	--	3.77	Peak	101.00	100	Horizontal	N/A
4**	7540.500	42.96	1.96	54.0	-11.04	AV	202.00	100	Horizontal	Pass
4	7540.500	52.64	1.96	74.0	-21.36	Peak	202.00	100	Horizontal	Pass
5**	11584.187	45.81	5.63	54.0	-8.19	AV	35.00	100	Horizontal	Pass
5	11584.187	56.39	5.63	74.0	-17.61	Peak	35.00	100	Horizontal	Pass
6**	15974.813	47.60	13.59	54.0	-6.40	AV	299.00	100	Horizontal	Pass
6	15974.813	56.77	13.59	74.0	-17.23	Peak	299.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11n20 ANT V Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1386.000	28.01	-16.34	54.0	-25.99	AV	336.00	100	Vertical	Pass
1	1386.000	39.71	-16.34	74.0	-34.29	Peak	336.00	100	Vertical	Pass
2**	2248.500	32.82	-10.79	54.0	-21.18	AV	84.00	100	Vertical	Pass
2	2248.500	44.25	-10.79	74.0	-29.75	Peak	84.00	100	Vertical	Pass
3**	5783.000	87.86	1.18	--	87.86	AV	318.00	100	Vertical	N/A
3	5783.000	96.06	1.18	--	-221.94	Peak	318.00	100	Vertical	N/A
4**	8341.188	41.95	1.83	54.0	-12.05	AV	361.00	100	Vertical	Pass
4	8341.188	53.50	1.83	74.0	-20.50	Peak	361.00	100	Vertical	Pass
5**	11850.125	46.04	6.10	54.0	-7.96	AV	257.00	100	Vertical	Pass
5	11850.125	56.55	6.10	74.0	-17.45	Peak	257.00	100	Vertical	Pass
6**	15978.750	47.06	13.58	54.0	-6.94	AV	125.00	100	Vertical	Pass
6	15978.750	56.89	13.58	74.0	-17.11	Peak	125.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11n20 ANT H Middle channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1482.500	28.21	-16.52	54.0	-25.79	AV	245.00	100	Horizontal	Pass
1	1482.500	39.23	-16.52	74.0	-34.77	Peak	245.00	100	Horizontal	Pass
2**	4107.000	40.44	-1.05	54.0	-13.56	AV	268.00	100	Horizontal	Pass
2	4107.000	51.33	-1.05	74.0	-22.67	Peak	268.00	100	Horizontal	Pass
3**	5782.000	96.62	1.22	--	96.62	AV	99.00	100	Horizontal	N/A
3	5782.000	104.47	1.22	--	5.47	Peak	99.00	100	Horizontal	N/A
4**	7651.188	41.51	0.63	54.0	-12.49	AV	156.00	100	Horizontal	Pass
4	7651.188	52.77	0.63	74.0	-21.23	Peak	156.00	100	Horizontal	Pass
5**	11083.938	45.43	6.02	54.0	-8.57	AV	201.00	100	Horizontal	Pass
5	11083.938	56.13	6.02	74.0	-17.87	Peak	201.00	100	Horizontal	Pass
6**	15984.000	46.80	13.26	54.0	-7.20	AV	128.00	100	Horizontal	Pass
6	15984.000	55.96	13.26	74.0	-18.04	Peak	128.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11n20 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1466.000	28.29	-16.40	54.0	-25.71	AV	38.00	100	Vertical	Pass
1	1466.000	39.47	-16.40	74.0	-34.53	Peak	38.00	100	Vertical	Pass
2**	4107.000	40.53	-1.05	54.0	-13.47	AV	299.00	100	Vertical	Pass
2	4107.000	50.78	-1.05	74.0	-23.22	Peak	299.00	100	Vertical	Pass
3**	5826.000	88.76	0.80	--	88.76	AV	278.00	100	Vertical	N/A
3	5826.000	96.79	0.80	--	-181.21	Peak	278.00	100	Vertical	N/A
4**	8224.750	42.10	1.92	54.0	-11.90	AV	269.00	100	Vertical	Pass
4	8224.750	53.89	1.92	74.0	-20.11	Peak	269.00	100	Vertical	Pass
5**	12334.562	46.88	6.68	54.0	-7.12	AV	103.00	100	Vertical	Pass
5	12334.562	56.81	6.68	74.0	-17.19	Peak	103.00	100	Vertical	Pass
6**	15970.875	47.88	13.61	54.0	-6.12	AV	178.00	100	Vertical	Pass
6	15970.875	56.29	13.61	74.0	-17.71	Peak	178.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11n20 ANT H High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1489.500	28.03	-16.43	54.0	-25.97	AV	33.00	100	Horizontal	Pass
1	1489.500	39.42	-16.43	74.0	-34.58	Peak	33.00	100	Horizontal	Pass
2**	4076.000	40.38	-0.99	54.0	-13.62	AV	15.00	100	Horizontal	Pass
2	4076.000	51.22	-0.99	74.0	-22.78	Peak	15.00	100	Horizontal	Pass
3**	5826.000	97.27	0.80	--	97.27	AV	98.00	100	Horizontal	N/A
3	5826.000	105.35	0.80	--	7.35	Peak	98.00	100	Horizontal	N/A
4**	8138.500	42.06	1.88	54.0	-11.94	AV	316.00	100	Horizontal	Pass
4	8138.500	53.19	1.88	74.0	-20.81	Peak	316.00	100	Horizontal	Pass
5**	12354.688	46.41	5.96	54.0	-7.59	AV	293.00	100	Horizontal	Pass
5	12354.688	56.96	5.96	74.0	-17.04	Peak	293.00	100	Horizontal	Pass
6**	15973.500	47.66	13.60	54.0	-6.34	AV	204.00	100	Horizontal	Pass
6	15973.500	56.88	13.60	74.0	-17.12	Peak	204.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11n40 ANT V Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1499.000	27.96	-16.47	54.0	-26.04	AV	58.00	100	Vertical	Pass
1	1499.000	39.07	-16.47	74.0	-34.93	Peak	58.00	100	Vertical	Pass
2**	4150.000	41.16	-1.09	54.0	-12.84	AV	322.00	100	Vertical	Pass
2	4150.000	52.19	-1.09	74.0	-21.81	Peak	322.00	100	Vertical	Pass
3**	5760.000	87.03	1.79	--	87.03	AV	322.00	100	Vertical	N/A
3	5760.000	93.94	1.79	--	-228.06	Peak	322.00	100	Vertical	N/A
4**	7602.313	41.41	0.01	54.0	-12.59	AV	355.00	100	Vertical	Pass
4	7602.313	52.81	0.01	74.0	-21.19	Peak	355.00	100	Vertical	Pass
5**	11857.313	45.34	5.87	54.0	-8.66	AV	232.00	100	Vertical	Pass
5	11857.313	57.06	5.87	74.0	-16.94	Peak	232.00	100	Vertical	Pass
6**	15734.625	47.20	11.26	54.0	-6.80	AV	360.00	100	Vertical	Pass
6	15734.625	56.76	11.26	74.0	-17.24	Peak	360.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11n40 ANT H Low channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1353.500	28.50	-16.40	54.0	-25.50	AV	286.00	100	Horizontal	Pass
1	1353.500	38.90	-16.40	74.0	-35.10	Peak	286.00	100	Horizontal	Pass
2**	4080.000	40.79	-0.73	54.0	-13.21	AV	223.00	100	Horizontal	Pass
2	4080.000	51.56	-0.73	74.0	-22.44	Peak	223.00	100	Horizontal	Pass
3**	5762.000	94.79	1.78	--	94.79	AV	112.00	100	Horizontal	N/A
3	5762.000	102.23	1.78	--	-9.77	Peak	112.00	100	Horizontal	N/A
4**	7544.813	43.08	1.50	54.0	-10.92	AV	295.00	100	Horizontal	Pass
4	7544.813	53.22	1.50	74.0	-20.78	Peak	295.00	100	Horizontal	Pass
5**	12357.562	47.02	5.99	54.0	-6.98	AV	274.00	100	Horizontal	Pass
5	12357.562	57.39	5.99	74.0	-16.61	Peak	274.00	100	Horizontal	Pass
6**	15734.625	46.93	11.26	54.0	-7.07	AV	325.00	100	Horizontal	Pass
6	15734.625	56.03	11.26	74.0	-17.97	Peak	325.00	100	Horizontal	Pass

1 GHz to 18 GHz, Band IV 11n40 ANT V High channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1508.000	28.22	-16.56	54.0	-25.78	AV	113.00	100	Vertical	Pass
1	1508.000	40.45	-16.56	74.0	-33.55	Peak	113.00	100	Vertical	Pass
2**	4288.000	40.63	-1.08	54.0	-13.37	AV	322.00	100	Vertical	Pass
2	4288.000	51.39	-1.08	74.0	-22.61	Peak	322.00	100	Vertical	Pass
3**	5798.000	85.35	0.67	--	85.35	AV	322.00	100	Vertical	N/A
3	5798.000	93.22	0.67	--	-228.78	Peak	322.00	100	Vertical	N/A
4**	7357.938	42.91	0.62	54.0	-11.09	AV	39.00	100	Vertical	Pass
4	7357.938	53.05	0.62	74.0	-20.95	Peak	39.00	100	Vertical	Pass
5**	11850.125	46.13	6.10	54.0	-7.87	AV	39.00	100	Vertical	Pass
5	11850.125	56.03	6.10	74.0	-17.97	Peak	39.00	100	Vertical	Pass
6**	15940.688	46.71	13.58	54.0	-7.29	AV	106.00	100	Vertical	Pass
6	15940.688	56.70	13.58	74.0	-17.30	Peak	106.00	100	Vertical	Pass

1 GHz to 18 GHz, Band IV 11n40 ANT H High channel


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1465.500	28.79	-16.43	54.0	-25.21	AV	1.00	100	Horizontal	Pass
1	1465.500	39.07	-16.43	74.0	-34.93	Peak	1.00	100	Horizontal	Pass
2**	4161.000	40.56	-0.82	54.0	-13.44	AV	-1.00	100	Horizontal	Pass
2	4161.000	51.73	-0.82	74.0	-22.27	Peak	-1.00	100	Horizontal	Pass
3**	5800.000	94.01	0.68	--	94.01	AV	95.00	100	Horizontal	N/A
3	5800.000	101.95	0.68	--	6.95	Peak	95.00	100	Horizontal	N/A
4**	7546.250	42.63	1.40	54.0	-11.37	AV	57.00	100	Horizontal	Pass
4	7546.250	53.08	1.40	74.0	-20.92	Peak	57.00	100	Horizontal	Pass
5**	12343.187	46.90	6.23	54.0	-7.10	AV	259.00	100	Horizontal	Pass
5	12343.187	57.31	6.23	74.0	-16.69	Peak	259.00	100	Horizontal	Pass
6**	15973.500	47.49	13.60	54.0	-6.51	AV	273.00	100	Horizontal	Pass
6	15973.500	58.04	13.60	74.0	-15.96	Peak	273.00	100	Horizontal	Pass

A.6.2 Band Edge (Restricted-band)


Test Band	Mode	Channel	Verdict
Band I	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
Band II	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
Band III	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
Band IV	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass

Test Plots


Band I 11a CH36 Peak

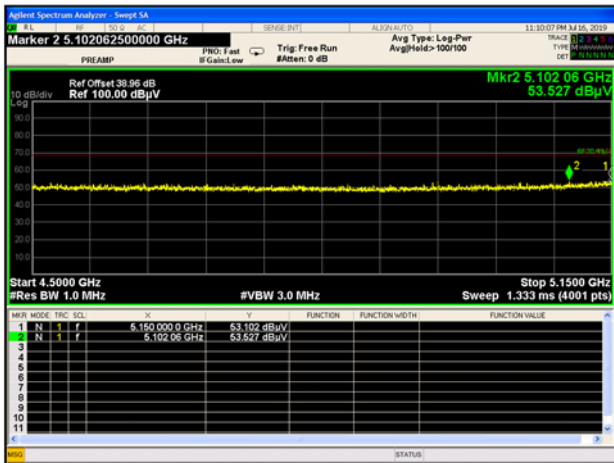


Band I 11a CH48 Peak

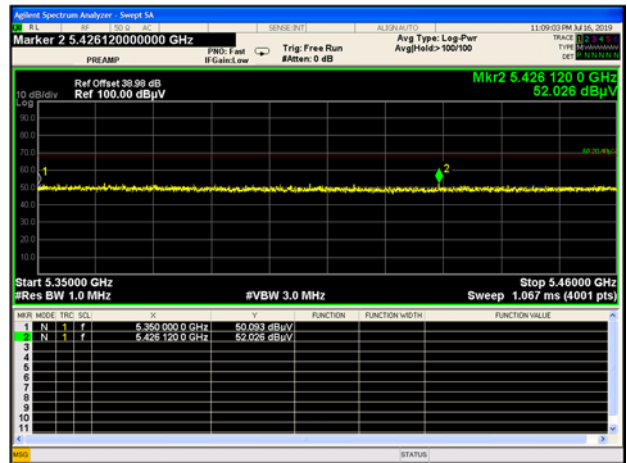


Band I 11n20 CH36 Peak

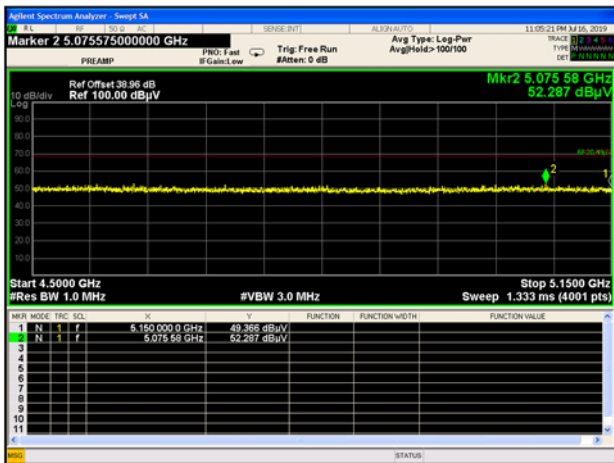


Band I 11n20 CH48 Peak

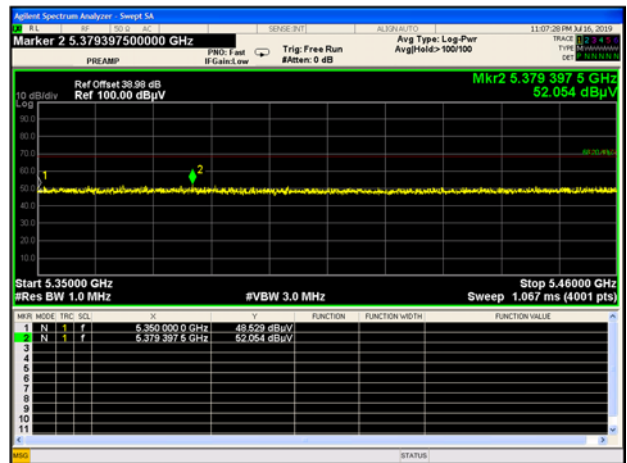


Band I 11n40 CH38 Peak

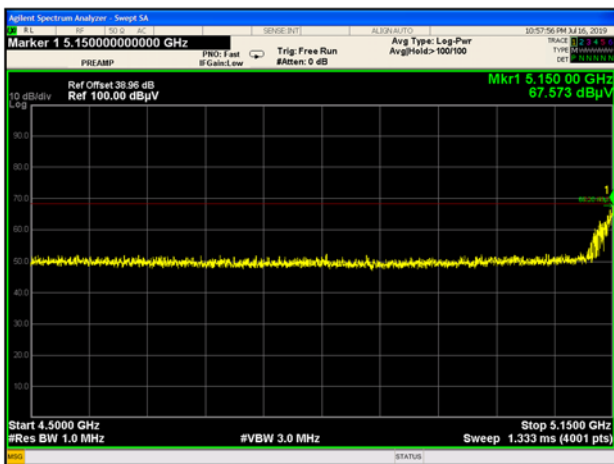

Band I 11n40 CH38 AV

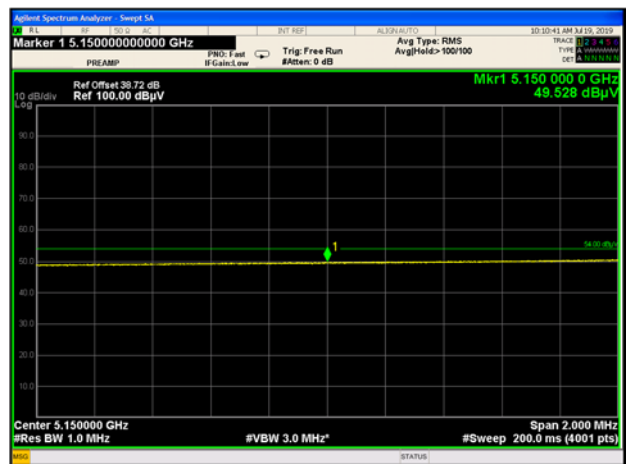


Band I 11n40 CH46 Peak

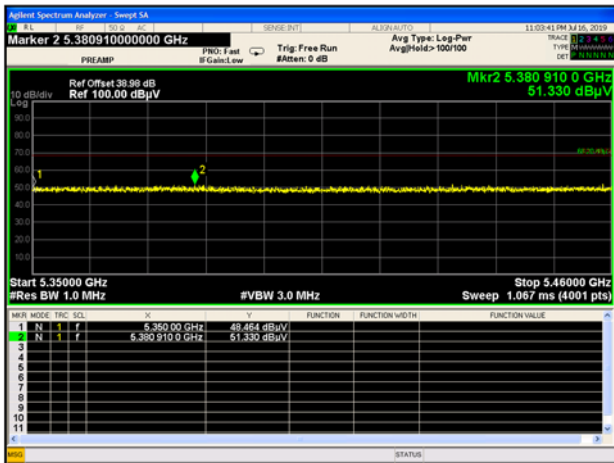


Band II 11a CH52 Peak




Band II 11a CH64 Peak

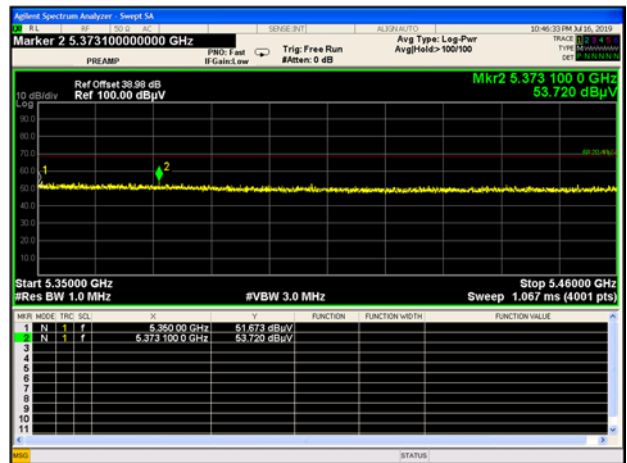


Band II 11n20 CH52 Peak

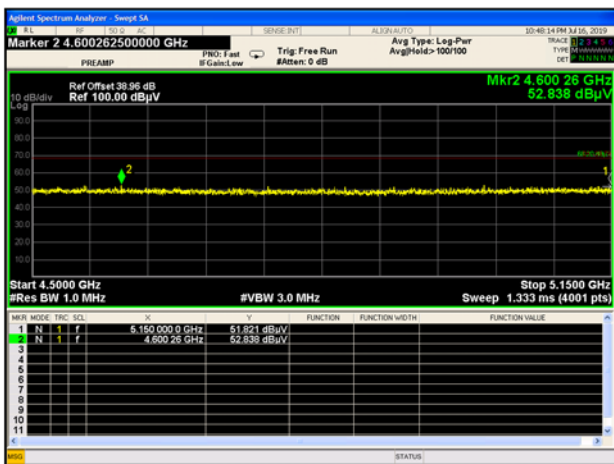


Band II 11n20 CH64 Peak

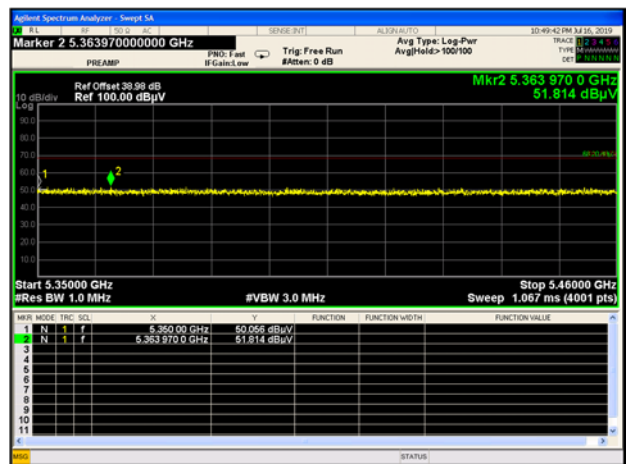


Band II 11n40 CH54 Peak

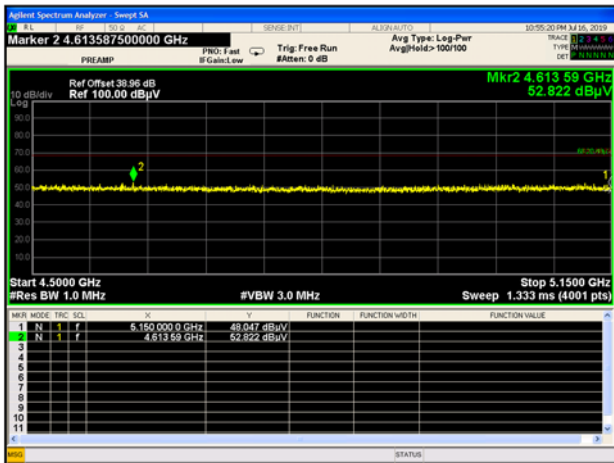


Band II 11n40 CH62 Peak

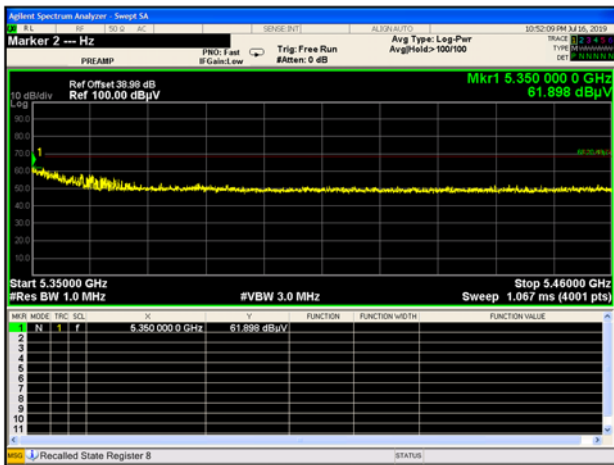


Band II 11n40 CH62 AV

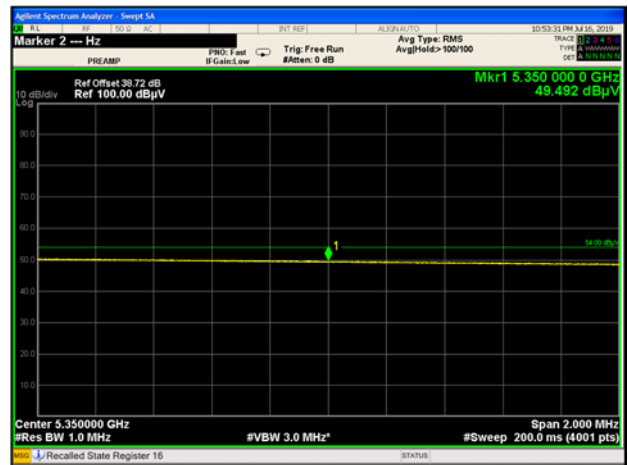


Band III 11a CH100 Peak

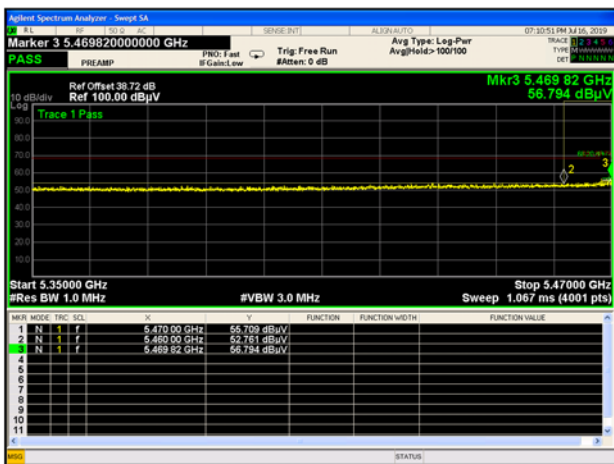


Band III 11a CH140 Peak

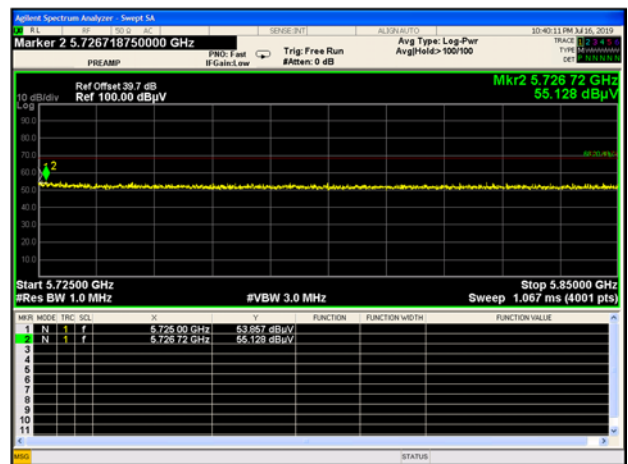


Band III 11a CH144 Peak

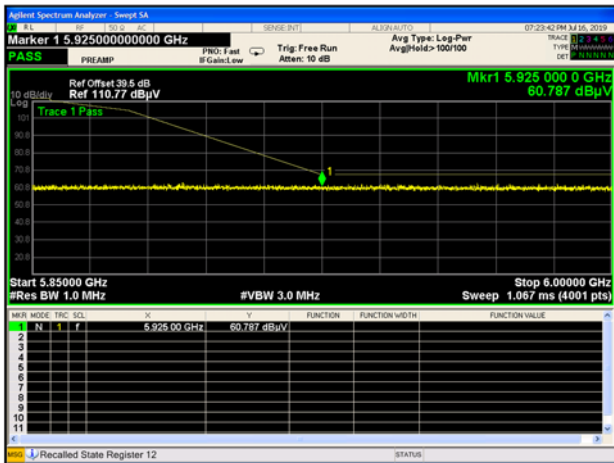

Band III 11n20 CH100 Peak

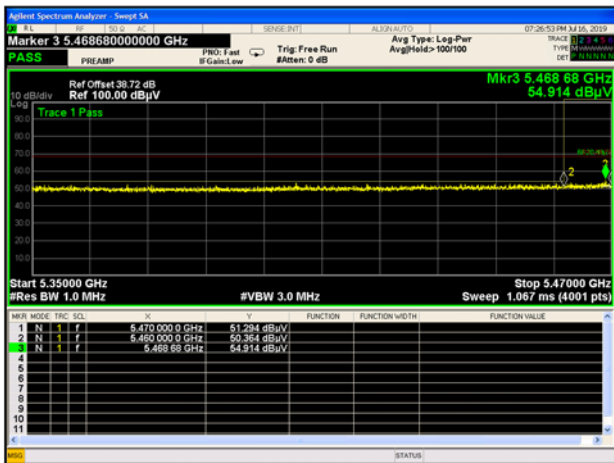


Band III 11n20 CH140 Peak

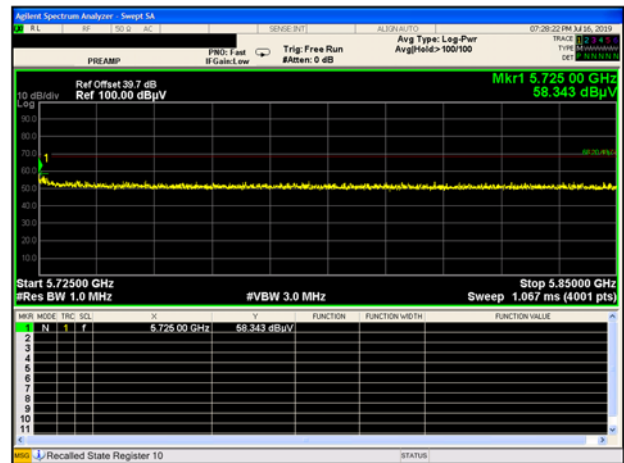


Band III 11n20 CH144 Peak




Band III 11n40 CH102 Peak

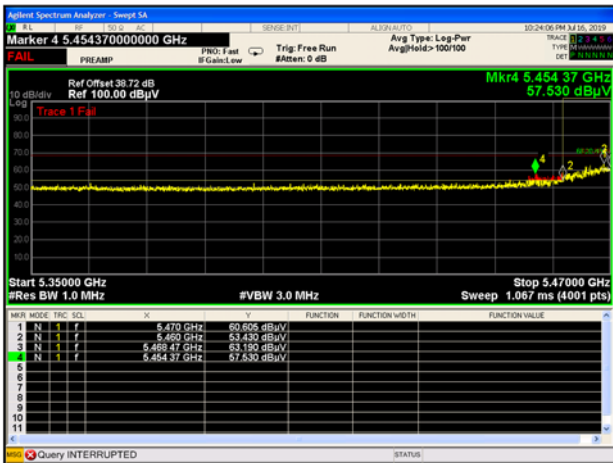

Band III 11n40 CH102 AV

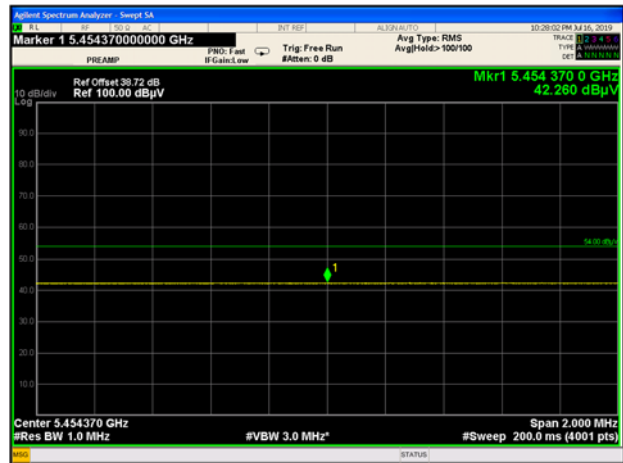

Band III 11n40 CH142 Peak

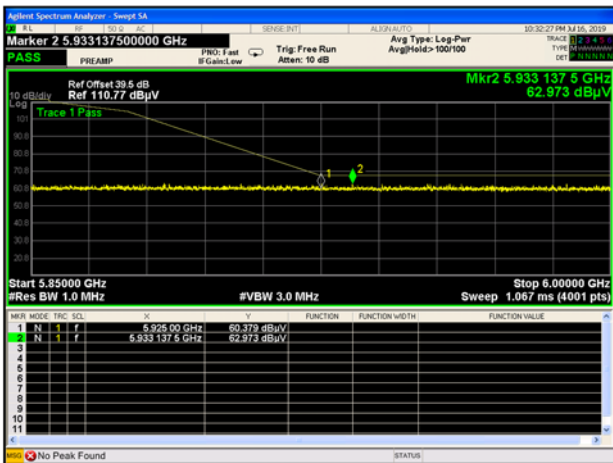


Band IV 11a CH149 Peak




Band IV 11a CH165 Peak




Band IV 11n20 CH149 Peak

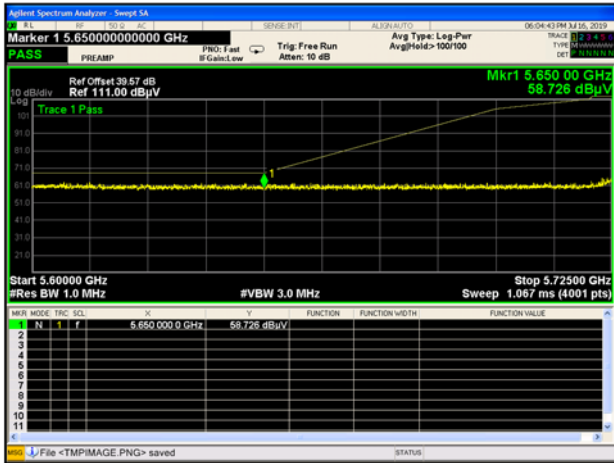


Band IV 11n20 CH165 Peak

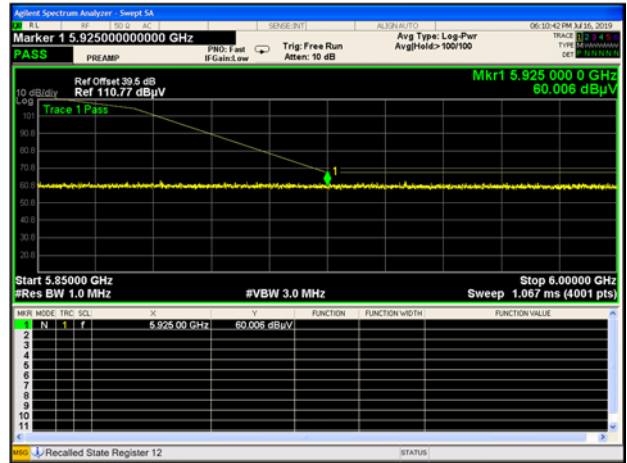

Band IV 11n40 CH151 Peak

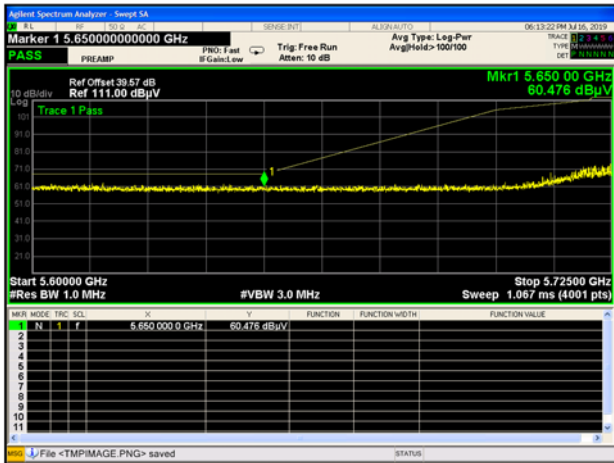

Band IV 11n40 CH159 Peak

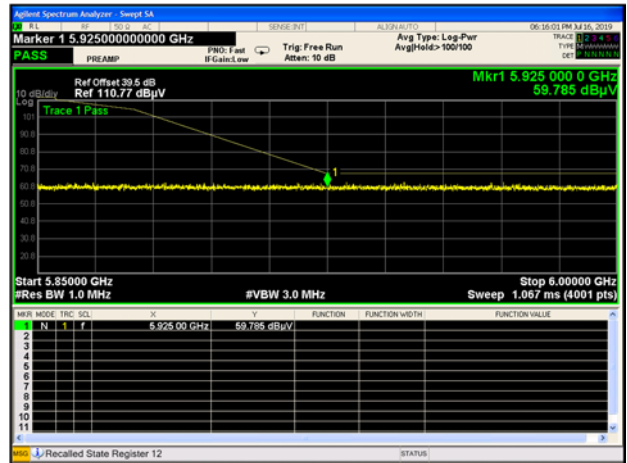

A.7 Frequency Stability

Voltage vs. Frequency Stability (5180 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
TEMP. (°C)	Voltage (VDC)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
20	4	5180	5180.007474	1.44	5180.008042	1.55	5180.007911	1.53	5180.008141	1.57
	3.8	5180	5180.008351	1.61	5180.008288	1.60	5180.007744	1.49	5180.007858	1.52
	3.3	5180	5180.007945	1.53	5180.007809	1.51	5180.008047	1.55	5180.008294	1.60

Temperature vs. Frequency Stability (5180 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
Voltage (VDC)	TEMP. (°C)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
3.8	-30	5180	5180.007515	1.45	5180.007619	1.47	5180.008051	1.55	5180.008321	1.61
	-20	5180	5180.007569	1.46	5180.008169	1.58	5180.007841	1.51	5180.007483	1.44
	-10	5180	5180.008394	1.62	5180.008202	1.58	5180.008238	1.59	5180.008191	1.58
	0	5180	5180.007801	1.51	5180.007656	1.48	5180.007982	1.54	5180.008469	1.63
	10	5180	5180.008177	1.58	5180.008039	1.55	5180.008087	1.56	5180.007901	1.53
	20	5180	5180.007699	1.49	5180.008129	1.57	5180.007918	1.53	5180.007603	1.47
	30	5180	5180.007910	1.53	5180.007883	1.52	5180.007900	1.53	5180.008442	1.63
	40	5180	5180.007613	1.47	5180.008601	1.55	5180.007661	1.48	5180.008102	1.58
	50	5180	5180.007986	1.54	5180.007823	1.51	5180.007987	1.54	5180.008158	1.57

Voltage vs. Frequency Stability (5825 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
TEMP. (°C)	Voltage (VDC)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
20	4	5825	5825.008374	1.44	5825.009093	1.56	5825.008694	1.49	5825.008888	1.53
	3.8	5825	5825.009219	1.58	5825.008556	1.47	5825.009295	1.60	5825.008581	1.47
	3.3	5825	5825.008711	1.50	5825.009346	1.60	5825.009347	1.60	5825.009302	1.60

Temperature vs. Frequency Stability (5825 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
Voltage (VDC)	TEMP. (°C)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
3.8	-30	5825	5825.008621	1.48	5825.008701	1.49	5825.009043	1.55	5825.009005	1.55
	-20	5825	5825.008652	1.48	5825.008977	1.54	5825.008789	1.51	5825.009495	1.52
	-10	5825	5825.008508	1.46	5825.008563	1.47	5825.008966	1.54	5825.008997	1.54
	0	5825	5825.009347	1.60	5825.009234	1.59	5825.009038	1.55	5825.009013	1.55
	10	5825	5825.009172	1.57	5825.009085	1.56	5825.008581	1.47	5825.009215	1.58
	20	5825	5825.009183	1.58	5825.009269	1.59	5825.008934	1.53	5825.008576	1.47
	30	5825	5825.008417	1.45	5825.009239	1.59	5825.008963	1.54	5825.009206	1.58
	40	5825	5825.008891	1.53	5825.008708	1.49	5825.009154	1.57	5825.008568	1.47
	50	5825	5825.009291	1.60	5825.008945	1.54	5825.008479	1.46	5825.008758	1.50

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1970029-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1970029-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1970029-AI.PDF".

--END OF REPORT--