


Test report No:
2360091R-RF-US-P09V01

FCC & ISED TEST REPORT

Product Name	VR All-In-One Headset
Trademark	
Model and /or type reference	HMD Model:A7H10
FCC ID	2ATRW-A7H10-1
IC	25707-A7H10-1
Applicant's name / address	Qingdao Pico Technology Co., Ltd. 4 Floor, 3 Building, No. 393 Songling Road, Laoshan District, Qingdao, China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407 ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01 RSS-Gen Issue 5 /RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Tested By (name / position & signature)	Tim Cao/Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2023-07-05
Report Version	V1.0
Report template No	Template_FCC Part15E-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations	6
Document History	7
Remarks and Comments	7
Used Equipment	8
Uncertainty	12
1 General Information	13
1.1 General Description of the Item(s)	13
1.2 Antenna Information	14
1.3 Channel List	15
1.4 802.11ax RU configurations:	16
1.5 Power vs Data Rate	17
2 Description of Test Setup	23
2.1 Operating mode(s) used for tests	23
2.2 Accessories Information	24
2.3 Auxiliary equipment / Test software for the EUT	24
2.4 Test Configuration / Block diagram used for tests	25
2.5 Testing process	26
3 Verdict summary section	27
3.1 Standards	27
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	27
3.3 Overview of results	28
3.4 Test Facility	30
4 Test Results	31
4.1 AC Power Line Conducted Emission	31
4.1.1 Limit	31
4.1.2 Test Setup	31
4.1.3 Test Procedure	31
4.1.4 Test Data	32
4.2 Radiated Emissions	34
4.2.1 Limit	34
4.2.2 Test Setup	36

4.2.3 Test Procedure	37
4.2.4 Test Data	38
4.3 Emission bandwidth.....	206
4.3.1 Limit	206
4.3.2 Test Setup	206
4.3.3 Test Procedure	206
4.3.4 Test Data	207
4.4 6dB bandwidth	210
4.4.1 Limit	210
4.4.2 Test Setup	210
4.4.3 Test Procedure	210
4.4.4 Test Data	211
4.5 Duty cycle	213
4.5.1 Limit	213
4.5.2 Test Setup	213
4.5.3 Test Procedure	213
4.5.4 Test Data	214
4.6 Power Output.....	216
4.6.1 Limit	216
4.6.2 Test Setup	217
4.6.3 Test Procedure	217
4.6.4 Test Data	219
4.7 Peak Power Spectral Density	227
4.7.1 Limit:	227
4.7.2 Test Setup	227
4.7.3 Test Procedure	228
4.7.4 Test Data	229
4.8 Radiated Emission Band Edge	237
4.8.1 Limit	237
4.8.2 Test Setup	237
4.8.3 Test Procedure	238
4.8.4 Test Data	239
4.9 Frequency Stability	387
4.9.1 Limit:	387
4.9.2 Test Setup	387
4.9.3 Test Procedure	387
4.9.4 Test Data	388

4.10	Antenna Requirement.....	390
4.10.1	Limit:	390
4.10.2	Antenna Connector Construction:	390
4.11	Test setup photo and EUT Photo	391

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China	
Date(receive sample)	May. 24, 2021	Jun. 05, 2023
Date (start test)	May. 24, 2021	Jun. 09, 2023
Date (finish test)	July. 27, 2021	Jun. 30, 2023

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2150775R-RF-US-P09V01	V1.0	Initial issue of report.	2023-07-05

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart E Paragraph 15.407.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 802.11ax RU configurations;
 - Chapter 1.5 Data Rate;
8. This report is based on the DEKRA report (report number: 2150775R-RF-US-P09V01), and only increases the output power of some modes and channels, and updates the data of all affected test items. See original report for other test data.

USED EQUIPMENT

May. 24, 2021~ July. 27, 2021:

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2021.04.28	2022.04.27
Two-Line V-Network	R&S	ENV216	101044	2021.03.20	2022.03.19
50ohm Termination	SHX	TF2	7081402	2020.09.23	2021.09.22
50ohm Termination	SHX	TF2	7081403	2020.09.23	2021.09.22
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2020.08.23	2021.08.22
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density/Band Edge/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2020.08.15	2021.08.14
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2020.08.15	2021.08.14
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2021.02.11	2022.02.10
Coaxial Cable	Woken	SFL402	F02-150410-044	2021.01.01	2021.12.31
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2020.08.13	2021.08.12

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100176	2020.08.15	2021.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2021.03.04	2022.03.03
Bilog Antenna	Teseq GmbH	CBL6112D	27613	2020.08.19	2021.08.18
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2021.03.31	2022.03.30
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2020.08.13	2021.08.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission(1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
Amplifier	Keleto	LNPA	SK20190225	2020.09.25	2021.09.24
Preamplifier	EMCI	EMC184045SE	980263	2021.05.24	2022.05.23
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2020.08.06	2021.08.05
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2021.04.14	2023.04.13
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2021.03.31	2022.03.30
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G	2021.03.20	2022.03.19
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2020.08.13	2021.08.12
Dekra test software	Dekra	-	-	-	-

Jun. 09, 2023~ Jun. 30, 2023:

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2022.09.04	2023.09.03
Two-Line V-Network	R&S	ENV216	101189	2022.07.01	2023.06.30
Two-Line V-Network	R&S	ENV216	101044	2023.01.07	2024.01.06
Artificial Mains Network	SCHWARZBECK	NNLK 8129	8129-294	2022.11.27	2023.11.26
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2023.03.07	2024.03.06
Impedance Stabilization Network	Teseq GmbH	ISN T8-Cat6	29680	2023.03.07	2024.03.06
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Coaxial Cable	Suhner	RG 223	TR1-C1	2023.05.14	2024.05.13
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2022.07.07	2023.07.06

Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2023.05.20	2024.05.19
Coaxial Cable	N/A	N/A	2187	2023.05.26	2024.05.25
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2022.07.13	2023.07.12
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2022.07.07	2023.07.06
Test system					
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2023.02.25	2024.02.24
MAX Signal Analyzer	Keysight	N9020B	MY59050482	2022.09.17	2023.09.16
Switch Box	Keysight	X8749A	N/A	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2022.07.13	2023.07.12
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2022.07.14	2023.07.13
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2022.07.14	2023.07.13
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2022.09.28	2023.09.27

Radiated Emission(9kHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.07.10	2023.07.09
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2022.08.28	2023.08.27
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2023.05.21	2024.05.20
Loop Antenna	R&S	HFH2-Z2E	101149	2023.04.25	2024.04.24
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2022.07.07	2023.07.06

Radiated Emission (1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MXA Signal Analyzer	Keysight	N9020B	MY60112218	2022.12.08	2023.12.07
Preamplifier	SKET	LNPA_0118G-45	SK2021041201	2023.05.14	2024.05.13
DRG Horn	ETS-Lindgren	3117	00123988	2022.08.29	2023.08.28
Pre-Amplifier	Schwarzbeck	BBV 9721	9721-024	2022.12.08	2023.12.07
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	01249	2022.09.22	2023.09.21
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2023.03.04	2024.03.03
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2023.03.04	2024.03.03
Notch Filter	Micro-mve	MFN-2400.2485.S1	AN0003N	2022.07.18	2023.07.17

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
AC Power Line Conducted Emission	± 2.92 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.60 dB 200MHz~1GHz: 4.10 dB Vertical: 30MHz~200MHz: 4.80 dB 200MHz~1GHz: 4.10 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~40GHz: 4.70 dB Vertical: 18GHz~40GHz: 4.60 dB
RF Antenna Port Conducted Emission	± 1.13 dB
Radiated Emission Band Edge	± 5.00 dB
Occupied Bandwidth	± 279 Hz
Power Spectral Density	± 1.13 dB
Frequency Stability	± 100 Hz
AC Power Line Conducted Emission	± 2.02 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	VR All-In-One Headset
Model No.	HMD Model:A7H10
Hardware Version.	R4
Software Version.	5.9.0.0
Firmware Version.	5.9.0.0
FCC ID	2ATRW-A7H10-1
IC	25707-A7H10-1
Manufacturer	Qingdao Pico Technology Co., Ltd.
Manufacturer address	4 Floor, 3 Building, No. 393 Songling Road, Laoshan District, Qingdao, China

Wireless specification.....	Wi-Fi								
Type of Modulation.....	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM								
Frequency Range	<table border="1"> <tr> <td>☐</td><td>Outdoor AP</td></tr> <tr> <td>☐</td><td>Indoor AP</td></tr> <tr> <td>☐</td><td>Fixed point-to-point AP</td></tr> <tr> <td>☒</td><td>Mobile and Portable Client</td></tr> </table>	☐	Outdoor AP	☐	Indoor AP	☐	Fixed point-to-point AP	☒	Mobile and Portable Client
☐	Outdoor AP								
☐	Indoor AP								
☐	Fixed point-to-point AP								
☒	Mobile and Portable Client								
	<table border="1"> <tr> <td>☒</td><td>5150MHz~5250MHz</td></tr> <tr> <td>☒</td><td>5250MHz~5350MHz</td></tr> <tr> <td>☒</td><td>5470MHz~5725MHz</td></tr> <tr> <td>☒</td><td>5725MHz~5850MHz</td></tr> </table>	☒	5150MHz~5250MHz	☒	5250MHz~5350MHz	☒	5470MHz~5725MHz	☒	5725MHz~5850MHz
☒	5150MHz~5250MHz								
☒	5250MHz~5350MHz								
☒	5470MHz~5725MHz								
☒	5725MHz~5850MHz								
	<table border="1"> <tr> <td>☒</td><td>With TDWR Channels</td></tr> <tr> <td>☐</td><td>Without TDWR Channels</td></tr> </table>	☒	With TDWR Channels	☐	Without TDWR Channels				
☒	With TDWR Channels								
☐	Without TDWR Channels								
Date Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps								
	802.11n: up to 600 Mbps								
	802.11ac: up to 1.7 Gbps								
	802.11ax: up to 2.4 Gbps								

Rated power supply	Voltage and Frequency
	☐ AC: 220 – 240 V, 50/60 Hz
	☐ AC: 100 – 240 V, 50/60 Hz
	☐ DC: 3.85 Vdc
	☒ Battery: ...3.85Vdc...
	Adapter: ☒ Input: 100-240V,50/60Hz,0.5A Output:5V.3A/9V,2A/12V,1.5A
Mounting position	☐ Table top equipment
	☐ Wall/Ceiling mounted equipment
	☐ Floor standing equipment
	☒ Head-mounted equipment
	☐ Other:

1.2 Antenna Information

Antenna model / type number	N/A			
Antenna serial number	N/A			
Antenna Delivery	☐	1TX + 1RX		
	☒	2TX + 2RX		
	☐	Others:.....		
Antenna technology	☒	SISO		
	☒	MIMO	☒	CDD
			☐	Beam-forming
Antenna Type	☐	External	☐	Dipole
			☐	Sectorized
	☒	Internal	☒	FPC
			☐	PCB
			☐	Metal Monopole Antenna
			☐	Ceramic chip
			☐	Others.....
Antenna Gain #1	5150-5350: 3.67dBi 5470-5725: 3.43dBi 5725-5850: 5.94dBi			
Antenna Gain #2	5150-5350: 4.22dBi 5470-5725: 3.89dBi 5725-5850: 3.69dBi			
Directional Gain	For Power: 5150-5350: 4.22dBi 5470-5725: 3.89dBi 5725-5850: 5.94dBi For PSD 5150-5350: 7.23dBi 5470-5725: 6.90dBi 5725-5850: 8.95dBi			

1.3 Channel List

802.11a/n/ac/ax(20MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz	48	5240 MHz
52	5260 MHz	56	5280 MHz	60	5300 MHz	64	5320 MHz
100	5500 MHz	104	5520 MHz	108	5540 MHz	112	5550 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz	N/A	N/A
149	5745 MHz	153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	N/A	N/A	N/A	N/A	N/A	N/A
802.11n/ac/ax(40MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz	62	5310 MHz
102	5510 MHz	110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	151	5755 MHz	159	5795 MHz	N/A	N/A
802.11ac/ax(80MHz) Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530MHz	122	5610 MHz
138	5690 MHz	155	5775 MHz	N/A	N/A	N/A	N/A

1.4 802.11ax RU configurations:

Bandwidth	RU all configurations
20MHz	Diagram illustrating the RU configurations for 20MHz bandwidth. The configurations are shown as trapezoidal blocks representing frequency slots. The first row shows 12 slots of 26 tones each, with 1 pilot tone and 3 DC tones. The second row shows 6 slots of 52 tones each, with 1 pilot tone and 3 DC tones. The third row shows 2 slots of 102+4 pilots each, with 1 pilot tone and 3 DC tones. The total configuration is 242 + 3 DC.
40MHz	Diagram illustrating the RU configurations for 40MHz bandwidth. The configurations are shown as trapezoidal blocks representing frequency slots. The first row shows 24 slots of 26 tones each, with 2 pilot tones and 5 DC tones. The second row shows 12 slots of 52 tones each, with 2 pilot tones and 5 DC tones. The third row shows 4 slots of 102+4 pilots each, with 2 pilot tones and 5 DC tones. The total configuration is 242 + 3 DC.
80MHz	Diagram illustrating the RU configurations for 80MHz bandwidth. The configurations are shown as trapezoidal blocks representing frequency slots. The first row shows 48 slots of 26 tones each, with 4 pilot tones and 5 DC tones. The second row shows 24 slots of 52 tones each, with 4 pilot tones and 5 DC tones. The third row shows 8 slots of 102+4 pilots each, with 4 pilot tones and 5 DC tones. The total configuration is 996 usable tones + 5 DC.

Note 1: For partial RU, the value of Determine $\delta = \text{PSD}_{\text{par}} - \text{PSD}_{\text{full}} \leq 0$, so band edge only shown worst data in each band.

1.5 Power vs Data Rate

MCS Index for 802.11n	Spatial Streams	Data Rate (Mbps)						
		802.11b	802.11g	802.11a	20MHz Bandwidth		40MHz Bandwidth	
					800ns GI	400ns GI	800ns GI	400ns GI
0	1	---	---	6	6.5	7.2	13.5	15.0
1	1	---	---	9	13.0	14.4	27.0	30.0
2	1	---	---	12	19.5	21.7	40.5	45.0
3	1	---	---	18	26.0	28.9	54.0	60.0
4	1	---	---	24	39.0	43.3	81.0	90.0
5	1	---	---	36	52.0	57.8	108.0	120.0
6	1	---	---	48	58.5	65.0	121.5	135.0
7	1	---	---	54	65.0	72.2	135.0	150.0
8	2	---	---	---	13.0	14.4	27.0	30.0
9	2	---	---	---	26.0	28.9	54.0	60.0
10	2	---	---	---	39.0	43.3	81.0	90.0
11	2	---	---	---	52.0	57.8	108.0	120.0
12	2	---	---	---	78.0	86.7	162.0	180.0
13	2	---	---	---	104.0	115.6	216.0	240.0
14	2	---	---	---	117.0	130.0	243.0	270.0
15	2	---	---	---	130.0	144.0	270.0	300.0

Note1: The blue form is the maximum power data rate.

2: The EUT supports 2 spatial streams.

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)					
				20MHz		40MHz		80MHz	
				Guard Interval		Guard Interval		Guard Interval	
				1600ns	800ns	1600ns	800ns	1600ns	800ns
1	0	BPSK	1/2	6.5	7.2	13.5	15	29.3	32.5
	1	QPSK	1/2	13	14.4	27	30	58.5	65
	2	QPSK	3/4	19.5	21.7	40.5	45	87.8	97.5
	3	16-QAM	1/2	26	28.9	54	60	117	130
	4	16-QAM	3/4	39	43.3	81	90	175.5	195
	5	64-QAM	2/3	52	57.8	108	120	234	260
	6	64-QAM	3/4	58.5	65	121.5	135	263.3	292.5
	7	64-QAM	5/6	65	72.2	135	150	292.5	325
	8	256-QAM	3/4	78	86.7	162	180	351	390
	9	256-QAM	5/6	N/A	N/A	180	200	390	433.3
2	10	BPSK	1/2	13	14.4	27	30	58.6	65
	11	QPSK	1/2	26	28.8	54	60	117	130
	12	QPSK	3/4	39	43.4	81	90	175.6	195
	13	16-QAM	1/2	52	57.8	108	120	234	260
	14	16-QAM	3/4	78	86.6	162	180	351	390
	15	64-QAM	2/3	104	115.6	216	240	468	520
	16	64-QAM	3/4	117	130	243	270	526.6	585
	17	64-QAM	5/6	130	144.4	270	300	585	650
	18	256-QAM	3/4	156	173.4	324	360	702	780
	19	256-QAM	5/6	N/A	N/A	360	400	780	866.6

Note 1: The blue form is the maximum power data rate.
 2: The EUT supports 2 spatial streams.

Spatial Streams (Note1)	MCS Index	Modulation type	Coding rate	Data Rate(Mb/s)					
				20MHz		40MHz		80MHz	
				Guard Interval		Guard Interval		Guard Interval	
				1600 ns GI	800 ns GI	1600 ns GI	800 ns GI	1600 ns GI	800 ns GI
1	0	BPSK	1/2	4	4	8	9	17	18
	1	QPSK	1/2	16	17	33	34	68	72
	2	QPSK	3/4	24	26	49	52	102	108
	3	16-QAM	1/2	33	34	65	69	136	144
	4	16-QAM	3/4	49	52	98	103	204	216
	5	64-QAM	2/3	65	69	130	138	272	288
	6	64-QAM	3/4	73	77	146	155	306	324
	7	64-QAM	5/6	81	86	163	172	340	360
	8	256-QAM	3/4	98	103	195	207	408	432
	9	256-QAM	5/6	108	115	217	229	453	480
	10	1024-QAM	3/4	122	129	244	258	510	540
2	11	1024-QAM	5/6	135	143	271	287	567	600
	12	BPSK	1/2	8	8	16	18	34	36
	13	QPSK	1/2	32	34	66	68	136	144
	14	QPSK	3/4	48	52	98	104	204	216
	15	16-QAM	1/2	66	68	130	138	272	288
	16	16-QAM	3/4	98	104	196	206	408	432
	17	64-QAM	2/3	130	138	260	276	544	576
	18	64-QAM	3/4	146	154	292	310	612	648
	19	64-QAM	5/6	162	172	326	344	680	720
	20	256-QAM	3/4	196	206	390	414	816	864
	21	256-QAM	5/6	216	230	434	458	906	960
	22	1024-QAM	3/4	244	258	488	516	1020	1080
	23	1024-QAM	5/6	270	286	542	574	1134	1200

Note 1: The blue form is the maximum power data rate.

2: The EUT supports 2 spatial streams.

Note: The General Description of the Item, antenna information, 802.11ax RU configurations , Data Rate and Channel List in clause 1 are provided and confirmed by the client.

1.6 Power vs Data Rate

Test Mode	Frequency	Power Setting	
		SISO	MIMO
802.11a	5180	14	8.5
	5220	14	8.5
	5240	14	8.5
	5260	18	15
	5300	18	15
	5320	18	15
	5500	18	15
	5580	18	15
	5700	18	15
	5745	18	18
	5785	18	18
	5825	18	18
802.11n(20MHz)	5180	14	8.5
	5220	14	8.5
	5240	14	8.5
	5260	18	15
	5300	18	15
	5320	18	15
	5500	18	15
	5580	18	15
	5700	18	15
	5745	18	18
	5785	18	18
	5825	18	18
802.11n(40MHz)	5190	11	15.5
	5230	11	15.5
	5270	18	18
	5310	18	18
	5510	16	16
	5550	16	16
	5670	16	16
	5755	16	16
	5795	16	16
802.11ac(20MHz)	5180	14	8.5
	5220	14	8.5

	5240	14	8.5
	5260	18	15
	5300	18	15
	5320	18	15
	5500	18	15
	5580	18	15
	5700	18	15
	5745	18	18
	5785	18	18
	5825	18	18
802.11ac(40MHz)	5190	11	15.5
	5230	11	15.5
	5270	18	18
	5310	18	18
	5510	16	16
	5550	16	16
	5670	16	16
	5755	16	16
	5795	16	16
802.11ac(80MHz)	5210	15.5	12
	5290	16	16
	5530	16	16
	5775	16	16
802.11ax(20MHz)	5180	14	8.5
	5220	14	8.5
	5240	14	8.5
	5260	18	15
	5300	18	15
	5320	18	15
	5500	18	15
	5580	18	15
	5700	18	15
	5745	18	18
	5785	18	18
	5825	18	18
802.11ax(20MHz) Partial	5180	2	2
	5220	2	2
	5240	2	2
	5260	6	4
	5300	6	4
	5320	6	4
	5500	6	4

	5580	6	4
	5700	6	4
	5745	2	2
	5785	2	2
	5825	2	2
802.11ax(40MHz)	5190	11	15.5
	5230	11	15.5
	5270	18	18
	5310	18	18
	5510	16	16
	5550	16	16
	5670	16	16
	5755	16	16
	5795	16	16
802.11ax(40MHz) Partial	5190	2	-1
	5230	2	-1
	5270	4	1
	5310	4	1
	5510	4	1
	5550	4	1
	5670	1	-2
	5755	1	-2
	5795	1	-2
802.11ax(80MHz)	5210	15.5	12
	5290	16	16
	5530	16	16
	5775	16	16
802.11ax(80MHz) Partial	5210	-2	-5
	5290	0	-3
	5530	0	-3
	5775	-2	-5

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.1a
	Mode 2: Transmit by 802.11n (20MHz)
	Mode 3: Transmit by 802.11n (40MHz)
	Mode 4: Transmit by 802.11ac (20MHz)
	Mode 5: Transmit by 802.11ac (40MHz)
	Mode 6: Transmit by 802.11ac (80MHz)
	Mode 7: Transmit by 802.11ax (20MHz)
	Mode 8: Transmit by 802.11ax (40MHz)
	Mode 9: Transmit by 802.11ax (80MHz)

2.2 Accessories Information


Accessories Information	Brand/model name	Cable		
		Length used during test [m]	Attached during test	Shielded
USB control Cable	N/A	10	☒	☒
USB control Cable	N/A	0.5	☒	☒
			☐	☐
			☐	☐
			☐	☐

2.3 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
QDART	qdart_conn.win.1.0_installer_00065.1	Qualcomm	N/A

2.4 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

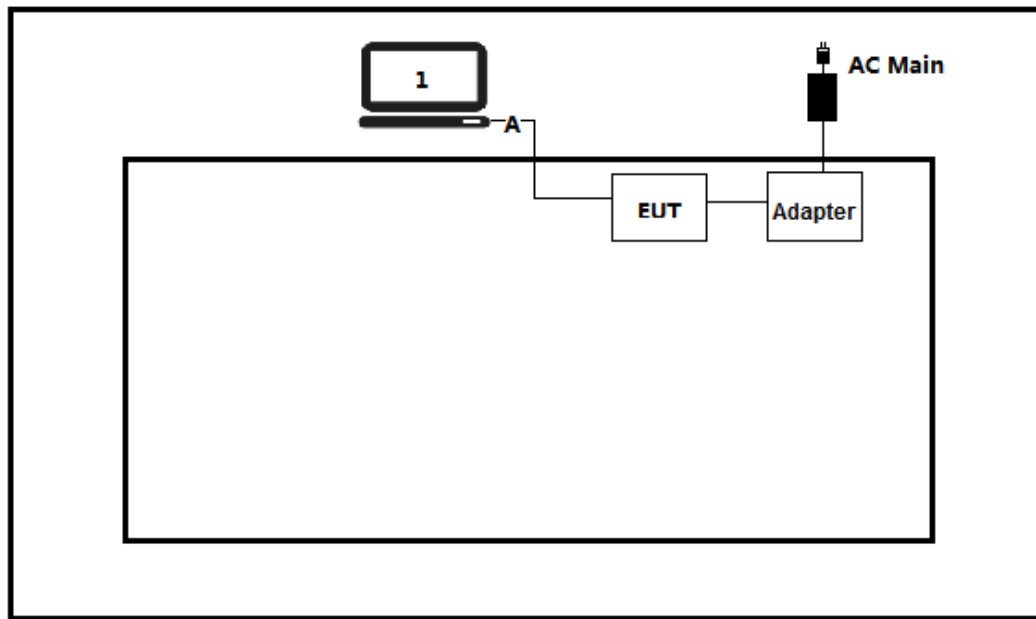

Test setup Diagram- Radiated Emission

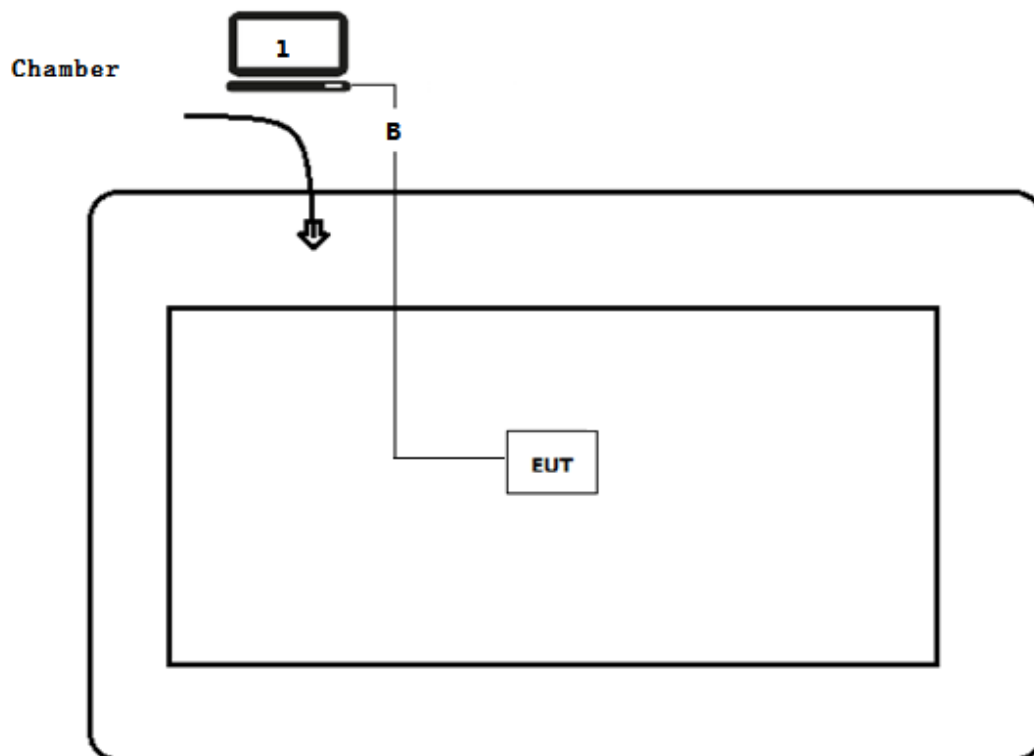

2.5 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Execute the QDART on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart E Section 15.407	2017	General technical requirements for 5.15-5.25 GHz;5.25-5.35 GHz; 5.47-5.725 GHz;5.725-5.85 GHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 789033 D02 General UNII Test Procedures New Rules v02r01	2017	This document provides guidance for determining emissions compliance of U-NII devices under Part 15, Subpart E of the FCC rules.
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS),Frequency Hopping Systems (FHSs)and Licence-Exempt Local Area Network(LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
Conducted Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.207	PASS	---
Radiated Emission	FCC CFR Title 47 Part 15 Subpart E: Section 15.209	PASS	---
Emission bandwidth and occupied bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	PASS	---
6dB Emission Bandwidth	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(e)	PASS	---
Power Output	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	---
Peak Power Spectral Density	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a)	PASS	---
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart E: Section 15.205, 15.407(b)	PASS	---
Frequency Stability	FCC CFR Title 47 Part 15 Subpart E: Section 15.407(g)	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
Conducted Emission	RSS-Gen Issue 5: Section 8.8	PASS	---
Radiated Emission	RSS-Gen Issue 5: Section 8.9 RSS-247 Issue 2: Section 6.2	PASS	---
Emission bandwidth and occupied bandwidth	RSS-Gen Issue 5: Section 6.7 RSS-247 Issue 2: Section 6.2.4	PASS	---
Power Output	RSS-247 Issue 2: Section 6.2	PASS	---
Peak Power Spectral Density	RSS-247 Issue 2: Section 6.2	PASS	---
Band Edge	RSS-Gen Issue 5: Section 8.10	PASS	---
Frequency Stability	RSS-Gen Issue 5: Section 6.11	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

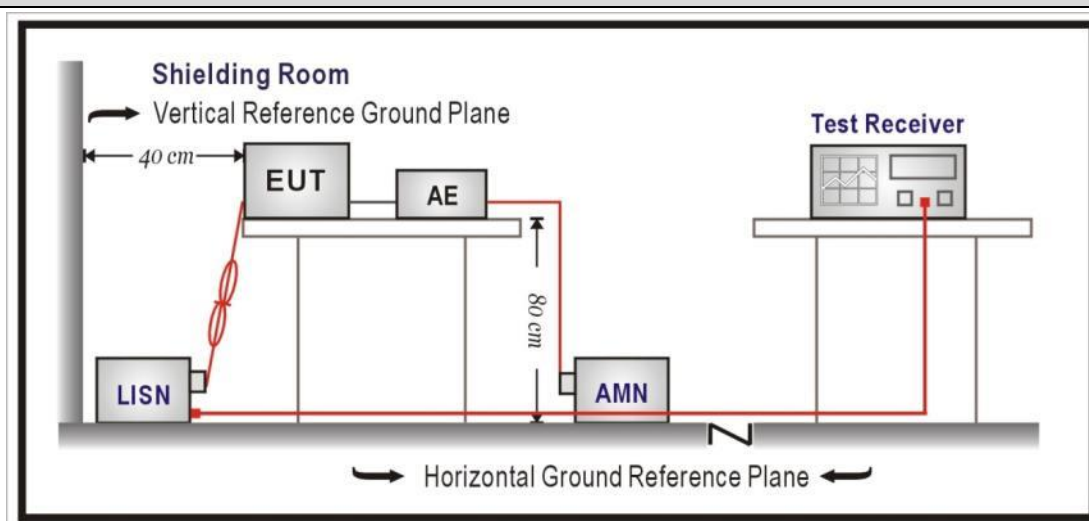


4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


4.1.4 Test Data

Profile: 2360091R	Page No.: 185
Engineer: Noah	
Site: TR1	Time: 2023/06/29 - 20:17
Limit: FCC_Part 15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode1: Transmit at 5180MHz by 802.11a	

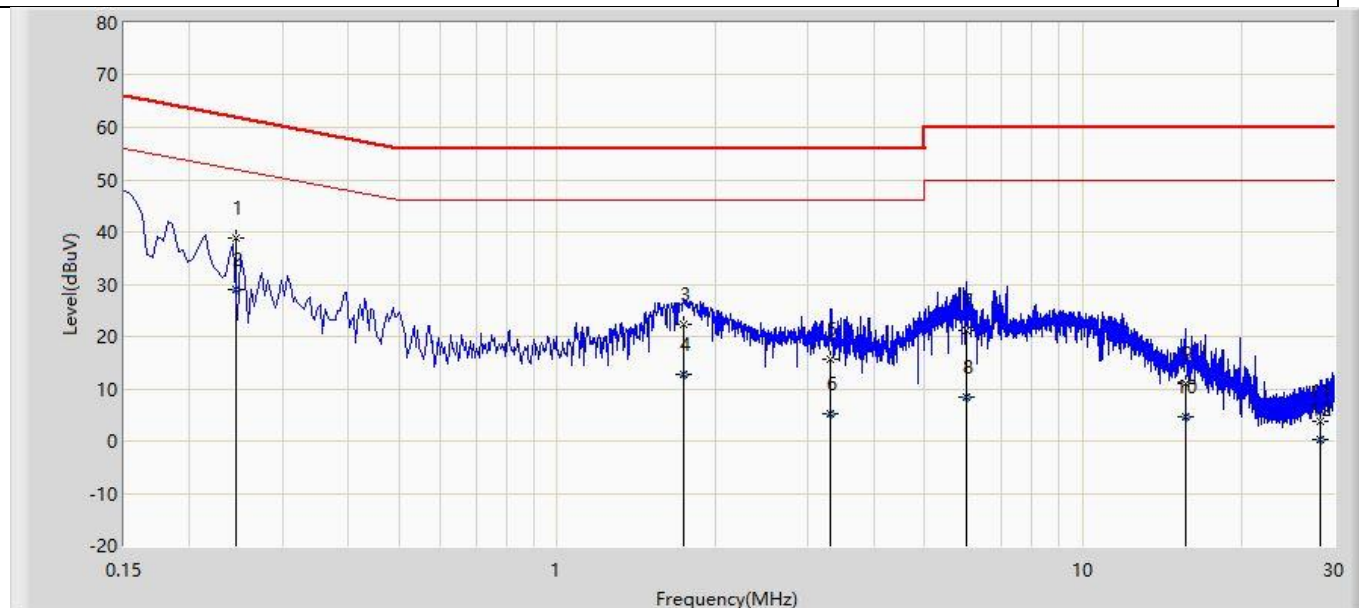

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.245	38.771	29.216	-23.166	61.937	9.555	QP
2	*	0.245	28.869	19.315	-23.067	51.937	9.555	AV
3		1.734	22.243	12.653	-33.757	56.000	9.590	QP
4		1.734	12.808	3.218	-33.192	46.000	9.590	AV
5		3.298	15.776	6.155	-40.224	56.000	9.621	QP
6		3.298	5.075	-4.546	-40.925	46.000	9.621	AV
7		5.994	21.199	11.504	-38.801	60.000	9.695	QP
8		5.994	8.363	-1.331	-41.637	50.000	9.695	AV
9		15.658	11.056	1.145	-48.944	60.000	9.911	QP
10		15.658	4.736	-5.175	-45.264	50.000	9.911	AV
11		28.258	3.668	-6.529	-56.332	60.000	10.197	QP
12		28.258	0.343	-9.854	-49.657	50.000	10.197	AV

Profile: 2360091R	Page No.: 186
Engineer: Noah	
Site: TR1	Time: 2023/06/29 - 20:20
Limit: FCC_Part 15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode1: Transmit at 5180MHz by 802.11a	

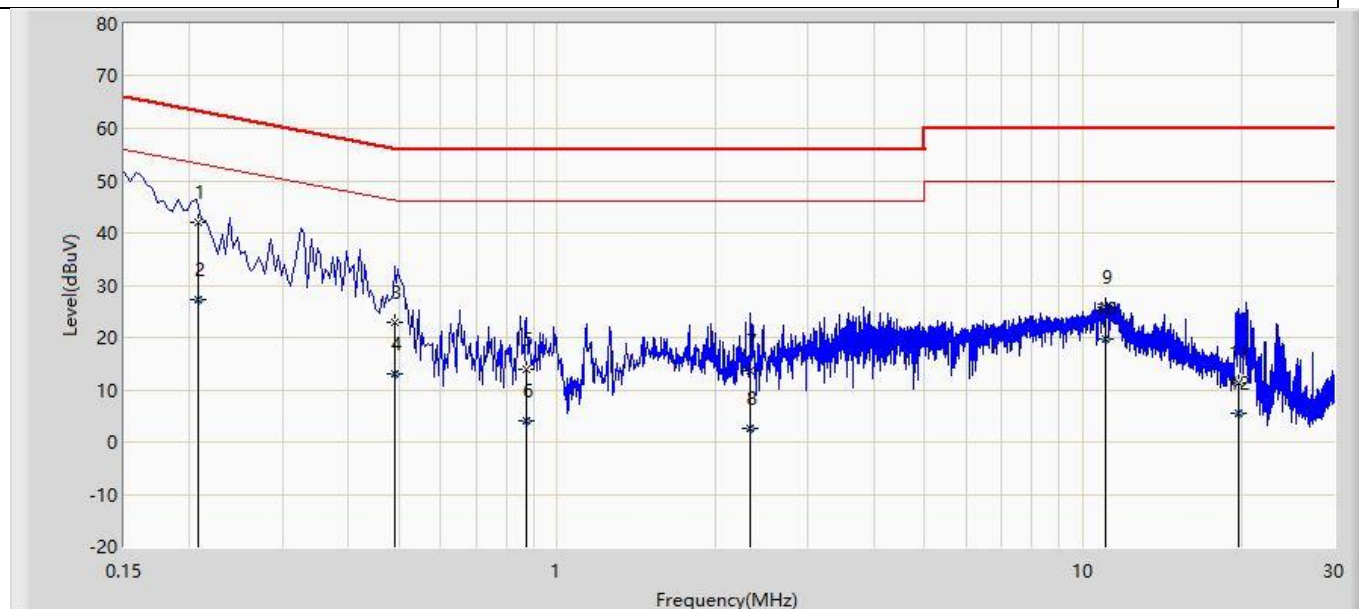

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.207	42.137	32.577	-21.177	63.314	9.560	QP
2		0.207	27.126	17.567	-26.188	53.314	9.560	AV
3		0.490	22.797	13.217	-33.371	56.168	9.579	QP
4		0.490	13.018	3.439	-33.149	46.168	9.579	AV
5		0.874	13.877	4.287	-42.123	56.000	9.590	QP
6		0.874	3.916	-5.674	-42.084	46.000	9.590	AV
7		2.330	13.558	3.960	-42.442	56.000	9.598	QP
8		2.330	2.688	-6.911	-43.312	46.000	9.598	AV
9		11.034	25.819	15.994	-34.181	60.000	9.825	QP
10		11.034	19.729	9.904	-30.271	50.000	9.825	AV
11		19.762	11.241	1.294	-48.759	60.000	9.947	QP
12		19.762	5.607	-4.339	-44.393	50.000	9.947	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.2 Radiated Emissions**VERDICT: PASS****4.2.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.207	
Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.

Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)


Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dB μ V/m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
Operating Frequency Band (MHz)	EIRP Limit (dBm/MHz)	

5725 - 5850

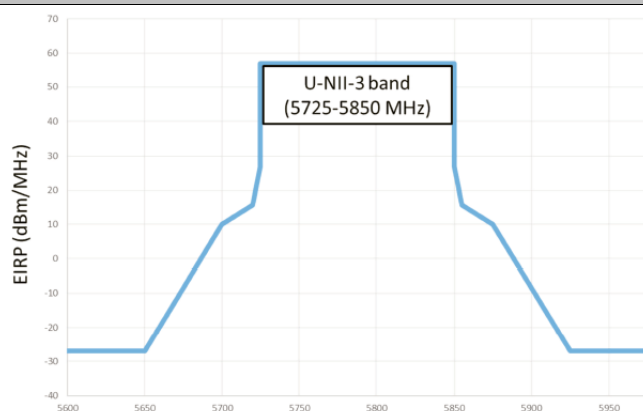


4.2.2 Test Setup


Below 30MHz Test Setup:

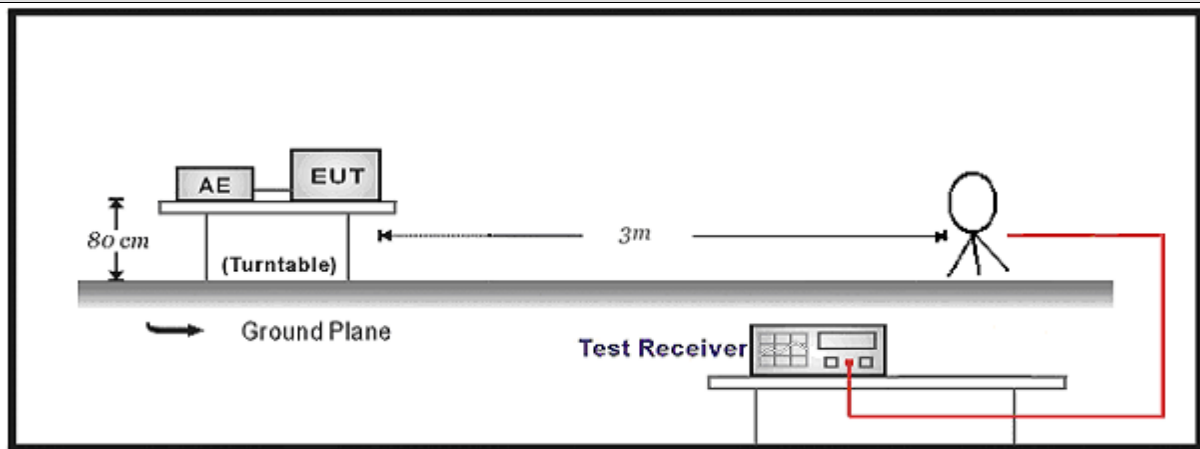

30MHz-1GHz Test Setup:

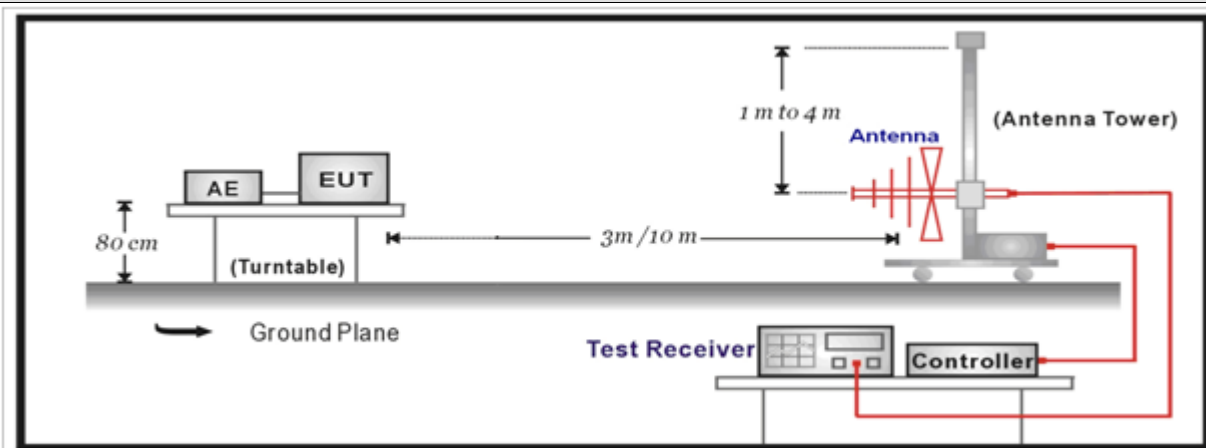

Above 1GHz Test Setup:

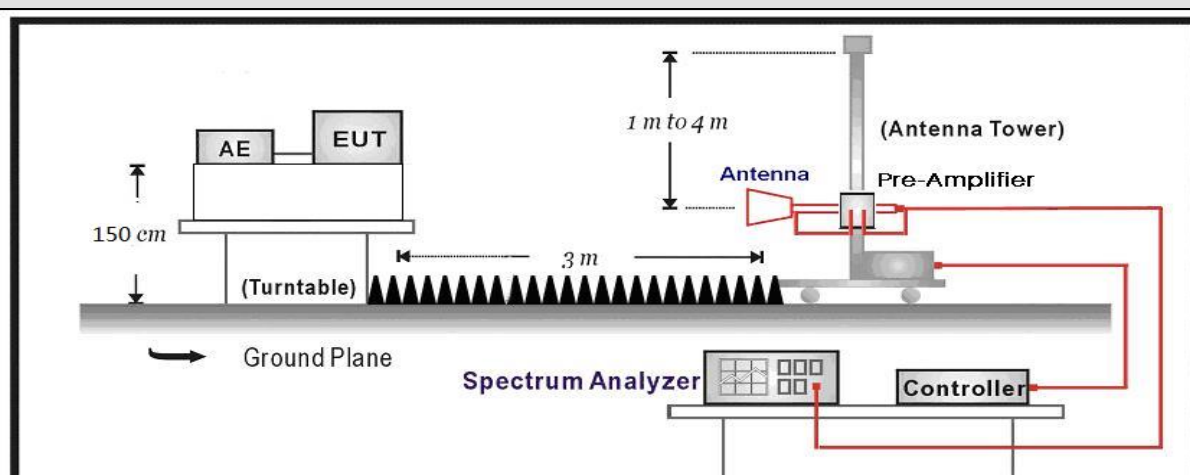


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2360091R	Page No.: 127
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5180MHz by 802.11a with Ant1+Ant2	

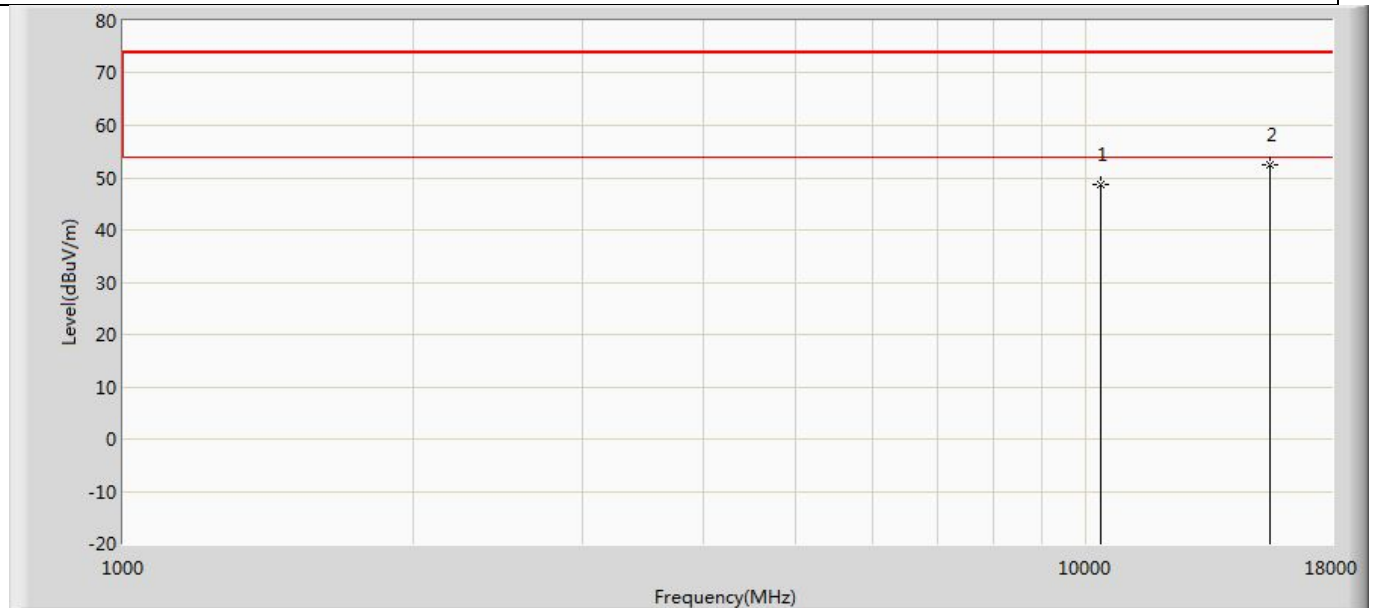


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.753	52.151	-25.247	74.000	-3.399	PK
2	*	15540.000	52.507	51.281	-21.493	74.000	1.226	PK

Profile: 2360091R	Page No.: 128
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5180MHz by 802.11a with Ant1	

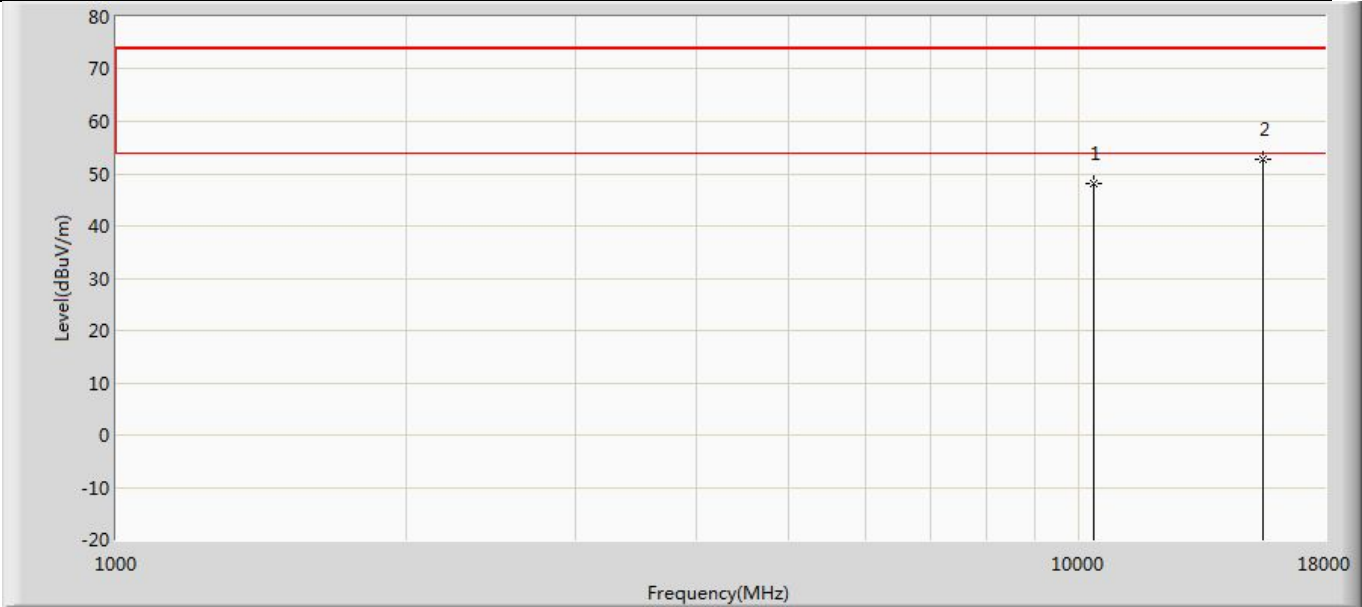


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.138	51.536	-25.862	74.000	-3.399	PK
2	*	15540.000	52.869	51.643	-21.131	74.000	1.226	PK

Profile: 2360091R	Page No.: 129
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5220MHz by 802.11a with Ant1	

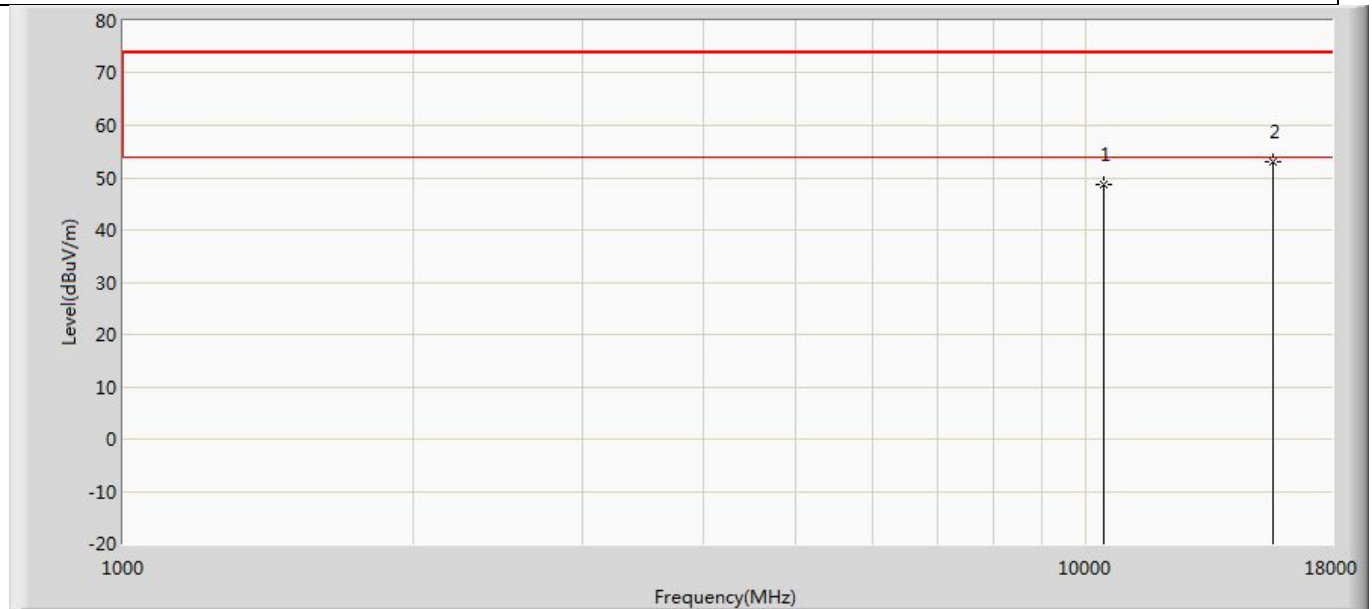


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	48.674	51.963	-25.326	74.000	-3.288	PK
2	*	15660.000	52.920	51.728	-21.080	74.000	1.192	PK

Profile: 2360091R	Page No.: 130
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5220MHz by 802.11a with Ant1	

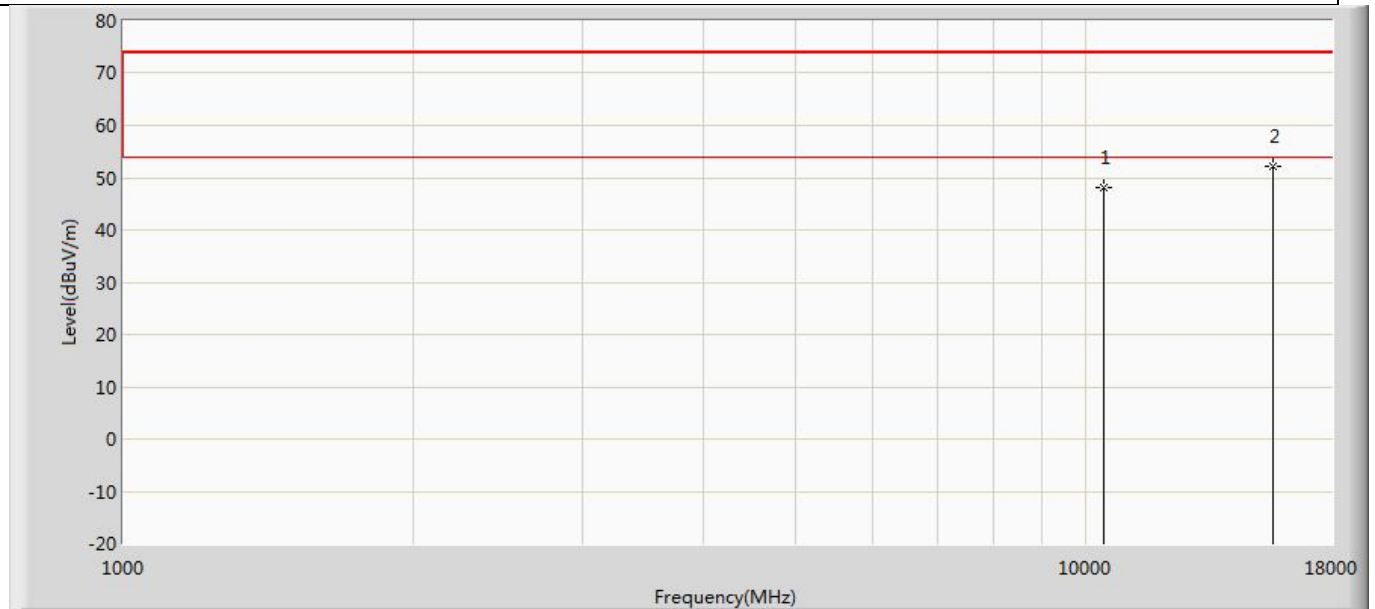


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	48.106	51.395	-25.894	74.000	-3.288	PK
2	*	15660.000	52.296	51.104	-21.704	74.000	1.192	PK

Profile: 2360091R	Page No.: 131
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5240MHz by 802.11a with Ant1	

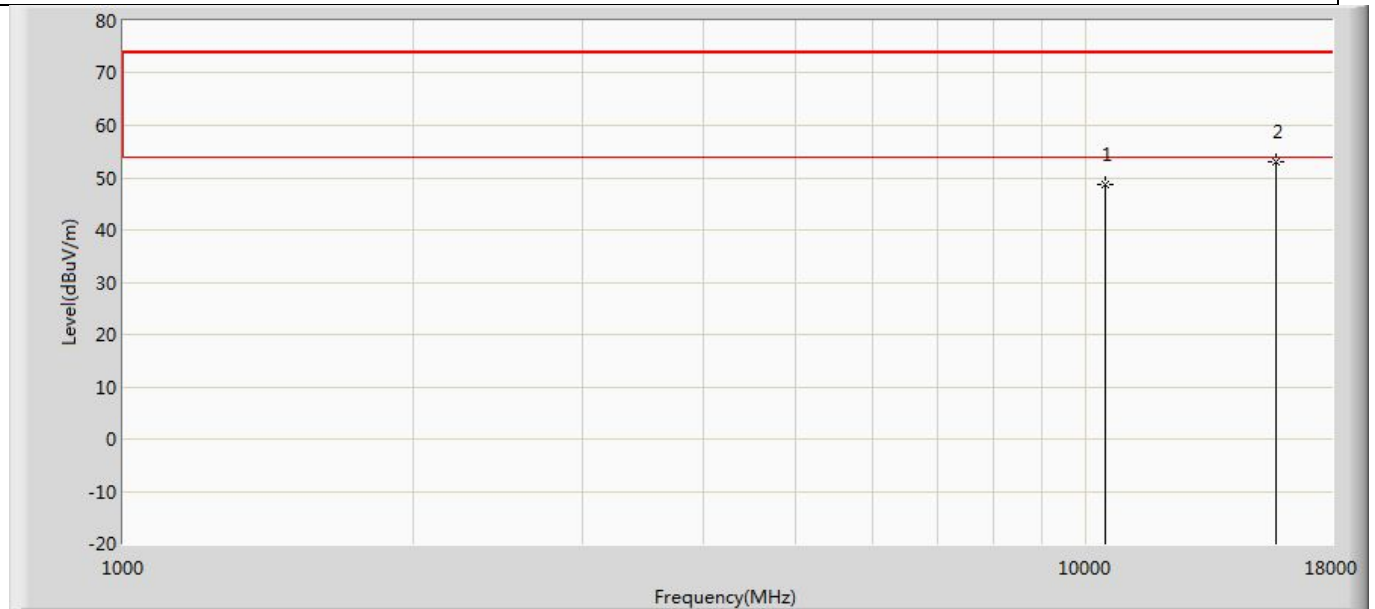


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	48.607	51.872	-25.393	74.000	-3.265	PK
2	*	15720.000	53.132	51.481	-20.868	74.000	1.651	PK

Profile: 2360091R	Page No.: 132
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5240MHz by 802.11a with Ant1	

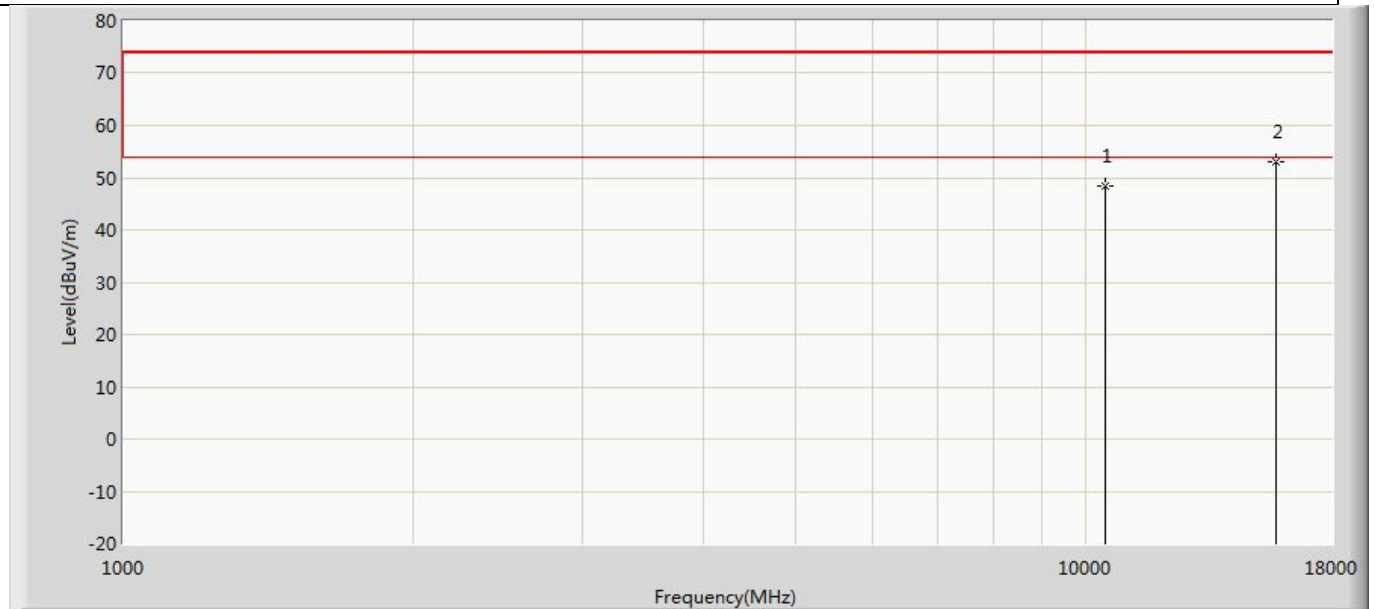


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	48.410	51.675	-25.590	74.000	-3.265	PK
2	*	15720.000	53.150	51.499	-20.850	74.000	1.651	PK

Profile: 2360091R	Page No.: 133
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5260MHz by 802.11a with Ant1	

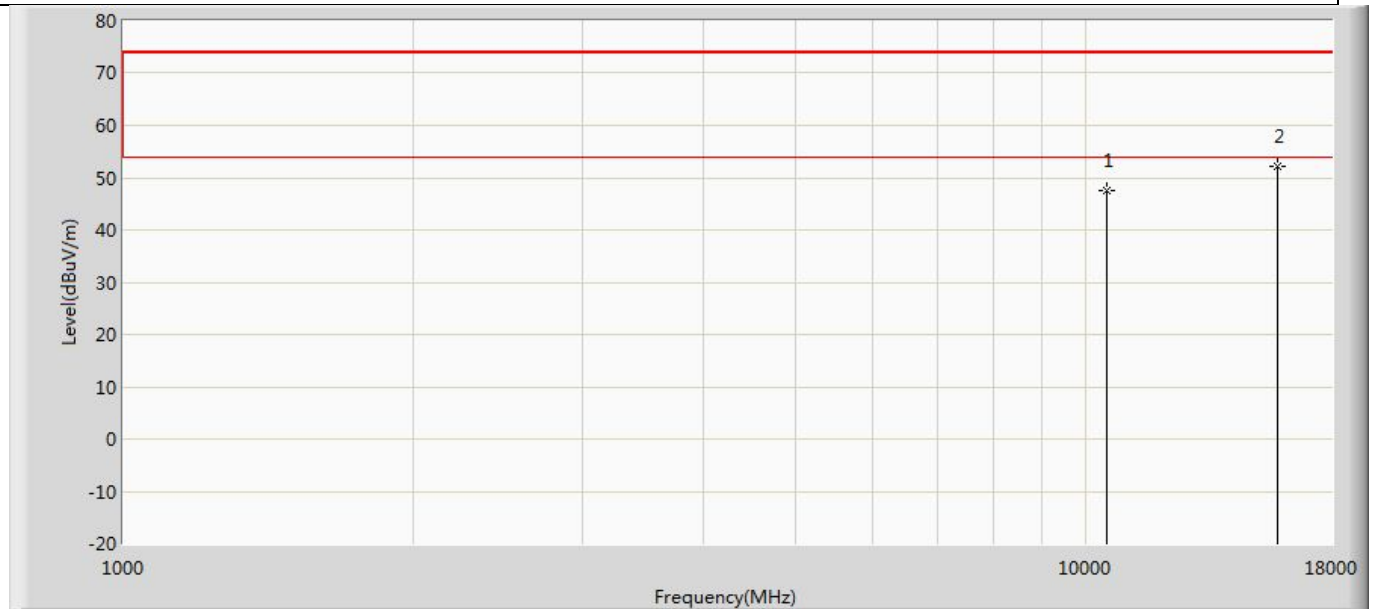


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.407	50.625	-26.593	74.000	-3.218	PK
2	*	15780.000	52.139	50.800	-21.861	74.000	1.339	PK

Profile: 2360091R	Page No.: 134
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5260MHz by 802.11a with Ant1	

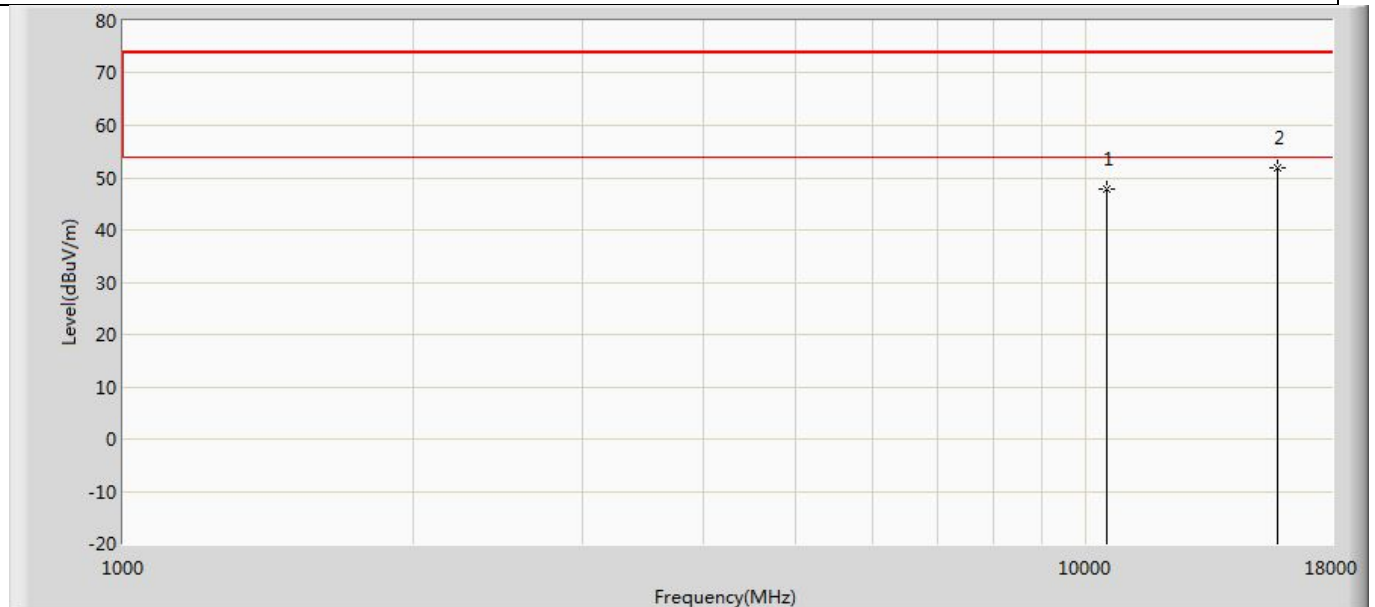


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.952	51.170	-26.048	74.000	-3.218	PK
2	*	15780.000	51.776	50.437	-22.224	74.000	1.339	PK

Profile: 2360091R	Page No.: 135
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5300MHz by 802.11a with Ant1	

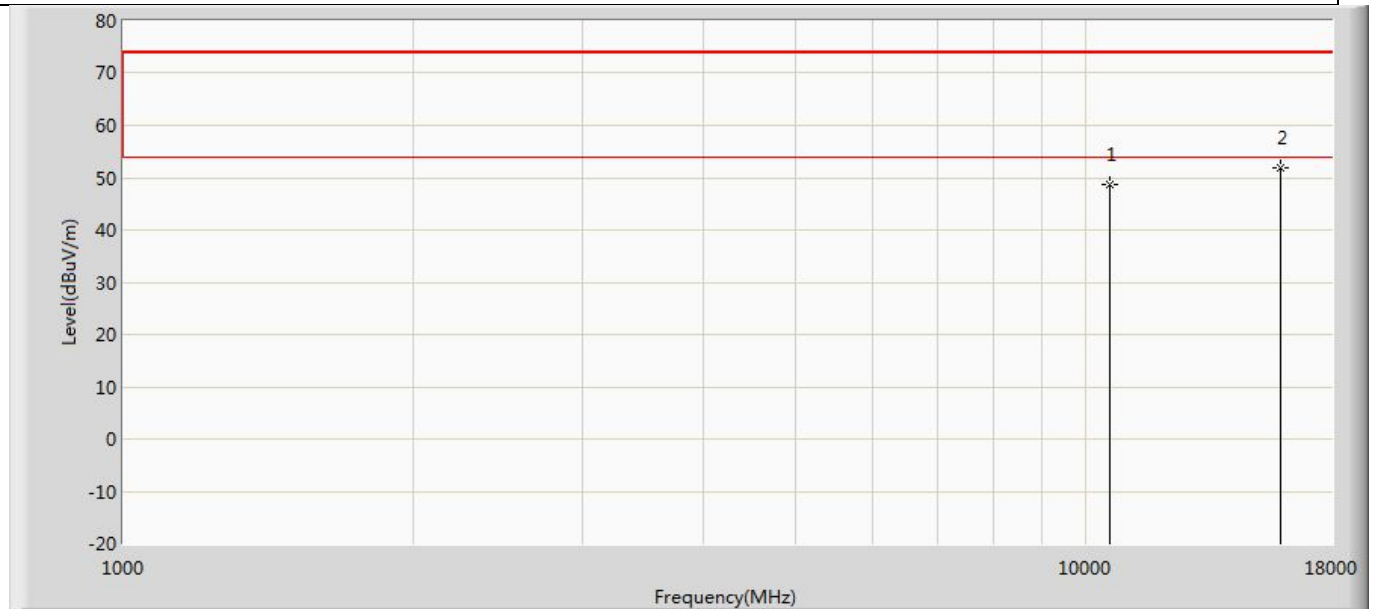


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	48.788	51.453	-25.212	74.000	-2.665	PK
2	*	15900.000	51.991	49.942	-22.009	74.000	2.049	PK

Profile: 2360091R	Page No.: 136
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5300MHz by 802.11a with Ant1	

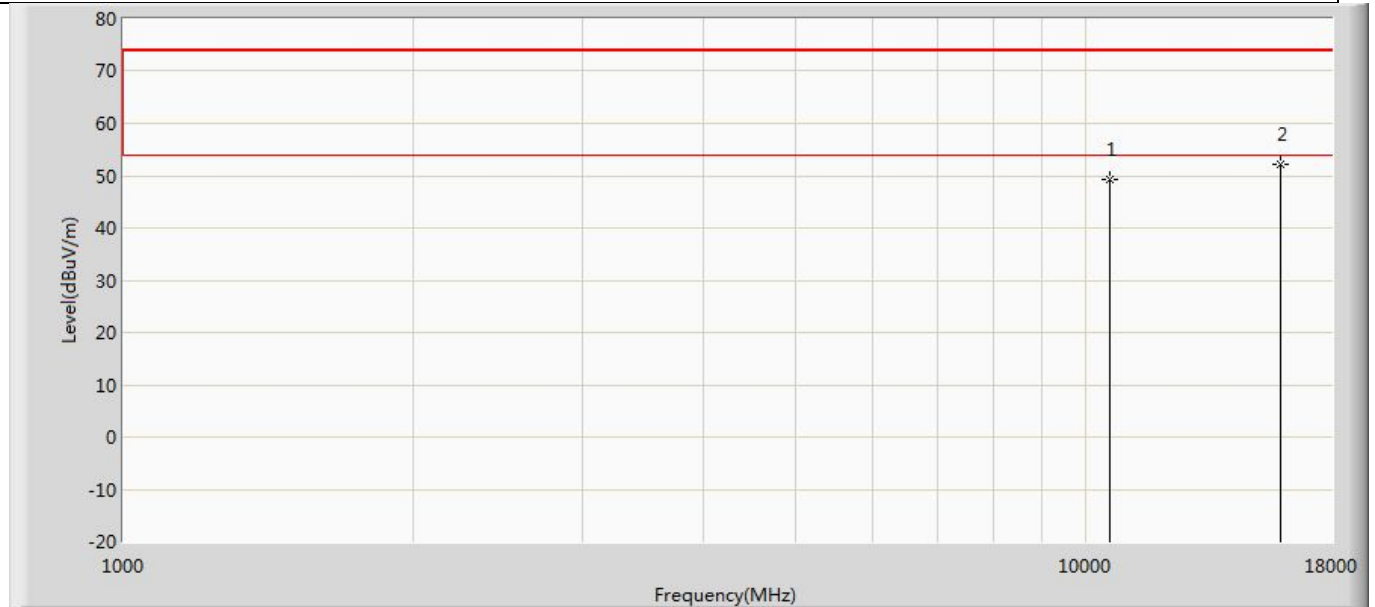


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	49.360	52.025	-24.640	74.000	-2.665	PK
2	*	15900.000	52.313	50.264	-21.687	74.000	2.049	PK

Profile: 2360091R	Page No.: 137
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5320MHz by 802.11a with Ant1	

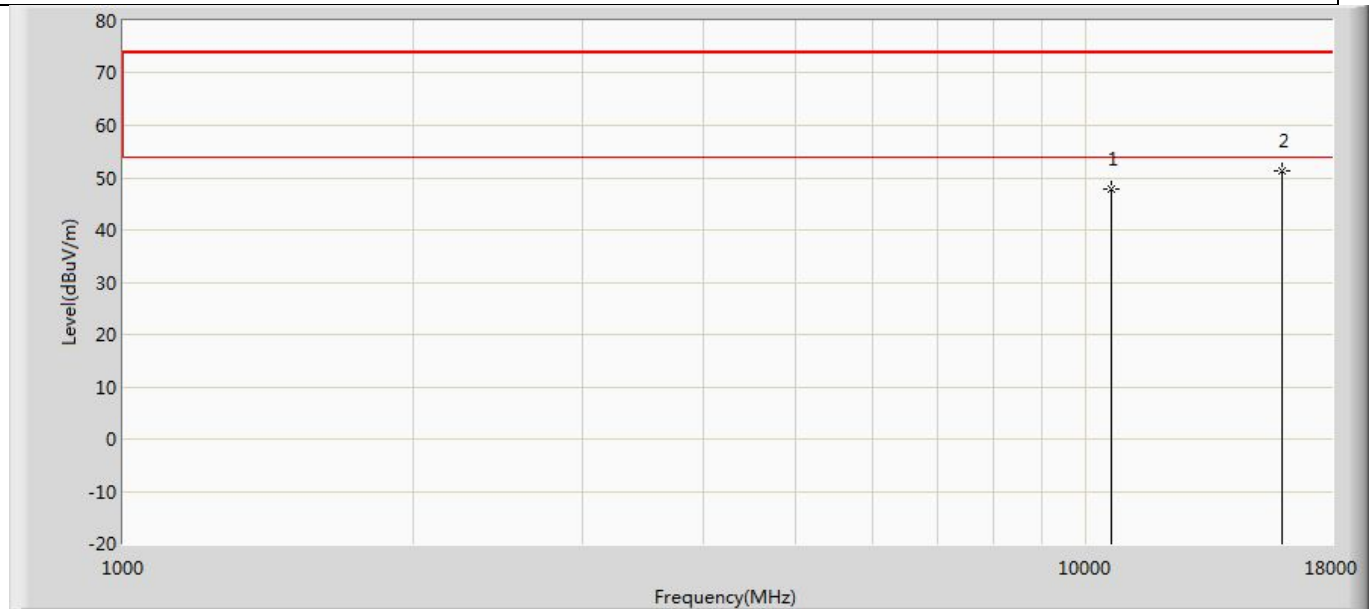


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	47.716	51.035	-26.284	74.000	-3.319	PK
2	*	15960.000	51.169	50.103	-22.831	74.000	1.066	PK

Profile: 2360091R	Page No.: 138
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5320MHz by 802.11a with Ant1	

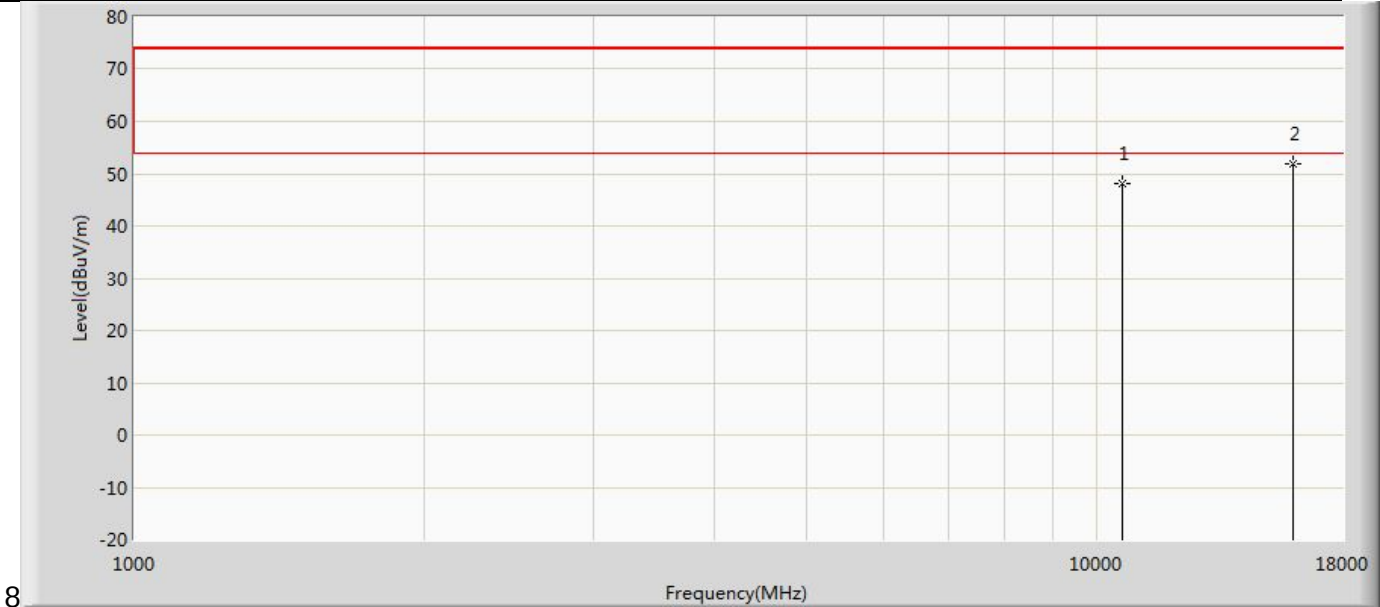


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	47.981	51.300	-26.019	74.000	-3.319	PK
2	*	15960.000	51.881	50.815	-22.119	74.000	1.066	PK

Profile: 2360091R	Page No.: 139
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5500MHz by 802.11a with Ant1	

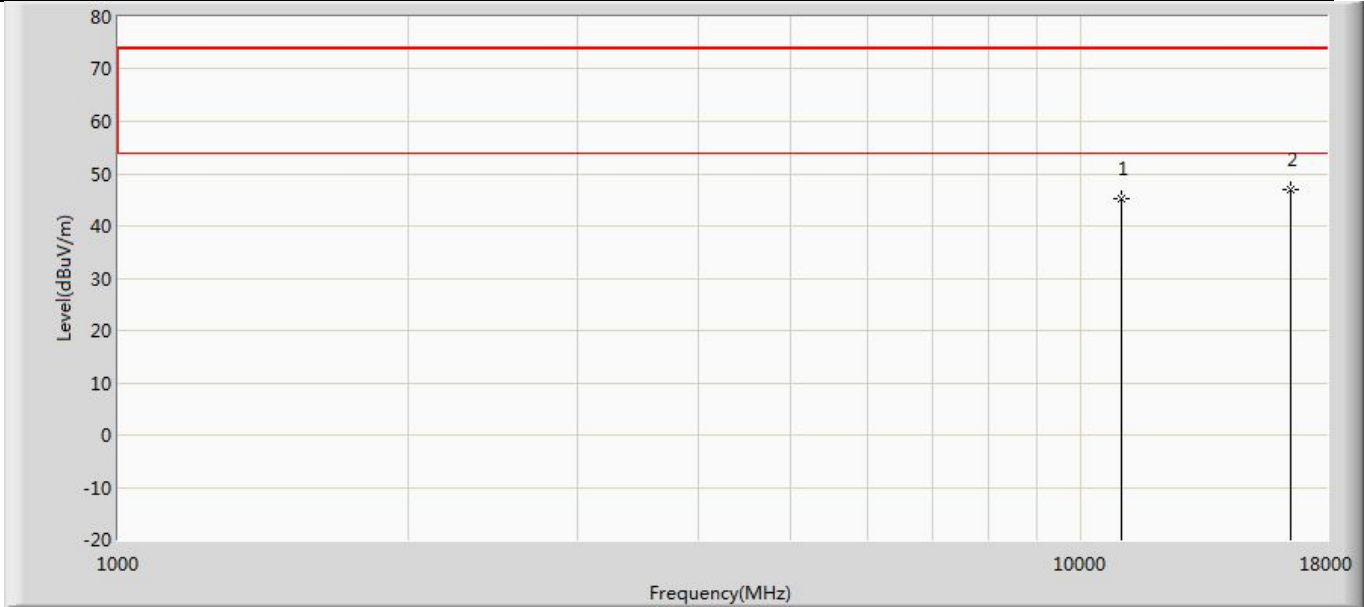


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	45.297	51.626	-28.703	74.000	-6.329	PK
2	*	16500.000	46.834	49.006	-27.166	74.000	-2.172	PK

Profile: 2360091R	Page No.: 140
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5500MHz by 802.11a with Ant1	

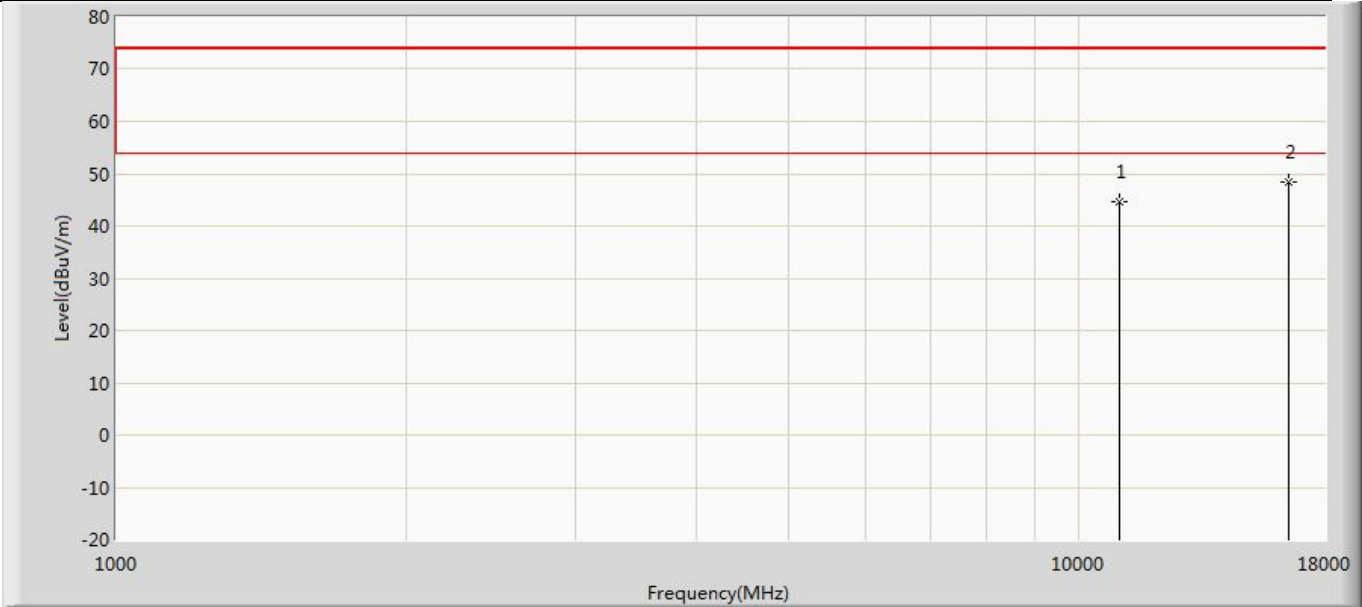


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	44.780	51.109	-29.220	74.000	-6.329	PK
2	*	16500.000	48.264	50.436	-25.736	74.000	-2.172	PK

Profile: 2360091R	Page No.: 141
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5580MHz by 802.11a with Ant1	

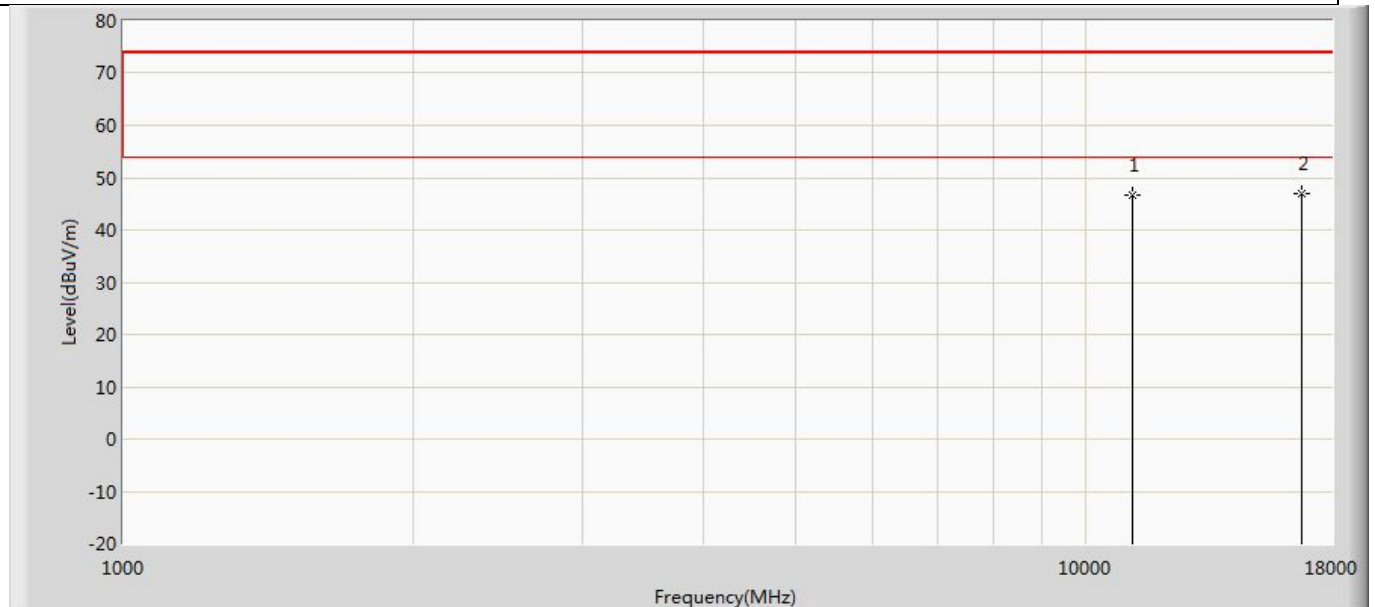


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.558	52.006	-27.442	74.000	-5.447	PK
2	*	16740.000	46.941	49.557	-27.059	74.000	-2.616	PK

Profile: 2360091R	Page No.: 142
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5580MHz by 802.11a with Ant1	

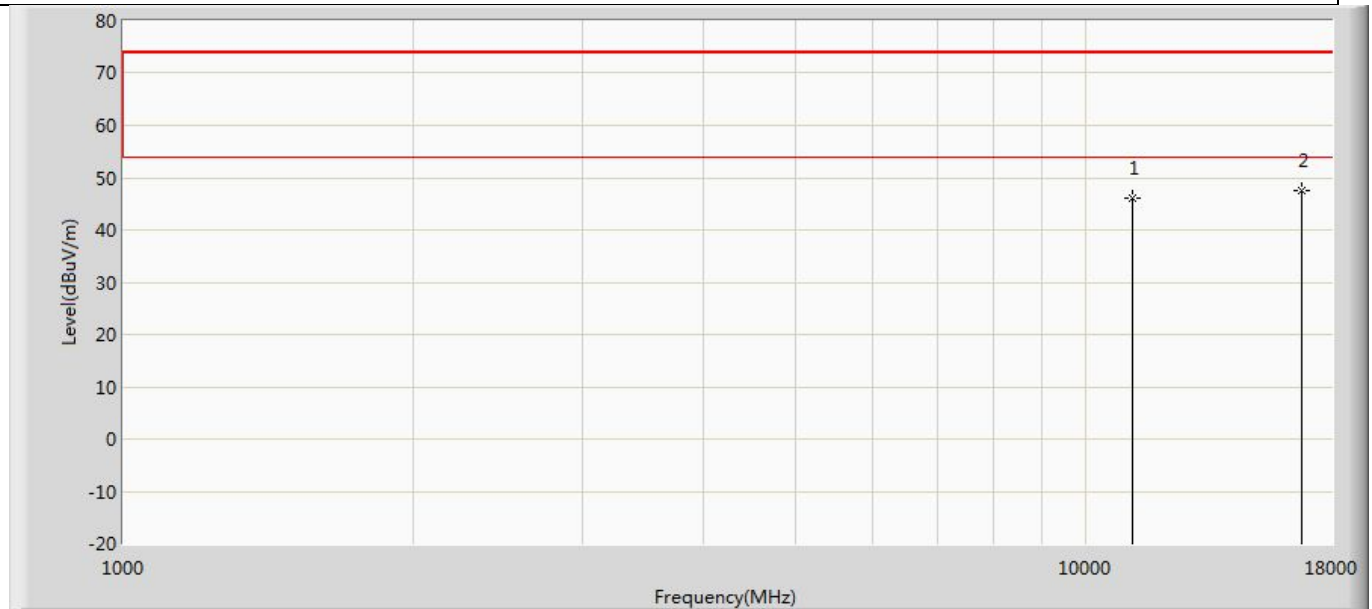


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	45.993	51.441	-28.007	74.000	-5.447	PK
2	*	16740.000	47.672	50.288	-26.328	74.000	-2.616	PK

Profile: 2360091R	Page No.: 143
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5700MHz by 802.11a with Ant1	

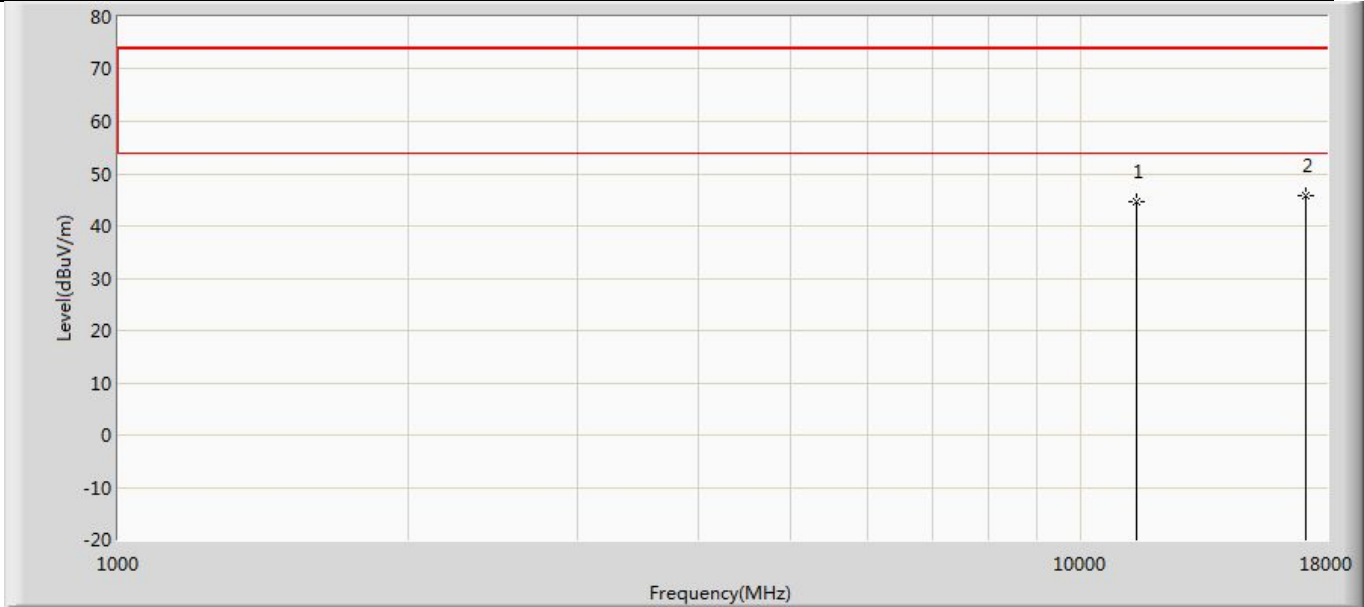


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	44.587	49.500	-29.413	74.000	-4.914	PK
2	*	17100.000	45.886	47.830	-28.114	74.000	-1.944	PK

Profile: 2360091R	Page No.: 144
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5700MHz by 802.11a with Ant1	

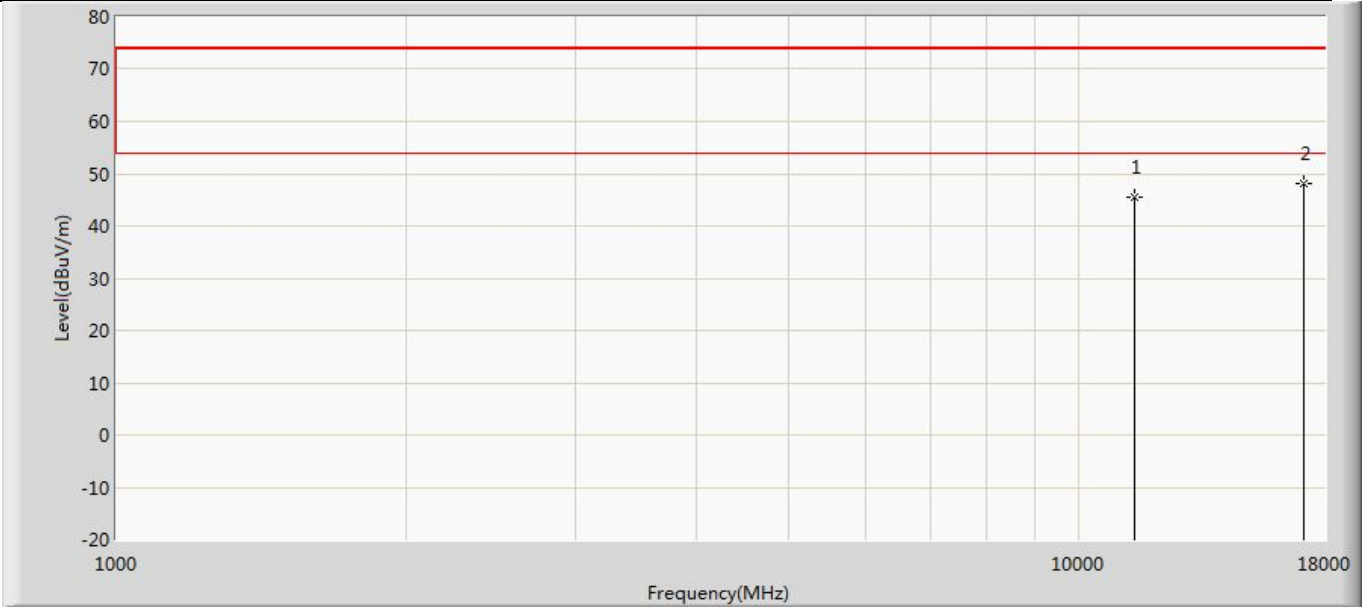


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.529	50.442	-28.471	74.000	-4.914	PK
2	*	17100.000	48.106	50.050	-25.894	74.000	-1.944	PK

Profile: 2360091R	Page No.: 41
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5745MHz by 802.11a with Ant1	

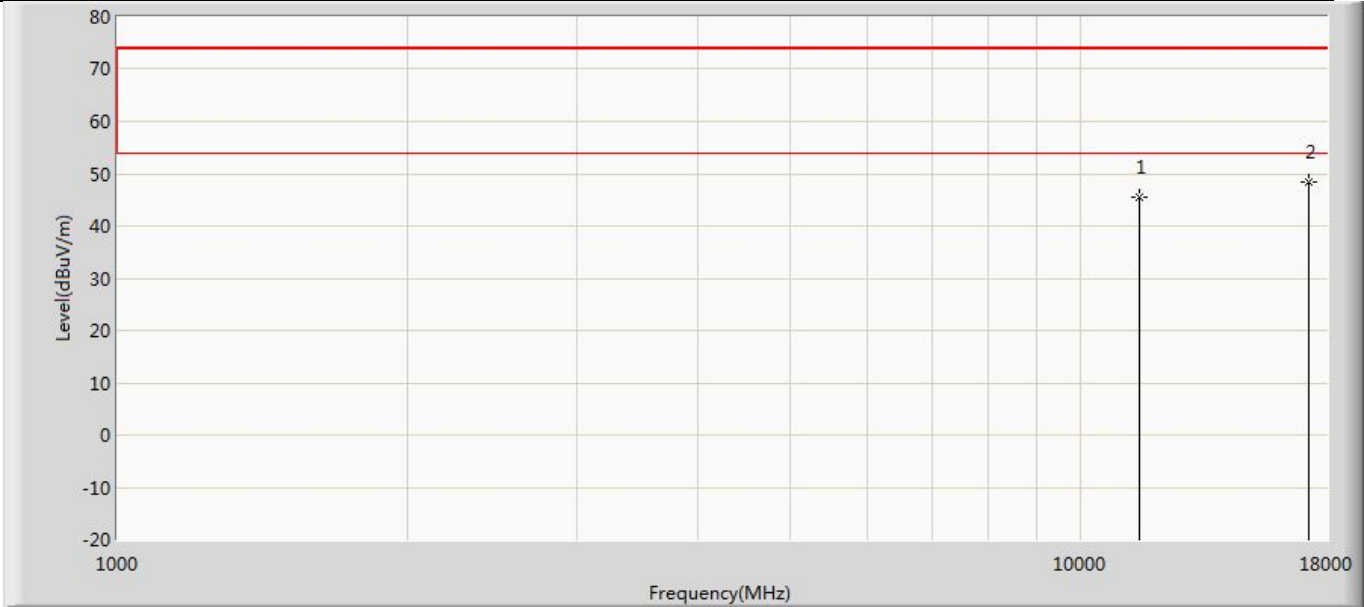


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	45.577	50.767	-28.423	74.000	-5.190	PK
2	*	17235.000	48.420	50.425	-25.580	74.000	-2.005	PK

Profile: 2360091R	Page No.: 42
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5745MHz by 802.11a with Ant1	

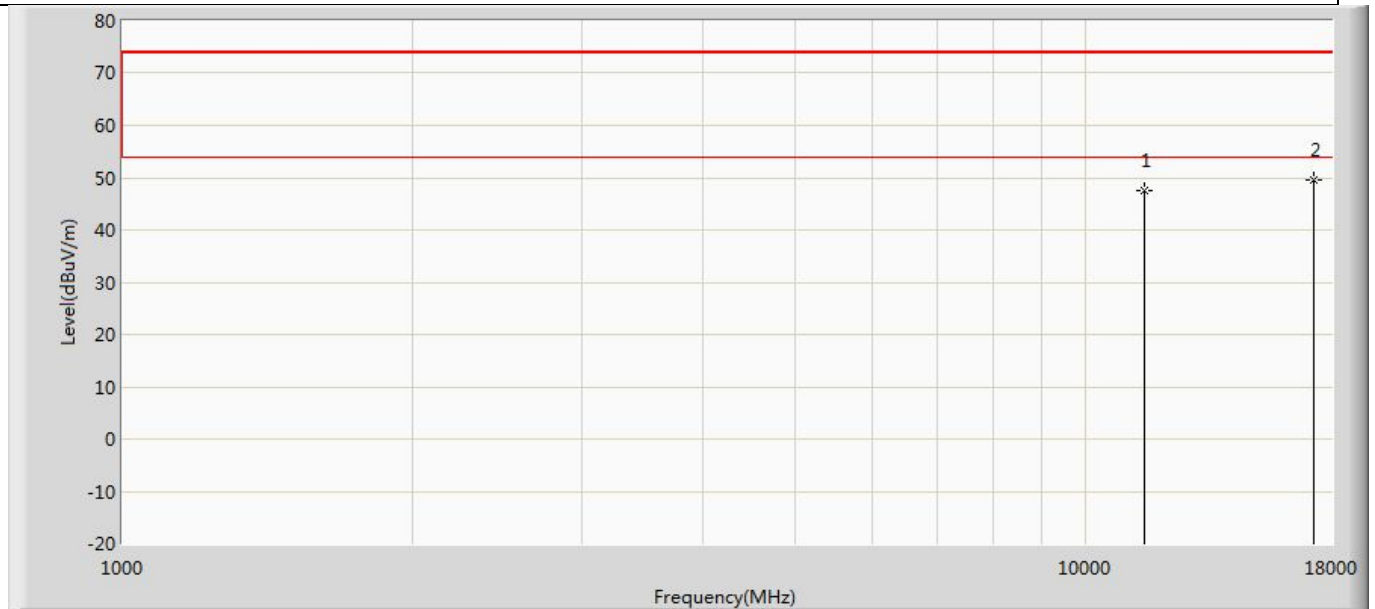


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	47.666	52.856	-26.334	74.000	-5.190	PK
2	*	17235.000	49.519	51.524	-24.481	74.000	-2.005	PK

Profile: 2360091R	Page No.: 43
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5785MHz by 802.11a with Ant1	

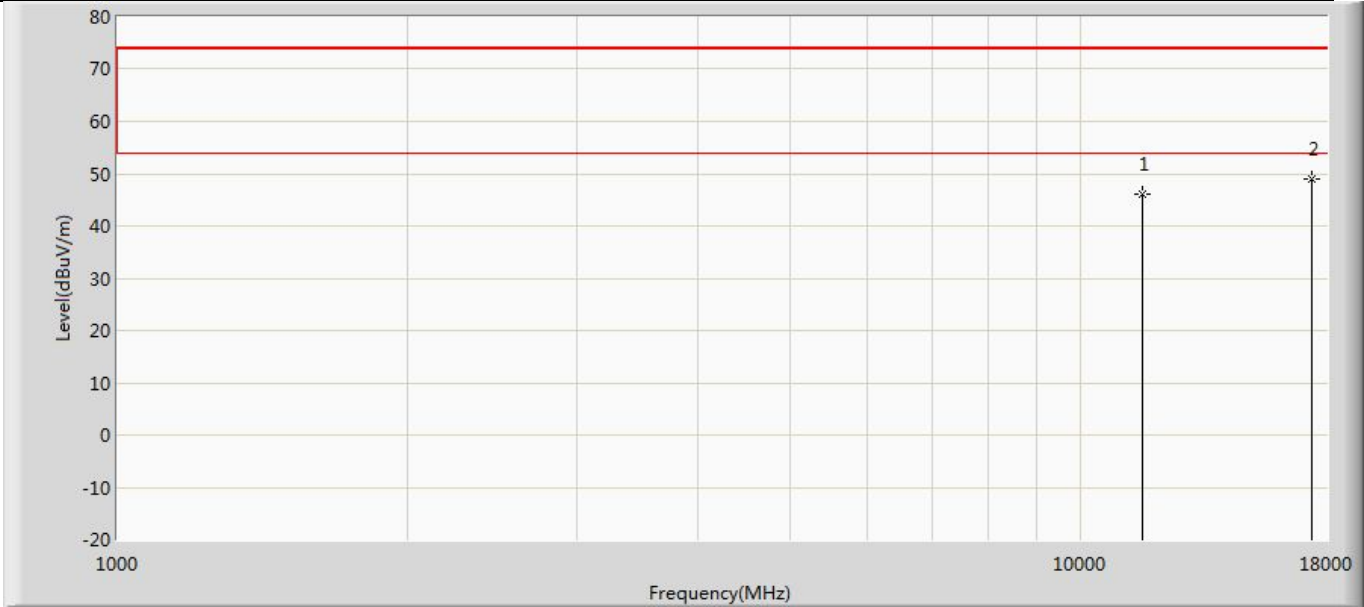


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.035	50.464	-27.965	74.000	-4.429	PK
2	*	17355.000	48.911	50.646	-25.089	74.000	-1.735	PK

Profile: 2360091R	Page No.: 44
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5785MHz by 802.11a with Ant1	

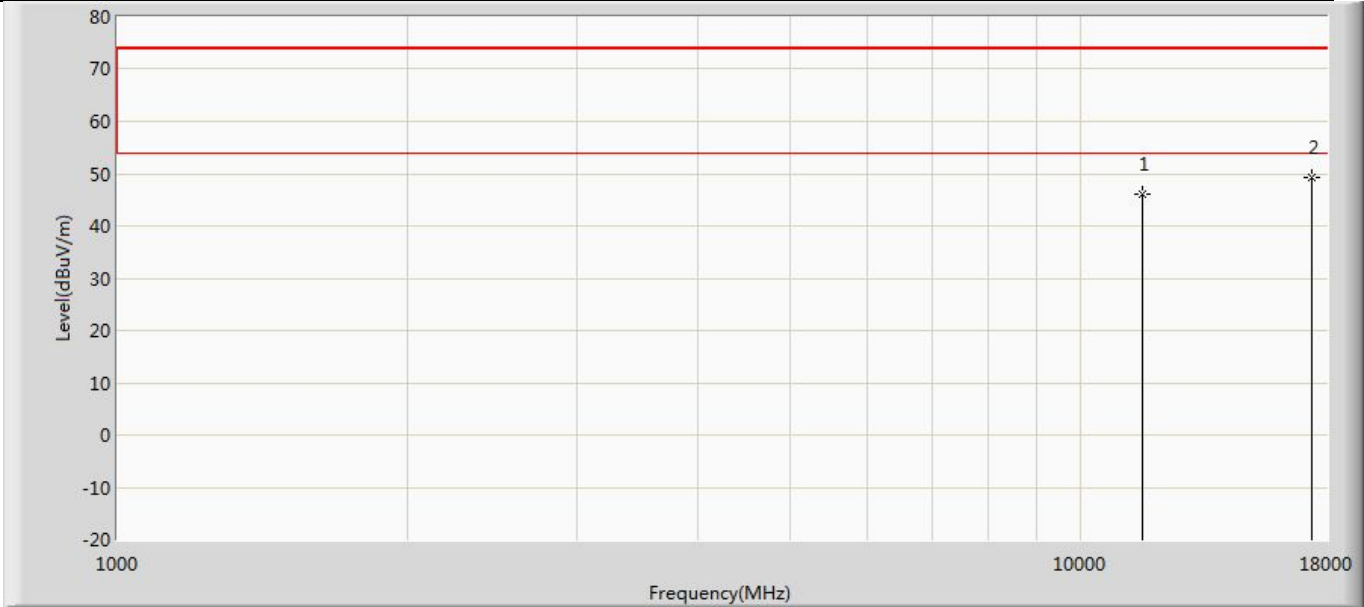


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.165	50.594	-27.835	74.000	-4.429	PK
2	*	17355.000	49.366	51.101	-24.634	74.000	-1.735	PK

Profile: 2360091R	Page No.: 45
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5825MHz by 802.11a with Ant1	

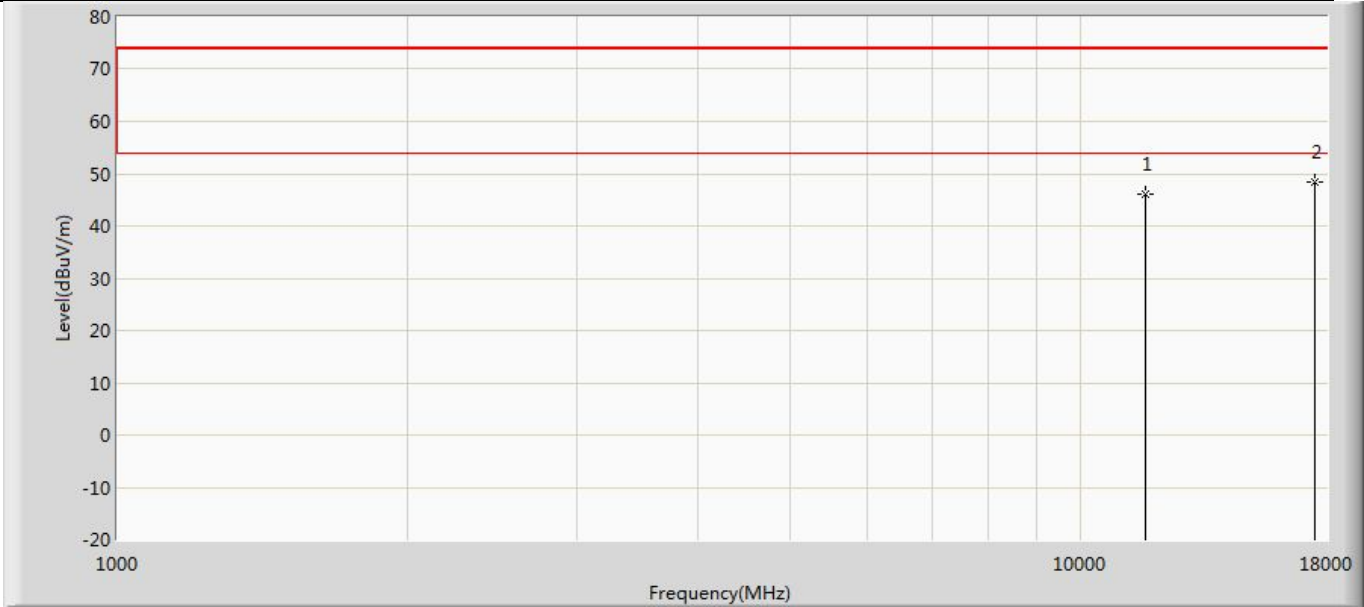


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.031	50.379	-27.969	74.000	-4.348	PK
2	*	17475.000	48.451	50.858	-25.549	74.000	-2.407	PK

Profile: 2360091R	Page No.: 46
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 1: Transmit at 5825MHz by 802.11a with Ant1	

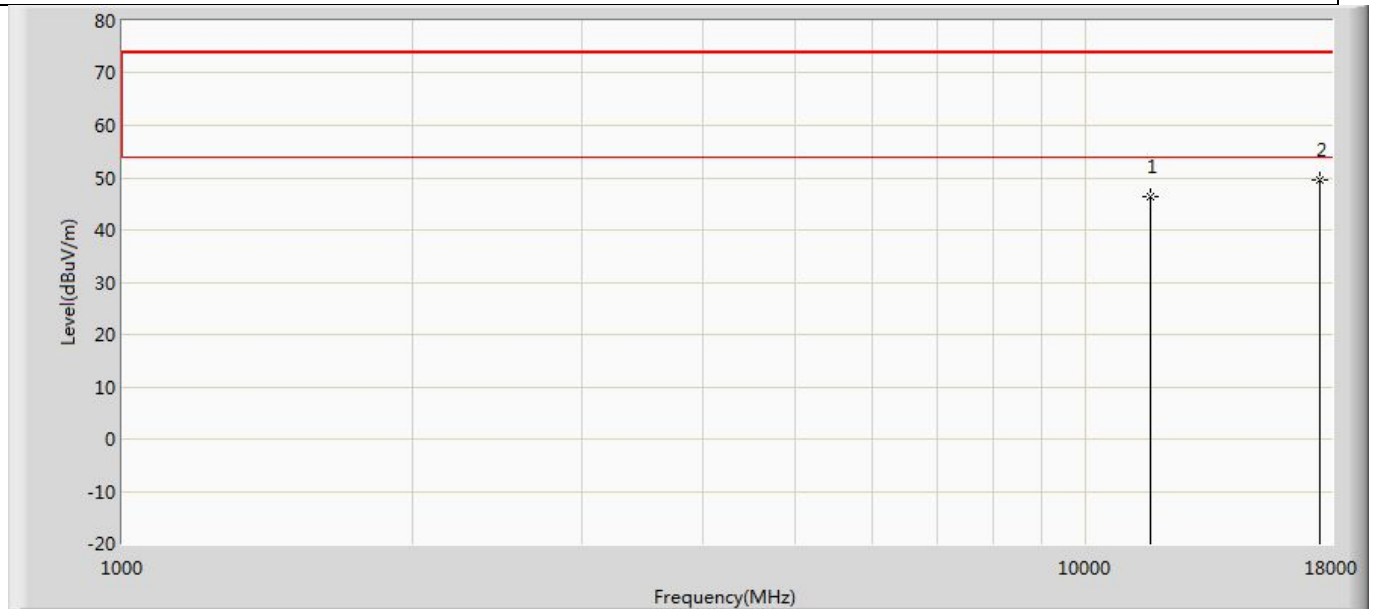


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.470	50.818	-27.530	74.000	-4.348	PK
2	*	17475.000	49.554	51.961	-24.446	74.000	-2.407	PK

Profile: 2360091R	Page No.: 145
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) with Ant1+Ant2	

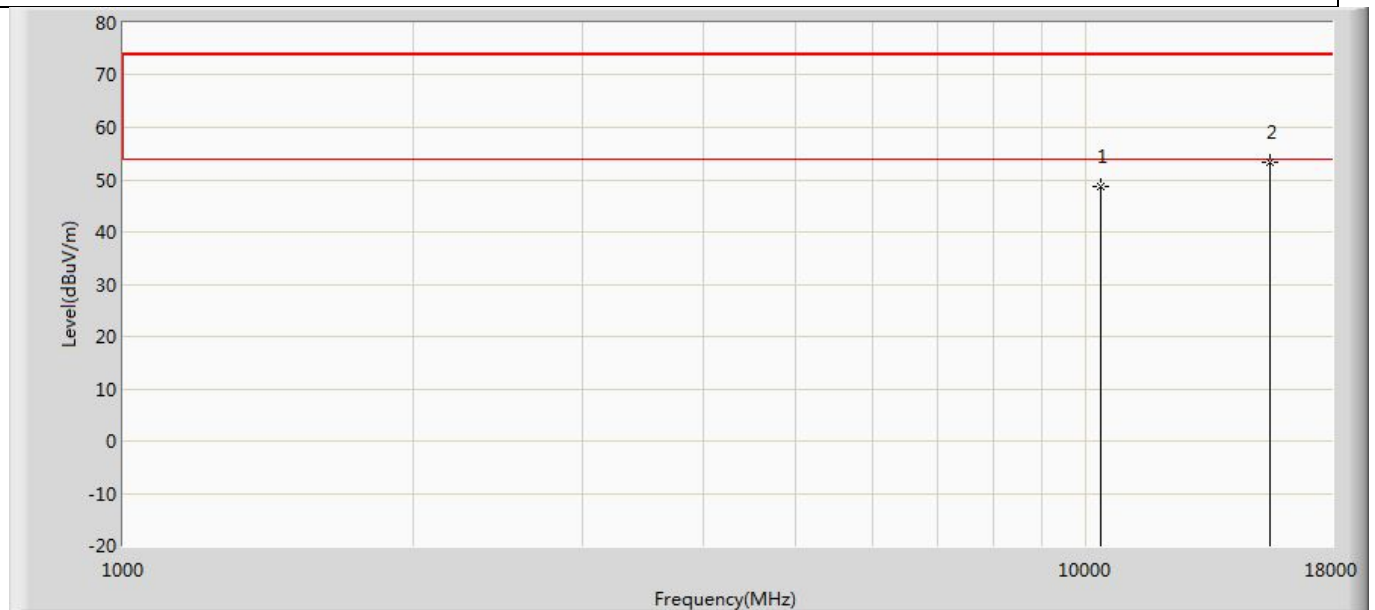


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.730	52.128	-25.270	74.000	-3.399	PK
2	*	15540.000	53.244	52.018	-20.756	74.000	1.226	PK

Profile: 2360091R	Page No.: 146
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5180MHz by 802.11n(20MHz) with Ant1+Ant2	

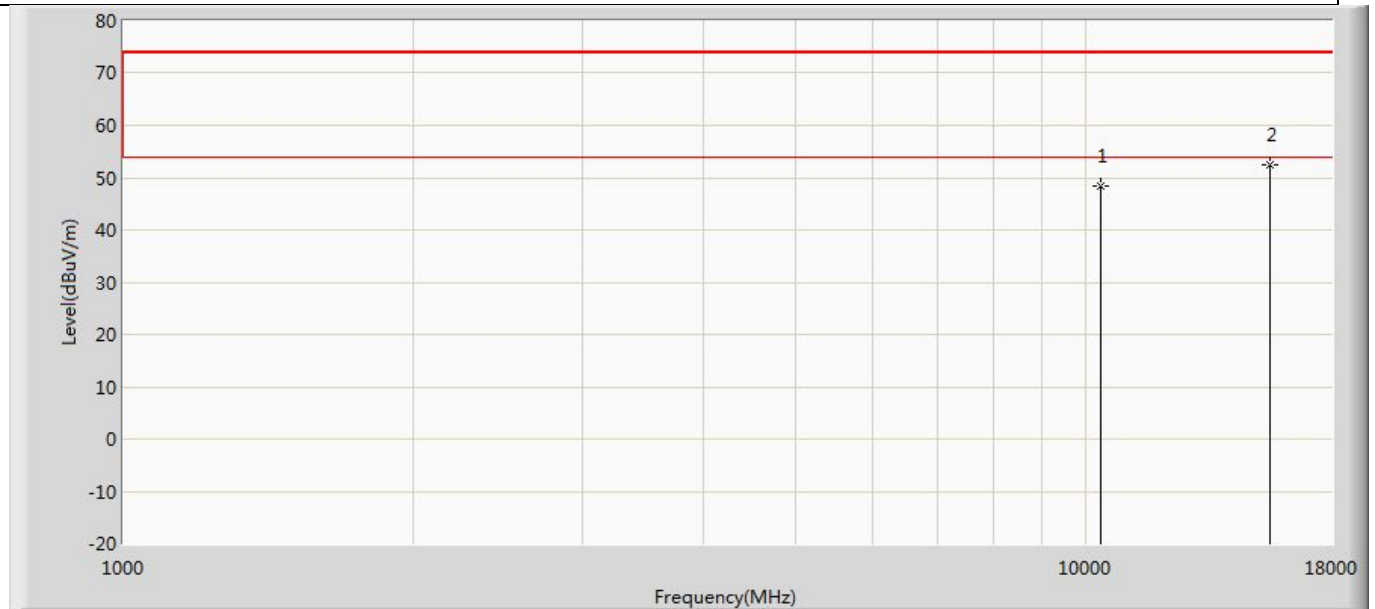


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.384	51.782	-25.616	74.000	-3.399	PK
2	*	15540.000	52.418	51.192	-21.582	74.000	1.226	PK

Profile: 2360091R	Page No.: 147
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5220MHz by 802.11n(20MHz) with Ant1+Ant2	

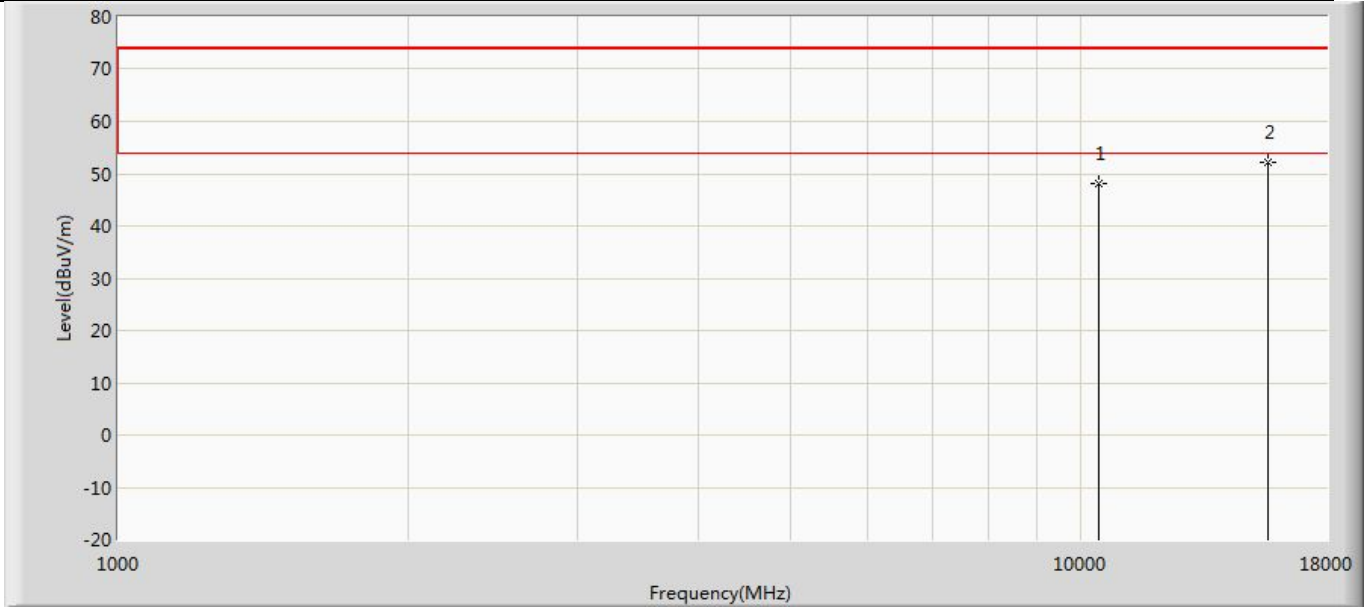


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	48.231	51.520	-25.769	74.000	-3.288	PK
2	*	15660.000	52.230	51.038	-21.770	74.000	1.192	PK

Profile: 2360091R	Page No.: 148
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5220MHz by 802.11n(20MHz) with Ant1+Ant2	

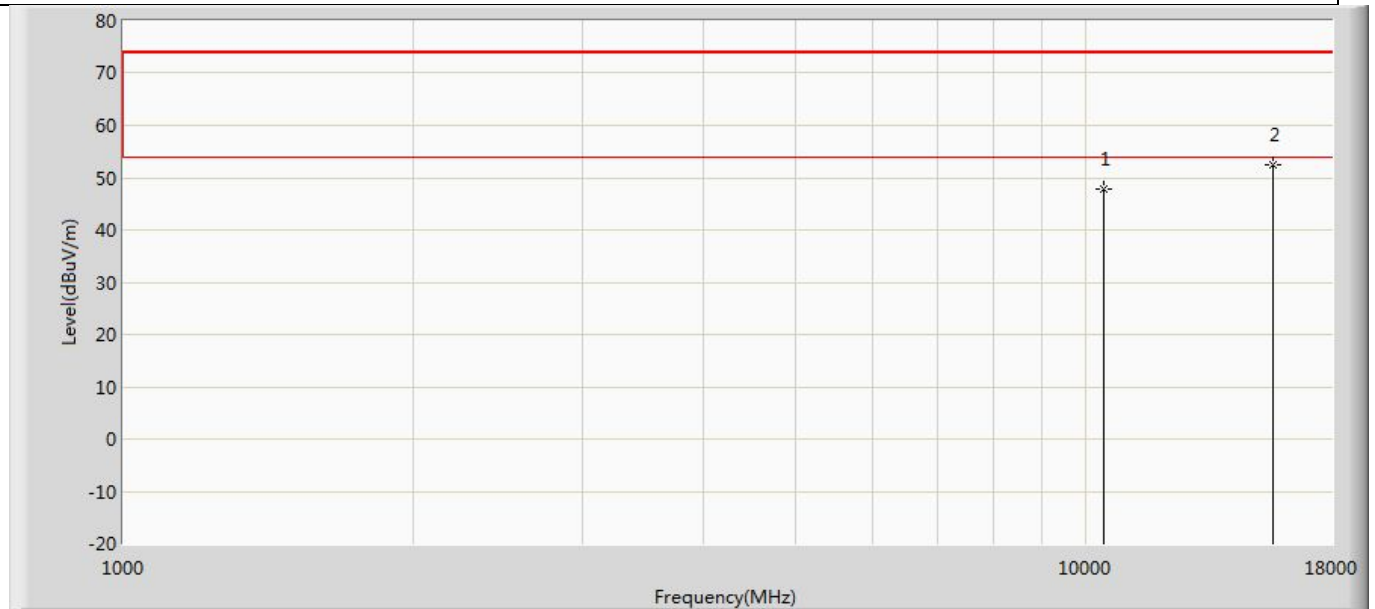


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	47.746	51.035	-26.254	74.000	-3.288	PK
2	*	15660.000	52.469	51.277	-21.531	74.000	1.192	PK

Profile: 2360091R	Page No.: 149
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5240MHz by 802.11n(20MHz) with Ant1+Ant2	

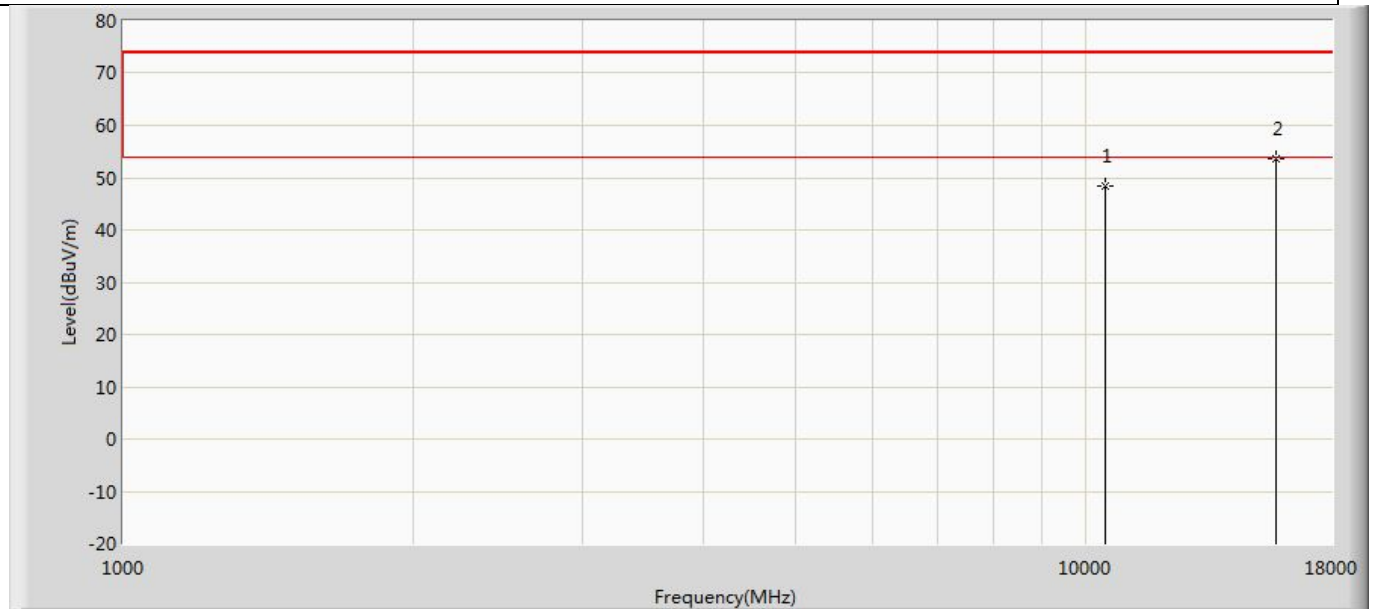


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	48.475	51.740	-25.525	74.000	-3.265	PK
2	*	15720.000	53.666	52.015	-20.334	74.000	1.651	PK

Profile: 2360091R	Page No.: 150
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5240MHz by 802.11n(20MHz) with Ant1+Ant2	

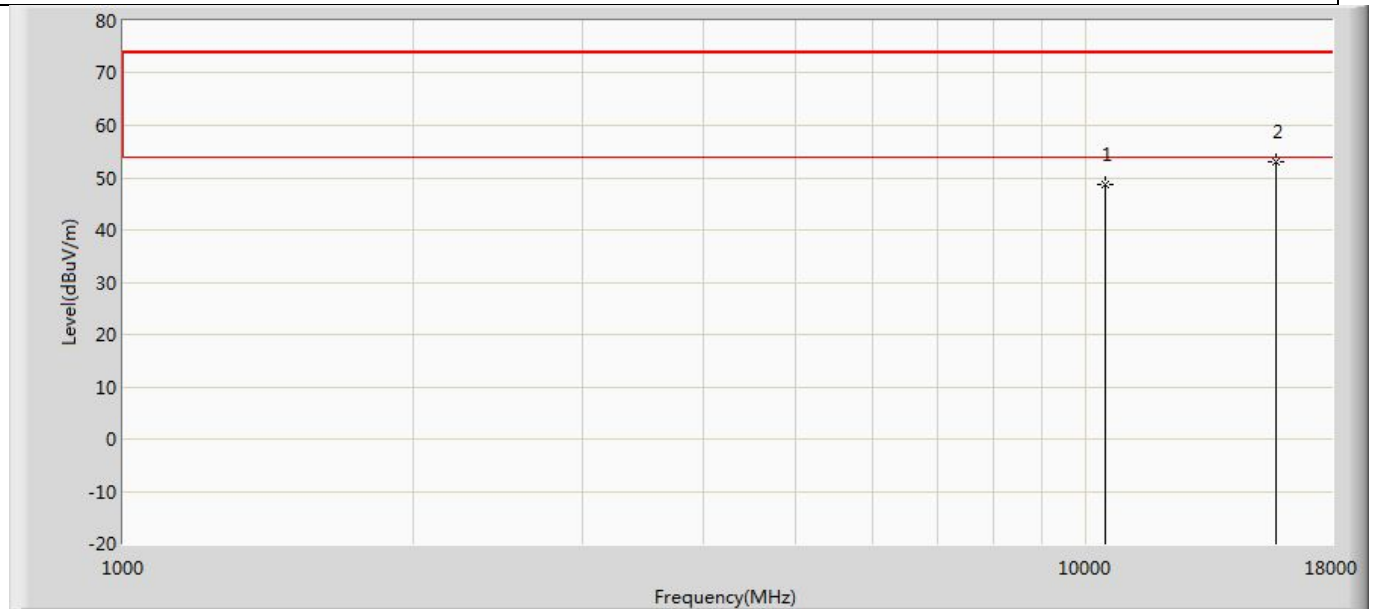


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	48.812	52.077	-25.188	74.000	-3.265	PK
2	*	15720.000	52.900	51.249	-21.100	74.000	1.651	PK

Profile: 2360091R	Page No.: 151
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5260MHz by 802.11n(20MHz) with Ant1+Ant2	

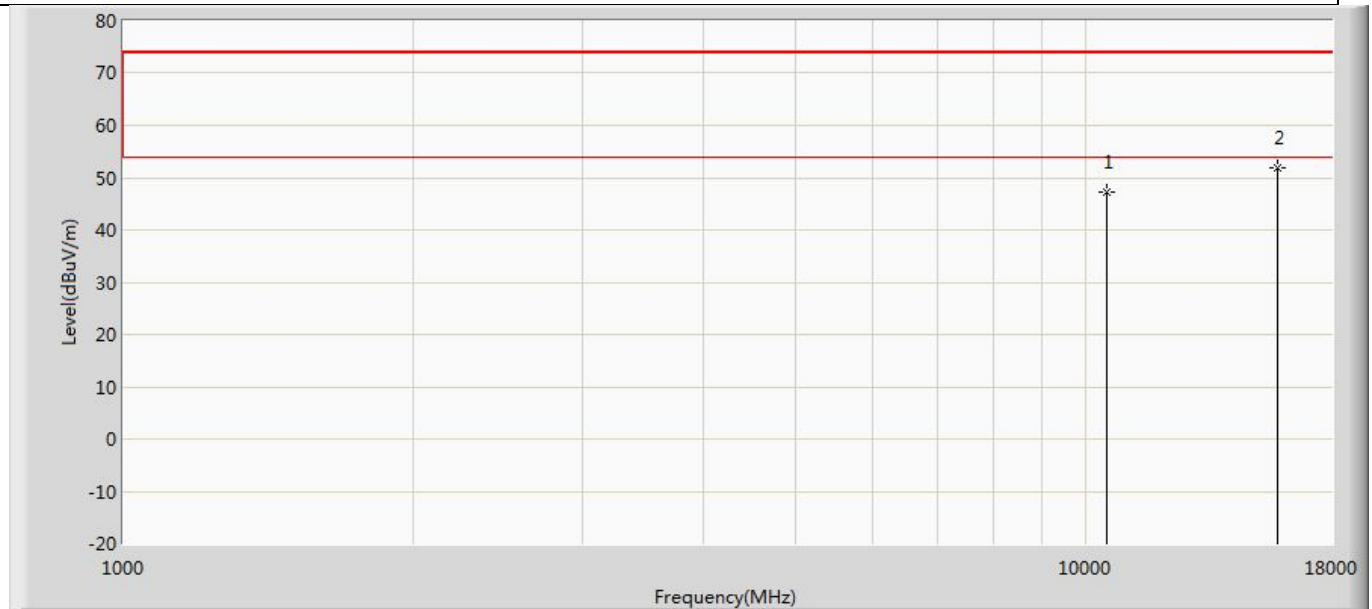


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.163	50.381	-26.837	74.000	-3.218	PK
2	*	15780.000	51.932	50.593	-22.068	74.000	1.339	PK

Profile: 2360091R	Page No.: 152
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5260MHz by 802.11n(20MHz) with Ant1+Ant2	

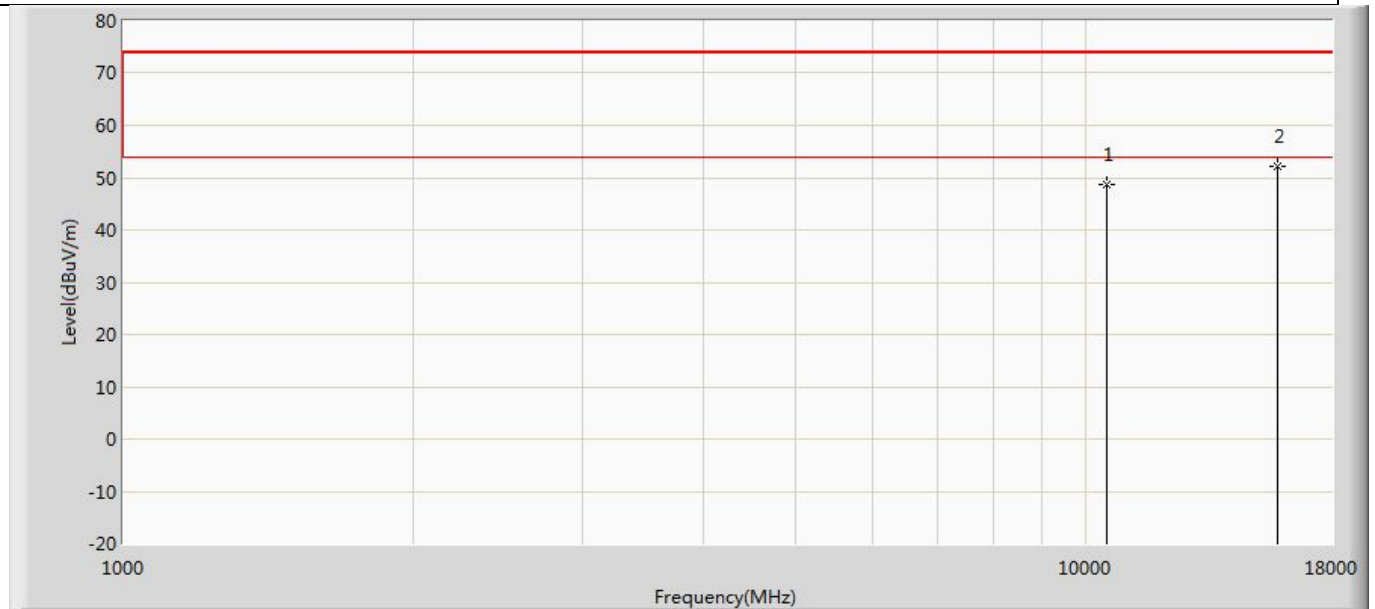


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	48.597	51.815	-25.403	74.000	-3.218	PK
2	*	15780.000	52.114	50.775	-21.886	74.000	1.339	PK

Profile: 2360091R	Page No.: 153
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5300MHz by 802.11n(20MHz) with Ant1+Ant2	

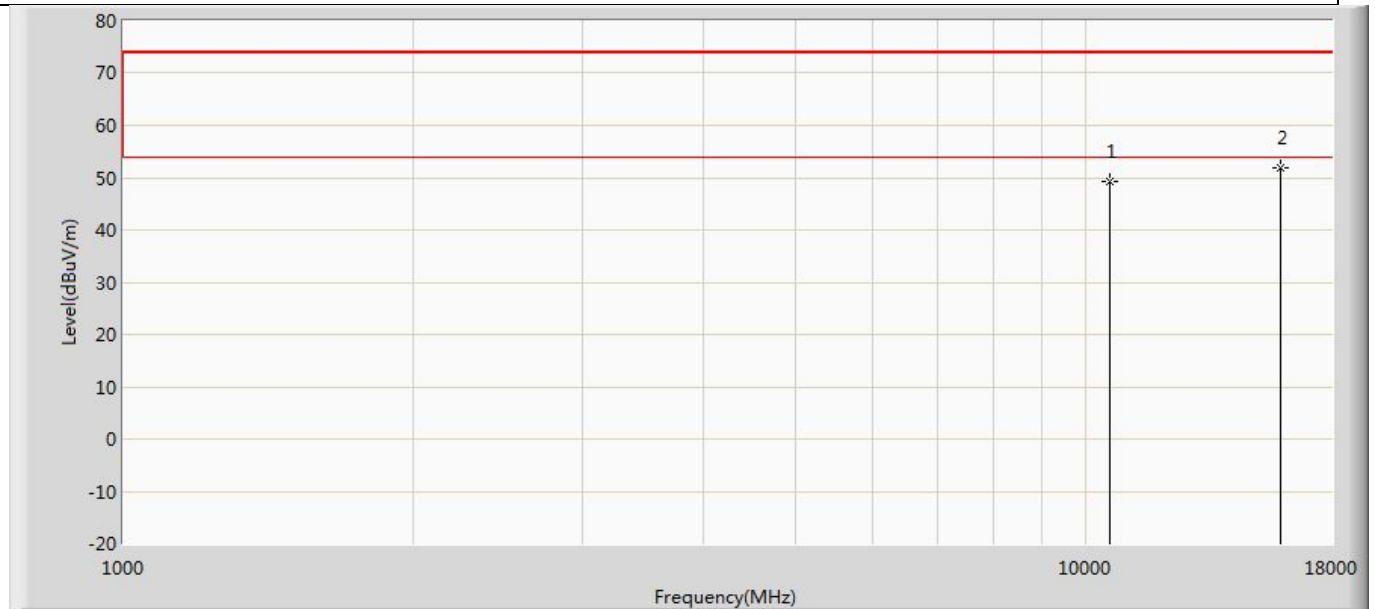


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	49.319	51.984	-24.681	74.000	-2.665	PK
2	*	15900.000	51.849	49.800	-22.151	74.000	2.049	PK

Profile: 2360091R	Page No.: 154
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5300MHz by 802.11n(20MHz) with Ant1+Ant2	

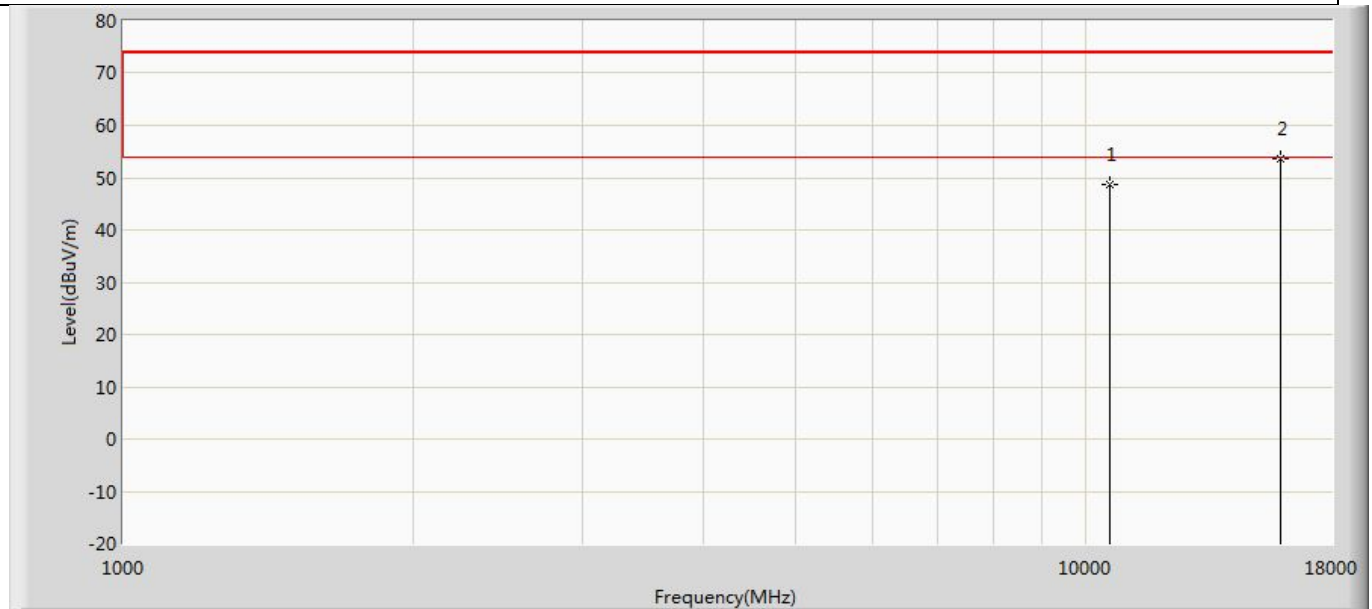


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	48.739	51.404	-25.261	74.000	-2.665	PK
2	*	15900.000	53.513	51.464	-20.487	74.000	2.049	PK

Profile: 2360091R	Page No.: 155
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) with Ant1+Ant2	

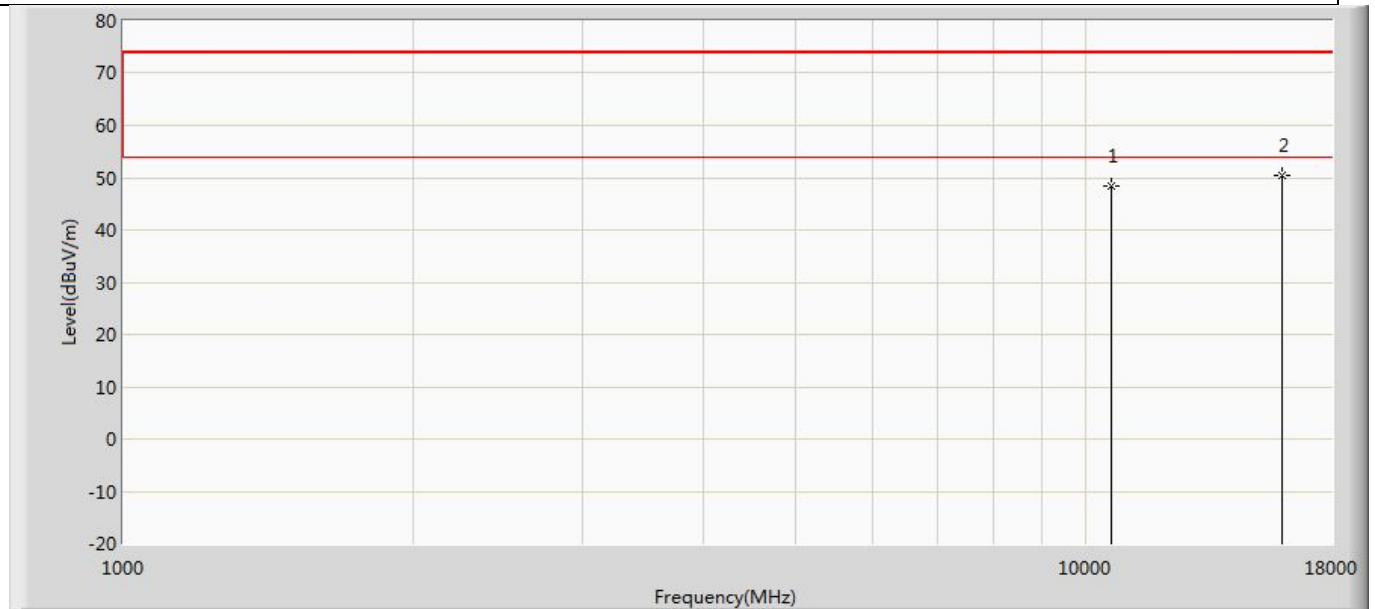


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	48.299	51.618	-25.701	74.000	-3.319	PK
2	*	15960.000	50.351	49.285	-23.649	74.000	1.066	PK

Profile: 2360091R	Page No.: 156
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5320MHz by 802.11n(20MHz) with Ant1+Ant2	

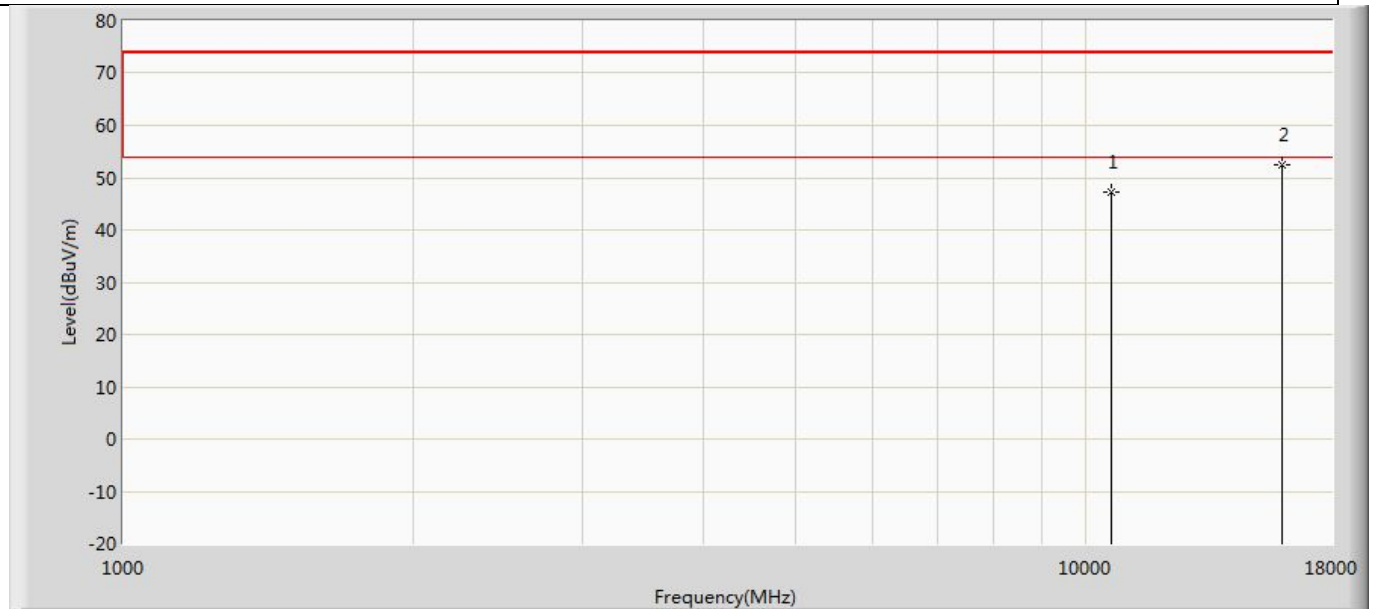


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	47.341	50.660	-26.659	74.000	-3.319	PK
2	*	15960.000	52.383	51.317	-21.617	74.000	1.066	PK

Profile: 2360091R	Page No.: 157
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) with Ant1+Ant2	

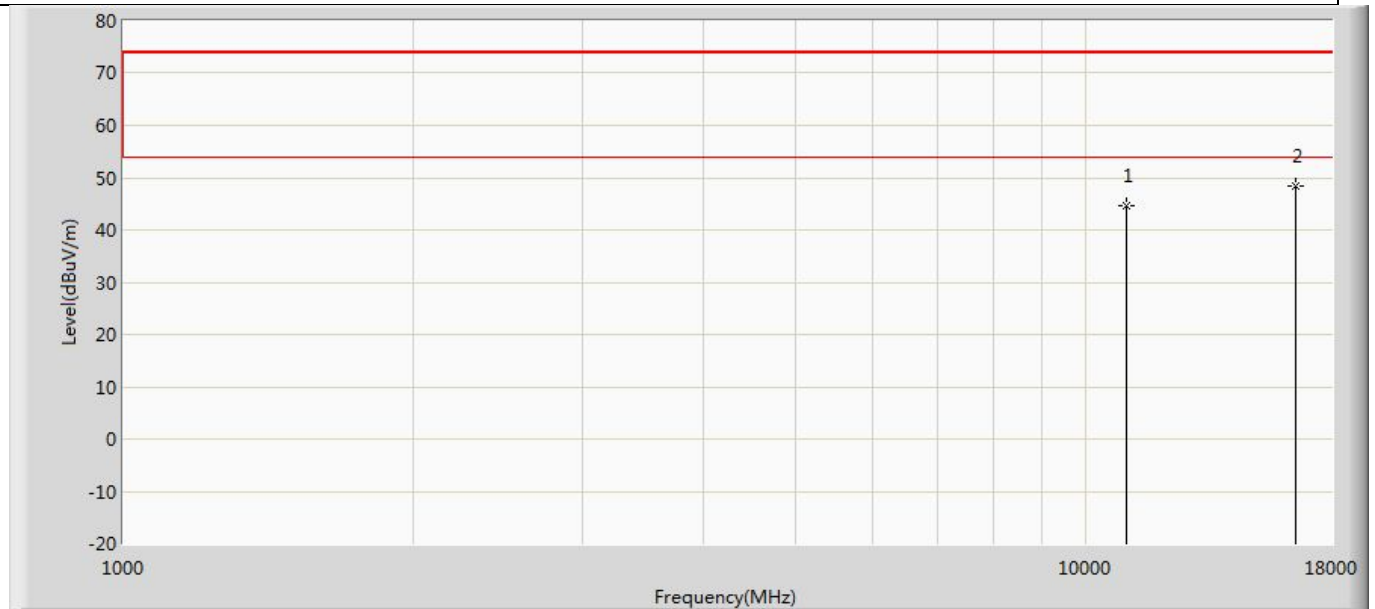


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	44.676	51.005	-29.324	74.000	-6.329	PK
2	*	16500.000	48.331	50.503	-25.669	74.000	-2.172	PK

Profile: 2360091R	Page No.: 158
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5500MHz by 802.11n(20MHz) with Ant1+Ant2	

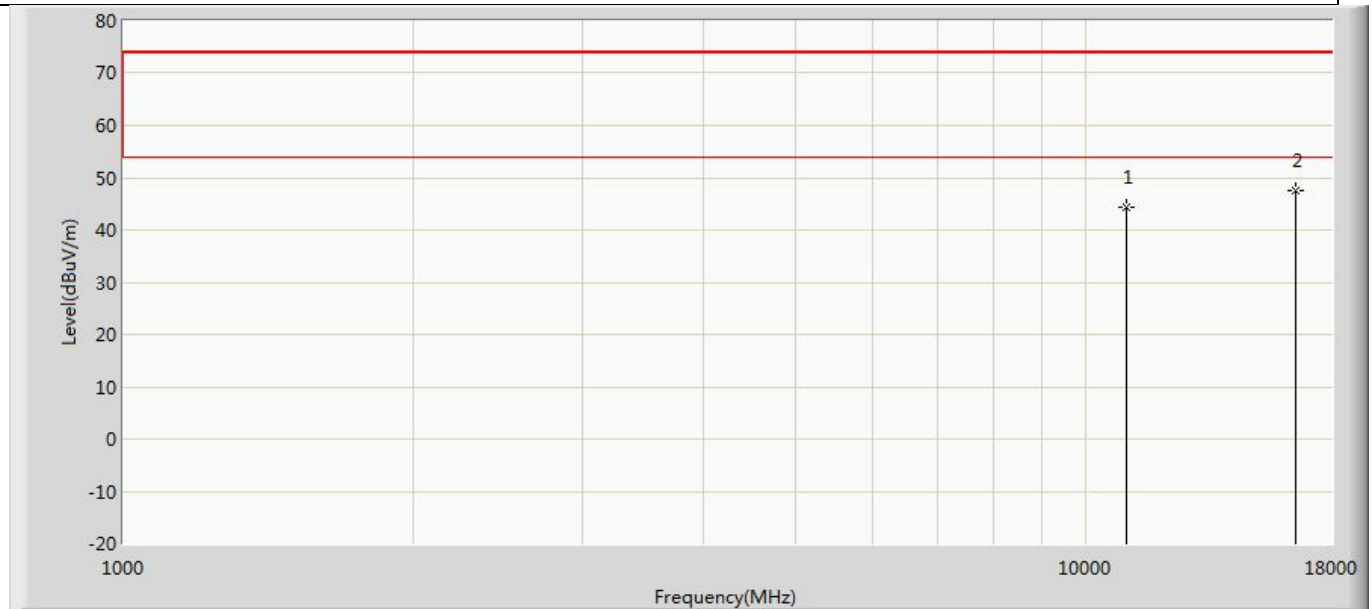


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11000.000	44.330	50.659	-29.670	74.000	-6.329	PK
2	*	16500.000	47.679	49.851	-26.321	74.000	-2.172	PK

Profile: 2360091R	Page No.: 159
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5580MHz by 802.11n(20MHz) with Ant1+Ant2	

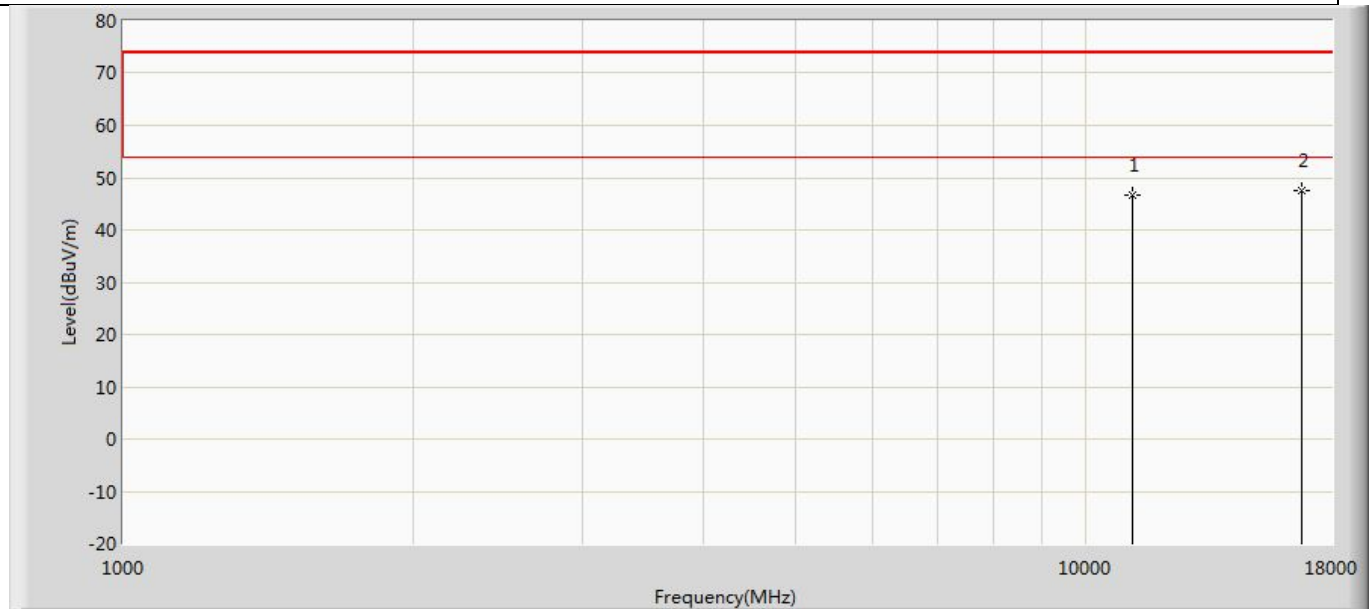


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11160.000	46.751	52.199	-27.249	74.000	-5.447	PK
2	*	16740.000	47.672	50.288	-26.328	74.000	-2.616	PK

Profile: 2360091R	Page No.: 160
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5580MHz by 802.11n(20MHz) with Ant1+Ant2	

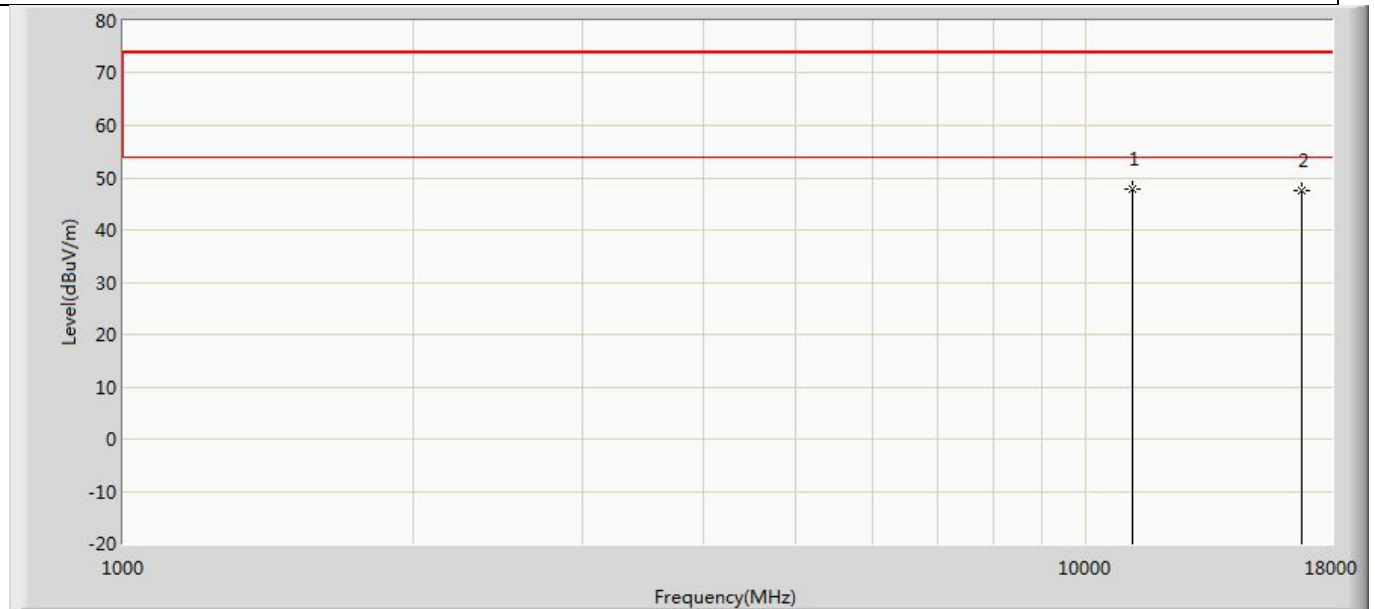


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	11160.000	47.707	53.155	-26.293	74.000	-5.447	PK
2		16740.000	47.489	50.105	-26.511	74.000	-2.616	PK

Profile: 2360091R	Page No.: 161
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5700MHz by 802.11n(20MHz) with Ant1+Ant2	

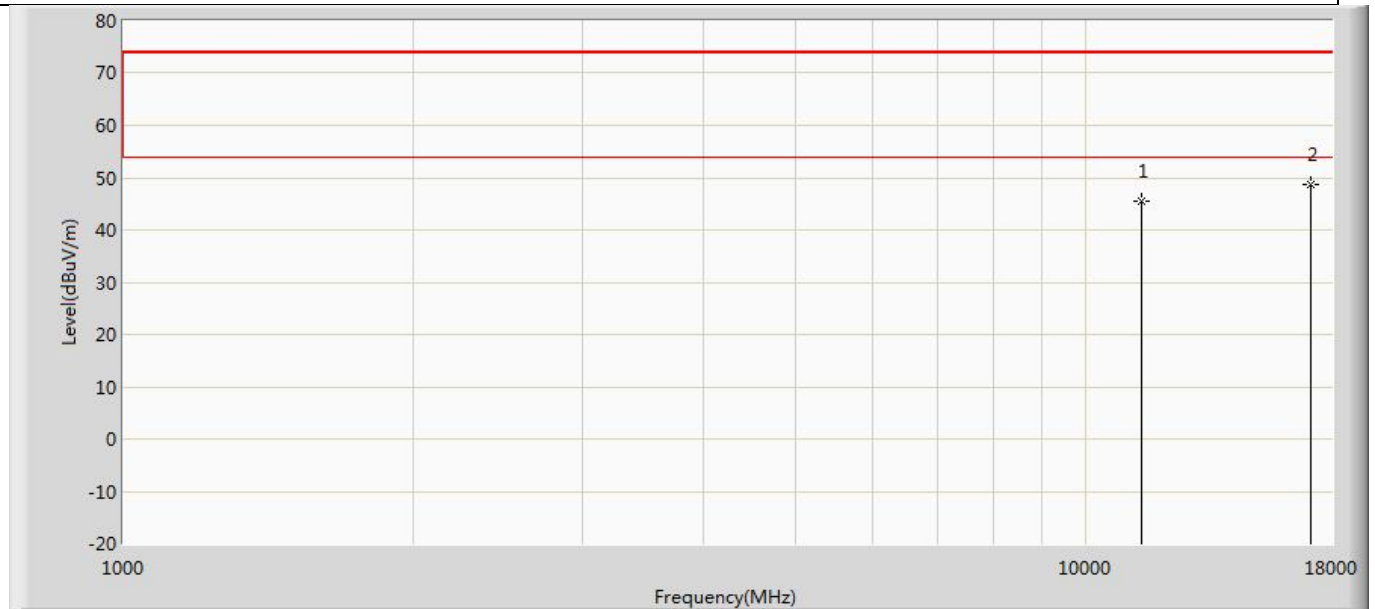


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.443	50.356	-28.557	74.000	-4.914	PK
2	*	17100.000	48.752	50.696	-25.248	74.000	-1.944	PK

Profile: 2360091R	Page No.: 162
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5700MHz by 802.11n(20MHz) with Ant1+Ant2	

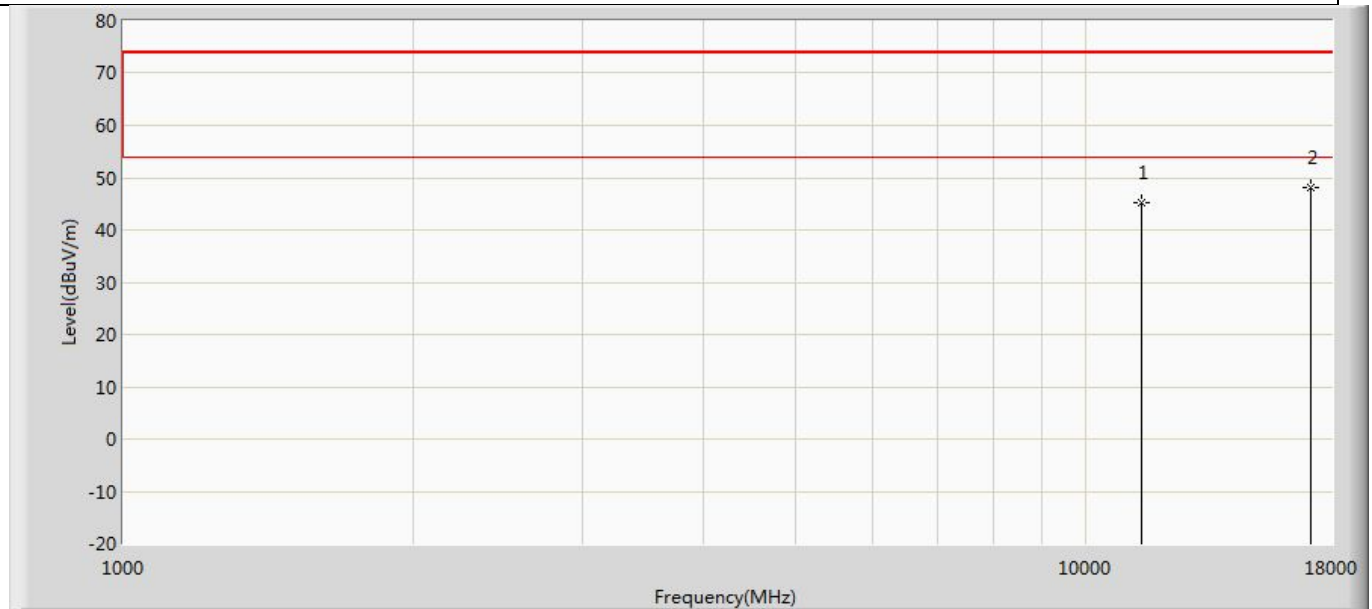


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11400.000	45.188	50.101	-28.812	74.000	-4.914	PK
2	*	17100.000	48.136	50.080	-25.864	74.000	-1.944	PK

Profile: 2360091R	Page No.: 47
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5745MHz by 802.11n(20MHz) with Ant1+Ant2	

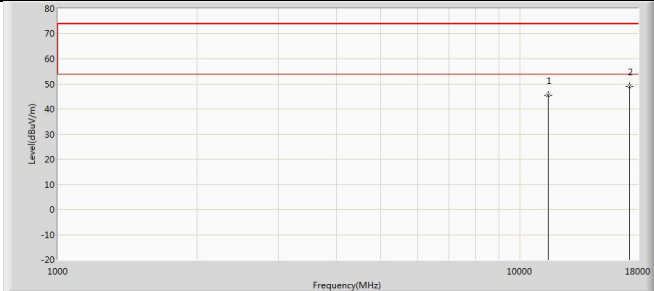


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	45.382	50.572	-28.618	74.000	-5.190	PK
2	*	17235.000	49.115	51.120	-24.885	74.000	-2.005	PK

Profile: 2360091R	Page No.: 48
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5745MHz by 802.11n(20MHz) with Ant1+Ant2	

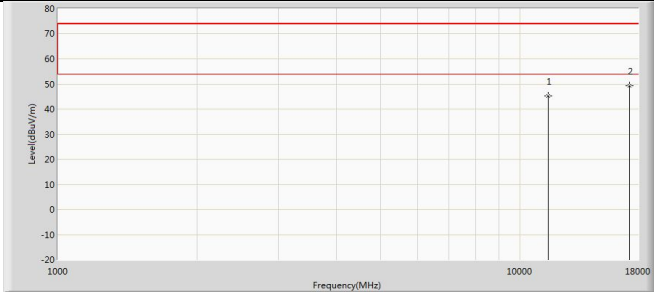


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11490.000	45.284	50.474	-28.716	74.000	-5.190	PK
2	*	17235.000	49.372	51.377	-24.628	74.000	-2.005	PK

Profile: 2360091R	Page No.: 49
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5785MHz by 802.11n(20MHz) with Ant1+Ant2	

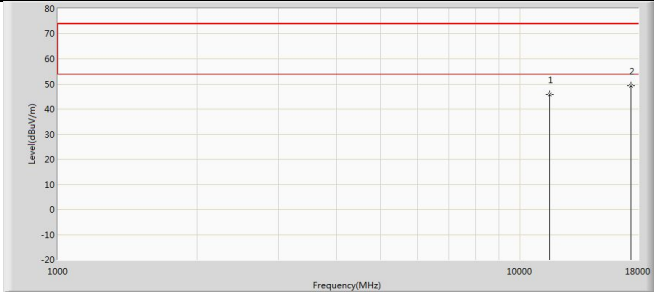


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	45.804	50.233	-28.196	74.000	-4.429	PK
2	*	17355.000	49.301	51.036	-24.699	74.000	-1.735	PK

Profile: 2360091R	Page No.: 50
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5785MHz by 802.11n(20MHz) with Ant1+Ant2	

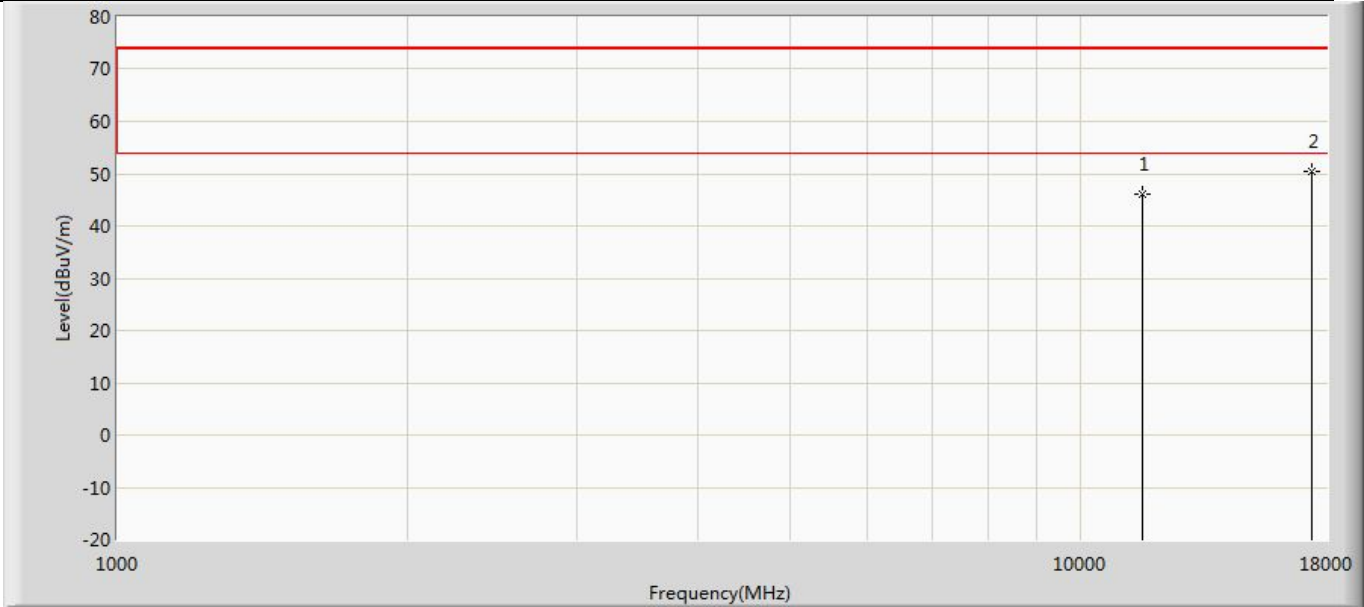


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11570.000	46.157	50.586	-27.843	74.000	-4.429	PK
2	*	17355.000	50.333	52.068	-23.667	74.000	-1.735	PK

Profile: 2360091R	Page No.: 51
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5825MHz by 802.11n(20MHz) with Ant1+Ant2	

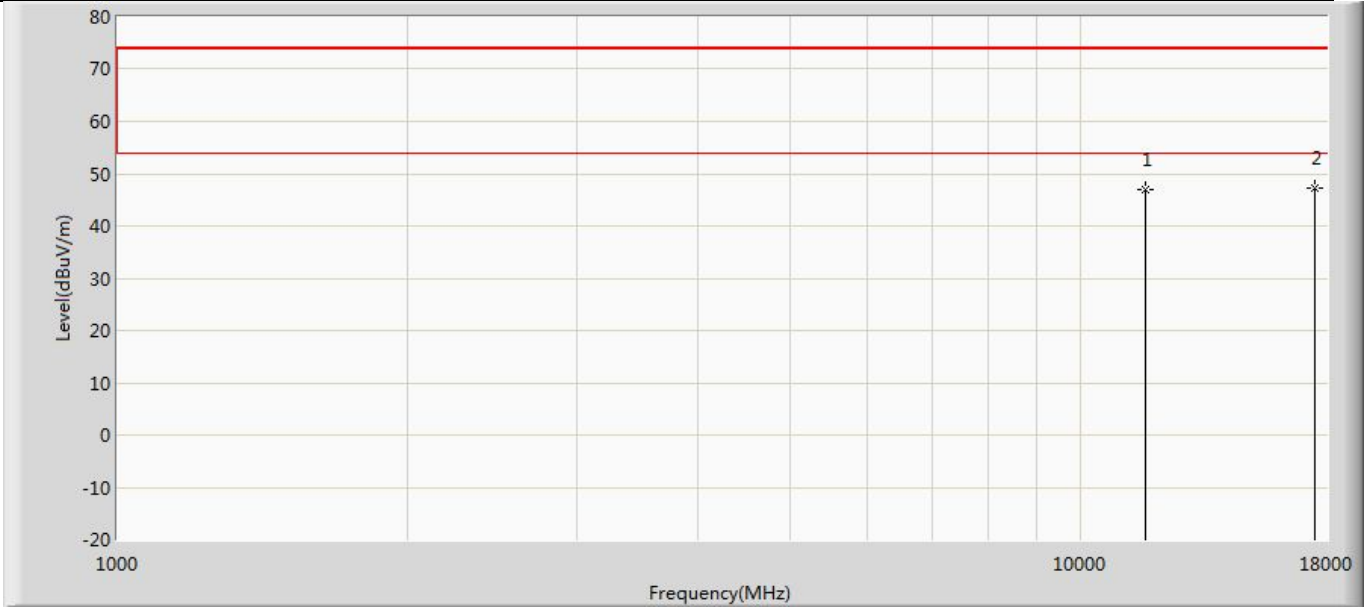


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.996	51.344	-27.004	74.000	-4.348	PK
2	*	17475.000	47.365	49.772	-26.635	74.000	-2.407	PK

Profile: 2360091R	Page No.: 52
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 2: Transmit at 5825MHz by 802.11n(20MHz) with Ant1+Ant2	

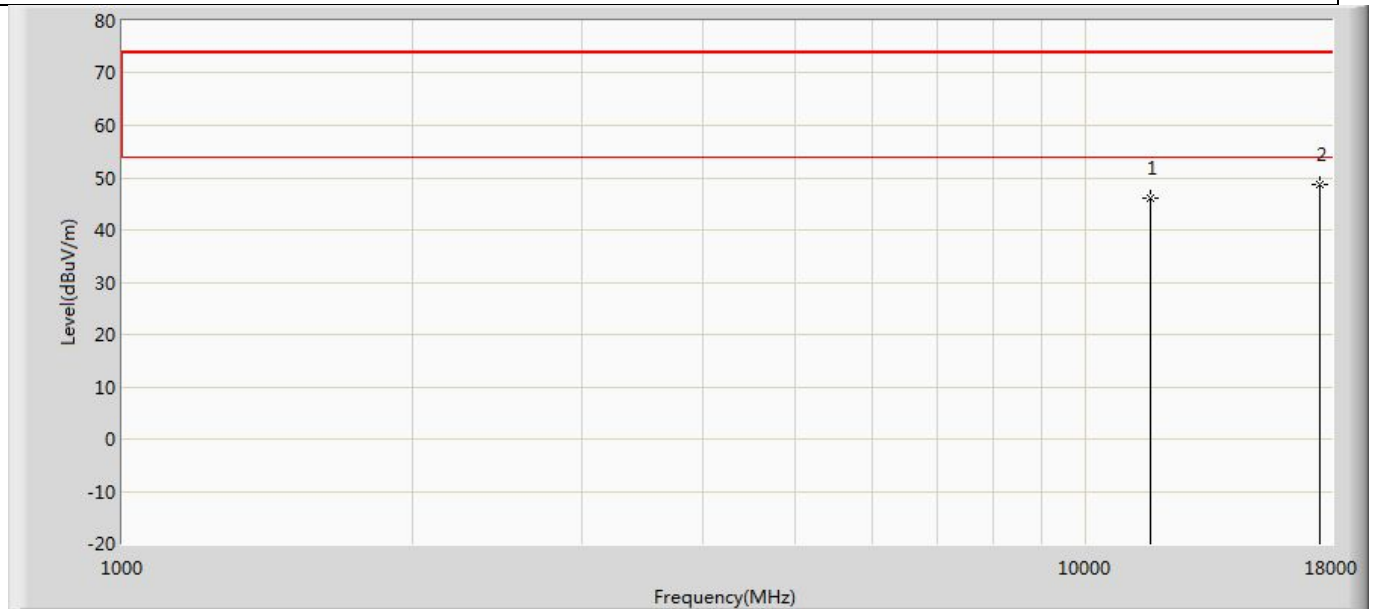


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11650.000	46.038	50.386	-27.962	74.000	-4.348	PK
2	*	17475.000	48.732	51.139	-25.268	74.000	-2.407	PK

Profile: 2360091R	Page No.: 163
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) with Ant1+Ant2	

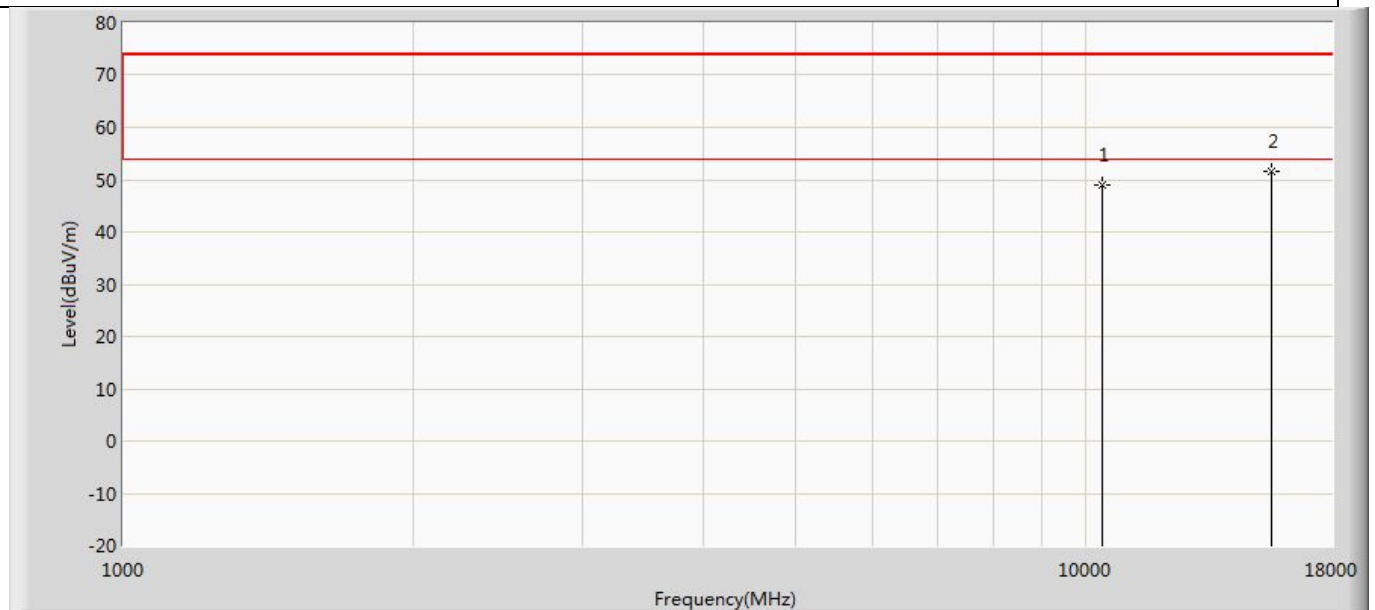


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	48.861	52.063	-25.139	74.000	-3.202	PK
2	*	15570.000	51.736	51.236	-22.264	74.000	0.501	PK

Profile: 2360091R	Page No.: 164
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5190MHz by 802.11n(40MHz) with Ant1+Ant2	

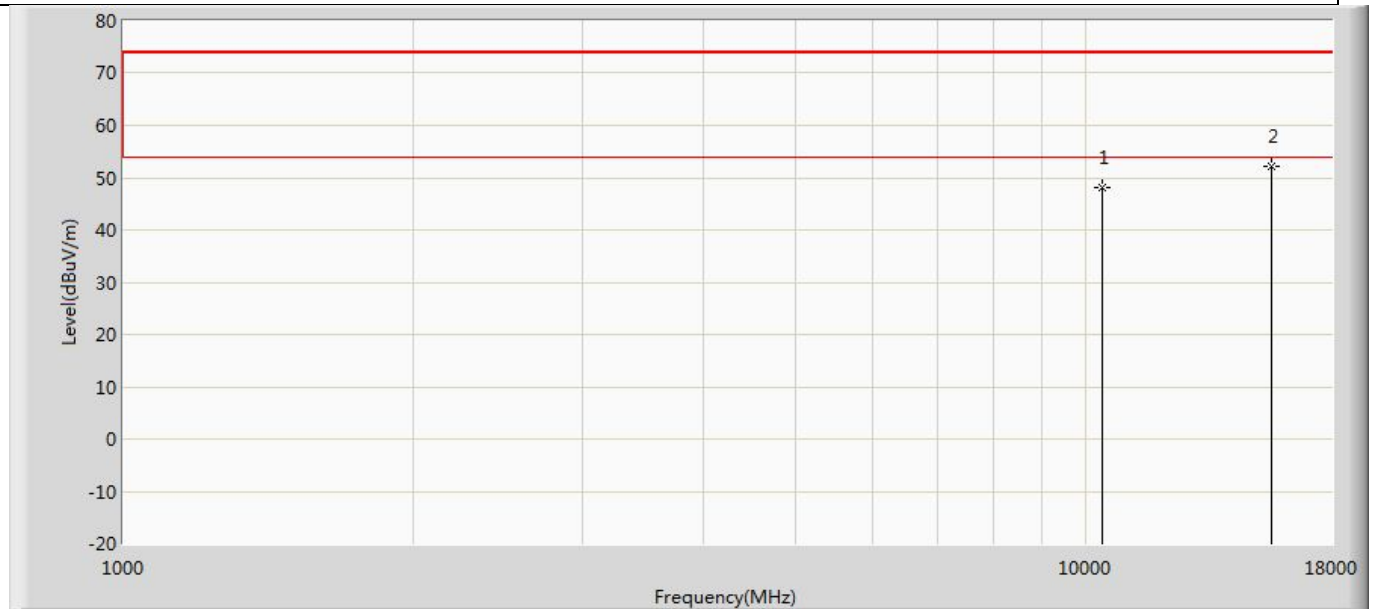


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10380.000	48.116	51.318	-25.884	74.000	-3.202	PK
2	*	15570.000	52.095	51.595	-21.905	74.000	0.501	PK

Profile: 2360091R	Page No.: 165
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5230MHz by 802.11n(40MHz) with Ant1+Ant2	

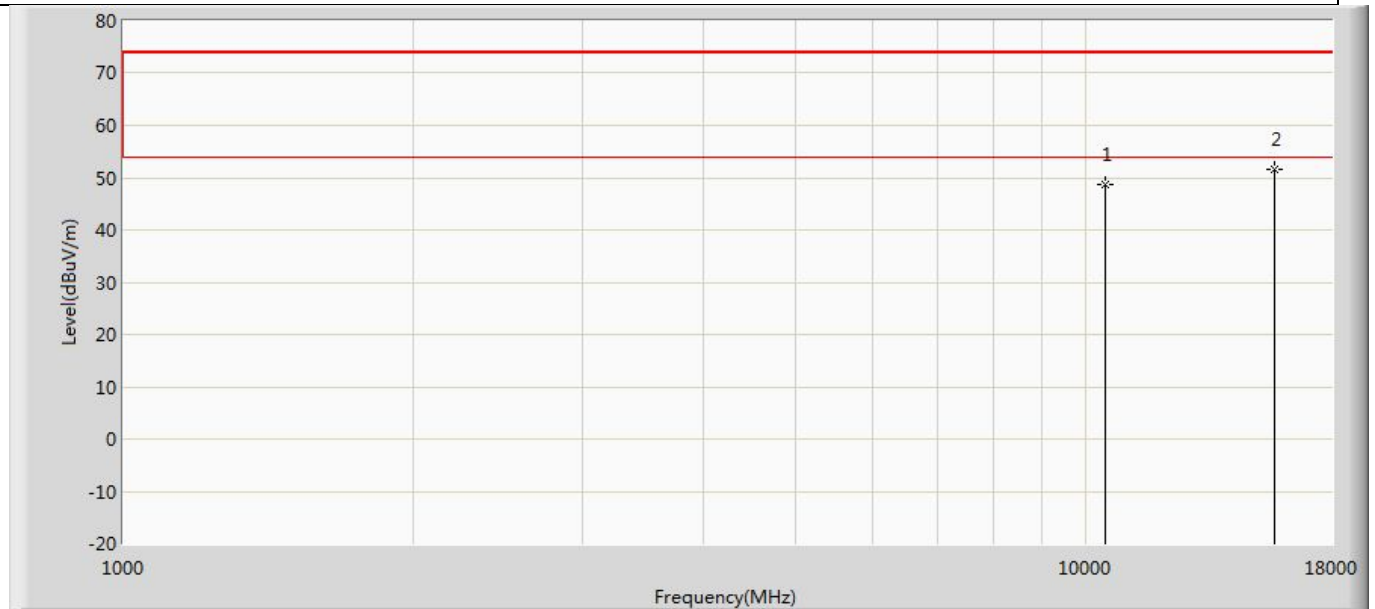


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	48.810	52.140	-25.190	74.000	-3.331	PK
2	*	15690.000	51.537	51.105	-22.463	74.000	0.431	PK

Profile: 2360091R	Page No.: 166
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5230MHz by 802.11n(40MHz) with Ant1+Ant2	

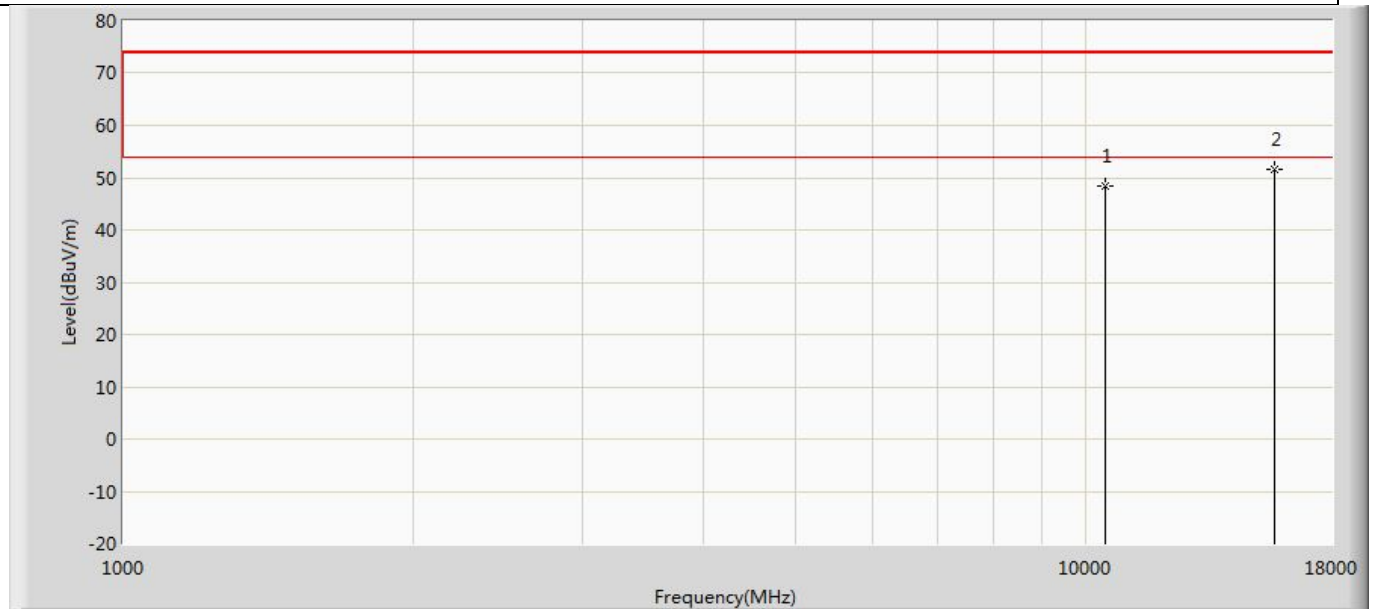


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10460.000	48.462	51.792	-25.538	74.000	-3.331	PK
2	*	15690.000	51.467	51.035	-22.533	74.000	0.431	PK

Profile: 2360091R	Page No.: 167
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5270MHz by 802.11n(40MHz) with Ant1+Ant2	

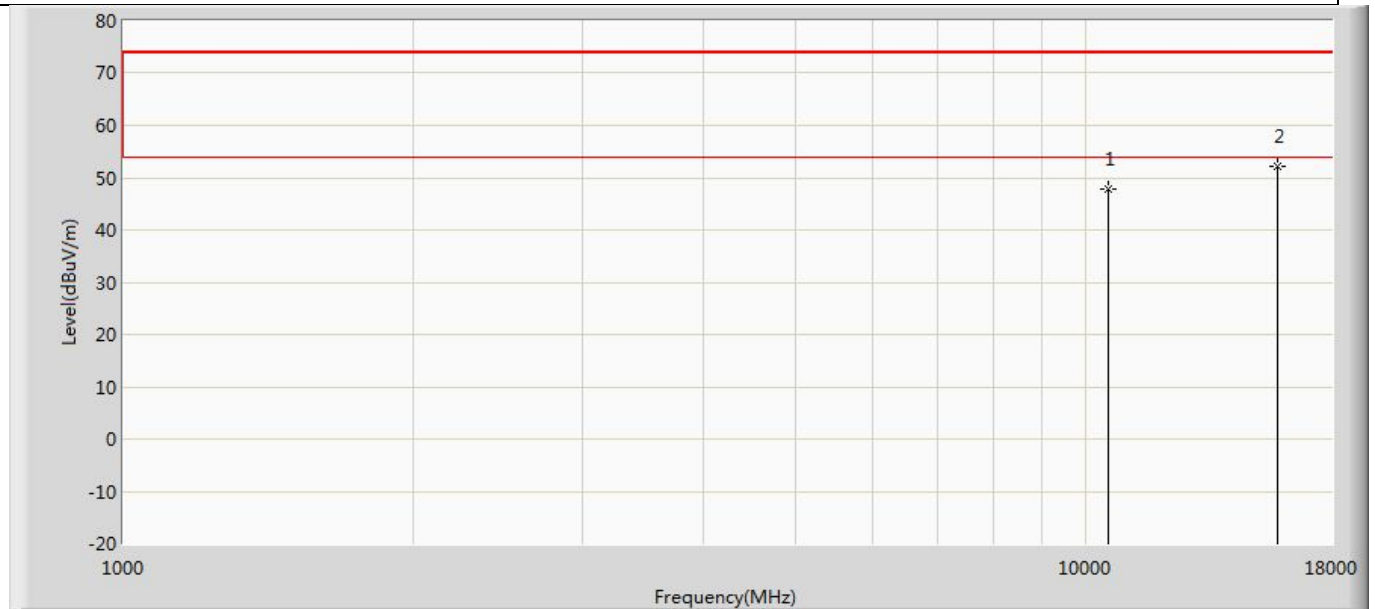


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	47.842	51.028	-26.158	74.000	-3.185	PK
2	*	15810.000	52.171	51.048	-21.829	74.000	1.123	PK

Profile: 2360091R	Page No.: 168
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5270MHz by 802.11n(40MHz) with Ant1+Ant2	

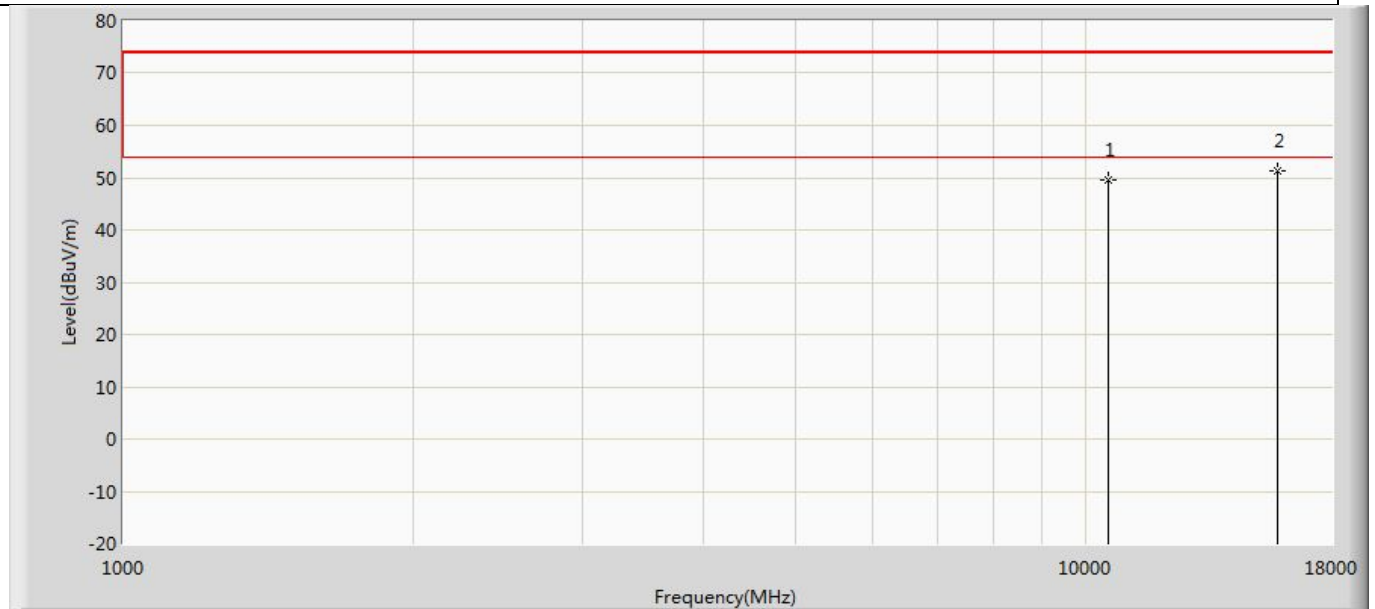


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10540.000	49.496	52.682	-24.504	74.000	-3.185	PK
2	*	15810.000	51.360	50.237	-22.640	74.000	1.123	PK

Profile: 2360091R	Page No.: 169
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) with Ant1+Ant2	

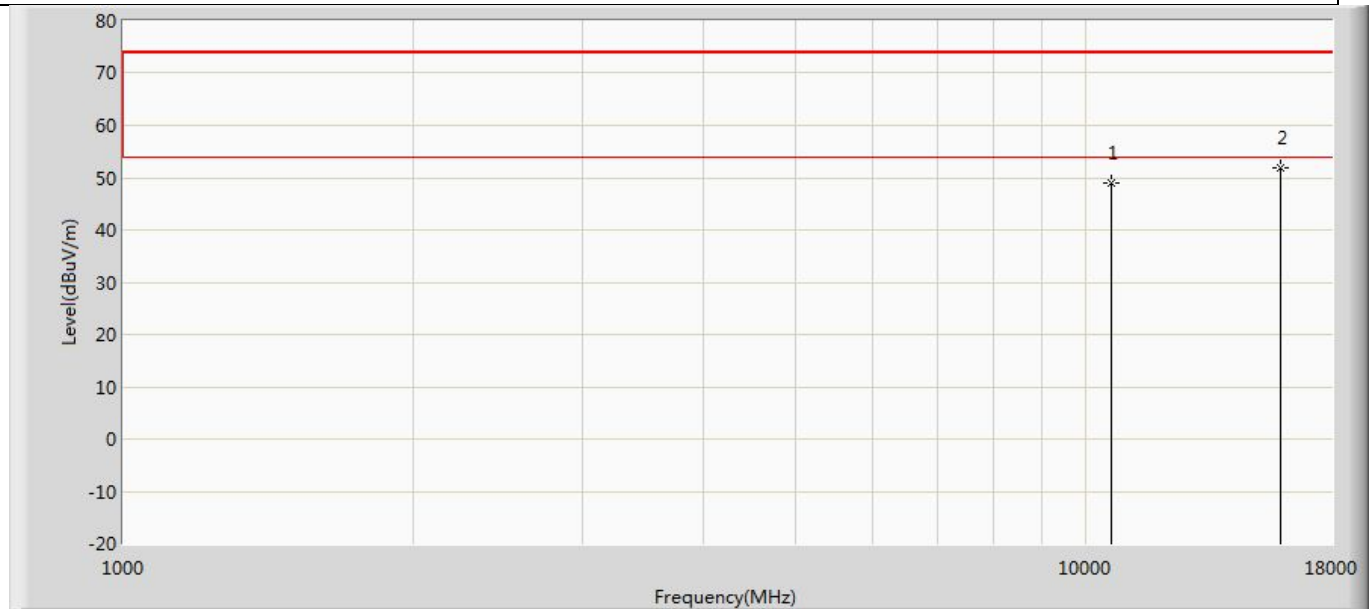


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	48.963	52.139	-25.037	74.000	-3.176	PK
2	*	15930.000	51.834	50.686	-22.166	74.000	1.148	PK

Profile: 2360091R	Page No.: 170
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5310MHz by 802.11n(40MHz) with Ant1+Ant2	

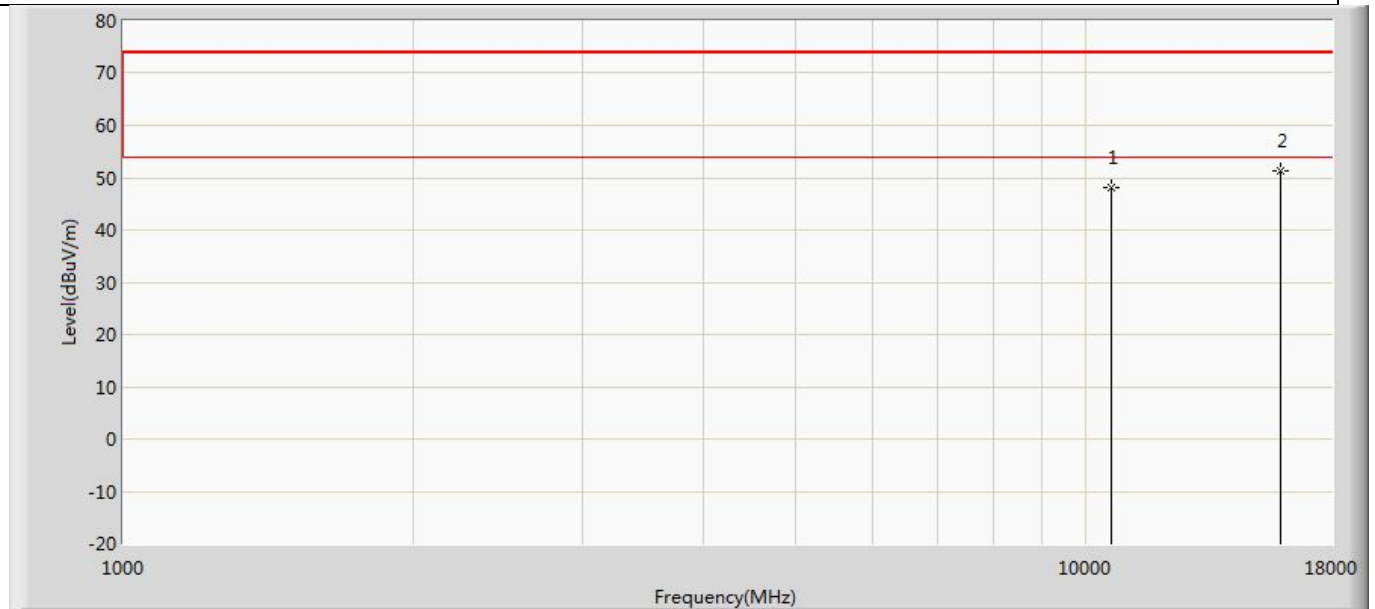


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10620.000	48.236	51.412	-25.764	74.000	-3.176	PK
2	*	15930.000	51.296	50.148	-22.704	74.000	1.148	PK

Profile: 2360091R	Page No.: 171
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) with Ant1+Ant2	

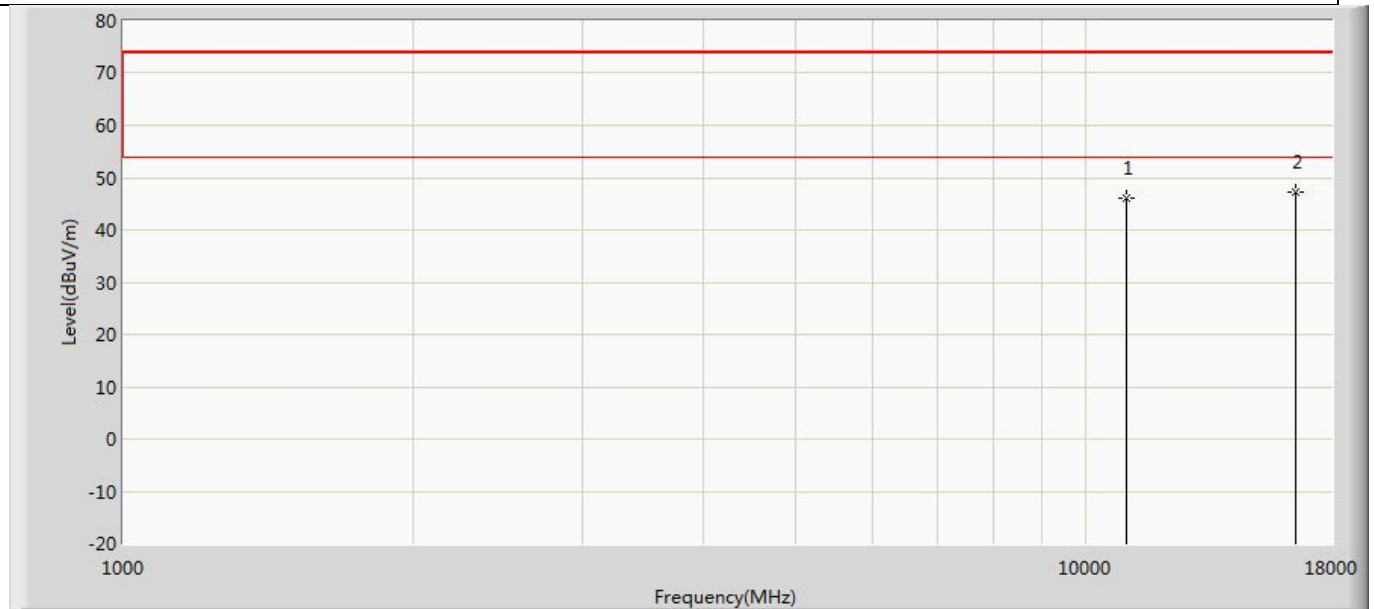


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	45.980	51.812	-28.020	74.000	-5.832	PK
2	*	16530.000	47.383	50.303	-26.617	74.000	-2.920	PK

Profile: 2360091R	Page No.: 172
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5510MHz by 802.11n(40MHz) with Ant1+Ant2	

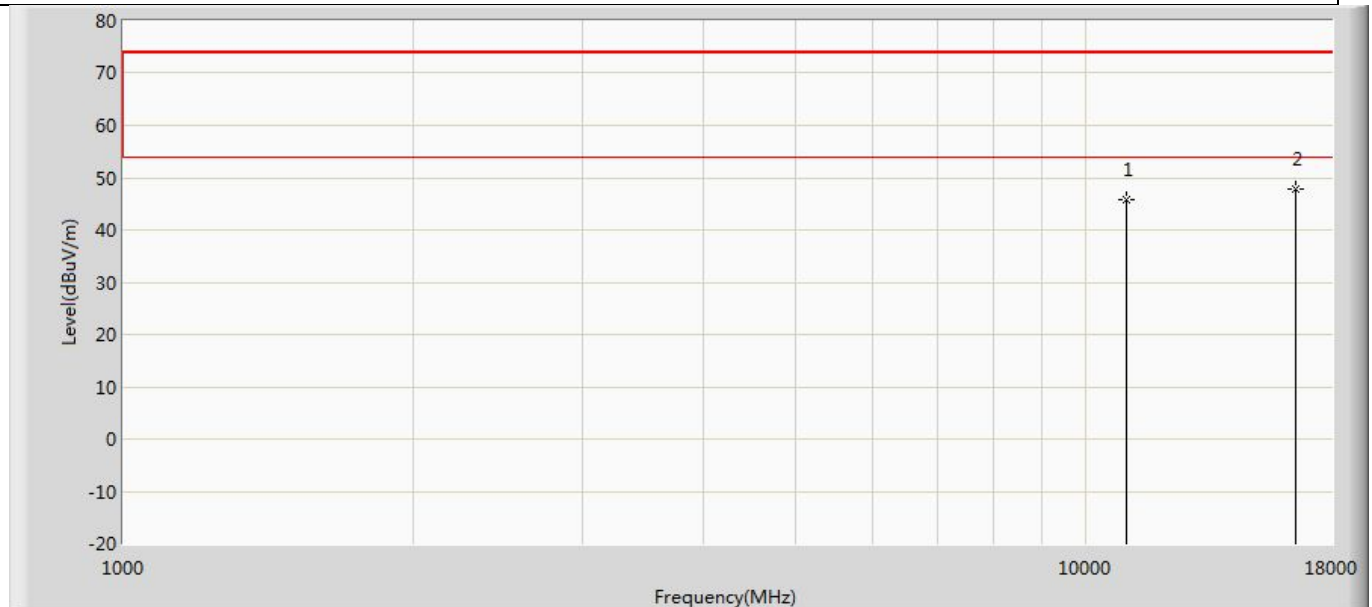


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11020.000	45.842	51.674	-28.158	74.000	-5.832	PK
2	*	16530.000	47.962	50.882	-26.038	74.000	-2.920	PK

Profile: 2360091R	Page No.: 173
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5590MHz by 802.11n(40MHz) with Ant1+Ant2	

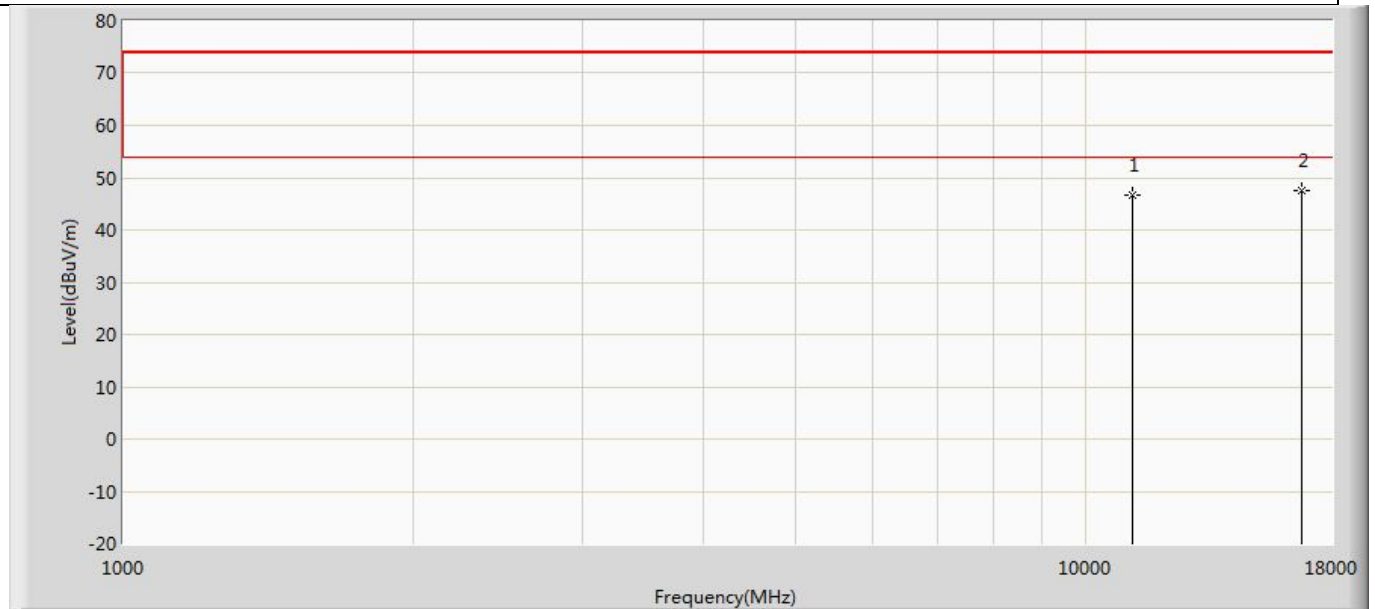


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	46.557	51.669	-27.443	74.000	-5.111	PK
2	*	16770.000	47.600	49.983	-26.400	74.000	-2.383	PK

Profile: 2360091R	Page No.: 174
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5590MHz by 802.11n(40MHz) with Ant1+Ant2	

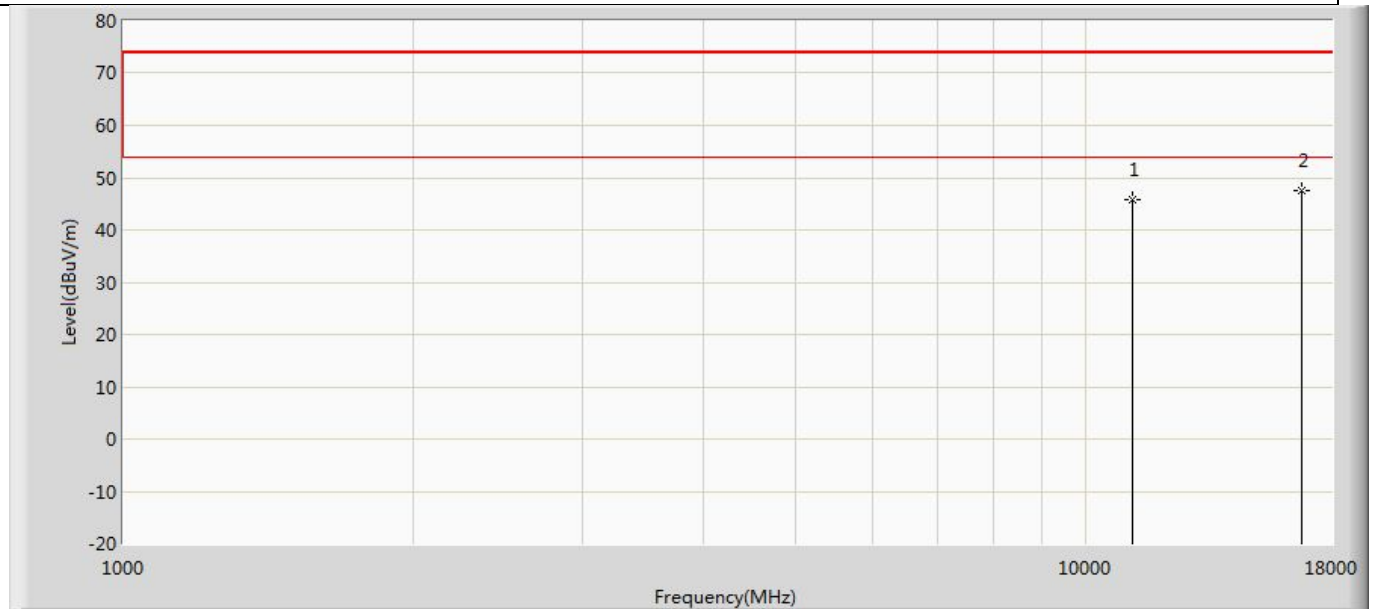


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11180.000	45.930	51.042	-28.070	74.000	-5.111	PK
2	*	16770.000	47.453	49.836	-26.547	74.000	-2.383	PK

Profile: 2360091R	Page No.: 175
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5670MHz by 802.11n(40MHz) with Ant1+Ant2	

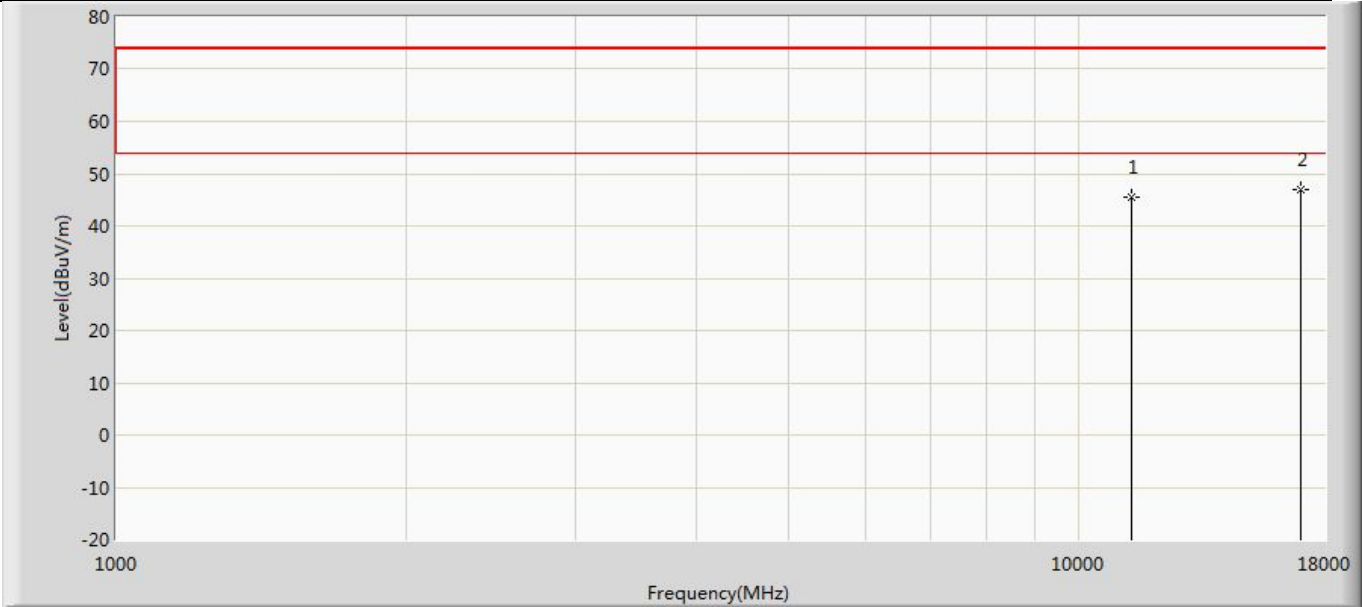


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.375	50.742	-28.625	74.000	-5.366	PK
2	*	17010.000	47.053	49.857	-26.947	74.000	-2.803	PK

Profile: 2360091R	Page No.: 176
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5670MHz by 802.11n(40MHz) with Ant1+Ant2	

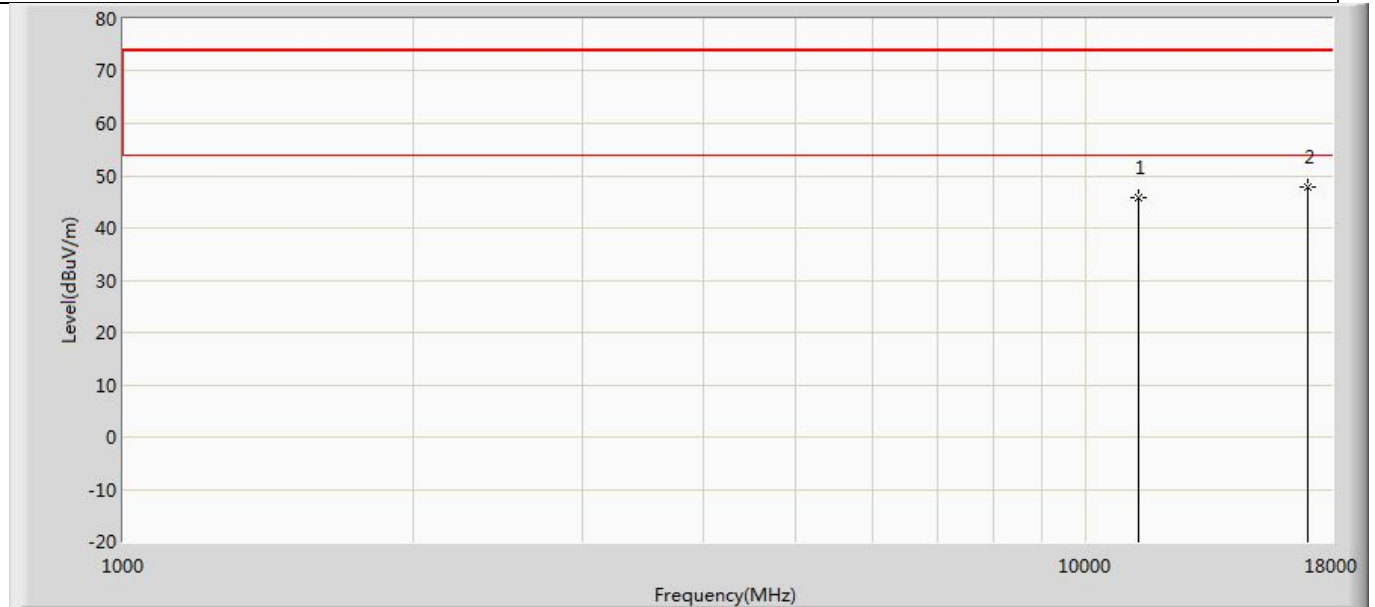


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11340.000	45.941	51.308	-28.059	74.000	-5.366	PK
2	*	17010.000	47.961	50.765	-26.039	74.000	-2.803	PK

Profile: 2360091R	Page No.: 53
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5755MHz by 802.11n(40MHz) with Ant1+Ant2	

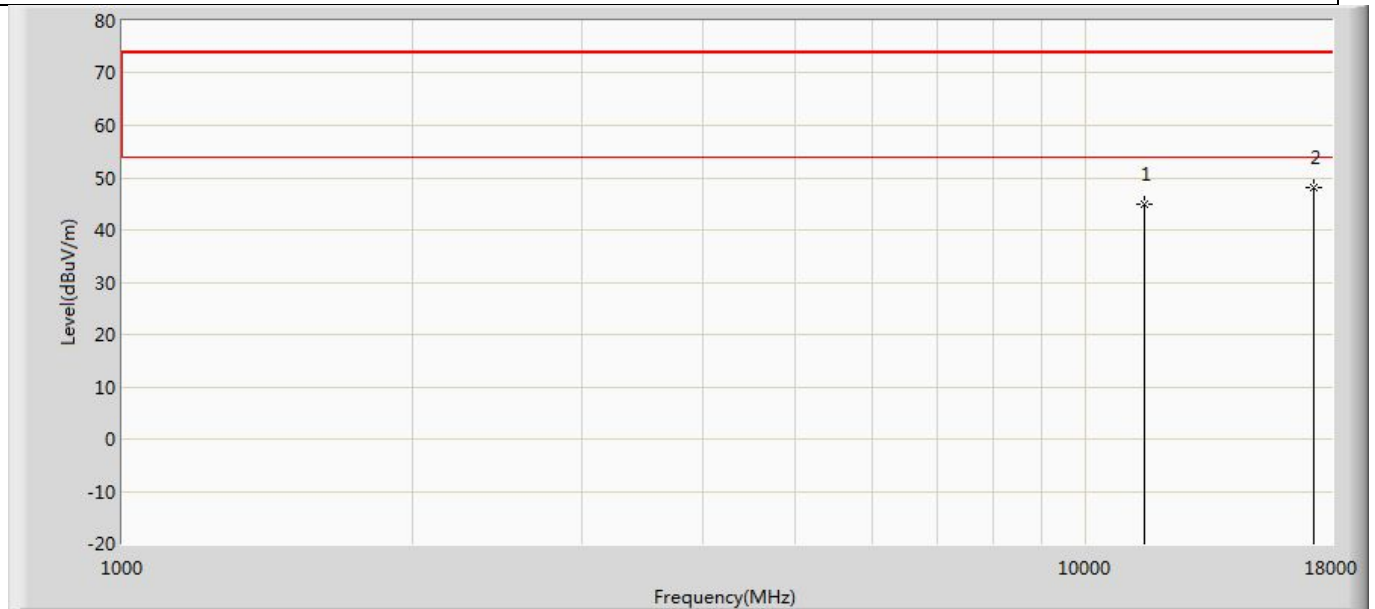


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	45.005	50.273	-28.995	74.000	-5.268	PK
2	*	17265.000	48.002	50.426	-25.998	74.000	-2.424	PK

Profile: 2360091R	Page No.: 54
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5755MHz by 802.11n(40MHz) with Ant1+Ant2	

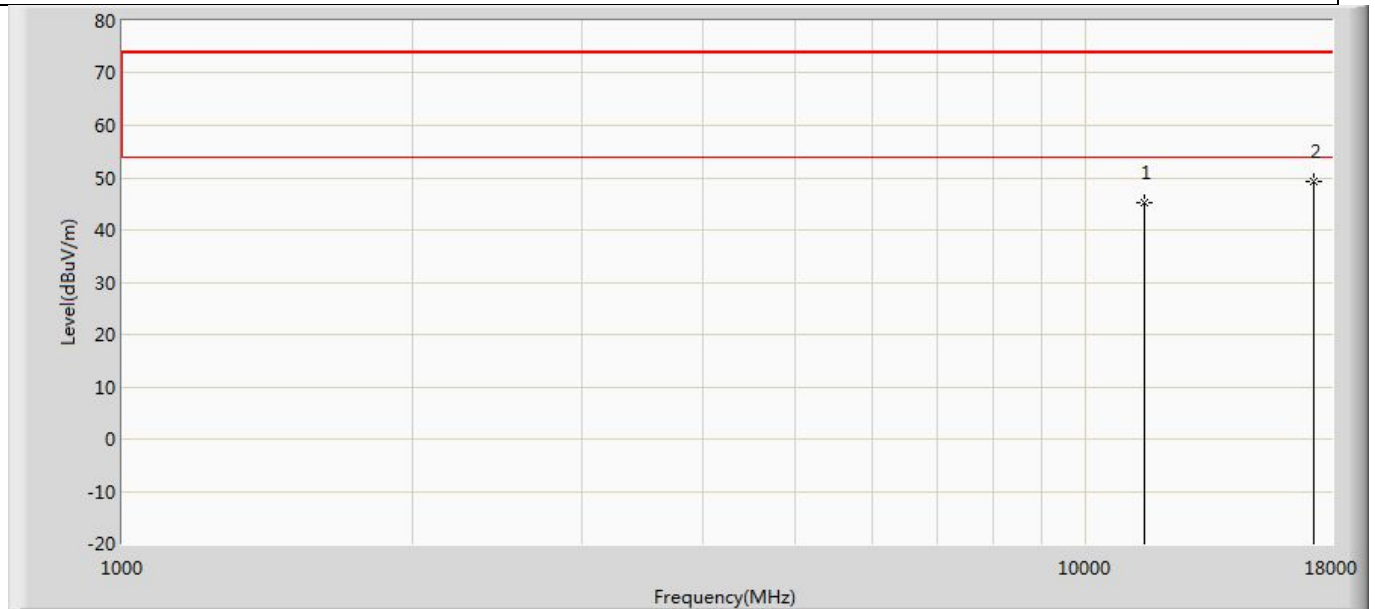


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11510.000	45.262	50.530	-28.738	74.000	-5.268	PK
2	*	17265.000	49.229	51.653	-24.771	74.000	-2.424	PK

Profile: 2360091R	Page No.: 55
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5795MHz by 802.11n(40MHz) with Ant1+Ant2	

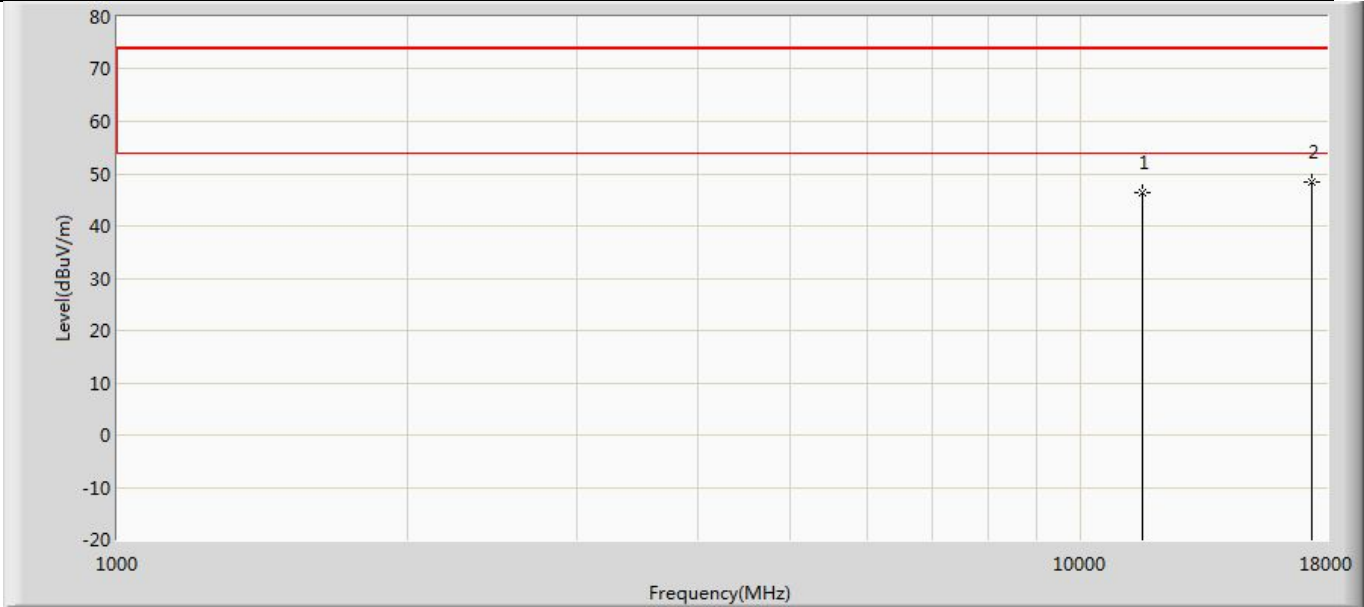


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	46.338	51.492	-27.662	74.000	-5.154	PK
2	*	17385.000	48.530	50.765	-25.470	74.000	-2.236	PK

Profile: 2360091R	Page No.: 56
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 3: Transmit at 5795MHz by 802.11n(40MHz) with Ant1+Ant2	

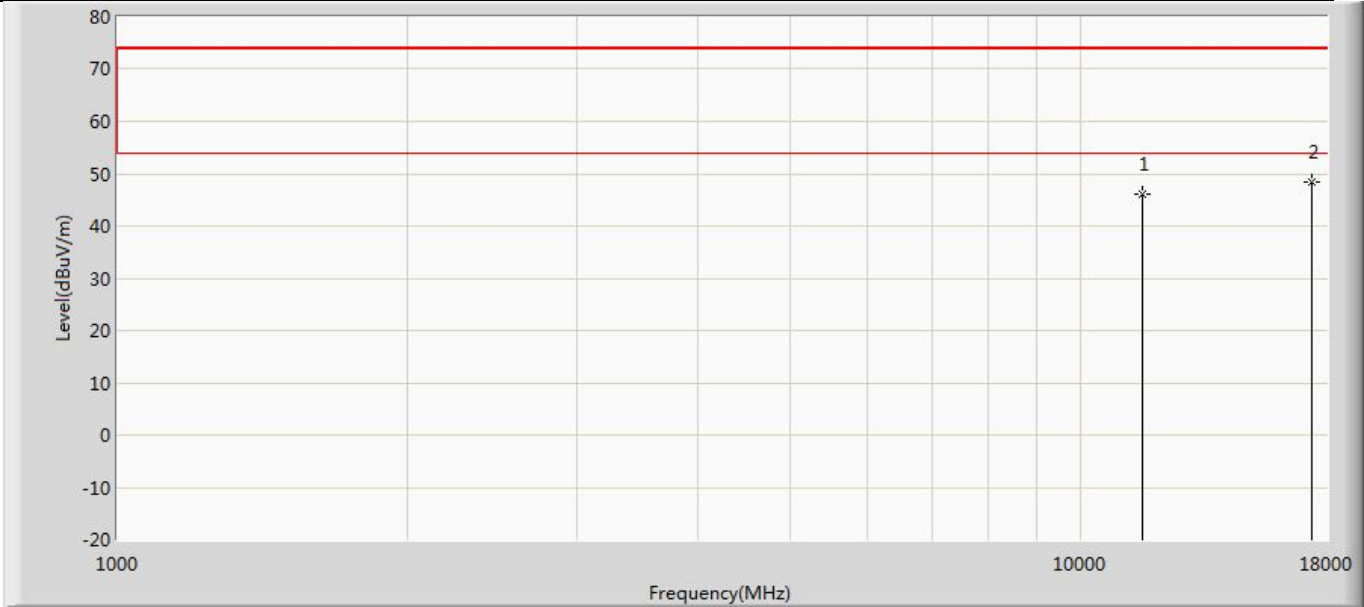


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		11590.000	46.221	51.375	-27.779	74.000	-5.154	PK
2	*	17385.000	48.526	50.761	-25.474	74.000	-2.236	PK

Profile: 2360091R	Page No.: 177
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) with Ant1+Ant2	

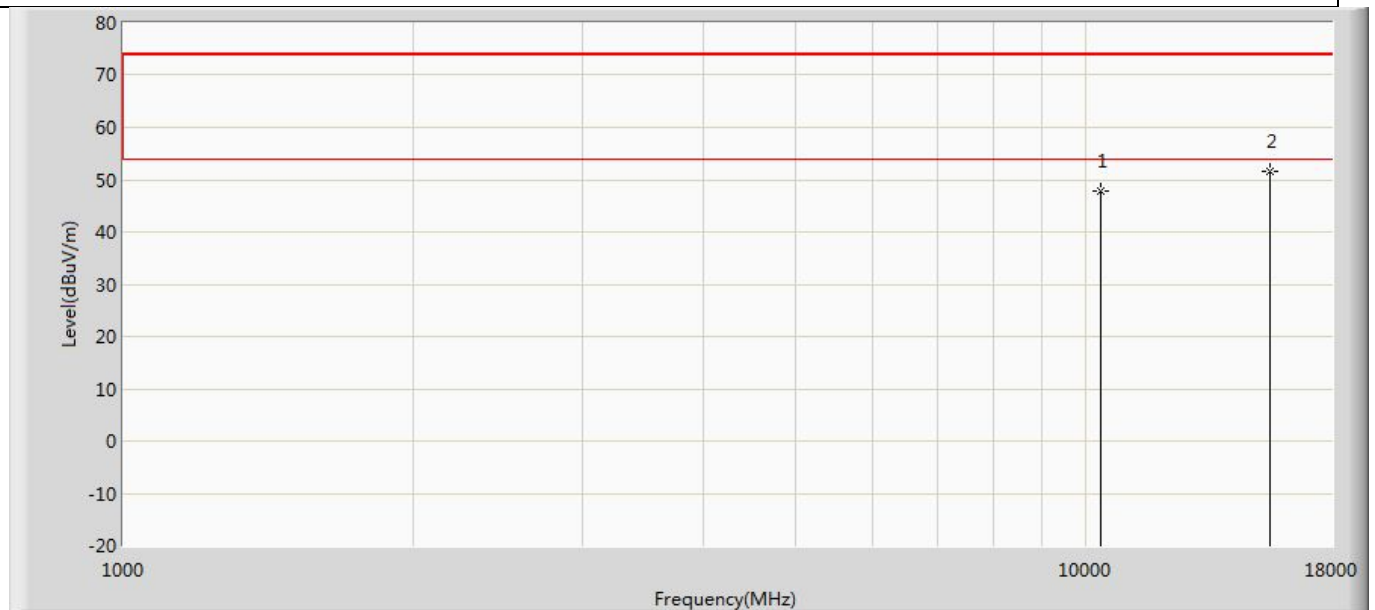


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	47.829	51.227	-26.171	74.000	-3.399	PK
2	*	15540.000	51.559	50.333	-22.441	74.000	1.226	PK

Profile: 2360091R	Page No.: 178
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5180MHz by 802.11ac(20MHz) with Ant1+Ant2	

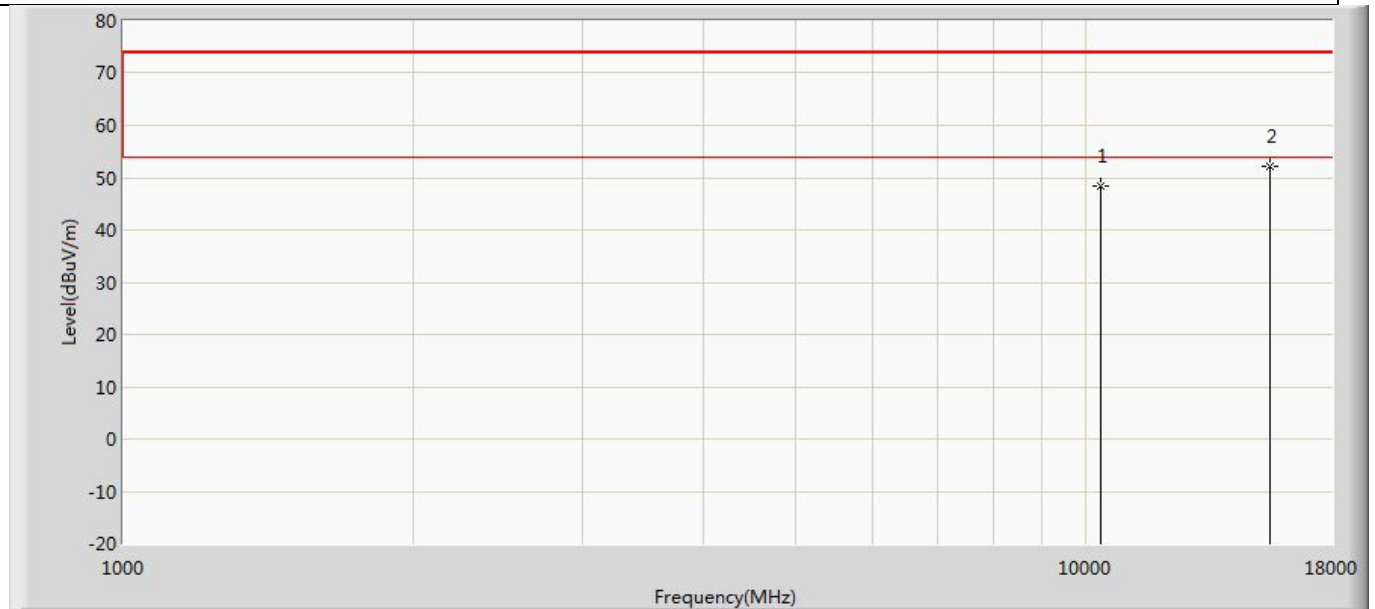


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10360.000	48.290	51.688	-25.710	74.000	-3.399	PK
2	*	15540.000	52.115	50.889	-21.885	74.000	1.226	PK

Profile: 2360091R	Page No.: 179
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5220MHz by 802.11ac(20MHz) with Ant1+Ant2	

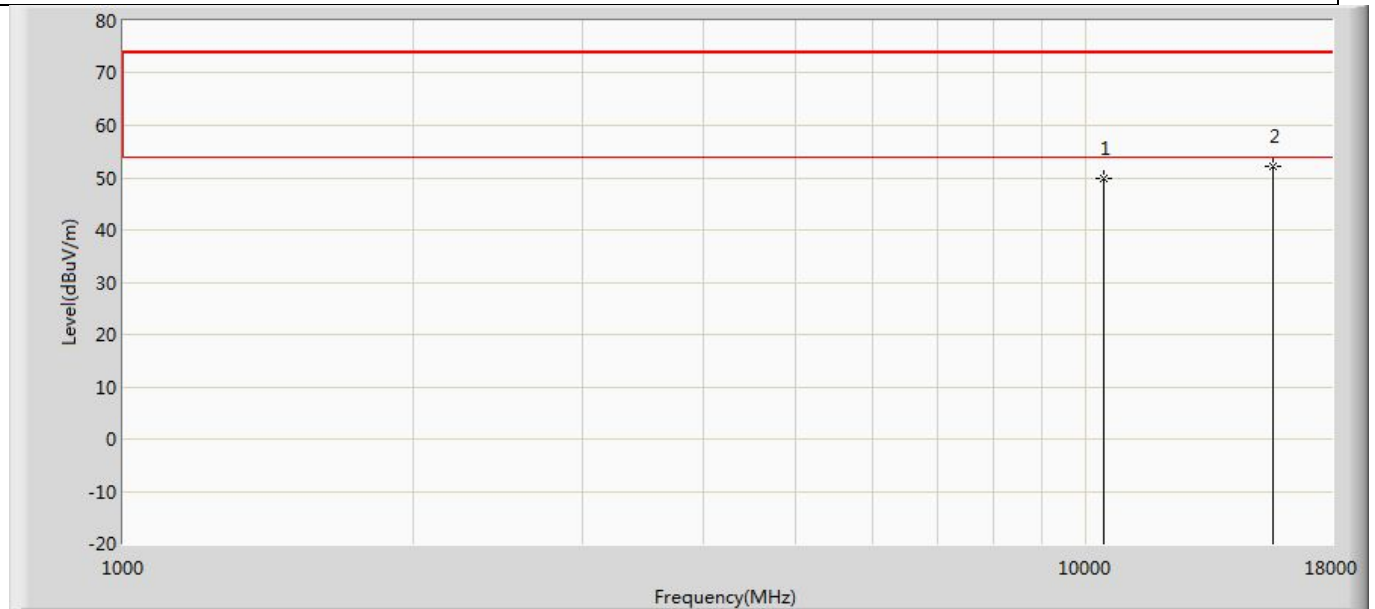


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	49.743	53.032	-24.257	74.000	-3.288	PK
2	*	15660.000	52.261	51.069	-21.739	74.000	1.192	PK

Profile: 2360091R	Page No.: 180
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5220MHz by 802.11ac(20MHz) with Ant1+Ant2	

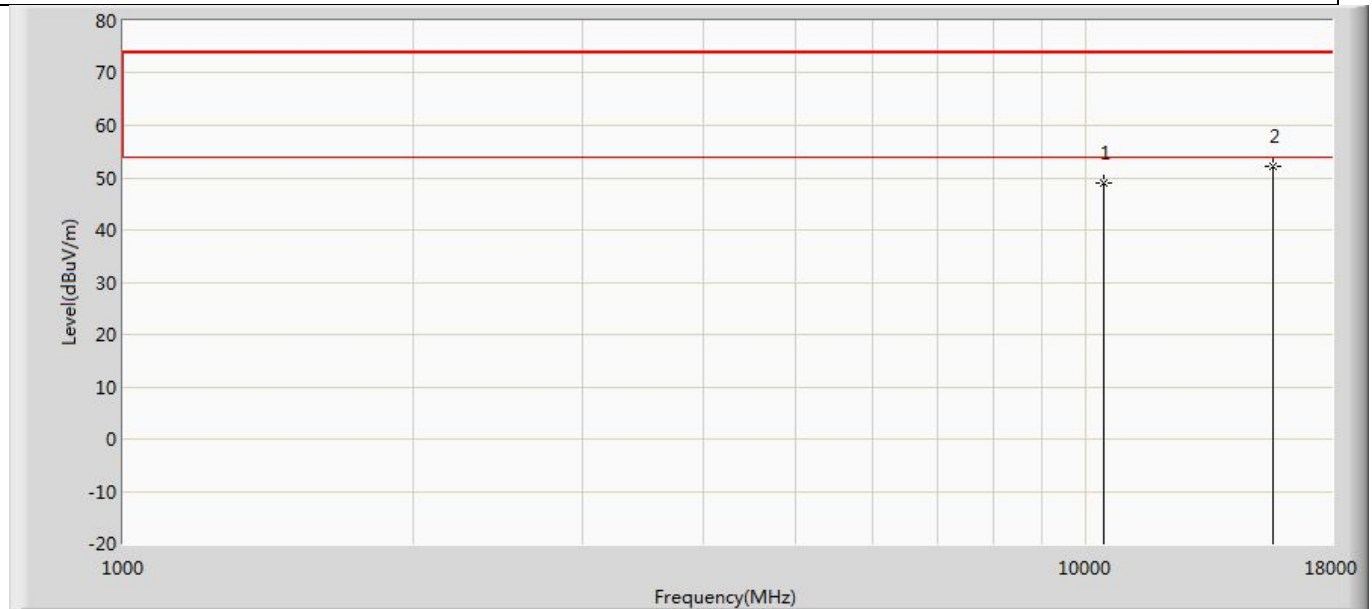


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10440.000	48.957	52.246	-25.043	74.000	-3.288	PK
2	*	15660.000	52.194	51.002	-21.806	74.000	1.192	PK

Profile: 2360091R	Page No.: 181
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5240MHz by 802.11ac(20MHz) with Ant1+Ant2	

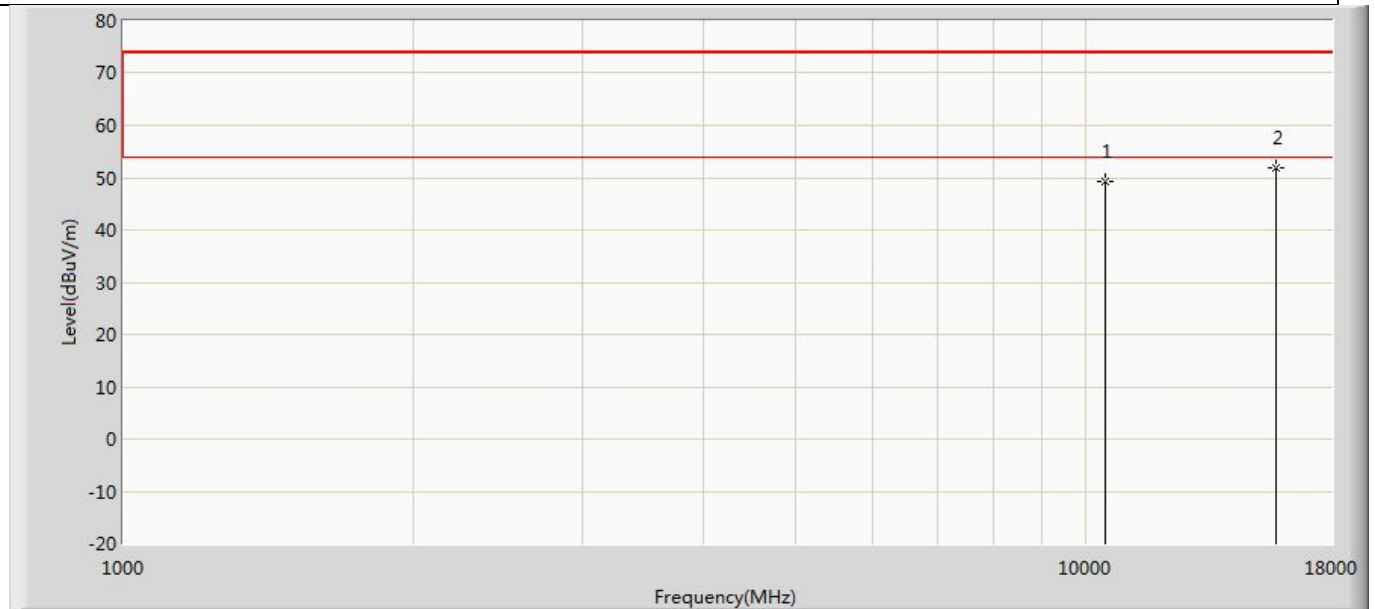


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	49.420	52.685	-24.580	74.000	-3.265	PK
2	*	15720.000	51.865	50.214	-22.135	74.000	1.651	PK

Profile: 2360091R	Page No.: 182
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5240MHz by 802.11ac(20MHz) with Ant1+Ant2	

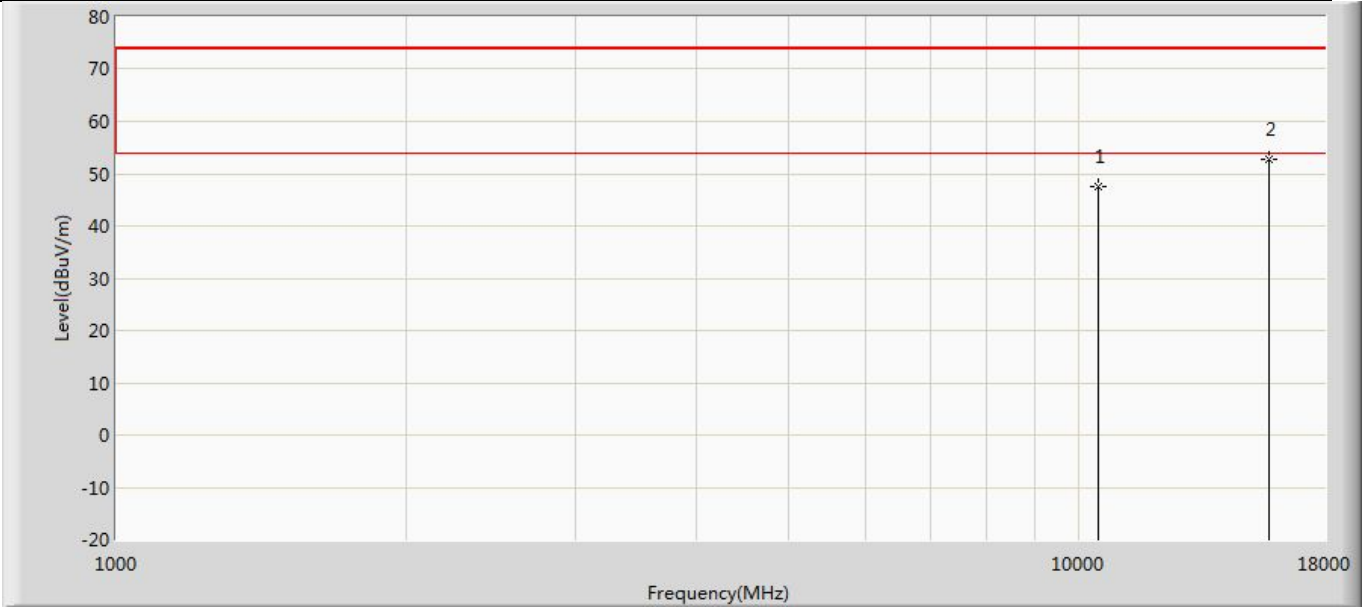


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10480.000	47.452	50.717	-26.548	74.000	-3.265	PK
2	*	15720.000	52.883	51.232	-21.117	74.000	1.651	PK

Profile: 2360091R	Page No.: 183
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5260MHz by 802.11ac(20MHz) with Ant1+Ant2	

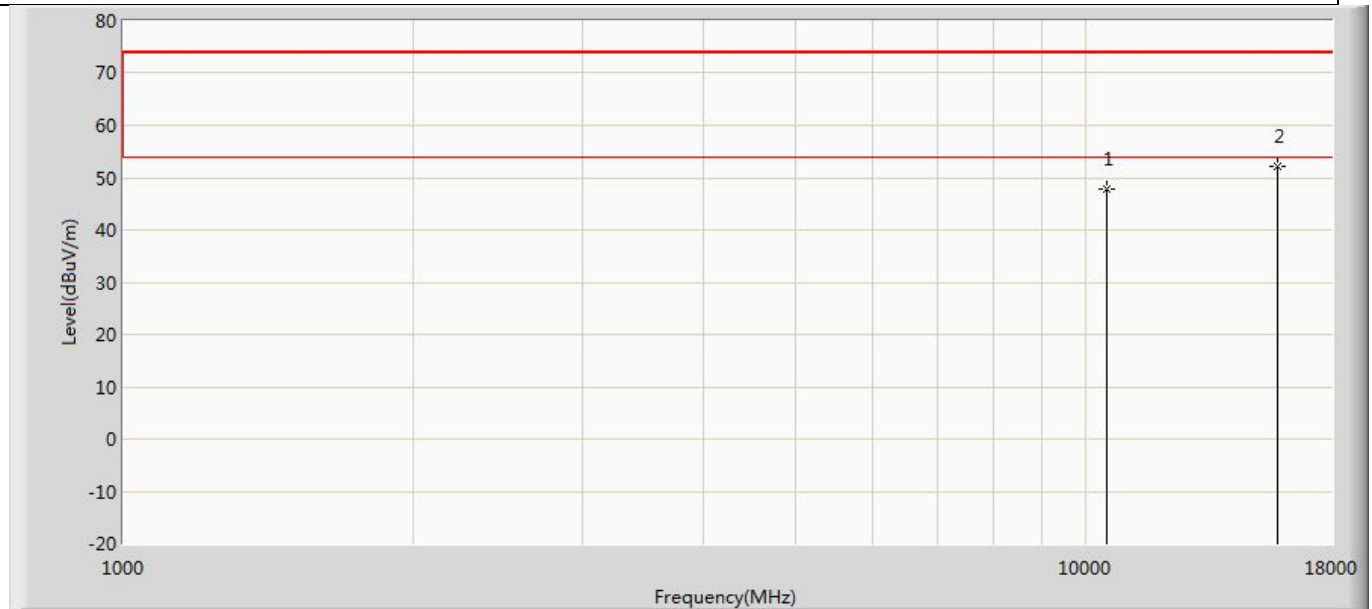


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.846	51.064	-26.154	74.000	-3.218	PK
2	*	15780.000	52.257	50.918	-21.743	74.000	1.339	PK

Profile: 2360091R	Page No.: 184
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5260MHz by 802.11ac(20MHz) with Ant1+Ant2	

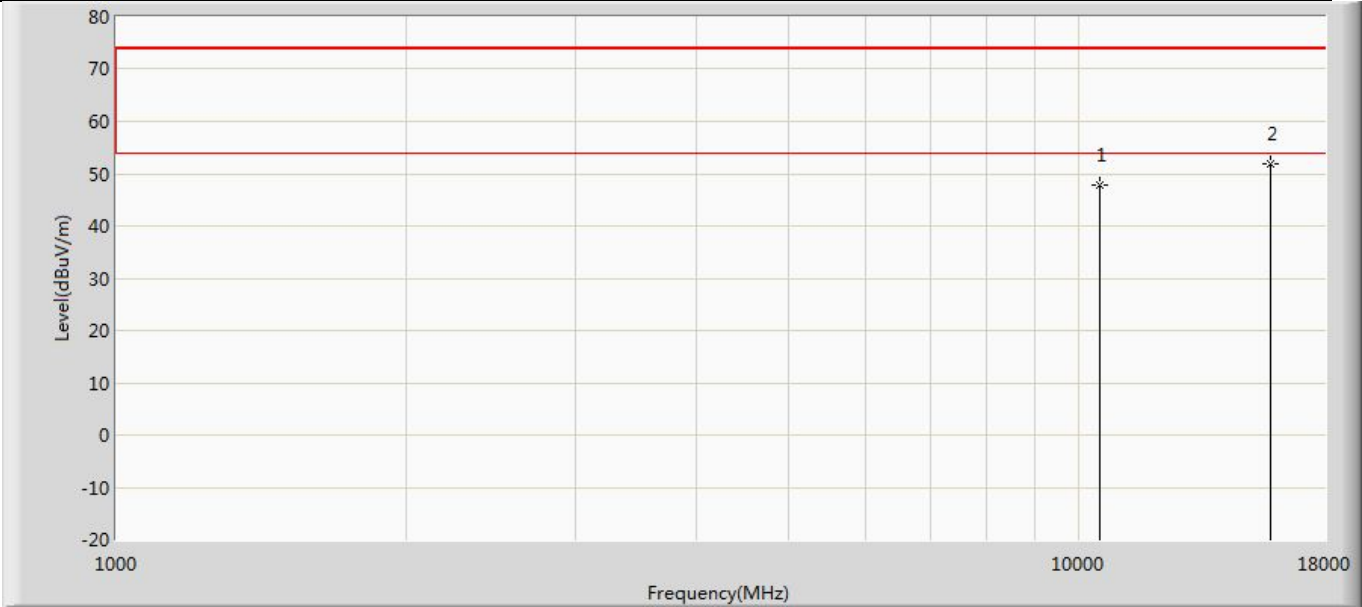


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10520.000	47.813	51.031	-26.187	74.000	-3.218	PK
2	*	15780.000	51.881	50.542	-22.119	74.000	1.339	PK

Profile: 2360091R	Page No.: 185
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5300MHz by 802.11ac(20MHz) with Ant1+Ant2	

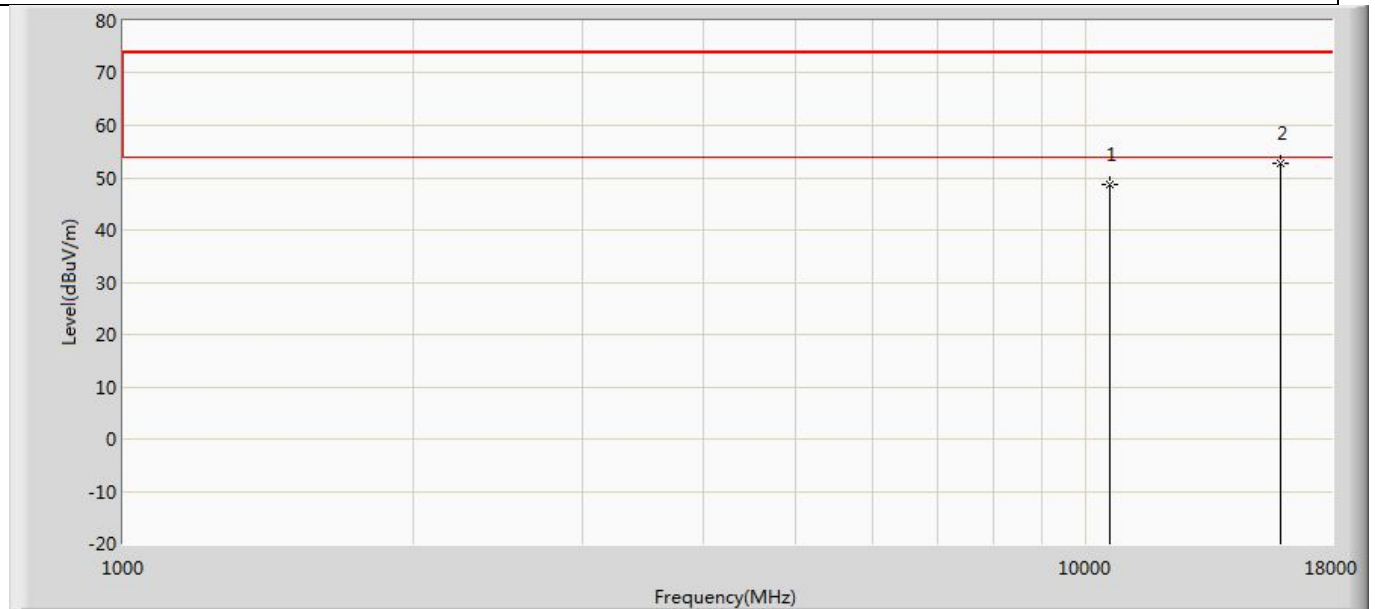


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	48.612	51.277	-25.388	74.000	-2.665	PK
2	*	15900.000	52.790	50.741	-21.210	74.000	2.049	PK

Profile: 2360091R	Page No.: 186
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5300MHz by 802.11ac(20MHz) with Ant1+Ant2	

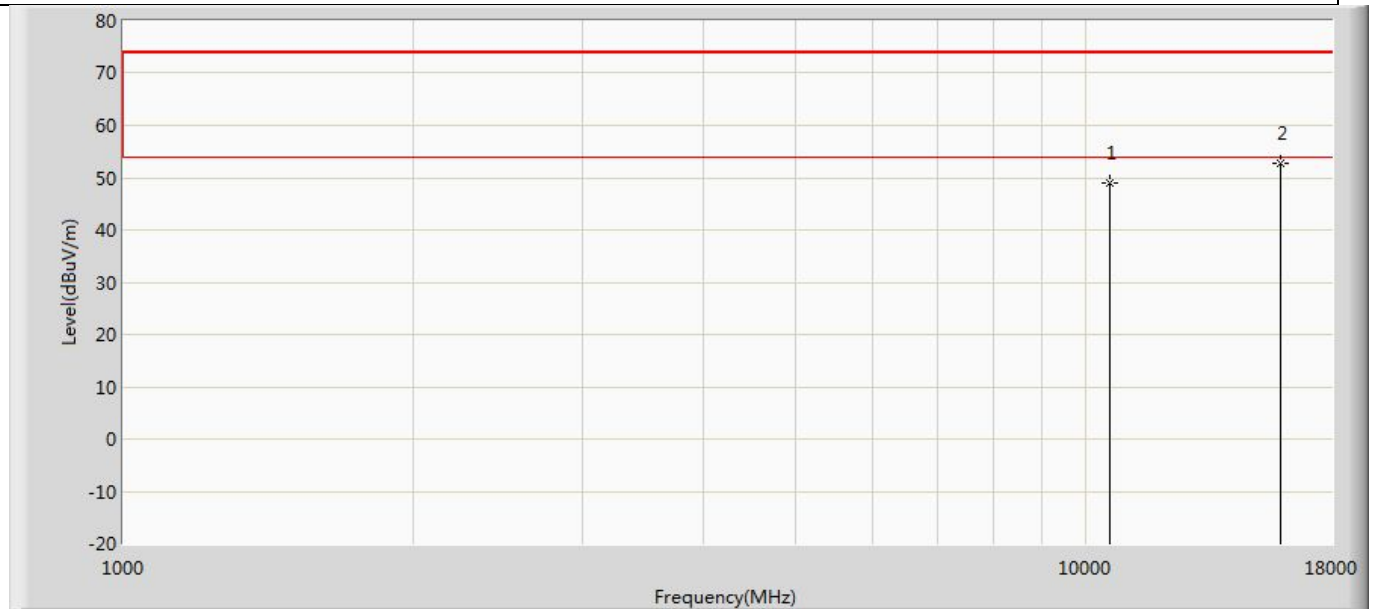

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10600.000	48.949	51.614	-25.051	74.000	-2.665	PK
2	*	15900.000	52.768	50.719	-21.232	74.000	2.049	PK

Profile: 2360091R	Page No.: 187
Engineer: Yuliu	
Site: AC5	Time: 2023/06/29 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5320MHz by 802.11ac(20MHz) with Ant1+Ant2	

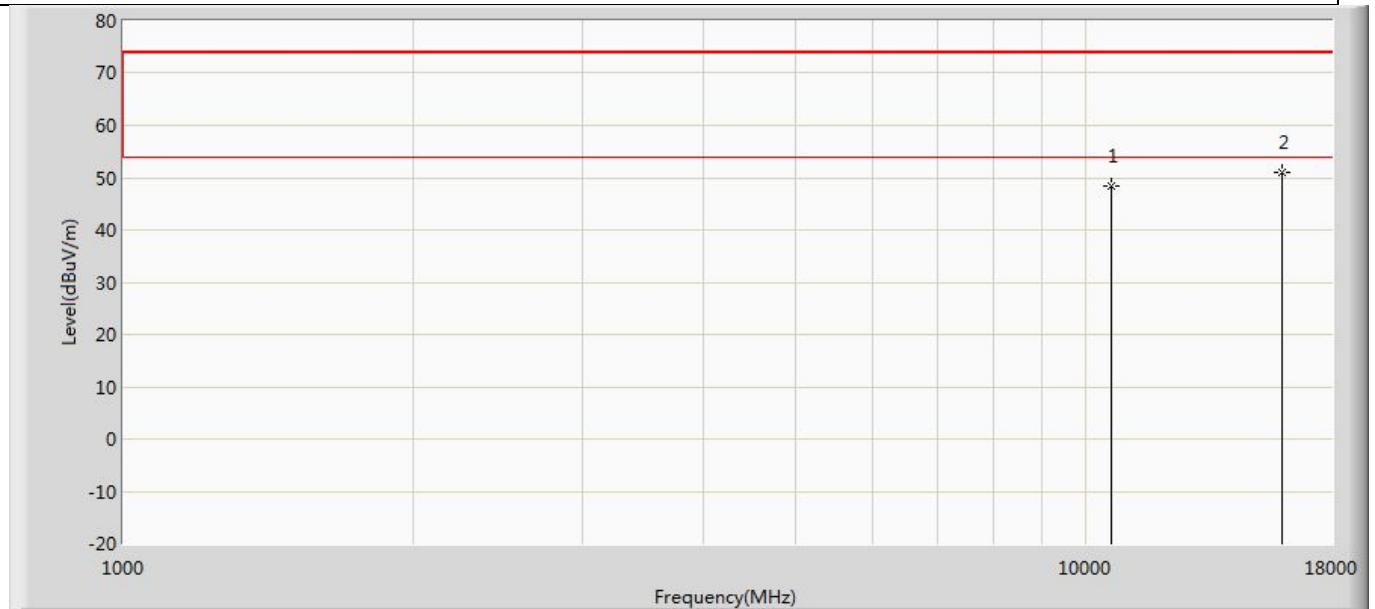

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		10640.000	48.327	51.646	-25.673	74.000	-3.319	PK
2	*	15960.000	51.146	50.080	-22.854	74.000	1.066	PK