



Profile: 2360091R	Page No.: 47
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5500MHz by 802.11ac(20MHz) with ant1+2	

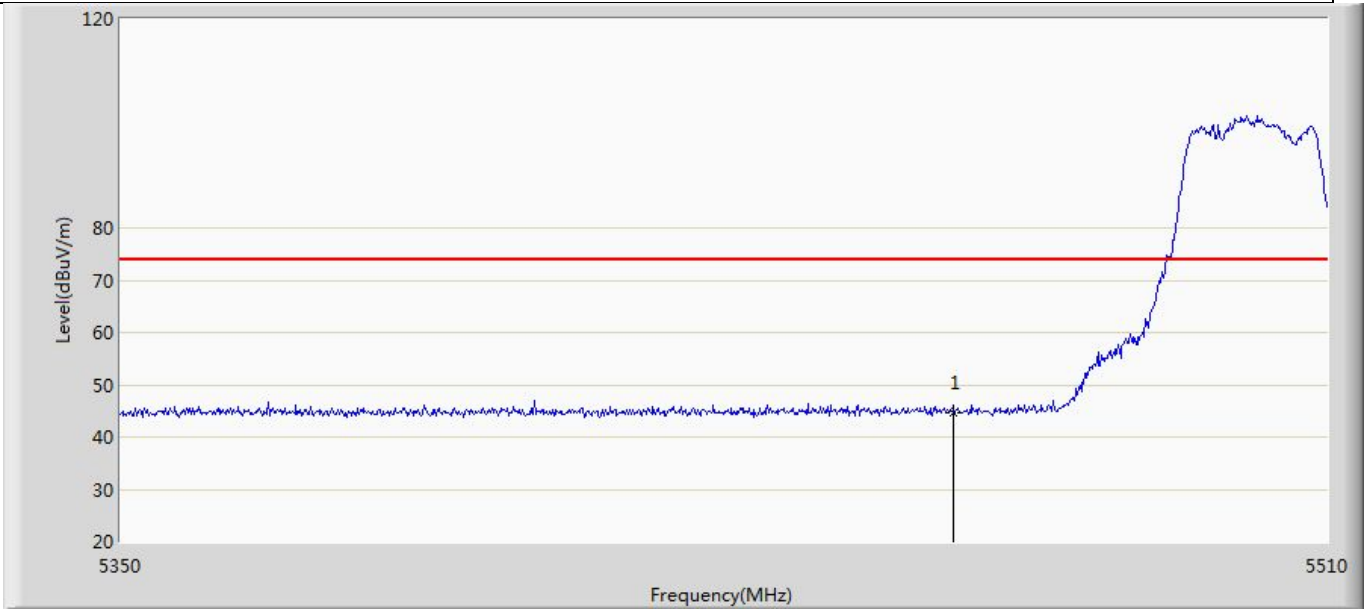


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	44.728	6.995	-29.272	74.000	37.732	PK

Profile: 2360091R	Page No.: 48
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5500MHz by 802.11ac(20MHz) with ant1+2	

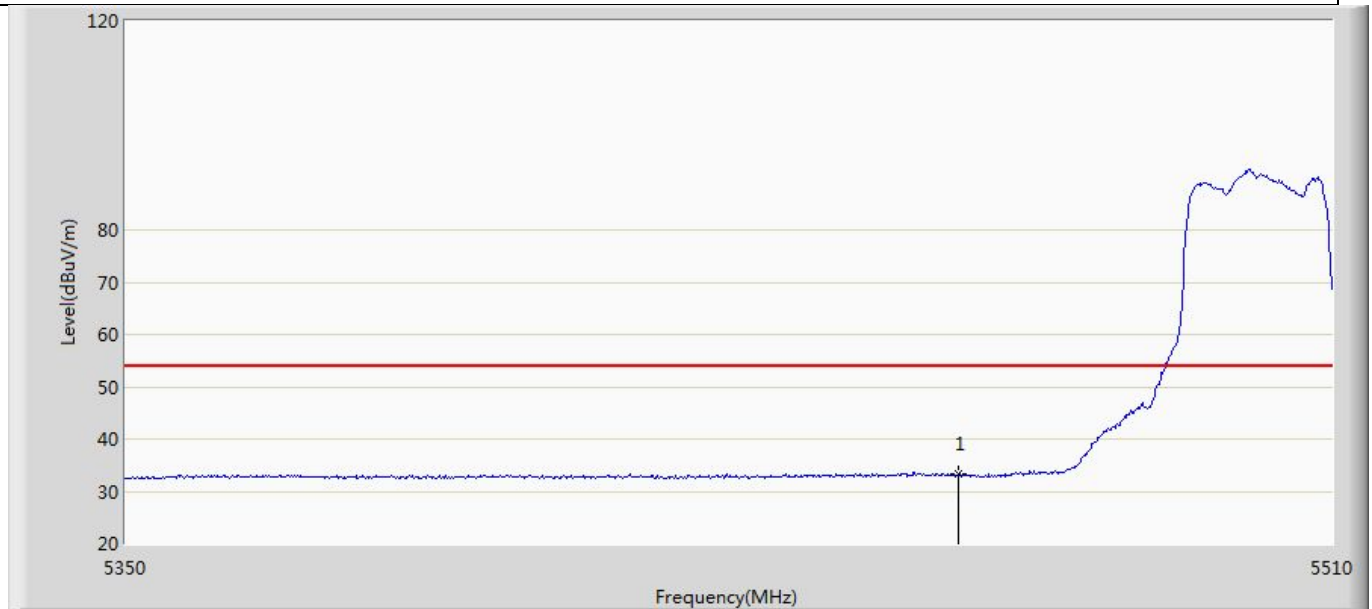


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	33.220	-4.513	-20.780	54.000	37.732	AV

Profile: 2360091R	Page No.: 17
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:17
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5745MHz by 802.11ac (20MHz) with ant1+2	

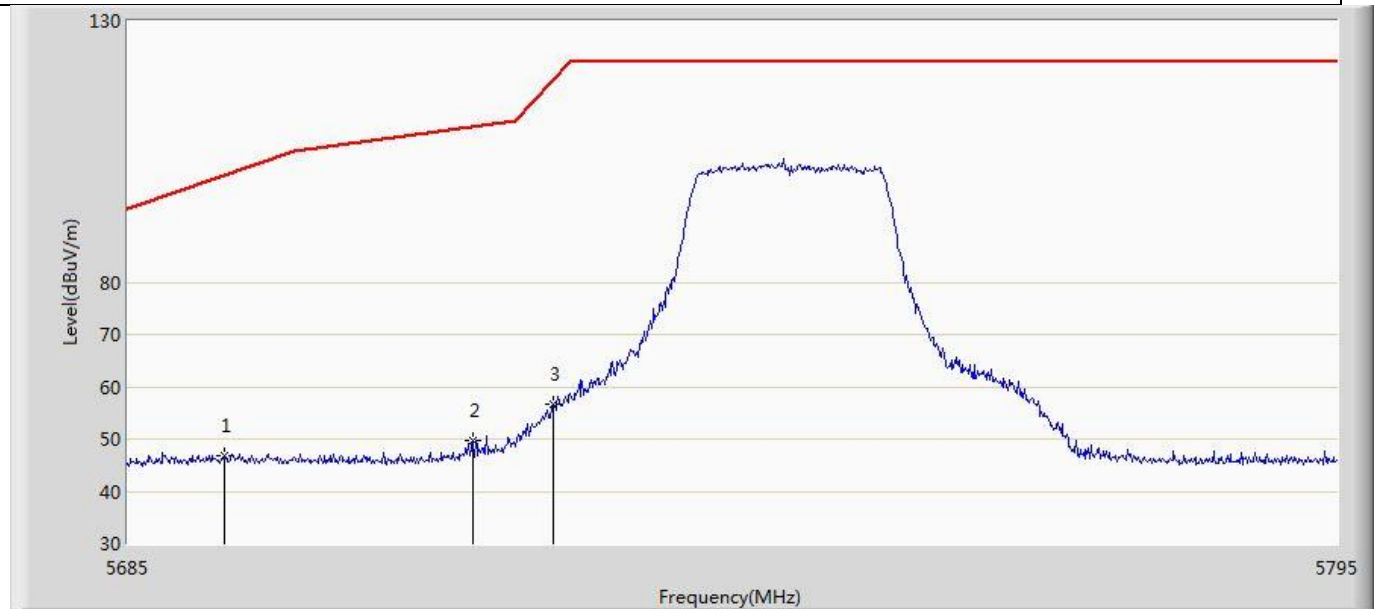


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.800	46.956	8.942	-53.674	100.630	38.014	PK
2		5716.240	49.790	11.830	-59.958	109.749	37.960	PK
3		5723.500	56.564	18.488	-62.217	118.781	38.076	PK

Profile: 2360091R	Page No.: 18
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:19
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5745MHz by 802.11ac (20MHz) with ant1+2	

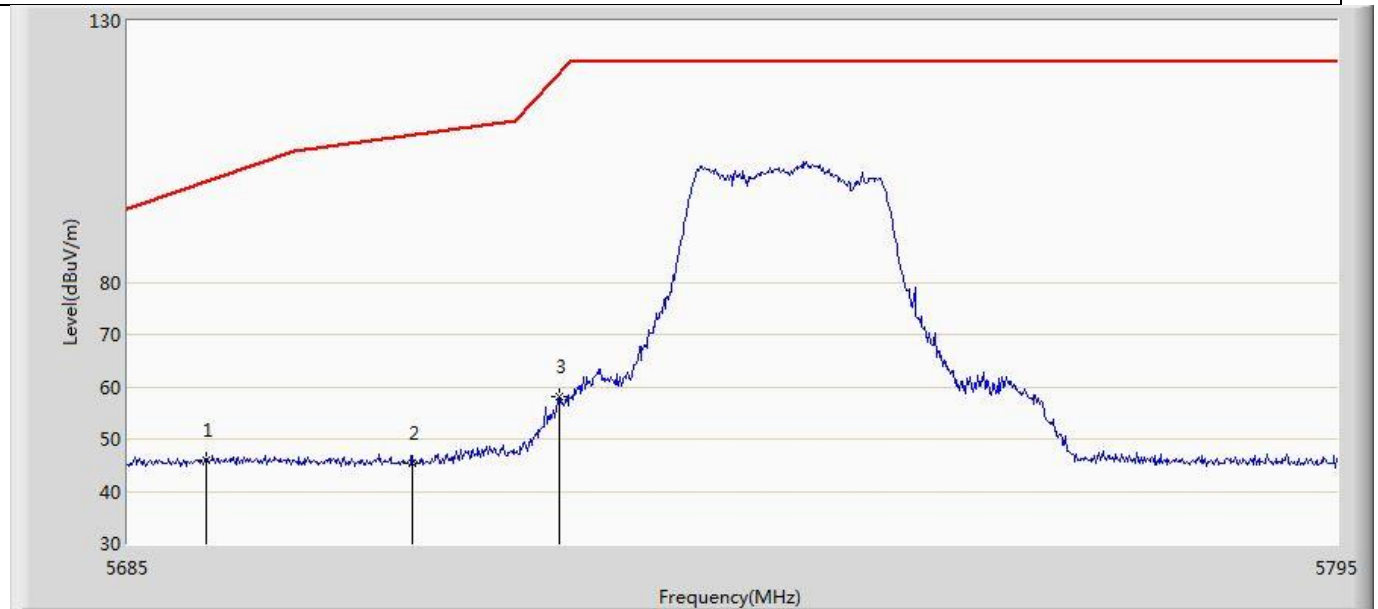


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.150	45.824	7.792	-53.588	99.413	38.032	PK
2		5710.740	45.272	7.399	-62.938	108.210	37.873	PK
3		5724.050	58.110	20.025	-61.925	120.035	38.085	PK

Profile: 2360091R	Page No.: 19
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:20
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5785MHz by 802.11ac (20MHz) with ant1+2	

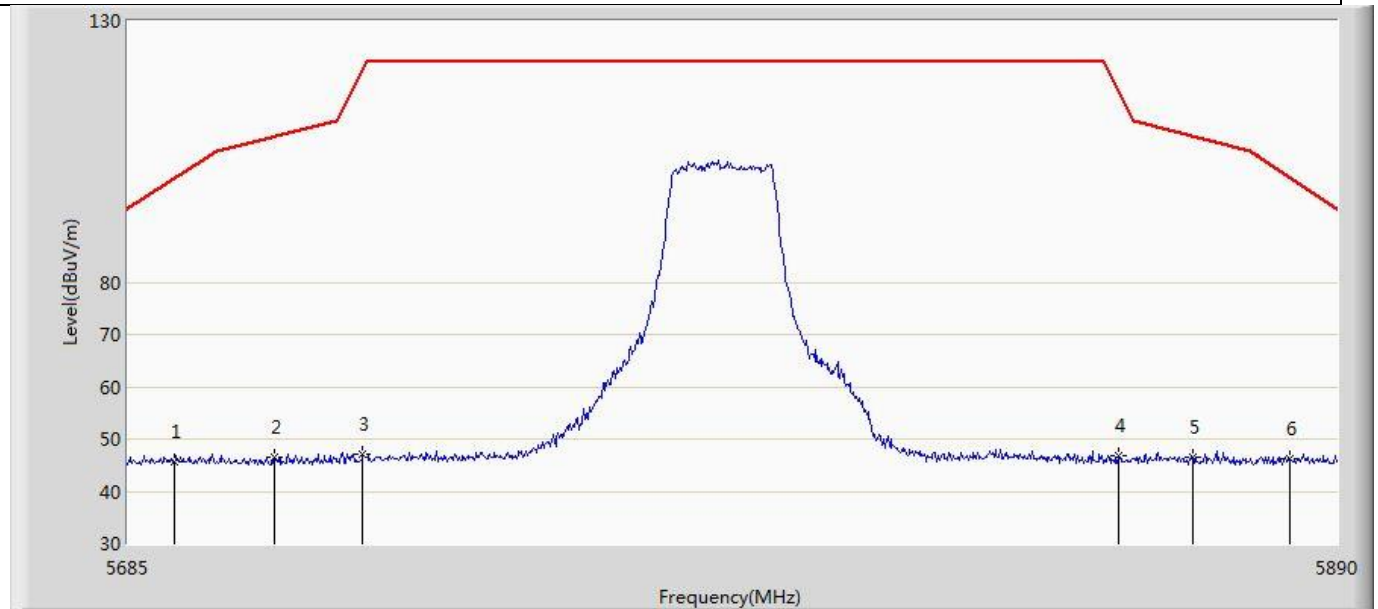


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5692.790	45.785	7.760	-54.099	99.885	38.025	PK
2		5709.600	46.494	8.639	-61.397	107.890	37.855	PK
3		5724.360	46.993	8.903	-73.748	120.741	38.090	PK
4		5852.485	46.691	8.536	-69.842	116.533	38.155	PK
5		5865.195	46.495	8.298	-61.448	107.943	38.197	PK
6	*	5881.800	46.263	8.124	-53.887	100.150	38.138	PK

Profile: 2360091R	Page No.: 20
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:22
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5785MHz by 802.11ac (20MHz) with ant1+2	

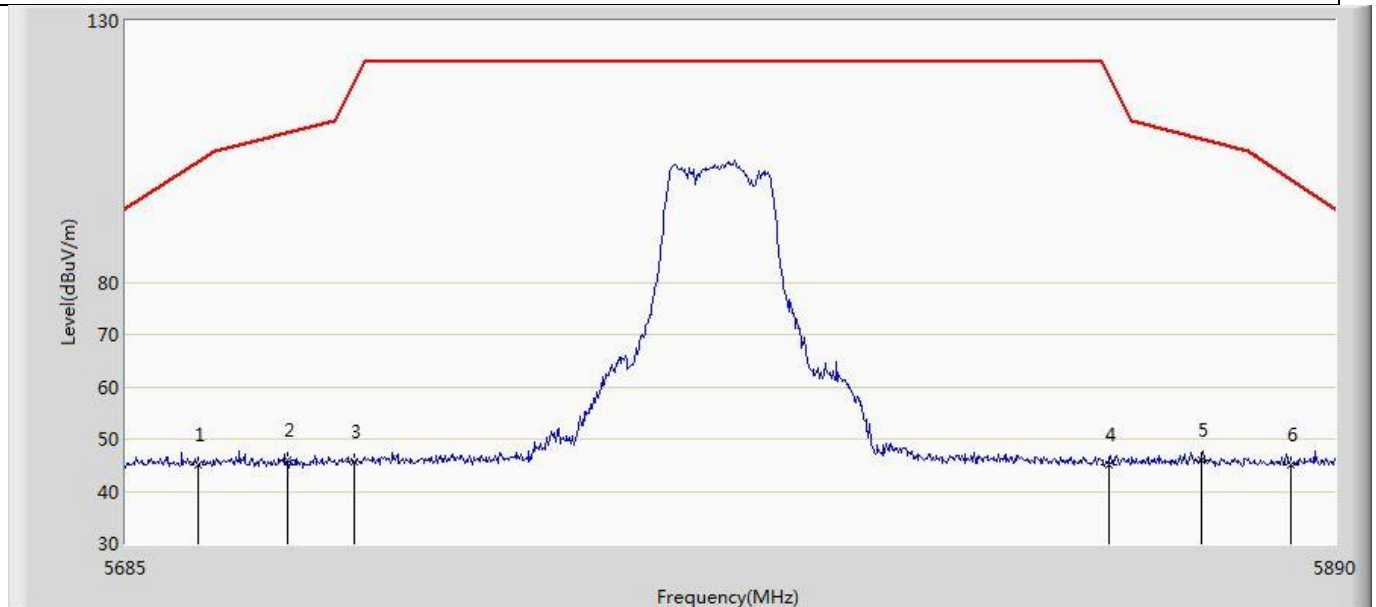


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5697.095	45.008	7.031	-58.051	103.059	37.977	PK
2		5712.060	45.898	8.004	-62.681	108.579	37.894	PK
3		5723.335	45.619	7.545	-72.786	118.405	38.074	PK
4		5851.050	45.035	6.888	-74.770	119.805	38.146	PK
5		5867.040	45.950	7.762	-61.476	107.427	38.188	PK
6	*	5882.415	45.179	7.039	-54.514	99.693	38.140	PK

Profile: 2360091R	Page No.: 21
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:23
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5825MHz by 802.11ac (20MHz) with ant1+2	

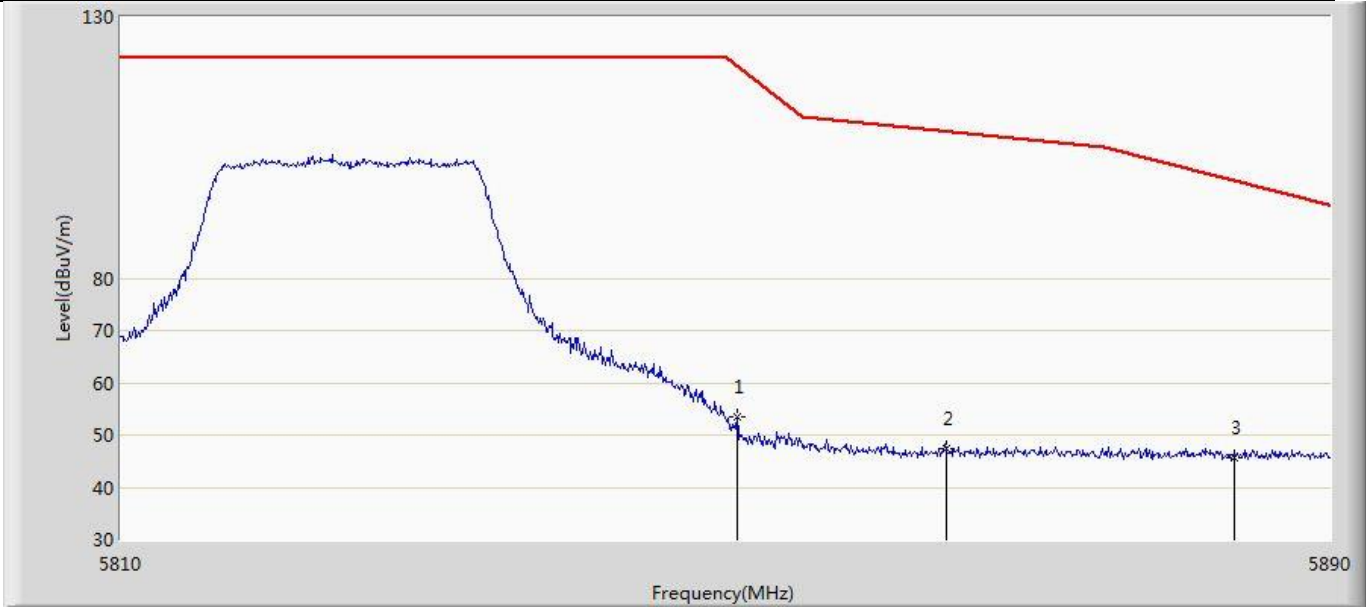


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5850.640	53.555	15.410	-67.186	120.740	38.145	PK
2		5864.480	47.275	9.075	-60.868	108.143	38.200	PK
3	*	5883.680	45.613	7.470	-53.141	98.754	38.144	PK

Profile: 2360091R	Page No.: 22
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:27
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 4: Transmit at 5825MHz by 802.11ac (20MHz) with ant1+2	

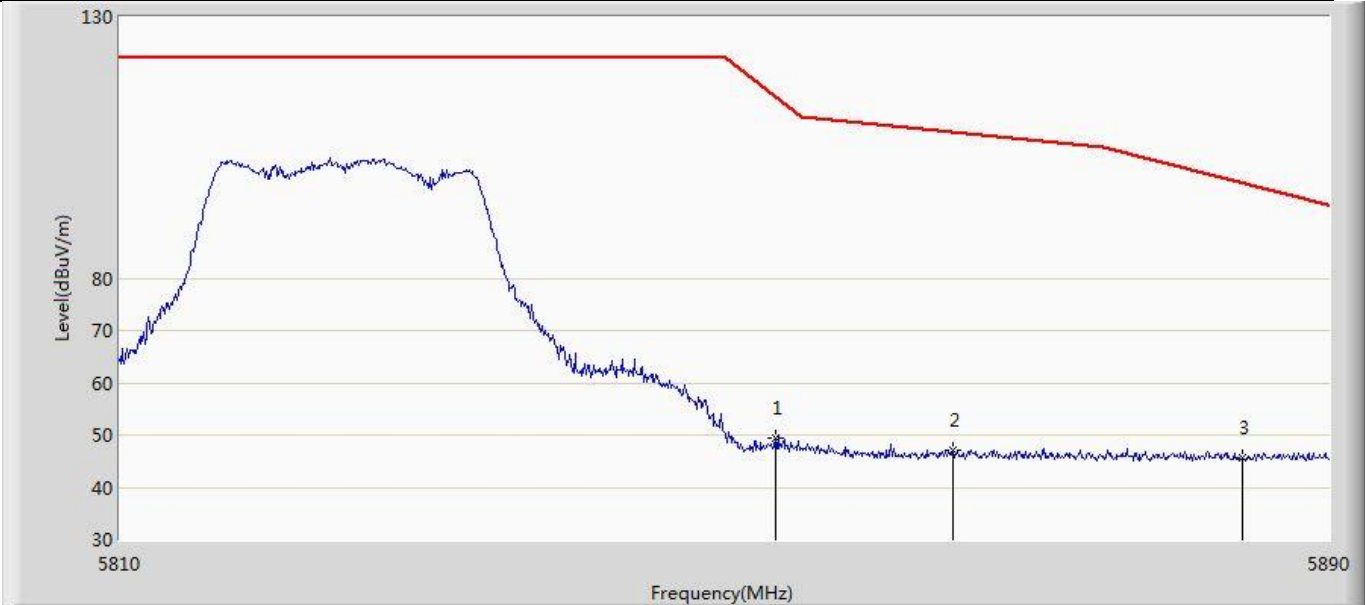


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5853.280	49.401	11.241	-65.319	114.721	38.160	PK
2		5865.040	47.074	8.876	-60.913	107.986	38.198	PK
3	*	5884.240	45.660	7.515	-52.679	98.339	38.144	PK

Profile: 2360091R	Page No.: 49
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) with ant1+2	

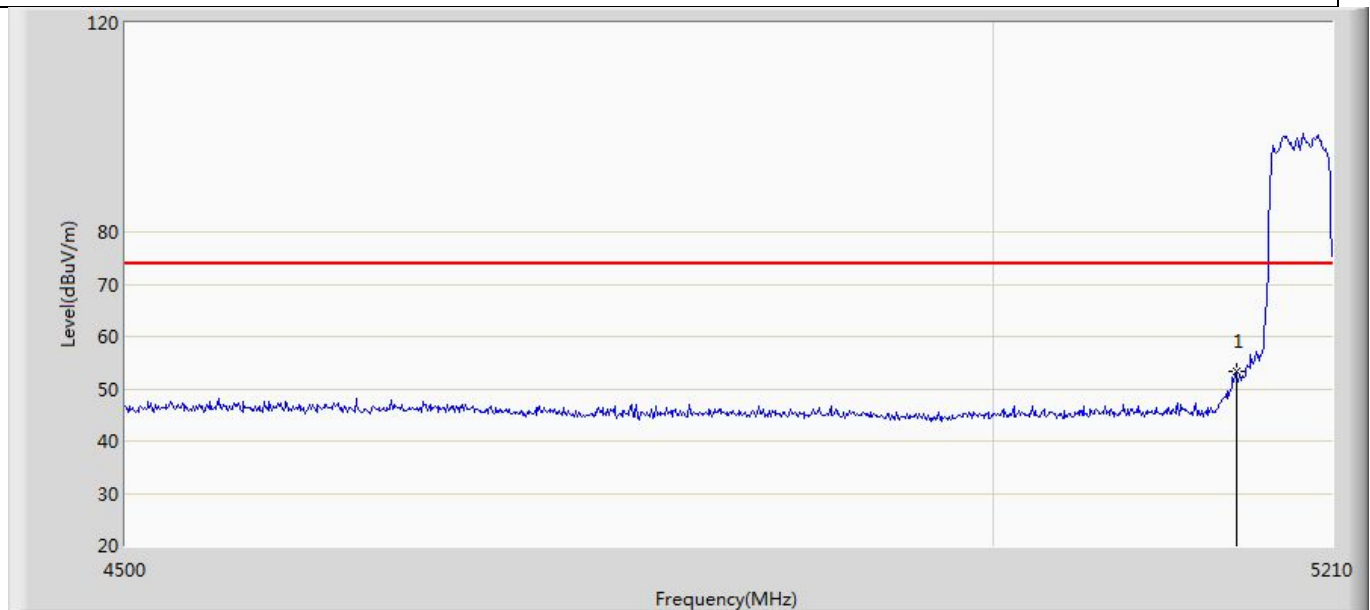


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	53.253	16.023	-20.747	74.000	37.230	PK

Profile: 2360091R	Page No.: 50
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) with ant1+2	

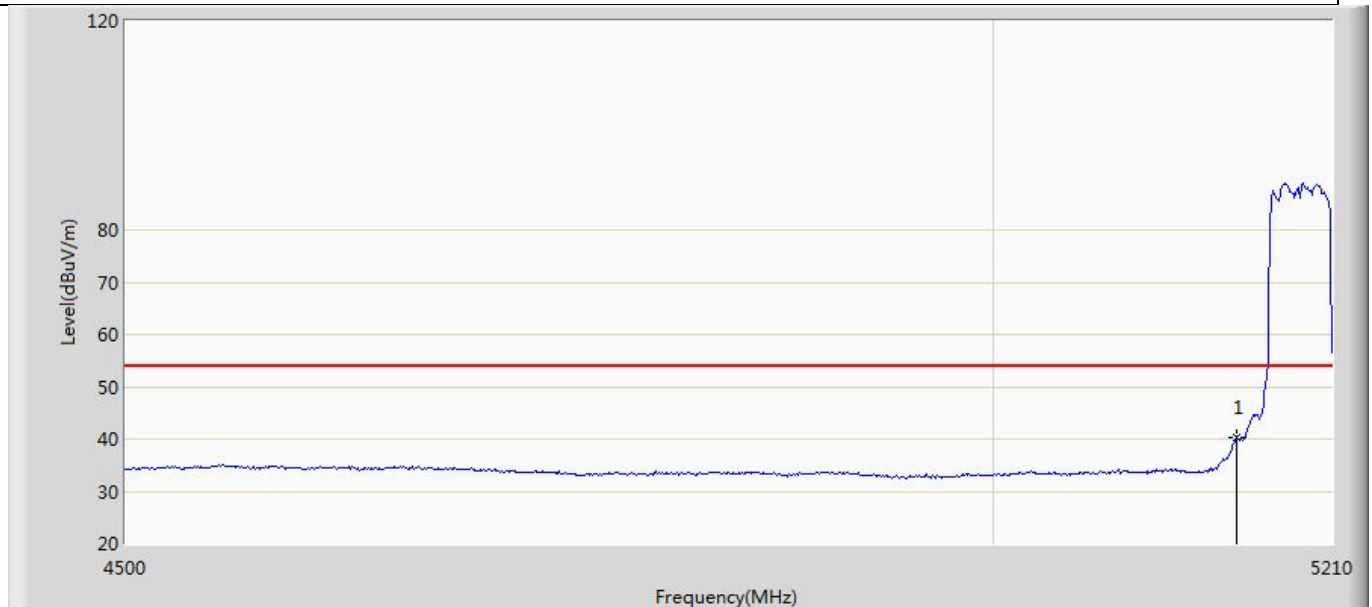


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	40.383	3.153	-13.617	54.000	37.230	AV

Profile: 2360091R	Page No.: 51
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) with ant1+2	

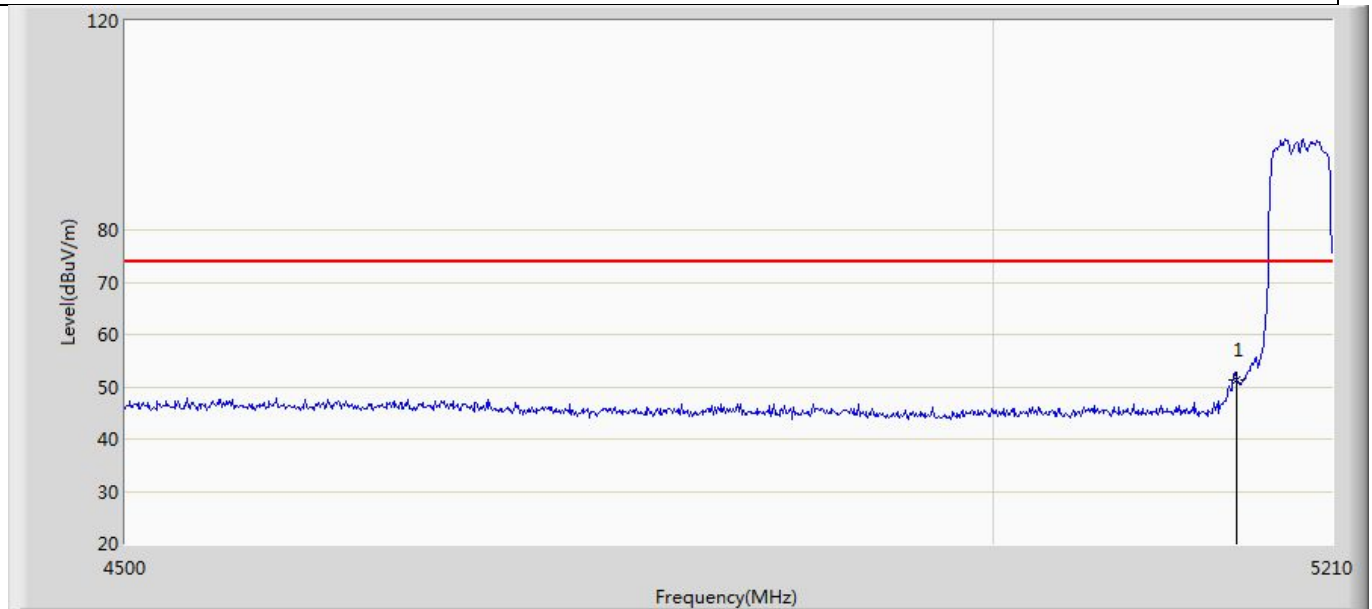


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.247	14.017	-22.753	74.000	37.230	PK

Profile: 2360091R	Page No.: 52
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5190MHz by 802.11ac(40MHz) with ant1+2	

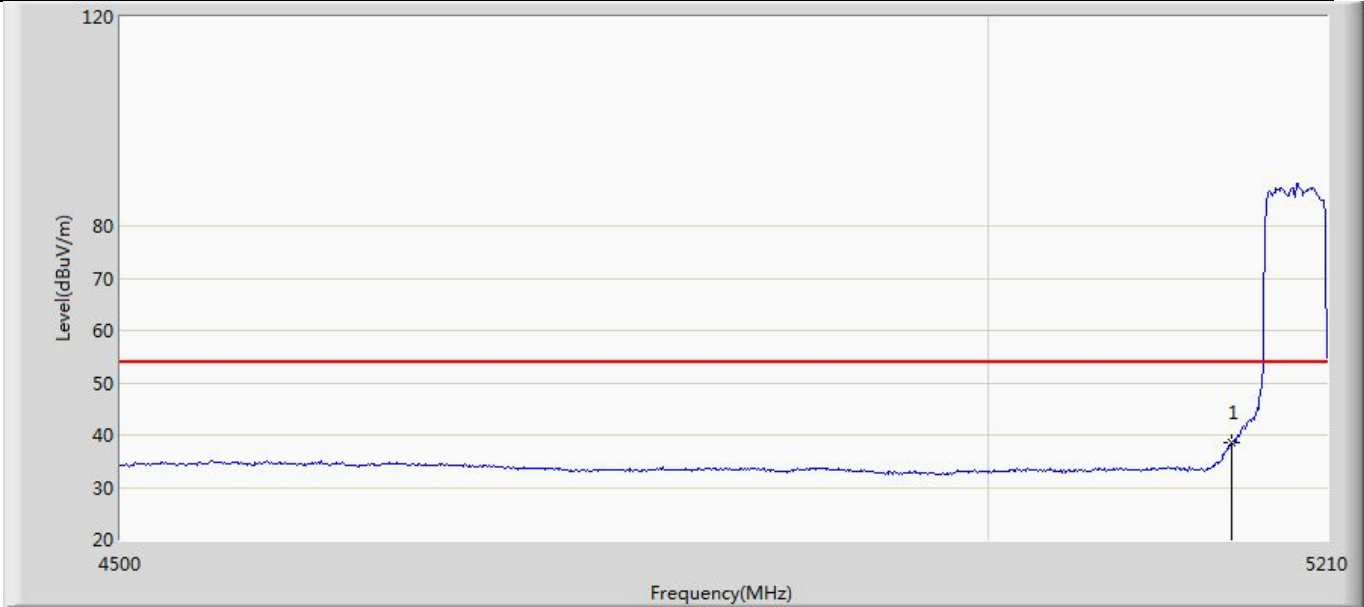


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	38.456	1.226	-15.544	54.000	37.230	AV

Profile: 2360091R	Page No.: 53
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) with ant1+2	

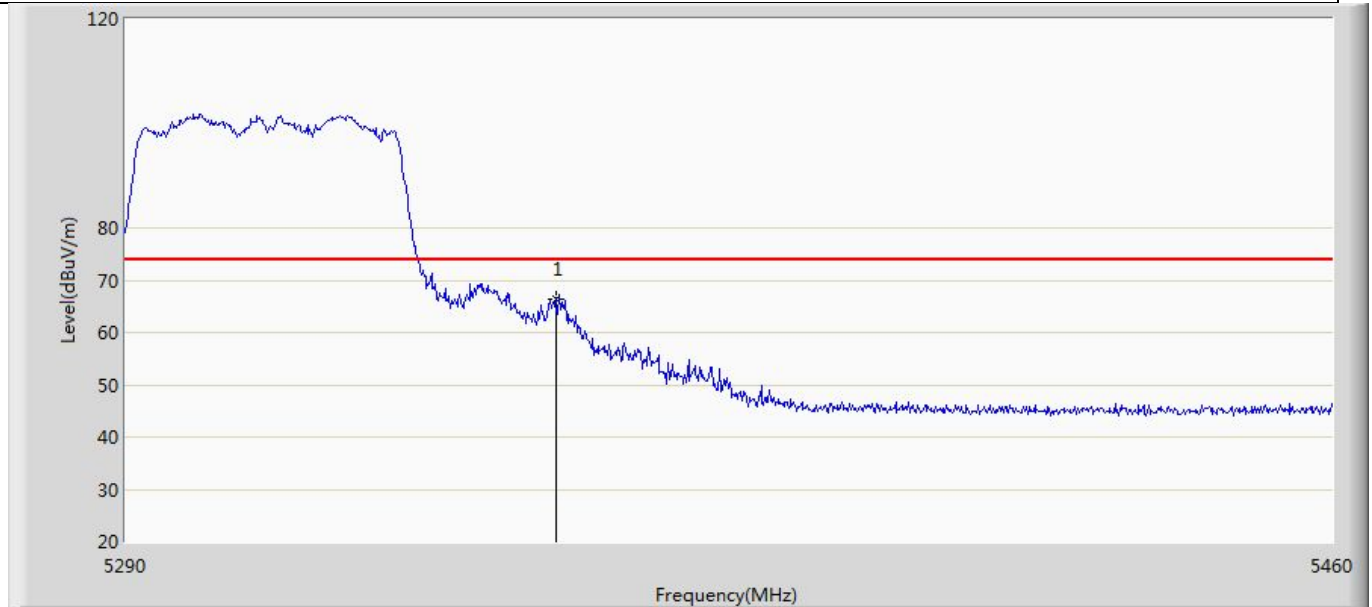


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	66.510	29.072	-7.490	74.000	37.438	PK

Profile: 2360091R	Page No.: 54
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) with ant1+2	

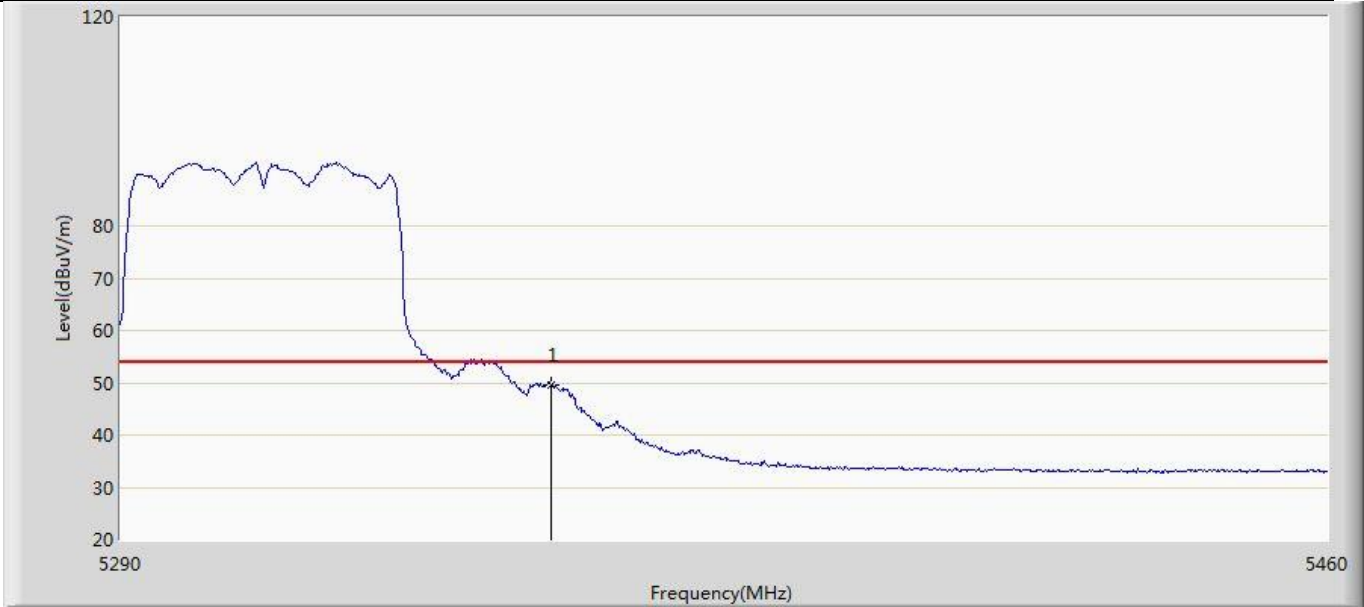


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	49.673	12.235	-4.327	54.000	37.438	AV

Profile: 2360091R	Page No.: 55
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) with ant1+2	

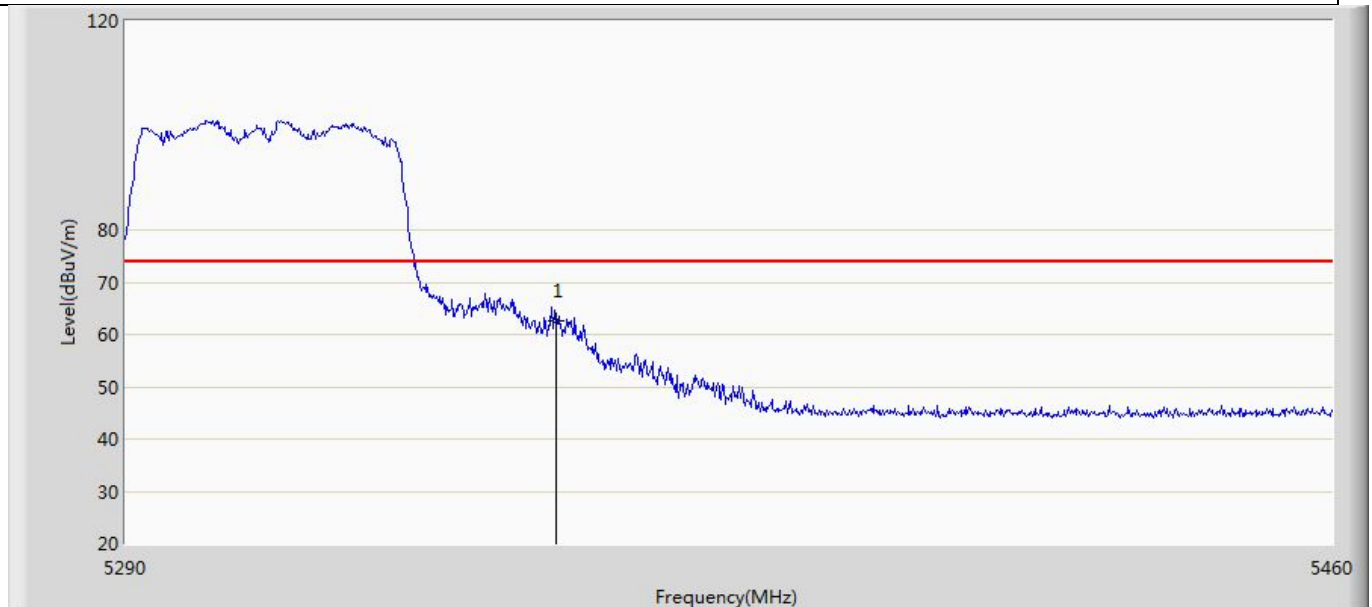


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	62.578	25.140	-11.422	74.000	37.438	PK

Profile: 2360091R	Page No.: 56
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5310MHz by 802.11ac(40MHz) with ant1+2	

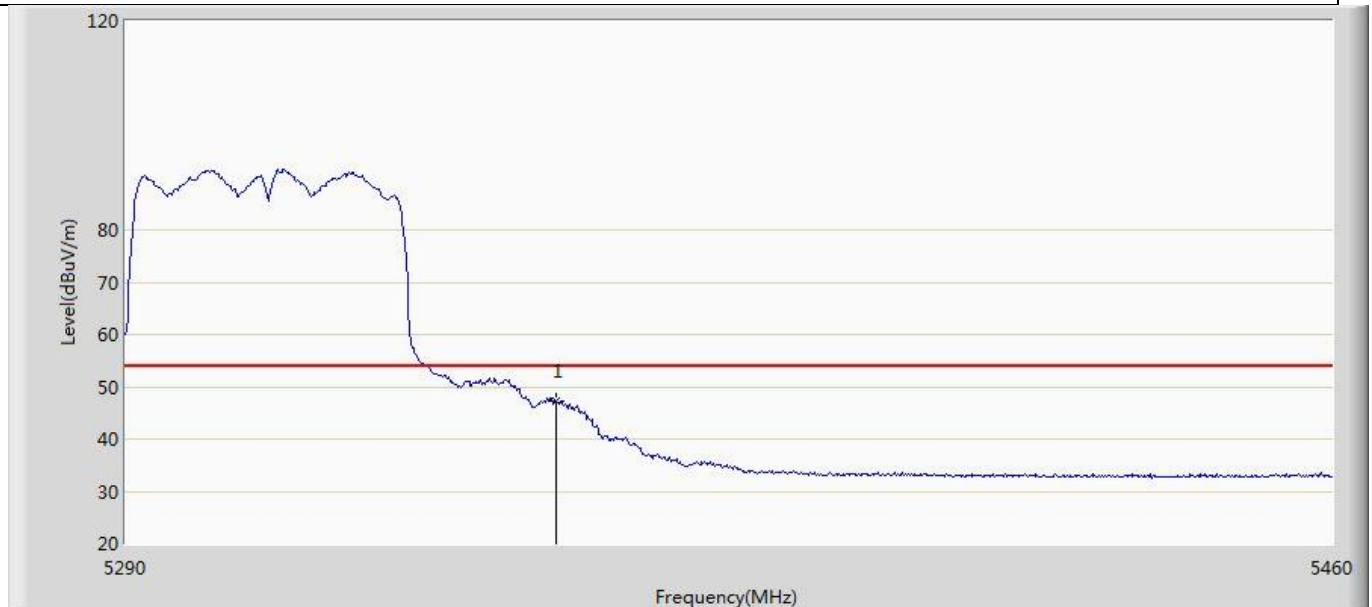


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	47.376	9.938	-6.624	54.000	37.438	AV

Profile: 2360091R	Page No.: 57
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) with ant1+2	

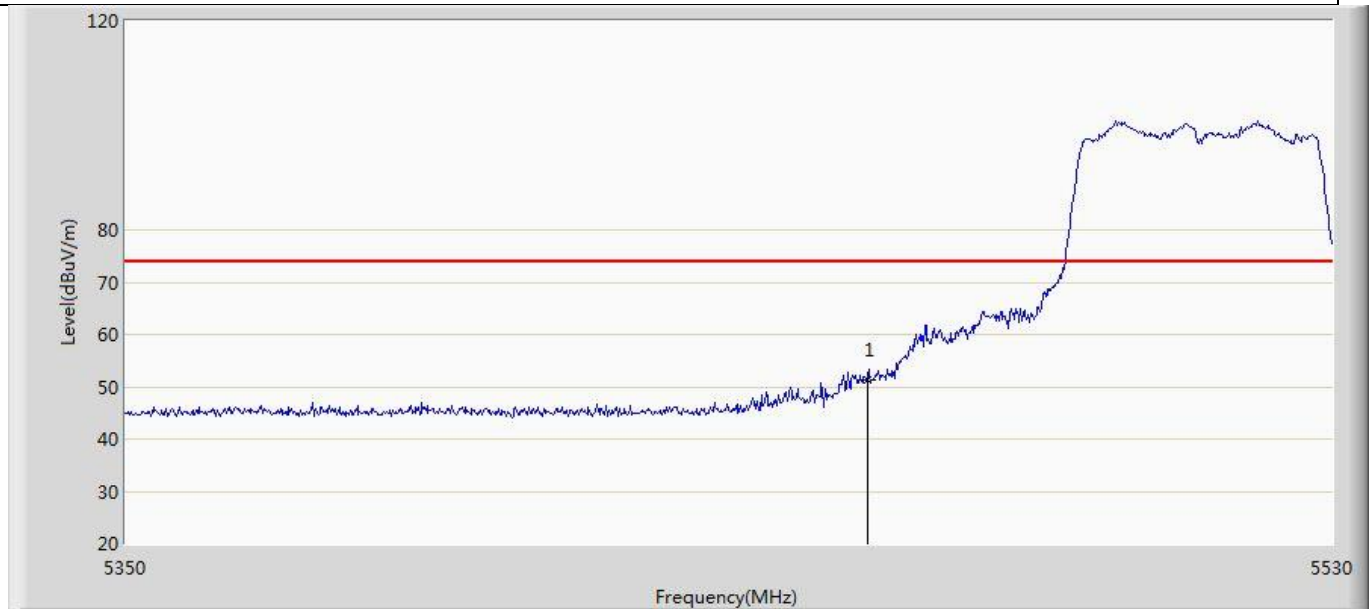


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	51.421	13.688	-22.579	74.000	37.732	PK

Profile: 2360091R	Page No.: 58
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) with ant1+2	

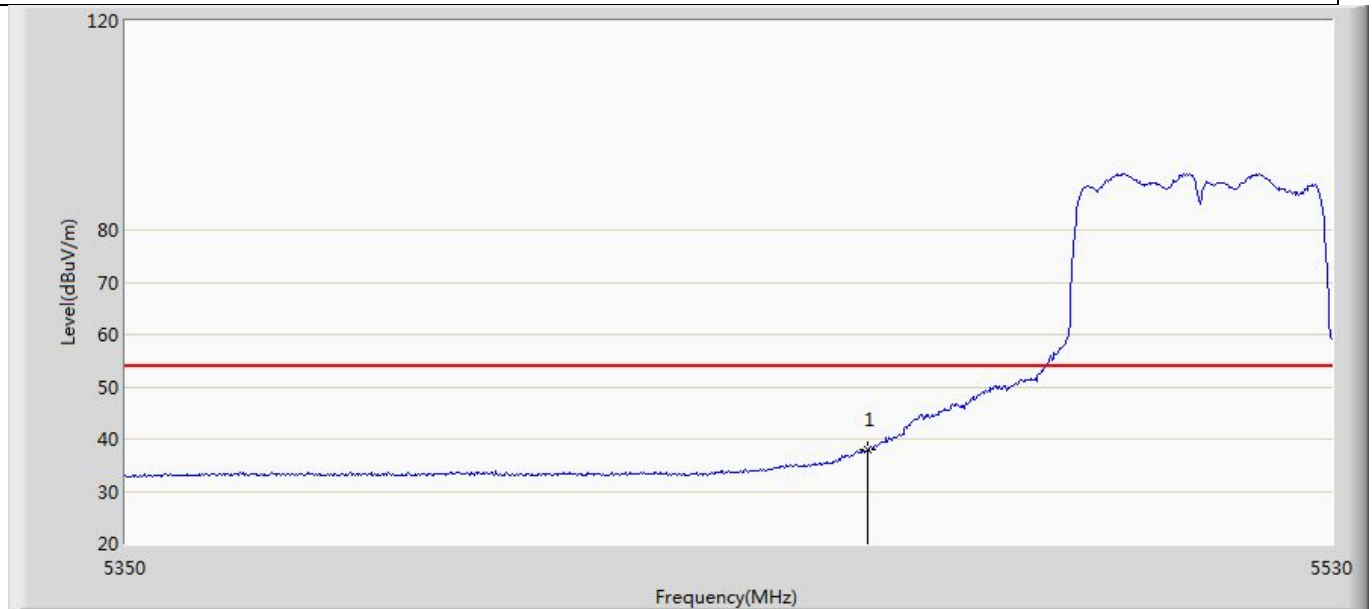


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	37.871	0.138	-16.129	54.000	37.732	AV

Profile: 2360091R	Page No.: 59
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) with ant1+2	

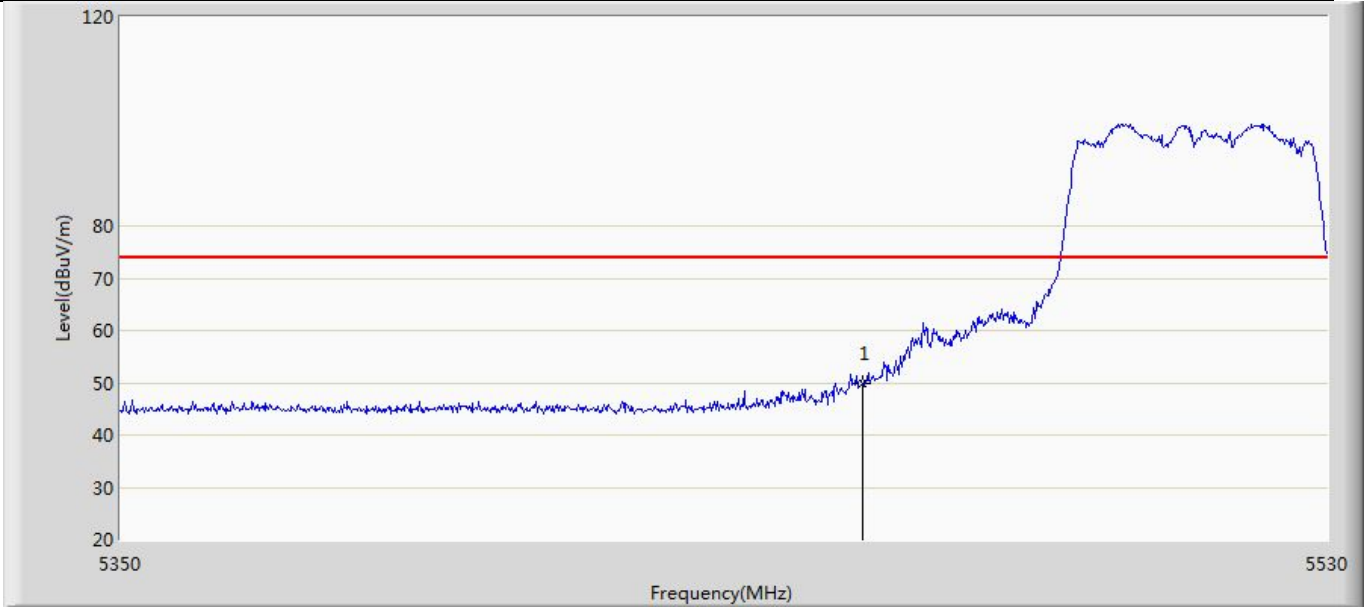


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	49.729	11.996	-24.271	74.000	37.732	PK

Profile: 2360091R	Page No.: 60
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5510MHz by 802.11ac(40MHz) with ant1+2	

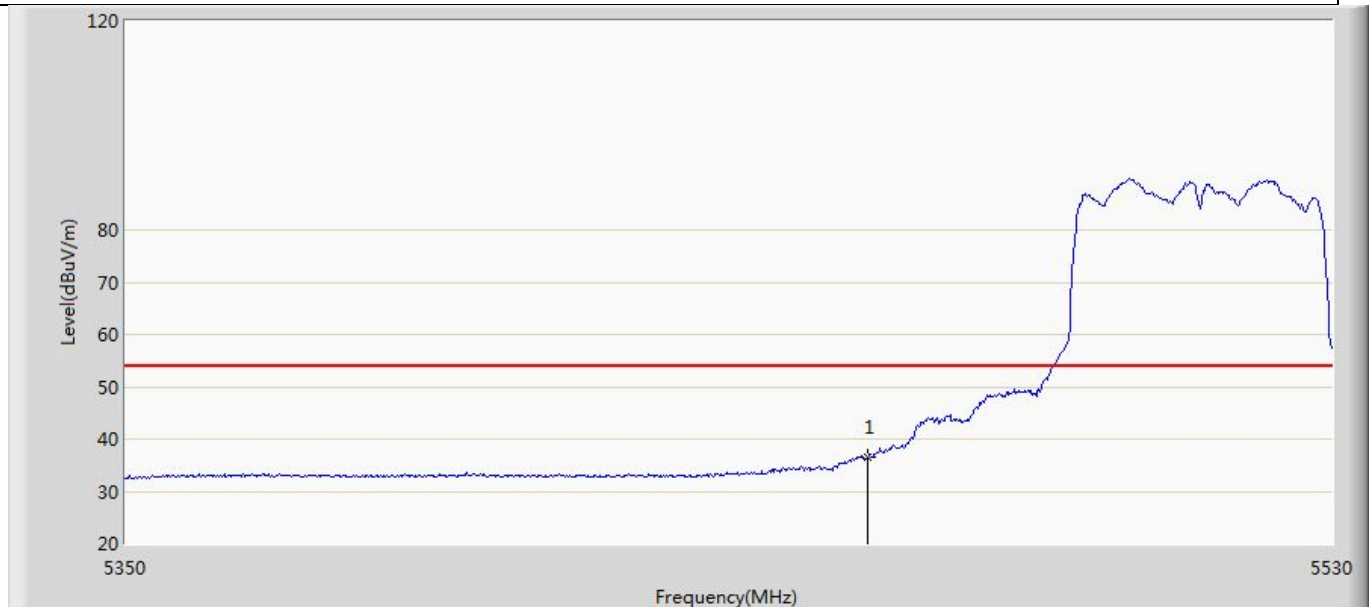


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	36.514	-1.219	-17.486	54.000	37.732	AV

Profile: 2360091R	Page No.: 23
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:28
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5755MHz by 802.11ac (40MHz) with ant1+2	

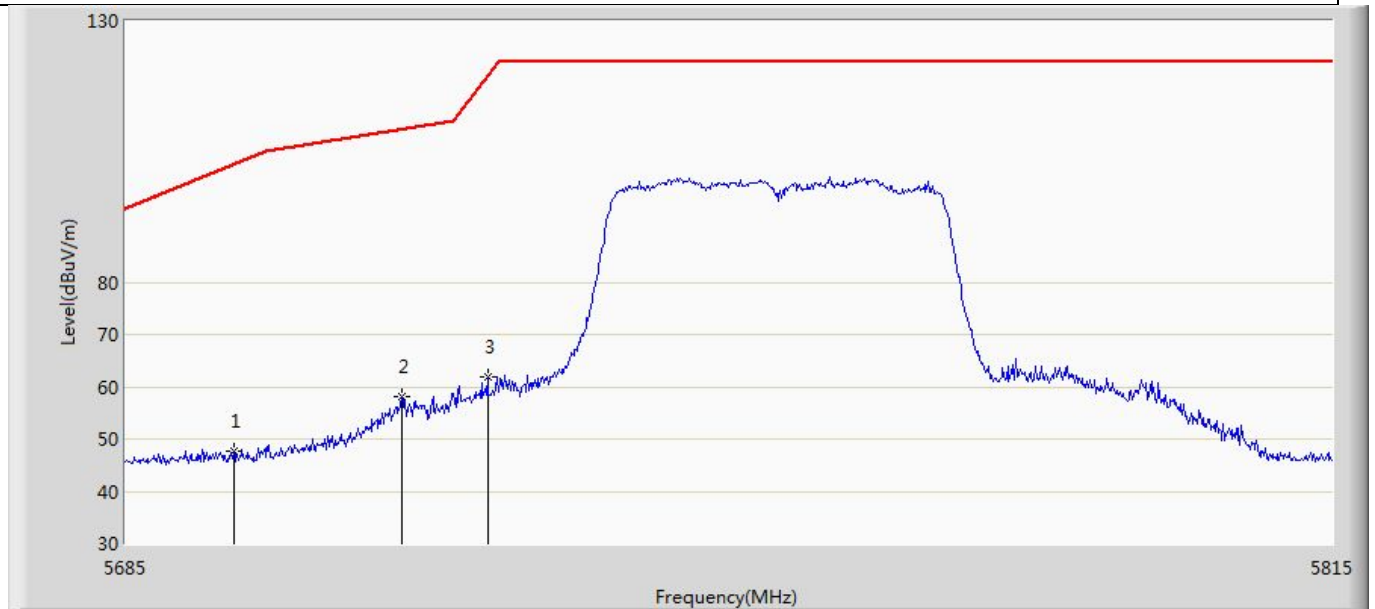


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.570	47.633	9.650	-55.039	102.672	37.984	PK
2	*	5714.510	58.030	20.097	-51.235	109.265	37.933	PK
3		5723.740	61.950	23.870	-57.378	119.328	38.080	PK

Profile: 2360091R	Page No.: 24
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:30
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5755MHz by 802.11ac (40MHz) with ant1+2	

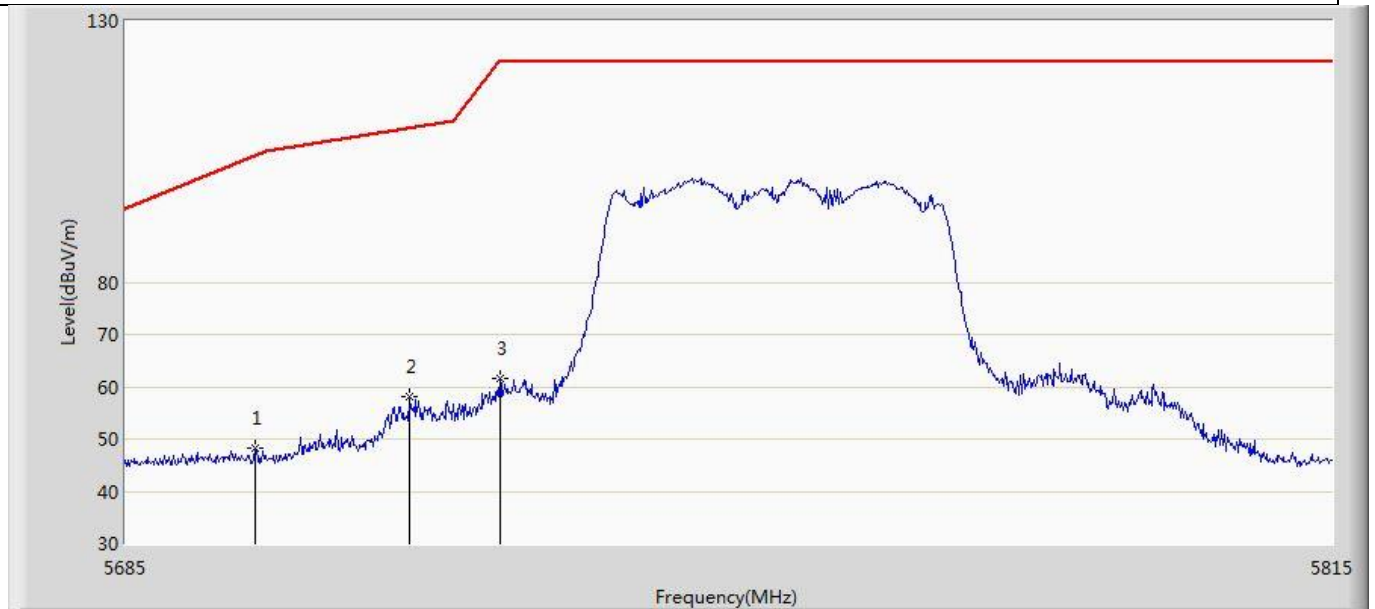


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5698.910	48.219	10.262	-56.178	104.397	37.958	PK
2	*	5715.420	58.048	20.101	-51.471	109.519	37.947	PK
3		5725.040	61.723	23.622	-60.477	122.200	38.101	PK

Profile: 2360091R	Page No.: 25
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:32
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5795MHz by 802.11ac (40MHz) with ant1+2	

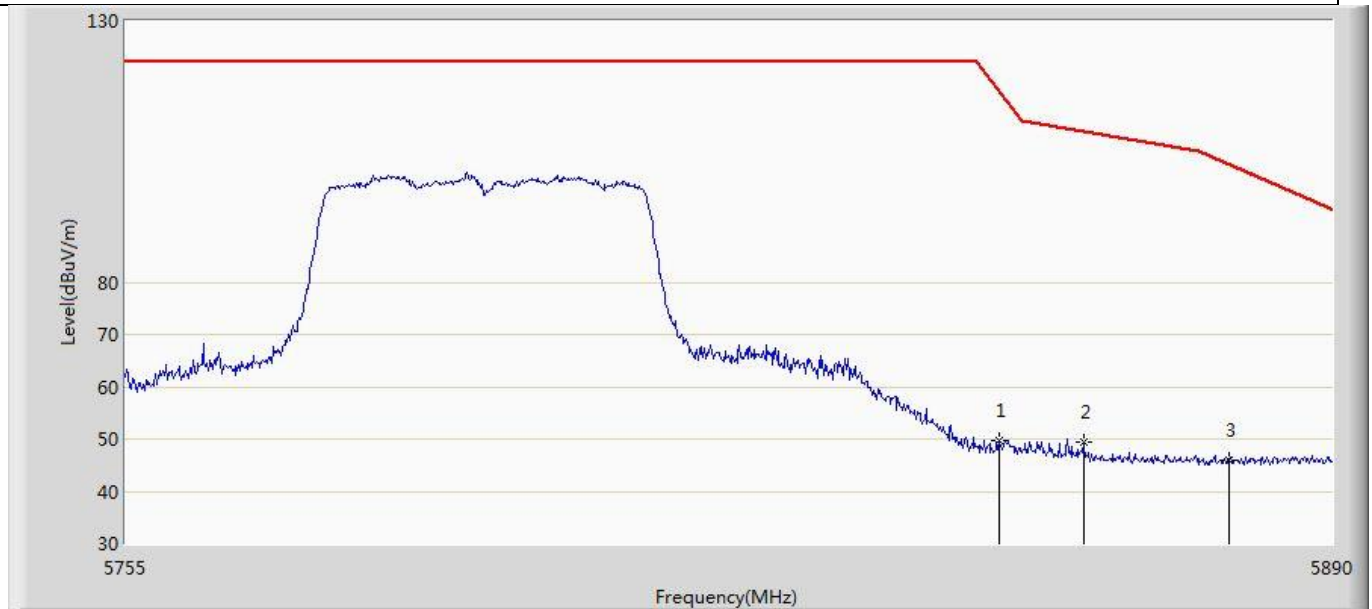


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.470	49.584	11.429	-66.983	116.567	38.155	PK
2		5861.920	49.316	11.104	-59.545	108.860	38.212	PK
3	*	5878.390	45.807	7.672	-56.875	102.681	38.135	PK

Profile: 2360091R	Page No.: 26
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:33
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 5: Transmit at 5795MHz by 802.11ac (40MHz) with ant1+2	

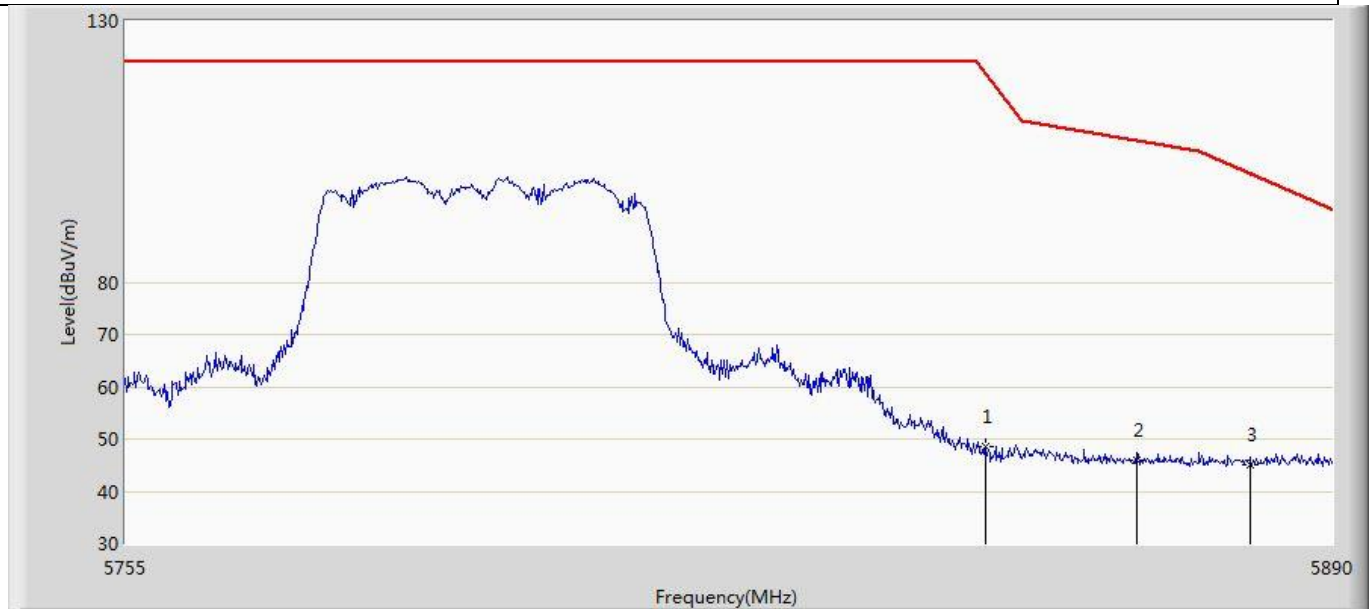


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5850.985	48.671	10.524	-71.283	119.953	38.146	PK
2		5867.995	46.013	7.829	-61.146	107.159	38.184	PK
3	*	5880.820	45.047	6.911	-55.830	100.877	38.136	PK

Profile: 2360091R	Page No.: 61
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) with ant1+2	

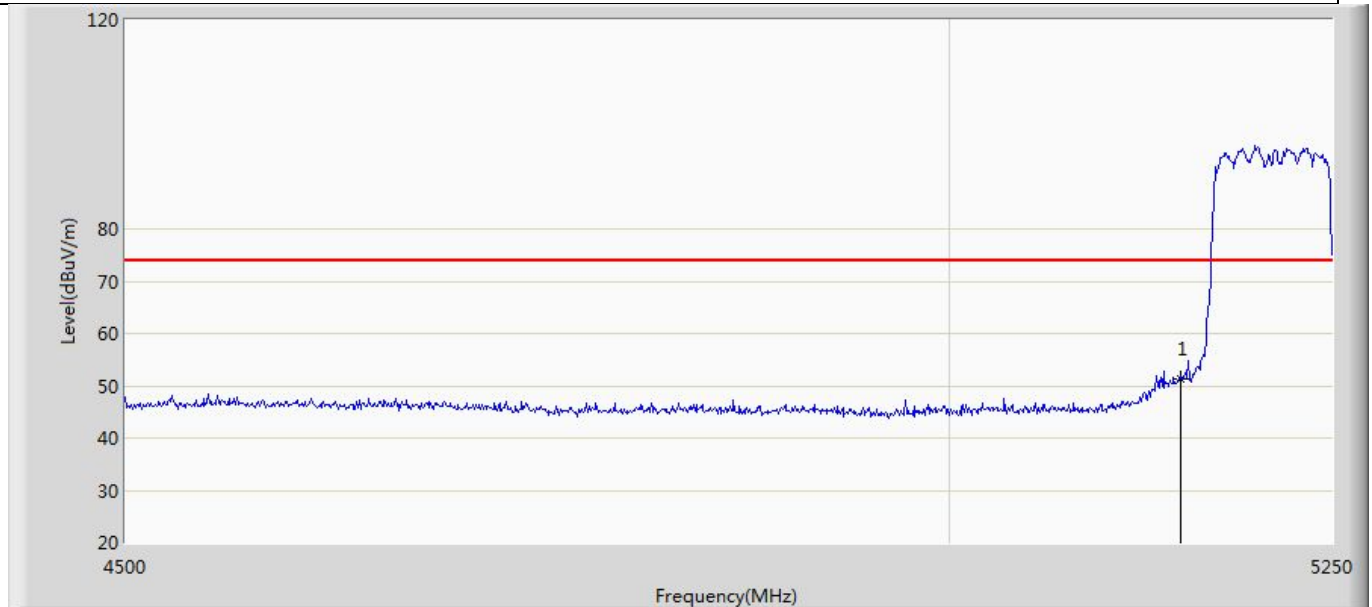


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.237	14.007	-22.763	74.000	37.230	PK

Profile: 2360091R	Page No.: 62
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) with ant1+2	

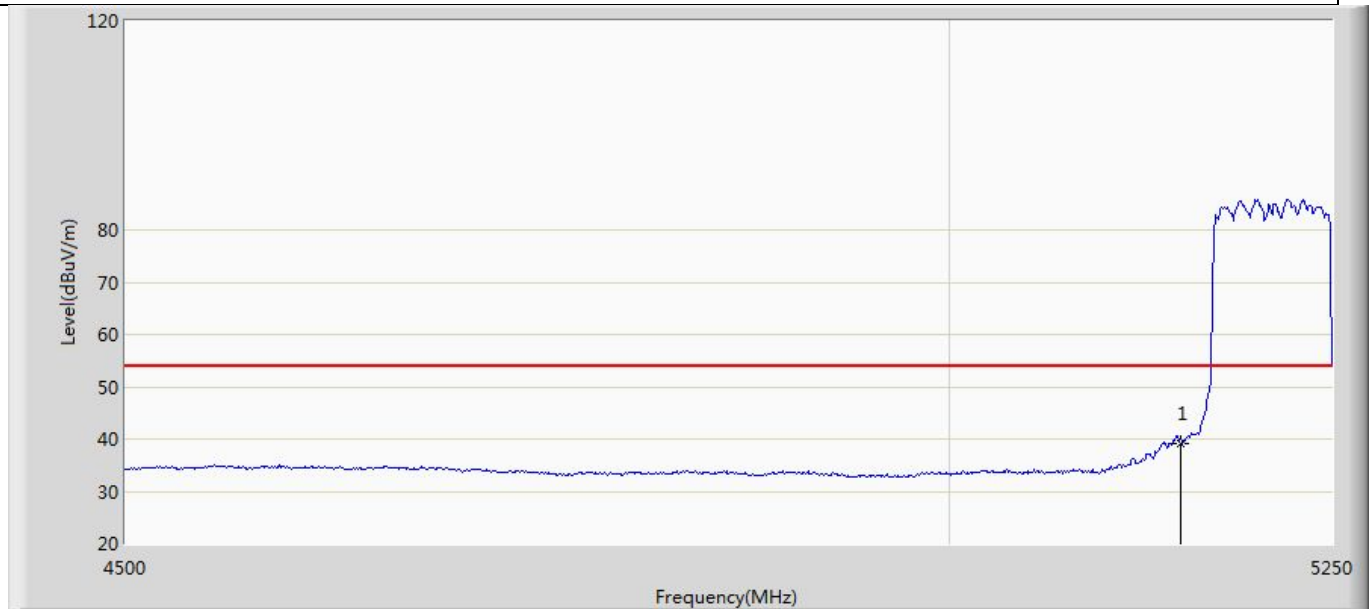


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	39.170	1.940	-14.830	54.000	37.230	AV

Profile: 2360091R	Page No.: 63
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) with ant1+2	

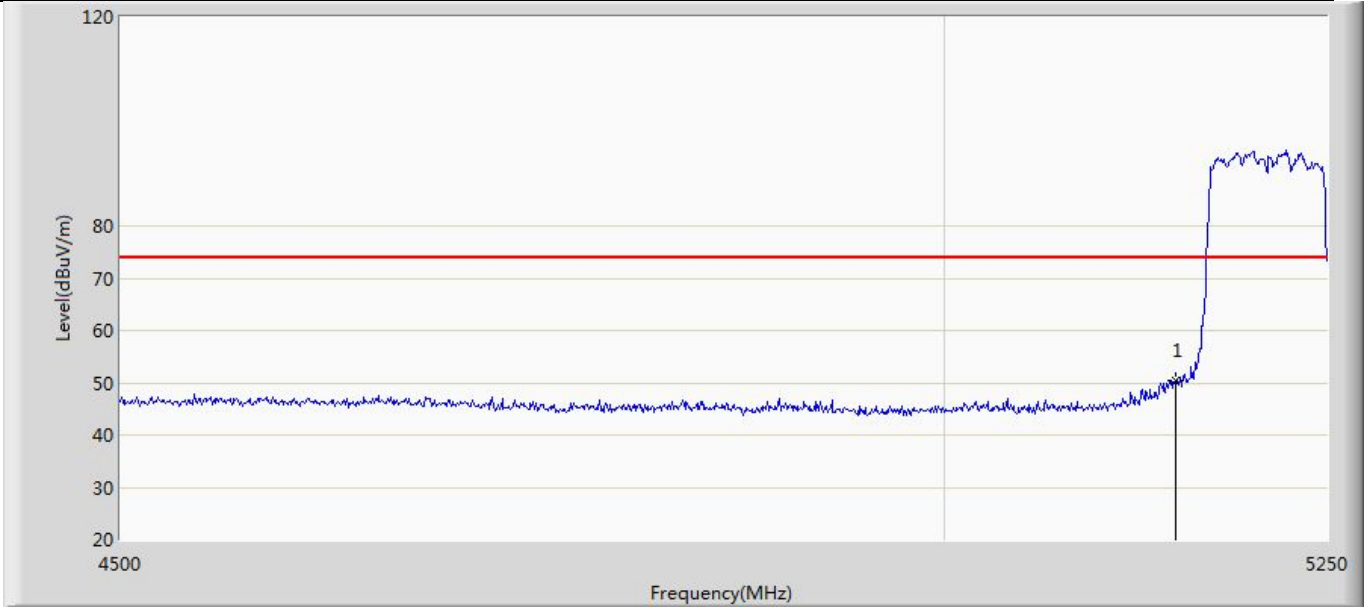


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	50.394	13.164	-23.606	74.000	37.230	PK

Profile: 2360091R	Page No.: 64
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5210MHz by 802.11ac(80MHz) with ant1+2	

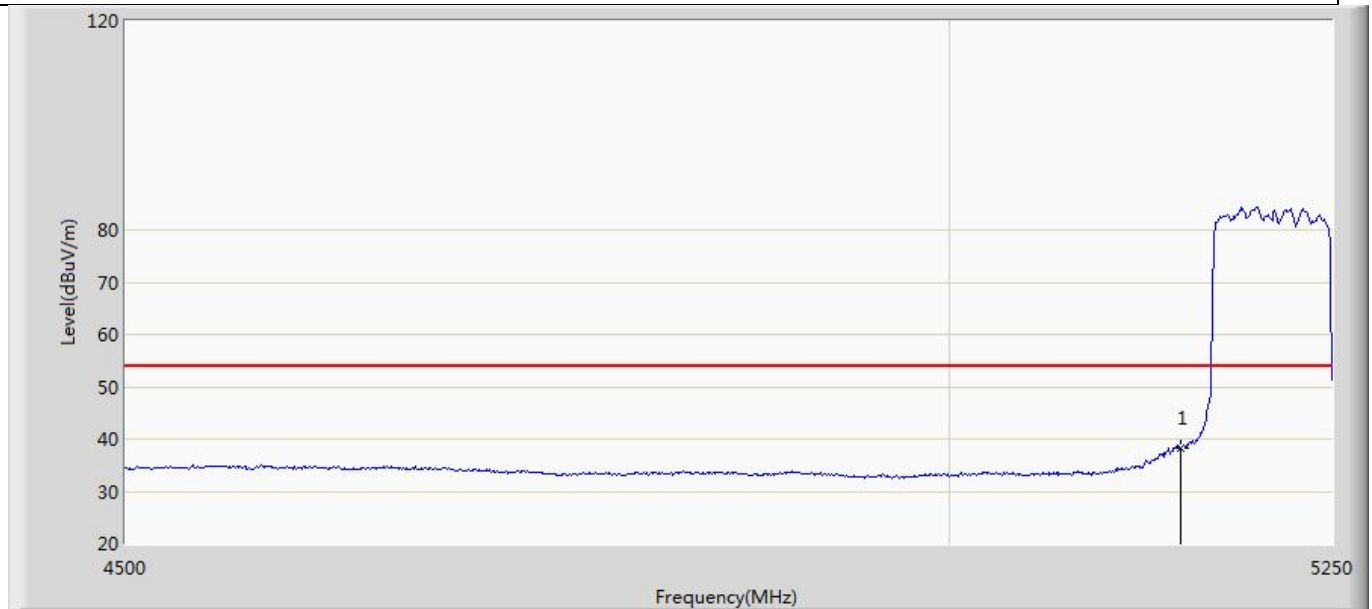


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	38.344	1.114	-15.656	54.000	37.230	AV

Profile: 2360091R	Page No.: 65
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) with ant1+2	

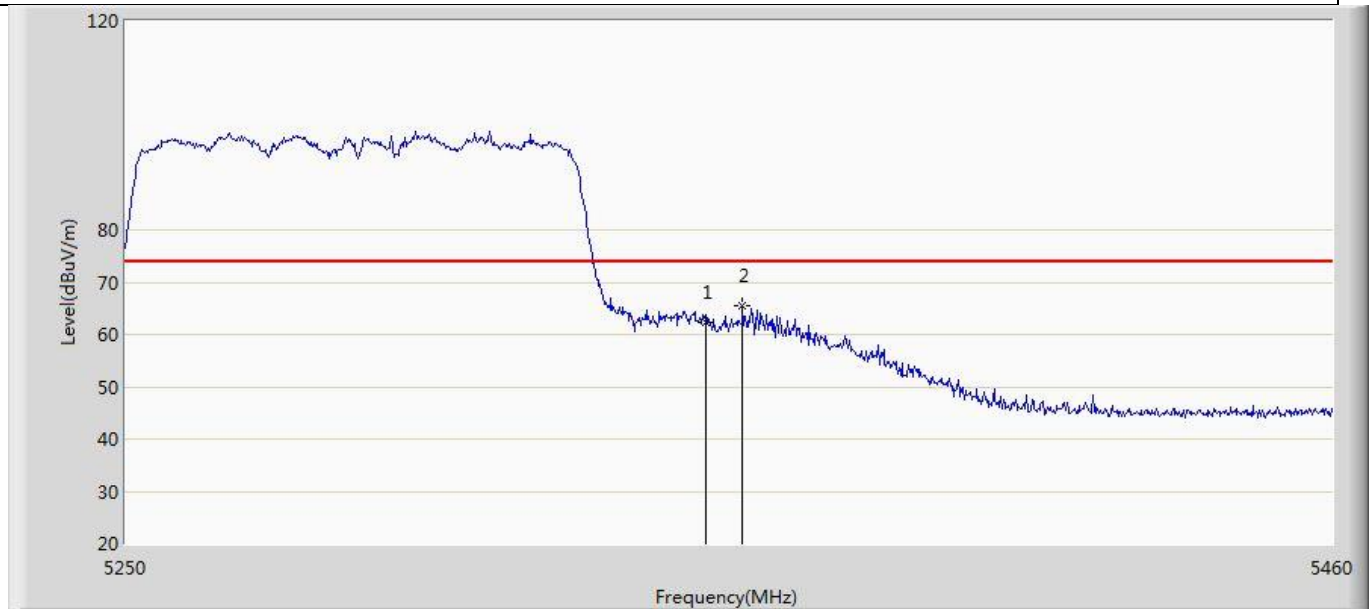


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	62.418	24.980	-11.582	74.000	37.438	PK
2	*	5356.470	65.617	28.127	-8.383	74.000	37.490	PK

Profile: 2360091R	Page No.: 66
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) with ant1+2	

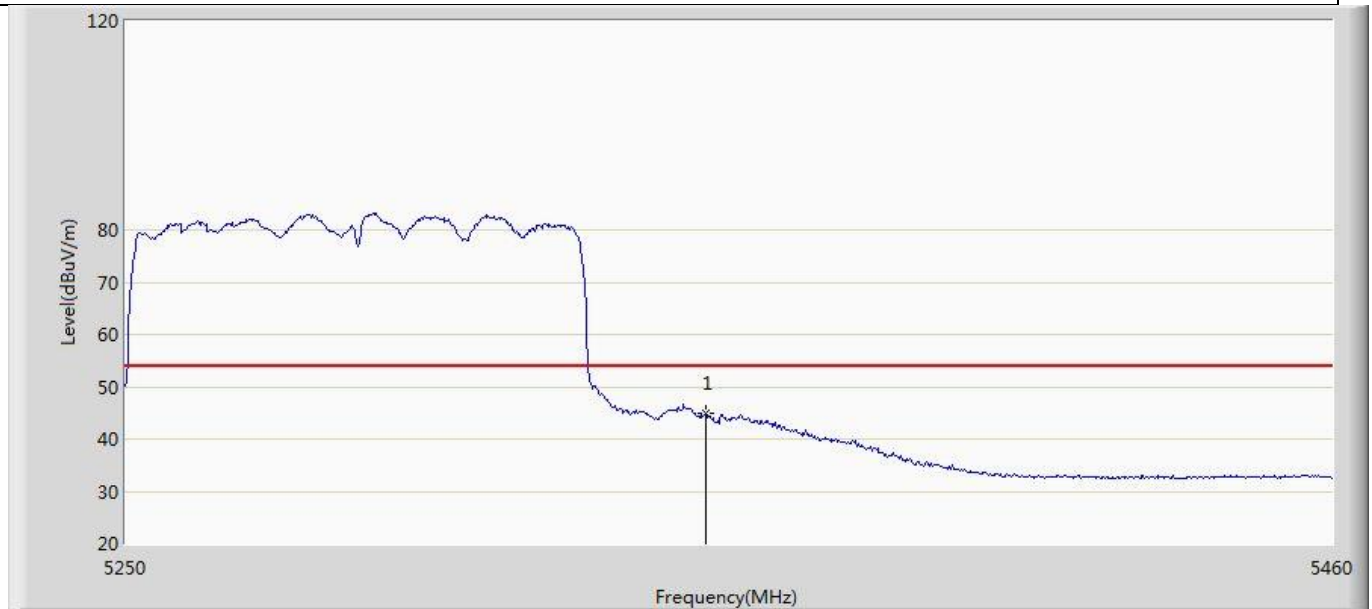


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	44.812	7.374	-9.188	54.000	37.438	AV

Profile: 2360091R	Page No.: 67
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) with ant1+2	

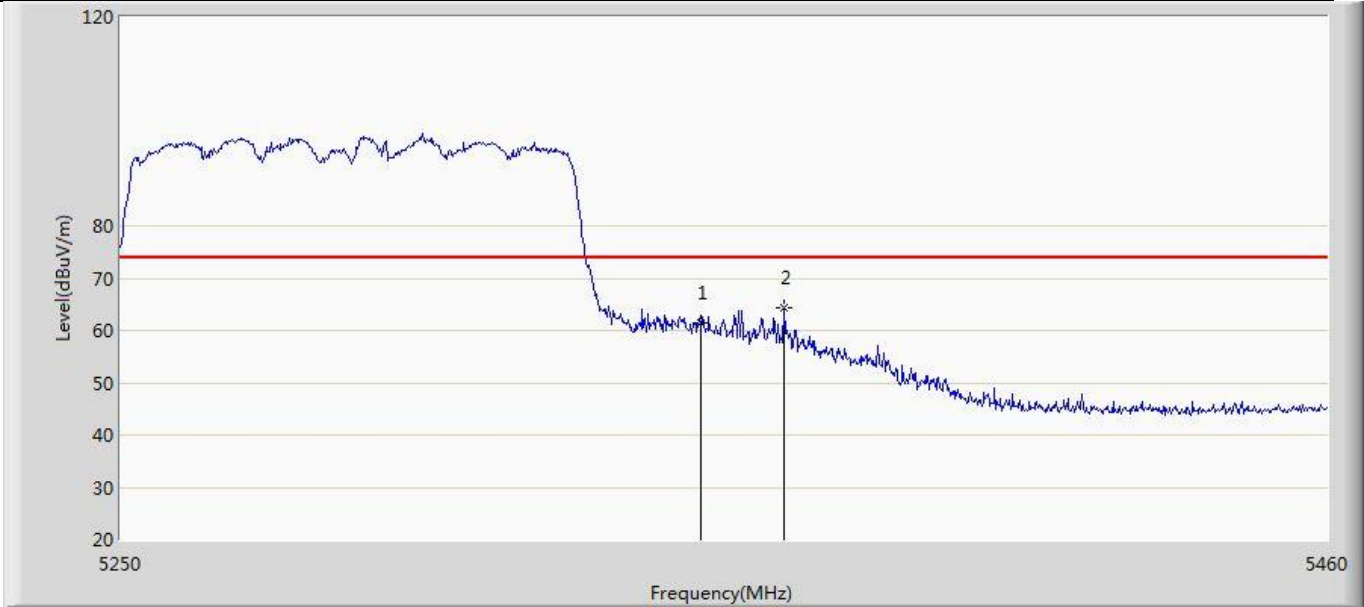


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	61.570	24.132	-12.430	74.000	37.438	PK
2	*	5364.450	64.341	26.773	-9.659	74.000	37.568	PK

Profile: 2360091R	Page No.: 68
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5290MHz by 802.11ac(80MHz) with ant1+2	

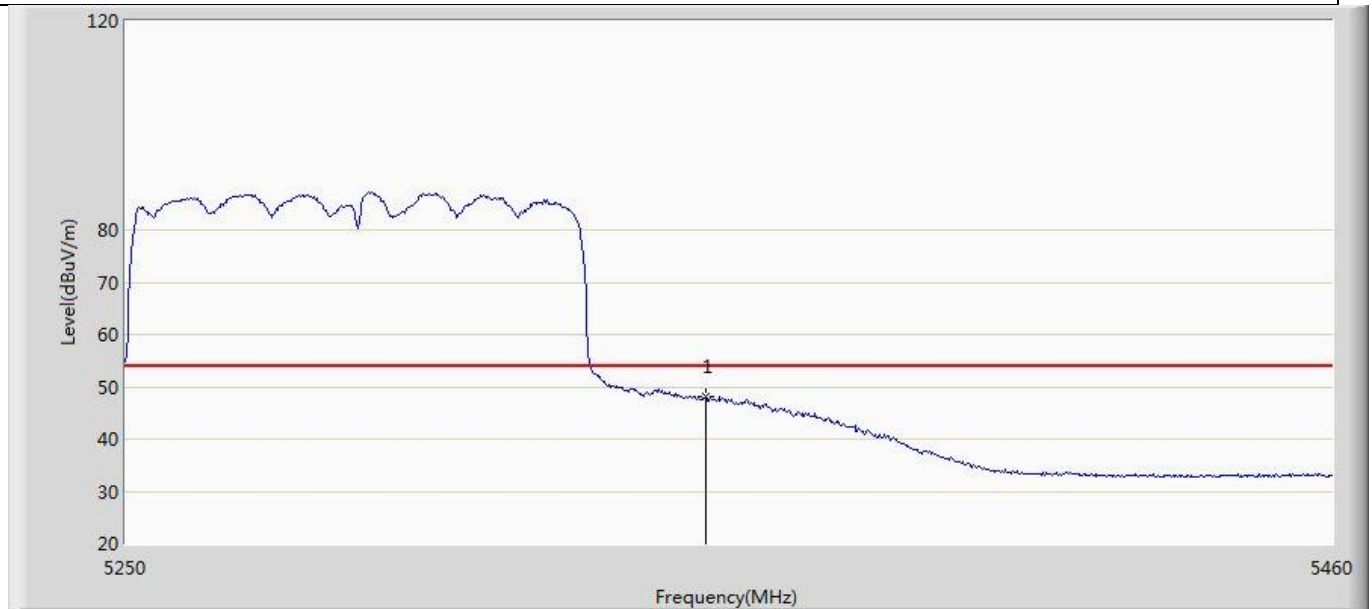


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	48.042	10.604	-5.958	54.000	37.438	AV

Profile: 2360091R	Page No.: 69
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) with ant1+2	

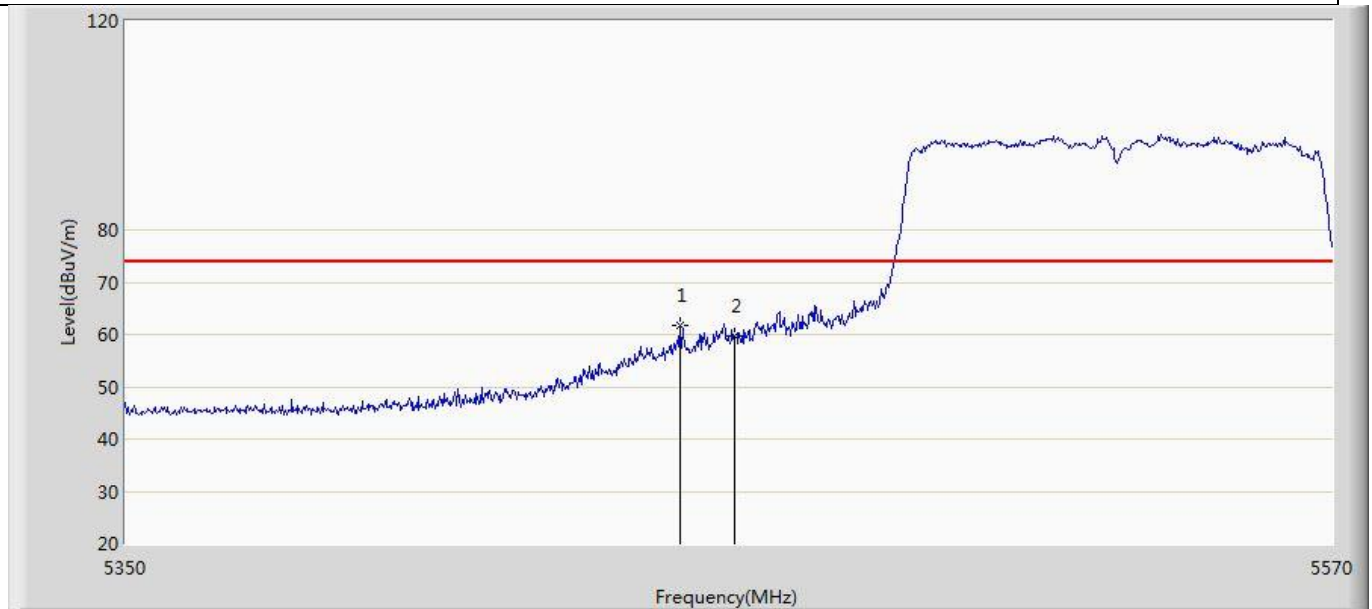


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5450.100	61.714	23.968	-12.286	74.000	37.746	PK
2		5460.000	59.722	21.989	-14.278	74.000	37.732	PK

Profile: 2360091R	Page No.: 70
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) with ant1+2	

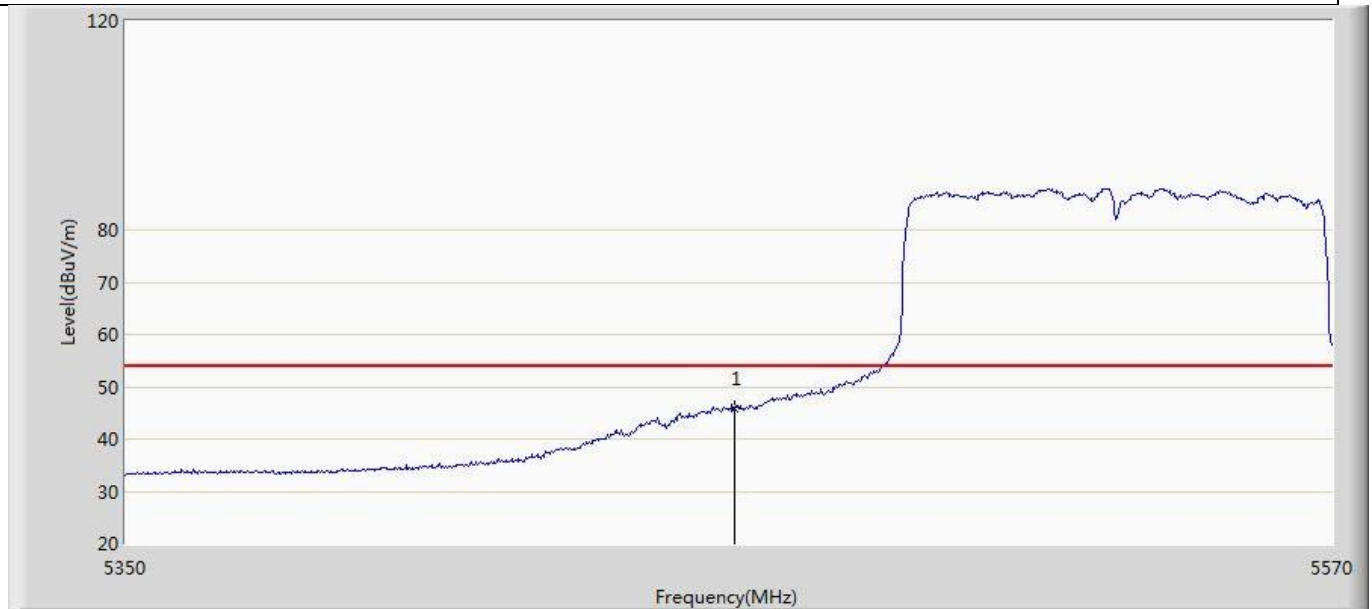


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	45.672	7.939	-8.328	54.000	37.732	AV

Profile: 2360091R	Page No.: 71
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) with ant1+2	

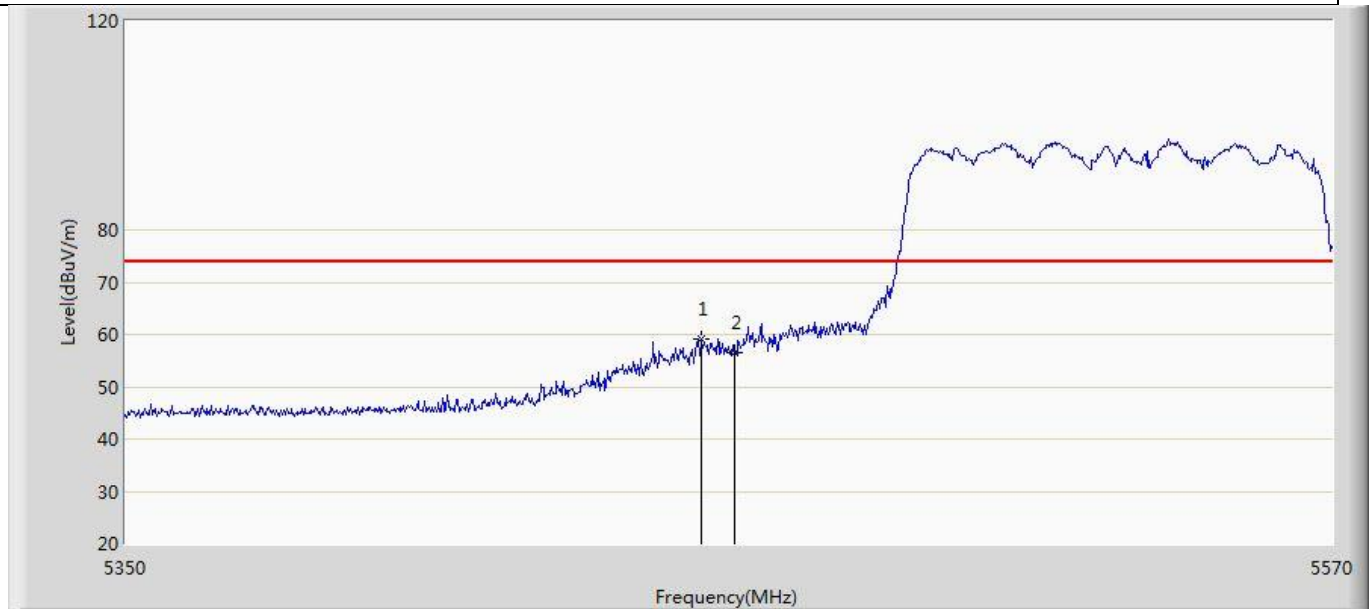


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5453.840	59.181	21.423	-14.819	74.000	37.759	PK
2		5460.000	56.508	18.775	-17.492	74.000	37.732	PK

Profile: 2360091R	Page No.: 72
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5530MHz by 802.11ac(80MHz) with ant1+2	

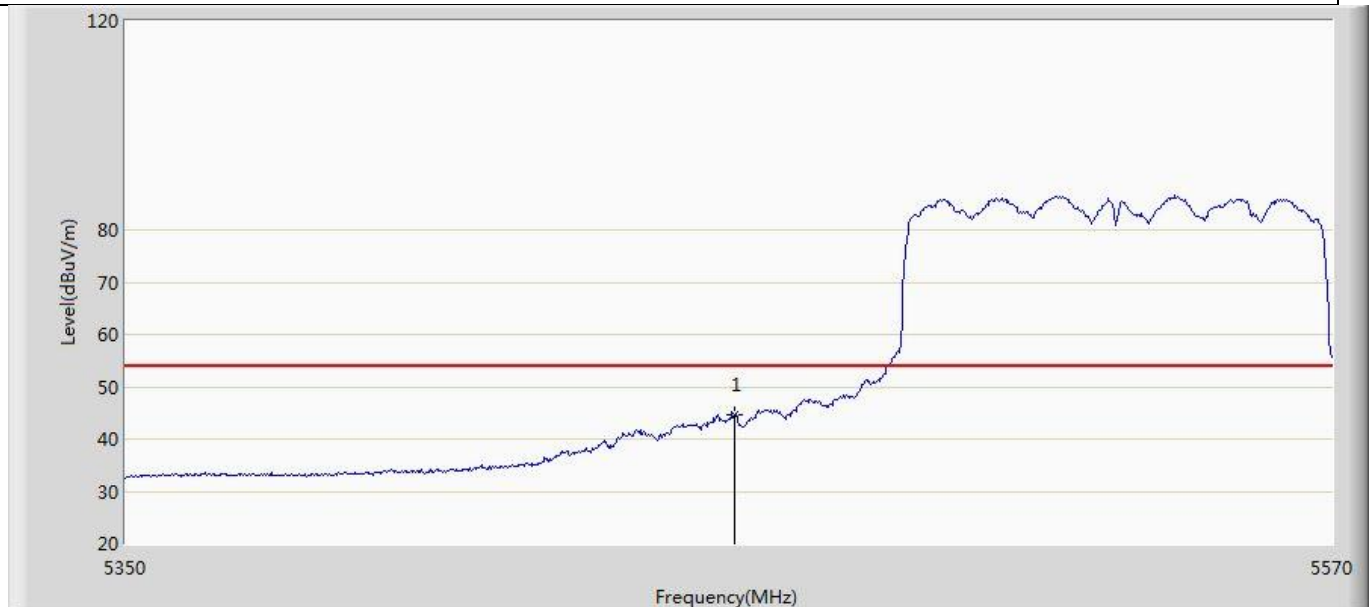


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	44.619	6.886	-9.381	54.000	37.732	AV

Profile: 2360091R	Page No.: 27
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:35
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5775MHz by 802.11ac (80MHz) with ant1+2	

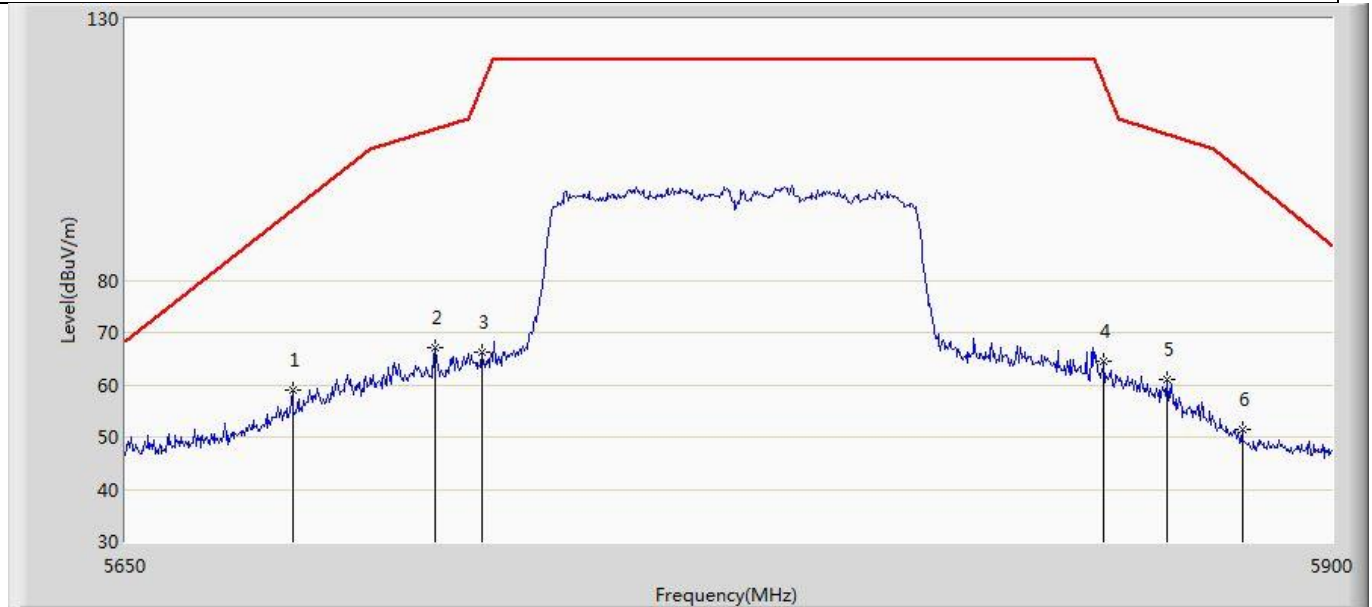


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5684.000	58.944	20.986	-34.451	93.395	37.958	PK
2		5713.250	67.216	29.303	-41.696	108.912	37.913	PK
3		5722.750	66.163	28.099	-50.908	117.071	38.064	PK
4		5852.000	64.414	26.261	-53.225	117.639	38.153	PK
5		5865.250	61.023	22.826	-46.905	107.928	38.197	PK
6		5881.000	51.457	13.320	-49.287	100.743	38.136	PK

Profile: 2360091R	Page No.: 28
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:37
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 6: Transmit at 5775MHz by 802.11ac (80MHz) with ant1+2	

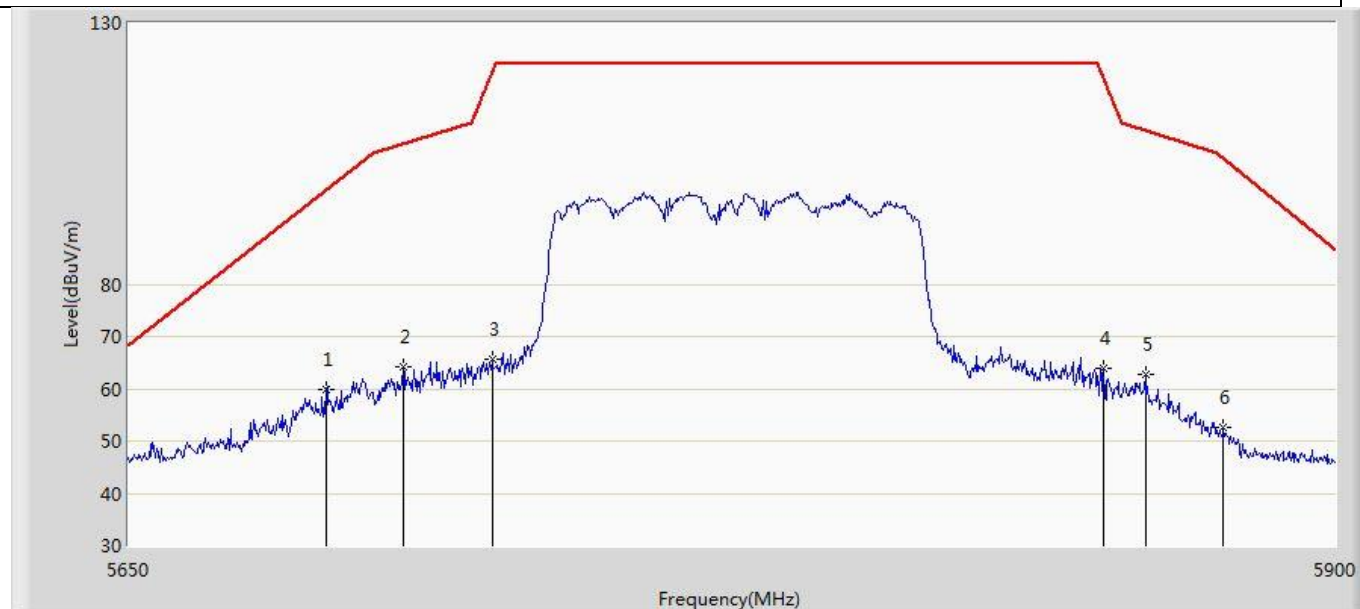


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5690.250	59.724	21.707	-38.286	98.011	38.018	PK
2		5706.000	64.123	26.245	-42.759	106.882	37.878	PK
3		5724.250	65.783	27.695	-54.708	120.491	38.088	PK
4		5851.250	63.852	25.704	-55.497	119.349	38.148	PK
5		5860.000	62.871	24.671	-46.527	109.398	38.201	PK
6		5876.500	52.714	14.570	-51.372	104.085	38.144	PK

Profile: 2360091R	Page No.: 73
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 22:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) with ant1+2	

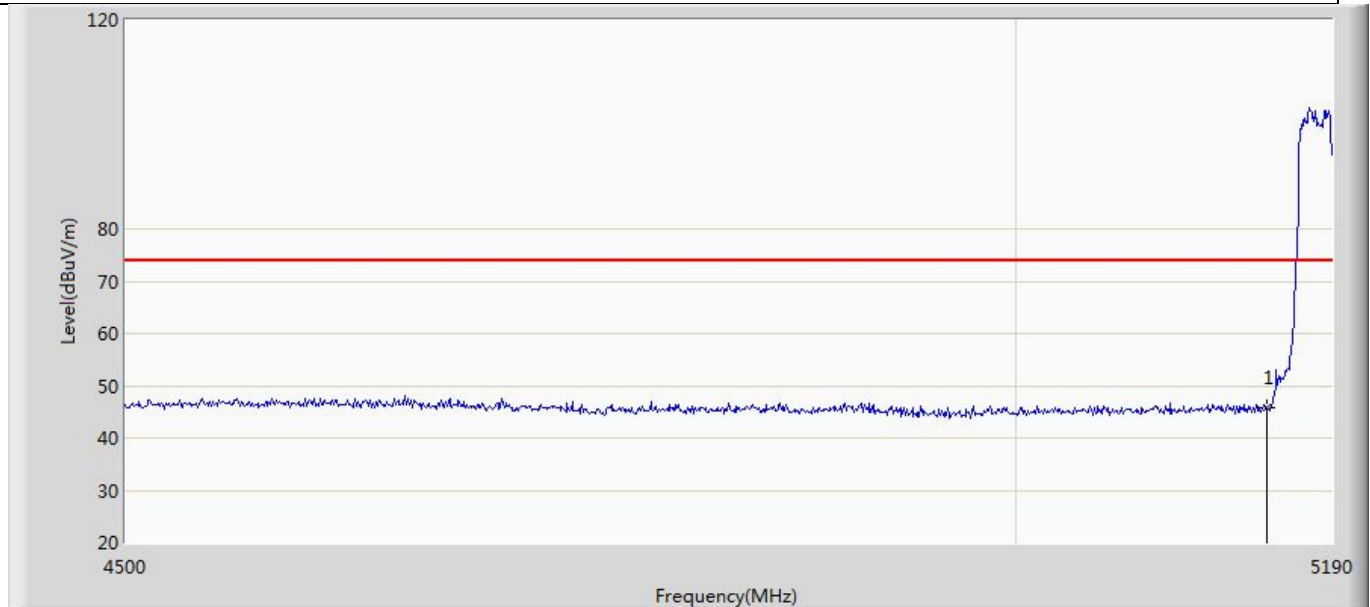


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.711	8.481	-28.289	74.000	37.230	PK

Profile: 2360091R	Page No.: 74
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) with ant1+2	

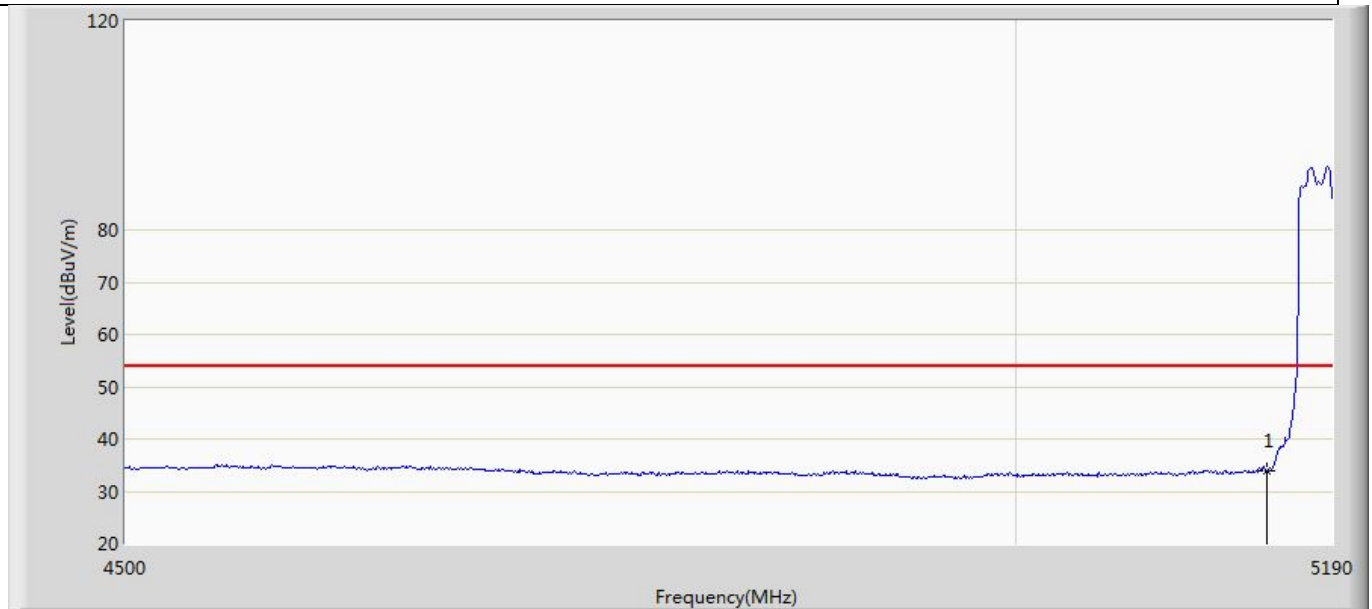


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	33.992	-3.238	-20.008	54.000	37.230	AV

Profile: 2360091R	Page No.: 75
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) with ant1+2	

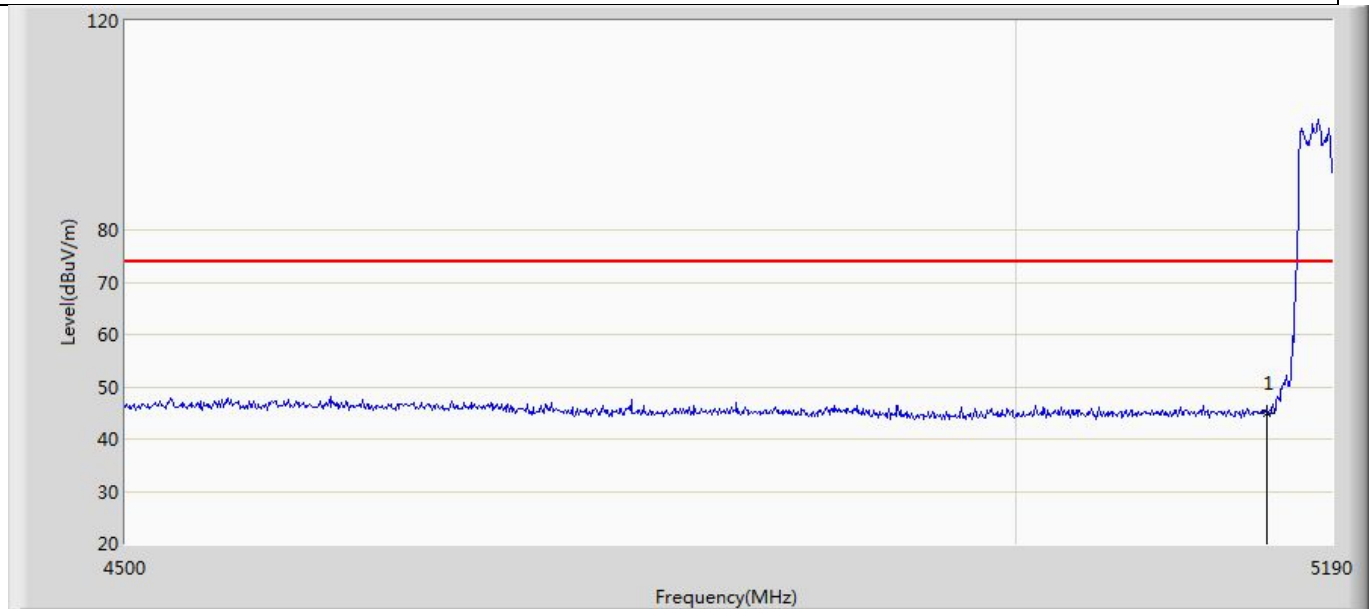


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	45.057	7.827	-28.943	74.000	37.230	PK

Profile: 2360091R	Page No.: 76
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5180MHz by 802.11ax(20MHz) with ant1+2	

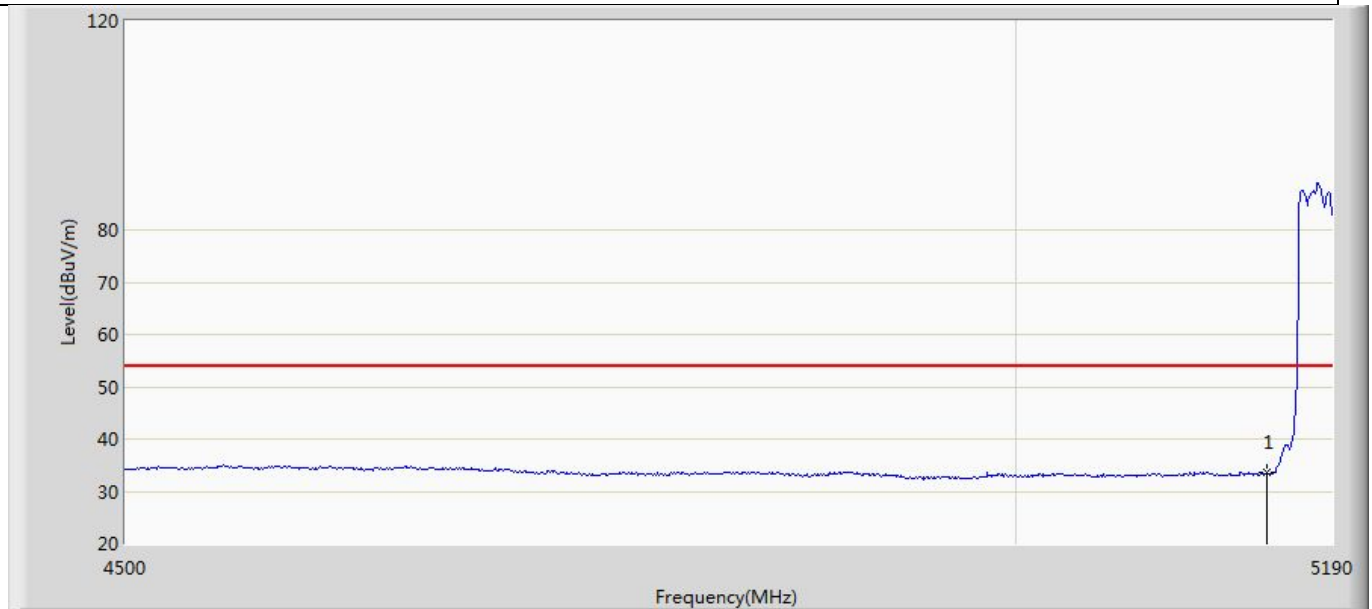


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	33.486	-3.744	-20.514	54.000	37.230	AV

Profile: 2360091R	Page No.: 77
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) with ant1+2	

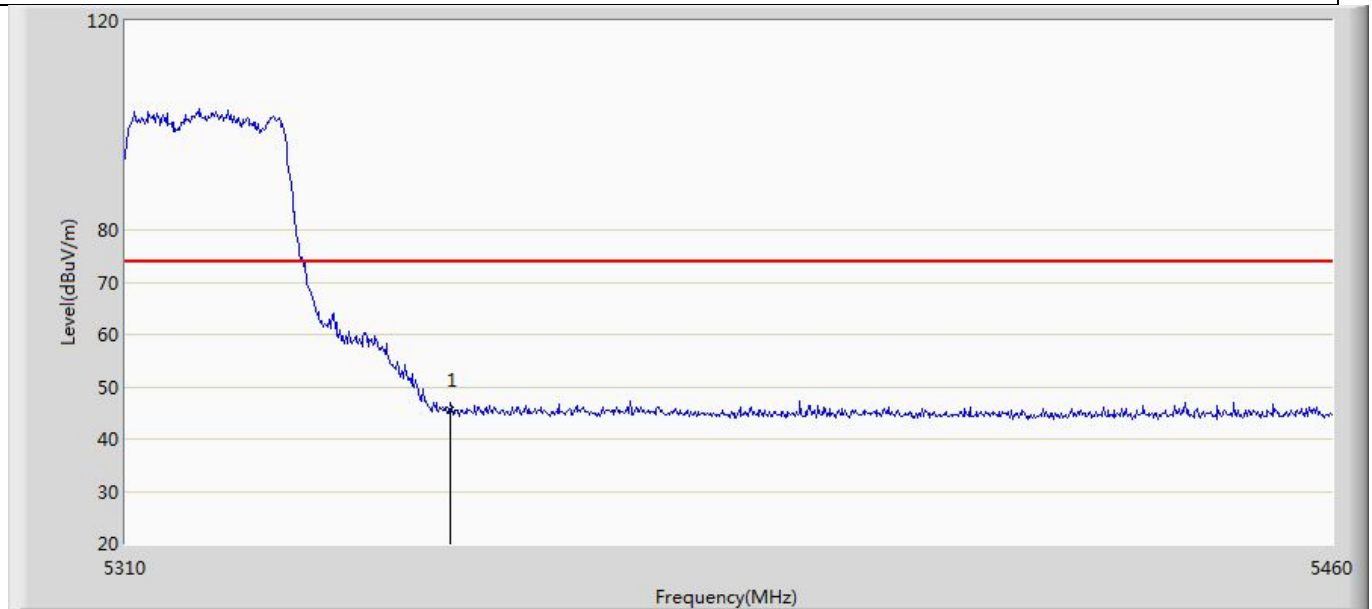


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	45.477	8.039	-28.523	74.000	37.438	PK

Profile: 2360091R	Page No.: 78
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) with ant1+2	

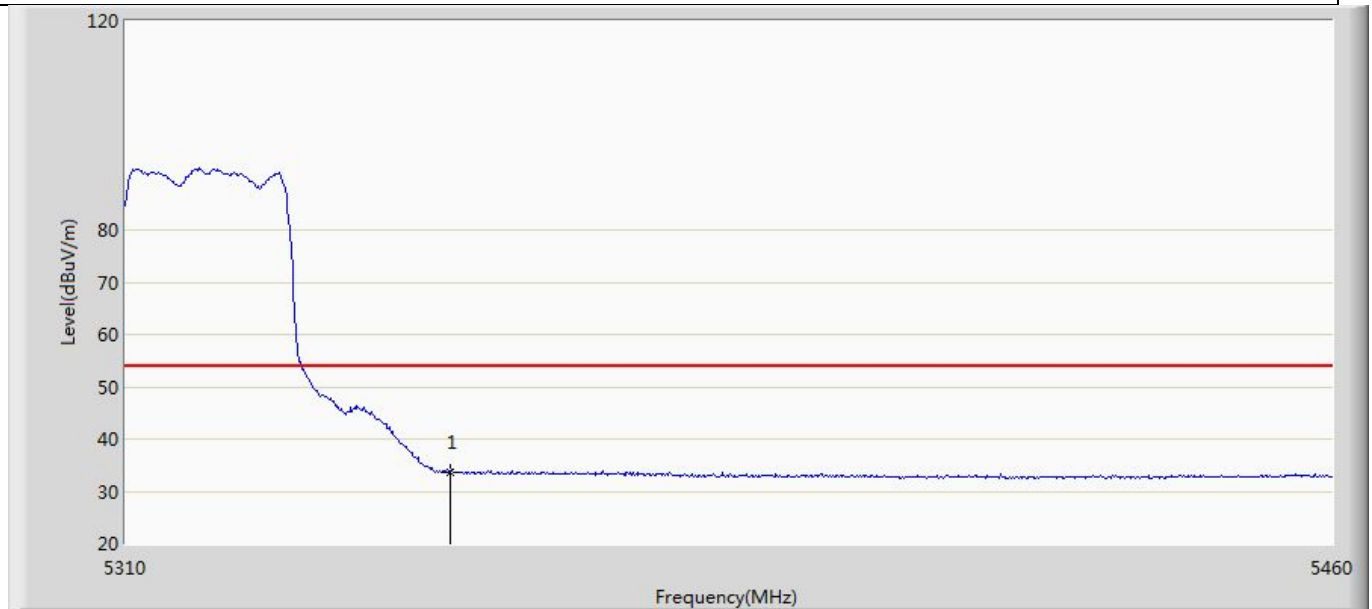


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	33.717	-3.721	-20.283	54.000	37.438	AV

Profile: 2360091R	Page No.: 79
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) with ant1+2	

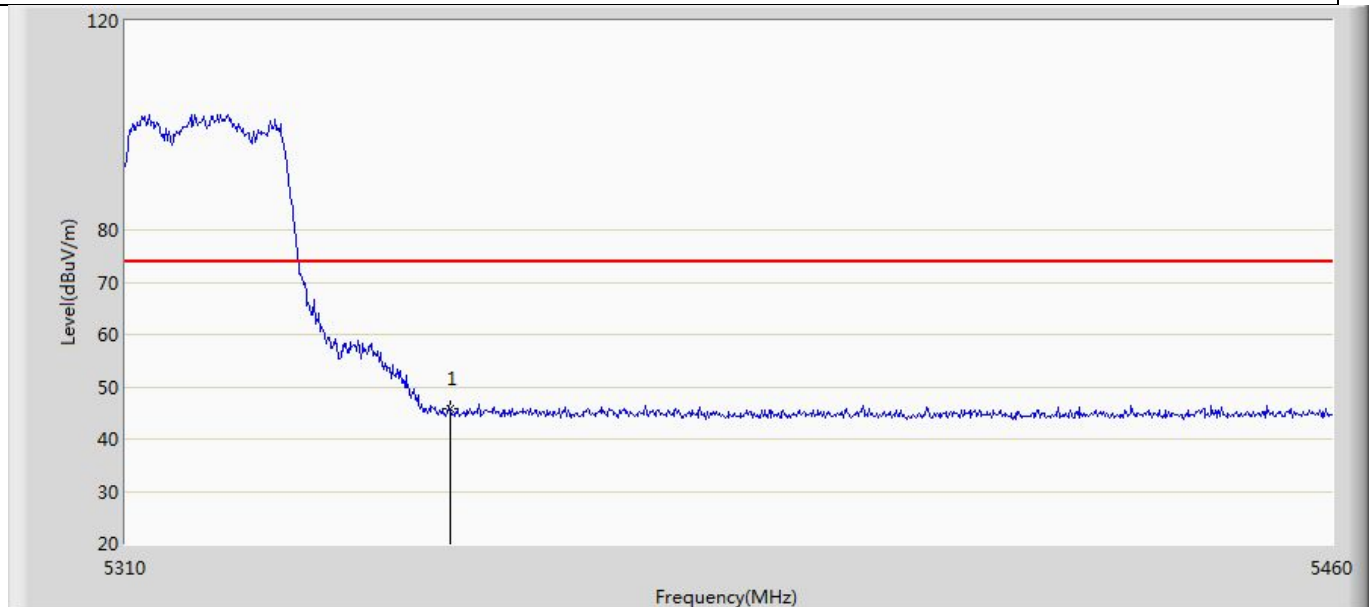


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	45.705	8.267	-28.295	74.000	37.438	PK

Profile: 2360091R	Page No.: 80
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5320MHz by 802.11ax(20MHz) with ant1+2	

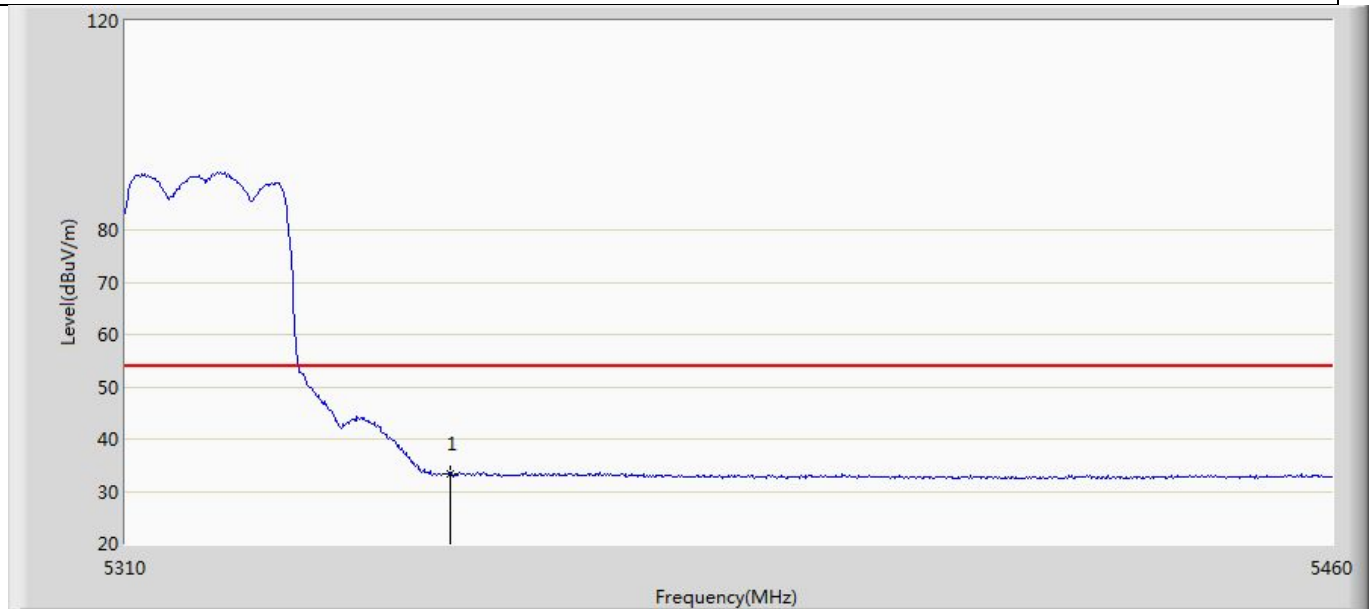


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	33.458	-3.980	-20.542	54.000	37.438	AV

Profile: 2360091R	Page No.: 81
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) with ant1+2	

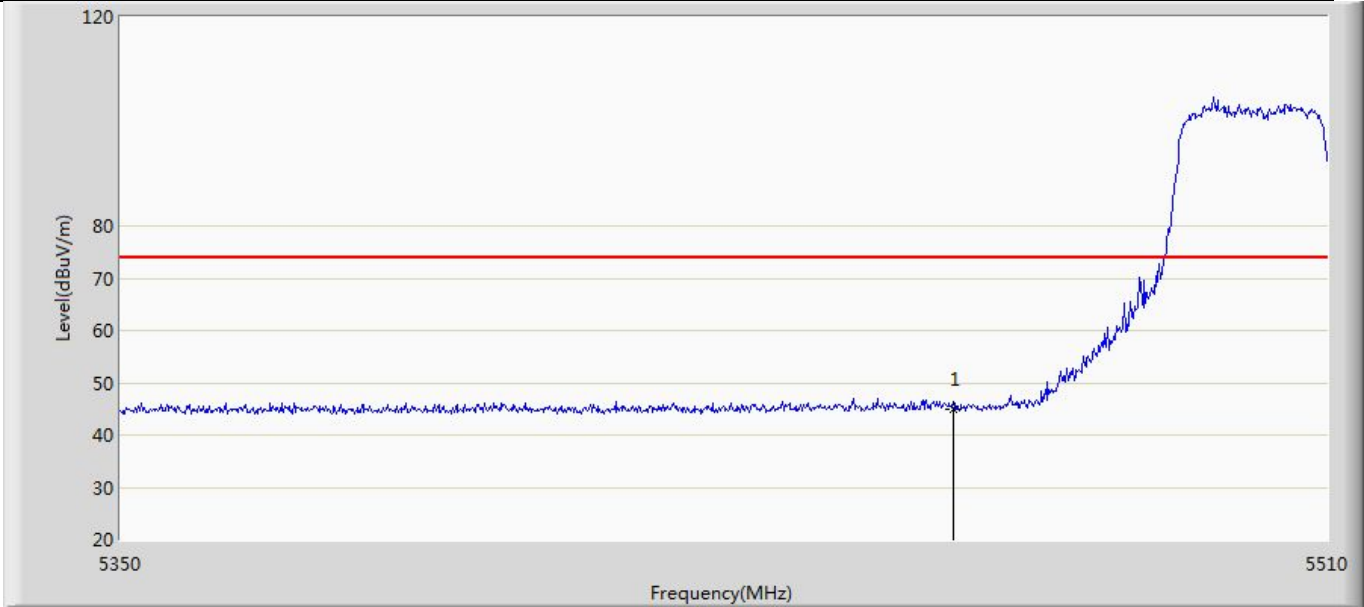


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	44.959	7.226	-29.041	74.000	37.732	PK

Profile: 2360091R	Page No.: 82
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) with ant1+2	

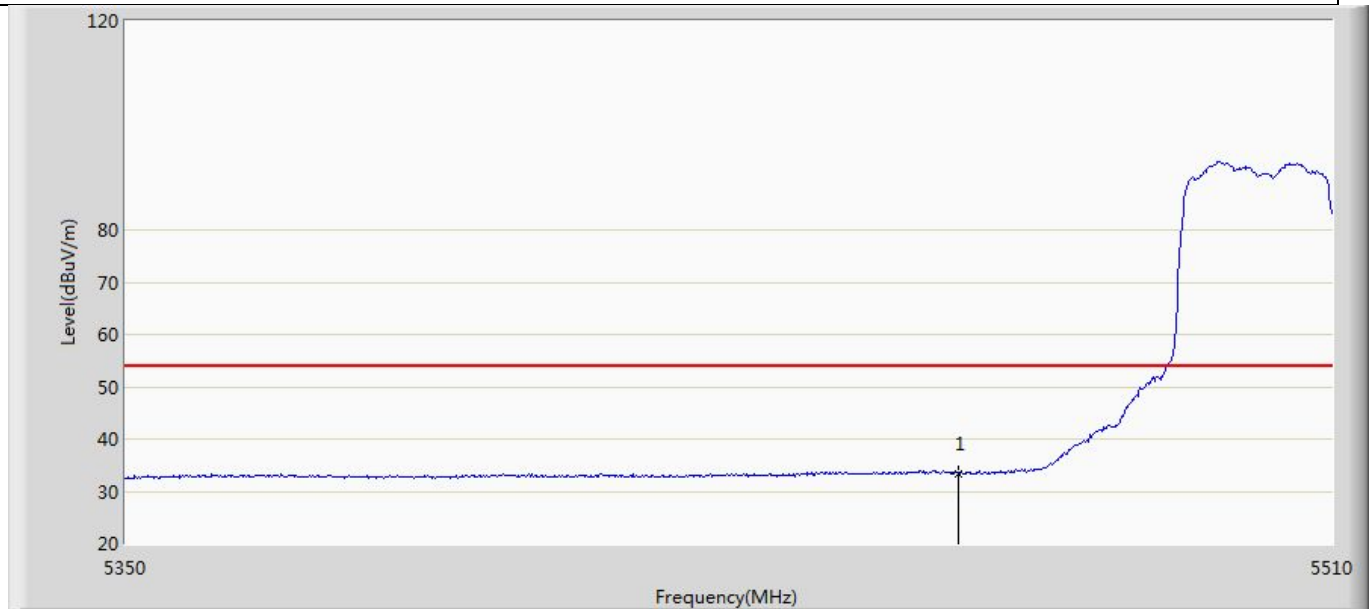


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	33.473	-4.260	-20.527	54.000	37.732	AV

Profile: 2360091R	Page No.: 83
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) with ant1+2	

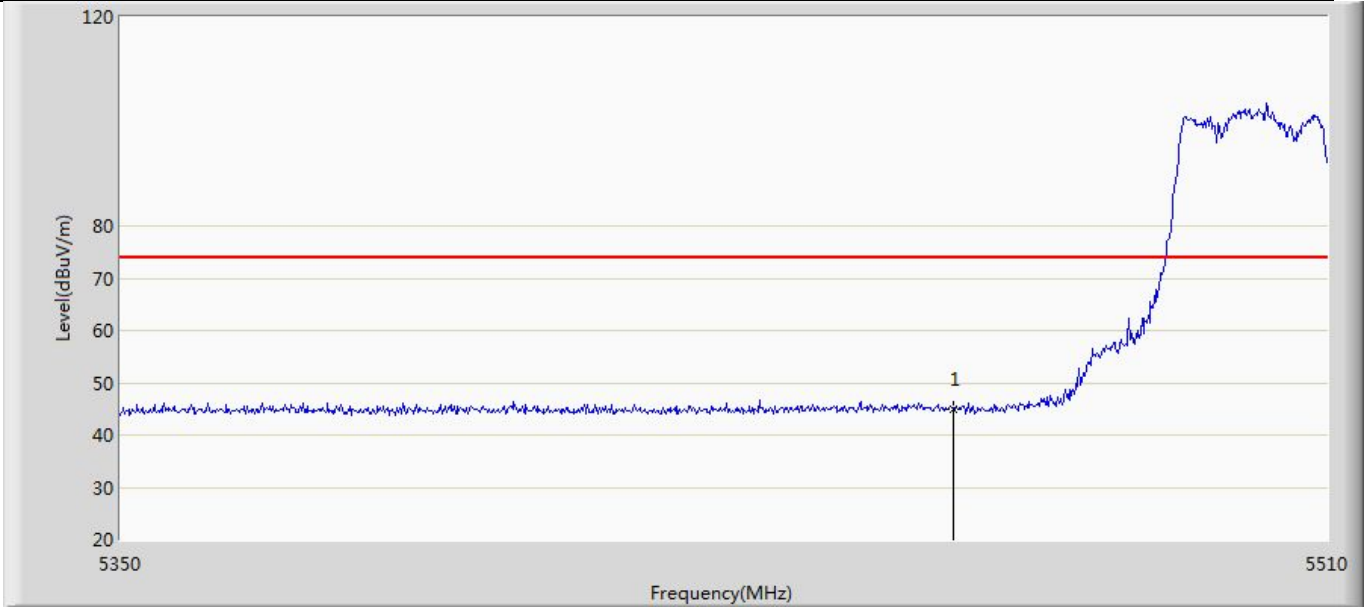


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	44.983	7.250	-29.017	74.000	37.732	PK

Profile: 2360091R	Page No.: 84
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5500MHz by 802.11ax(20MHz) with ant1+2	

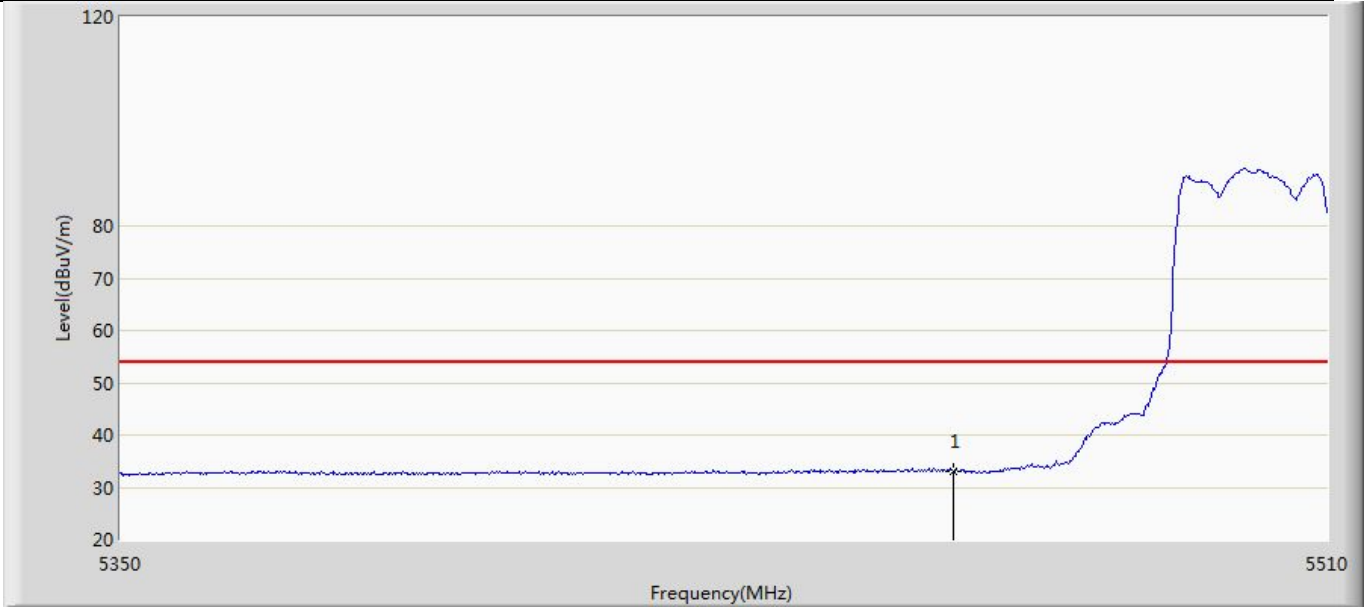


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	32.999	-4.734	-21.001	54.000	37.732	AV

Profile: 2360091R	Page No.: 29
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:39
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5745MHz by 802.11ax (20MHz) with ant1+2	

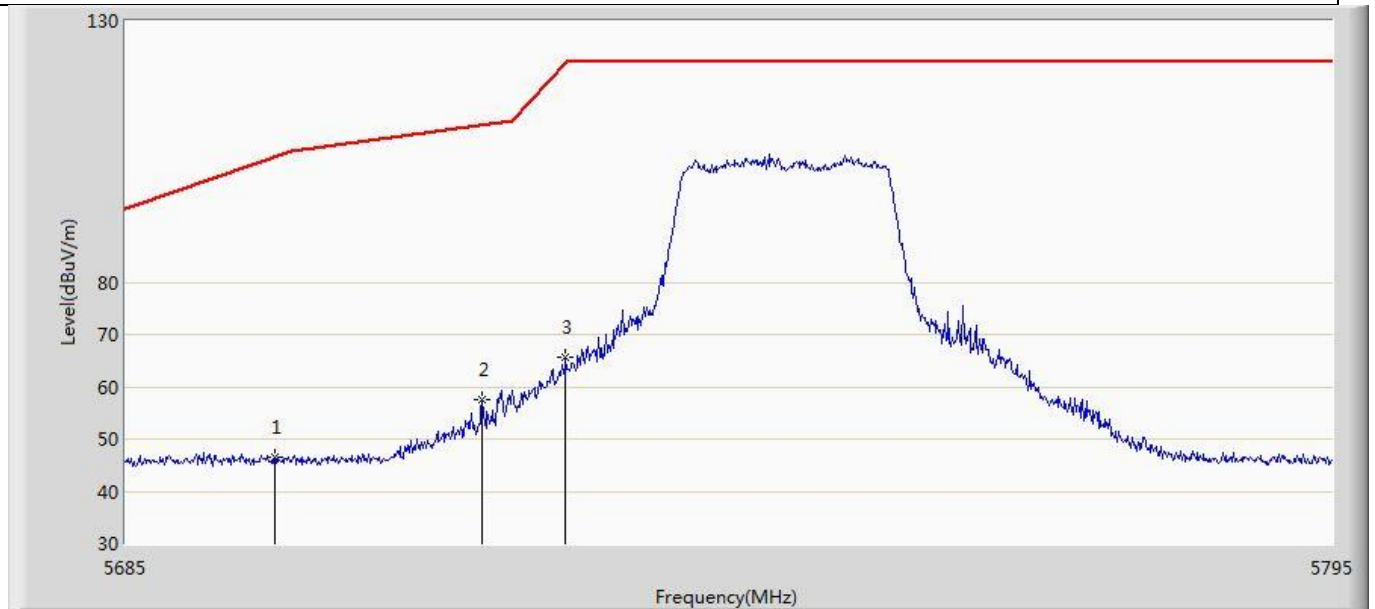


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5698.530	46.657	8.696	-57.459	104.117	37.961	PK
2	*	5717.340	57.498	19.520	-52.558	110.056	37.978	PK
3		5724.930	65.720	27.621	-56.321	122.040	38.099	PK

Profile: 2360091R	Page No.: 30
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:41
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5745MHz by 802.11ax (20MHz) with ant1+2	

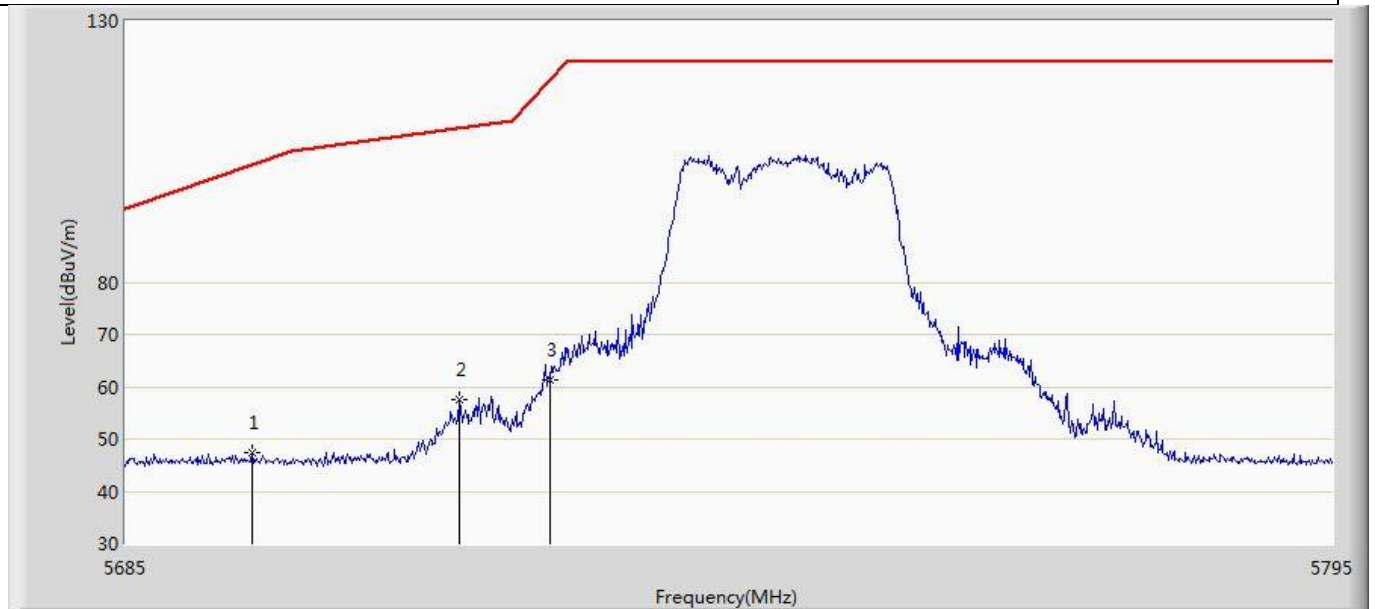


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5696.440	47.322	9.337	-55.255	102.576	37.984	PK
2	*	5715.250	57.397	19.452	-52.075	109.472	37.945	PK
3		5723.500	61.352	23.276	-57.429	118.781	38.076	PK

Profile: 2360091R	Page No.: 31
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:43
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5785MHz by 802.11ax (20MHz) with ant1+2	

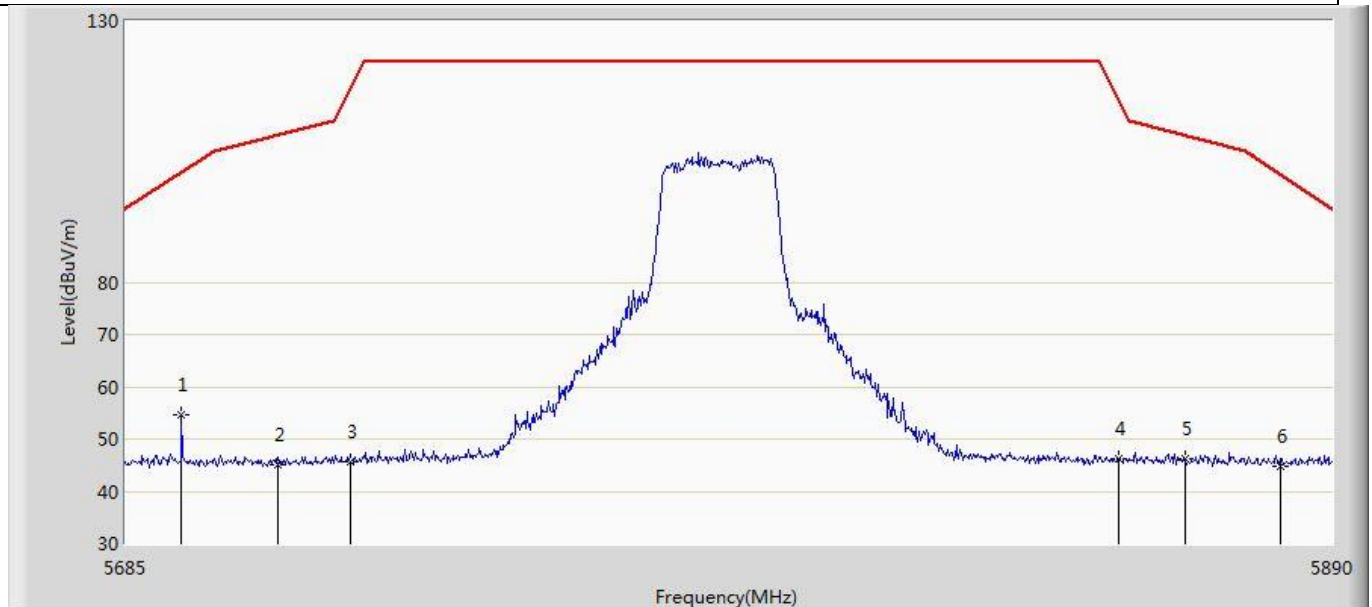


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5694.430	54.568	16.561	-46.526	101.094	38.007	PK
2		5710.420	45.038	7.170	-63.082	108.120	37.868	PK
3		5722.720	45.650	7.586	-71.353	117.003	38.064	PK
4		5853.305	46.336	8.176	-68.327	114.664	38.160	PK
5		5864.580	46.157	7.957	-61.958	108.115	38.200	PK
6		5881.185	44.863	6.726	-55.743	100.606	38.138	PK

Profile: 2360091R	Page No.: 32
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:44
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5785MHz by 802.11ax (20MHz) with ant1+2	

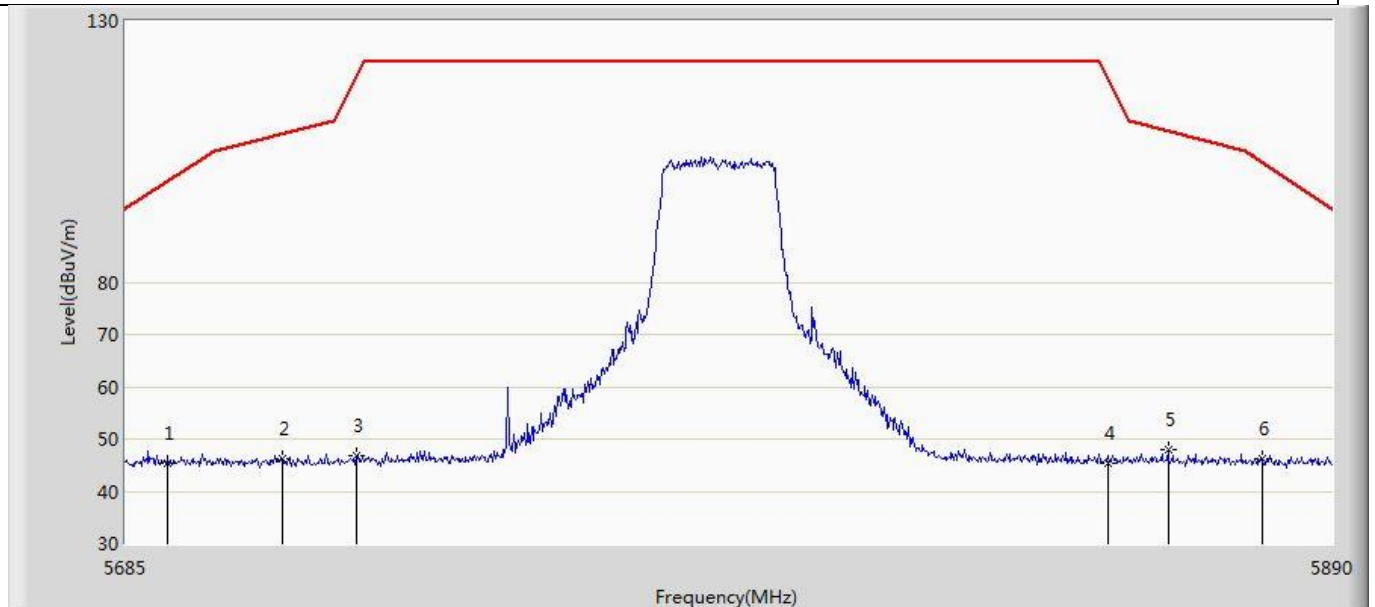


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5692.175	45.264	7.232	-54.167	99.431	38.032	PK
2		5711.240	46.219	8.338	-62.131	108.350	37.881	PK
3		5723.745	46.798	8.718	-72.541	119.340	38.080	PK
4		5851.460	45.323	7.174	-73.547	118.870	38.149	PK
5		5861.710	48.096	9.886	-60.823	108.919	38.211	PK
6		5878.110	46.175	8.039	-56.714	102.889	38.136	PK

Profile: 2360091R	Page No.: 33
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:46
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5825MHz by 802.11ax (20MHz) with ant1+2	

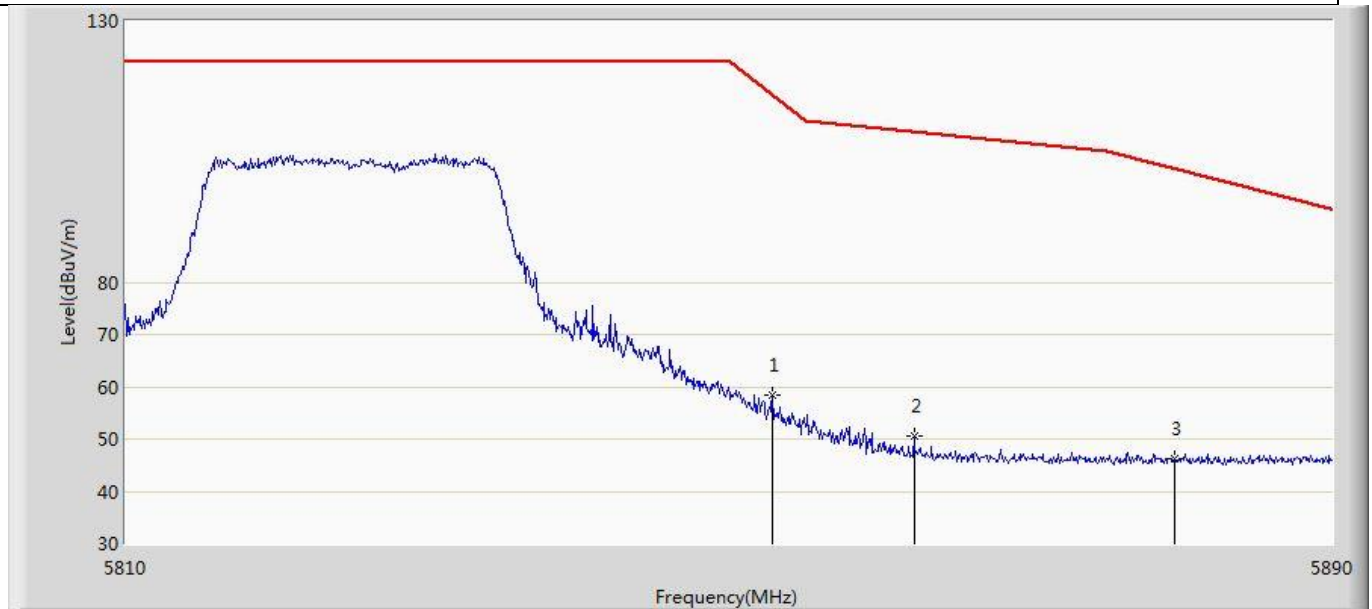


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.800	58.313	20.156	-57.501	115.815	38.158	PK
2		5862.160	50.637	12.426	-58.156	108.793	38.211	PK
3	*	5879.520	46.295	8.162	-55.547	101.842	38.134	PK

Profile: 2360091R	Page No.: 34
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:47
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 7: Transmit at 5825MHz by 802.11ax (20MHz) with ant1+2	

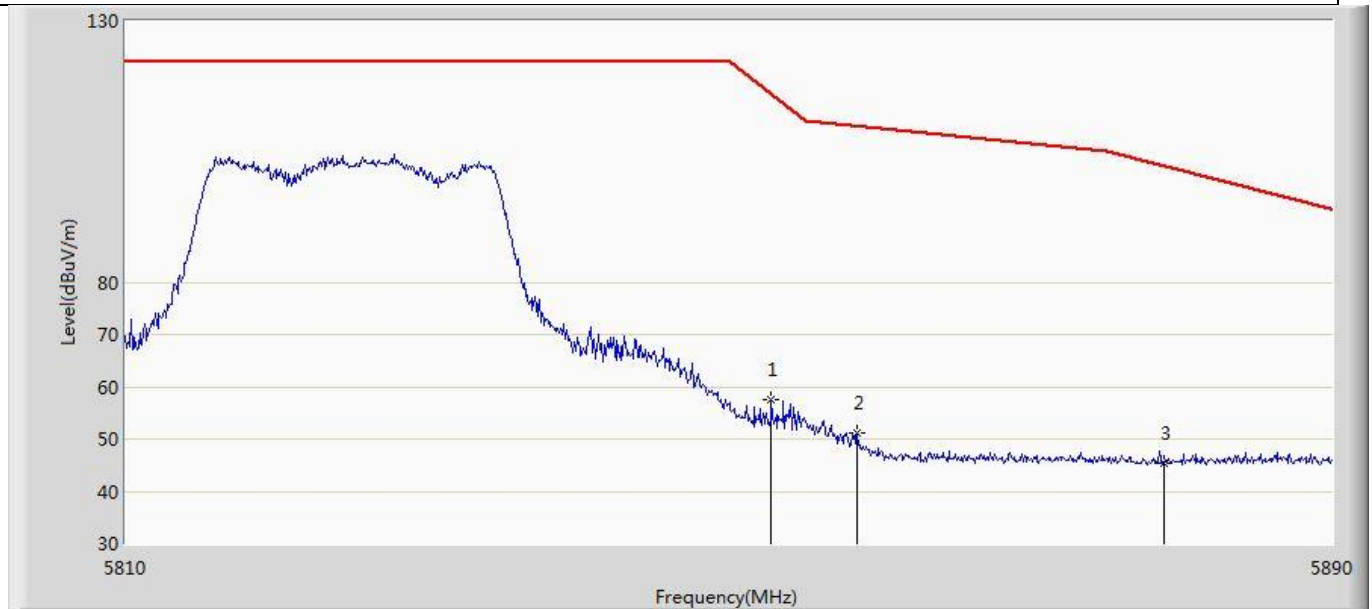


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5852.720	57.576	19.419	-58.421	115.997	38.157	PK
2		5858.400	51.040	12.849	-58.807	109.847	38.191	PK
3	*	5878.800	45.481	7.348	-56.896	102.377	38.133	PK

Profile: 2360091R	Page No.: 85
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) with ant1+2	

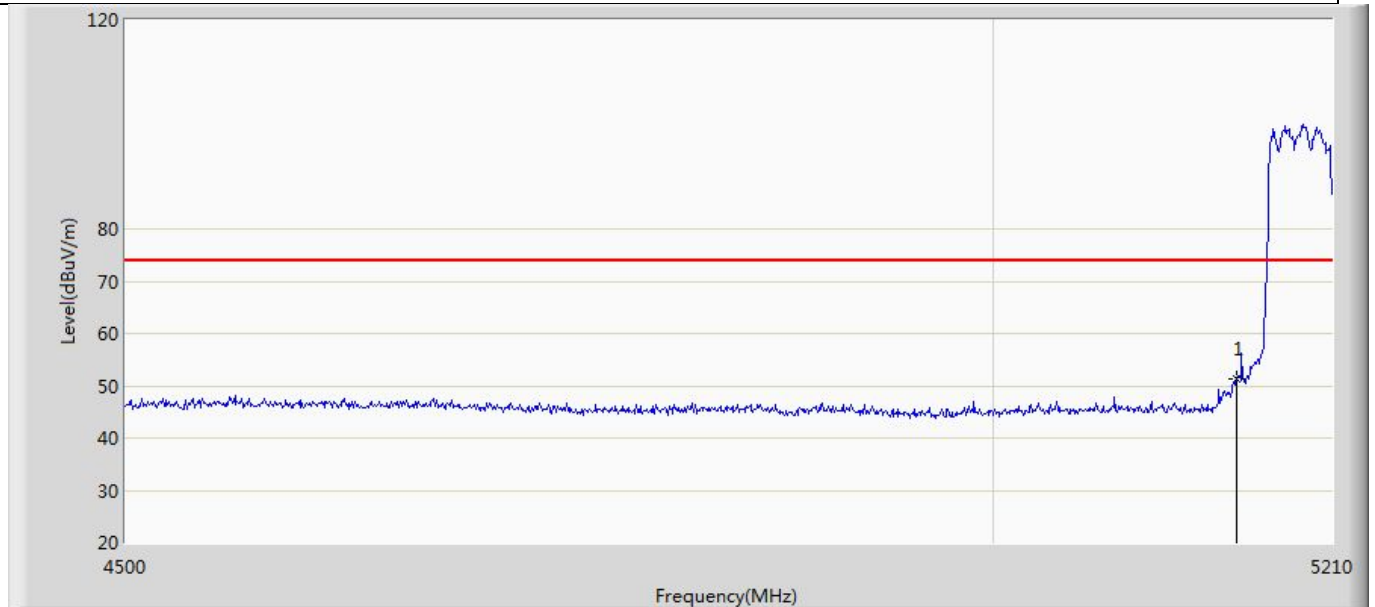


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	51.240	14.010	-22.760	74.000	37.230	PK

Profile: 2360091R	Page No.: 86
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) with ant1+2	

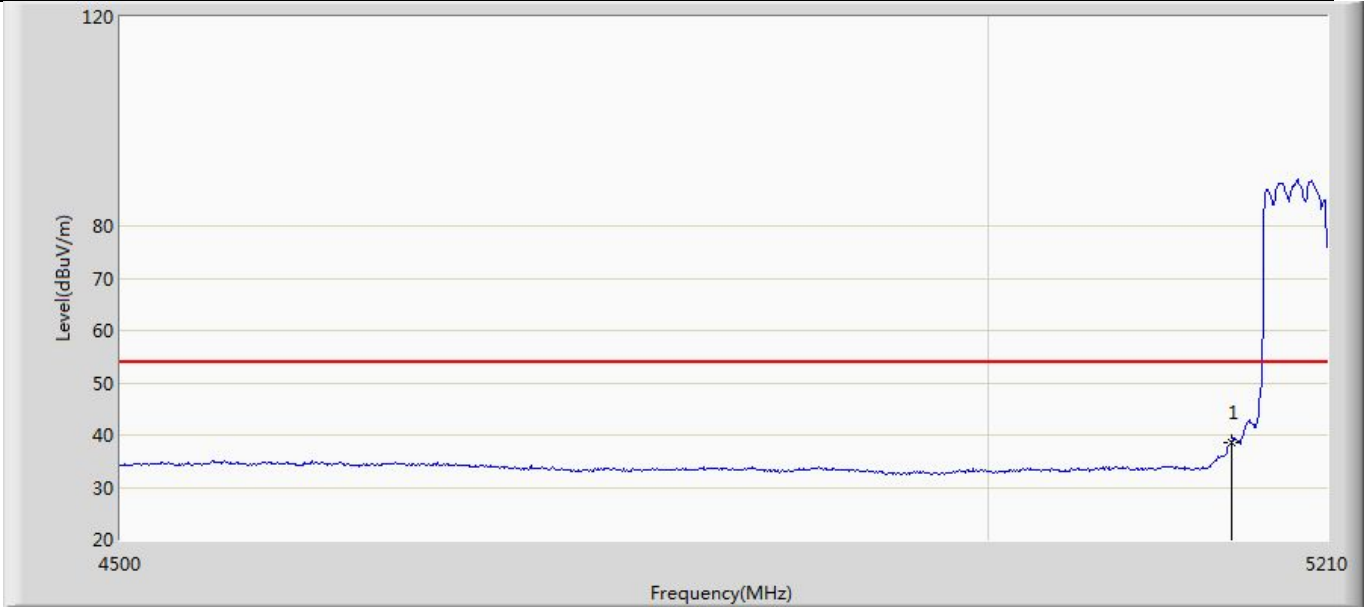


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	38.589	1.359	-15.411	54.000	37.230	AV

Profile: 2360091R	Page No.: 87
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) with ant1+2	

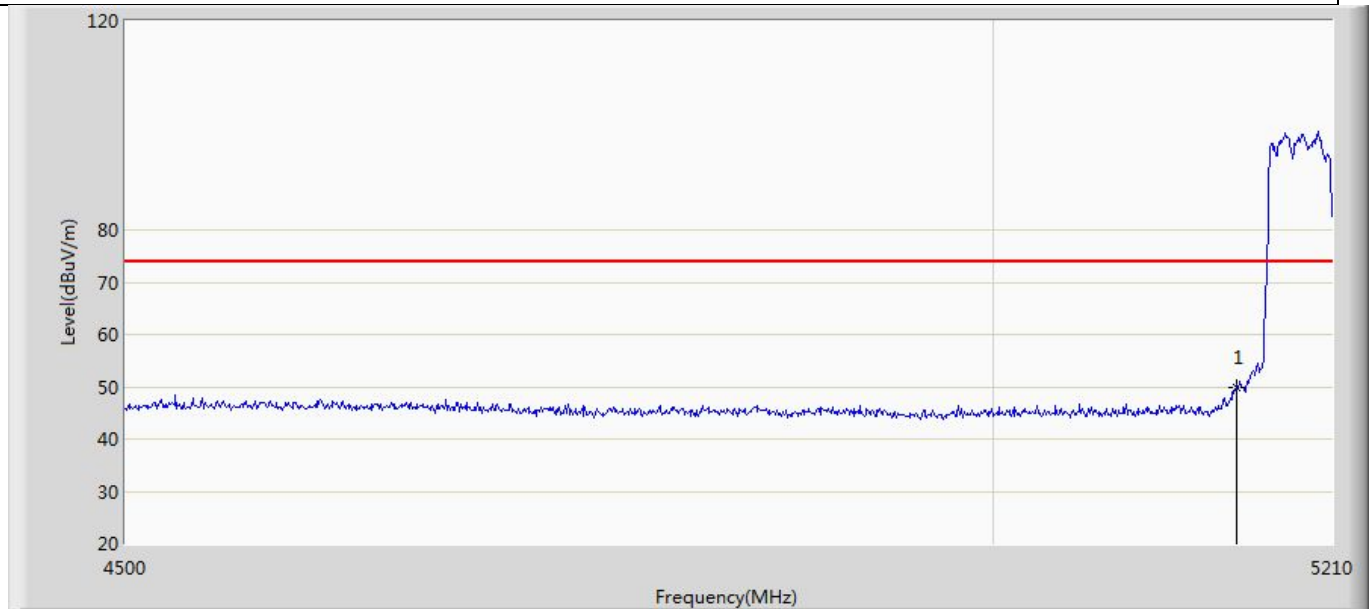


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	49.944	12.714	-24.056	74.000	37.230	PK

Profile: 2360091R	Page No.: 88
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5190MHz by 802.11ax(40MHz) with ant1+2	

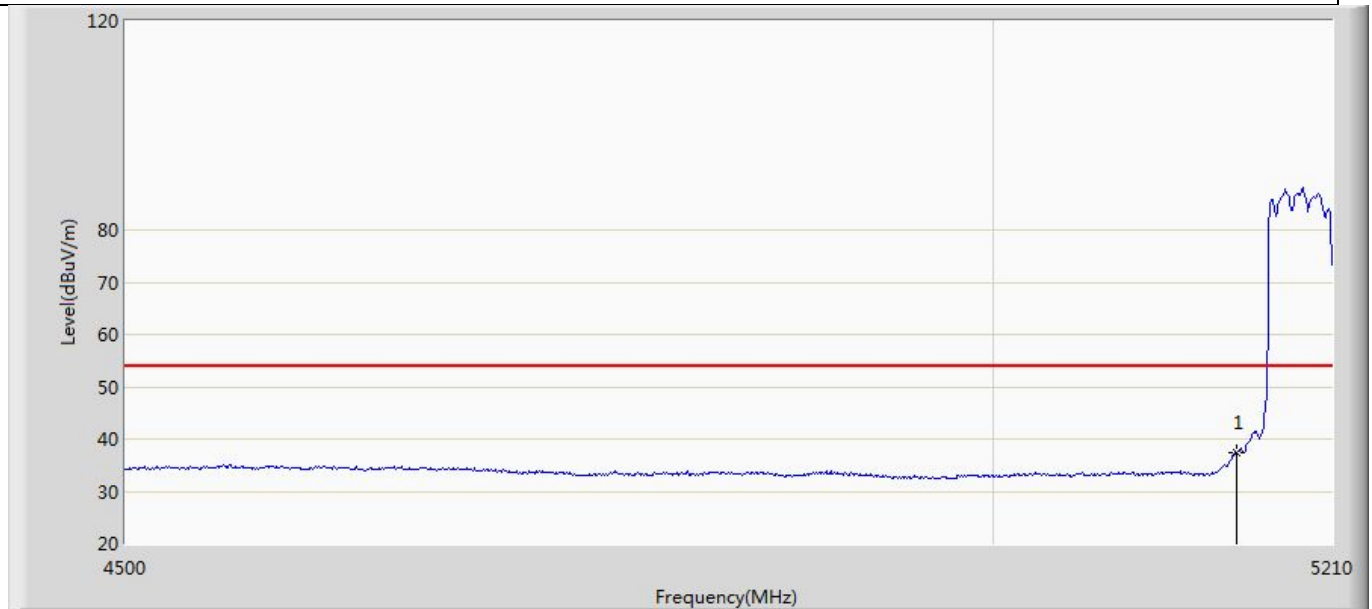


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	37.437	0.207	-16.563	54.000	37.230	AV

Profile: 2360091R	Page No.: 89
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) with ant1+2	

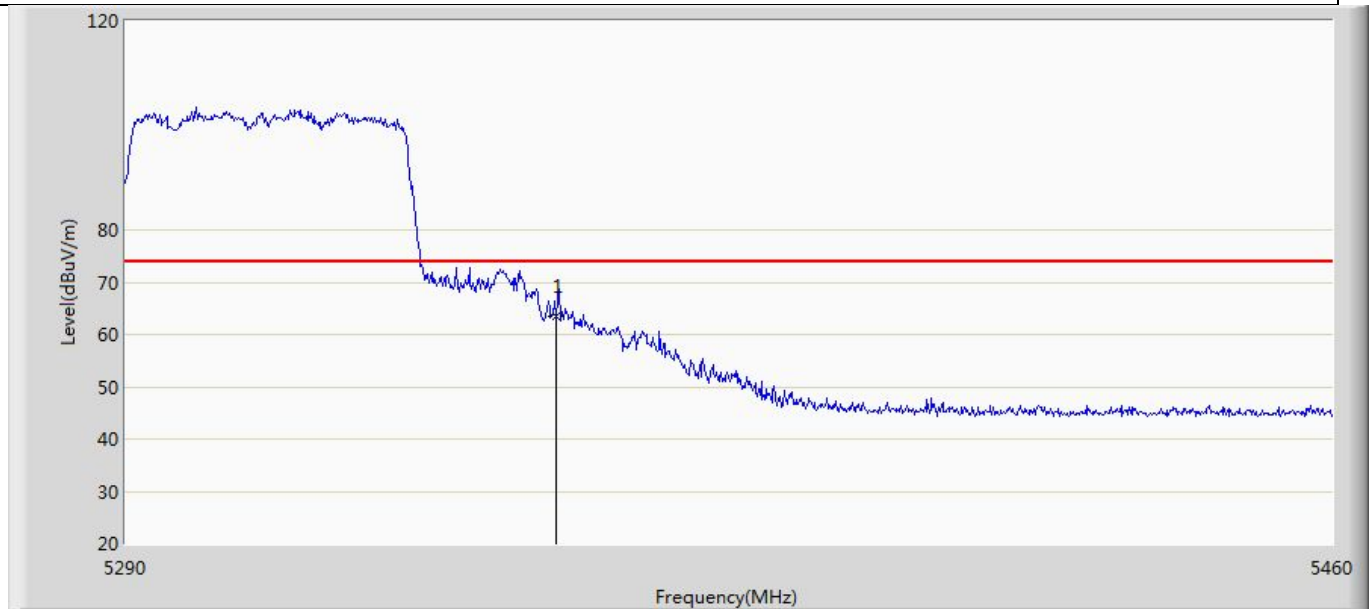


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	63.535	26.097	-10.465	74.000	37.438	PK

Profile: 2360091R	Page No.: 90
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) with ant1+2	

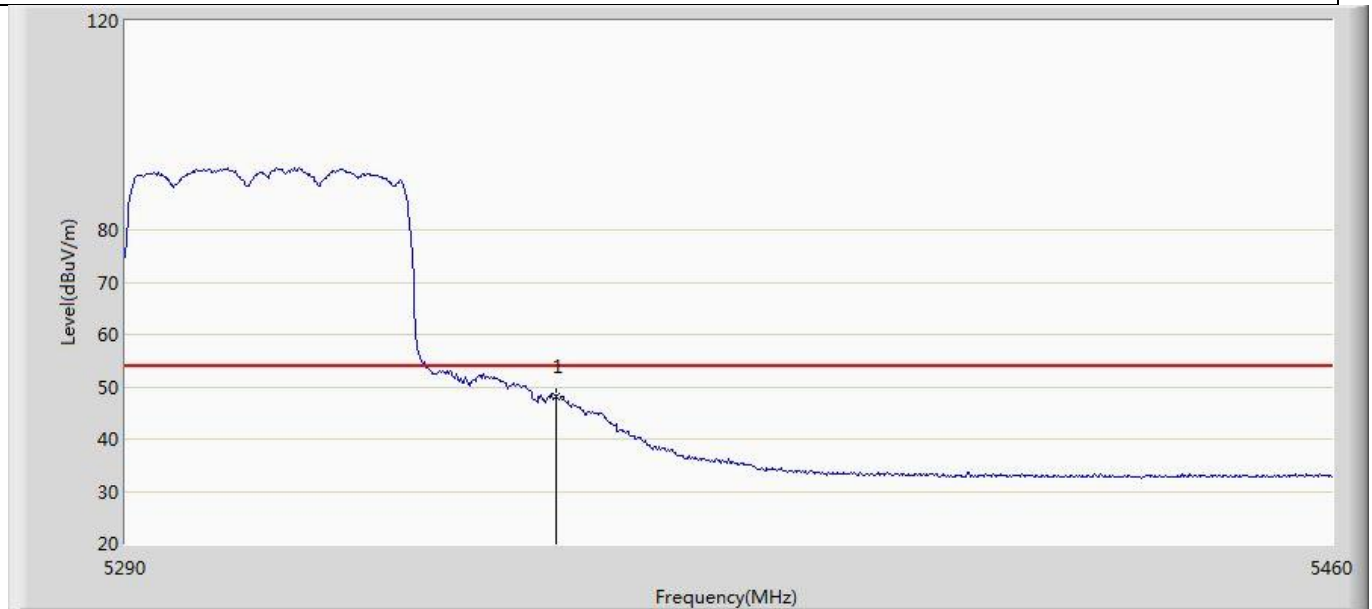


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	48.046	10.608	-5.954	54.000	37.438	AV

Profile: 2360091R	Page No.: 91
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) with ant1+2	

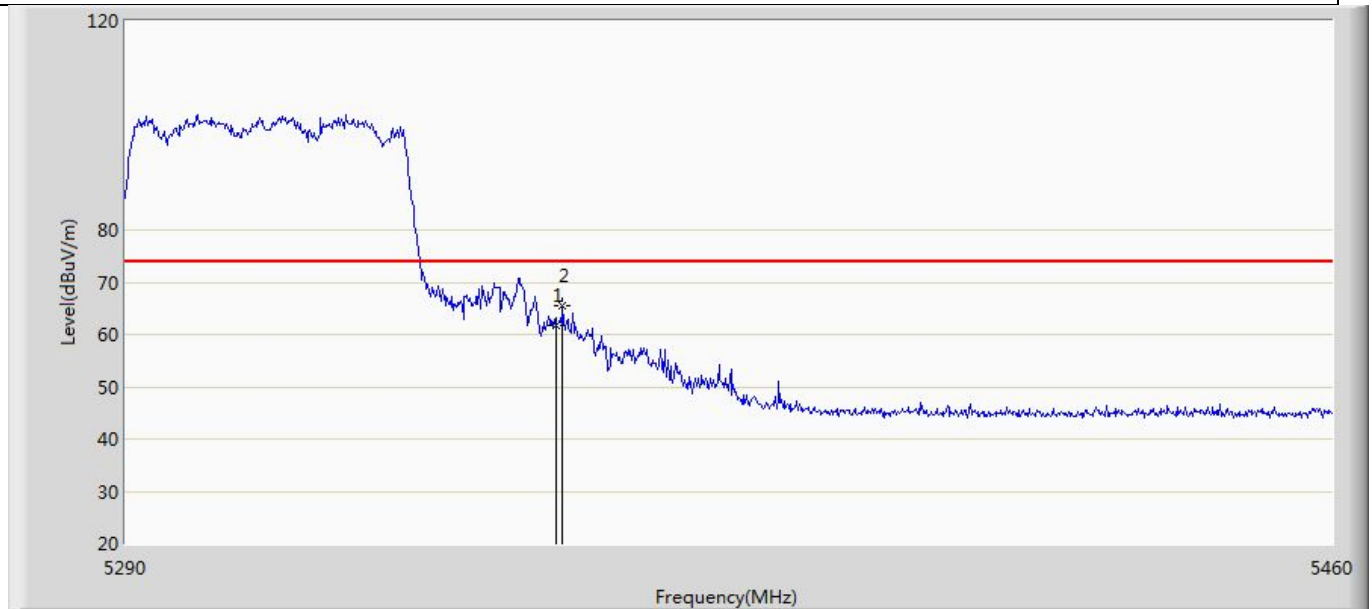


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	61.608	24.170	-12.392	74.000	37.438	PK
2	*	5351.030	65.461	28.018	-8.539	74.000	37.443	PK

Profile: 2360091R	Page No.: 92
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5310MHz by 802.11ax(40MHz) with ant1+2	

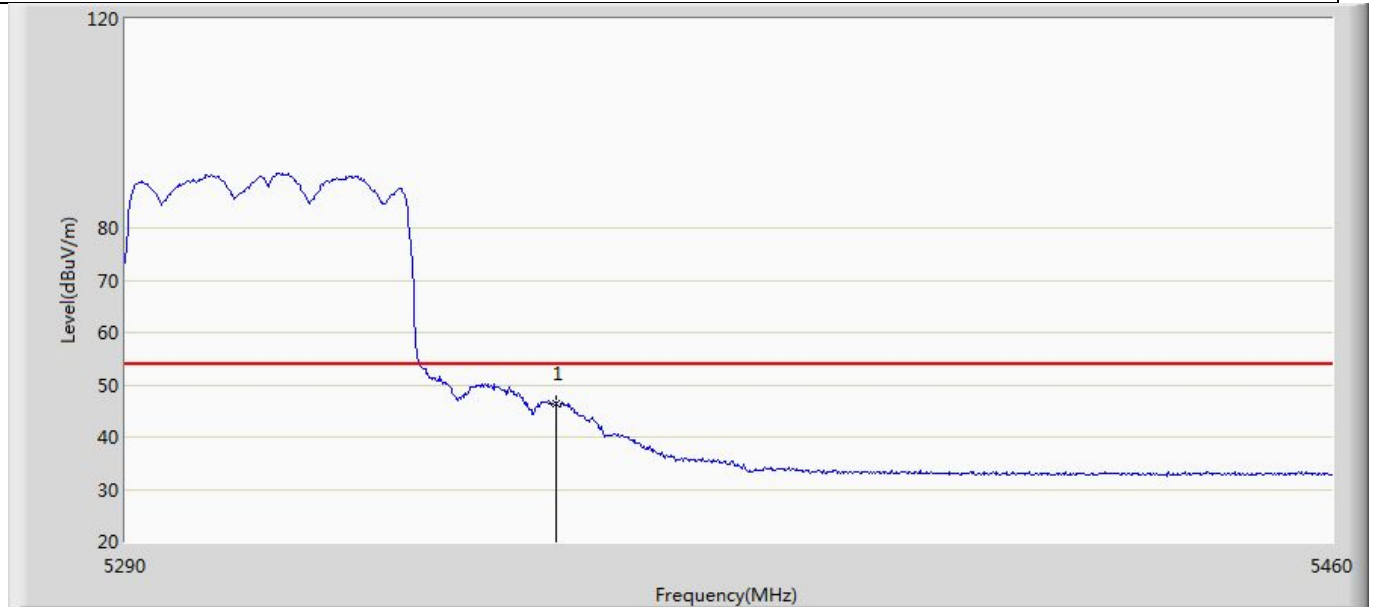


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	46.340	8.902	-7.660	54.000	37.438	AV

Profile: 2360091R	Page No.: 93
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) with ant1+2	

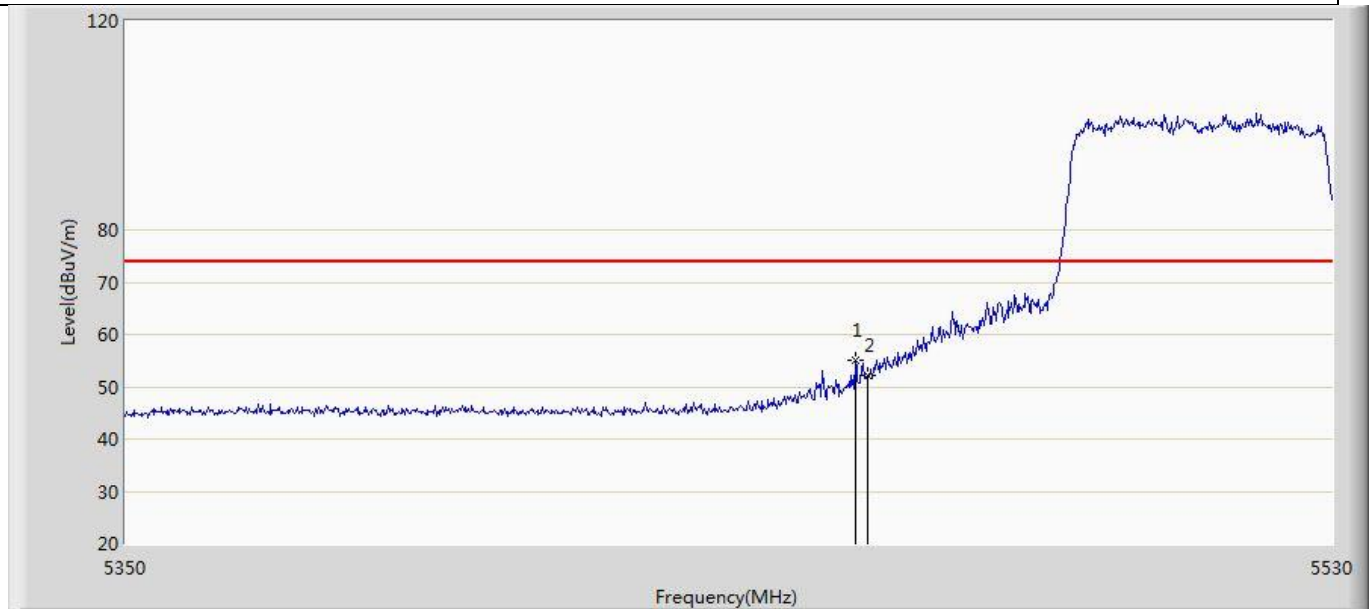


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5458.180	55.196	17.455	-18.804	74.000	37.741	PK
2		5460.000	52.206	14.473	-21.794	74.000	37.732	PK

Profile: 2360091R	Page No.: 94
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) with ant1+2	

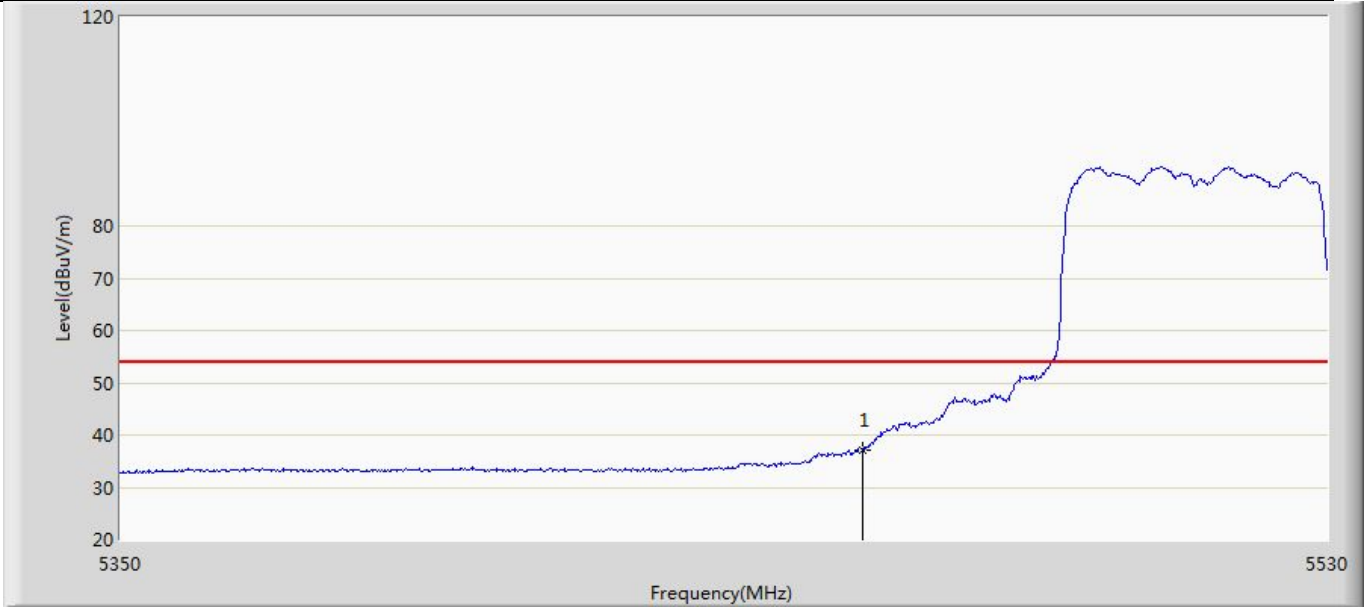


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	37.090	-0.643	-16.910	54.000	37.732	AV

Profile: 2360091R	Page No.: 95
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) with ant1+2	

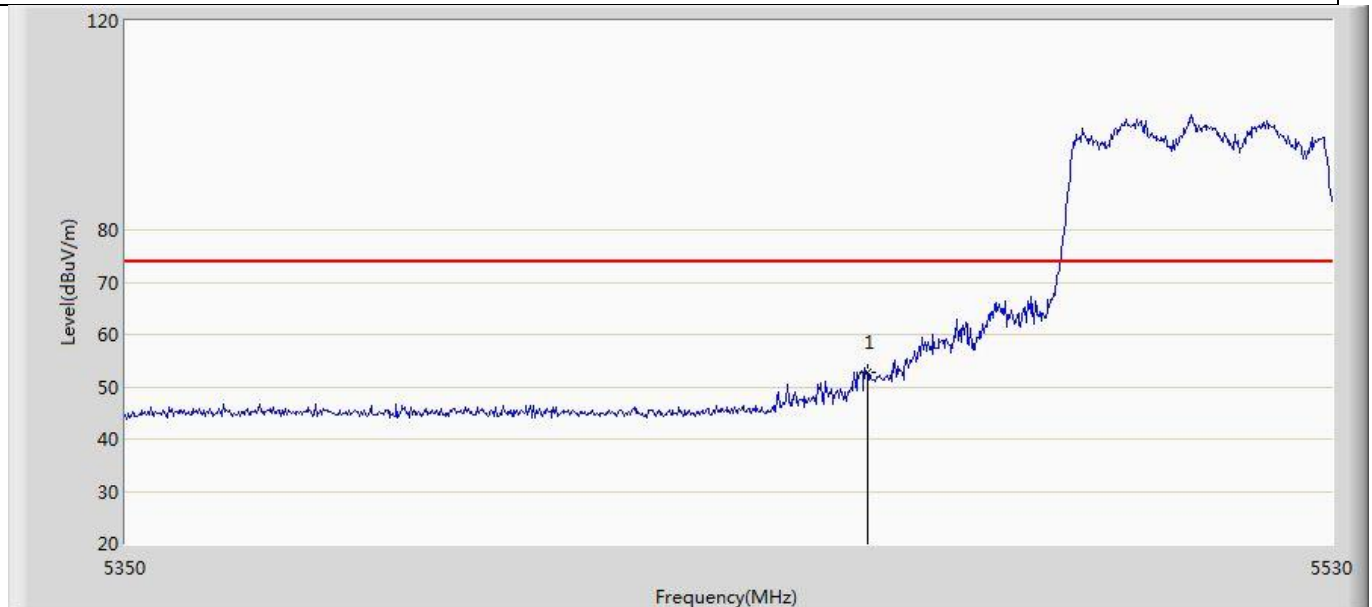


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	52.737	15.004	-21.263	74.000	37.732	PK

Profile: 2360091R	Page No.: 96
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5510MHz by 802.11ax(40MHz) with ant1+2	

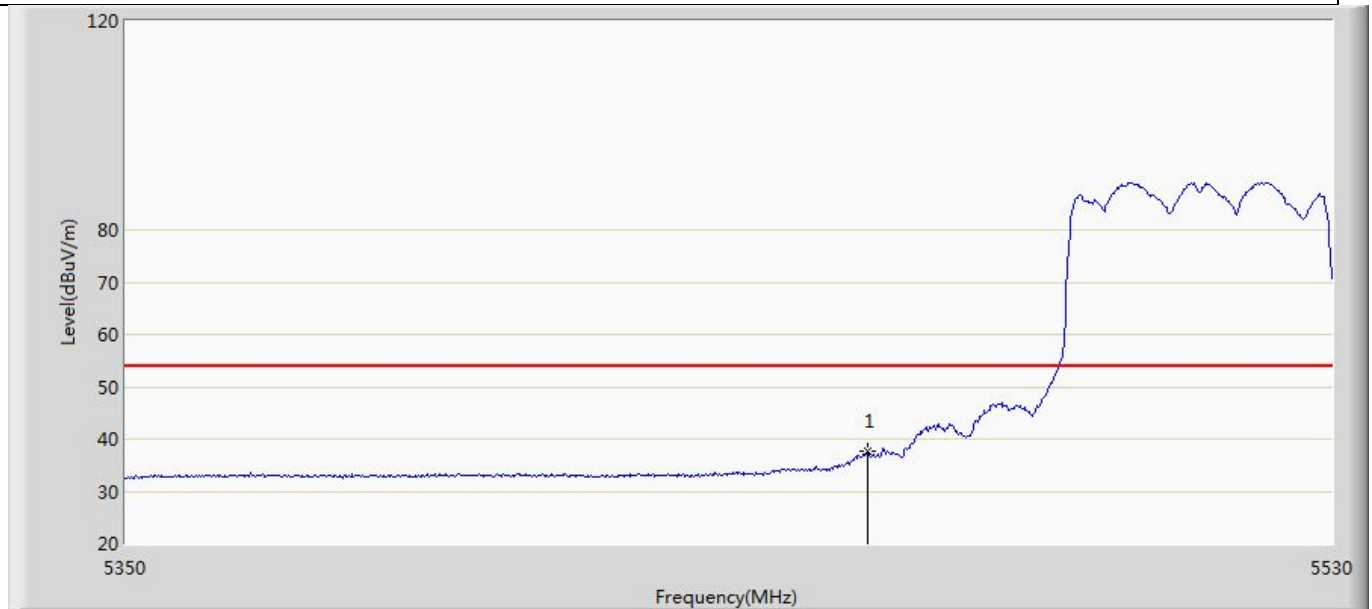


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	37.538	-0.195	-16.462	54.000	37.732	AV

Profile: 2360091R	Page No.: 35
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:49
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5755MHz by 802.11ac (40MHz) with ant1+2	

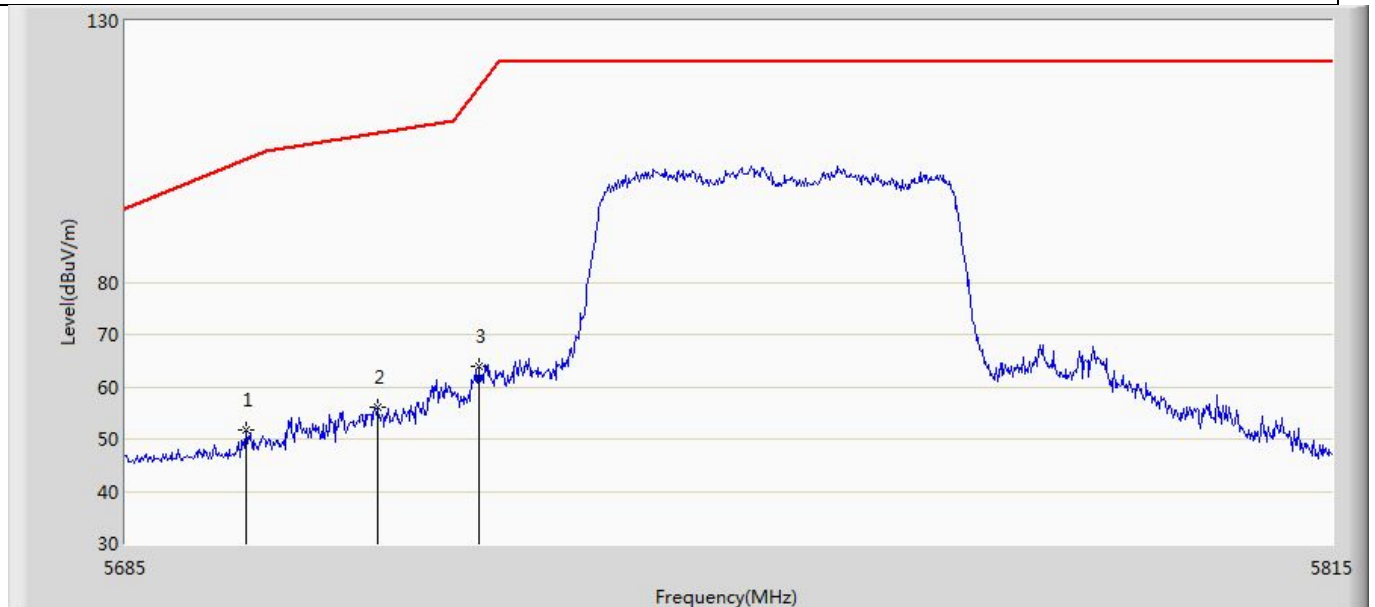


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5697.870	51.807	13.838	-51.824	103.630	37.968	PK
2		5711.910	56.106	18.215	-52.431	108.537	37.892	PK
3		5722.830	63.913	25.848	-53.340	117.254	38.065	PK

Profile: 2360091R	Page No.: 36
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:51
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5755MHz by 802.11ac (40MHz) with ant1+2	

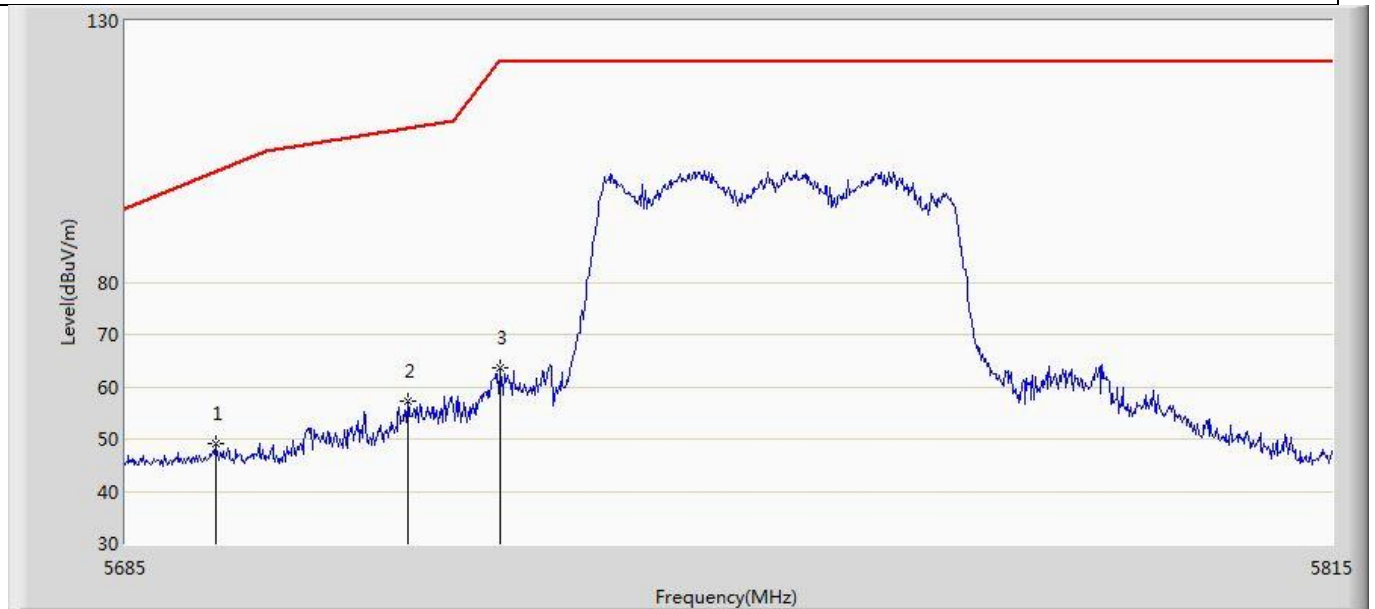


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5694.620	49.246	11.241	-51.989	101.234	38.005	PK
2		5715.160	57.377	19.434	-52.069	109.447	37.944	PK
3		5725.040	63.572	25.471	-58.628	122.200	38.101	PK

Profile: 2360091R	Page No.: 37
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:52
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5795MHz by 802.11ax (40MHz) with ant1+2	

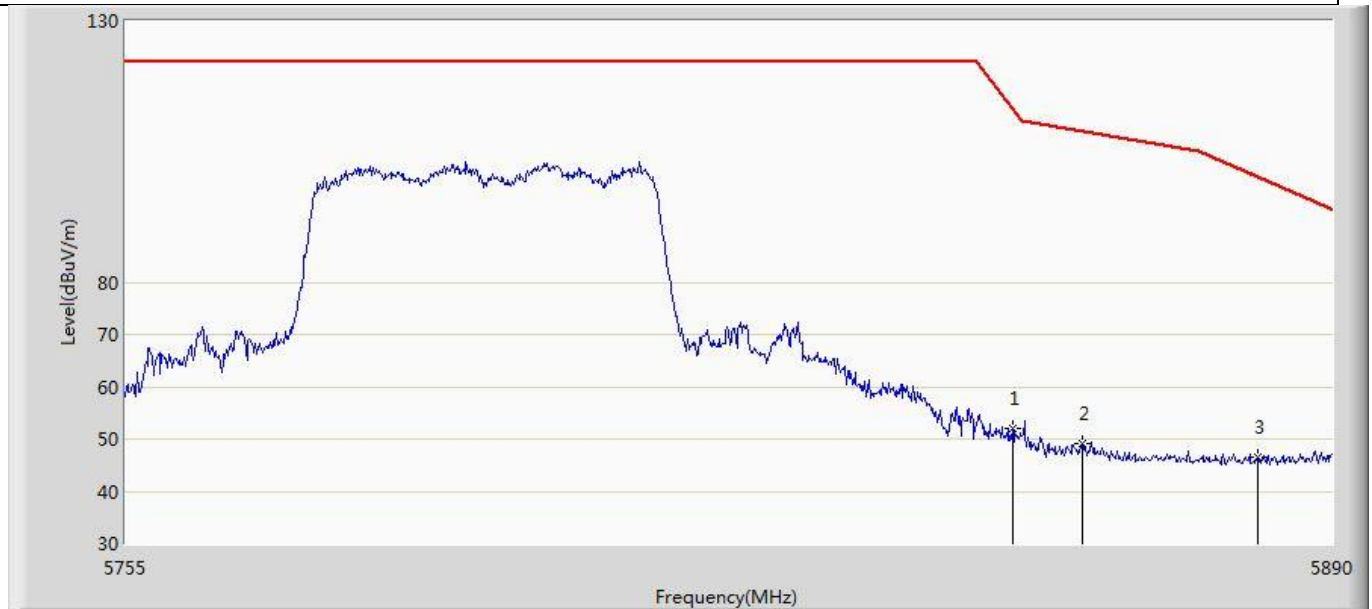


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5853.955	51.940	13.776	-61.242	113.182	38.164	PK
2		5861.785	49.050	10.839	-59.848	108.898	38.211	PK
3	*	5881.630	46.616	8.478	-53.659	100.276	38.138	PK

Profile: 2360091R	Page No.: 38
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:53
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 8: Transmit at 5795MHz by 802.11ax (40MHz) with ant1+2	

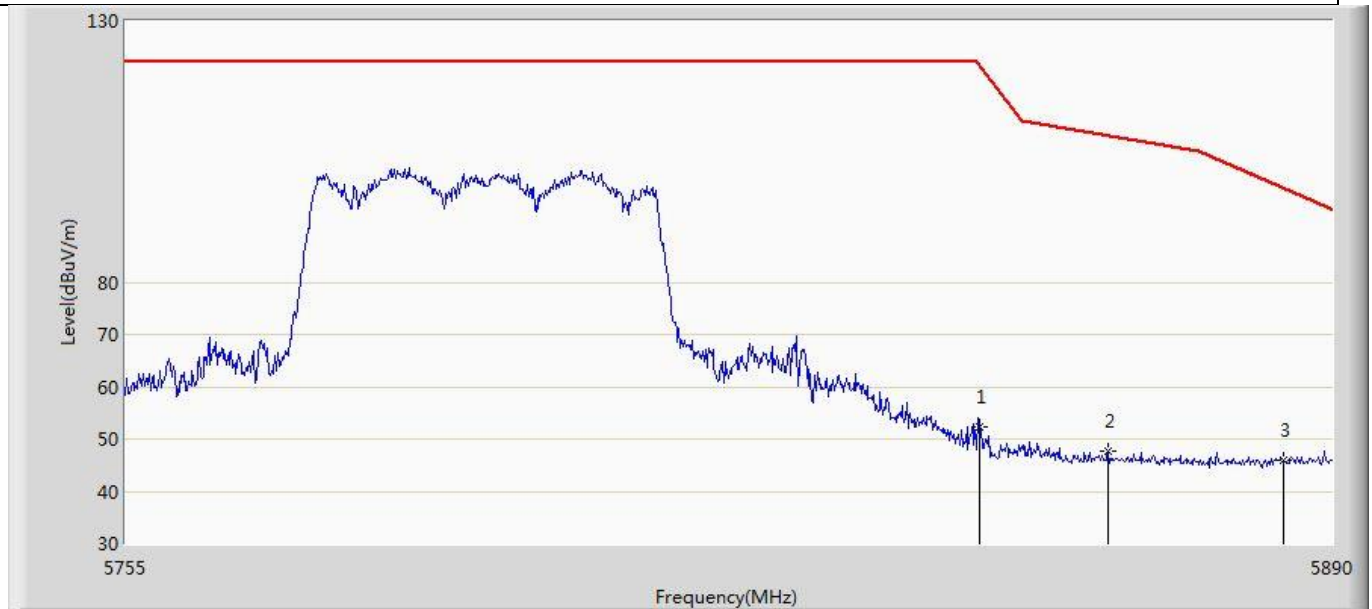


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5850.310	52.302	14.159	-69.191	121.493	38.143	PK
2		5864.755	47.713	9.514	-60.353	108.066	38.199	PK
3	*	5884.600	45.878	7.732	-52.194	98.072	38.146	PK

Profile: 2360091R	Page No.: 97
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) with ant1+2	

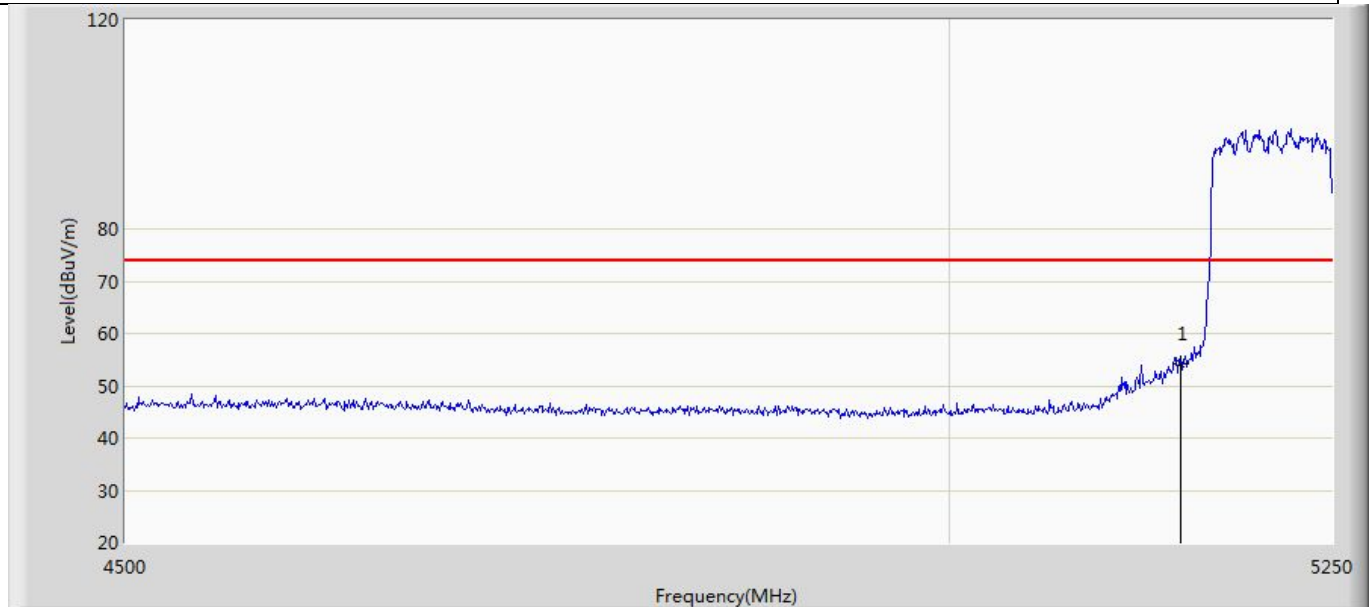


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	54.299	17.069	-19.701	74.000	37.230	PK

Profile: 2360091R	Page No.: 98
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) with ant1+2	

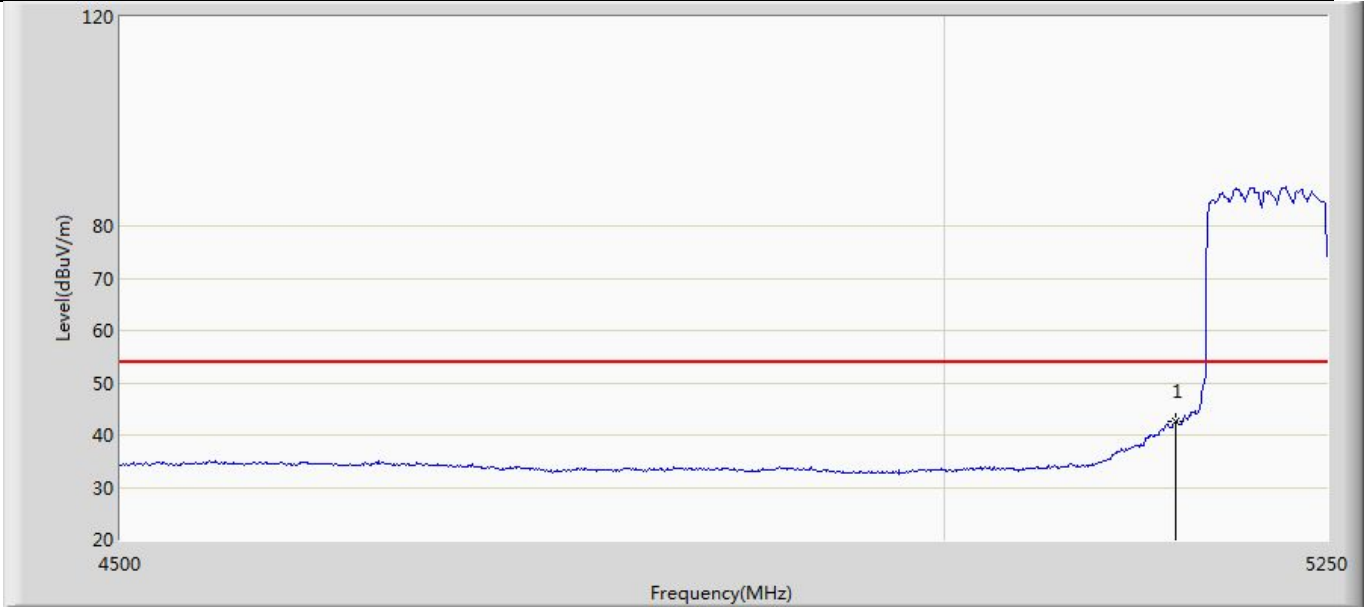


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	42.558	5.328	-11.442	54.000	37.230	AV

Profile: 2360091R	Page No.: 99
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) with ant1+2	

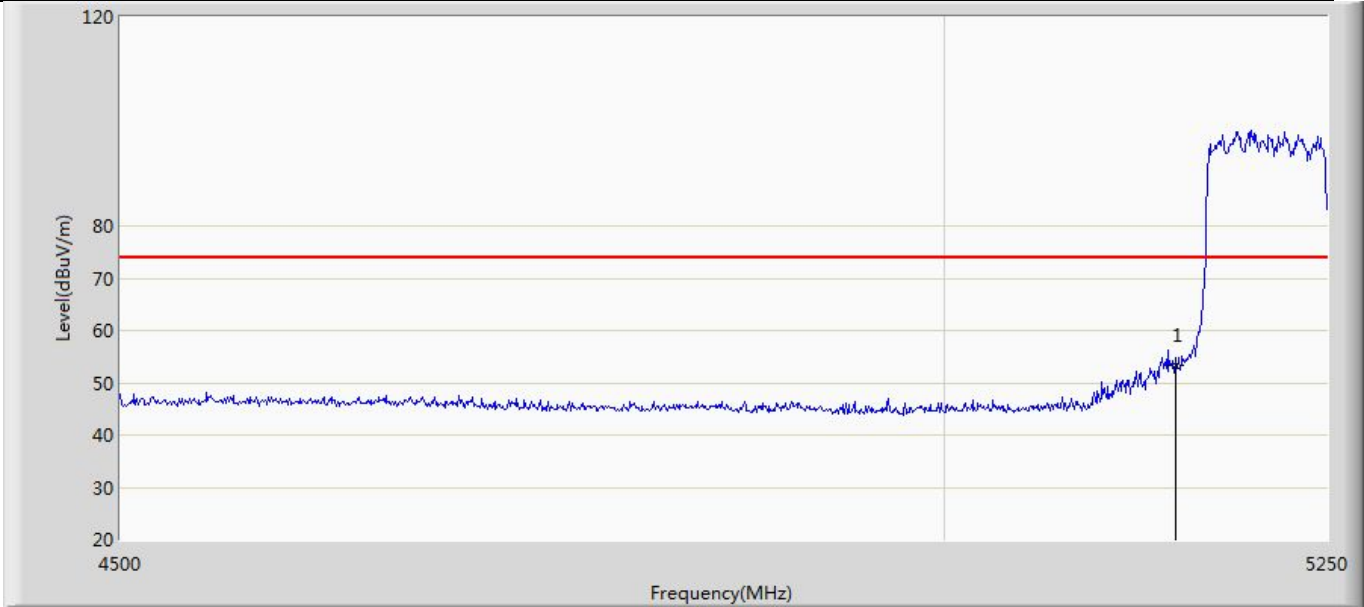


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	53.196	15.966	-20.804	74.000	37.230	PK

Profile: 2360091R	Page No.: 100
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5210MHz by 802.11ax(80MHz) with ant1+2	

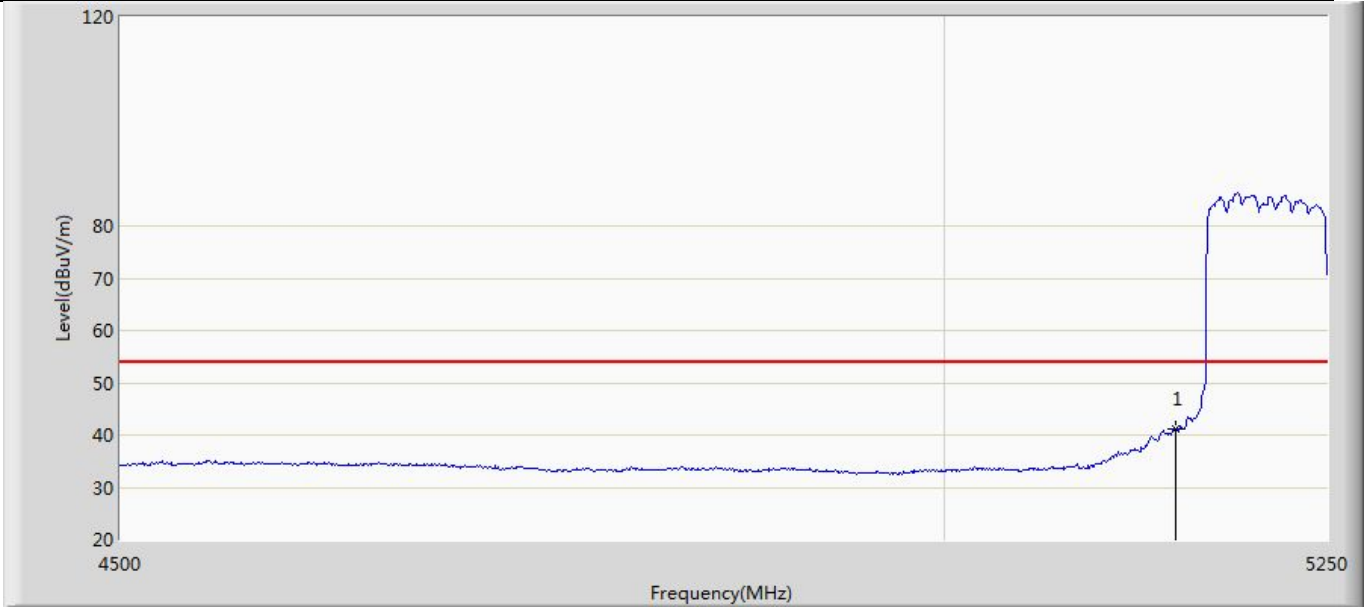


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5150.000	41.280	4.050	-12.720	54.000	37.230	AV

Profile: 2360091R	Page No.: 101
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) with ant1+2	

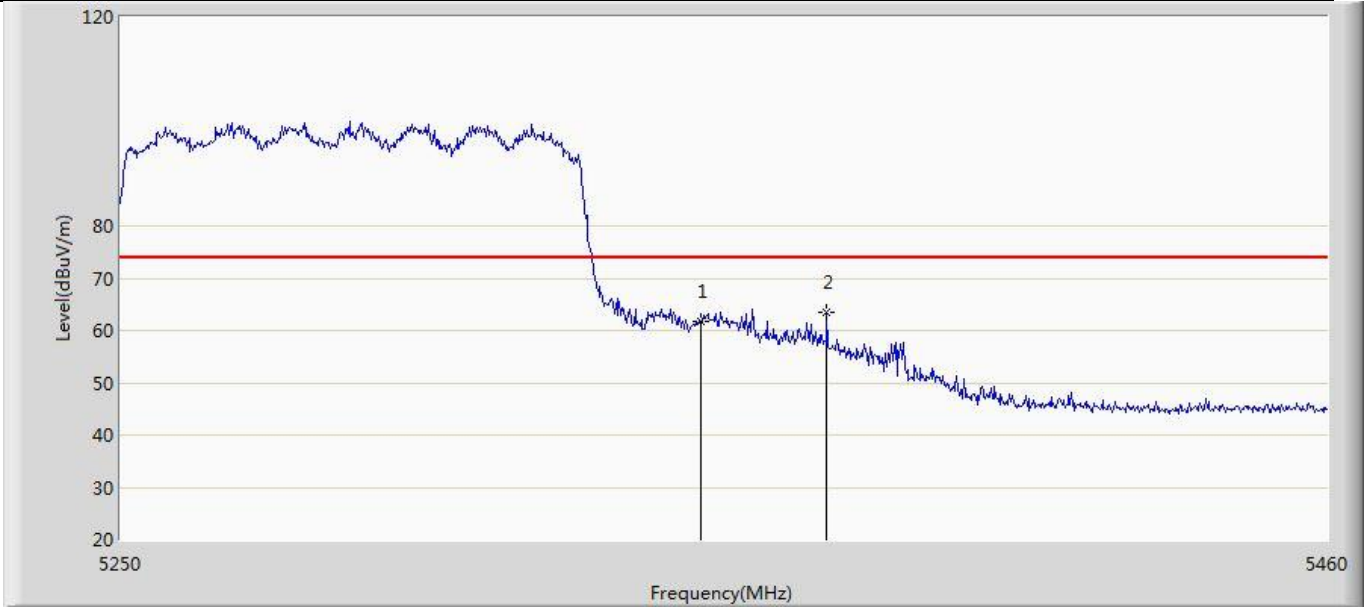


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5350.000	61.797	24.359	-12.203	74.000	37.438	PK
2	*	5372.010	63.543	25.971	-10.457	74.000	37.573	PK

Profile: 2360091R	Page No.: 102
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) with ant1+2	

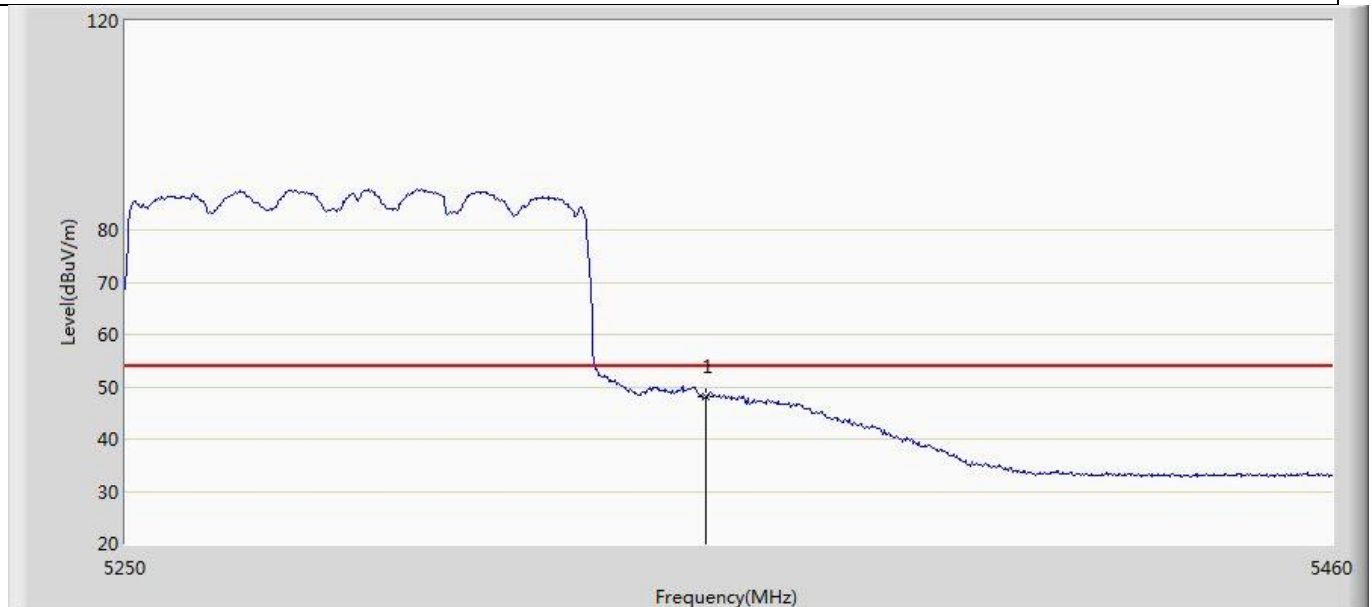


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	48.093	10.655	-5.907	54.000	37.438	AV

Profile: 2360091R	Page No.: 103
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) with ant1+2	

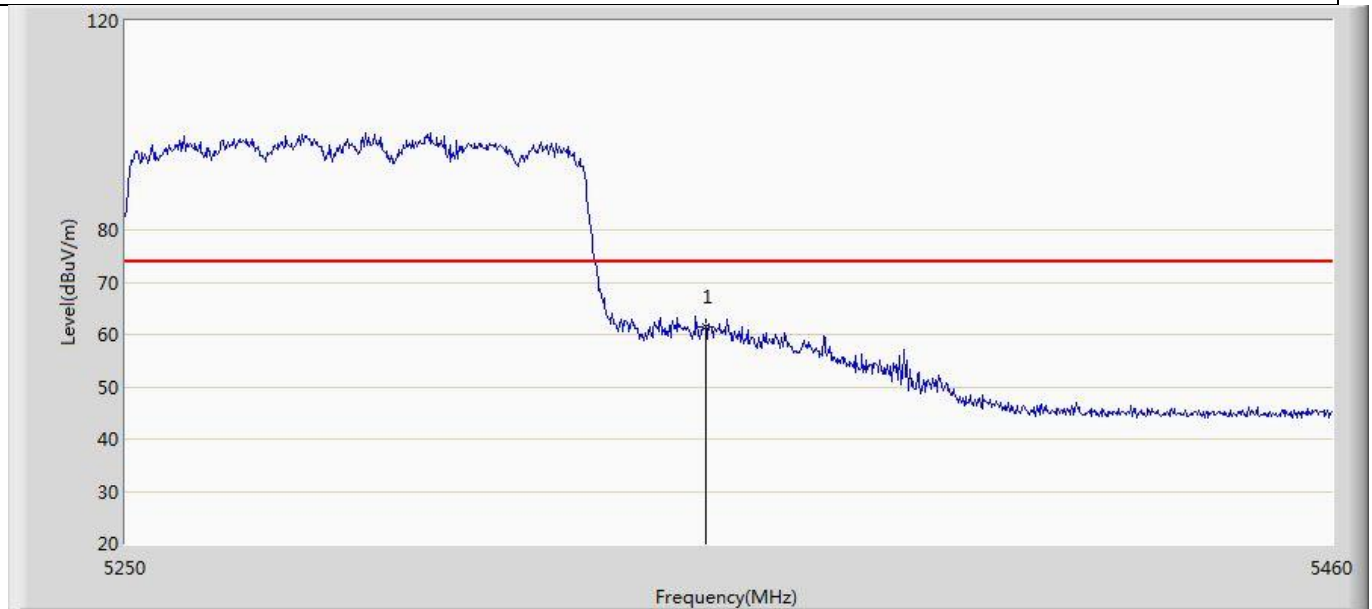


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	61.551	24.113	-12.449	74.000	37.438	PK

Profile: 2360091R	Page No.: 104
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5290MHz by 802.11ax(80MHz) with ant1+2	

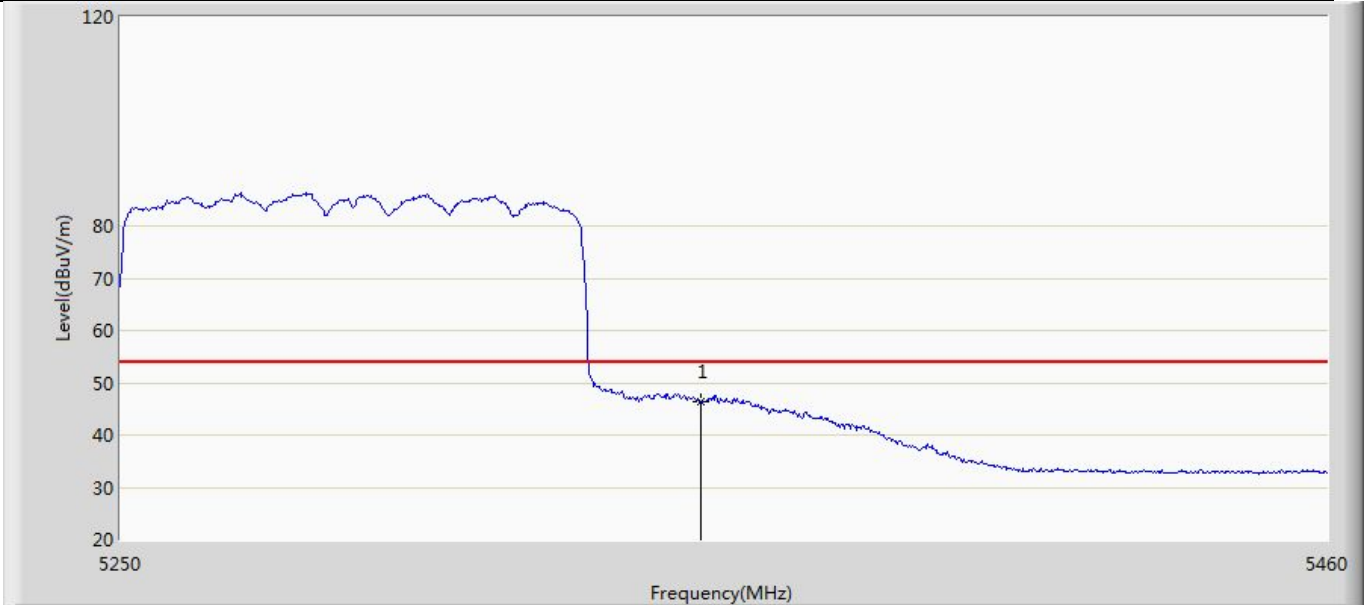


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5350.000	46.311	8.873	-7.689	54.000	37.438	AV

Profile: 2360091R	Page No.: 105
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) with ant1+2	

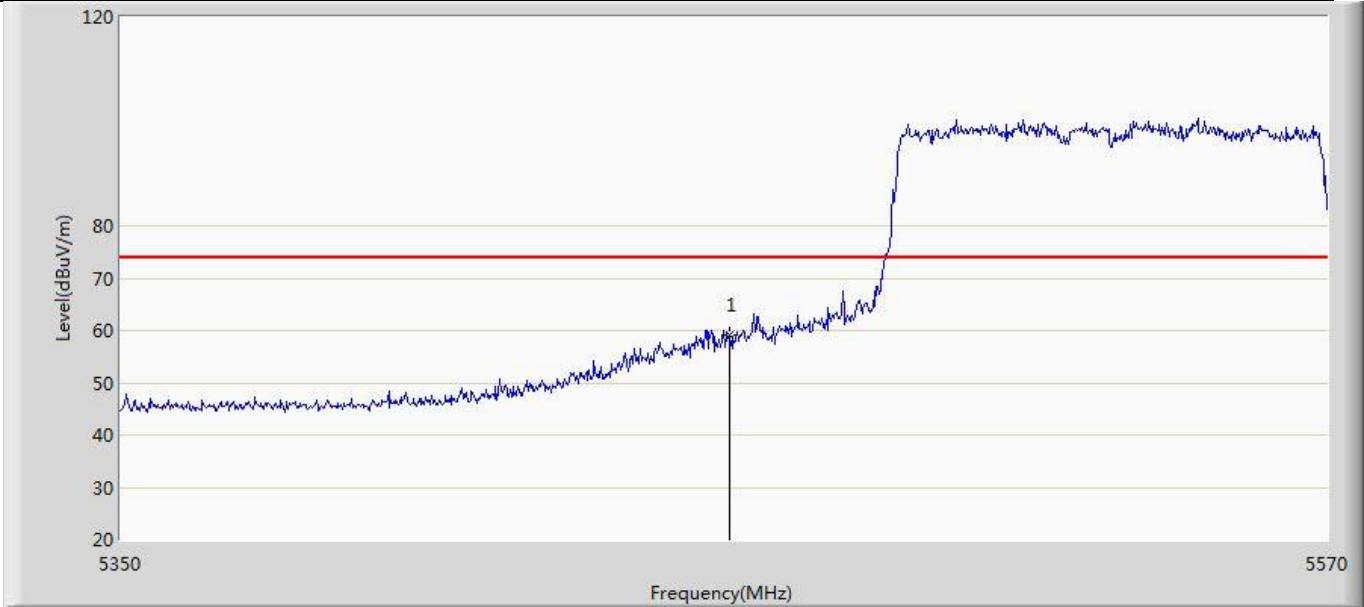


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	59.119	21.386	-14.881	74.000	37.732	PK

Profile: 2360091R	Page No.: 106
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) with ant1+2	

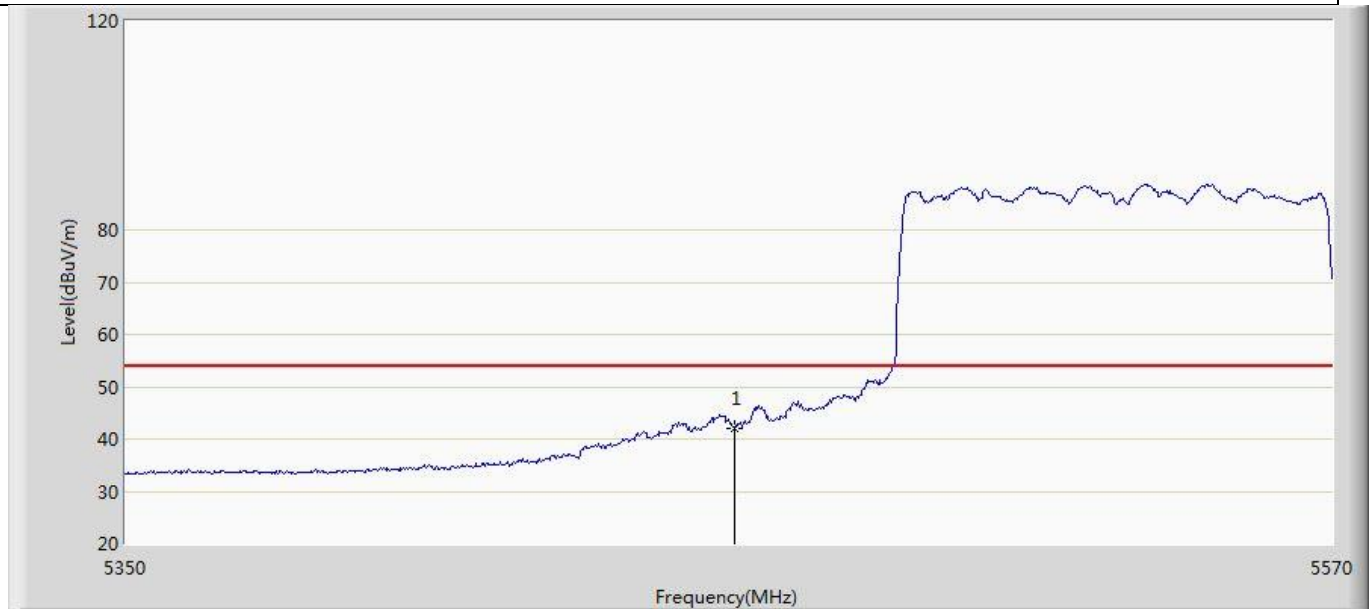


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	42.154	4.421	-11.846	54.000	37.732	AV

Profile: 2360091R	Page No.: 107
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) with ant1+2	

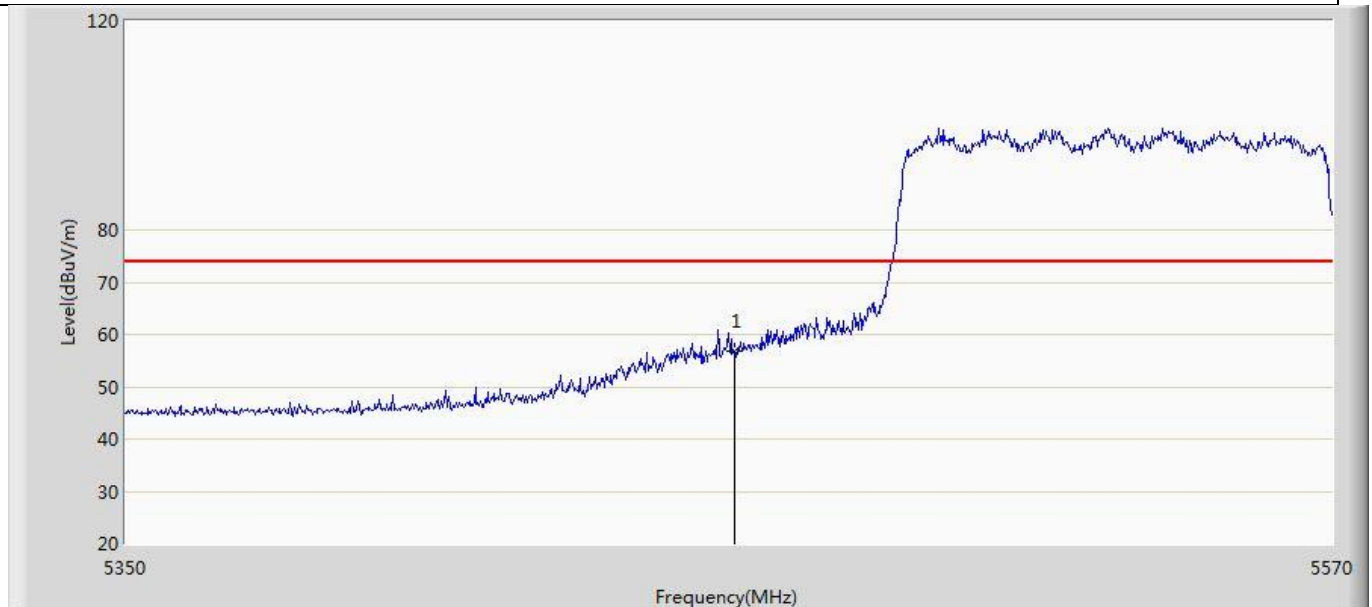


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	56.888	19.155	-17.112	74.000	37.732	PK

Profile: 2360091R	Page No.: 108
Engineer: Yuliu	
Site: AC5	Time: 2023/06/25 - 23:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5530MHz by 802.11ax(80MHz) with ant1+2	

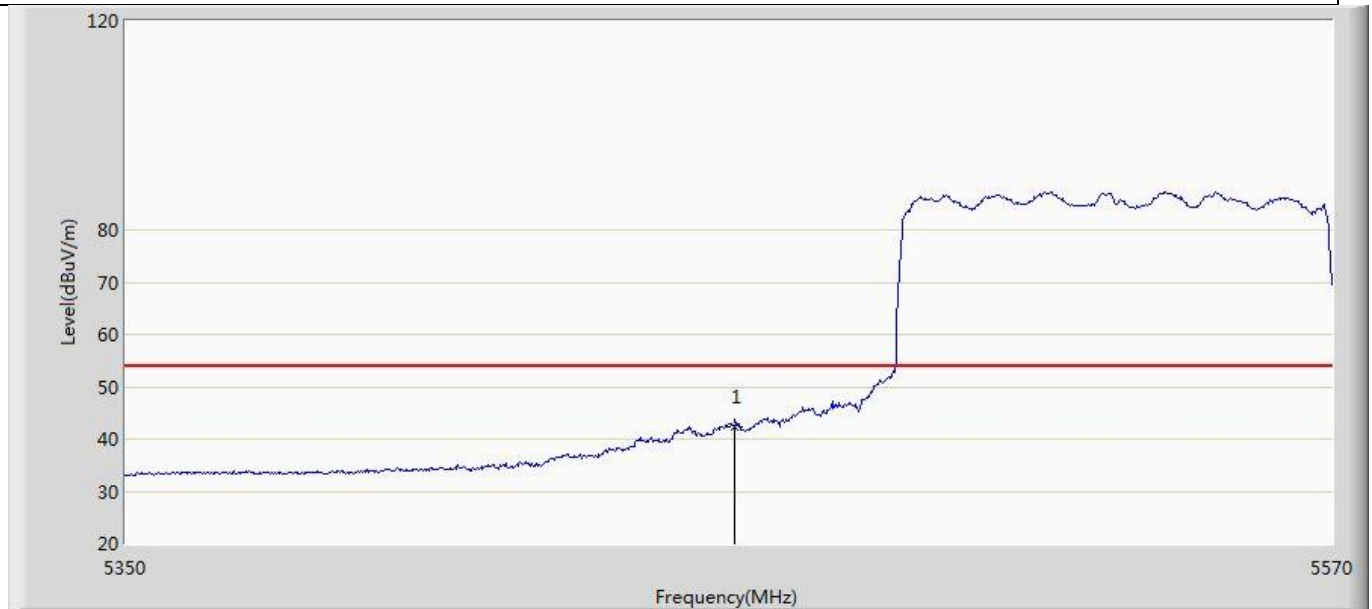


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5460.000	42.363	4.630	-11.637	54.000	37.732	AV

Profile: 2360091R	Page No.: 39
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:54
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5775MHz by 802.11ax (80MHz) with ant1+2	

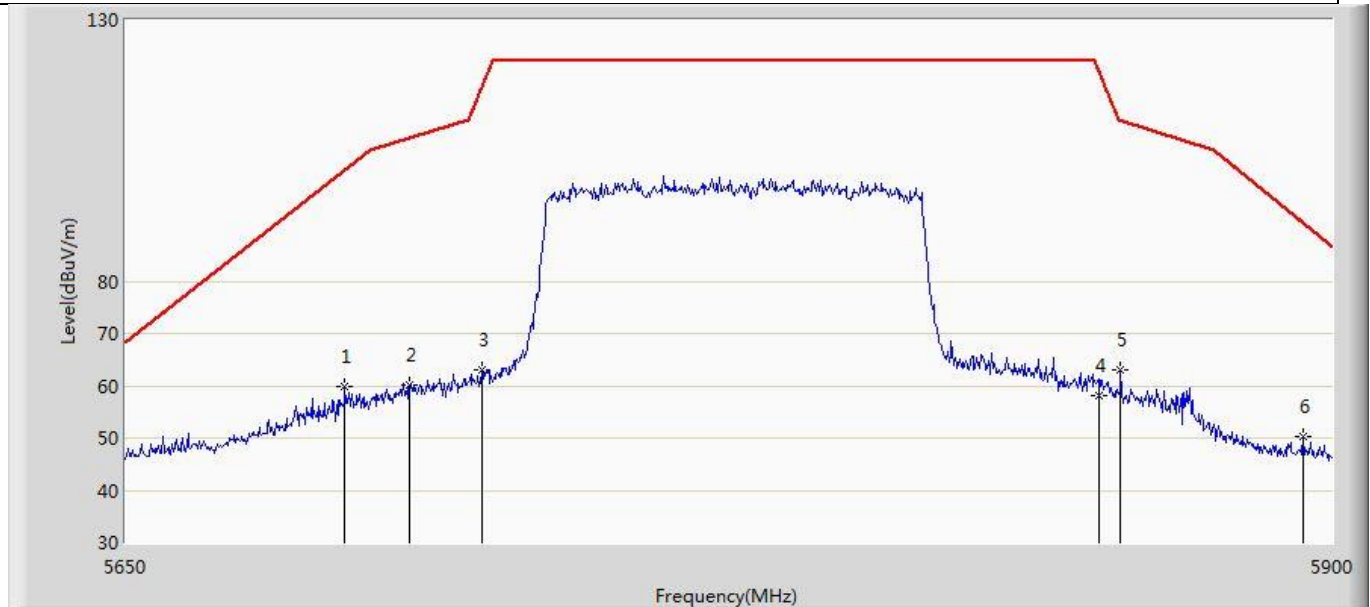

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5694.750	59.879	21.876	-41.451	101.330	38.003	PK
2		5708.000	60.067	22.211	-47.375	107.442	37.856	PK
3		5722.750	63.094	25.030	-53.977	117.071	38.064	PK
4		5851.000	58.124	19.977	-61.796	119.919	38.146	PK
5		5855.500	63.181	25.008	-47.478	110.660	38.173	PK
6	*	5894.000	50.345	12.177	-40.758	91.103	38.169	PK

Profile: 2360091R	Page No.: 40
Engineer: Yuliu	
Site: AC5	Time: 2023/06/28 - 00:56
Limit: FCC-15.407 new new	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: Battery
Note: Mode 9: Transmit at 5775MHz by 802.11ax (80MHz) with ant1+2	

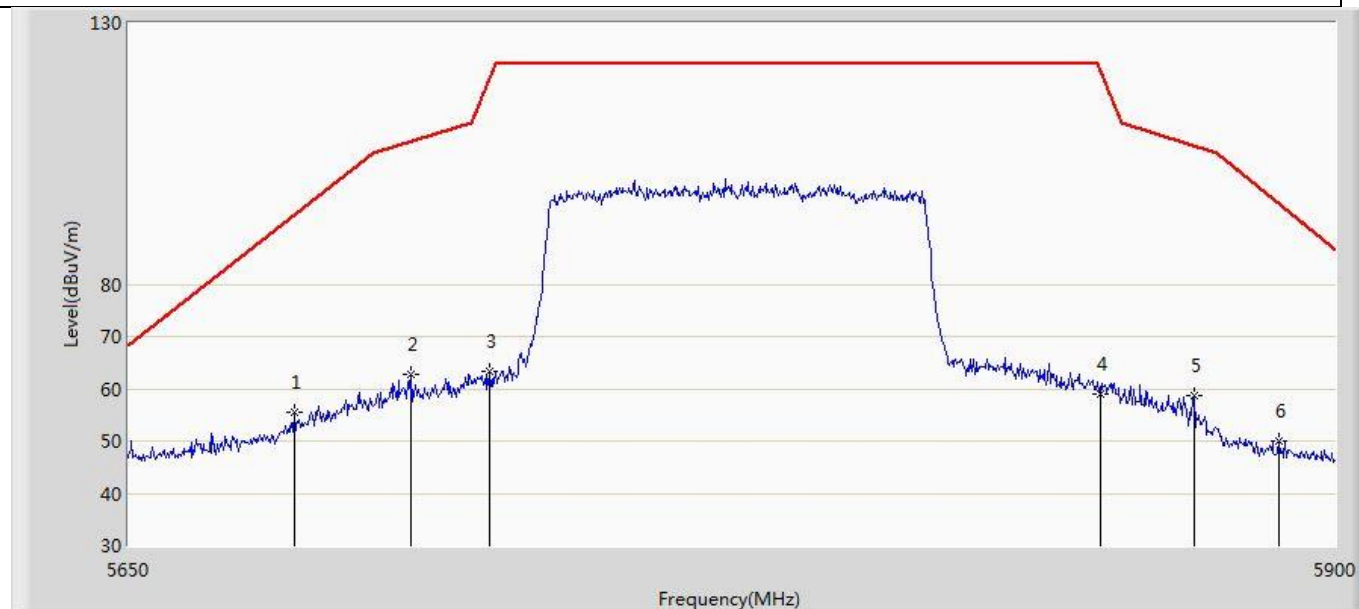

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5683.750	55.558	17.602	-37.653	93.211	37.956	PK
2		5707.750	62.657	24.798	-44.715	107.372	37.858	PK
3		5723.750	63.468	25.388	-55.883	119.351	38.080	PK
4		5850.500	59.043	20.899	-62.017	121.060	38.144	PK
5		5870.250	58.570	20.397	-47.958	106.528	38.173	PK
6		5888.250	50.015	11.861	-45.349	95.364	38.154	PK


Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)
3. We have evaluated both SISO and MIMO mode, shown in report is the worst data.

4.9 Frequency Stability**VERDICT: PASS****4.9.1 Limit:**

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.

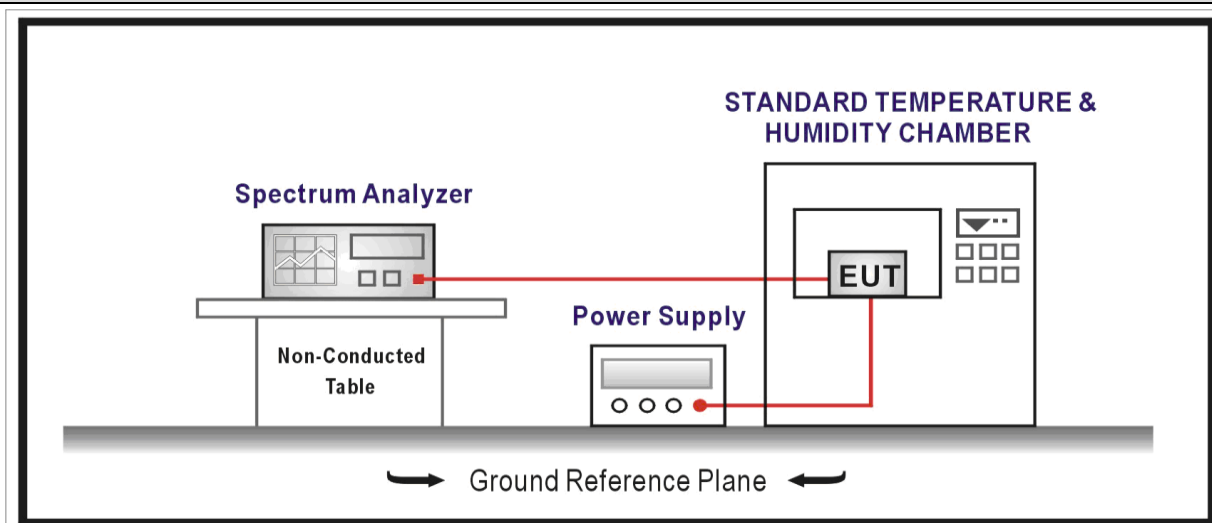4.9.2 Test Setup**4.9.3 Test Procedure**

	References Rule		Chapter	Description
☒	ANSI C63.10		6.8	Frequency stability tests
☒	ANSI C63.10	6.8.1	Frequency stability with respect to ambient temperature	
☒	ANSI C63.10	6.8.2	Frequency stability when varying supply voltage	

4.9.4 Test Data

Frequency Stability under Temperature at 0min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	87	±20	Pass
10	5500.000	122	±20	Pass
20	5500.000	-41	±20	Pass
35	5500.000	143	±20	Pass

Frequency Stability under Temperature at 2min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	102	±20	Pass
10	5500.000	144	±20	Pass
20	5500.000	107	±20	Pass
35	5500.000	128	±20	Pass

Frequency Stability under Temperature at 5min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	103	±20	Pass
10	5500.000	137	±20	Pass
20	5500.000	111	±20	Pass
35	5500.000	124	±20	Pass

Frequency Stability under Temperature at 10min

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit	Result
0	5500.000	111	±20	Pass
10	5500.000	141	±20	Pass
20	5500.000	123	±20	Pass
35	5500.000	134	±20	Pass

4.10 Antenna Requirement**VERDICT: PASS****4.10.1 Limit:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.10.2 Antenna Connector Construction:

☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector

Please refer to the attached document "Internal Photograph" to show the antenna connector.



4.11 Test setup photo and EUT Photo	VERDICT: PASS
-------------------------------------	---------------

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____