




TEST REPORT

Report No. : **CHTEW20030115** Report Verification: 

Project No...... : **SHT2002024901EW**

FCC ID..... : **2ATS9-5004**


Applicant's name..... : **Cleer Limited**

Address..... : UNITS 3306-12, 33/F, SHUI ON CENTRE, NOS.6-8 HARBOUR ROAD, WANCHAI, HONG KONG China

Manufacturer..... : Cleer Limited

Address..... : UNITS 3306-12, 33/F, SHUI ON CENTRE, NOS.6-8 HARBOUR ROAD, WANCHAI, HONG KONG China

Test item description : **SMART DISPLAY SPEAKER**

Trade Mark : 

Model/Type reference..... : MIRAGE

Listed Model(s) : -

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Mar.03, 2020

Date of testing..... : Mar.03, 2020- Mar.23. 2020

Date of issue..... : Mar.23. 2020

Result..... : **PASS**

Compiled by
 (Position+Printed name+Signature): File administrator Fanghui Zhu 

Supervised by
 (Position+Printed name+Signature): Project Engineer Kiki Kong 

Approved by
 (Position+Printed name+Signature): RF Manager Hans Hu 

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	<u>TEST DESCRIPTION</u>	4
3.	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	<u>TEST CONFIGURATION</u>	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
5.	<u>TEST CONDITIONS AND RESULTS</u>	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	27
6.	<u>TEST SETUP PHOTOS</u>	35
7.	<u>EXTERANAL AND INTERNAL PHOTOS</u>	36
8.	<u>APPENDIX REPORT</u>	36

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-03-23	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247(b)(3)	PASS
5.4	Power Spectral Density	15.247(e)	PASS
5.5	6dB Bandwidth	15.247(a)(2)	PASS
5.6	99% Occupied Bandwidth	-	PASS ^{*1}
5.7	Duty cycle	-	PASS ^{*1}
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.9	Radiated Band Edge Emission	15.205/15.209	PASS
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:


- The measurement uncertainty is not included in the test result.
- *1: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Cleer Limited
Address:	UNITS 3306-12, 33/F, SHUI ON CENTRE, NOS.6-8 HARBOUR ROAD, WANCHAI, HONG KONG China
Manufacturer:	Cleer Limited
Address:	UNITS 3306-12, 33/F, SHUI ON CENTRE, NOS.6-8 HARBOUR ROAD, WANCHAI, HONG KONG China

3.2. Product Description

Name of EUT:	SMART DISPLAY SPEAKER
Trade Mark:	
Model No.:	MIRAGE
Listed Model(s):	-
Power supply:	AC 120V
Adapter information:	Model: SOY-1200450 Input: AC 100-240V, 50/60Hz Max. 1.7A Output: DC 12V, 4.5A 54W
Hardware version:	V0P3
Software version:	0.2.1

3.3. Radio Specification Description

Support type ^{*2} :	802.11b, 802.11g, 802.11n(HT20), 802.11n(H4T0)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	FPC Antenna
Antenna gain:	1.85 dBi

Note:

*2: only show the RF function associated with this report.

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/802.11g/802.11n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
. :	. :	. :	. :
06	2437	06	2437
. :	. :	. :	. :
10	2457	08	2447
11	2462	09	2452

4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipment	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE X_142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/08/21	2020/08/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX 104	501184/4	2019/05/27	2020/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2017/03/27	2020/03/26
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25
●	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25
○	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):


(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULT

Passed **Not Applicable**

The antenna type is a FPC antenna, the directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

|

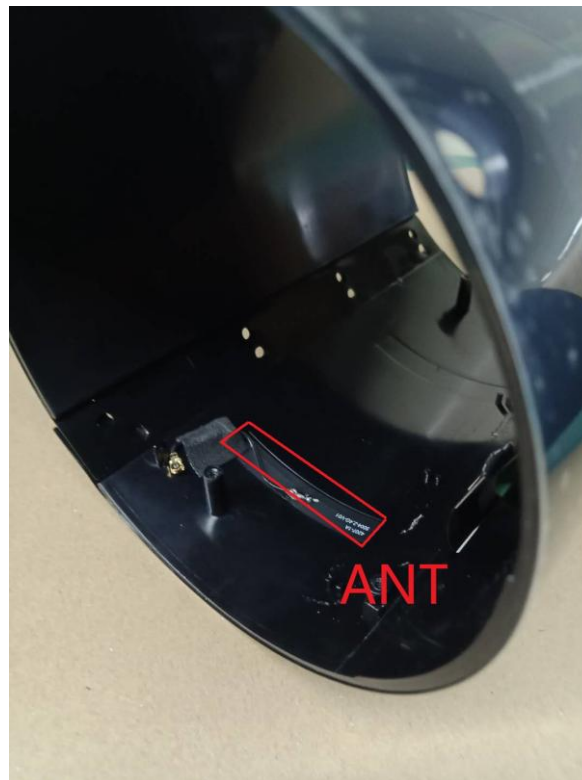

5.2. AC Conducted Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Test Line:

L

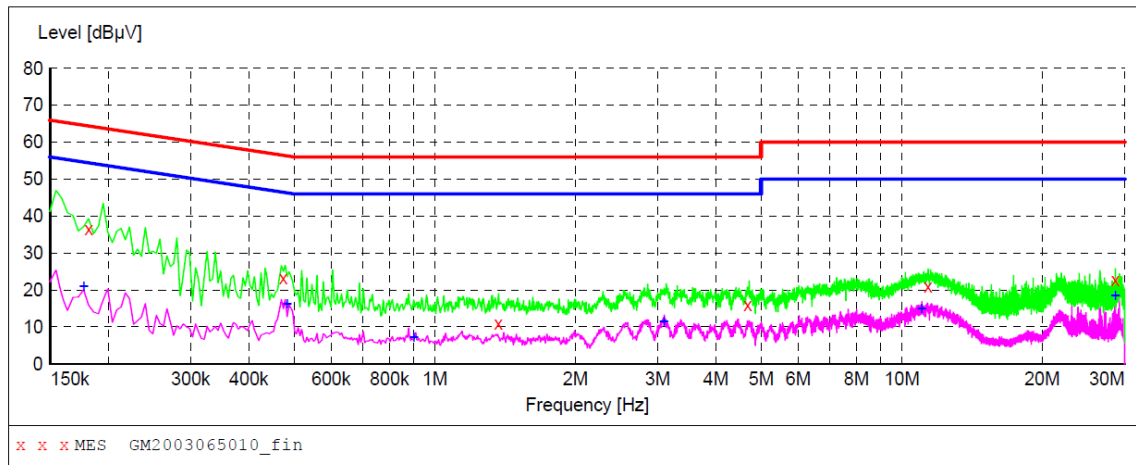

MEASUREMENT RESULT: "GM2003065010_fin"

3/6/2020 9:13AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.181500	36.60	10.1	64	27.8	QP	L1	GND
0.474000	23.20	10.1	56	33.2	QP	L1	GND
1.369500	10.90	10.1	56	45.1	QP	L1	GND
4.681500	16.00	10.1	56	40.0	QP	L1	GND
11.377500	21.00	10.2	60	39.0	QP	L1	GND
28.684500	22.60	10.3	60	37.4	QP	L1	GND


MEASUREMENT RESULT: "GM2003065010_fin2"

3/6/2020 9:13AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	21.00	10.1	55	33.6	AV	L1	GND
0.483000	16.10	10.1	46	30.2	AV	L1	GND
0.901500	7.30	10.1	46	38.7	AV	L1	GND
3.093000	11.50	10.1	46	34.5	AV	L1	GND
11.022000	15.00	10.2	50	35.0	AV	L1	GND
28.684500	18.40	10.3	50	31.6	AV	L1	GND

Test Line:

N

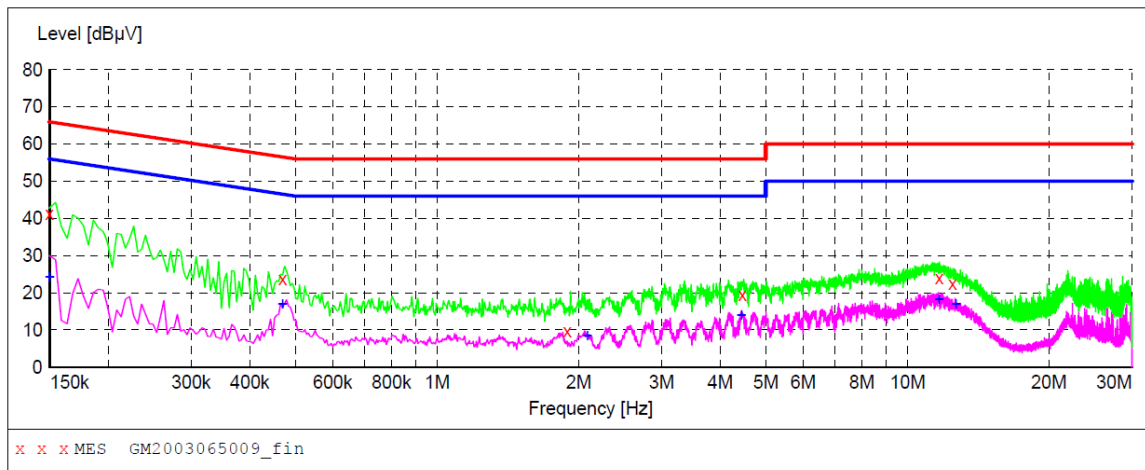

MEASUREMENT RESULT: "GM2003065009_fin"

3/6/2020 9:11AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	41.20	10.1	66	24.8	QP	N	GND
0.469500	23.60	10.1	57	32.9	QP	N	GND
1.891500	9.80	10.1	56	46.2	QP	N	GND
4.461000	19.50	10.1	56	36.5	QP	N	GND
11.683500	24.00	10.2	60	36.0	QP	N	GND
12.475500	22.40	10.2	60	37.6	QP	N	GND

MEASUREMENT RESULT: "GM2003065009_fin2"

3/6/2020 9:11AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	24.30	10.1	56	31.7	AV	N	GND
0.469500	17.00	10.1	47	29.5	AV	N	GND
2.085000	8.50	10.1	46	37.5	AV	N	GND
4.429500	13.90	10.1	46	32.1	AV	N	GND
11.652000	18.20	10.2	50	31.8	AV	N	GND
12.660000	16.90	10.2	50	33.1	AV	N	GND

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST Data

Please refer to appendix A on the appendix report


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

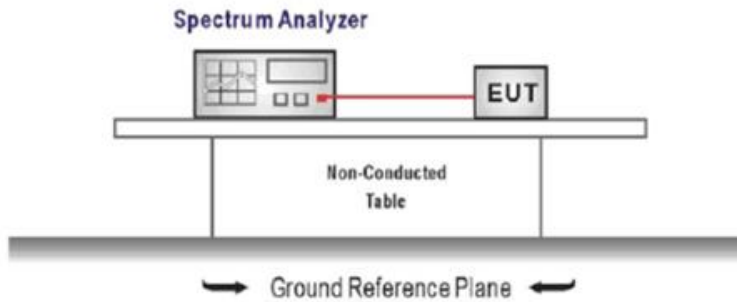

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST Data

Please refer to appendix B on the appendix report


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

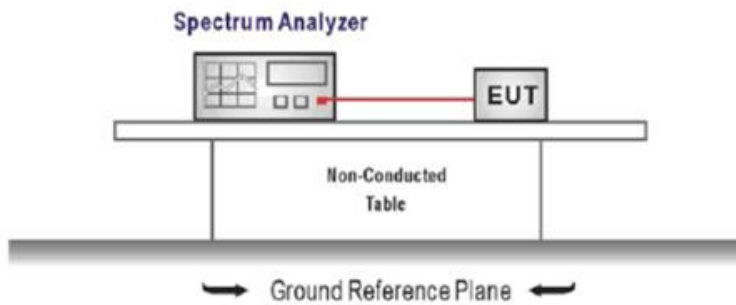

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency =DTS channel center frequency
Span=2 x DTS bandwidth
RBW = 100 kHz, VBW \geq 3 x RBW
Sweep time= auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST Data


Please refer to appendix C on the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

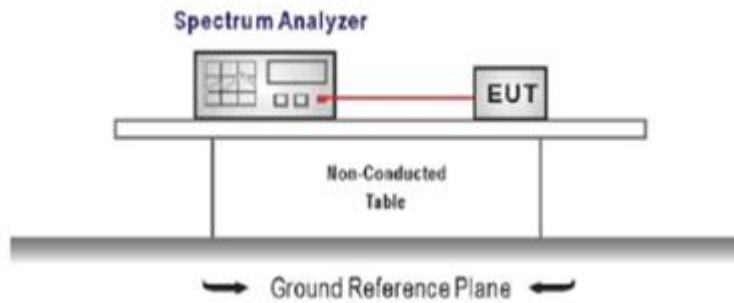

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times$ OBW
RBW = 1%~5%OBW
VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST Data


Please refer to appendix D on the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION

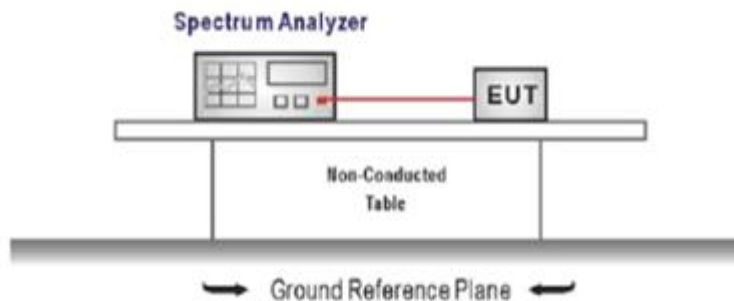

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW \geq RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE:

Please refer to the clause 4.2

TEST Data


Please refer to appendix E on the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

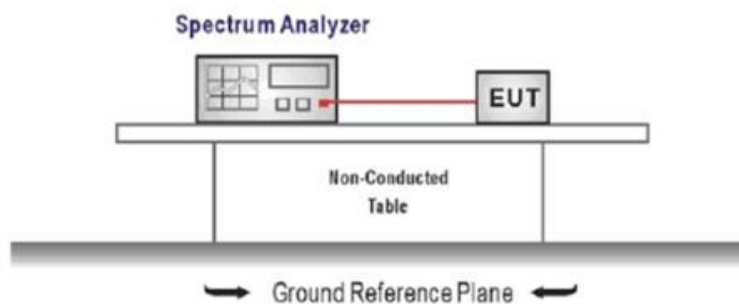

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed **Not Applicable**

TEST Data

Please refer to appendix F on the appendix report


5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

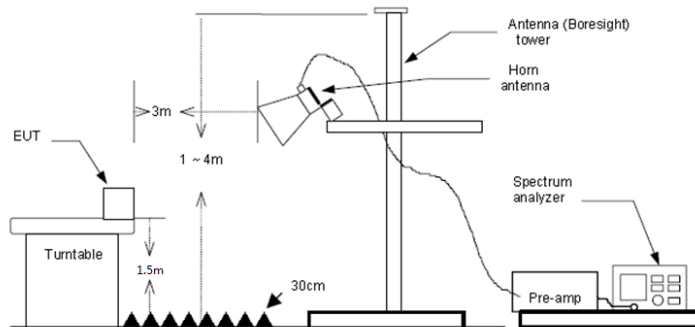

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Type	802.11b	Test channel	CH01	Polarity	Horizontal		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	27.64	17.66	45.30	74.00	28.70	Horizontal	PK
2390.000	27.05	17.59	44.64	74.00	29.36	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	17.01	17.66	34.67	54.00	19.33	Horizontal	AV
2390.000	16.67	17.59	34.26	54.00	19.74	Horizontal	AV
Type	802.11b	Test channel	CH01	Polarity	Vertical		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	27.26	17.66	44.92	74.00	29.08	Vertical	PK
2390.000	26.69	17.59	44.28	74.00	29.72	Vertical	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	16.58	17.66	34.24	54.00	19.76	Vertical	AV
2390.000	16.42	17.59	34.01	54.00	19.99	Vertical	AV

Type	802.11b	Test channel	CH11	Polarity	Horizontal		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	27.19	17.85	45.04	74.00	28.96	Horizontal	PK
2500.000	27.19	17.90	45.09	74.00	28.91	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	16.84	17.85	34.69	54.00	19.31	Horizontal	AV
2500.000	16.88	17.90	34.78	54.00	19.22	Horizontal	AV
Type	802.11b	Test channel	CH11	Polarity	Vertical		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	27.65	17.85	45.50	74.00	28.50	Vertical	PK
2500.000	28.11	17.90	46.01	74.00	27.99	Vertical	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	16.70	17.85	34.55	54.00	19.45	Vertical	AV
2500.000	16.50	17.90	34.40	54.00	19.60	Vertical	AV

Type	802.11g	Test channel	CH01	Polarity	Horizontal		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	28.10	17.66	45.76	74.00	28.24	Horizontal	PK
2390.000	27.10	17.59	44.69	74.00	29.31	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	16.83	17.66	34.49	54.00	19.51	Horizontal	AV
2390.000	16.91	17.59	34.50	54.00	19.50	Horizontal	AV
Type	802.11g	Test channel	CH01	Polarity	Vertical		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	27.72	17.66	45.38	74.00	28.62	Vertical	PK
2390.000	27.09	17.59	44.68	74.00	29.32	Vertical	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2310.000	16.86	17.66	34.52	54.00	19.48	Vertical	AV
2390.000	16.73	17.59	34.32	54.00	19.68	Vertical	AV

Type	802.11g	Test channel	CH11	Polarity	Horizontal		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	27.18	17.85	45.03	74.00	28.97	Horizontal	PK
2500.000	27.06	17.90	44.96	74.00	29.04	Horizontal	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	17.17	17.85	35.02	54.00	18.98	Horizontal	AV
2500.000	16.88	17.90	34.78	54.00	19.22	Horizontal	AV
Type	802.11g	Test channel	CH11	Polarity	Vertical		
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	28.44	17.85	46.29	74.00	27.71	Vertical	PK
2500.000	27.53	17.90	45.43	74.00	28.57	Vertical	PK
Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
2483.500	16.74	17.85	34.59	54.00	19.41	Vertical	AV
2500.000	16.73	17.90	34.63	54.00	19.37	Vertical	AV

Type		802.11n(HT20)		Test channel		CH01		Polarity		Horizontal	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2310.000	29.02	17.66	46.68	74.00	27.32	Horizontal	PK				
2390.000	28.11	17.59	45.70	74.00	28.30	Horizontal	PK				
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2310.000	17.35	17.66	35.01	54.00	18.99	Horizontal	AV				
2390.000	17.28	17.59	34.87	54.00	19.13	Horizontal	AV				
Type		802.11n(HT20)		Test channel		CH01		Polarity		Vertical	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2310.000	27.88	17.66	45.54	74.00	28.46	Vertical	PK				
2390.000	27.20	17.59	44.79	74.00	29.21	Vertical	PK				
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2310.000	17.22	17.66	34.88	54.00	19.12	Vertical	AV				
2390.000	16.76	17.59	34.35	54.00	19.65	Vertical	AV				

Type		802.11n(HT20)		Test channel		CH11		Polarity		Horizontal	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2483.500	27.02	17.85	44.87	74.00	29.13	Horizontal	PK				
2500.000	28.49	17.90	46.39	74.00	27.61	Horizontal	PK				
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2483.500	16.90	17.85	34.75	54.00	19.25	Horizontal	AV				
2500.000	17.03	17.90	34.93	54.00	19.07	Horizontal	AV				
Type		802.11n(HT20)		Test channel		CH11		Polarity		Vertical	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2483.500	27.05	17.85	44.90	74.00	29.10	Vertical	PK				
2500.000	27.65	17.90	45.55	74.00	28.45	Vertical	PK				
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector				
2483.500	16.90	17.85	34.75	54.00	19.25	Vertical	AV				
2500.000	17.36	17.90	35.26	54.00	18.74	Vertical	AV				

Type	802.11n(HT40)		Test channel	CH03	Polarity	Horizontal		
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2310.000	28.31	17.66	45.97	74.00	28.03	Horizontal	PK
	2390.000	28.44	17.59	46.03	74.00	27.97	Horizontal	PK
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2310.000	17.57	17.66	35.23	54.00	18.77	Horizontal	AV
	2390.000	16.97	17.59	34.56	54.00	19.44	Horizontal	AV
Type	802.11n(HT40)		Test channel	CH03	Polarity	Vertical		
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2310.000	28.05	17.66	45.71	74.00	28.29	Vertical	PK
	2390.000	27.20	17.59	44.79	74.00	29.21	Vertical	PK
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2310.000	17.80	17.66	35.46	54.00	18.54	Vertical	AV
	2390.000	17.25	17.59	34.84	54.00	19.16	Vertical	AV

Type	802.11n(HT40)		Test channel	CH09	Polarity	Horizontal		
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2483.500	27.60	17.85	45.45	74.00	28.55	Horizontal	PK
	2500.000	27.56	17.90	45.46	74.00	28.54	Horizontal	PK
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2483.500	17.47	17.85	35.32	54.00	18.68	Horizontal	AV
	2500.000	17.50	17.90	35.40	54.00	18.60	Horizontal	AV
Type	802.11n(HT40)		Test channel	CH09	Polarity	Vertical		
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2483.500	28.14	17.85	45.99	74.00	28.01	Vertical	PK
	2500.000	28.26	17.90	46.16	74.00	27.84	Vertical	PK
	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector
	2483.500	17.11	17.85	34.96	54.00	19.04	Vertical	AV
	2500.000	16.96	17.90	34.86	54.00	19.14	Vertical	AV

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9 kHz ~ 30 MHz

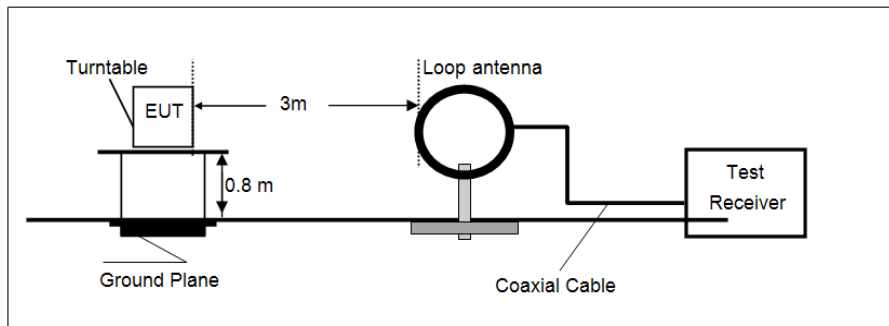

- 30 MHz ~ 1 GHz

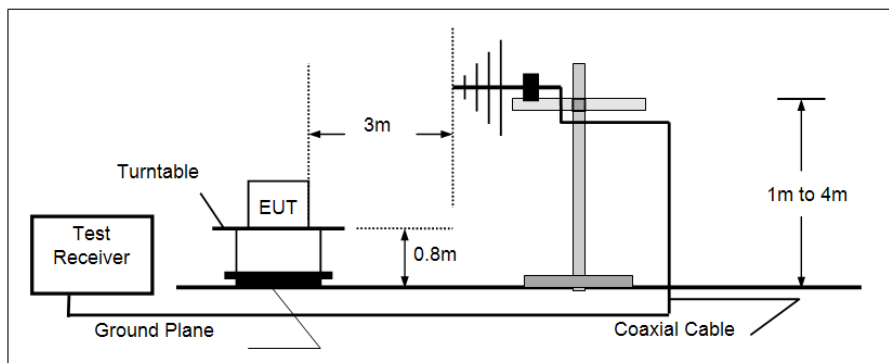

- Above 1 GHz

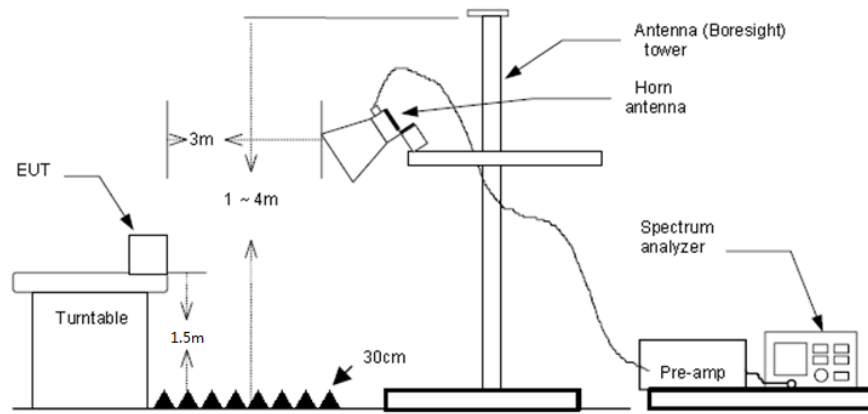

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
 - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - For average measurement:
 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE:

Please refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

TEST DATA FOR 9 kHz ~ 30 MHz


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

TEST DATA FOR 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH06 of 802.11B which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal

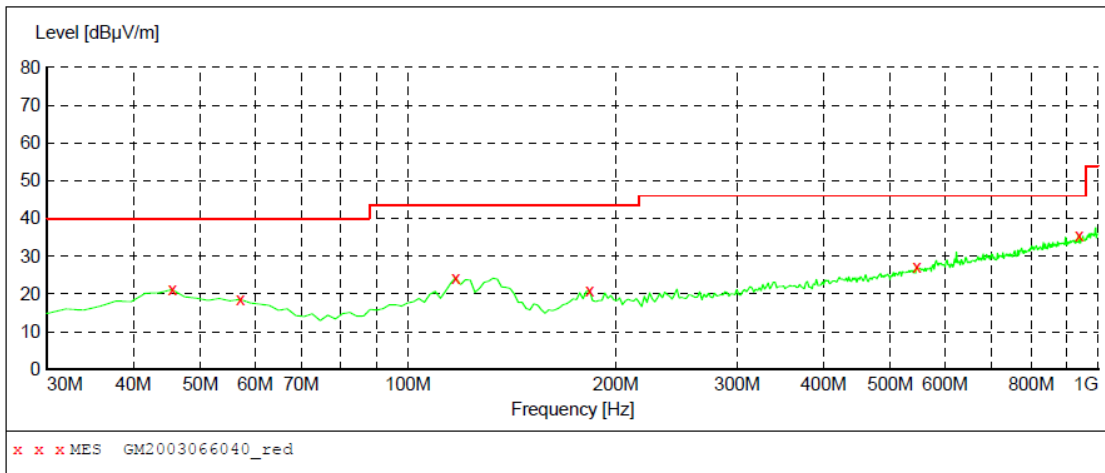


MEASUREMENT RESULT: "GM2003066040_red"

3/6/2020 2:14PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	21.20	-8.4	40.0	18.8	QP	100.0	52.00	HORIZONTAL
57.160000	18.60	-8.7	40.0	21.4	QP	100.0	293.00	HORIZONTAL
117.300000	24.30	-11.3	43.5	19.2	QP	300.0	253.00	HORIZONTAL
183.260000	20.90	-11.5	43.5	22.6	QP	100.0	320.00	HORIZONTAL
546.040000	27.20	0.1	46.0	18.8	QP	100.0	218.00	HORIZONTAL
937.920000	35.50	7.9	46.0	10.5	QP	100.0	293.00	HORIZONTAL

Polarization:

Vertical

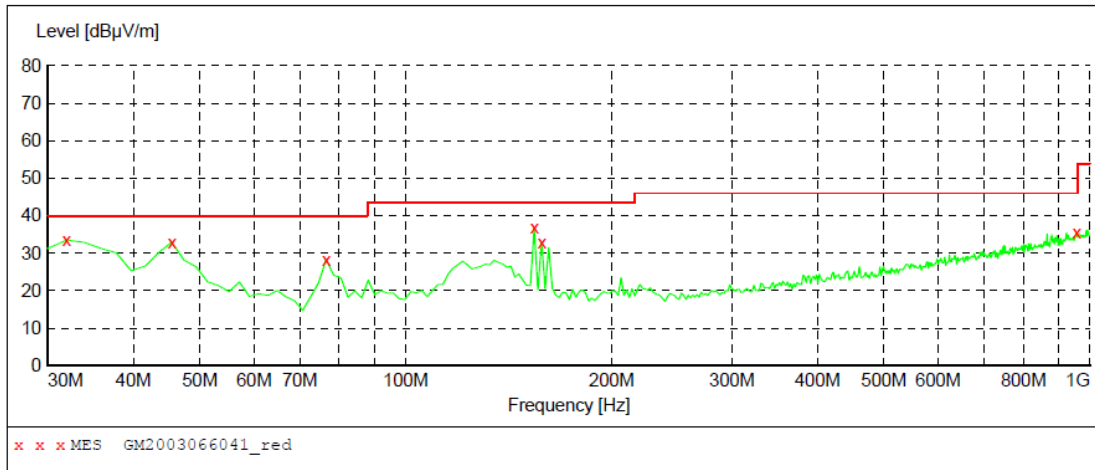

MEASUREMENT RESULT: "GM2003066041_red"

3/6/2020 2:16PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	33.50	-12.7	40.0	6.5	QP	100.0	325.00	VERTICAL
45.520000	32.90	-8.4	40.0	7.1	QP	100.0	298.00	VERTICAL
76.560000	28.30	-14.9	40.0	11.7	QP	100.0	121.00	VERTICAL
154.160000	36.80	-13.1	43.5	6.7	QP	100.0	360.00	VERTICAL
158.040000	33.00	-12.8	43.5	10.5	QP	100.0	360.00	VERTICAL
957.320000	35.50	8.3	46.0	10.5	QP	100.0	77.00	VERTICAL

TEST DATA FOR 1 GHz ~ 25 GHz

Type		802.11b		Test channel		CH00	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1741.718	31.92	-5.97	25.95	74.00	48.05	Horizontal	PK
4730.625	31.68	6.59	38.27	74.00	35.73	Horizontal	PK
7010.125	30.99	14.20	45.19	74.00	28.81	Horizontal	PK
9852.156	33.16	17.25	50.41	74.00	23.59	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1696.187	33.05	-6.11	26.94	74.00	47.06	Vertical	PK
5106.625	31.69	8.81	40.50	74.00	33.50	Vertical	PK
7953.062	31.76	16.25	48.01	74.00	25.99	Vertical	PK
9753.750	32.48	17.21	49.69	74.00	24.31	Vertical	PK
Type		802.11b		Test channel		CH06	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
3192.843	32.84	0.80	33.64	74.00	40.36	Horizontal	PK
5033.187	31.61	8.17	39.78	74.00	34.22	Horizontal	PK
7437.531	31.25	15.39	46.64	74.00	27.36	Horizontal	PK
9769.906	32.24	17.21	49.45	74.00	24.55	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1204.156	35.47	-5.82	29.65	74.00	44.35	Vertical	PK
3634.937	32.62	1.50	34.12	74.00	39.88	Vertical	PK
7345.000	32.34	15.19	47.53	74.00	26.47	Vertical	PK
9859.500	32.78	17.25	50.03	74.00	23.97	Vertical	PK
Type		802.11b		Test channel		CH11	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1290.812	34.00	-5.59	28.41	74.00	45.59	Horizontal	PK
3182.562	33.48	0.75	34.23	74.00	39.77	Horizontal	PK
5735.250	32.56	9.08	41.64	74.00	32.36	Horizontal	PK
9270.531	31.94	17.56	49.50	74.00	24.50	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1287.875	34.72	-5.60	29.12	74.00	44.88	Vertical	PK
2997.500	34.71	-0.11	34.60	74.00	39.40	Vertical	PK
6913.187	31.04	14.11	45.15	74.00	28.85	Vertical	PK
9593.656	32.24	17.16	49.40	74.00	24.60	Vertical	PK


Type		802.11g		Test channel		CH00	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1237.937	34.28	-5.73	28.55	74.00	45.45	Horizontal	PK
4068.218	33.16	3.18	36.34	74.00	37.66	Horizontal	PK
7014.531	31.04	14.21	45.25	74.00	28.75	Horizontal	PK
9705.281	32.30	17.18	49.48	74.00	24.52	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1195.343	35.10	-5.88	29.22	74.00	44.78	Vertical	PK
3201.656	32.69	0.82	33.51	74.00	40.49	Vertical	PK
6098.031	30.96	10.71	41.67	74.00	32.33	Vertical	PK
9555.468	33.26	17.51	50.77	74.00	23.23	Vertical	PK
Type		802.11g		Test channel		CH06	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1390.687	33.30	-5.58	27.72	74.00	46.28	Horizontal	PK
4122.562	33.11	3.38	36.49	74.00	37.51	Horizontal	PK
6065.718	30.84	10.63	41.47	74.00	32.53	Horizontal	PK
9596.593	32.67	17.13	49.80	74.00	24.20	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1290.812	34.23	-5.59	28.64	74.00	45.36	Vertical	PK
2988.687	34.76	-0.05	34.71	74.00	39.29	Vertical	PK
5068.437	32.24	8.50	40.74	74.00	33.26	Vertical	PK
9307.250	32.63	17.88	50.51	74.00	23.49	Vertical	PK
Type		802.11g		Test channel		CH11	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1261.437	34.12	-5.67	28.45	74.00	45.55	Horizontal	PK
3162.000	33.25	0.64	33.89	74.00	40.11	Horizontal	PK
6046.625	31.16	10.58	41.74	74.00	32.26	Horizontal	PK
9239.687	32.42	17.18	49.60	74.00	24.40	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1279.062	33.99	-5.62	28.37	74.00	45.63	Vertical	PK
3867.000	31.92	2.45	34.37	74.00	39.63	Vertical	PK
7129.093	30.55	14.59	45.14	74.00	28.86	Vertical	PK
10116.53	31.85	17.38	49.23	74.00	24.77	Vertical	PK


Type		802.11n(HT20)		Test channel		CH00	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1402.437	32.69	-5.58	27.11	74.00	46.89	Horizontal	PK
3179.625	33.15	0.73	33.88	74.00	40.12	Horizontal	PK
5940.875	31.33	10.18	41.51	74.00	32.49	Horizontal	PK
9727.312	32.81	17.19	50.00	74.00	24.00	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1239.406	34.38	-5.73	28.65	74.00	45.35	Vertical	PK
3135.562	33.42	0.50	33.92	74.00	40.08	Vertical	PK
5724.968	32.34	9.00	41.34	74.00	32.66	Vertical	PK
9443.843	31.99	17.64	49.63	74.00	24.37	Vertical	PK
Type		802.11n(HT20)		Test channel		CH06	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1753.468	33.56	-5.94	27.62	74.00	46.38	Horizontal	PK
3602.625	32.86	1.45	34.31	74.00	39.69	Horizontal	PK
7233.375	31.12	15.01	46.13	74.00	27.87	Horizontal	PK
9505.531	31.37	17.96	49.33	74.00	24.67	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1323.125	34.60	-5.57	29.03	74.00	44.97	Vertical	PK
3141.437	33.23	0.54	33.77	74.00	40.23	Vertical	PK
7186.375	31.19	14.91	46.10	74.00	27.90	Vertical	PK
9661.218	32.81	17.15	49.96	74.00	24.04	Vertical	PK
Type		802.11n(HT20)		Test channel		CH11	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1283.468	34.91	-5.61	29.30	74.00	44.70	Horizontal	PK
3520.375	32.82	1.13	33.95	74.00	40.05	Horizontal	PK
6485.781	31.44	12.34	43.78	74.00	30.22	Horizontal	PK
9880.062	32.29	17.26	49.55	74.00	24.45	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1265.843	34.82	-5.66	29.16	74.00	44.84	Vertical	PK
3160.531	33.88	0.63	34.51	74.00	39.49	Vertical	PK
6170.000	31.18	10.83	42.01	74.00	31.99	Vertical	PK
9880.062	32.57	17.26	49.83	74.00	24.17	Vertical	PK

Type		802.11n(HT40)		Test channel		CH03	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1420.062	31.96	-5.59	26.37	74.00	47.63	Horizontal	PK
3681.937	32.45	1.56	34.01	74.00	39.99	Horizontal	PK
6325.687	31.31	11.07	42.38	74.00	31.62	Horizontal	PK
8467.125	32.22	15.41	47.63	74.00	26.37	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1710.875	32.24	-6.07	26.17	74.00	47.83	Vertical	PK
3602.625	32.22	1.45	33.67	74.00	40.33	Vertical	PK
6591.531	31.28	13.10	44.38	74.00	29.62	Vertical	PK
9791.937	32.61	17.23	49.84	74.00	24.16	Vertical	PK
Type		802.11n(HT40)		Test channel		CH06	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1763.750	31.66	-5.91	25.75	74.00	48.25	Horizontal	PK
4765.875	31.49	6.82	38.31	74.00	35.69	Horizontal	PK
7342.062	31.57	15.18	46.75	74.00	27.25	Horizontal	PK
9308.718	31.79	17.87	49.66	74.00	24.34	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1302.562	34.53	-5.57	28.96	74.00	45.04	Vertical	PK
4065.281	32.26	3.17	35.43	74.00	38.57	Vertical	PK
7481.593	31.35	15.40	46.75	74.00	27.25	Vertical	PK
9910.906	33.11	17.28	50.39	74.00	23.61	Vertical	PK
Type		802.11n(HT40)		Test channel		CH09	
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1376.000	32.56	-5.58	26.98	74.00	47.02	Horizontal	PK
3658.437	33.12	1.53	34.65	74.00	39.35	Horizontal	PK
6691.406	31.96	13.44	45.40	74.00	28.60	Horizontal	PK
9883.000	32.90	17.26	50.16	74.00	23.84	Horizontal	PK
Freq. [MHz]	Reading [dB μ V/m]	Factor [dB]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Polarity	Detector
1333.406	32.83	-5.57	27.26	74.00	46.74	Vertical	PK
4030.031	32.66	3.09	35.75	74.00	38.25	Vertical	PK
7065.937	31.32	14.34	45.66	74.00	28.34	Vertical	PK
9556.937	31.45	17.49	48.94	74.00	25.06	Vertical	PK

6. TEST SETUP PHOTOS

Radiated Emission

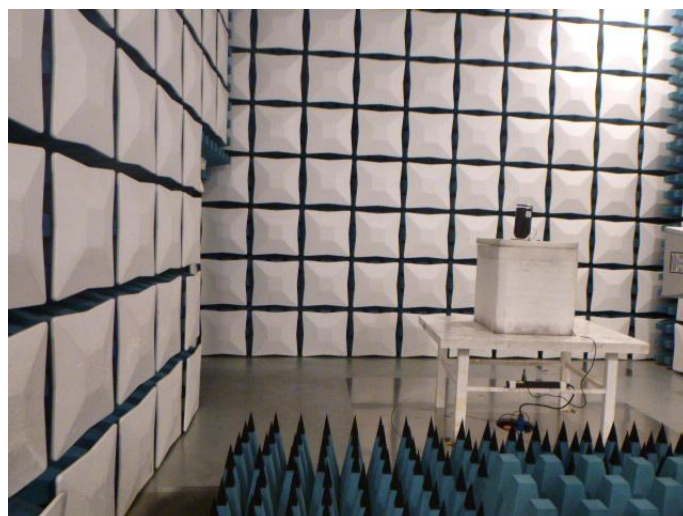

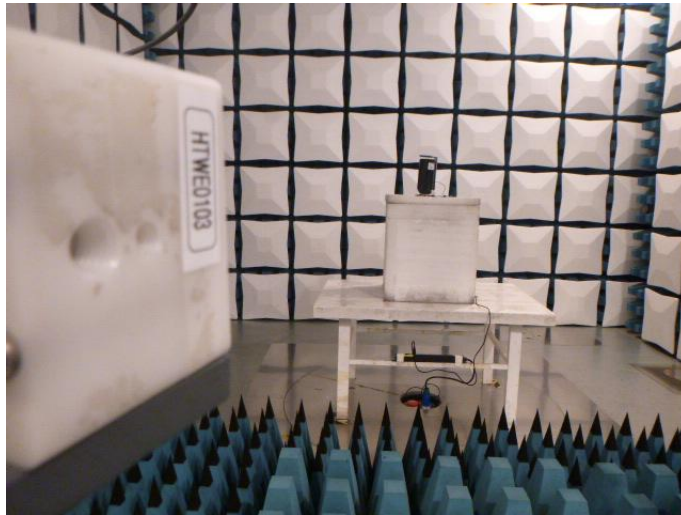

AC Conducted Emission



7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No. : CHTEW20030113.

8. APPENDIX REPORT