

## Appendix A

### RF Test Data for BLE V5.0(BDR/EDR) (Conducted Measurement)

Product Name: Waydoo Flyer

Trade Mark: Waydoo


Test Model: Wd-rc

#### Environmental Conditions

Temperature:	24.5 ° C
Relative Humidity:	54.2%
ATM Pressure:	100.0 kPa
Test Engineer:	David.Luo
Supervised by:	Wang.Chuang


#### A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

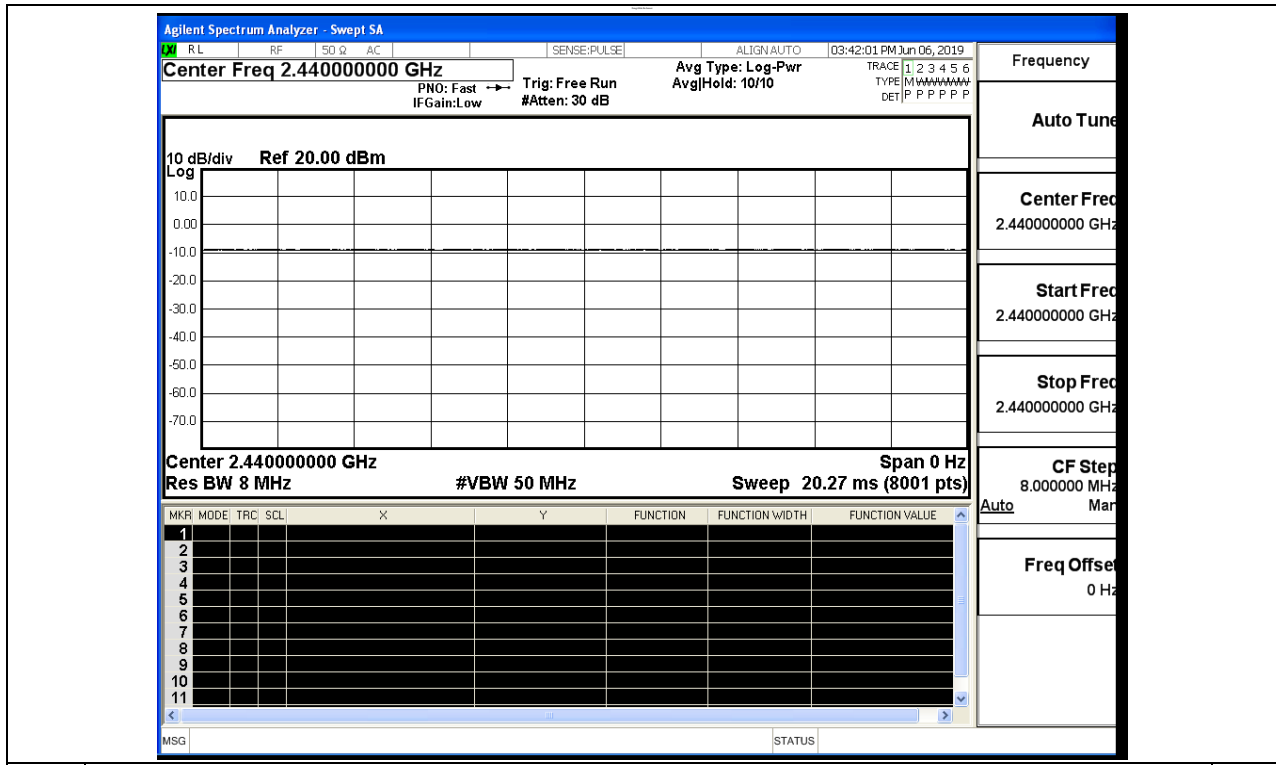


### A.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-2.22	30	PASS
BT LE	MCH	-0.986	30	PASS
BT LE	HCH	-1.488	30	PASS

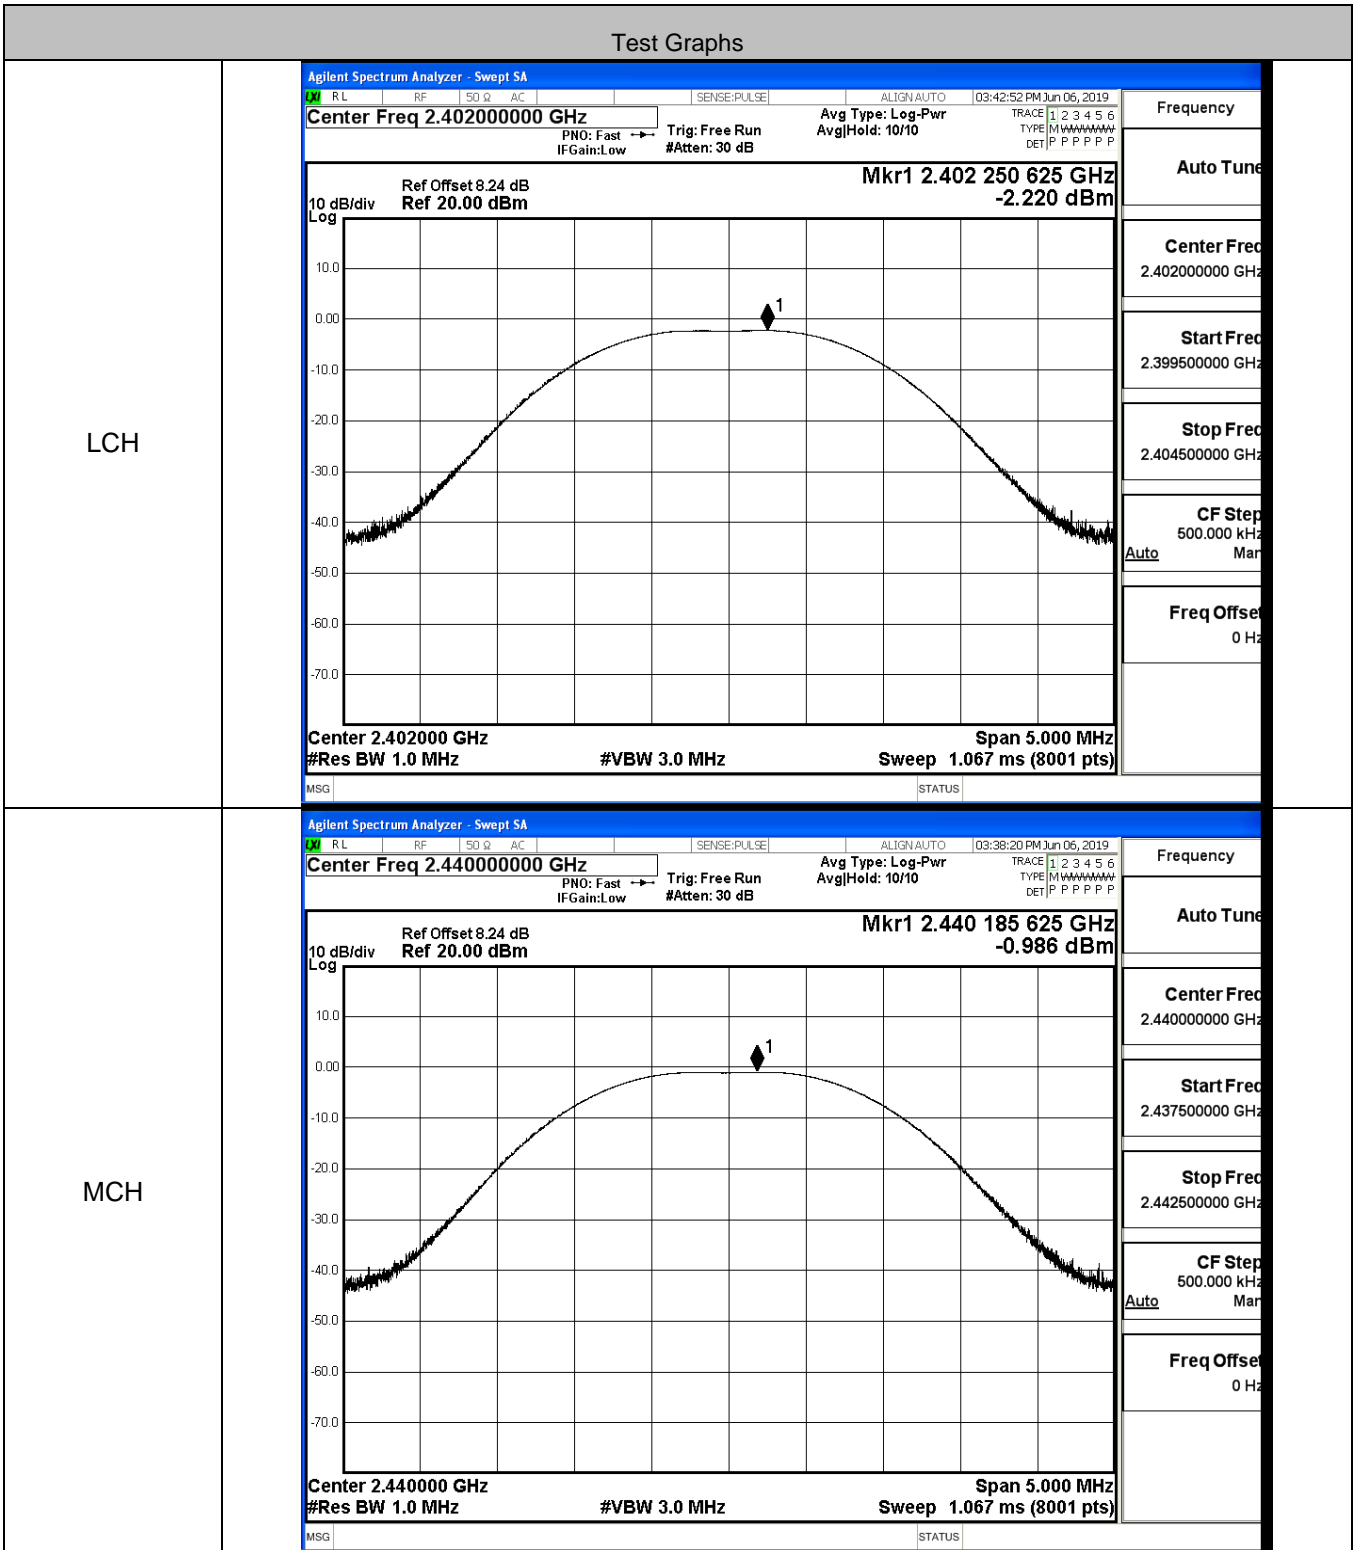


HCH

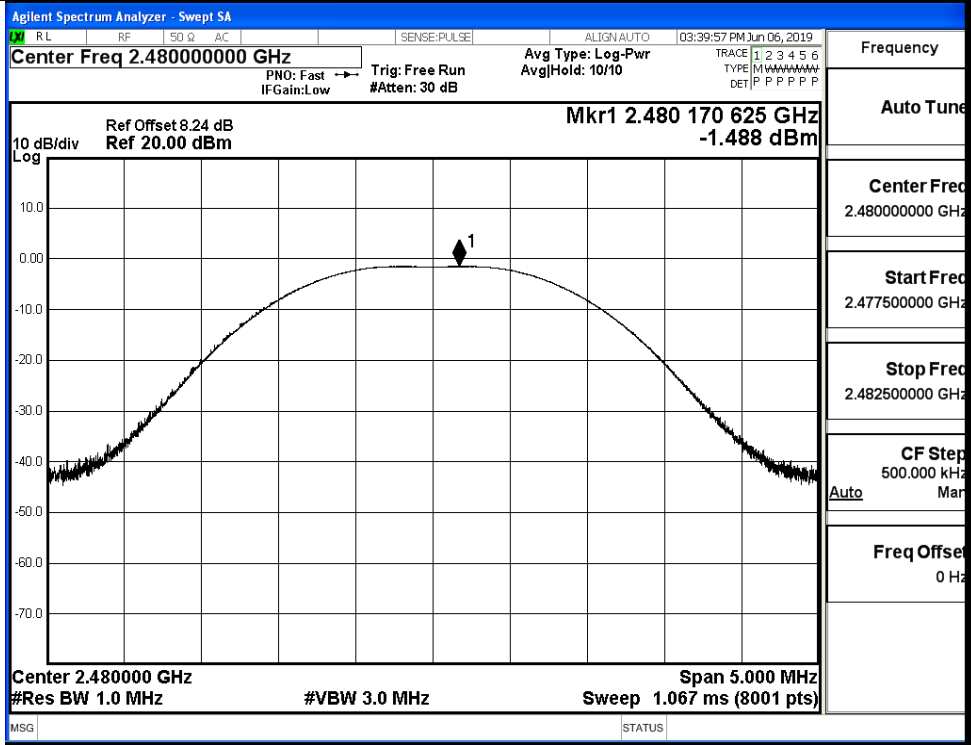


### A.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-17.383	8	PASS
BT LE	MCH	-16.257	8	PASS
BT LE	HCH	-16.417	8	PASS

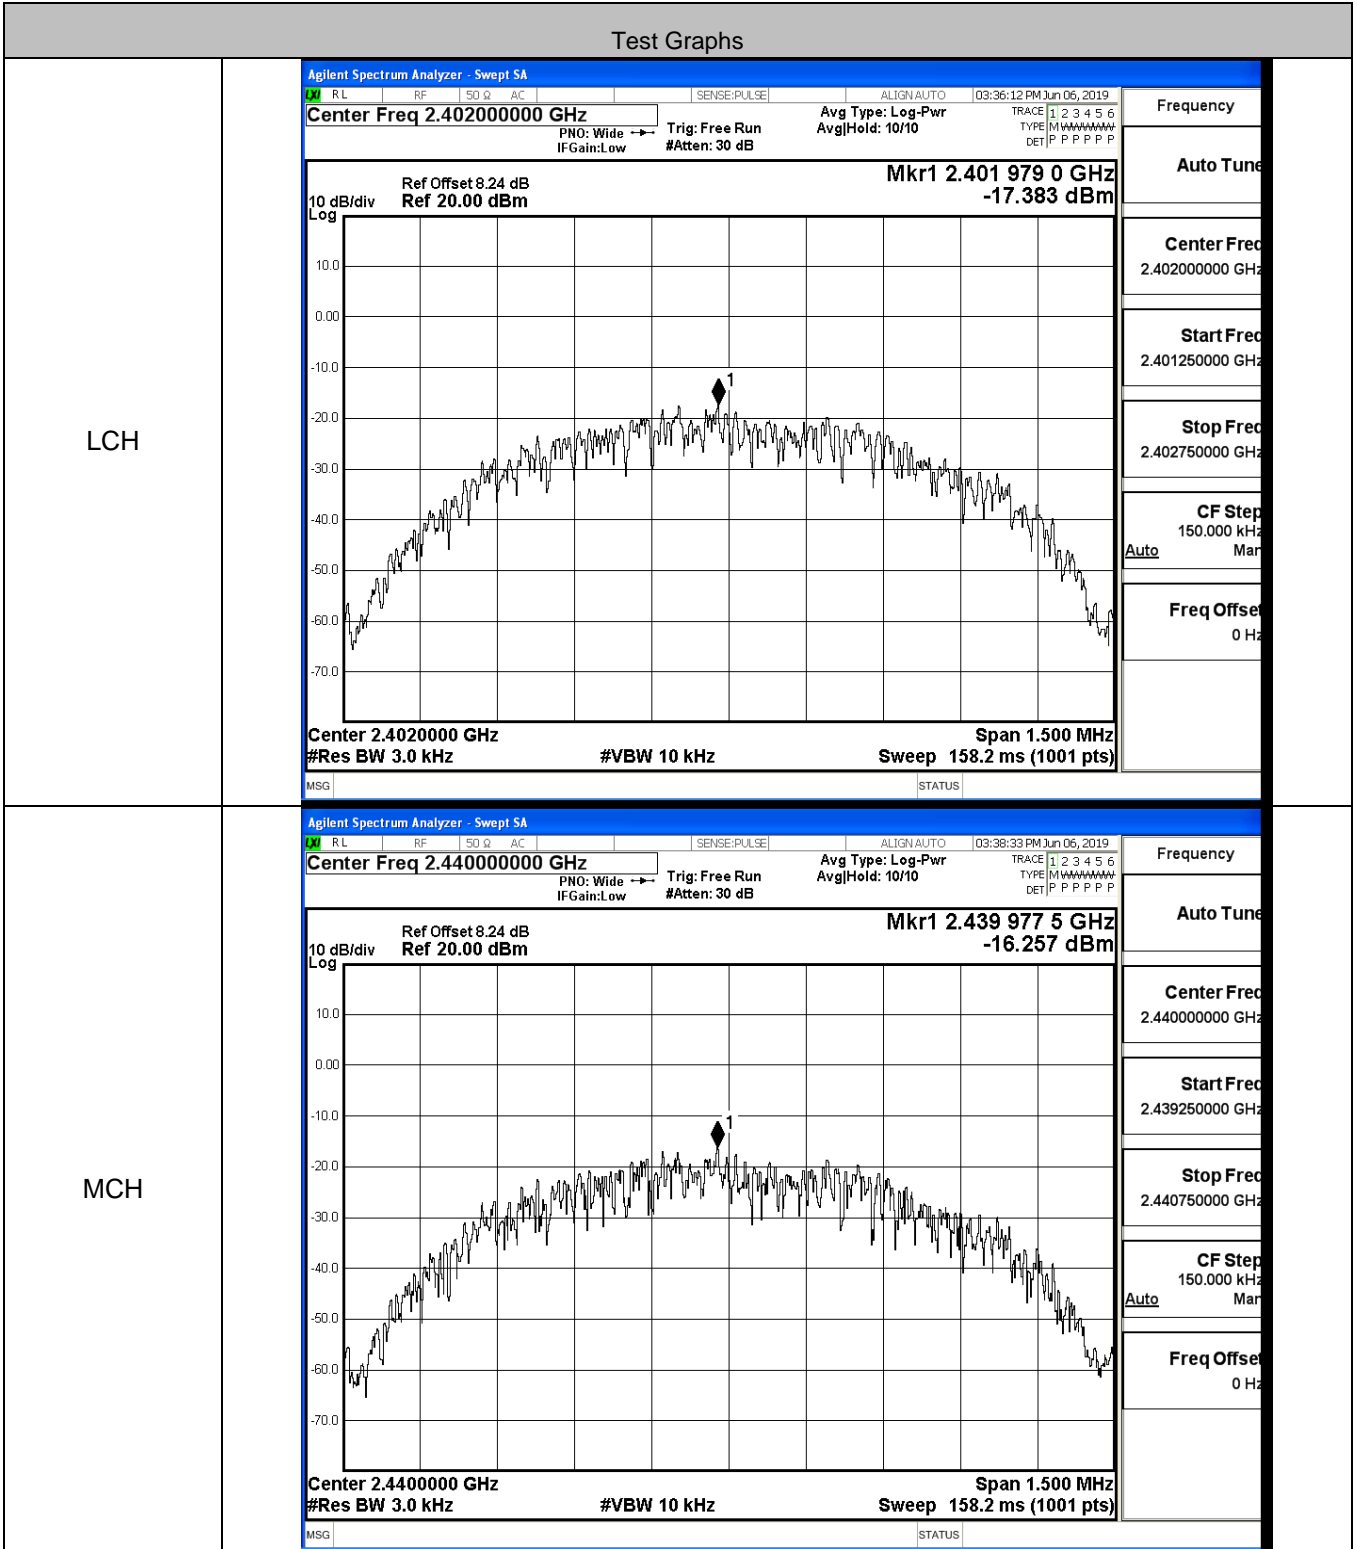

HCH

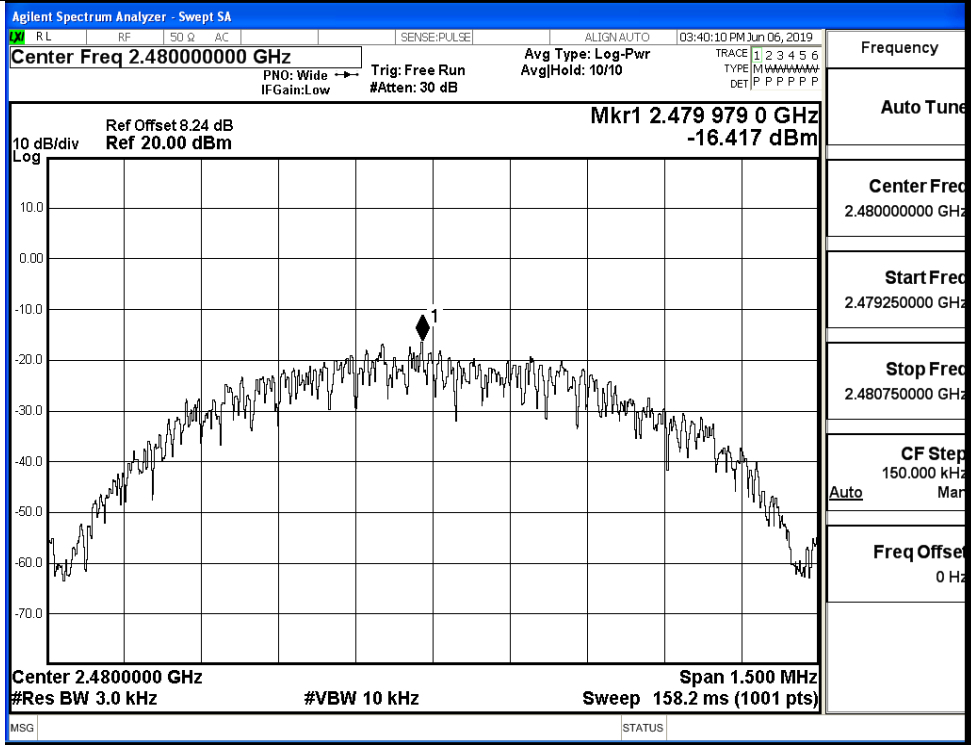

**A.4 6dB Bandwidth**

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6943	≥0.5	PASS
BT LE	MCH	0.6880	≥0.5	PASS
BT LE	HCH	0.6836	≥0.5	PASS

Test Graphs

LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Mkr1 2.4022483 GHz -2.9899 dBm</p> <p>Occupied Bandwidth 1.0513 MHz</p> <p>Total Power 4.06 dBm</p> <p>Transmit Freq Error 6.452 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 694.3 kHz</p> <p>x dB -6.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>
	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Center Freq: 2.44000000 GHz</p> <p>Mkr1 2.4399895 GHz -1.8226 dBm</p> <p>Occupied Bandwidth 1.0497 MHz</p> <p>Total Power 5.28 dBm</p> <p>Transmit Freq Error 7.340 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 688.0 kHz</p> <p>x dB -6.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44000000 GHz</p> <p>CF Step 300.000 kHz</p> <p>Freq Offset 0 Hz</p>

HCH

Agilent Spectrum Analyzer - Occupied BW

RL	RF	50 Ω	AC	SENSE:PULSE	ALIGN:AUTO	03:39:45 PM Jun 06, 2019
<b>Center Freq 2.480000000 GHz</b>			Center Freq: 2.480000000 GHz		Radio Std: None	
			Trig: Free Run		AvgHold>1/1	
			#IFGain:Low		#Atten: 30 dB	
			Radio Device: BTS			

10 dB/div	Ref Offset 8.24 dB	<b>Mkr1 2.4799974 GHz</b>
Log	Ref 20.00 dBm	<b>-2.3304 dBm</b>


Center 2.48 GHz	#VBW 300 kHz	Span 3 MHz
#Res BW 100 kHz	Sweep 1.067 ms	

<b>Occupied Bandwidth</b>	<b>Total Power</b>	<b>4.75 dBm</b>
<b>1.0424 MHz</b>		
Transmit Freq Error	5.894 kHz	OBW Power
x dB Bandwidth	683.6 kHz	x dB
		<b>99.00 %</b>
		<b>-6.00 dB</b>

Frequency
Center Freq 2.480000000 GHz
CF Step 300.000 kHz
Auto Mar
Freq Offset 0 Hz

### A.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-3.019	-43.220	-23.019	PASS
BT LE	MCH	-1.749	-44.559	-21.749	PASS
BT LE	HCH	-2.306	-44.124	-22.306	PASS

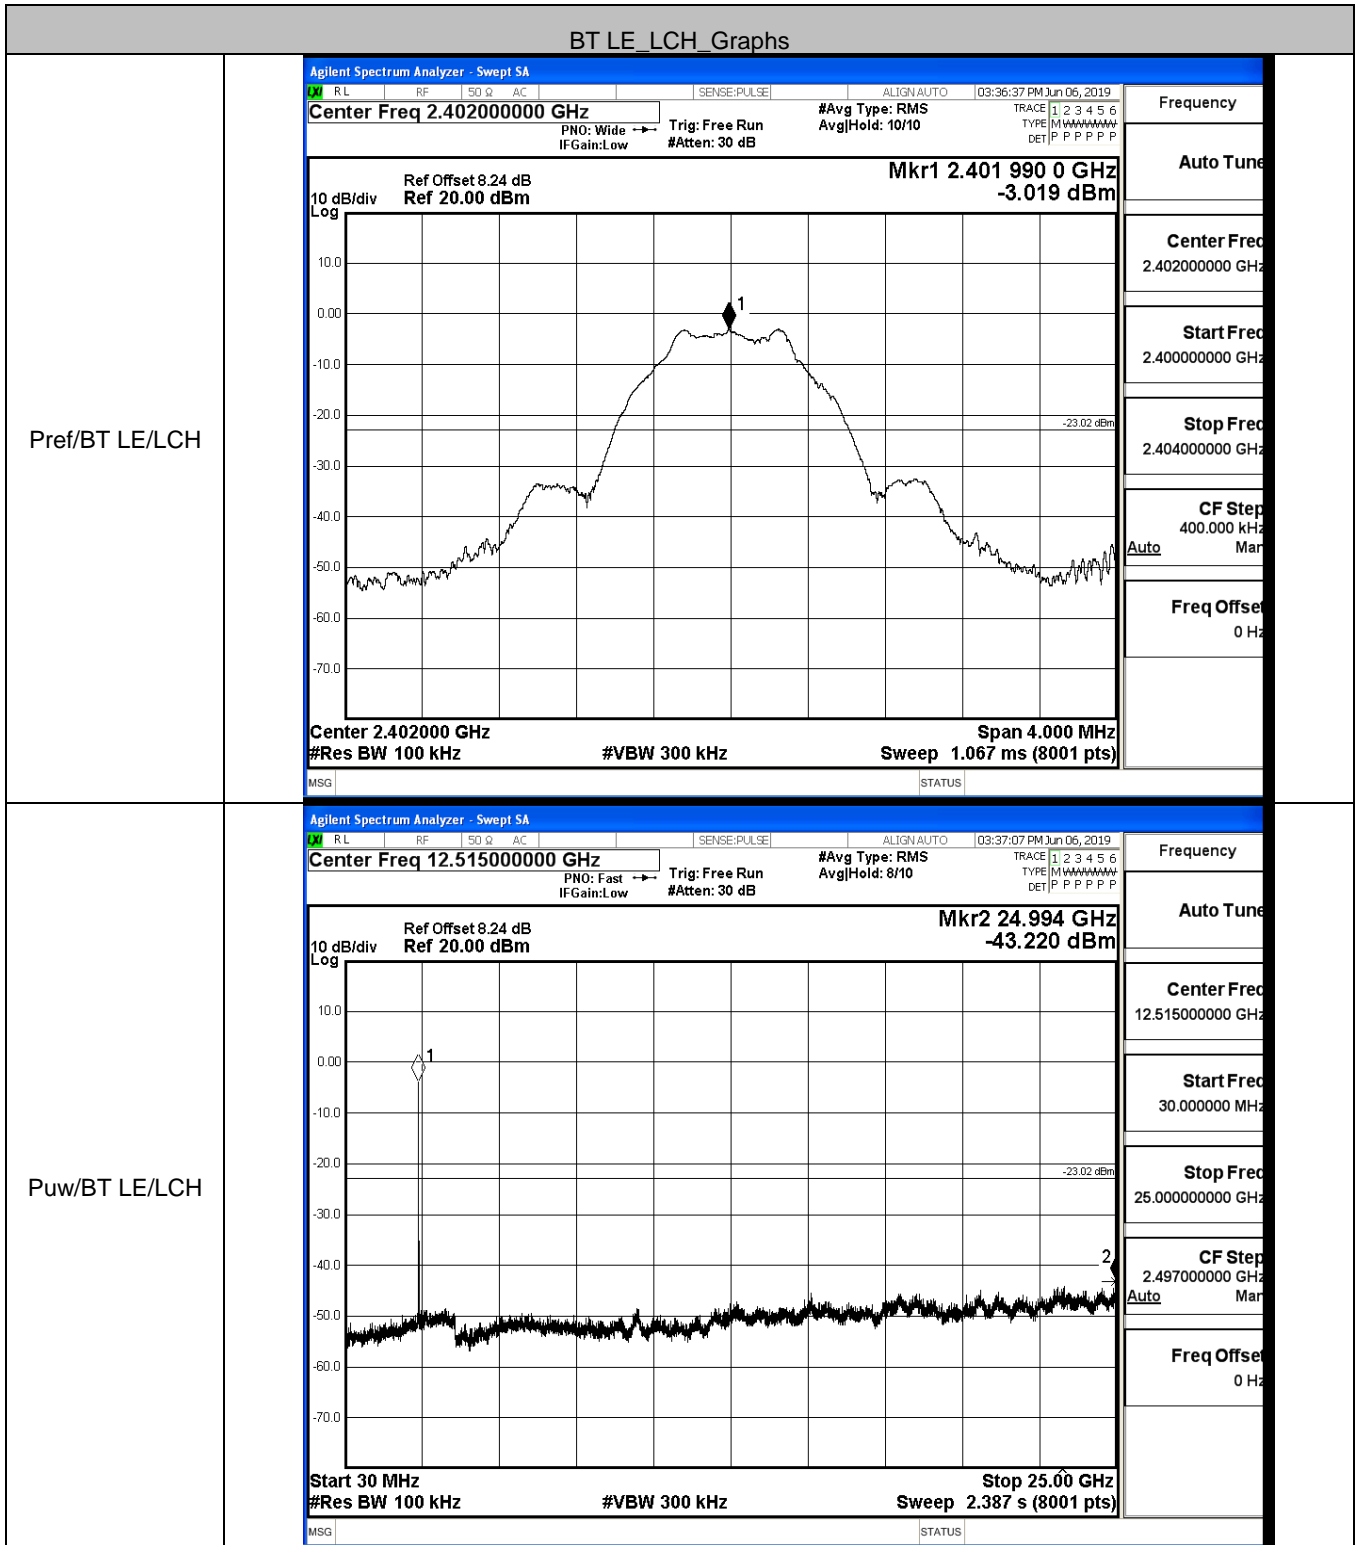




BT LE\_MCH\_Graphs

Pref/BT LE/MCH

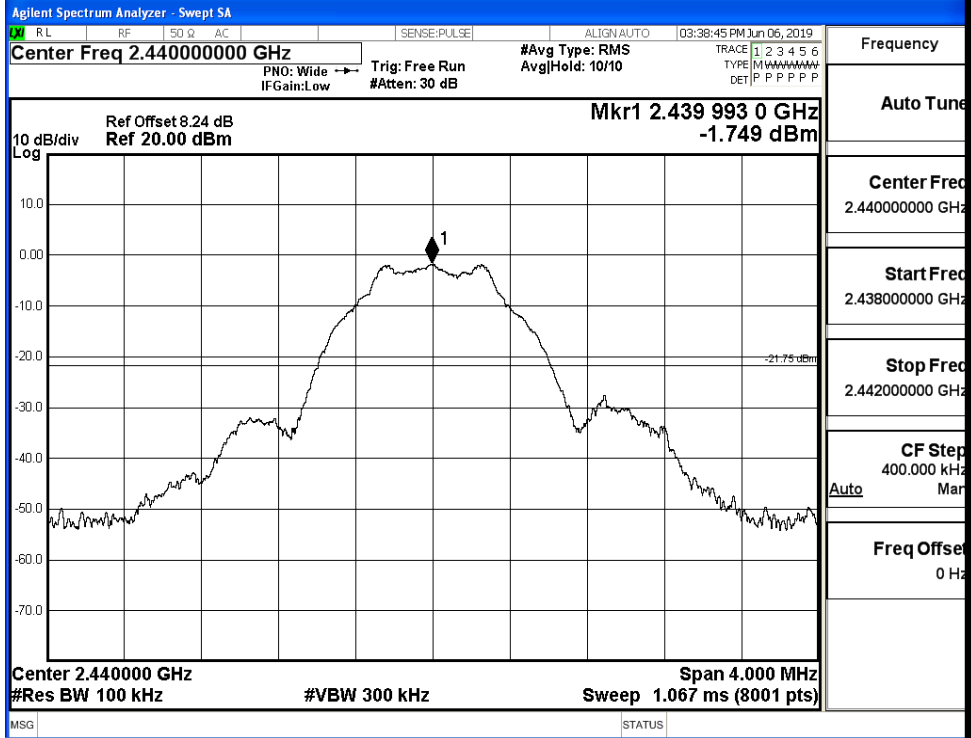


Puw/BT LE/MCH

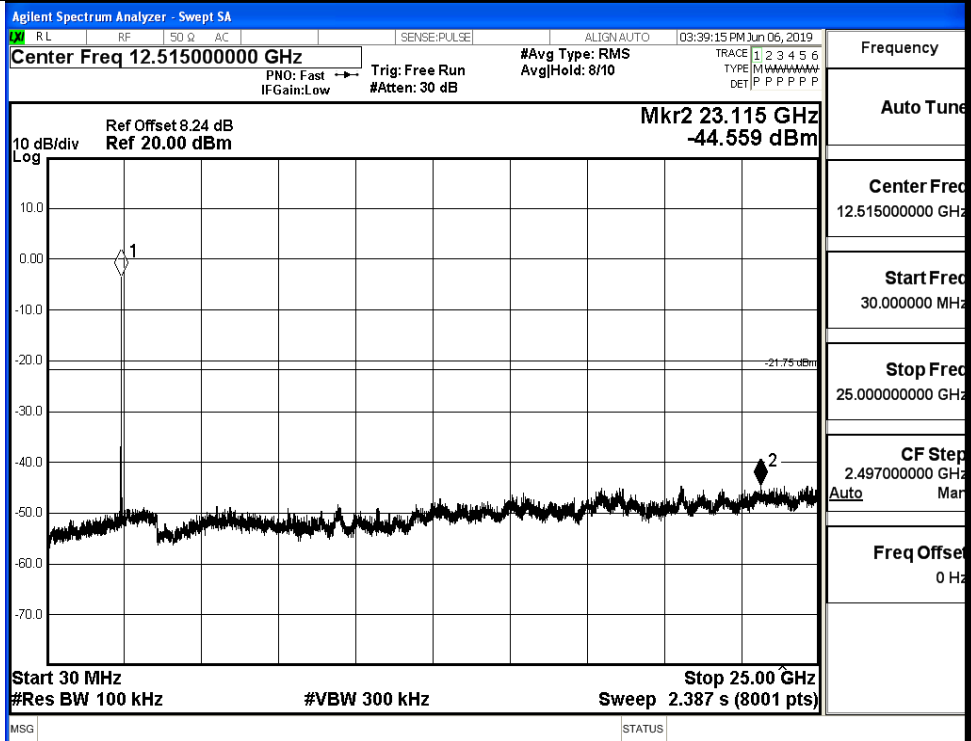


BT LE\_HCH\_Graphs

Pref/BT LE/HCH

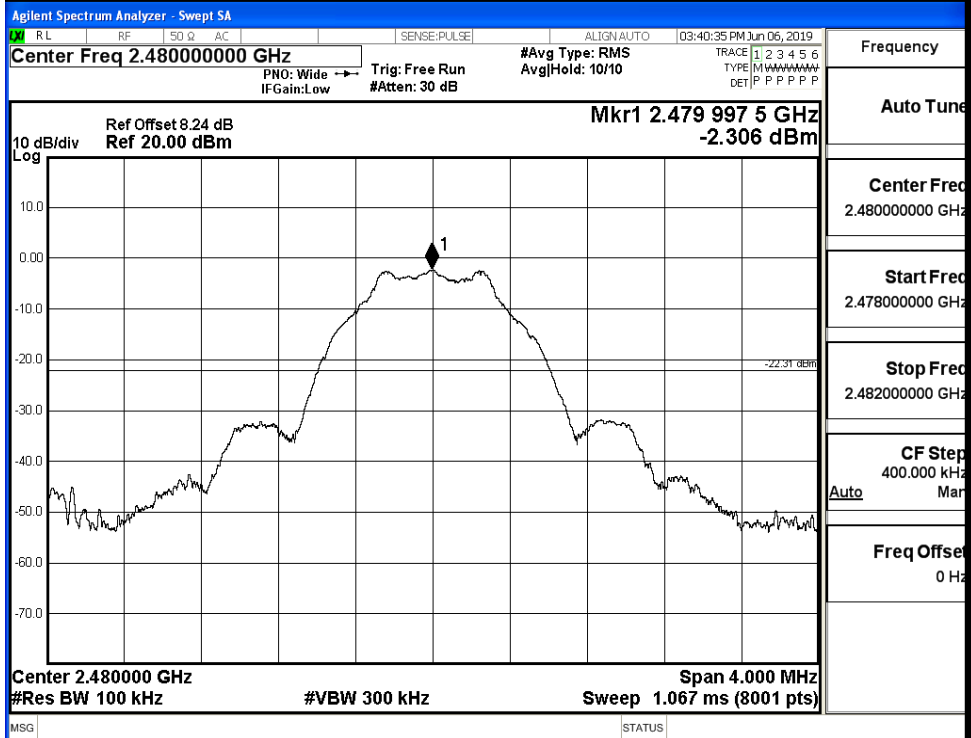

Puw/BT LE/HCH

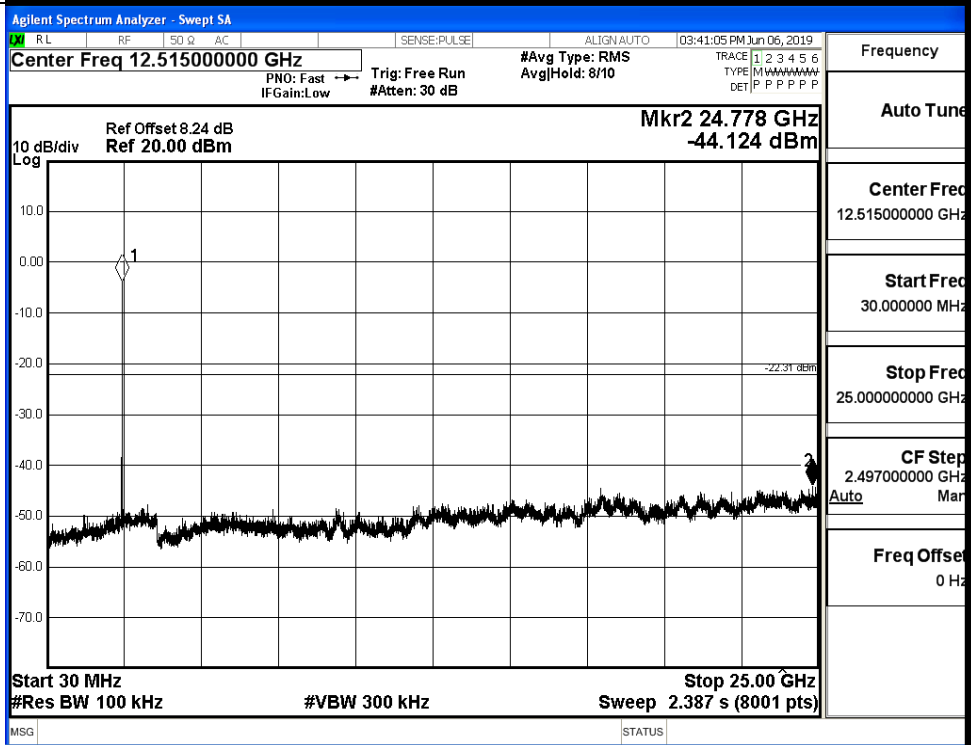

### A.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-2.880	-49.776	-22.88	PASS
BT LE	HCH	-2.131	-50.116	-22.13	PASS

Test Graphs

LCH

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.401 768 GHz	-2.880 dBm			
2	N	f		2.400 000 GHz	-50.615 dBm			
3	N	f		2.390 000 GHz	-54.612 dBm			
4	N	f		2.365 484 GHz	-49.776 dBm			

Frequency

Auto Tune

Center Freq  
2.35700000 GHz

Start Freq  
2.31000000 GHz

Stop Freq  
2.40400000 GHz

CF Step  
9.400000 MHz

Freq Offset  
0 Hz

HCH

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.480 249 50 GHz	-2.131 dBm			
2	N	f		2.483 500 00 GHz	-53.729 dBm			
3	N	f		2.500 000 00 GHz	-51.927 dBm			
4	N	f		2.490 254 00 GHz	-50.116 dBm			

Frequency

Auto Tune

Center Freq  
2.48900000 GHz

Start Freq  
2.47800000 GHz

Stop Freq  
2.50000000 GHz


CF Step  
2.200000 MHz

Freq Offset  
0 Hz


### A.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.36	2.34	0	54.24	PEAK	74	PASS
		Ant1	2310.0	-53.36	2.34	0	44.24	AV	54	PASS
		Ant1	2390.0	-43.78	2.34	0	53.82	PEAK	74	PASS
		Ant1	2390.0	-53.23	2.34	0	44.37	AV	54	PASS
	2480	Ant1	2483.5	-42.72	2.34	0	54.88	PEAK	74	PASS
		Ant1	2483.5	-52.89	2.34	0	44.71	AV	54	PASS
		Ant1	2500.0	-42.45	2.34	0	55.15	PEAK	74	PASS
		Ant1	2500.0	-52.82	2.34	0	44.78	AV	54	PASS


Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_PEAK

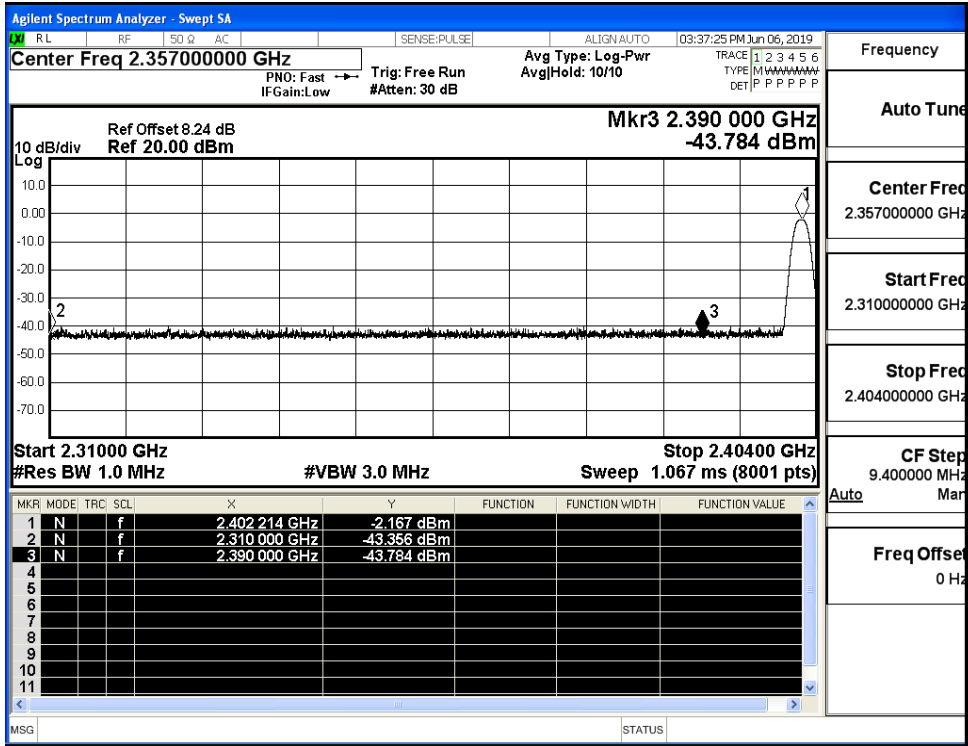

Restrict-band band-edge measurements\_BT LE\_2402\_Ant1\_AV

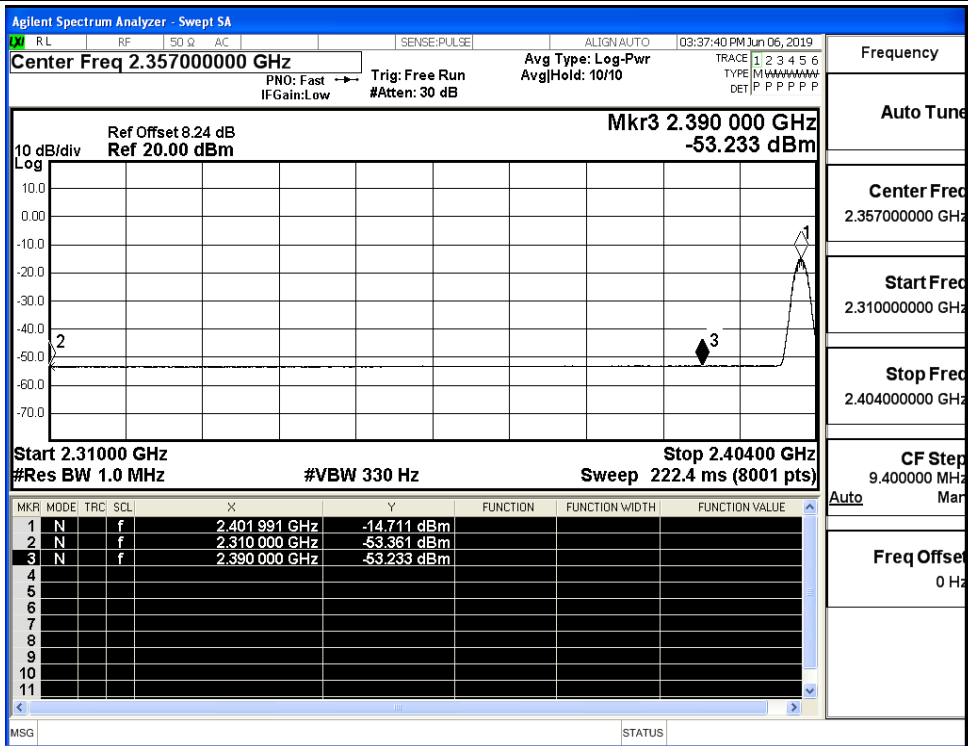

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_PEAK

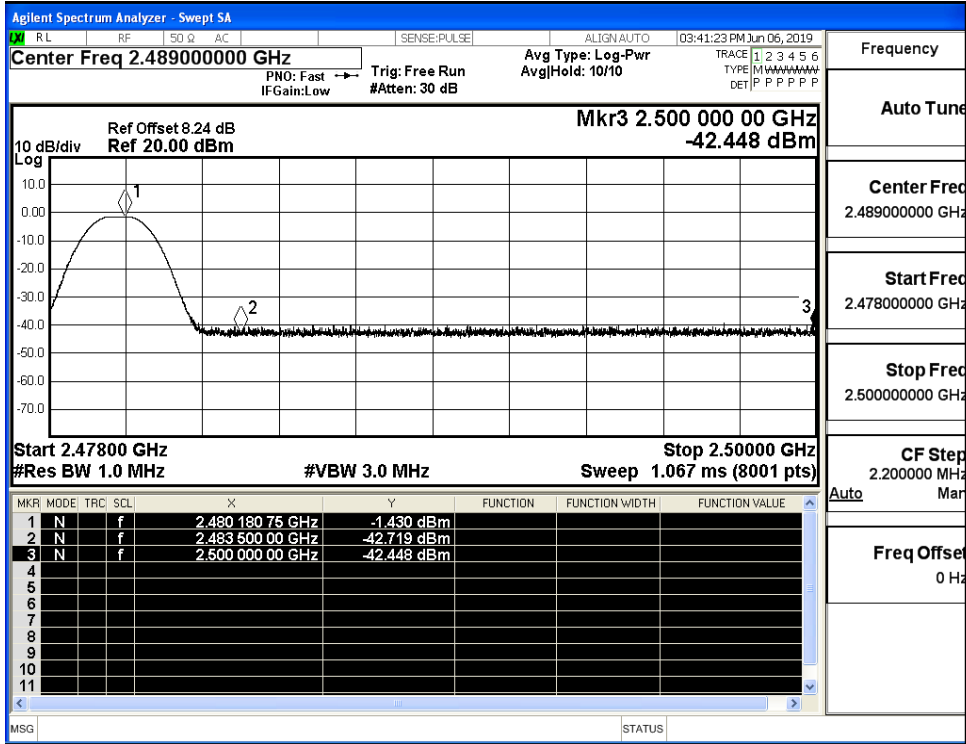

Restrict-band band-edge measurements\_BT LE\_2480\_Ant1\_AV

