

FCC REPORT

For LTE



Report No. : **CHTW24090012**

Report Verification:

Project No. : **SHT2407108402W**

FCC ID : **2ATTZ-SUNBEAM-F1**

Applicant : **Basic,Inc.**

Address : 17688 County Road 558, Memphis, Missouri, 63555, United States

Product Name : **Basic Feature Phone**

Trade Mark : Sunbeam

Model No. : F1

Listed Model(s) : -

Standard : **FCC CFR Title 47 Part 2**

FCC CFR Title 47 Part 27

Date of receipt of test sample : Aug. 01, 2024

Date of testing : Aug. 13, 2024

Date of issue : Sep. 05, 2024

Result : **Pass**

Compiled by

(position+printedname+signature)....: File administrators Xiaodong Zhao




Supervised by

(position+printedname+signature)....: Project Engineer Xiaodong Zhao



Approved by

(position+printedname+signature)....: RF Manager Xu Yang



Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : Building 7, Baiwang Idea Factory, No.1051, Songbai Road,
Yangguang Community, Xili Subdistrict, Nanshan District,
Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1. TEST STANDARDS AND REPORT VERSION</u>	3
1.1. Applicable Standards	3
1.2. Report version information	3
<u>2. TEST DESCRIPTION</u>	4
<u>3. SUMMARY</u>	5
3.1. Client Information	5
3.2. Product Description	5
3.3. Radio Specification Description	5
3.4. Testing Laboratory Information	6
<u>4. TEST CONFIGURATION</u>	7
4.1. Test frequency list	7
4.2. Test mode	7
4.3. Test sample information	8
4.4. Support unit used in test configuration and system	8
4.5. Testing environmental condition	8
4.6. Statement of the measurement uncertainty	9
4.7. Equipments Used during the Test	10
<u>5. TEST CONDITIONS AND RESULTS</u>	11
5.1. Conducted Output Power	11
5.2. Peak-to-Average Ratio	12
5.3. 99% Occupied Bandwidth & 26 dB Bandwidth	13
5.4. Band Edge	14
5.5. Conducted Spurious Emissions	15
5.6. Frequency stability VS Temperature measurement	16
5.7. Frequency stability VS Voltage measurement	17
5.8. ERP	18
5.9. Radiated Spurious Emission	19
<u>6. TEST SETUP PHOTOS OF THE EUT</u>	23
<u>7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	23
<u>8. APPENDIX REPORT</u>	23

1. **TEST STANDARDS AND REPORT VERSION**

1.1. **Applicable Standards**

The tests were performed according to following standards:

[FCC CFR Title 47 Part 2](#): Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

[FCC CFR Title 47 Part 27](#): Miscellaneous Wireless Communications Services

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. **Report version information**

Revision No.	Date of issue	Description
N/A	2024-09-05	Original

2. TEST DESCRIPTION

Section	Test Item	Section in CFR 47	Result #1	Test Engineer
5.1	Conducted Output Power	Part 2.1046 Part 27.50	Pass	Xiaodong Zhao
5.2	Peak-to-Average Ratio	Part 27.50	Pass	Xiaodong Zhao
5.3	99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 27.53	Pass	Xiaodong Zhao
5.4	Band Edge	Part 2.1051 Part 27.53	Pass	Xiaodong Zhao
5.5	Conducted Spurious Emissions	Part 2.1051 Part 27.53	Pass	Xiaodong Zhao
5.6	Frequency stability vs temperature	Part 2.1055(a)(1)(b) Part 27.54	Pass	Xiaodong Zhao
5.7	Frequency stability vs voltage	Part 2.1055(d)(1)(2) Part 27.54	Pass	Xiaodong Zhao
5.8	ERP	Part 27.50	Pass	Xiaodong Zhao
5.9	Radiated Spurious Emissions	Part 2.1053 Part 27.53	Pass	Yifan Wang

Note:

#1: The test result does not include measurement uncertainty value

3. SUMMARY

3.1. Client Information

Applicant:	Basic,Inc.
Address:	17688 County Road 558,Memphis, Missouri, 63555,United States
Manufacturer:	Basic,Inc.
Address:	17688 County Road 558,Memphis, Missouri, 63555,United States

3.2. Product Description

Main unit information:	
Product Name:	Basic Feature Phone
Trade Mark:	Sunbeam
Model No.:	F1
Listed Model(s):	-
Power supply:	DC 3.8V from Battery
Hardware version:	QS3912_MAINPCB_V1.0
Software version:	Sunbeam_F1_Pro_V1.0
Accessory unit information:	
Adapter information:	Model:EE-0501500 Input: 100-240V a.c., 50/60Hz, 0.5A Output: 5.0V d.c., 1.5A

3.3. Radio Specification Description

Support Operating Band:	<input checked="" type="checkbox"/> LTE Band 71			
Operating Frequency Range:	Please refer to note #2			
Channel bandwidth:	Please refer to note #3			
Uplink Modulation type:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input type="checkbox"/> 64QAM	<input type="checkbox"/> 256QAM
Downlink Modulation type:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input checked="" type="checkbox"/> 64QAM	<input type="checkbox"/> 256QAM
Antenna type:	FPC Antenna			
Antenna gain #4:	1.32dBi			

Note:

- : means that this feature is supported; : means that this feature is not supported
- #2: Operating frequency range is as follow:

LTE Band	Uplink frequency	Downlink frequency
LTE Band 71	665.5 – 695.5 MHz	619.9 – 649.5 MHz

- #3: Supported channel bandwidth is as follow:

LTE Band	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
LTE Band 71	-	-	√	√	√	√

√: means that this feature is supported; -: means that this feature is not supported

- #4: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, HTW lab has not verified the authenticity of its information

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

LTE Band 71		Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range	5	133147	665.5	68611	619.5		
	10	133172	668	68636	622		
	15	133197	670.5	68661	624.5		
	20	133222	673	68686	627		
Mid Range	5/10/15	133297	680.5	68761	634.5		
	20	133322	683	68786	637		
	5	133447	695.5	68911	649.5		
	10	133422	693	68886	647		
High Range	15	133397	690.5	68861	644.5		
	20	133372	688	68836	642		

4.2. Test mode

Test mode	Link mode
-----------	-----------

- 1) Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems and ANSI C63.26 with maximum output power.
- 2) Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Test configuration is as follow:

Test Items	Bandwidth	Modulation	RB #		
			1	Half	Full
Conducted Output Power	#5	#6	○	○	○
Peak-to-Average Ratio	#5	#6	○	-	○
99% Occupied Bandwidth & 26 dB Bandwidth	#5	#6	-	-	○
Band Edge	#5	#6	○	-	○
Conducted Spurious Emission	#5	#6	○	-	-
Frequency Stability	#5	#6	-	-	○
ERP and EIRP	#5	#6	○	○	○
Radiated Spurious Emission	#5	#6	○	-	-

Note:

- #5: Test all kind of bandwidth in section 3.3
- #6: Test all kind of uplink modulation in section 3.3
- ○: means that this configuration is chosen for testing
- -: means that this configuration is not tested.
- The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different bandwidth, modulations and RB size/offset in exploratory test. Subsequently, only the worst case emissions(highest bandwidth, QPSK, and 1RB0) are reported.

4.3. Test sample information

Test item	HTW sample no.
Conducted test items	Please refer to the description in the appendix report
Radiated test items	YPHT24071084002

Note:

Conducted test items: Conducted Output Power, Peak-Average Ratio, 99% Occupied Bandwidth & 26 dB Bandwidth, Band Edge, Conducted Spurious Emissions, Frequency stability, ERP and EIRP

Radiated test items: Radiated Spurious Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
<input checked="" type="checkbox"/> No				
Item	Equipment	Trade Name	Model No.	Other
1				
2				

4.5. Testing environmental condition

Voltage	VN=Nominal Voltage	DC 3.80V
	VL=Lower Voltage	DC 3.42V
	VH=Higher Voltage	DC 4.35V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30°C to + 50°C
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Conducted Output Power	0.66
2	Peak-to-Average Ratio	-
3	99% Occupied Bandwidth & 26 dB Bandwidth	0.002%
4	Band Edge	1.68dB
5	Conducted Spurious Emissions	1.68dB
6	Frequency stability	0.02ppm
7	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.7. Equipments Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2023/08/22	2024/08/21
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2023/08/25	2024/08/24
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A
●	T-Cock	Weinschel	HTWE0289	1580	SC329	2023/08/22	2024/08/21

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Climate chamber	ESPEC	HTWS0715	GPL-2	N/A	2023/08/21	2024/08/20
●	DC Power Supply	Gwinstek	HTWE0274	SPS-2415	GER835793	N/A	N/A

● Radiated Spurious Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2023/8/22	2024/8/21
●	Spectrum Analyzer	R&S	HTWE0385	N9020A	MY54486658	2023/8/22	2024/8/21
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2024/4/8	2027/4/7
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2023/2/20	2026/2/19
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2024/6/6	2025/6/5
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2024/6/6	2025/6/5
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2023/08/25	2024/08/24
●	High pass filter	Wainwright	HTWE0297	WHKX3.0/18G-10SS	38	2024/05/14	2025/05/13
●	Band Stop filter	-	HTWE0039	N/A	N/A	2024/01/25	2025/01/24


5. TEST CONDITIONS AND RESULTS

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

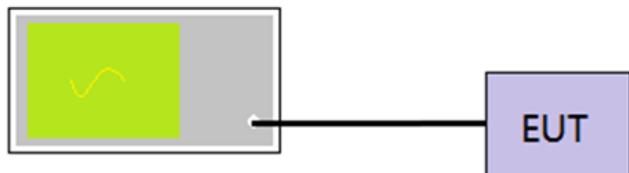

Communication Tester

TEST PROCEDURE

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.2. Peak-to-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

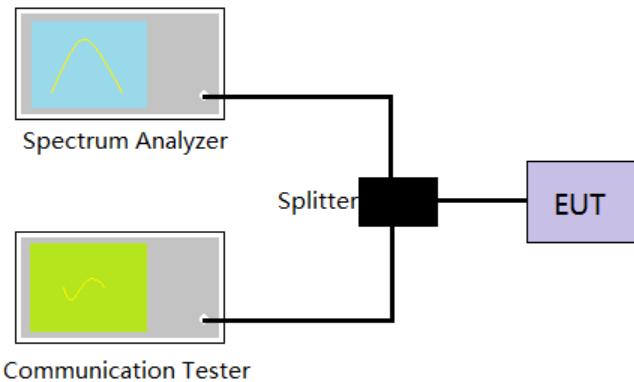

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.3. 99% Occupied Bandwidth & 26 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

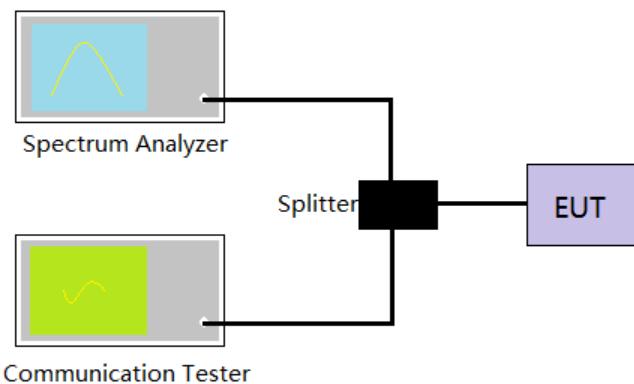

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of the anticipated OBW, VBW= 3 * RBW,
Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and 26dB bandwidth.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA

Refer to the appendix report


5.4. Band Edge

LIMIT

Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

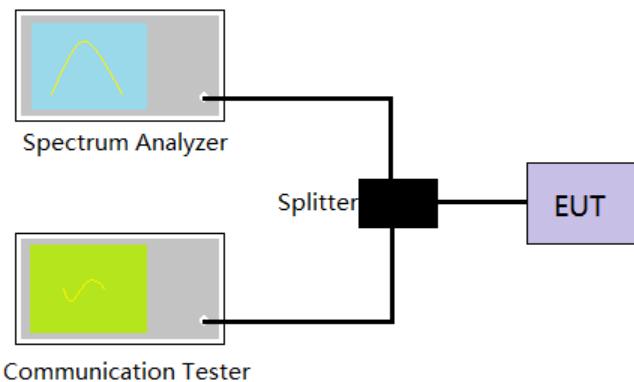

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW= no less than 1% of the OBW, VBW =3 * RBW, Sweep time= Auto
5. Record the test plot.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA

Refer to the appendix report


5.5. Conducted Spurious Emissions

LIMIT

Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

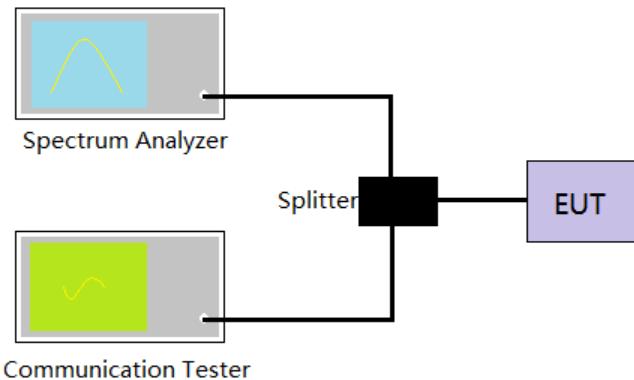

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.6. Frequency stability VS Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

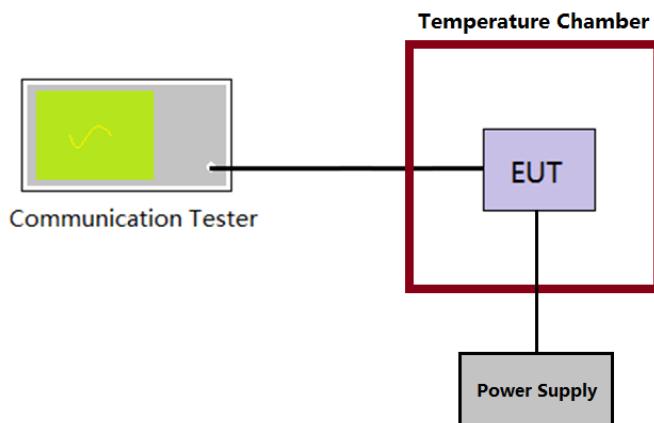

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.7. Frequency stability VS Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

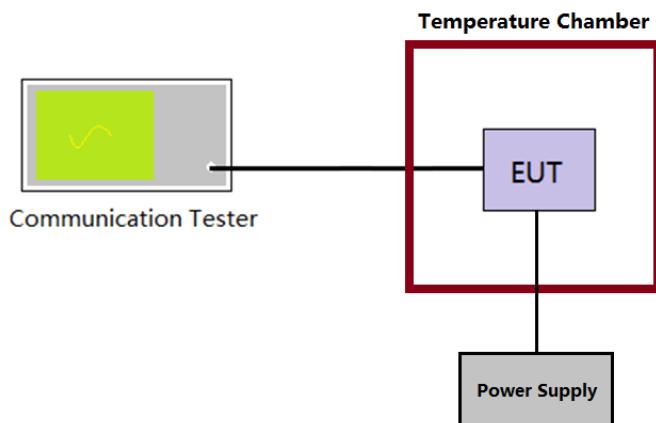

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT
5. Record the maximum frequency change.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed Not Applicable

TEST DATA

Refer to the appendix report

5.8. ERP

LIMIT

LTE Band 71: 3W(34.77dBm) ERP

TEST PROCEDURE

1. According to the power tested in section 5.1, select the maximum power in each mode, and use the following formula to calculate the corresponding ERP/EIRP.
2. $ERP = \text{conducted power} + \text{Gain(dBd)}$
3. $EIRP = \text{conducted power} + \text{Gain(dBi)}$
 $ERP = EIRP - 2.15$

TEST RESULTS

Passed Not Applicable

TEST DATA


Refer to the appendix report

5.9. Radiated Spurious Emission

LIMIT

LTE Band 71: -13dBm

TEST CONFIGURATION

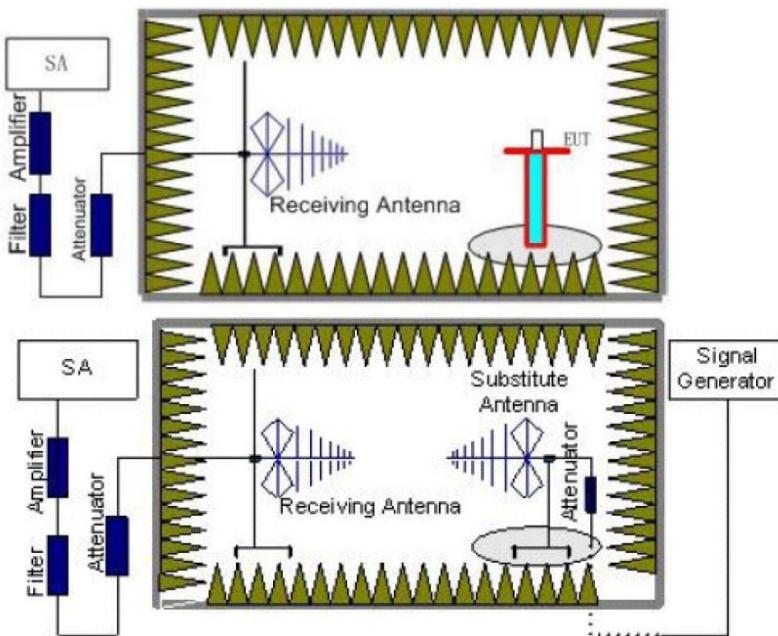

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near

as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$Pe = Ps(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBD)}$$
where
Pe = equivalent emission power in dBm
Ps = source (signal generator) power in dBm
NOTE—dBD refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBD)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

Passed **Not Applicable**

Note: only show the worse case for QPSK modulation.

LTE Band 71										
Test channel:		Low			Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	48.65	-92.64	24.05	1.28	0.00	-67.31	-13.00	-54.31	Peak	
2	442.69	-94.47	26.01	4.16	0.00	-64.30	-13.00	-51.30	Peak	
3	1750.70	-54.34	36.54	3.43	41.40	-55.77	-13.00	-42.77	Peak	
4	2003.57	-56.90	39.14	3.67	41.25	-55.34	-13.00	-42.34	Peak	
5	2500.25	-54.01	39.27	4.20	41.02	-51.56	-13.00	-38.56	Peak	
6	3003.17	-59.78	41.05	4.54	40.95	-55.14	-13.00	-42.14	Peak	

Test channel:		Low			Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	95.03	-96.11	25.82	1.83	0.00	-68.46	-13.00	-55.46	Peak	
2	426.61	-95.14	25.45	4.08	0.00	-65.61	-13.00	-52.61	Peak	
3	2003.57	-52.64	38.37	3.67	41.25	-51.85	-13.00	-38.85	Peak	
4	2500.25	-56.81	39.23	4.20	41.02	-54.40	-13.00	-41.40	Peak	
5	3003.17	-60.05	41.03	4.54	40.95	-55.43	-13.00	-42.43	Peak	
6	4996.69	-64.20	44.50	6.00	40.20	-53.90	-13.00	-40.90	Peak	

Test channel:		Mid			Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	58.53	-94.08	24.39	1.40	0.00	-68.29	-13.00	-55.29	Peak	
2	423.47	-93.25	25.99	4.06	0.00	-63.20	-13.00	-50.20	Peak	
3	1663.80	-51.11	36.21	3.36	41.46	-53.00	-13.00	-40.00	Peak	
4	2029.23	-51.80	39.39	3.70	41.20	-49.91	-13.00	-36.91	Peak	
5	2500.25	-57.34	39.27	4.20	41.02	-54.89	-13.00	-41.89	Peak	
6	5747.59	-64.82	43.93	6.67	39.36	-53.58	-13.00	-40.58	Peak	

Test channel:		Mid			Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	101.94	-95.76	25.49	1.89	0.00	-68.38	-13.00	-55.38	Peak	
2	393.27	-94.01	25.11	3.91	0.00	-64.99	-13.00	-51.99	Peak	
3	1750.70	-53.60	36.36	3.43	41.40	-55.21	-13.00	-42.21	Peak	
4	2029.23	-47.76	38.83	3.70	41.20	-46.43	-13.00	-33.43	Peak	
5	2500.25	-54.11	39.23	4.20	41.02	-51.70	-13.00	-38.70	Peak	
6	4996.69	-62.26	44.50	6.00	40.20	-51.96	-13.00	-38.96	Peak	

Test channel:		High			Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	45.69	-96.37	25.25	1.24	0.00	-69.88	-13.00	-56.88	Peak	
2	426.61	-94.92	26.00	4.08	0.00	-64.84	-13.00	-51.84	Peak	
3	2060.46	-59.99	39.69	3.74	41.14	-57.70	-13.00	-44.70	Peak	
4	2500.25	-57.60	39.27	4.20	41.02	-55.15	-13.00	-42.15	Peak	
5	2995.54	-61.67	41.03	4.53	40.95	-57.06	-13.00	-44.06	Peak	
6	5956.11	-66.04	44.43	6.70	39.24	-54.15	-13.00	-41.15	Peak	

Test channel:		High			Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark	
1	87.92	-95.17	24.98	1.76	0.00	-68.43	-13.00	-55.43	Peak	
2	436.19	-94.22	25.57	4.13	0.00	-64.52	-13.00	-51.52	Peak	
3	1750.70	-53.63	36.36	3.43	41.40	-55.24	-13.00	-42.24	Peak	
4	2500.25	-54.87	39.23	4.20	41.02	-52.46	-13.00	-39.46	Peak	
5	4996.69	-62.96	44.50	6.00	40.20	-52.66	-13.00	-39.66	Peak	
6	7319.96	-65.72	48.61	7.63	39.82	-49.30	-13.00	-36.30	Peak	

6. TEST SETUP PHOTOS OF THE EUT

Refer to the test report No.: CHTW24090011

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refer to the test report No.: CHTW24090011

8. APPENDIX REPORT