


TESTREPORT

Applicant Name : SHENZHEN COBAN ELECTRONICS CO., LTD
Address : 5/F, Block 22, Wisdomland Business Park, Guankou 2nd Road, Nantou, Nanshan District, Shenzhen, Guangdong, China.518052
Report Number: RA230525-29331E-RF-00A
FCC ID: 2ATUK-BN-405

Test Standard (s)
FCC Part 15.247

Sample Description

Product: GPS TRACKER
405, 405ABCD, 405A, 405B, 405C, 405D, GPS-405,
Model No.: GPS-405ABCD, GPS-405A, GPS-405B, GPS-405C, GPS-405D, BN-405, BN-405ABCD, BN-405A, BN-405B, BN-405C, BN-405D
Trade Name: BAANOOOL, 
Date Received: 2023-05-25
Date of Test: 2023-06-03 to 2023-06-26
Report Date: 2023-07-04

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Amanda Wei

Amanda Wei
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".
Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE.....	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1307 (b) – RF EXPOSURE	11
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CALCULATION	16
TEST DATA	16
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(d) - 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(e) - POWER SPECTRAL DENSITY	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26

APPENDIX A: 6dB Emission Bandwidth	27
APPENDIX B: Occupied Channel Bandwidth	31
APPENDIX C: Maximum Conducted Output Power	35
APPENDIX D: Band Edge Measurements.....	36
APPENDIX E: Maximum Power Spectral Density	39
APPENDIX F: Duty Cycle.....	43
TEST DATA	43

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230525-29331E-RF-00A	Original Report	2023-07-04

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Type	GPS TRACKER		
Tested Model	405		
Multiple Model	405ABCD, 405A, 405B, 405C, 405D, GPS-405, GPS-405ABCD, GPS-405A, GPS-405B, GPS-405C, GPS-405D, BN-405, BN-405ABCD, BN-405A, BN-405B, BN-405C, BN-405D		
Model Difference	Please refer to DOS letter		
Frequency Range	Wi-Fi: 2412-2462MHz (802.11b/g/n20)		
Maximum Conducted AV Power	Wi-Fi:		
	12.92dBm(802.11b)	10.46dBm(802.11g)	10.73dBm(802.11n20)
Modulation Technique	Wi-Fi: DSSS, OFDM		
Antenna Specification*	Internal Antenna: 1.72dBi(provided by the applicant)		
Voltage Range	DC 12-24V from Car Power or DC3.7V from built-in battery		
Sample serial number	268I-1 (RF Radiated Test), 268I-2 (RF Conducted Test) (Assigned by ATC, Shenzhen)		
Sample/EUT Status	Good condition		

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz- 18GHz	4.96dB
	18GHz- 26.5GHz	5.16dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, and 802.11n-HT20, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Software “RF tuning tool V2.2.3”* was used during testing and power level as below:

Mode	Data Rate	Power Level*
802.11 b	1Mbps	Default
802.11 g	1Mbps	Default
802.11 n20	MCS0	Default

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

Duty cycle

Test Result: Compliant. Please refer to the Appendix F

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	ThinkPad X240	SL10F31638JS

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	2.6	Notebook	EUT

Block Diagram of Test Setup

For Radiated Emission:

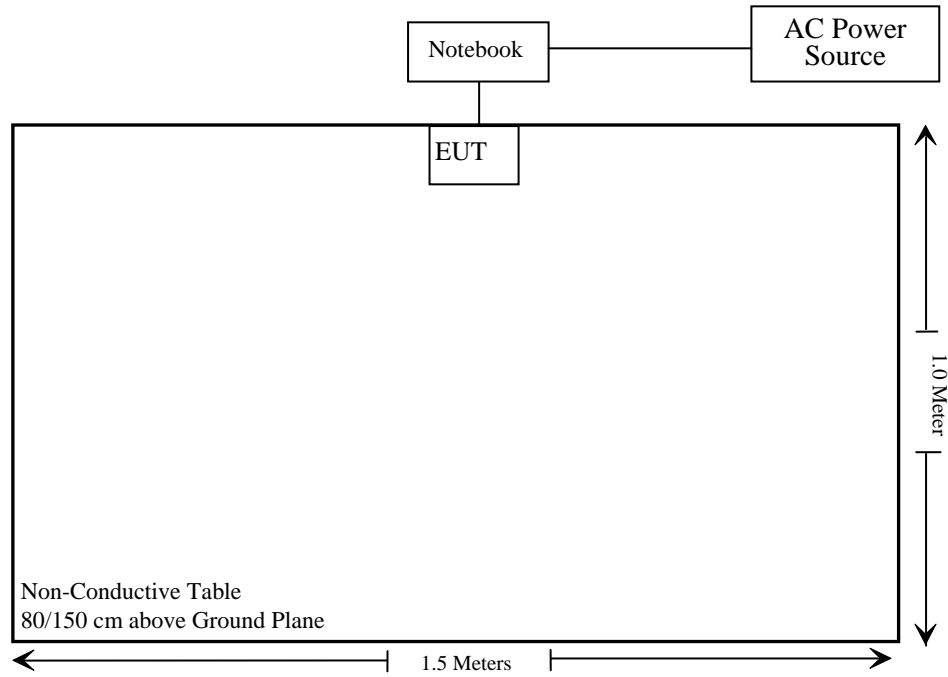

Note: the support table edge was flush with the center of turntable.

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307(b)	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth& Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Note: The device is intended for vehicle use.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Wainwright	Band Reject Filter	WRCG2400/2 485-2375/251 0-60/11SS	10	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Radiated Emission Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2022/11/25	2023/11/24
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2022/11/25	2023/11/24
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/6/27	2023/06/26
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) – RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Test result

For worst case:

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	MPE-Based Exemption Threshold (mW)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2462	13.0	19.95	1.72	-0.43	12.57	18.07	20	768
GSM850	824-849	27.5	562.34	-0.04	-2.19	25.31	339.63	20	422
PCS1900	1850-1910	25.0	316.23	0.50	-1.65	23.35	216.27	20	768
WCDMA B2	1850-1910	23.0	199.53	0.50	-1.65	21.35	136.46	20	768
WCDMA B5	824-849	23.0	199.53	-0.04	-2.19	20.81	120.50	20	422
LTE B2	1850-1910	23.0	199.53	0.50	-1.65	21.35	136.46	20	768
LTE B4	1710-1755	23.5	223.87	-1.10	-3.25	20.25	105.93	20	768
LTE B5	824-849	23.0	199.53	-0.04	-2.19	20.81	120.50	20	422
LTE B7	2500-2570	24.0	251.19	0.60	-1.55	22.45	175.79	20	768
LTE B40	2305-2315	23.5	223.87	0.62	-1.53	21.97	157.40	20	768
	2350-2360	23.5	223.87	0.62	-1.53	21.97	157.40	20	768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: For GSM/GPRS/EDGE, the time base average power as below:

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB

GSM850:

Mode	Frequency (MHz)	Conducted Output Power (dBm)				Time based average power (dBm)			
		1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots
GSM	824.2	32.71	/	/	/	23.71	/	/	/
	836.6	32.66	/	/	/	23.66	/	/	/
	848.8	32.60	/	/	/	23.60	/	/	/
GPRS	824.2	32.75	31.88	30.98	30.13	23.75	25.88	26.73	27.13
	836.6	32.51	31.32	30.16	29.15	23.51	25.32	25.91	26.15
	848.8	32.55	31.56	30.22	29.06	23.55	25.56	25.97	26.06
EDGE	824.2	26.53	25.36	24.14	23.02	17.53	19.36	19.89	20.02
	836.6	26.59	25.52	24.48	23.37	17.59	19.52	20.23	20.37
	848.8	26.70	25.33	24.48	23.43	17.70	19.33	20.23	20.43

PCS1900:

Mode	Frequency (MHz)	Conducted Output Power (dBm)				Time based average power (dBm)			
		1 slot	2 slots	3 slots	4 slots	1 slot	2 slots	3 slots	4 slots
GSM	1850.2	30.36	/	/	/	21.36	/	/	/
	1880.0	30.57	/	/	/	21.57	/	/	/
	1909.8	30.49	/	/	/	21.49	/	/	/
GPRS	1850.2	30.42	29.26	28.21	27.28	21.42	23.26	23.96	24.28
	1880.0	30.58	29.7	28.72	27.55	21.58	23.70	24.47	24.55
	1909.8	30.5	29.23	28.23	27.08	21.50	23.23	23.98	24.08
EDGE	1850.2	25.82	24.37	23.21	22.26	16.82	18.37	18.96	19.26
	1880.0	25.85	24.87	24.00	22.85	16.85	18.87	19.75	19.85
	1909.8	25.92	25.01	23.98	22.95	16.92	19.01	19.73	19.95

Simultaneous transmitting consideration:

The ratio= $ERP_{Wi-Fi}/limit + ERP_{WWAN}/limit = 18.07/768 + 339.63/422 = 0.83 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Antenna Connector Construction

The EUT has one internal antenna arrangement for 2.4G Wi-Fi, which was permanently attached and the antenna gain is 1.72 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

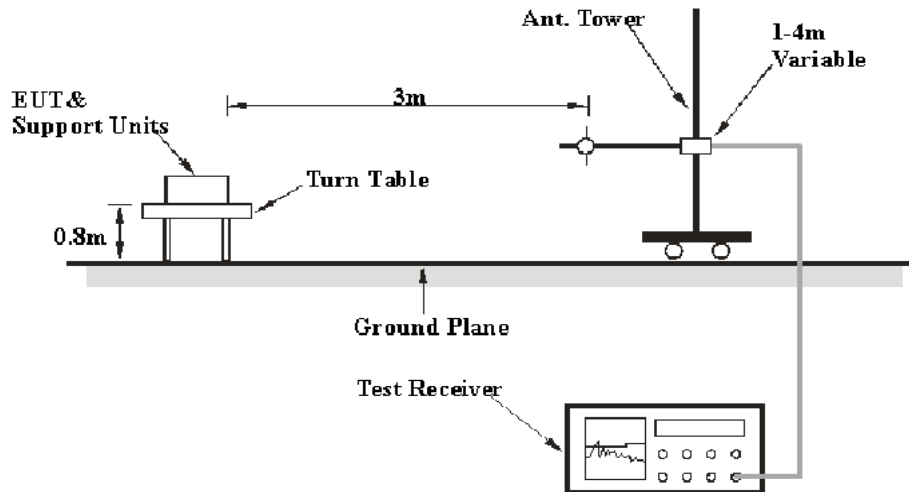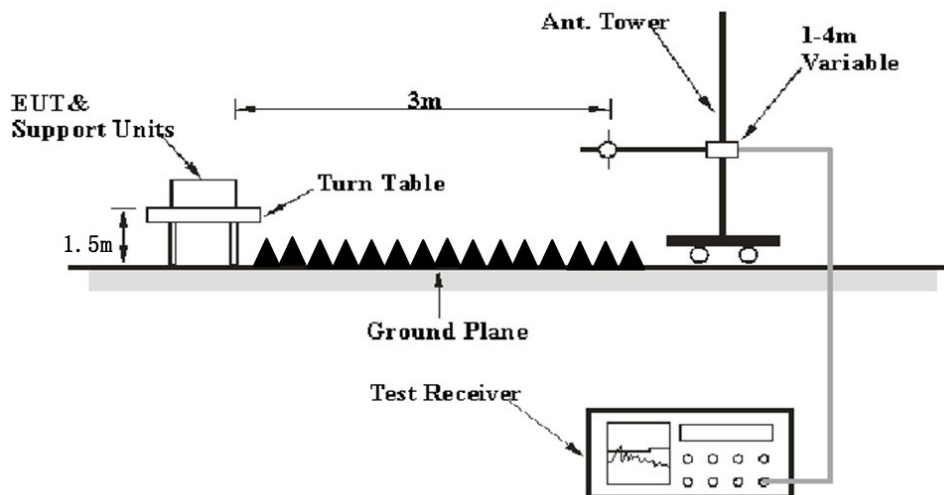EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23-26 °C
Relative Humidity:	46-51 %
ATM Pressure:	101.0 kPa

The Below 1GHz testing was performed by Jason Liu on 2023-06-08.


The Above 1GHz testing was performed by Jeef Huang on 2023-06-08 and 2023-06-13.

EUT operation mode: 2.4G Wi-Fi Transmitting (Pre-scanned in X, Y, and Z axis directions, and the worst-case axis direction was photo and recorded)

30MHz-1GHz:

802.11 g High Channel


Horizontal

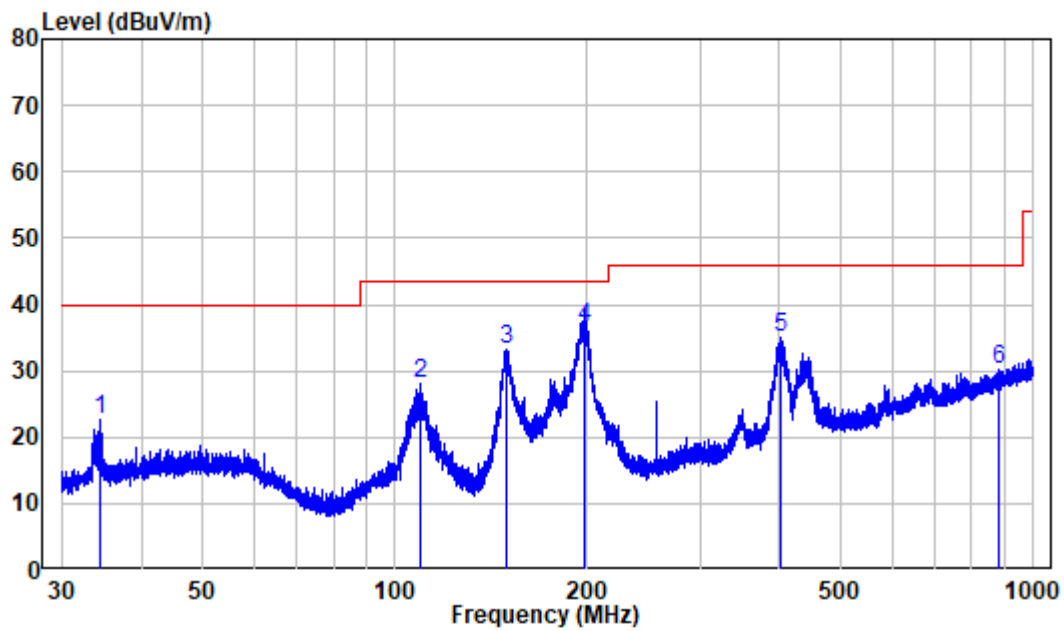

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230525-29331E-RF
 Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.487	-11.73	34.28	22.55	40.00	-17.45	Peak
2	109.460	-11.99	40.07	28.08	43.50	-15.42	Peak
3	149.028	-15.30	48.42	33.12	43.50	-10.38	Peak
4	197.806	-11.64	48.20	36.56	43.50	-6.94	QP
5	402.544	-6.31	41.20	34.89	46.00	-11.11	Peak
6	885.279	1.33	28.90	30.23	46.00	-15.77	Peak

Vertical

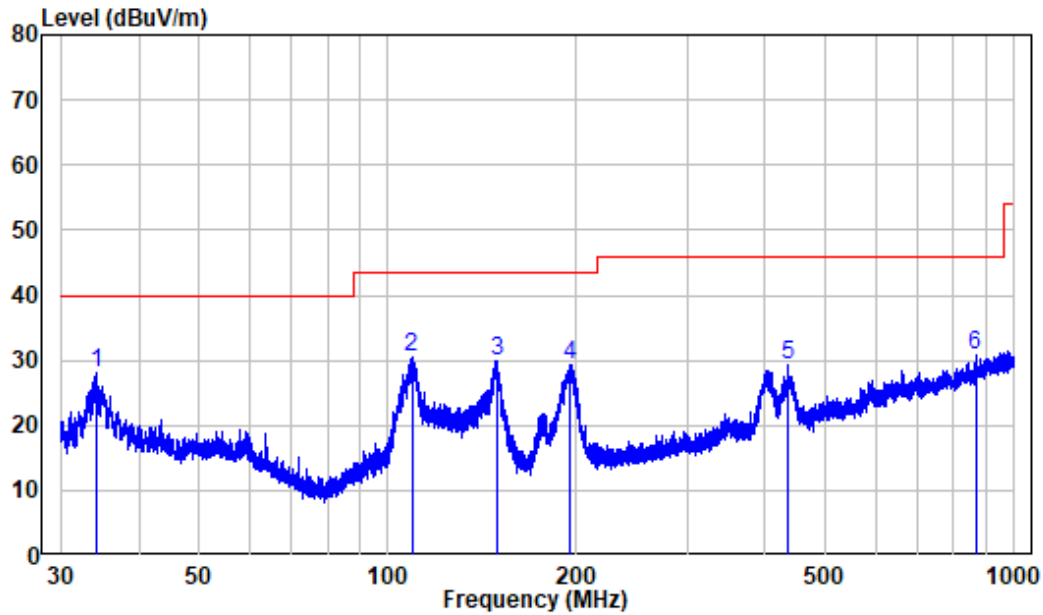

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230525-29331E-RF
 Test Mode: 2.4G WIFI Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.261	-11.80	39.87	28.07	40.00	-11.93	Peak
2	109.124	-11.99	42.54	30.55	43.50	-12.95	Peak
3	149.355	-15.28	45.27	29.99	43.50	-13.51	Peak
4	195.137	-11.52	40.87	29.35	43.50	-14.15	Peak
5	435.399	-5.38	34.71	29.33	46.00	-16.67	Peak
6	866.848	1.09	29.71	30.80	46.00	-15.20	Peak

1-25 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	55.58	PK	32	1.1	H	-10.32	45.26	74	-28.74
2310	54.93	PK	157	1.9	V	-10.32	44.61	74	-29.39
2390	55.65	PK	204	1.9	H	-10.62	45.03	74	-28.97
2390	55.84	PK	265	1.3	V	-10.62	45.22	74	-28.78
4824	48.02	PK	340	2.0	H	-5.55	42.47	74	-31.53
4824	46.78	PK	108	2.1	V	-5.55	41.23	74	-32.77
802.11B, Middle Channel									
4874	47.58	PK	160	1.9	H	-5.29	42.29	74	-31.71
4874	48.61	PK	185	2.0	V	-5.29	43.32	74	-30.68
802.11B, High Channel									
2483.5	56.6	PK	119	1.3	H	-10.46	46.14	74	-27.86
2483.5	58.62	PK	145	1.9	V	-10.46	48.16	74	-25.84
2500	56.15	PK	328	1.8	H	-10.46	45.69	74	-28.31
2500	55.7	PK	315	1.5	V	-10.46	45.24	74	-28.76
4924	51.65	PK	281	1.4	H	-5.03	46.62	74	-27.38
4924	50.36	PK	220	2.0	V	-5.03	45.33	74	-28.67
802.11G, Low Channel									
2310	55.23	PK	160	1.1	H	-10.32	44.91	74	-29.09
2310	55.29	PK	37	2.2	V	-10.32	44.97	74	-29.03
2390	56.43	PK	186	1.3	H	-10.62	45.81	74	-28.19
2390	56.81	PK	256	1.2	V	-10.62	46.19	74	-27.81
4824	46.1	PK	328	1.5	H	-5.55	40.55	74	-33.45
4824	46.84	PK	319	1.3	V	-5.55	41.29	74	-32.71
802.11G, Middle Channel									
4874	45.86	PK	91	1.4	H	-5.29	40.57	74	-33.43
4874	46.19	PK	175	2.1	V	-5.29	40.90	74	-33.10
802.11G, High Channel									
2483.5	61.62	PK	175	2.1	H	-10.46	51.16	74	-22.84
2483.5	63.11	PK	48	2.2	V	-10.46	52.65	74	-21.35
2500	54.77	PK	215	1.2	H	-10.46	44.31	74	-29.69
2500	56.68	PK	215	1.2	V	-10.46	46.22	74	-27.78
4924	46.24	PK	149	1.8	H	-5.03	41.21	74	-32.79
4924	46.73	PK	228	2.0	V	-5.03	41.70	74	-32.30

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N20, Low Channel									
2310	55.71	PK	138	1.8	H	-10.32	45.39	74	-28.61
2310	56.44	PK	81	1.3	V	-10.32	46.12	74	-27.88
2390	57.83	PK	351	1.8	H	-10.62	47.21	74	-26.79
2390	58.8	PK	244	2.2	V	-10.62	48.18	74	-25.82
4824	48.27	PK	194	1.9	H	-5.55	42.72	74	-31.28
4824	47.84	PK	243	1.3	V	-5.55	42.29	74	-31.71
802.11N20, Middle Channel									
4874	47.68	PK	312	1.4	H	-5.29	42.39	74	-31.61
4874	47.18	PK	78	1.0	V	-5.29	41.89	74	-32.11
802.11N20, High Channel									
2483.5	67.4	PK	237	1.0	H	-10.46	56.94	74	-17.06
2483.5	52.02	AV	214	1.3	H	-10.46	41.56	54	-12.44
2483.5	69.75	PK	254	2.0	V	-10.46	59.29	74	-14.71
2483.5	52.54	AV	171	2.2	V	-10.46	42.08	54	-11.92
2500	56.66	PK	226	1.1	H	-10.46	46.20	74	-27.80
2500	55.57	PK	226	1.1	V	-10.46	45.11	74	-28.89
4924	47.91	PK	339	1.2	H	-5.03	42.88	74	-31.12
4924	49.35	PK	14	1.6	V	-5.03	44.32	74	-29.68

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude – Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


1-18 GHz (Pre-scan plots):

802.11B High Channel (Worst case)

Horizontal

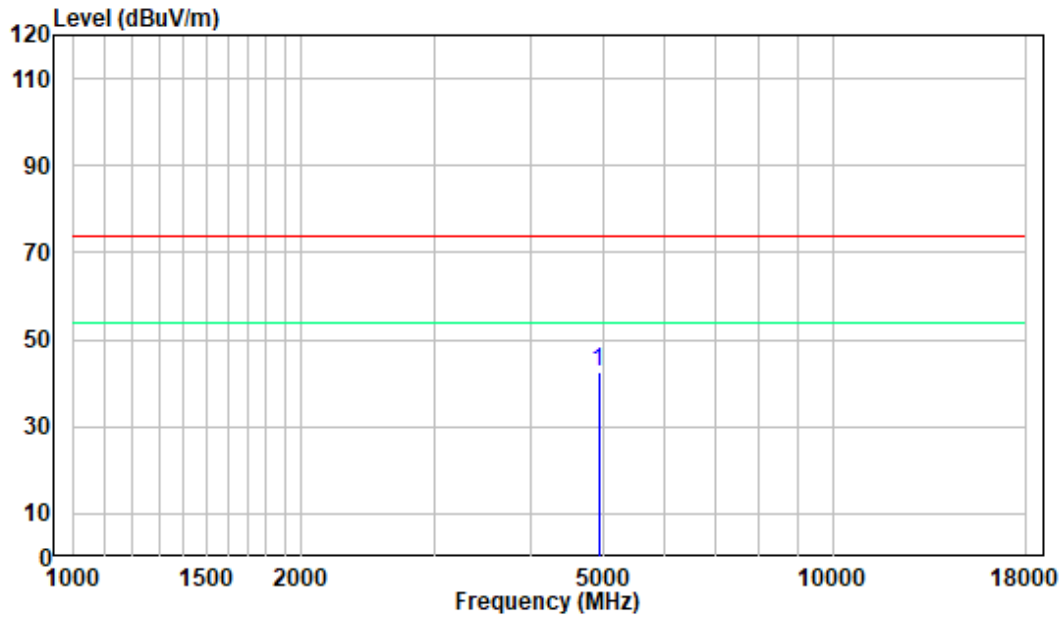


Vertical

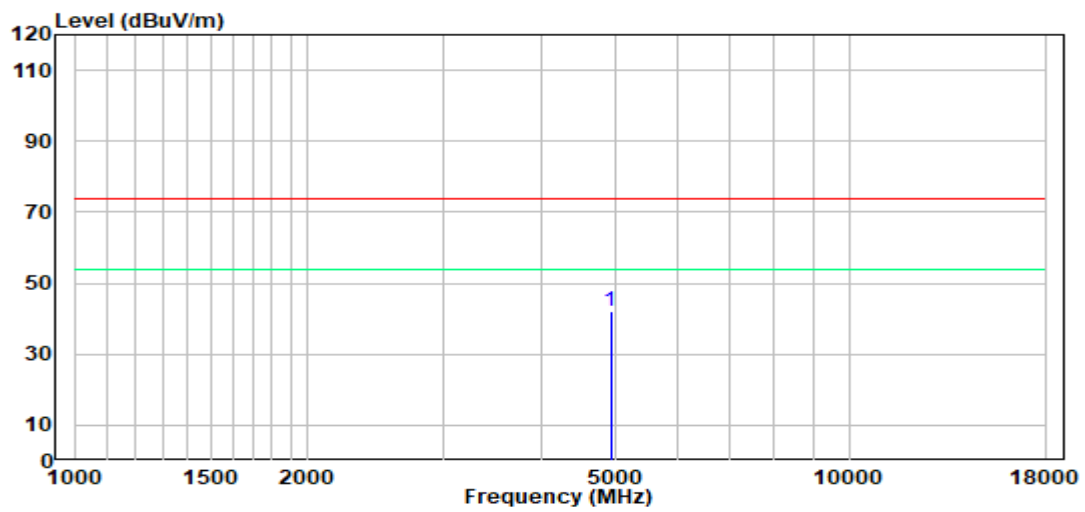


18 -25GHz (Pre-scan plots):

802.11B High Channel (Worst case)

Horizontal

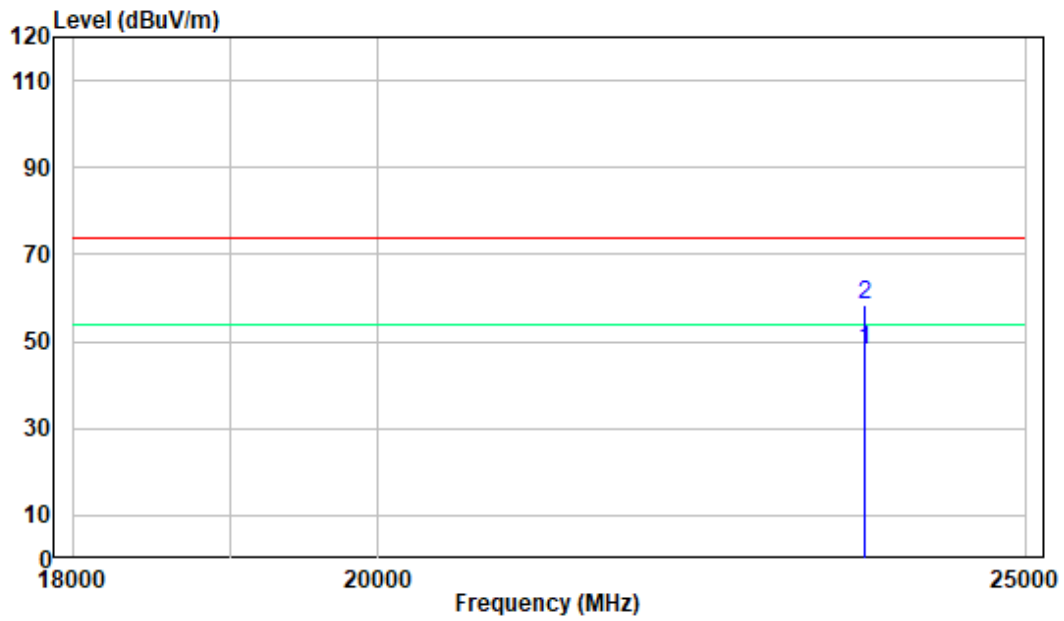

Vertical

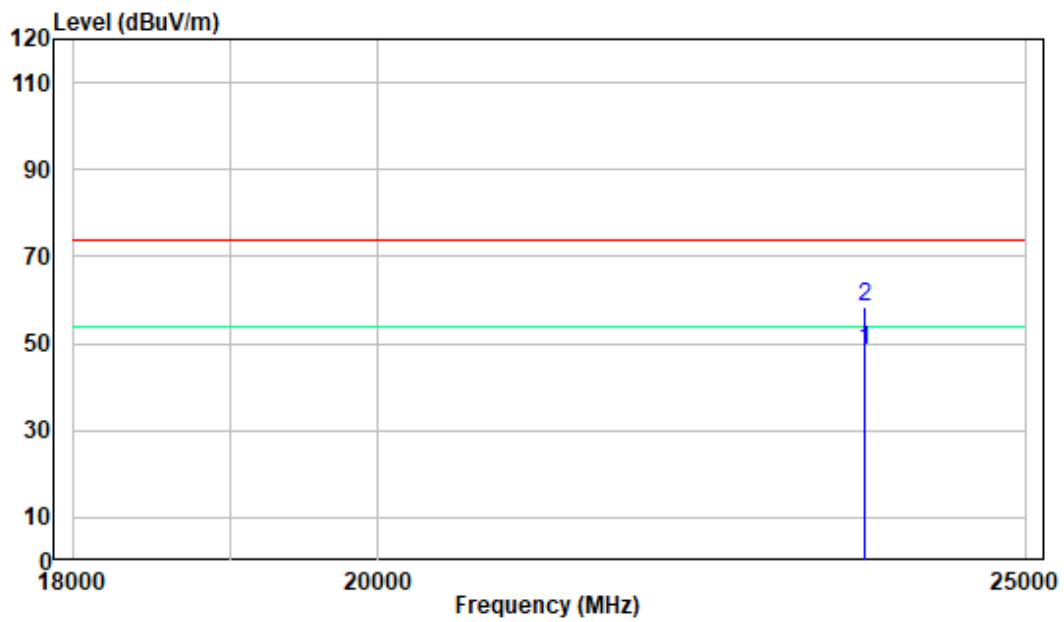

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013, section 11.8 and section 6.9

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-10.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix A and Appendix B.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013, section 11.9.2.3.2

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-10.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix C.

FCC §15.247(d) - 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013, section 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-10.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix D.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013, section 11.10.5

Method AVGPSD-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.

- a) Measure the duty cycle (D) of the transmitter output signal as described in 11.6 of ANSI C63.10-2013.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq [3 \times \text{RBW}]$.
- f) Detector = power averaging (rms) or sample detector (when rms not available).
- g) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering; allow sweep to “free run.”
- j) Employ trace averaging (rms) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-10.




EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix E.


APPENDIX A: 6dB Emission Bandwidth**Test Result**

Test Mode	Antenna	Channel[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.04	0.5	PASS
		2437	11.56	0.5	PASS
		2462	11.60	0.5	PASS
11G	Ant1	2412	16.36	0.5	PASS
		2437	16.44	0.5	PASS
		2462	16.48	0.5	PASS
11N20 SISO	Ant1	2412	17.32	0.5	PASS
		2437	16.32	0.5	PASS
		2462	17.28	0.5	PASS

Test Graphs

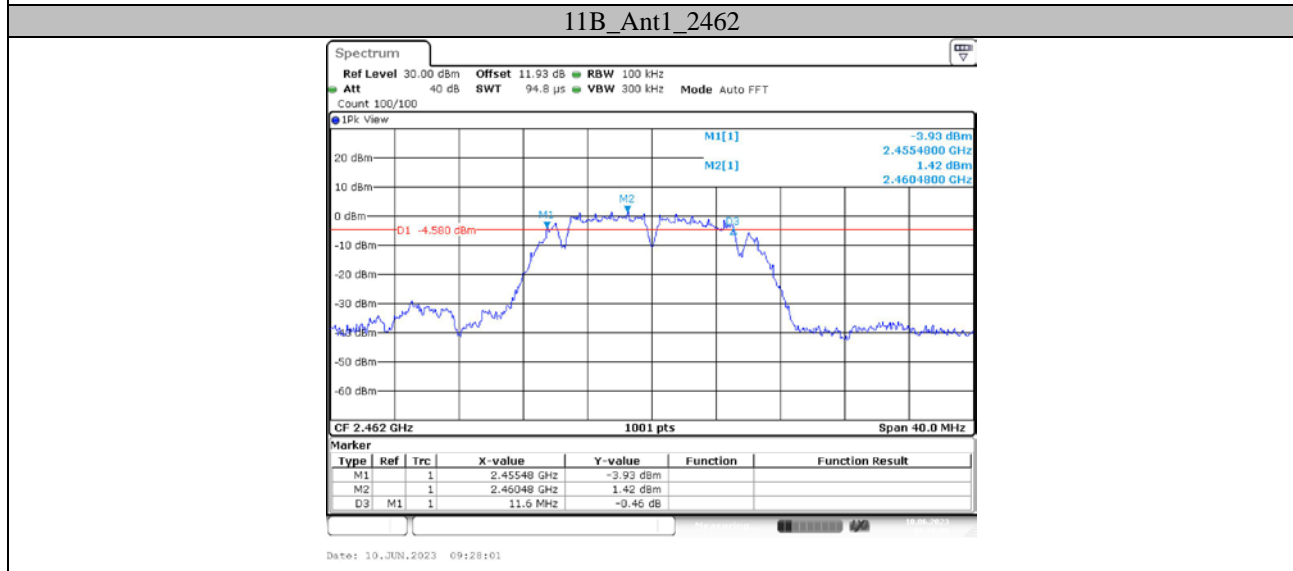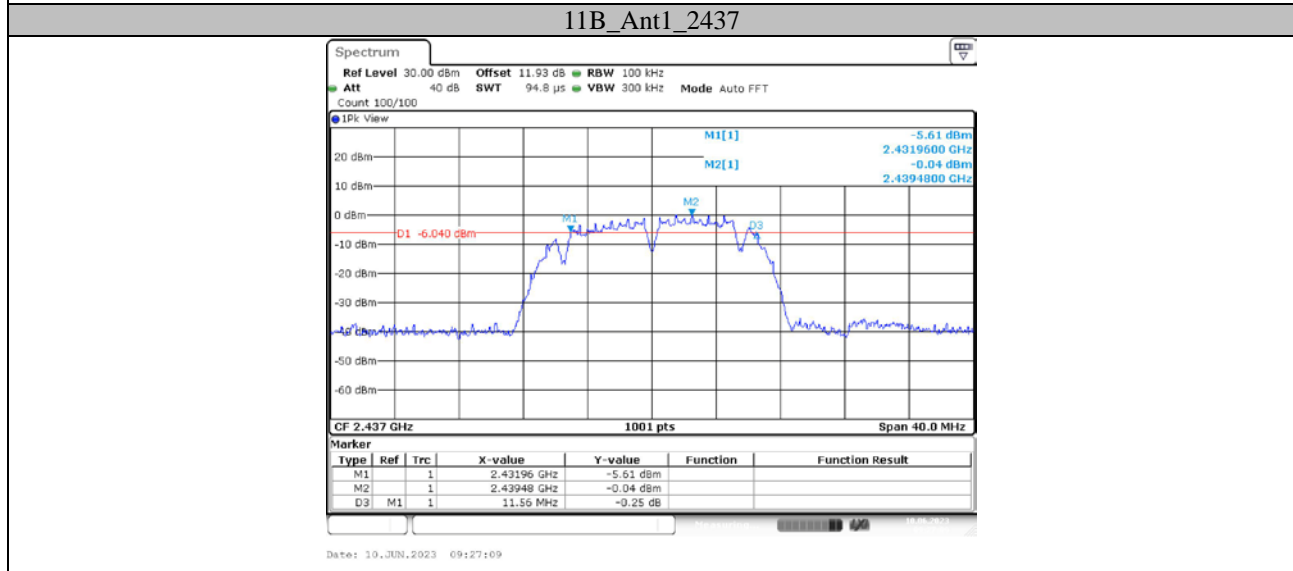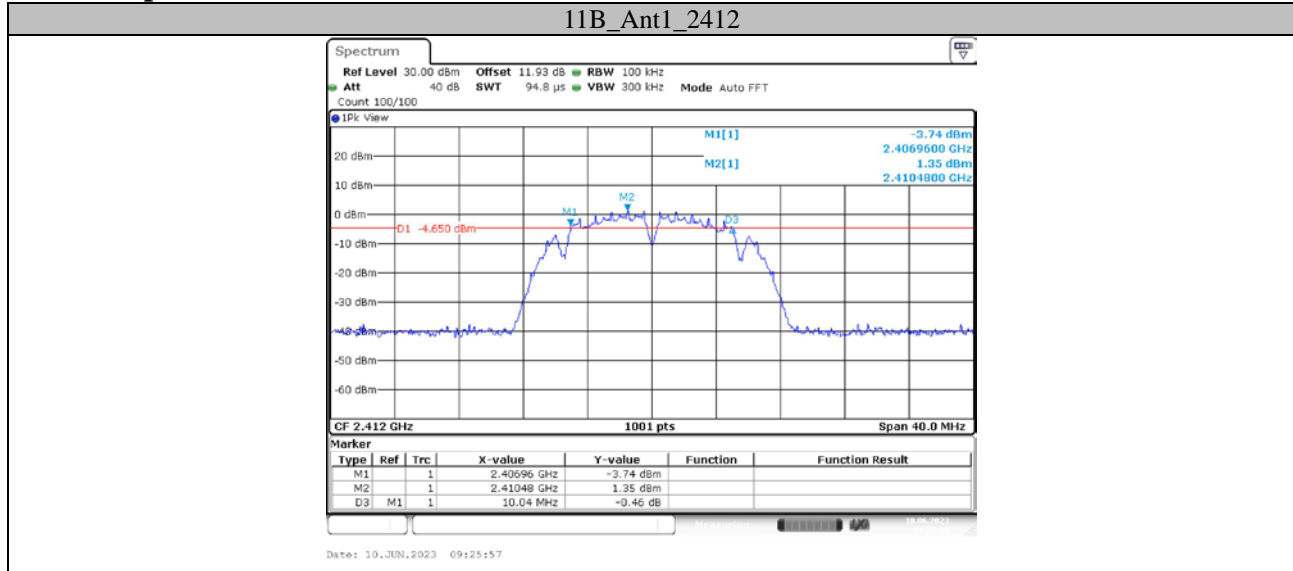


11G_Ant1_2412

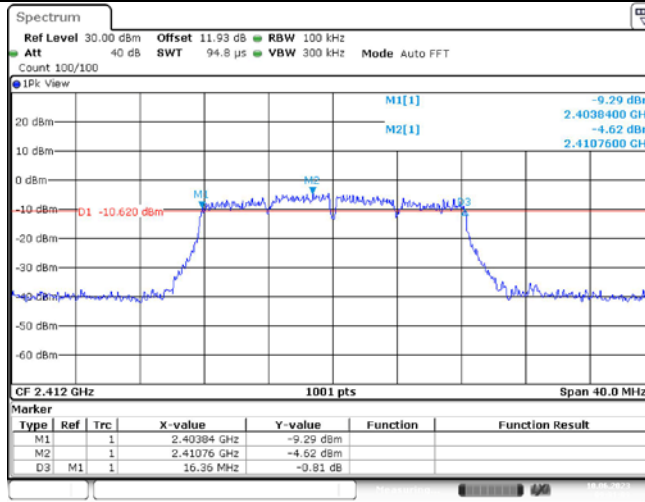


Date: 10 JUN 2023 09:31:04

11G_Ant1_2437

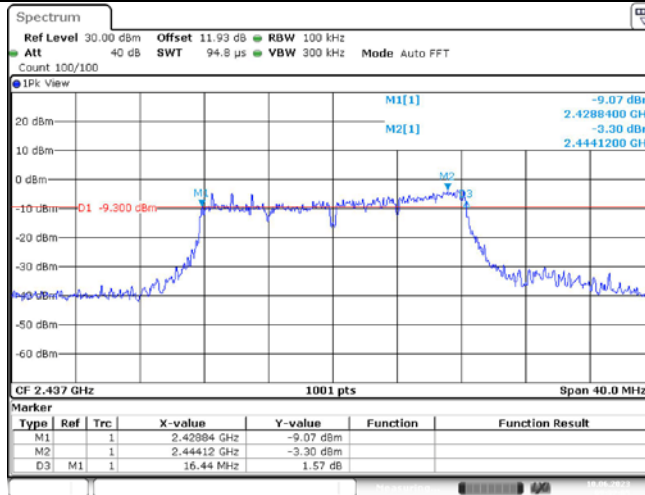


Date: 10 JUN 2023 09:32:05

11G_Ant1_2462

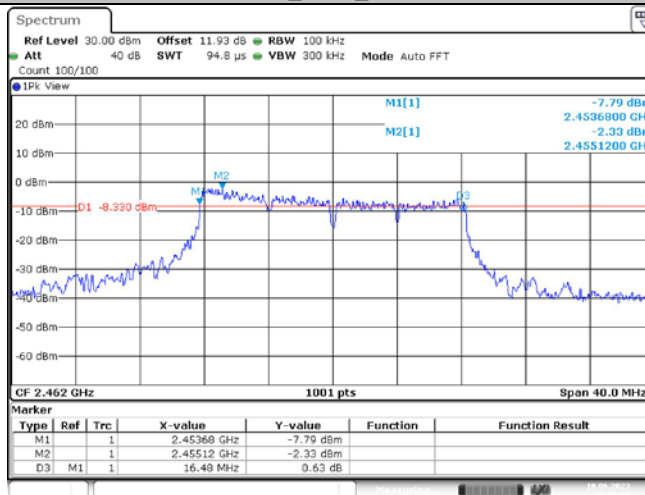


Date: 10 JUN 2023 09:38:01

11N20SISO_Ant1_2412

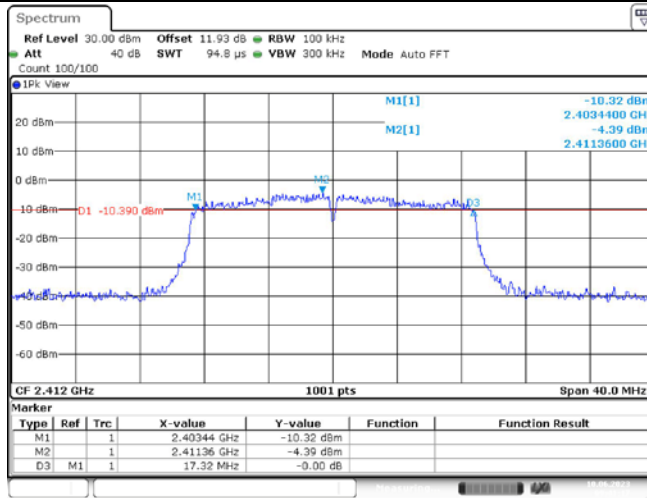


Date: 10 JUN 2023 09:41:16

11N20SISO_Ant1_2437

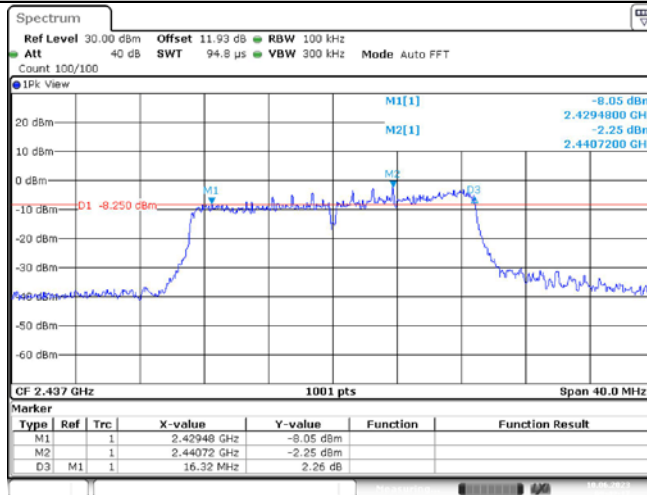

Date: 10 JUN 2023 09:42:18

11N20SISO_Ant1_2462

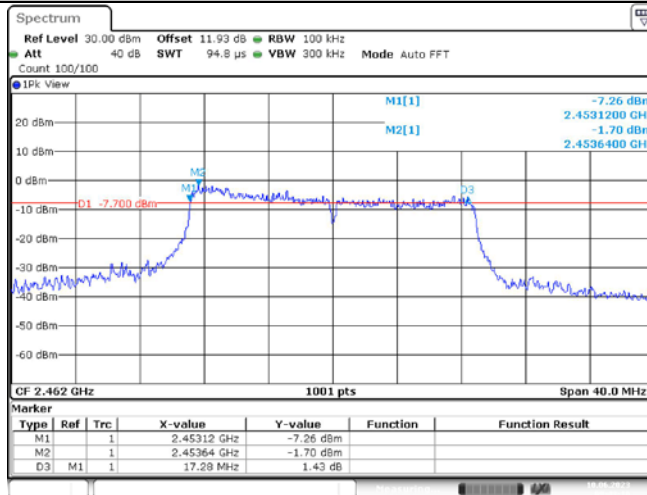


Date: 10 JUN 2023 09:43:10


APPENDIX B: Occupied Channel Bandwidth**Test Result:**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.427	---	PASS
		2437	13.986	---	PASS
		2462	14.186	---	PASS
11G	Ant1	2412	17.103	---	PASS
		2437	18.222	---	PASS
		2462	17.902	---	PASS
11N20 SISO	Ant1	2412	17.662	---	PASS
		2437	18.342	---	PASS
		2462	18.501	---	PASS

Test Graphs:

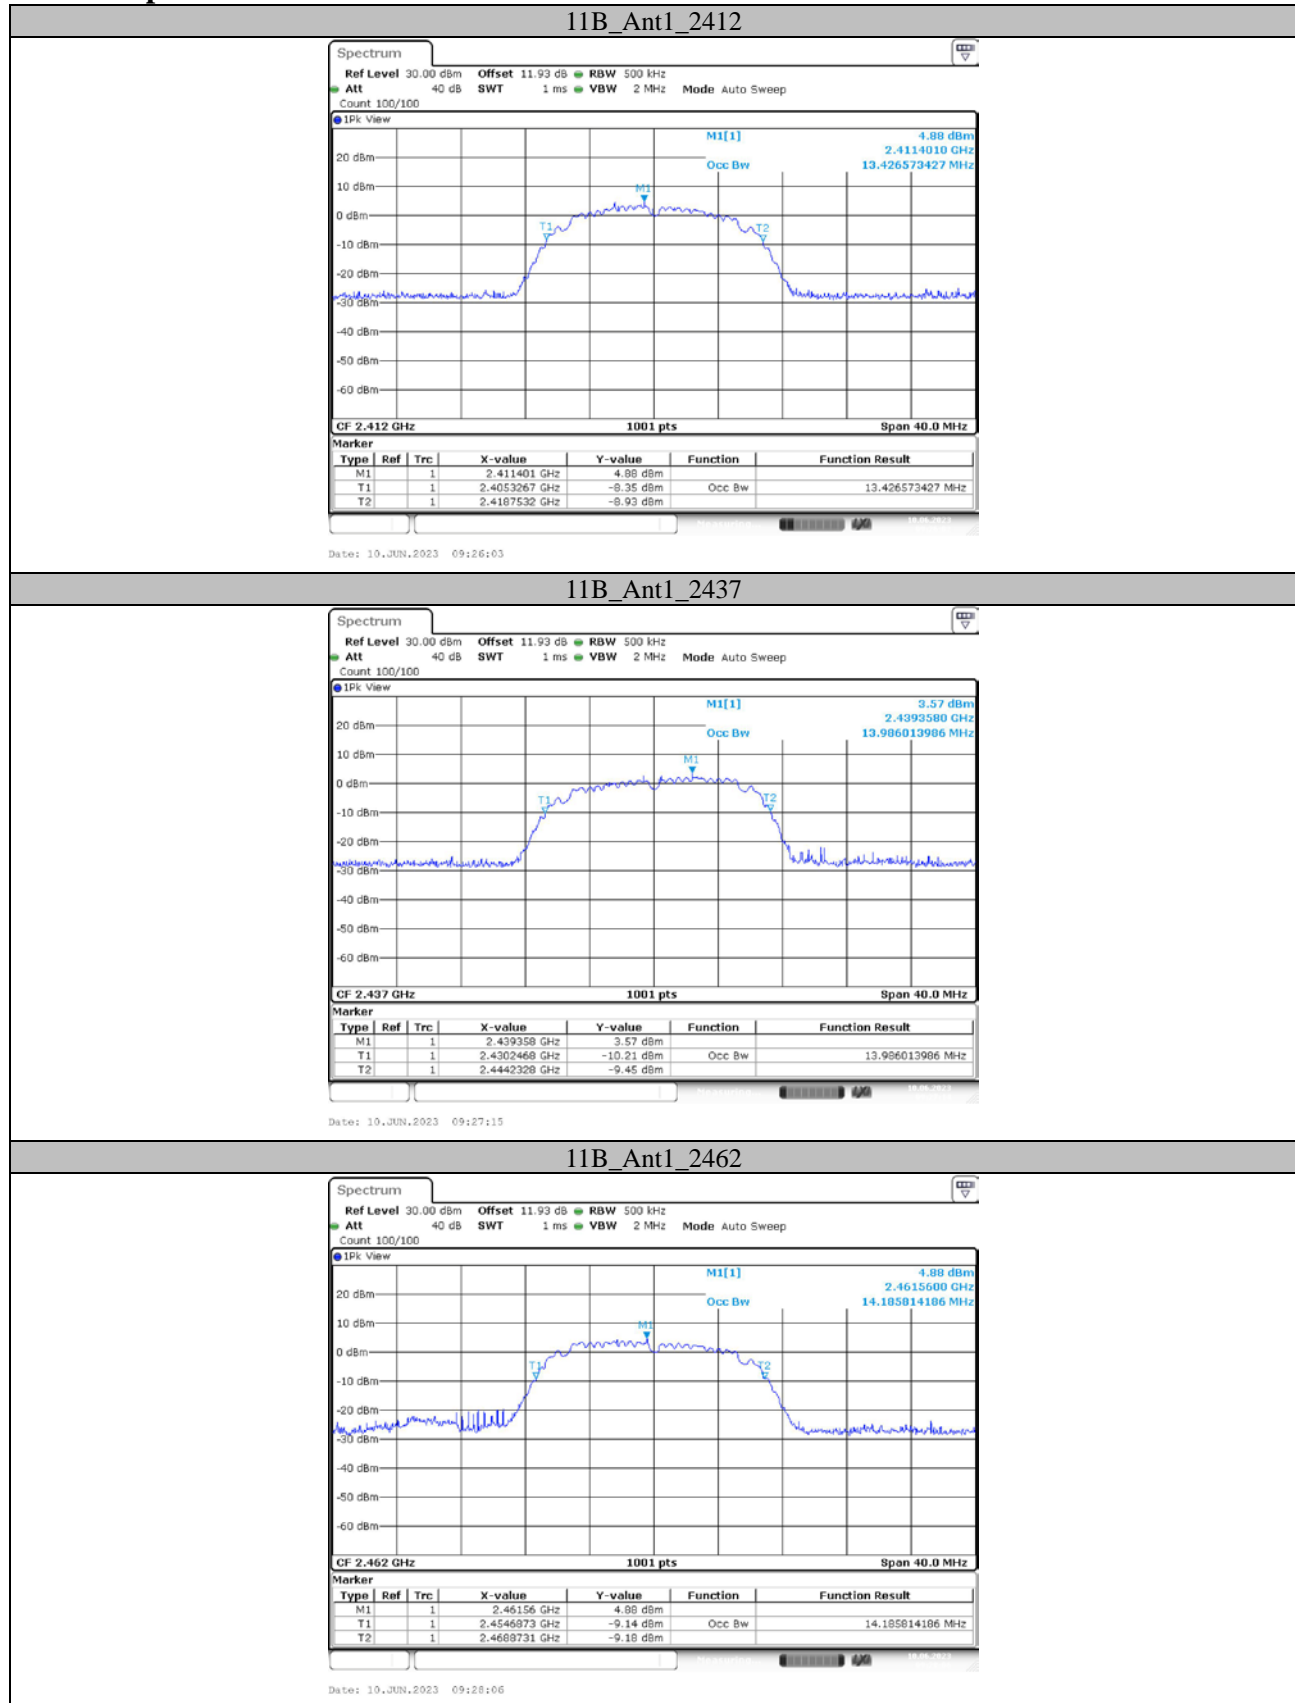


11G_Ant1_2412

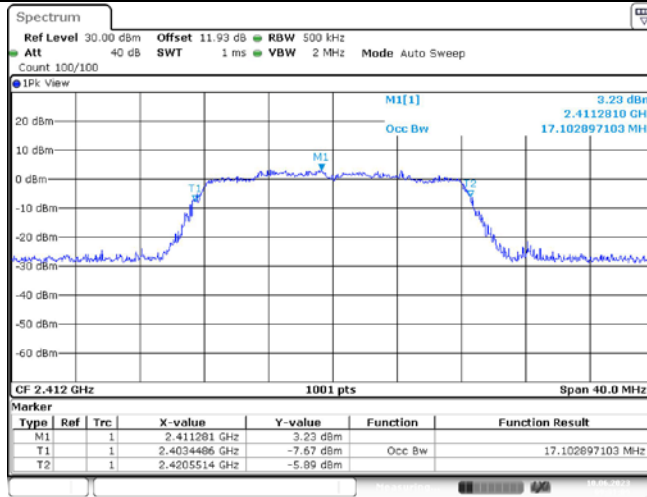

Date: 10 JUN 2023 09:31:09

11G_Ant1_2437

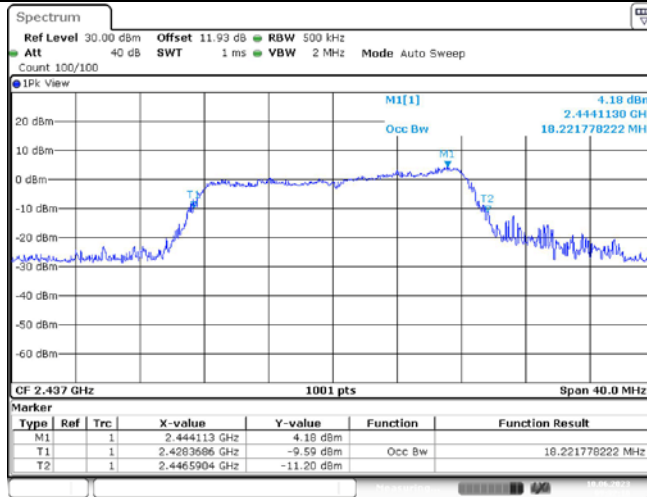


Date: 10 JUN 2023 09:32:11

11G_Ant1_2462




Date: 10 JUN 2023 09:38:07

11N20SISO_Ant1_2412

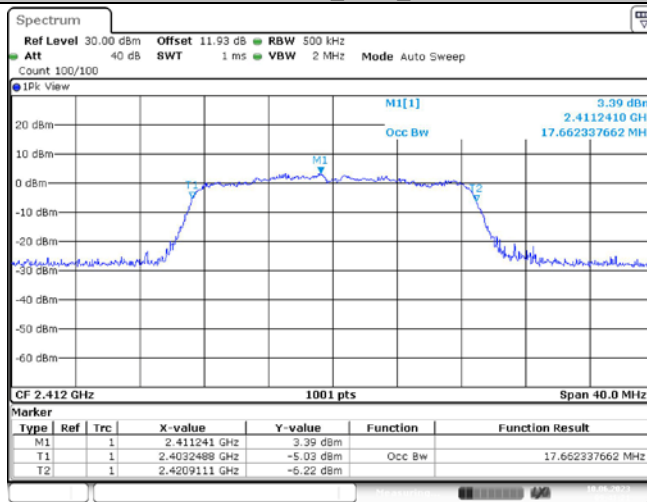

Date: 10, JUN, 2023 09:41:22

11N20SISO_Ant1_2437

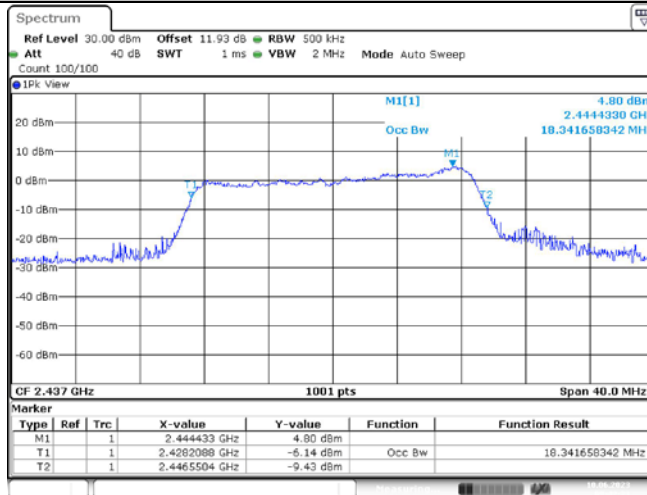

Date: 10, JUN, 2023 09:42:24

11N20SISO_Ant1_2462




Date: 10, JUN, 2023 09:43:16

APPENDIX C: Maximum Conducted Output Power**Test Result**


Test Mode	Antenna	Channel	Average Power [dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	11.81	<=30	PASS
		2437	11.03	<=30	PASS
		2462	12.92	<=30	PASS
11G	Ant1	2412	9.52	<=30	PASS
		2437	9.36	<=30	PASS
		2462	10.46	<=30	PASS
11N20 SISO	Ant1	2412	8.80	<=30	PASS
		2437	8.78	<=30	PASS
		2462	10.73	<=30	PASS

APPENDIX D: Band Edge Measurements

Test Graphs:

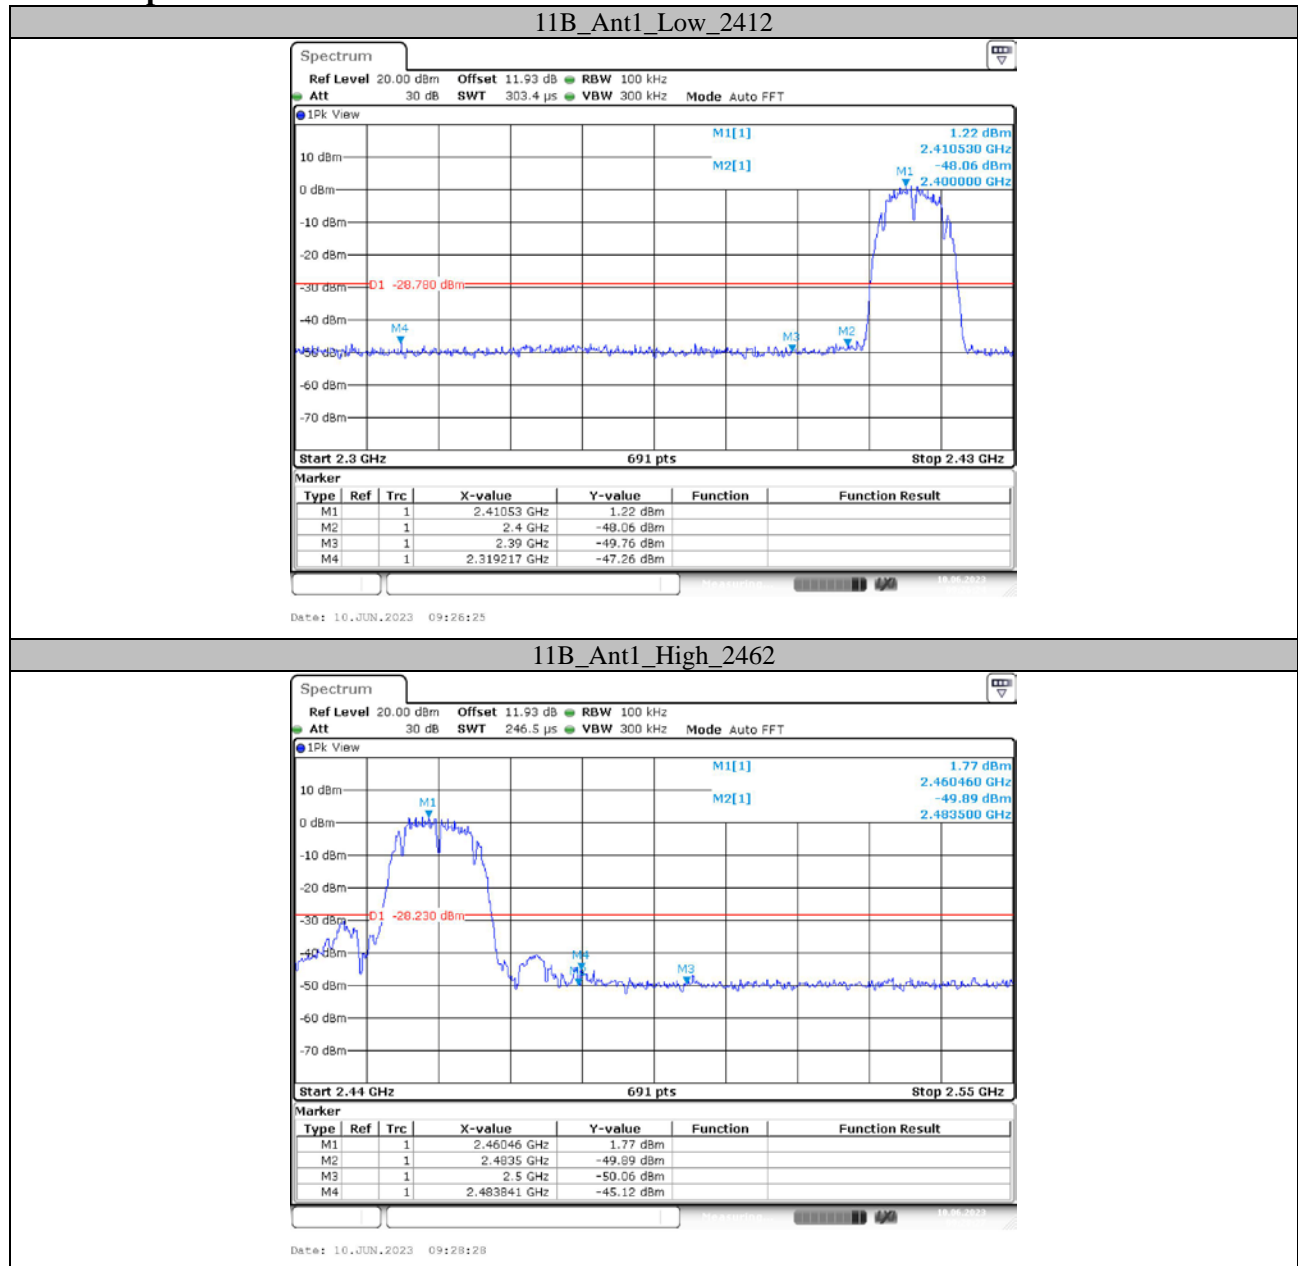


11G_Ant1_Low_2412

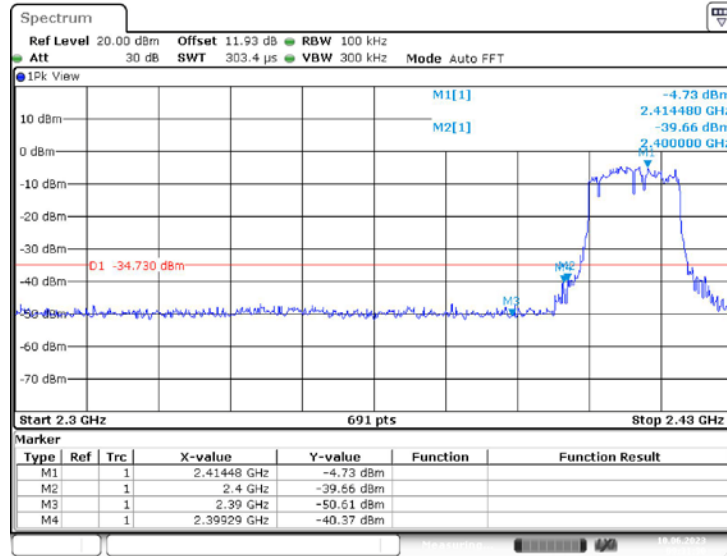


Date: 10 JUN 2023 09:31:30

11G_Ant1_High_2462

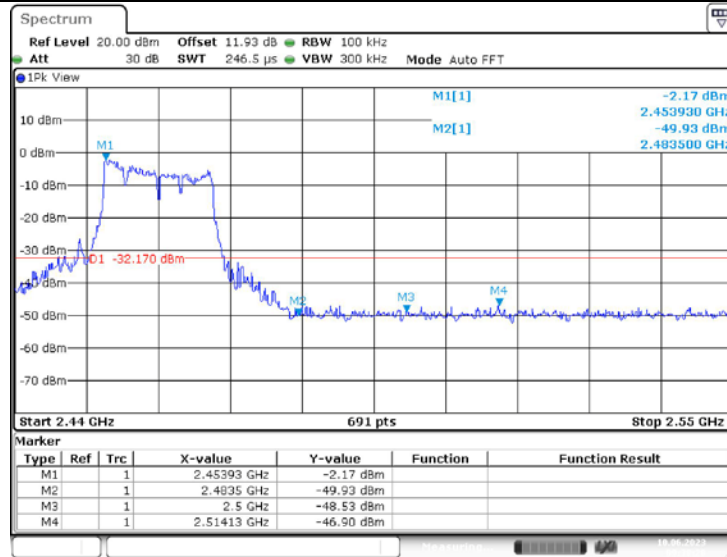


Date: 10 JUN 2023 09:38:29

11N20SISO_Ant1_Low_2412

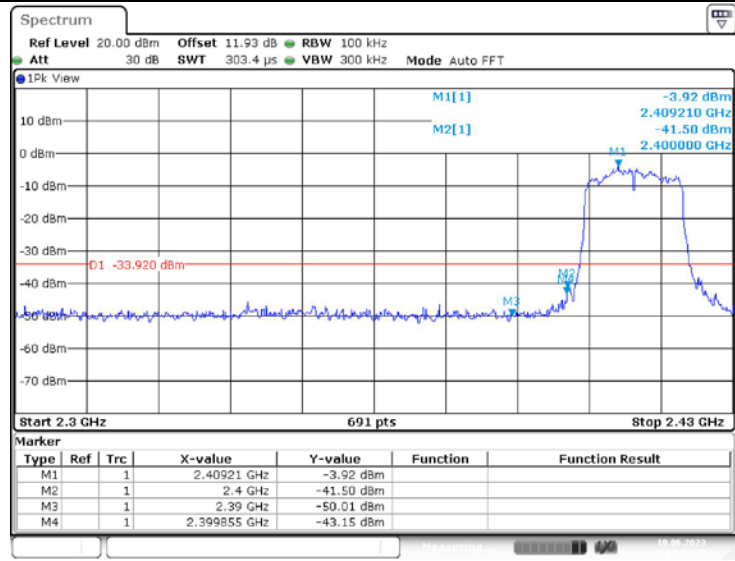

11N20SISO_Ant1_High_2462

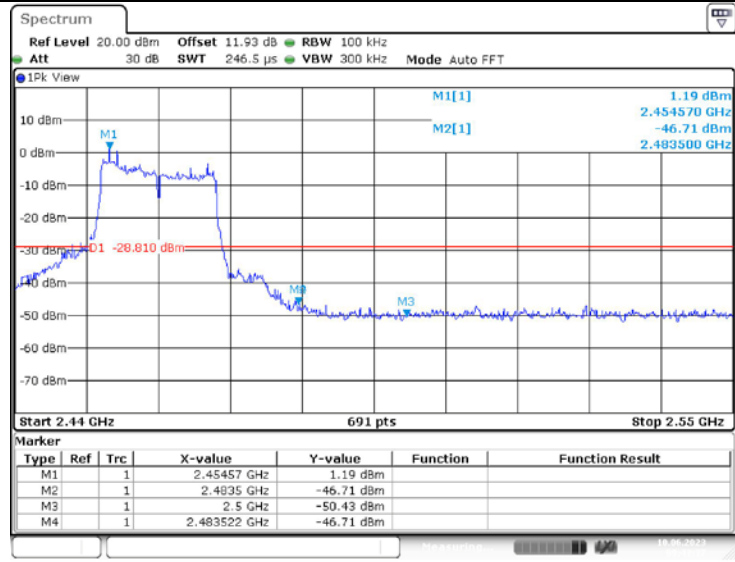


APPENDIX E: Maximum Power Spectral Density**Test Result**


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-17.75	<=8	PASS
		2437	-18.94	<=8	PASS
		2462	-17.30	<=8	PASS
11G	Ant1	2412	-18.65	<=8	PASS
		2437	-19.44	<=8	PASS
		2462	-19.53	<=8	PASS
11N20 SISO	Ant1	2412	-22.32	<=8	PASS
		2437	-20.42	<=8	PASS
		2462	-20.05	<=8	PASS

Note: the duty cycle factor has added into plot.

Test Graphs

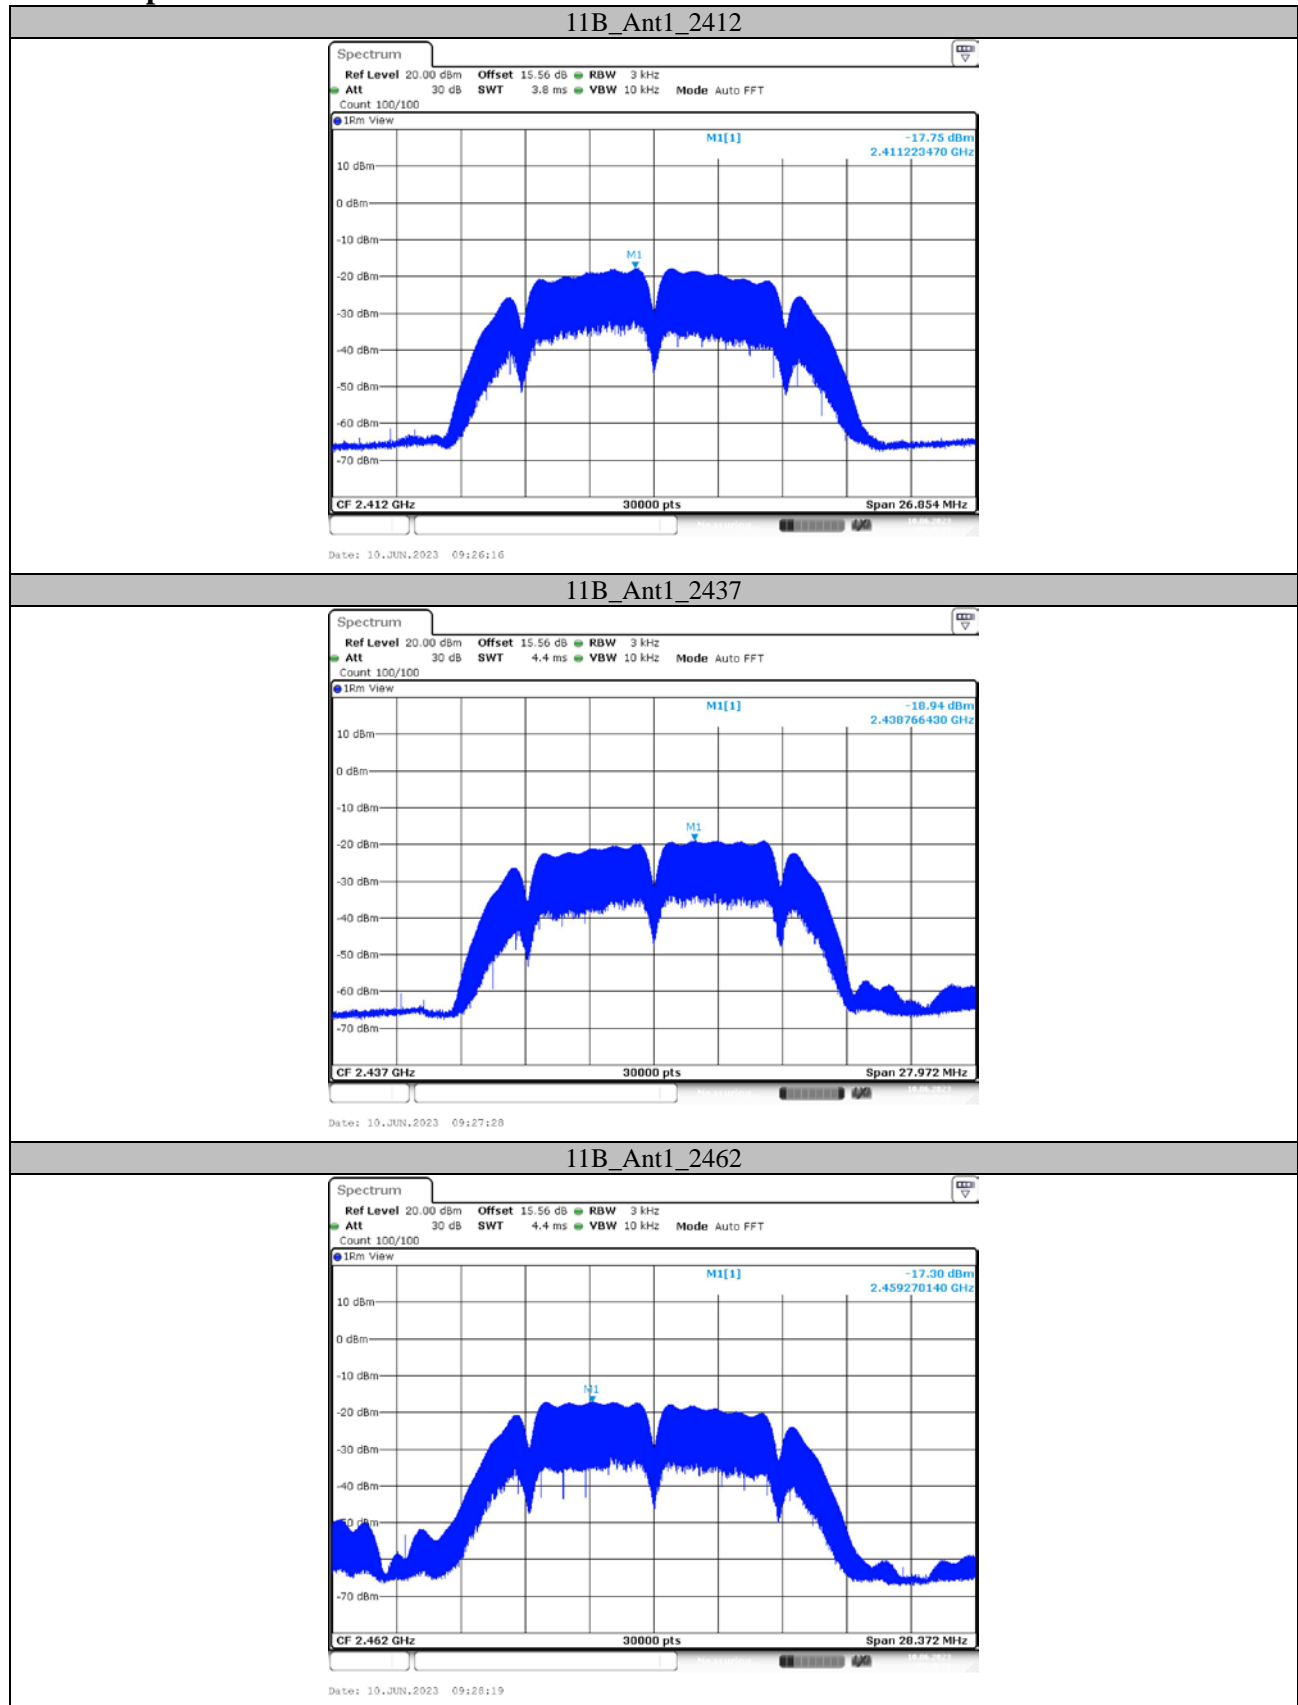


11G_Ant1_2412

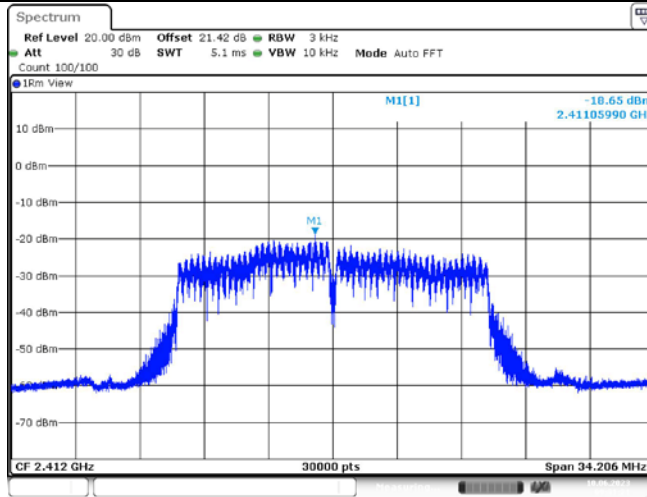


Date: 10 JUN 2023 09:31:22

11G_Ant1_2437

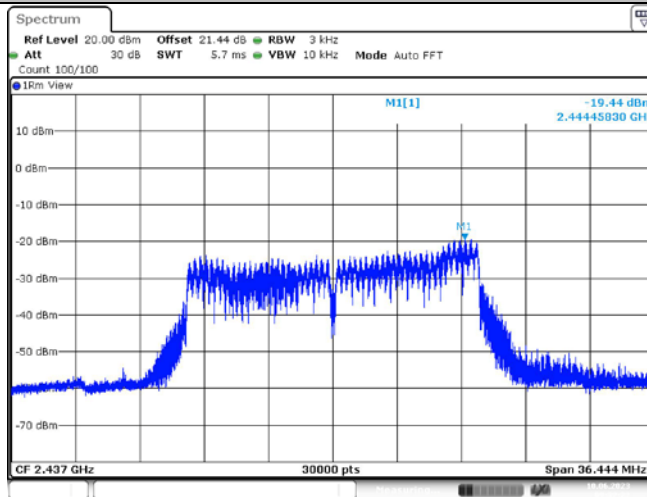


Date: 10 JUN 2023 09:32:23

11G_Ant1_2462

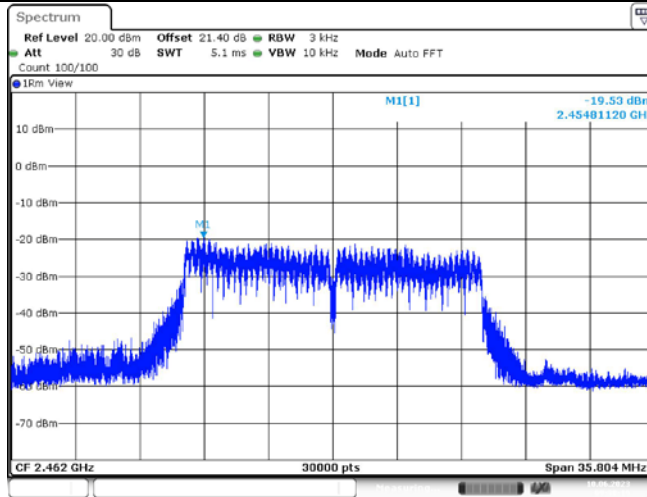


Date: 10 JUN 2023 09:38:20


11N20SISO_Ant1_2412

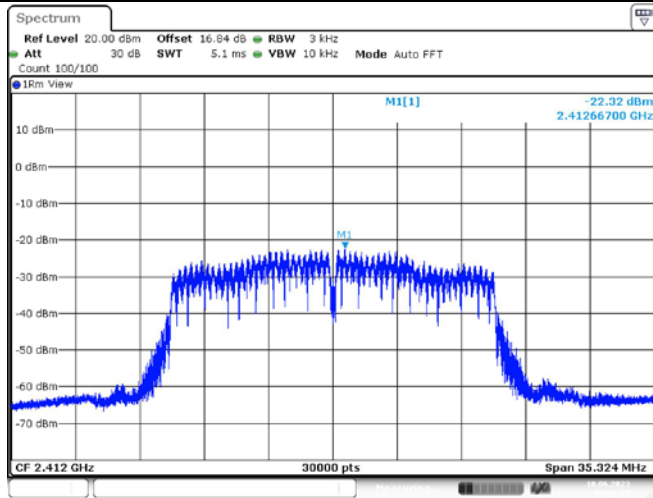

11N20SISO_Ant1_2437

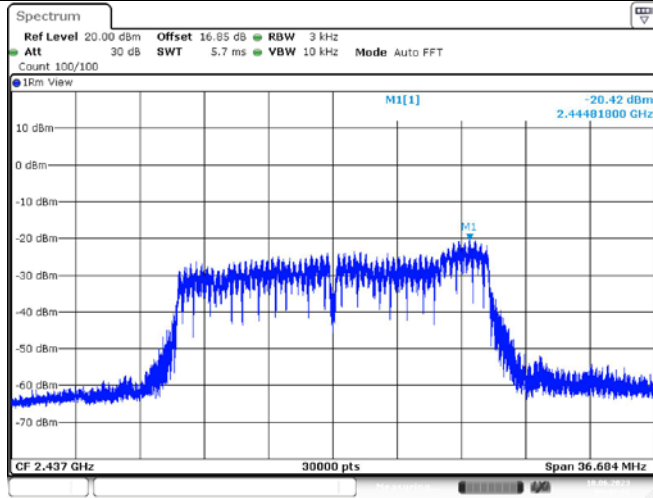

11N20SISO_Ant1_2462

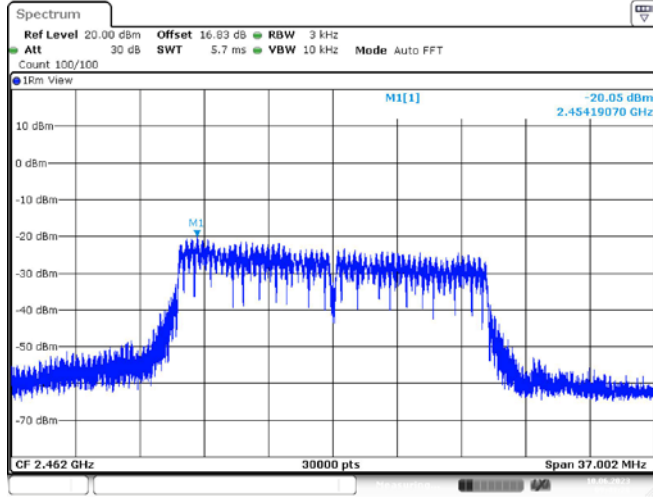

APPENDIX F: Duty Cycle

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-06-10.


EUT operation mode: Transmitting

Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]	1/T Minimum VBW[kHz]
11B	Ant1	2412	8.20	18.90	43.39	3.63	0.12
		2437	8.20	18.90	43.39	3.63	0.12
		2462	8.20	18.90	43.39	3.63	0.12
11G	Ant1	2412	1.35	12.00	11.25	9.49	0.74
		2437	1.35	12.05	11.20	9.51	0.74
		2462	1.36	12.04	11.30	9.47	0.74
11N20 SISO	Ant1	2412	5.10	15.78	32.32	4.91	0.20
		2437	5.07	15.75	32.19	4.92	0.20
		2462	5.10	15.76	32.36	4.90	0.20


Test Graphs

11B_Ant1_2412

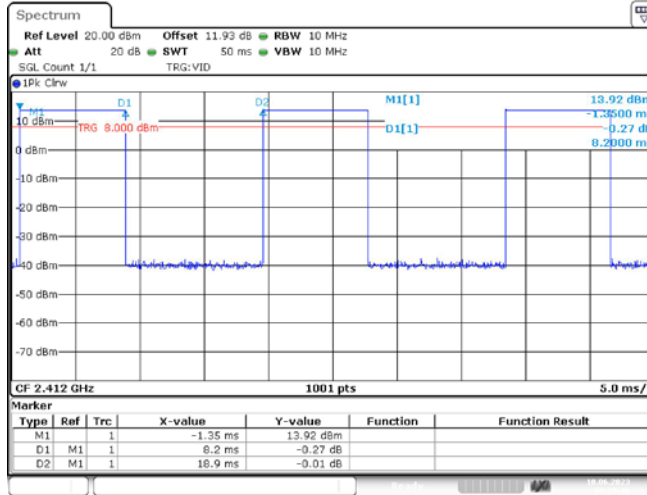


Date: 10 JUN 2023 09:25:49

11B_Ant1_2437

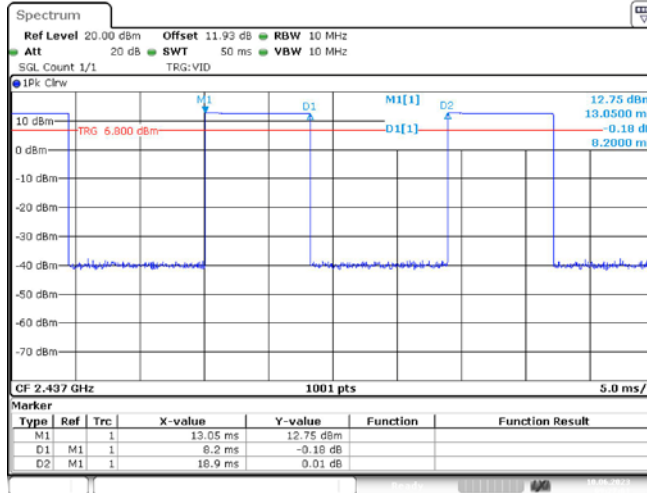


Date: 10 JUN 2023 09:27:02

11B_Ant1_2462

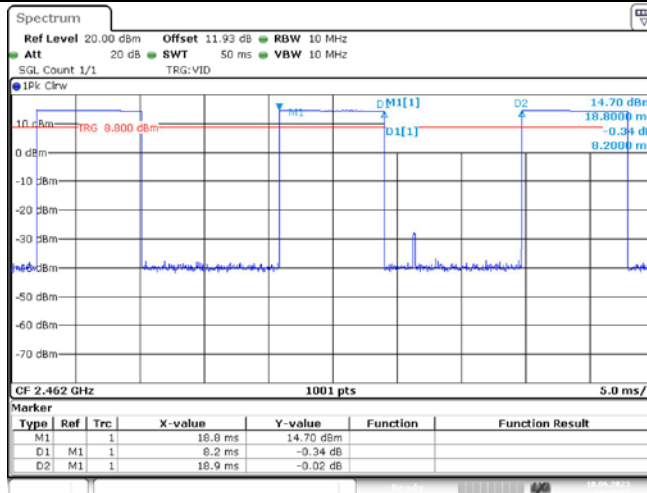


Date: 10 JUN 2023 09:27:53

11G_Ant1_2412

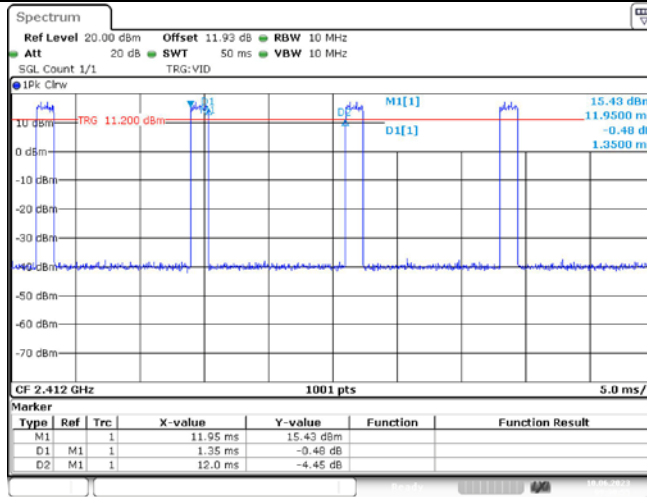


Date: 10 JUN 2023 09:30:56

11G_Ant1_2437

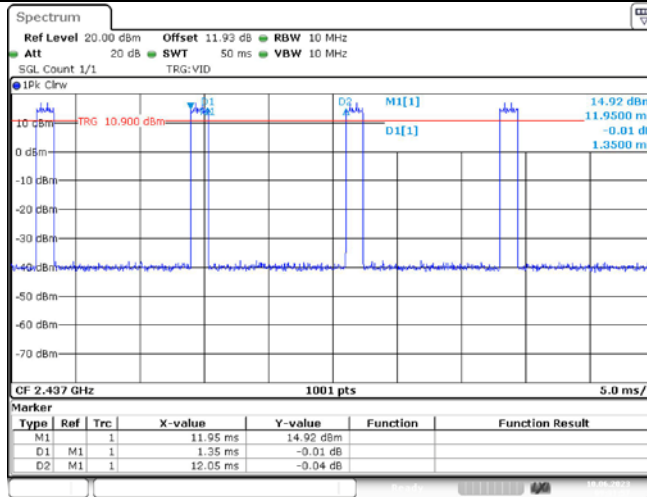


Date: 10 JUN 2023 09:31:59

11G_Ant1_2462

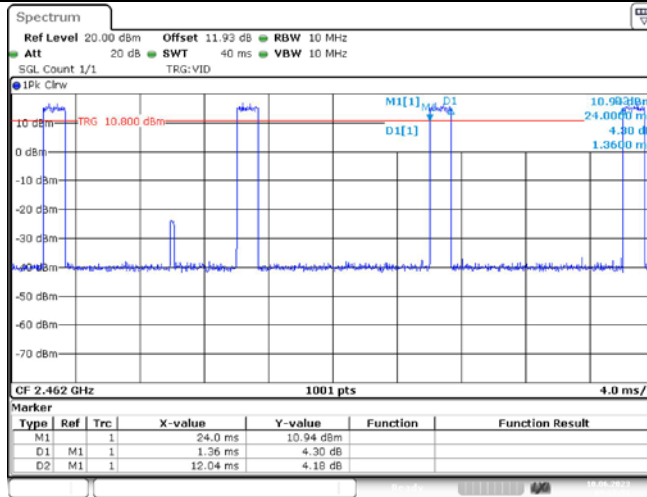


Date: 10 JUN 2023 09:37:54

11N20SISO_Ant1_2412

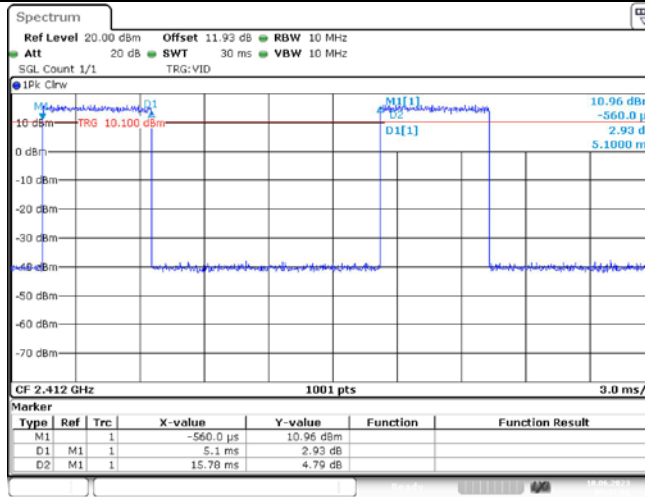


Date: 10 JUN 2023 09:41:09

11N20SISO_Ant1_2437

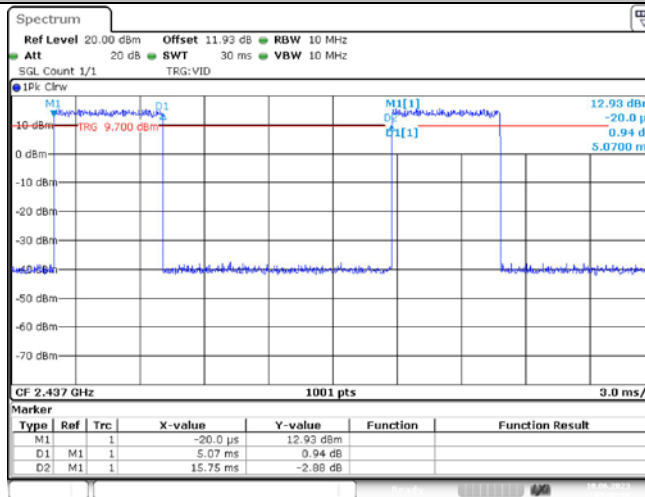

Date: 10 JUN 2023 09:42:11

11N20SISO_Ant1_2462

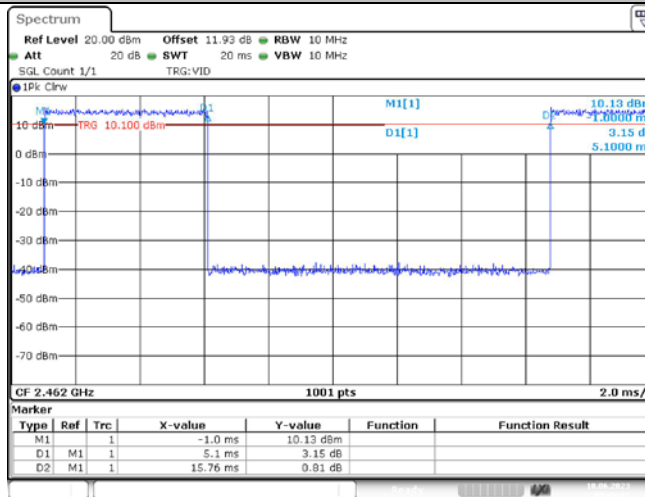

Date: 10 JUN 2023 09:43:03

***** END OF REPORT *****