



CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.com.cn

TEST REPORT

Report No.: GTI20191674E-3

FCC ID.....: 2ATUP-Q660500

IC: 25301-Q660500

Applicant.....: eInfochips Inc

Address.....: 2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America

Manufacturer.....: eInfochips Inc

Address.....: 2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America

Product Name.....: Eragon 660

Trade Mark.....: 

Model/Type reference.....: Eragon 660 SBC

Listed Model(s): EIC-Q660-500

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS 247 Issue 2

Date of receipt of test sample...: Jul. 7, 2019

Date of testing.....: Jul. 8, 2019 to Sep. 25, 2019

Date of issue.....: Sep. 25, 2019

Result.....: PASS

Compiled by:

(Printed name+signature) Terry Su

Supervised by:

(Printed name+signature) Eric Zhang

Approved by:

(Printed name+signature) Walter Chen

Testing Laboratory Name.....: CTC Laboratories, Inc.

Address.....: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. OPERATION STATE.....	8
2.4. MEASUREMENT INSTRUMENTS LIST	9
3. TEST ITEM AND RESULTS	11
3.1. CONDUCTED EMISSION.....	11
3.2. RADIATED EMISSION	14
3.3. BAND EDGE EMISSIONS	54
3.4. BANDWIDTH.....	109
3.5. PEAK OUTPUT POWER	117
3.6. POWER SPECTRAL DENSITY	119
3.7. ANTENNA REQUIREMENT	127
4. LABEL AND LABEL LOCATION	128
5. EUT TEST PHOTOS	129
6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL	130



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSS) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Sep. 25, 2019	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Lucy Lan
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Lucy Lan
Band Edge Emissions	15.247(d)	RSS 247 5.5	Pass	Lucy Lan
6dB Bandwidth	15.247(a)(2)	RSS 247 5.2 (a)	Pass	Lucy Lan
Conducted Max Output Power	15.247(b)(3)	RSS 247 5.4 (d)	Pass	Lucy Lan
Power Spectral Density	15.247(e)	RSS 247 5.2 (b)	Pass	Lucy Lan
Transmitter Radiated Spurious	15.209&15.247(d)	RSS 247 5.5& RSS-Gen 8.9	Pass	Lucy Lan

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: CN1208

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9783A

The 3m alternate test site of CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC-Registration No.: 951311

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	25°C
Relative Humidity:	40%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	eInfochips Inc
Address:	2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America
Manufacturer:	eInfochips Inc
Address:	2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America

2.2. General Description of EUT

Product Name:	Eragon 660
Trade Mark:	
Model/Type reference:	Eragon 660 SBC
Listed Model(s):	EIC-Q660-500
Model Difference:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name.
Power supply:	12Vdc/2.5A from AC/DC Adapter
Adapter Model:	GPE048A-120250-D Input:100-240V 50/60Hz 1A Output:12V/2.5A
Hardware version:	1.1
Software version:	1.1.0
WIFI 802.11b/g/n(HT20)	
Modulation:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK,QPSK,16QAM,64QAM)
Operation frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz
Channel number:	802.11b/g/n(HT20):11channels
Channel separation:	5MHz
Antenna 1 and 2 type:	Ceramic Antenna
Antenna 1 and 2 gain:	1.5dBi



2.3. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20)

The display in grey were the channel selected for testing.

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.



2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 28, 2019
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Dec. 28, 2019
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 28, 2019
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 28, 2019
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 28, 2019
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 28, 2019
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 28, 2019
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 28, 2019
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 28, 2019
10	Climate Chamber	ESPEC	MT3065	/	Dec. 28, 2019
11	300328 v2.1.1 test system	TONSCEND	v2.6	/	/

Radiated Emission and Transmitter spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 28, 2019
2	High pass filter	micro-tranics	HPM50111	142	Dec. 28, 2019
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 28, 2019
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 28, 2019
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 28, 2019
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 28, 2019
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 28, 2019
8	Pre-Amplifier	HP	8447D	1937A03050	Dec. 28, 2019
9	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 28, 2019
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 28, 2019
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX10 2	DA1580	Dec. 28, 2019
14	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 28, 2019
15	RF Connection Cable	HUBER+SUHNE R	RE-7-FL	N/A	Dec. 28, 2019
16	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 28, 2019

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



17	High pass filter	Compliance Direction systems	BSU-6	34202	Dec. 28, 2019
18	Attenuator	Chengdu E-Microwave	EMCAXX-10R NZ-3	---	Dec. 28, 2019
19	High and low temperature box	ESPEC	MT3065	12114019	Dec. 28, 2019

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 28, 2019
2	LISN	R&S	ENV216	101113	Dec. 28, 2019
3	EMI Test Receiver	R&S	ESCI	100658	Dec. 28, 2019

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS - Gen 8.8:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

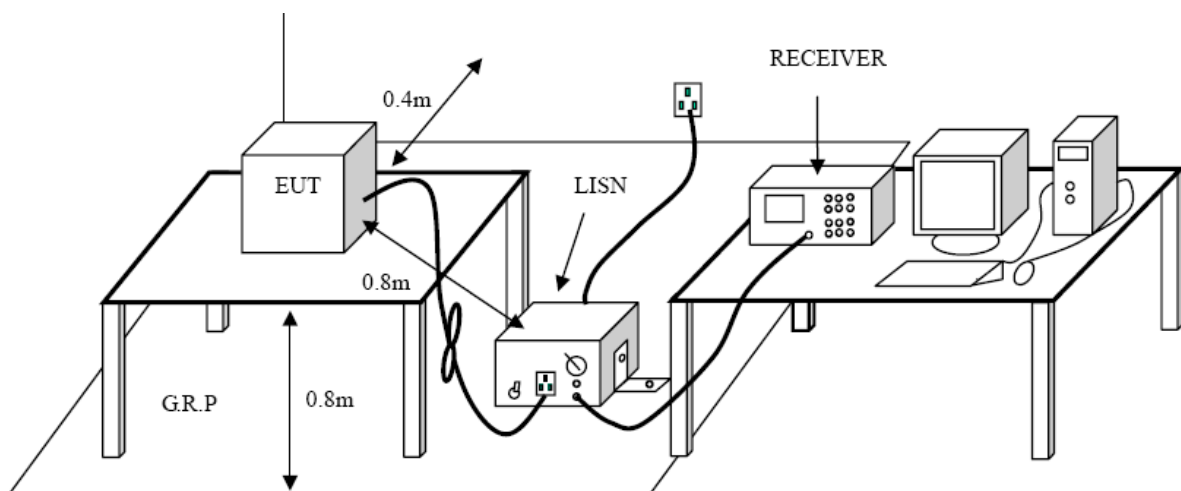



Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

**Test Mode:**

Please refer to the clause 2.3.

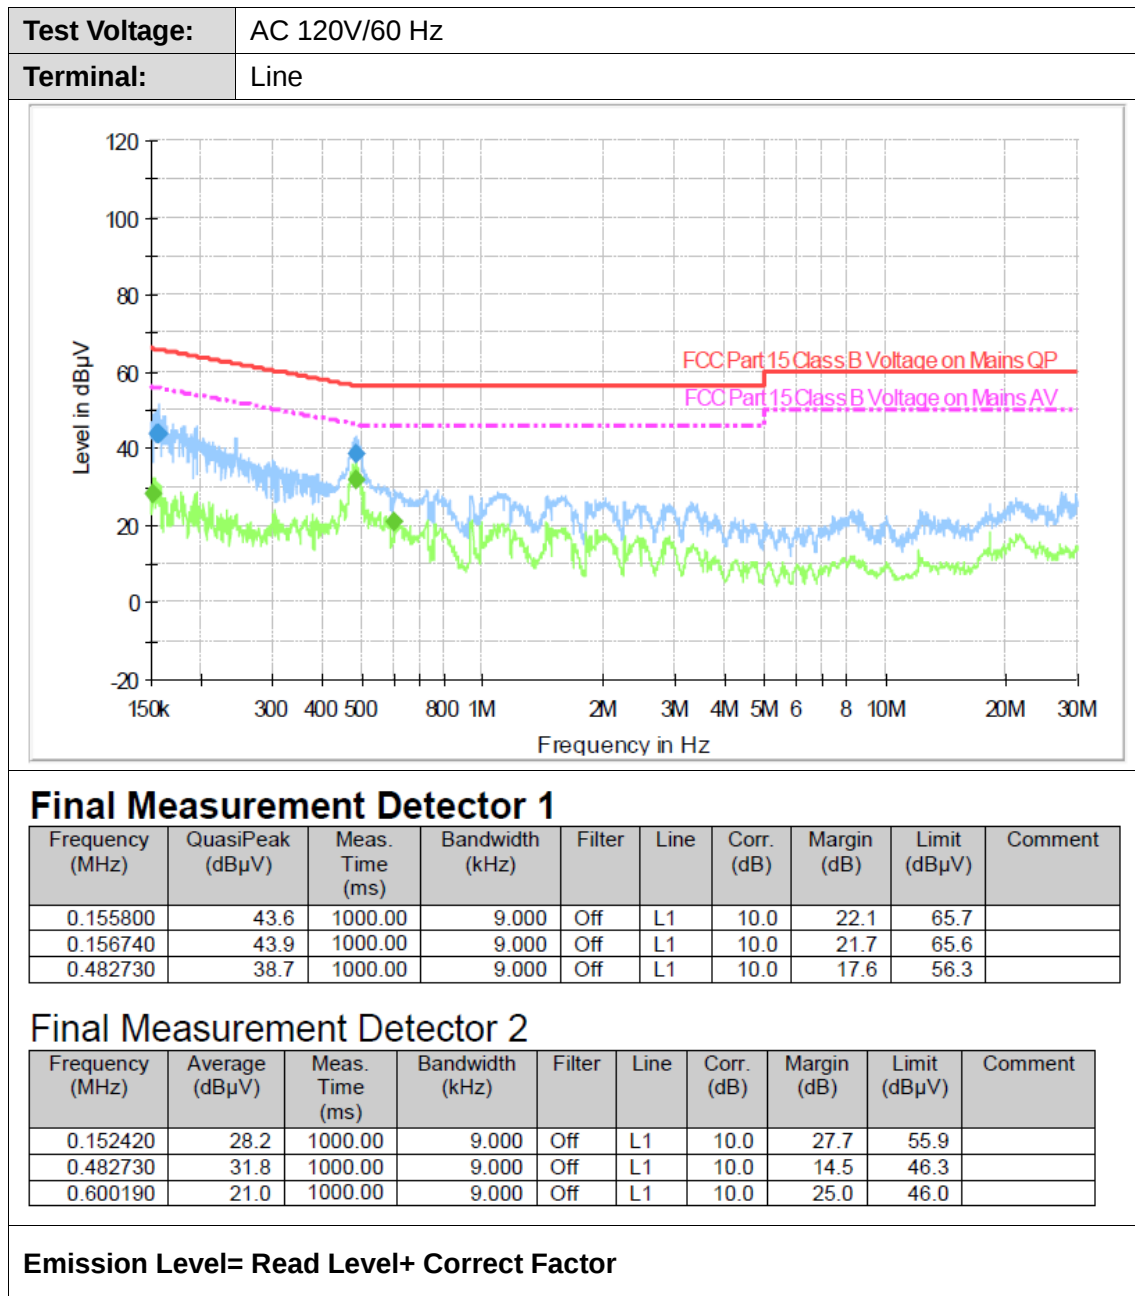Test Results

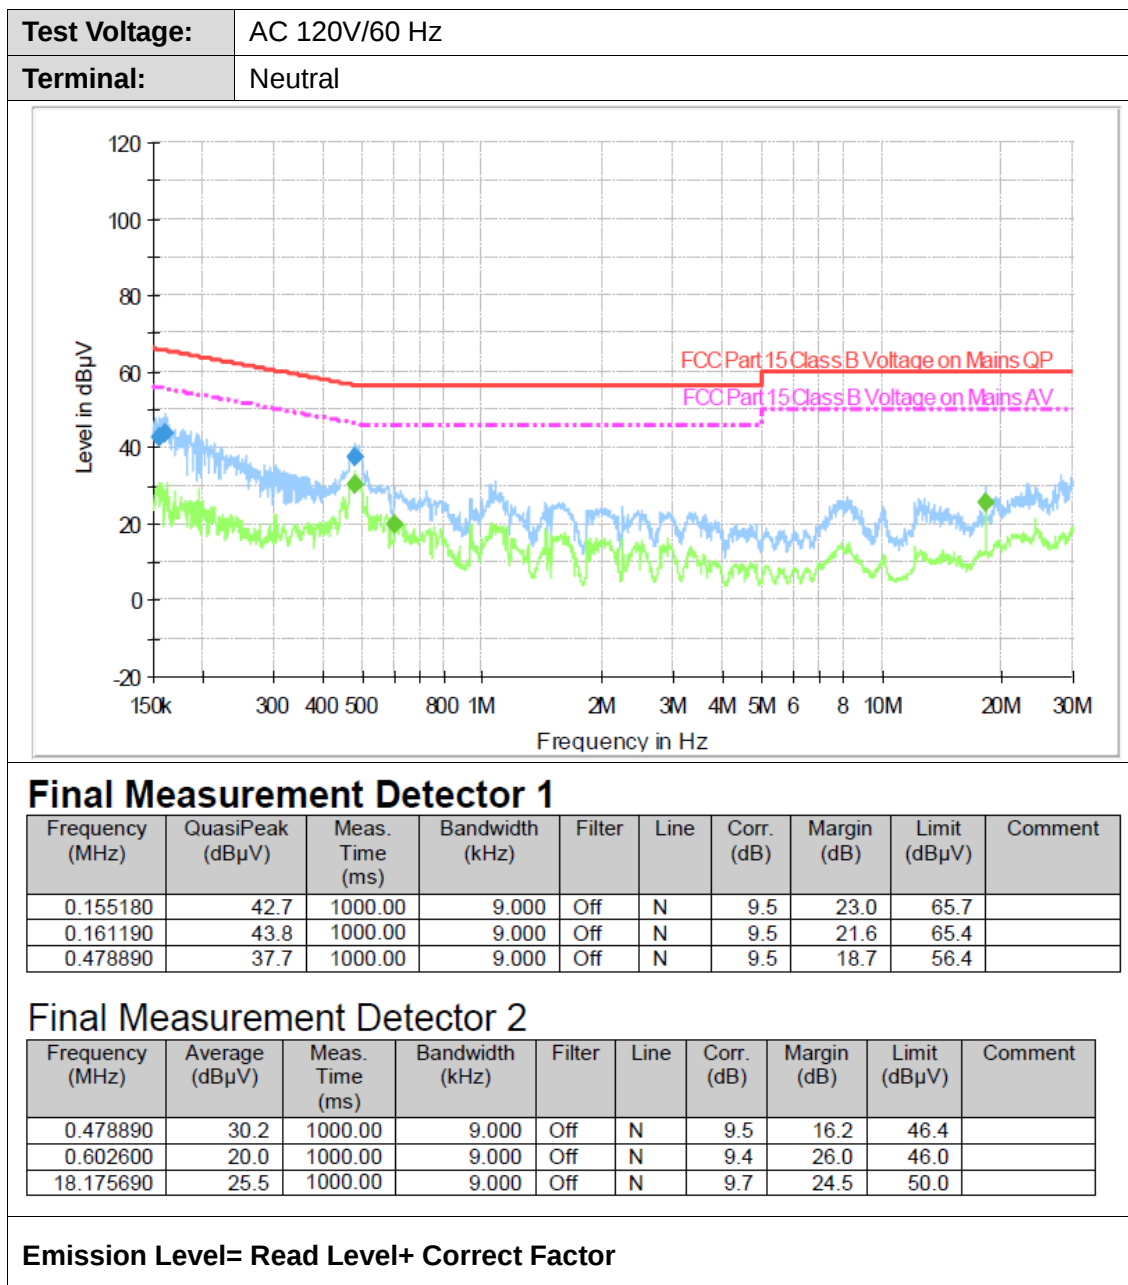

3.2. Radiated Emission

Limit



FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9:


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration

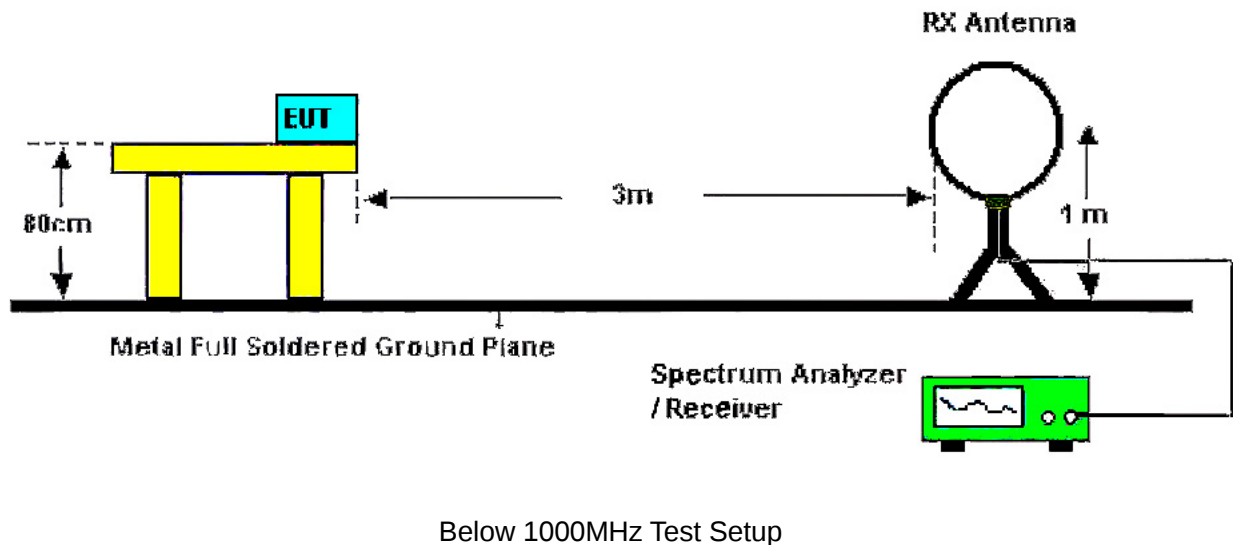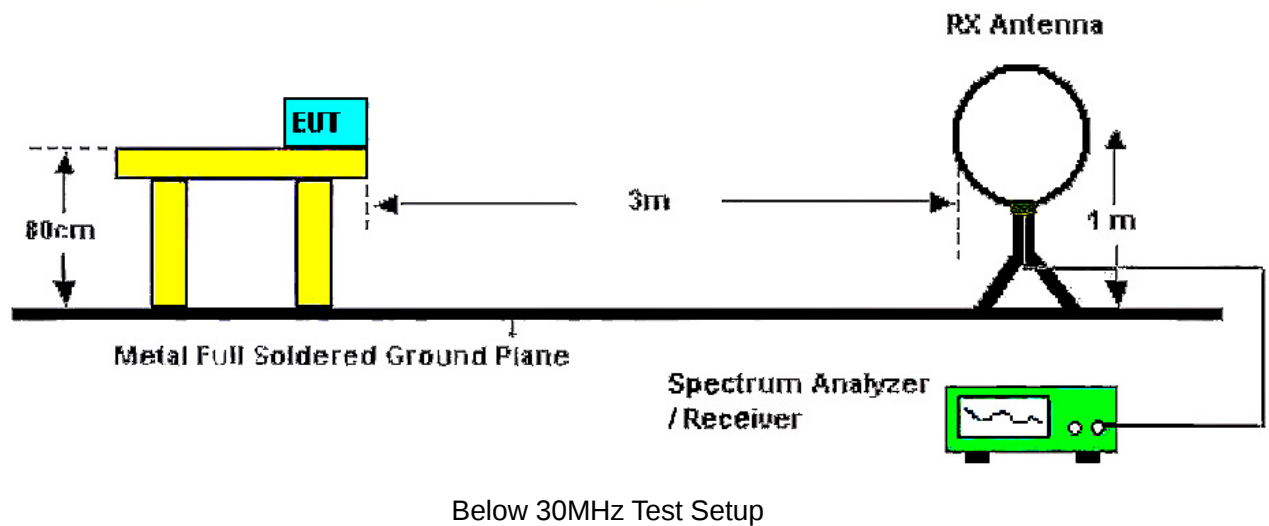

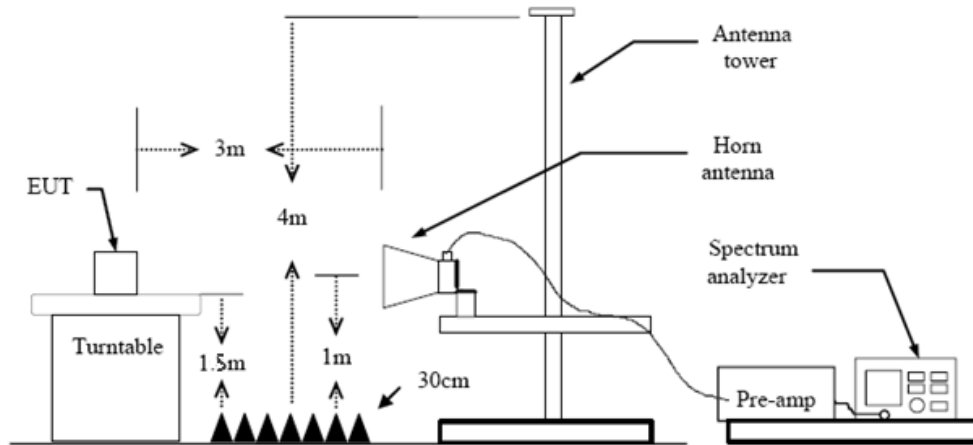

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3.

Test Result


9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

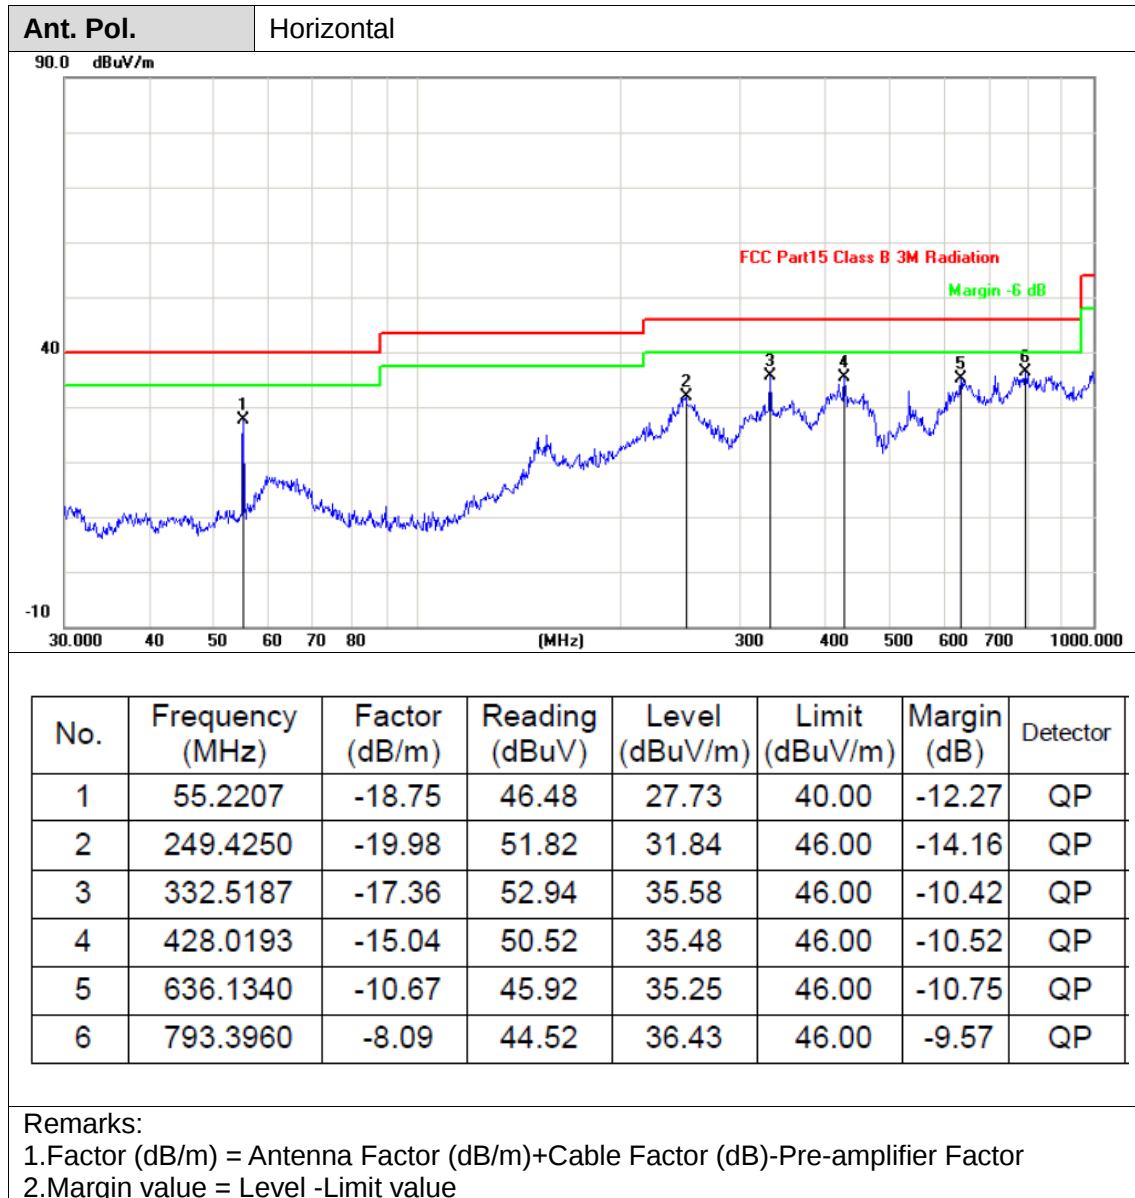


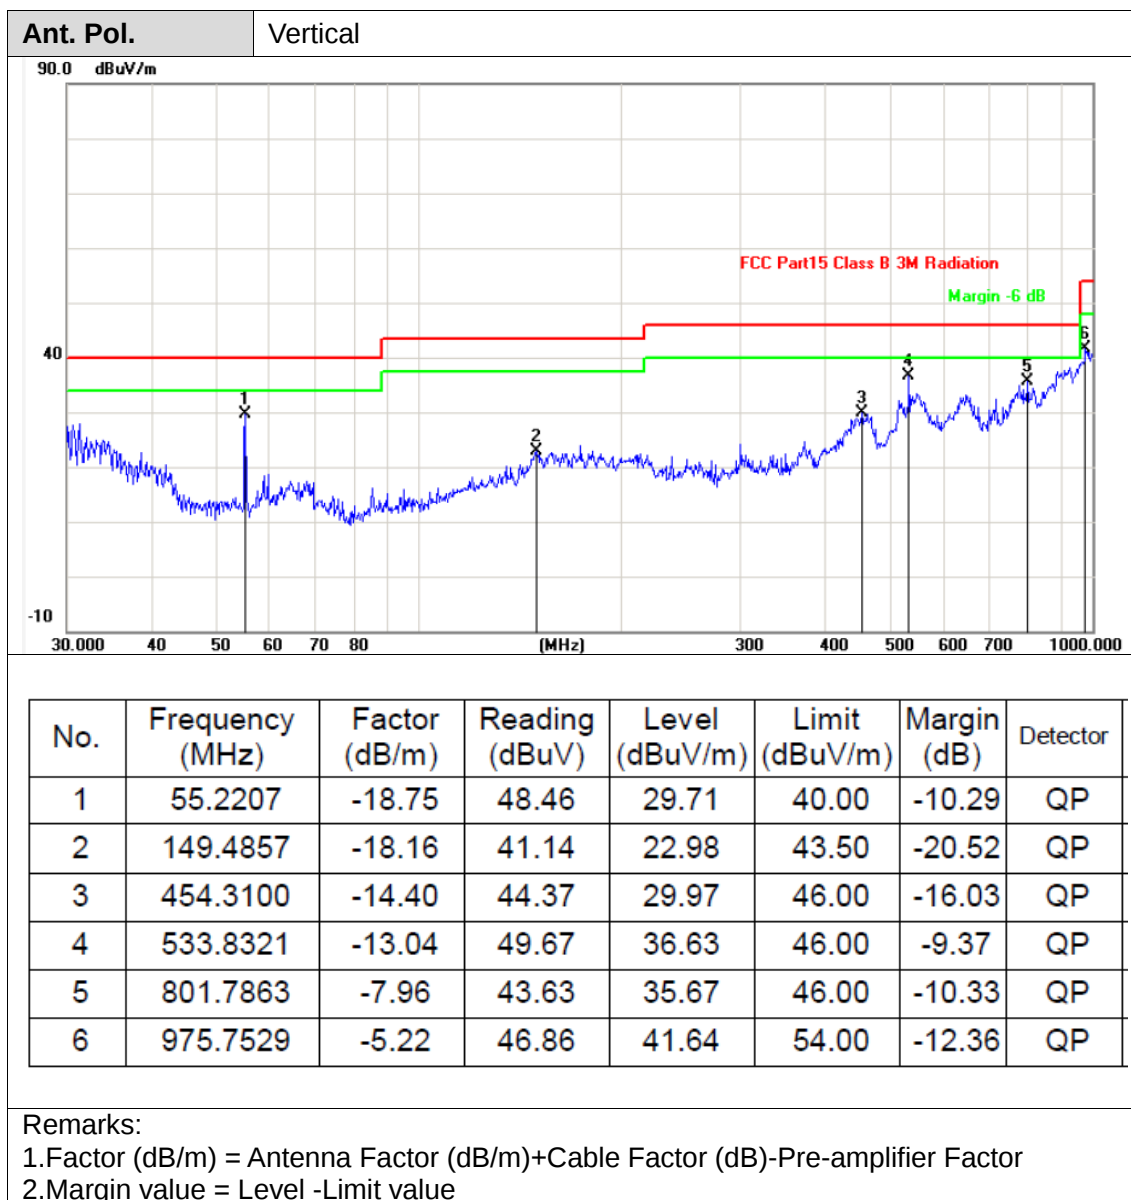



Adobe 1GHz

Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

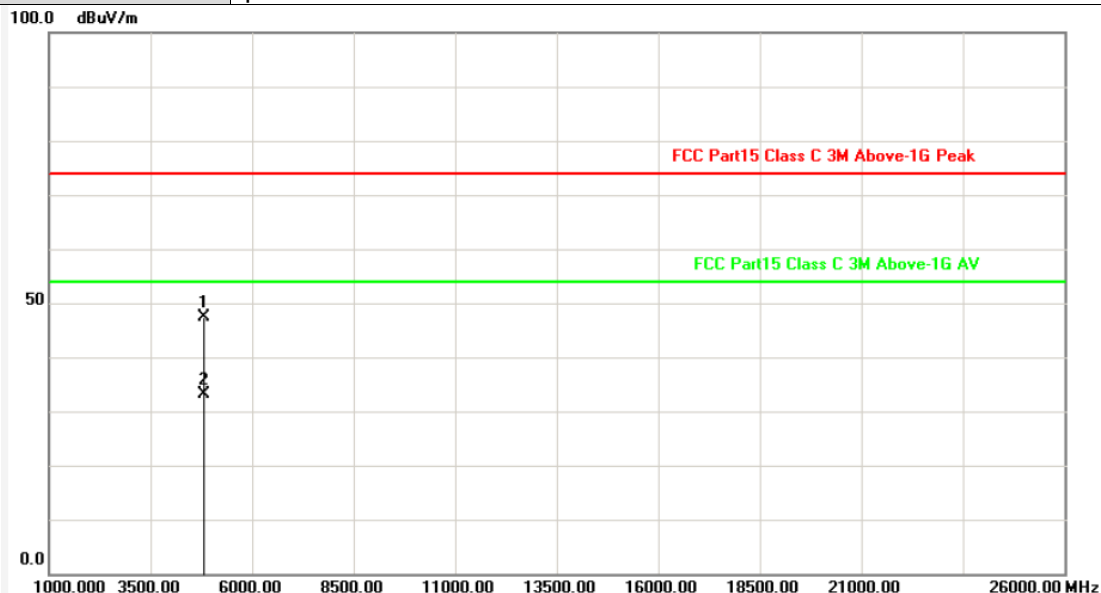


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.531	-3.26	50.73	47.47	74.00	-26.53	peak
2	4824.747	-3.26	36.33	33.07	54.00	-20.93	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

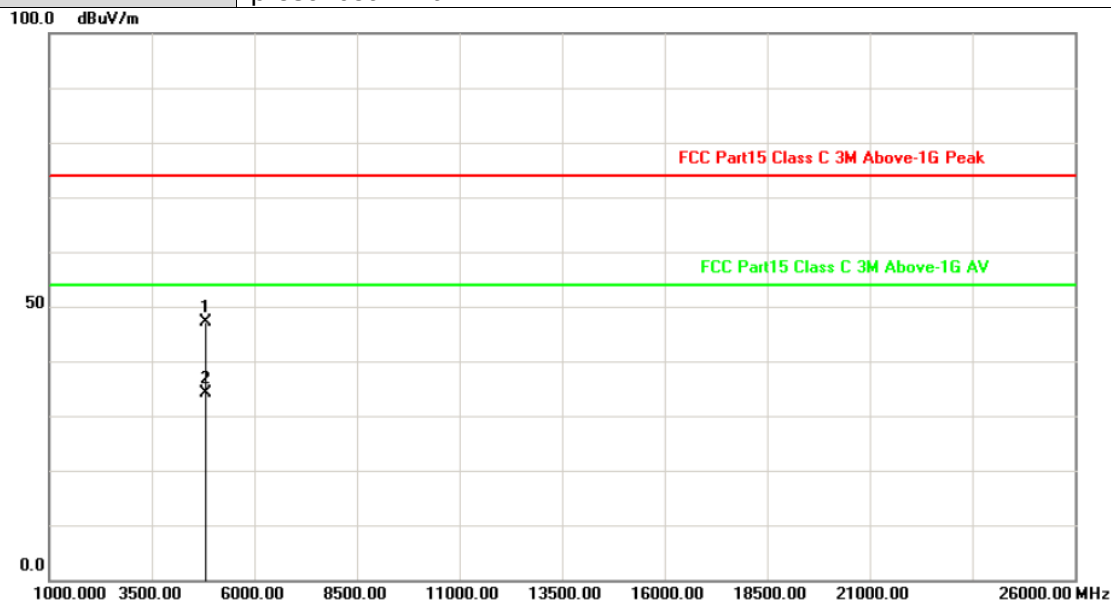


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.345	-3.26	50.37	47.11	74.00	-26.89	peak
2	4823.630	-3.26	37.31	34.05	54.00	-19.95	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

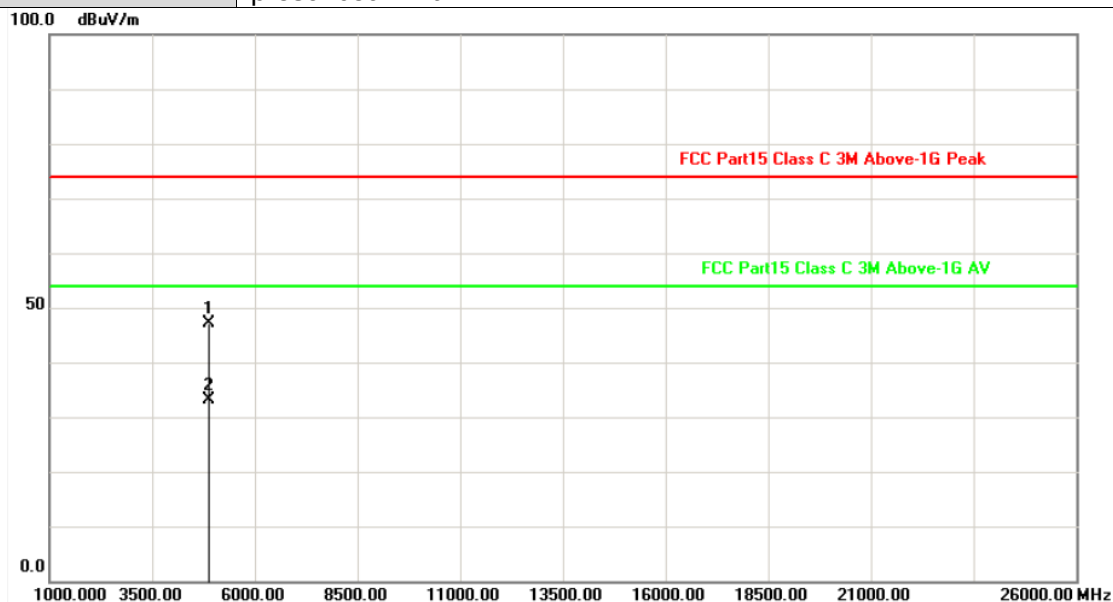


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4872.626	-3.13	50.26	47.13	74.00	-26.87	peak
2	4874.945	-3.13	36.35	33.22	54.00	-20.78	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

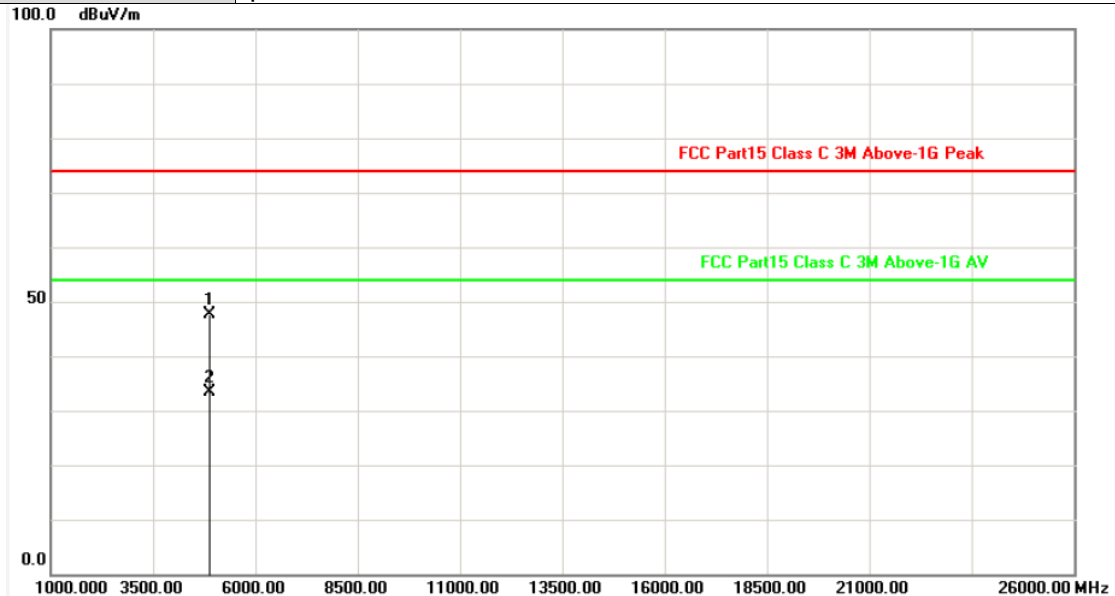


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4876.125	-3.13	50.78	47.65	74.00	-26.35	peak
2	4874.915	-3.13	36.42	33.29	54.00	-20.71	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

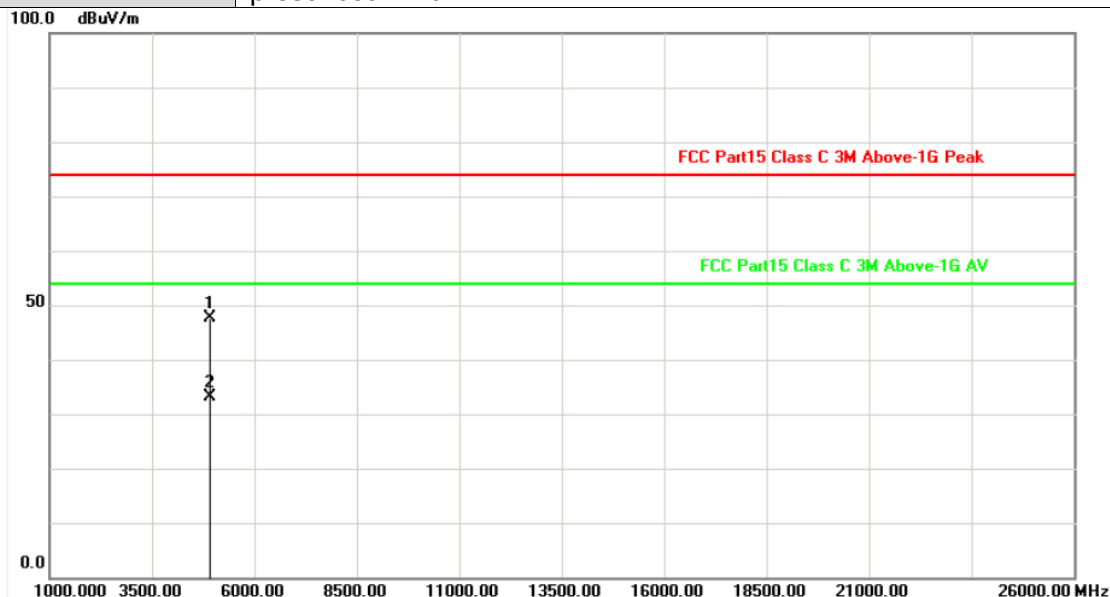

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4922.824	-3.00	50.58	47.58	74.00	-26.42	peak
2	4924.984	-3.00	36.24	33.24	54.00	-20.76	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

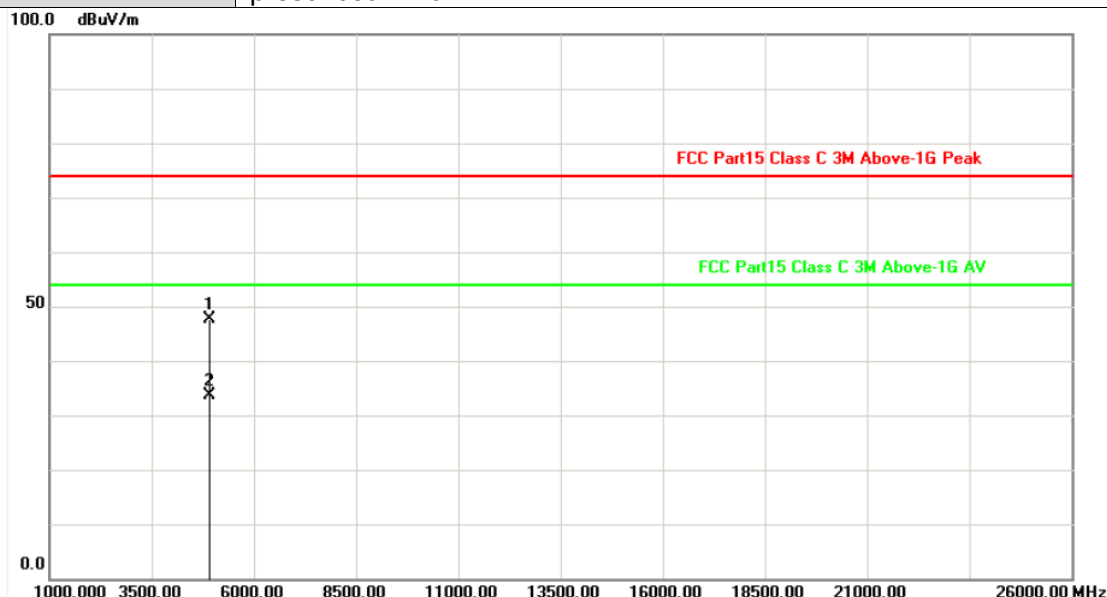


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.600	-3.00	50.55	47.55	74.00	-26.45	peak
2	4922.765	-3.00	36.55	33.55	54.00	-20.45	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

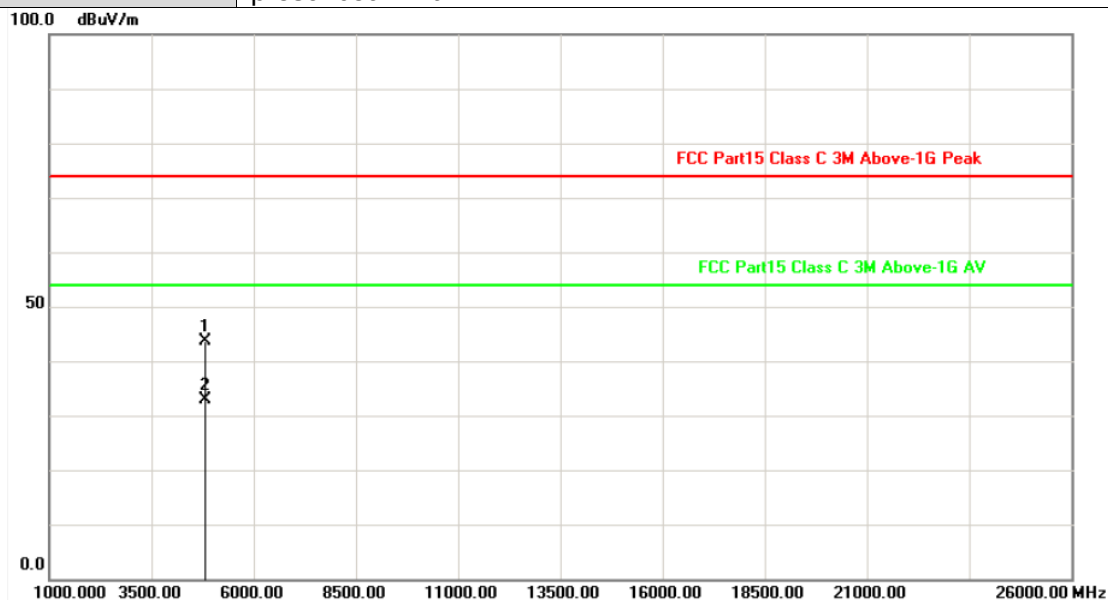


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.778	-3.26	46.91	43.65	74.00	-30.35	peak
2	4823.883	-3.26	36.25	32.99	54.00	-21.01	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

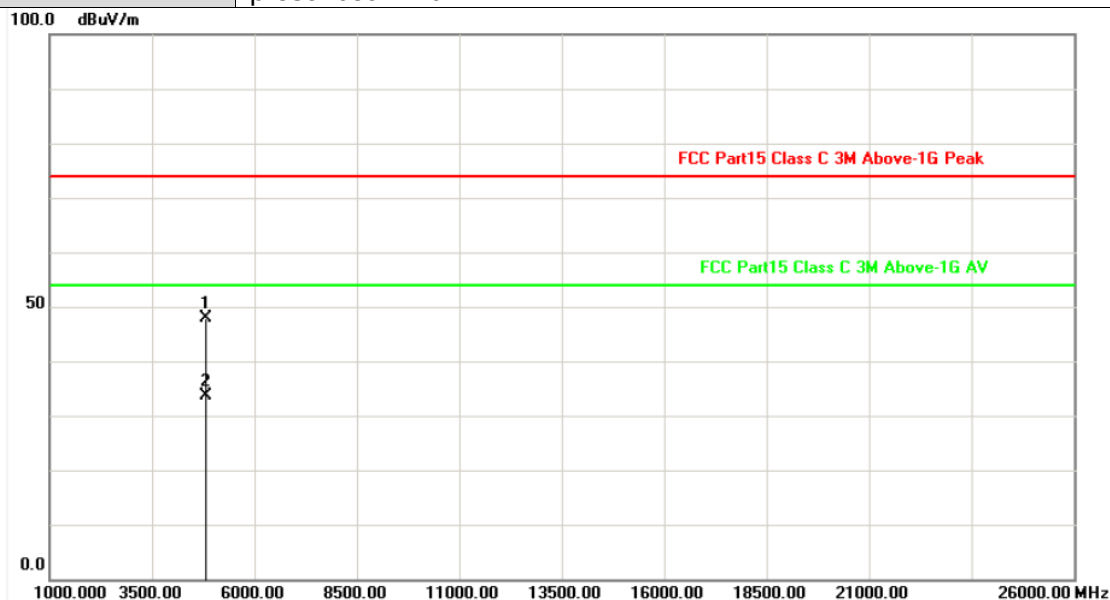


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.930	-3.26	51.10	47.84	74.00	-26.16	peak
2	4823.970	-3.26	36.95	33.69	54.00	-20.31	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

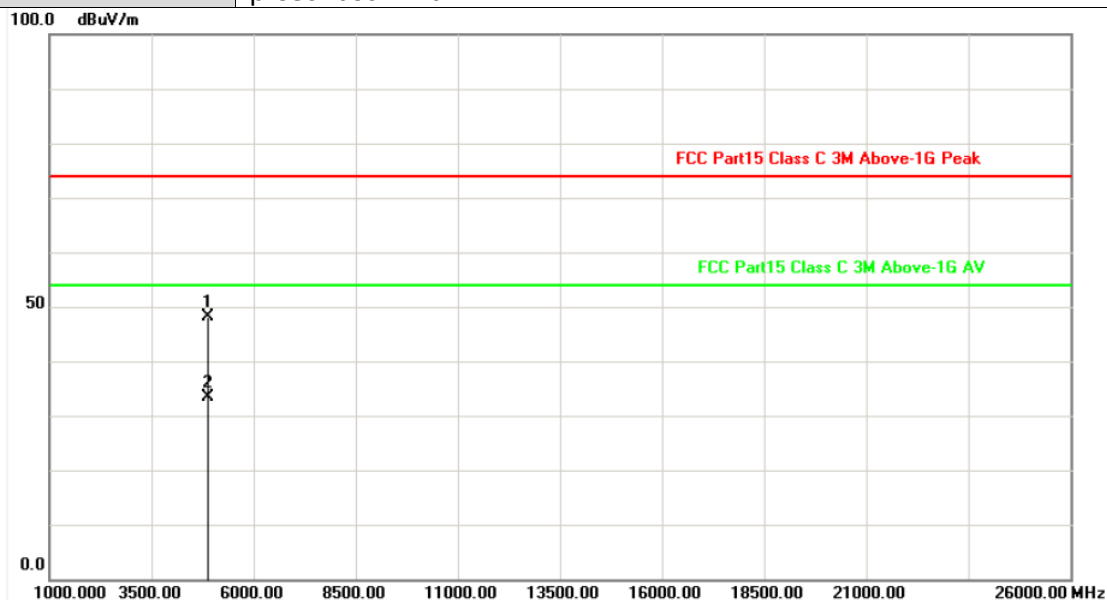


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4872.605	-3.13	51.20	48.07	74.00	-25.93	peak
2	4876.420	-3.13	36.46	33.33	54.00	-20.67	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

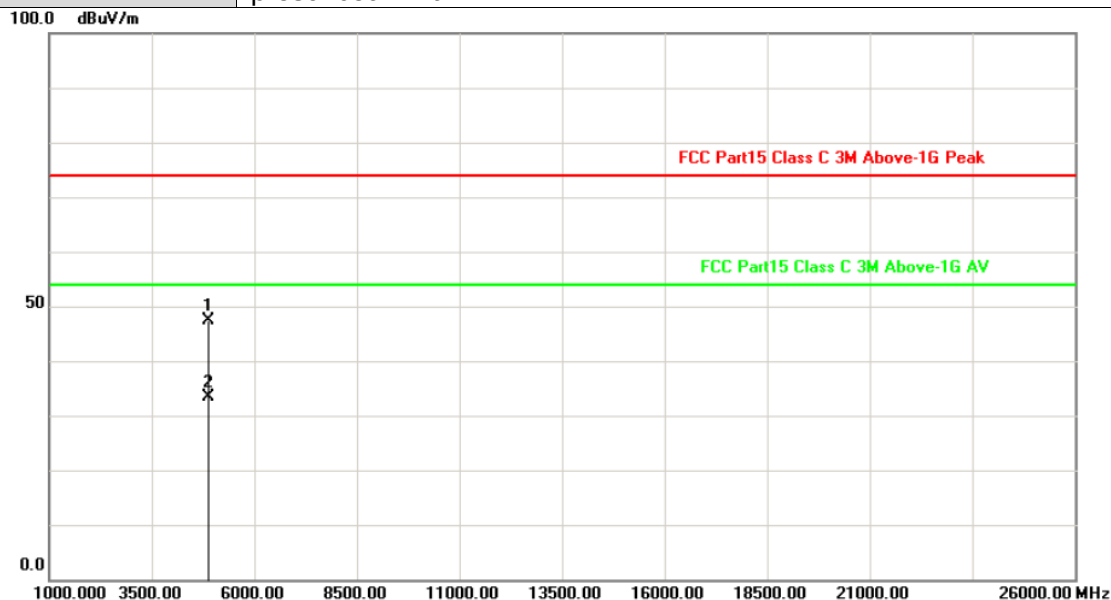


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4875.135	-3.13	50.60	47.47	74.00	-26.53	peak
2	4876.060	-3.13	36.41	33.28	54.00	-20.72	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

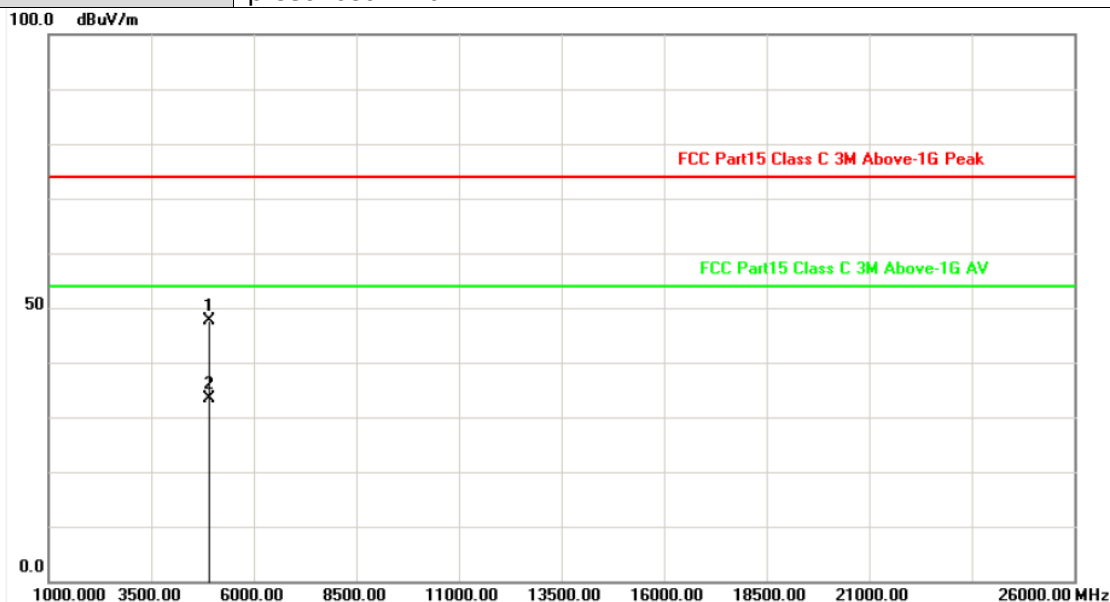


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.205	-3.00	50.67	47.67	74.00	-26.33	peak
2	4921.500	-3.01	36.29	33.28	54.00	-20.72	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

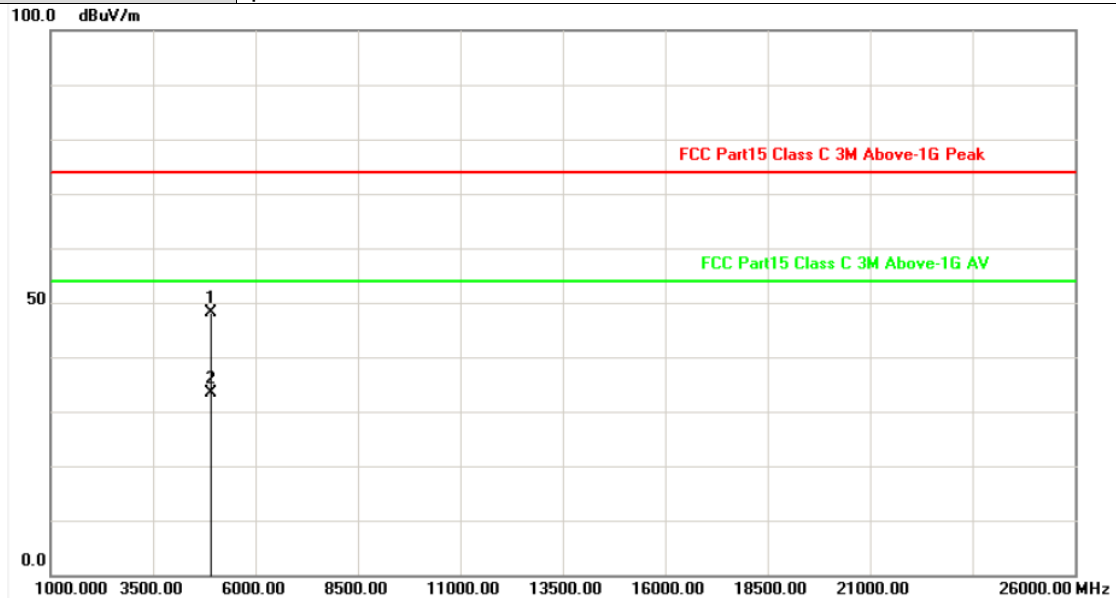


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.790	-3.00	51.03	48.03	74.00	-25.97	peak
2	4922.405	-3.01	36.27	33.26	54.00	-20.74	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

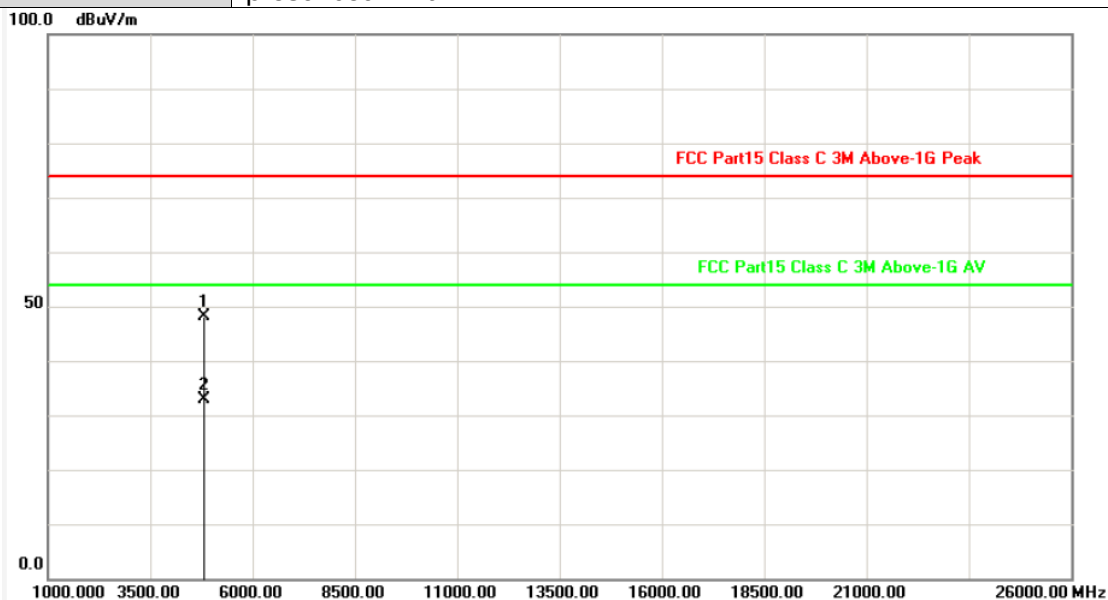


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4825.795	-3.26	51.51	48.25	74.00	-25.75	peak
2	4824.410	-3.26	36.23	32.97	54.00	-21.03	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

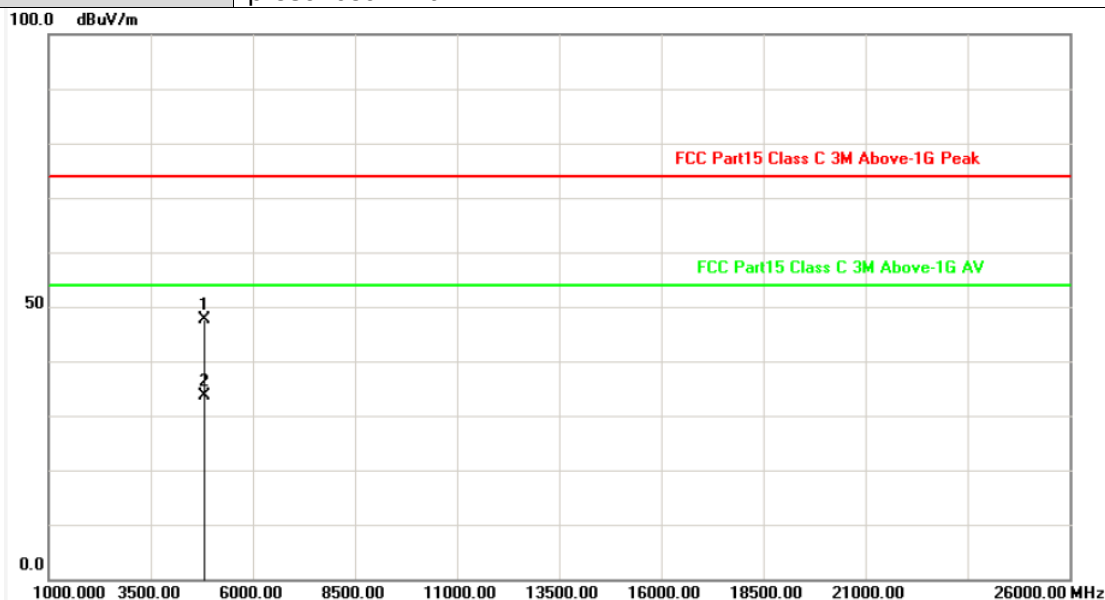


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.470	-3.26	50.85	47.59	74.00	-26.41	peak
2	4824.050	-3.26	36.94	33.68	54.00	-20.32	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

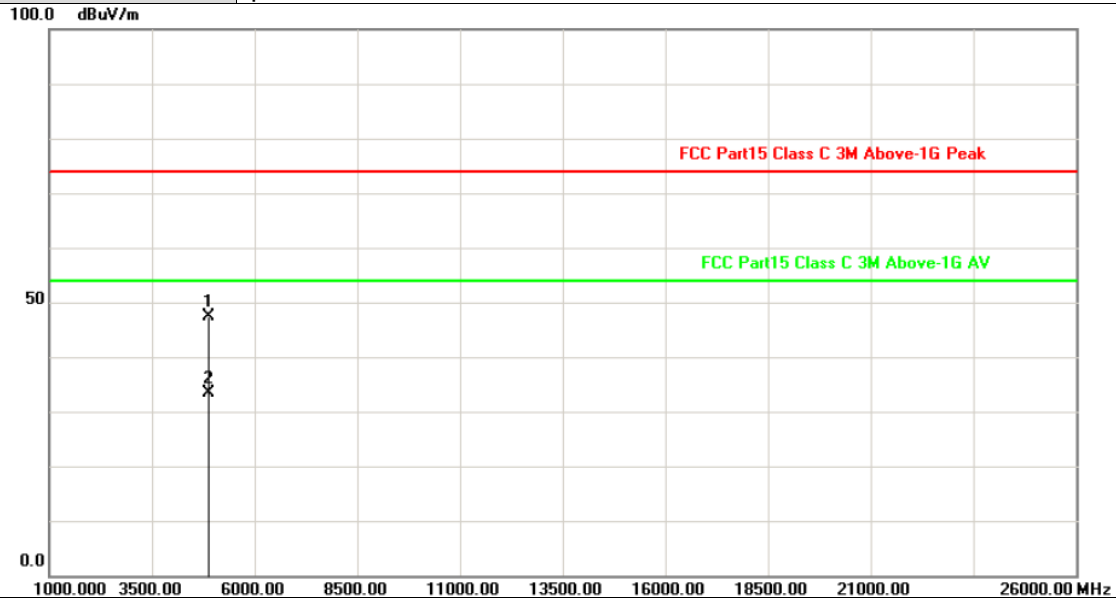


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.400	-3.13	50.48	47.35	74.00	-26.65	peak
2	4875.895	-3.13	36.46	33.33	54.00	-20.67	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

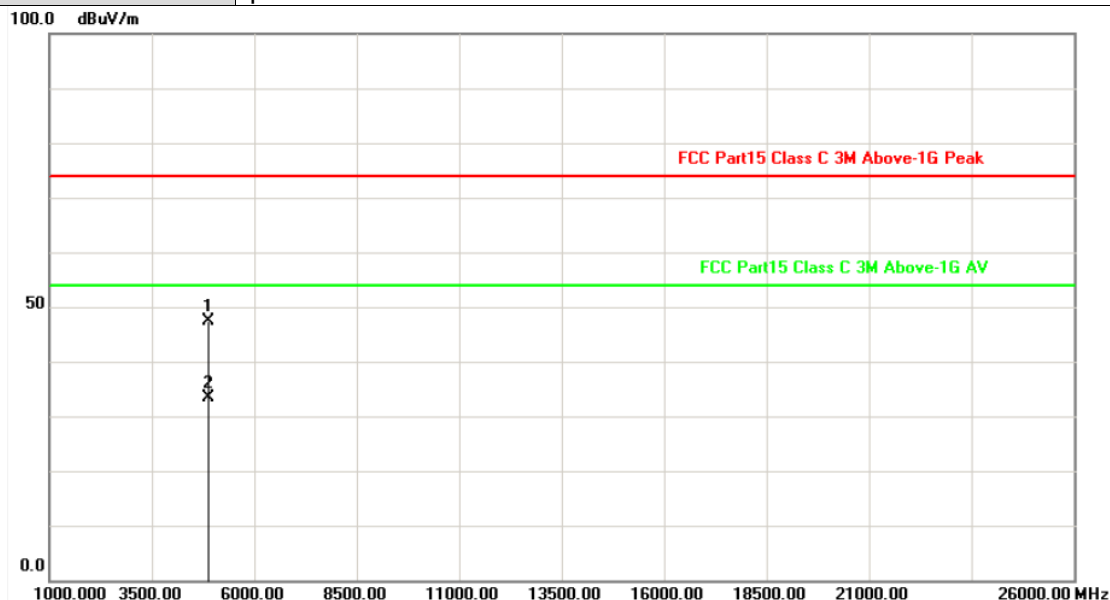


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4875.720	-3.13	50.61	47.48	74.00	-26.52	peak
2	4876.120	-3.13	36.48	33.35	54.00	-20.65	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

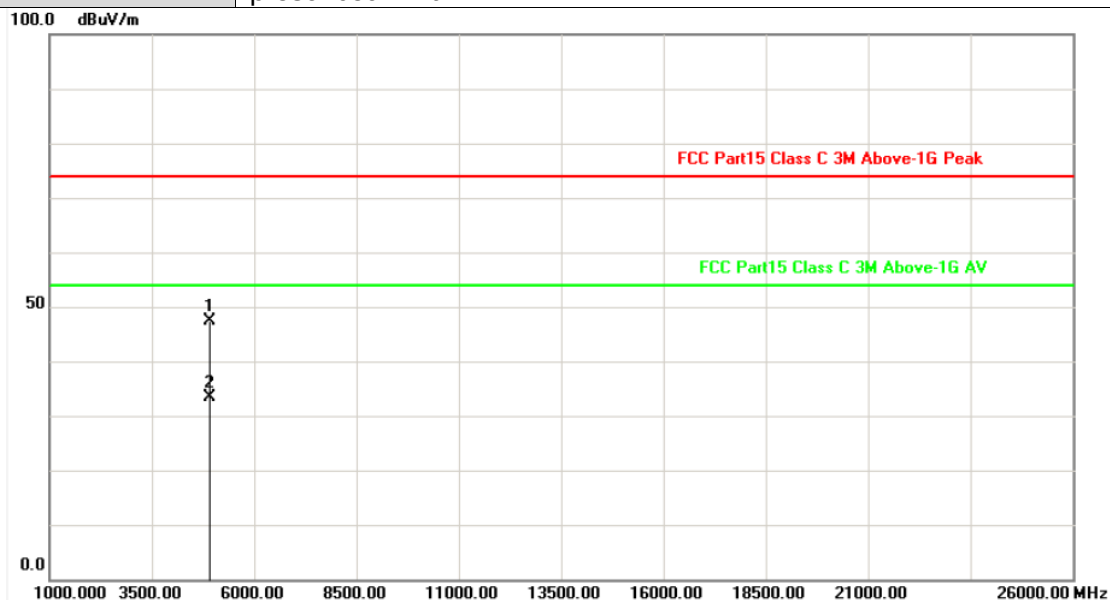


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4926.295	-3.00	50.29	47.29	74.00	-26.71	peak
2	4921.560	-3.01	36.31	33.30	54.00	-20.70	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

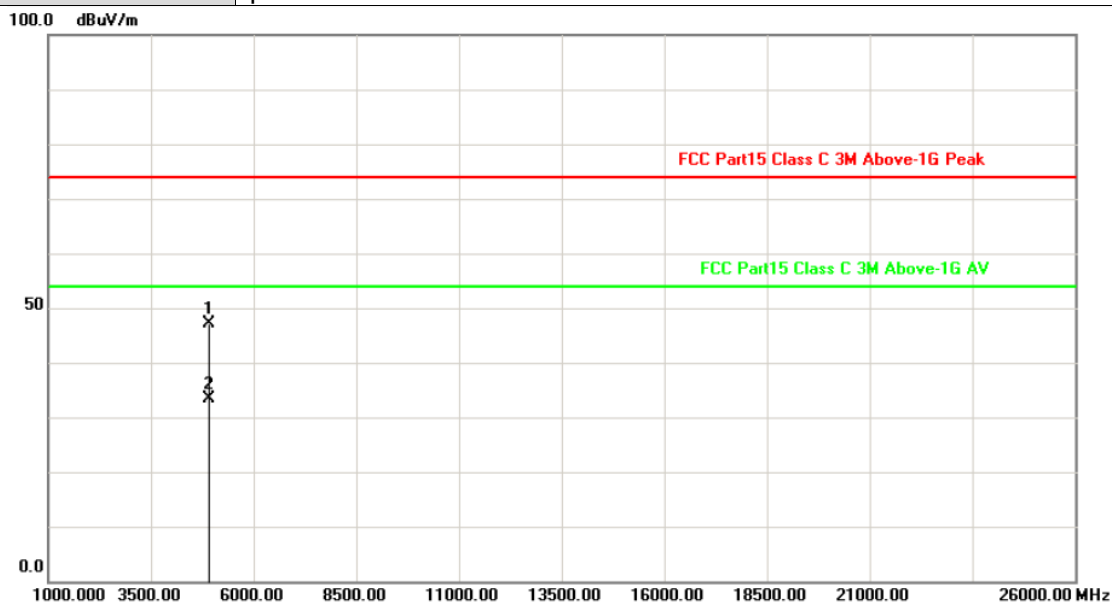


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4921.525	-3.01	50.13	47.12	74.00	-26.88	peak
2	4921.740	-3.01	36.31	33.30	54.00	-20.70	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

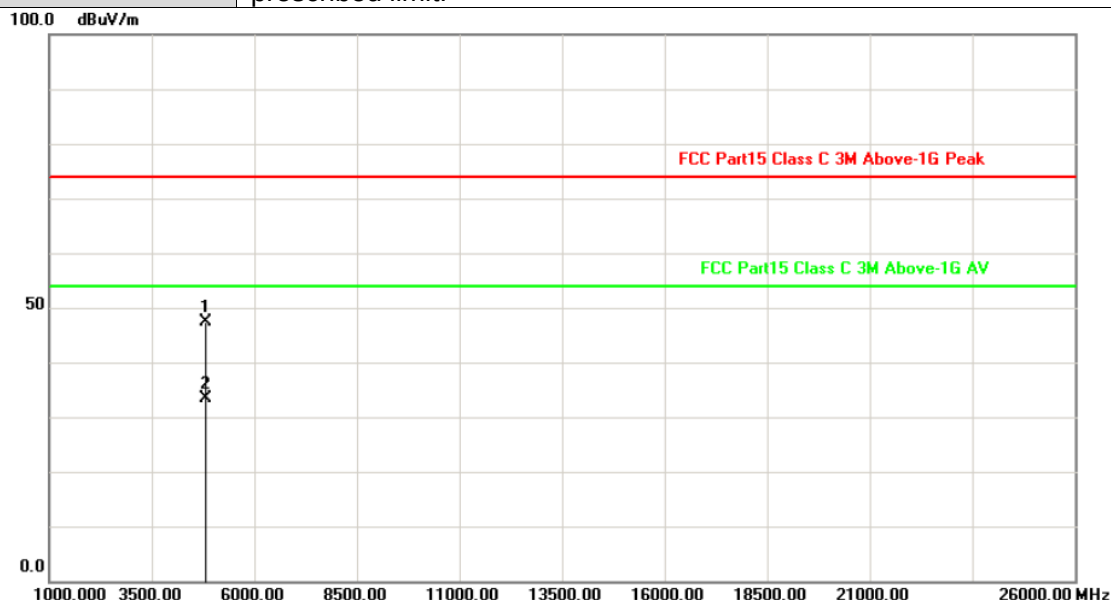

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4826.345	-3.26	50.59	47.33	74.00	-26.67	peak
2	4824.090	-3.26	36.58	33.32	54.00	-20.68	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

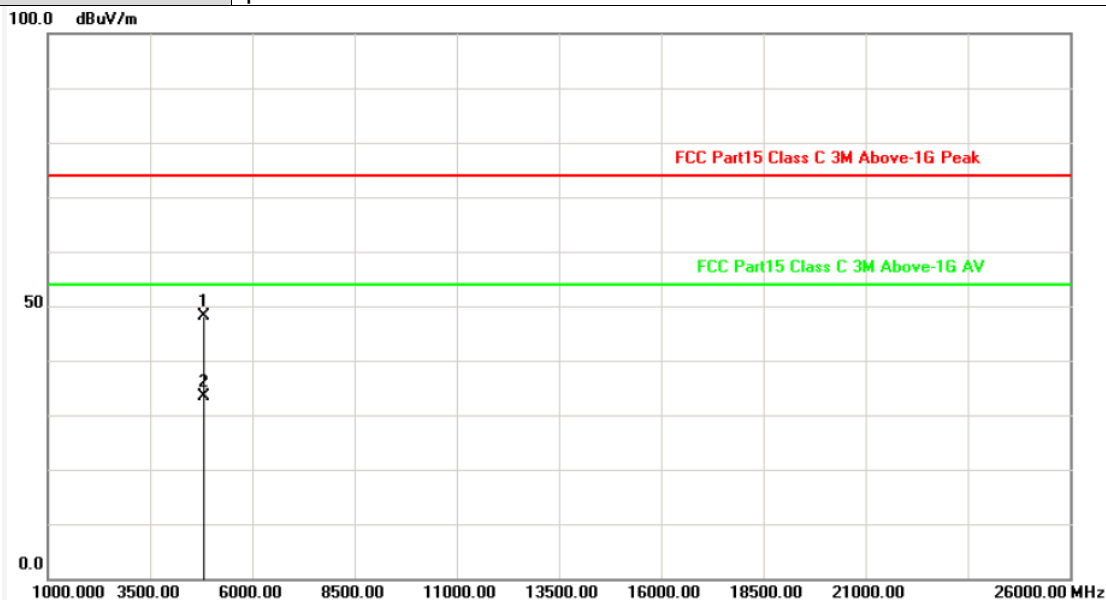


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.345	-3.26	51.28	48.02	74.00	-25.98	peak
2	4824.775	-3.26	36.57	33.31	54.00	-20.69	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

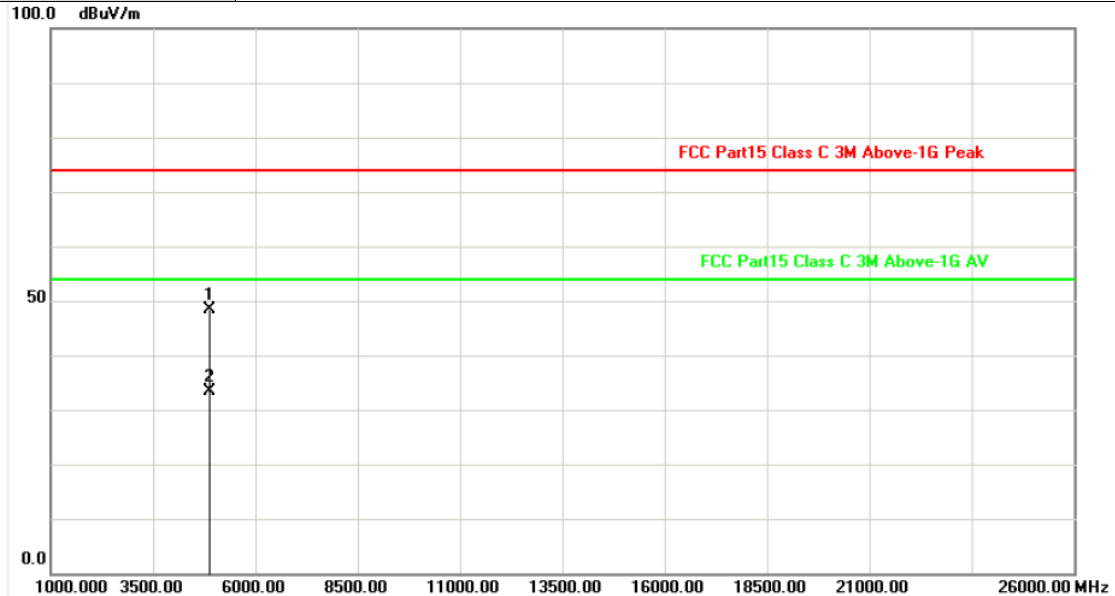


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.810	-3.13	51.52	48.39	74.00	-25.61	peak
2	4875.495	-3.13	36.63	33.50	54.00	-20.50	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

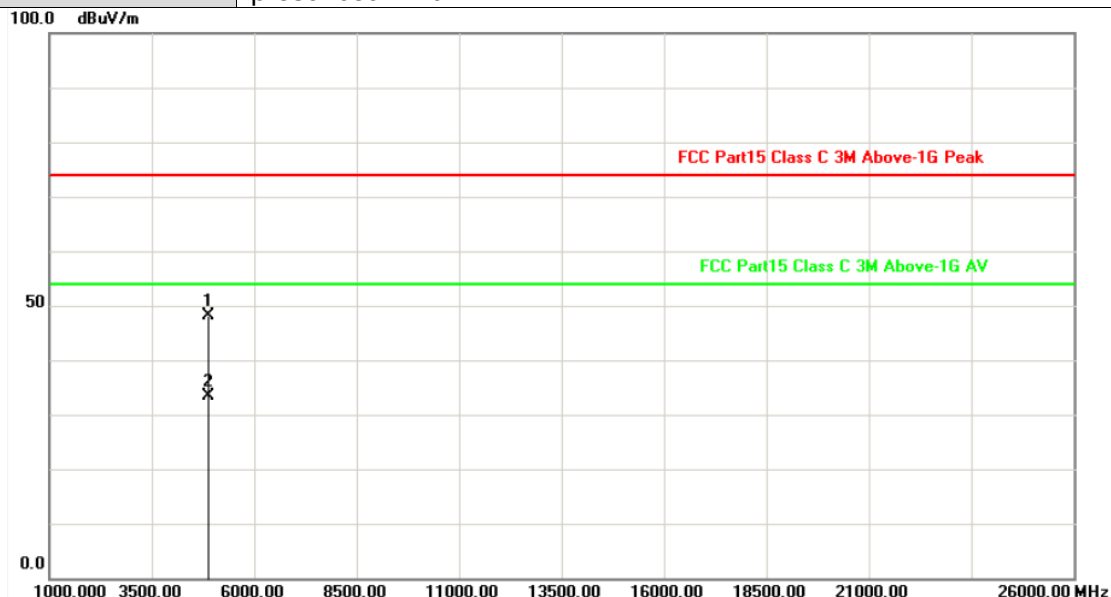


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.305	-3.13	51.16	48.03	74.00	-25.97	peak
2	4875.455	-3.13	36.63	33.50	54.00	-20.50	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX B Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

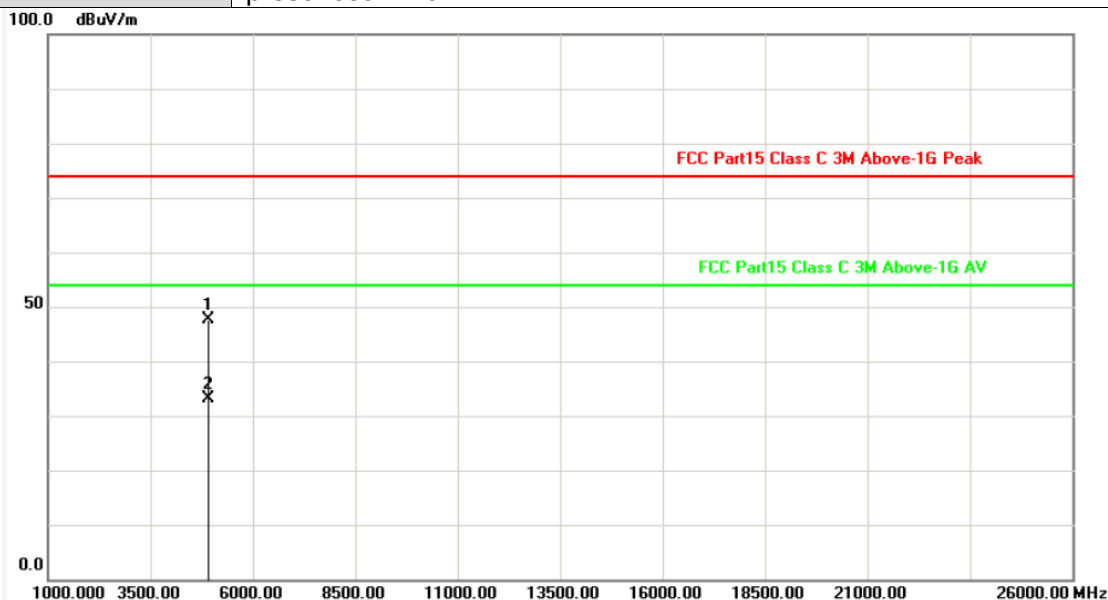


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4925.295	-3.00	50.55	47.55	74.00	-26.45	peak
2	4925.835	-3.00	36.22	33.22	54.00	-20.78	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX B Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

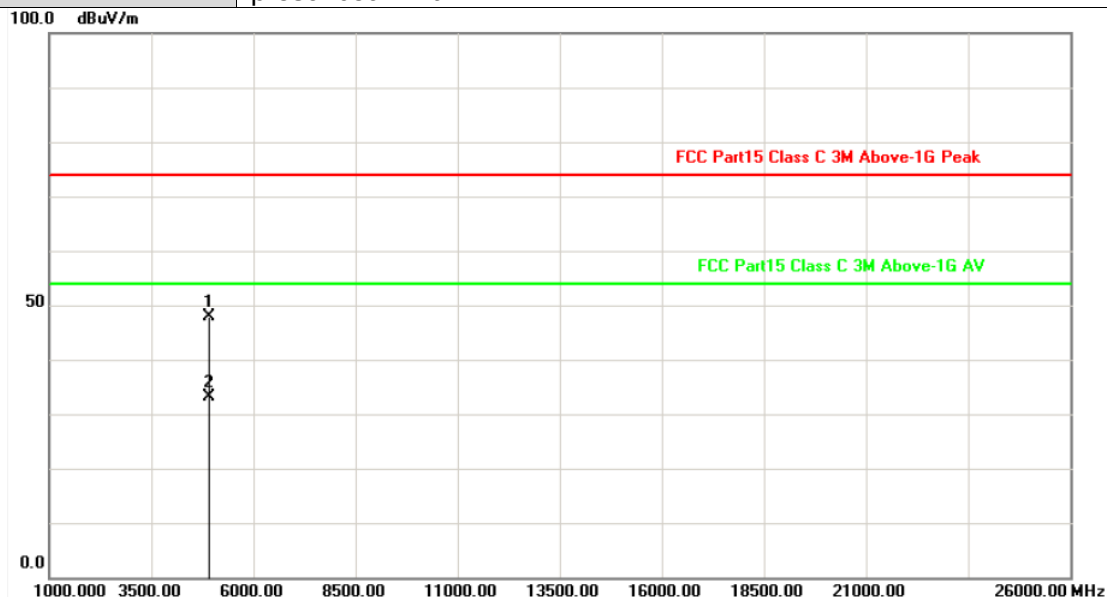

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4922.420	-3.01	50.82	47.81	74.00	-26.19	peak
2	4922.205	-3.01	36.23	33.22	54.00	-20.78	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

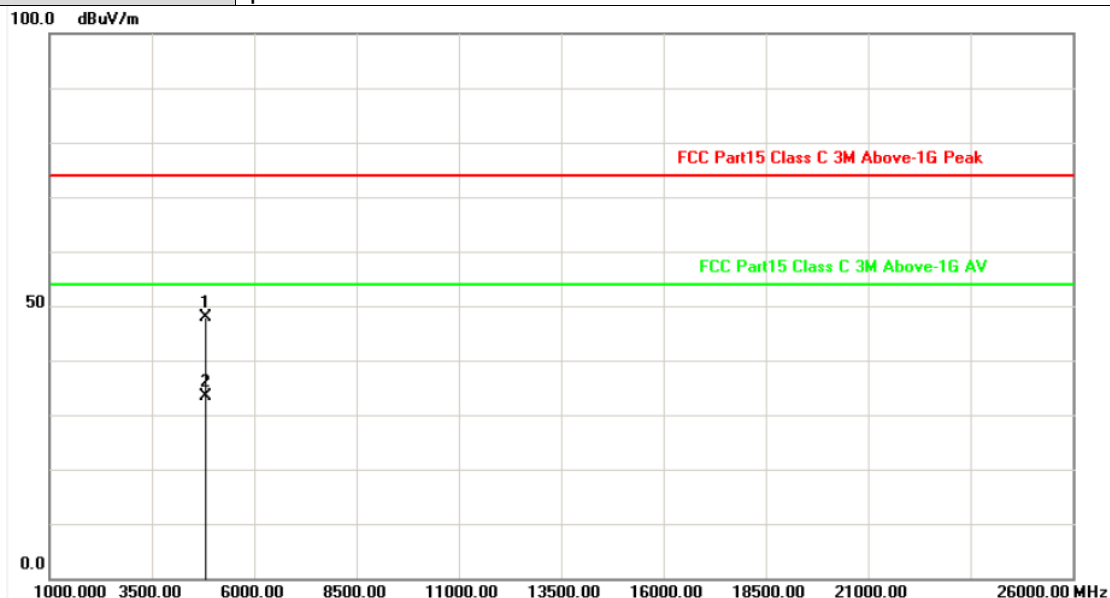


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4822.055	-3.27	51.20	47.93	74.00	-26.07	peak
2	4822.865	-3.26	36.57	33.31	54.00	-20.69	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

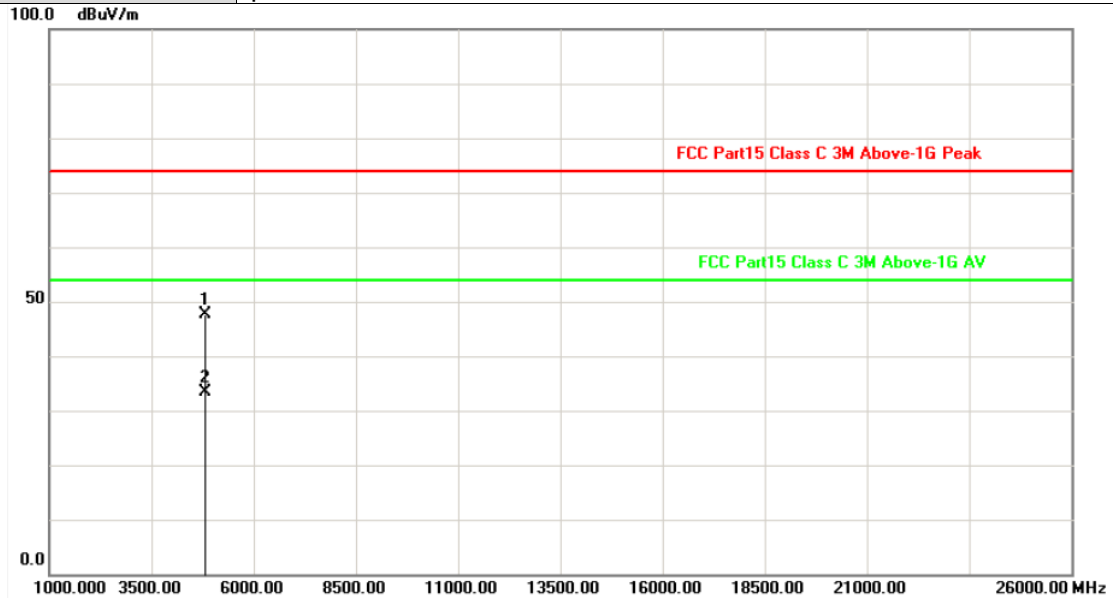


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.120	-3.26	50.84	47.58	74.00	-26.42	peak
2	4825.295	-3.26	36.57	33.31	54.00	-20.69	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

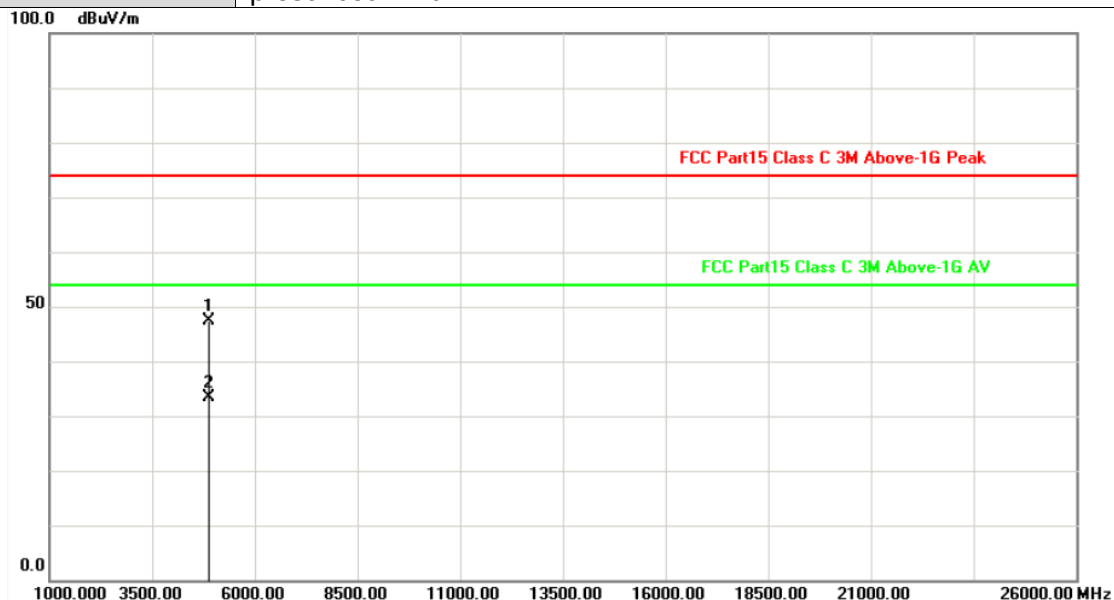


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.165	-3.13	50.53	47.40	74.00	-26.60	peak
2	4874.495	-3.13	36.62	33.49	54.00	-20.51	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

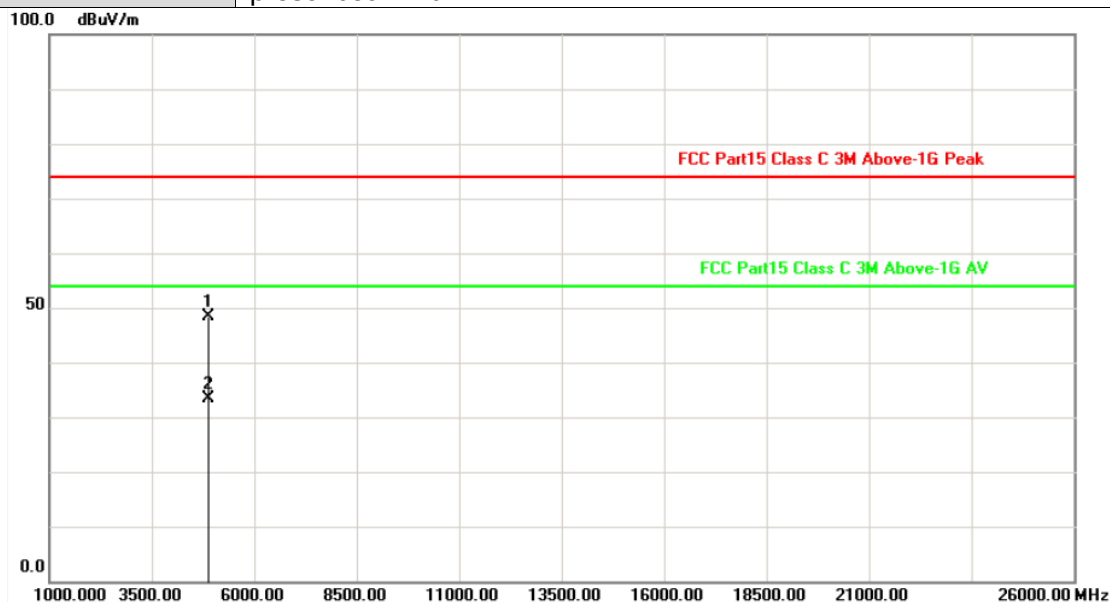


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4876.270	-3.13	51.43	48.30	74.00	-25.70	peak
2	4874.450	-3.13	36.60	33.47	54.00	-20.53	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX G Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

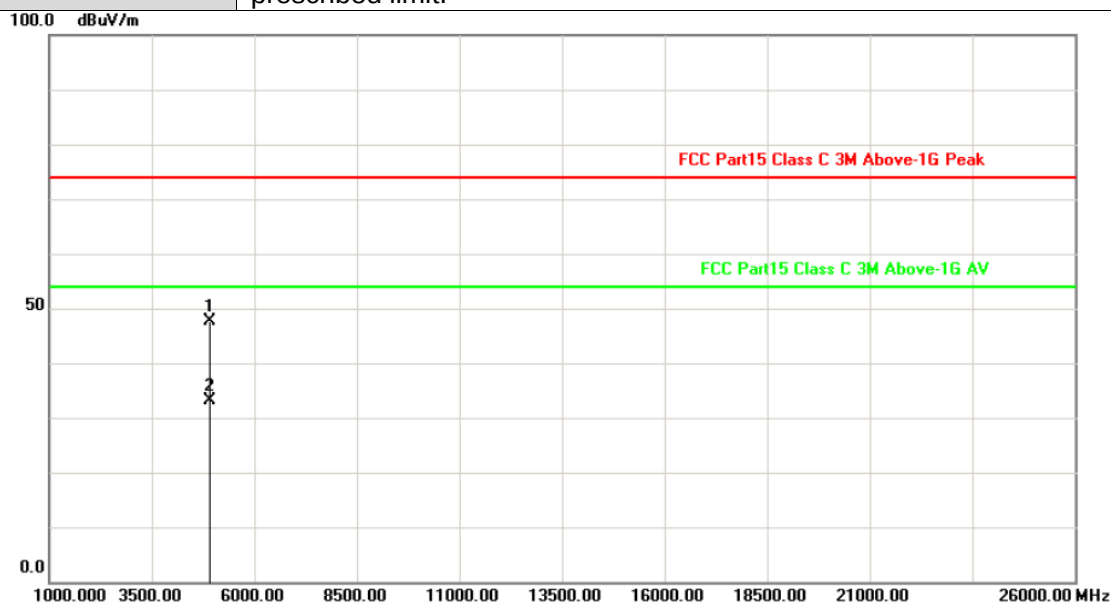


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.345	-3.00	50.53	47.53	74.00	-26.47	peak
2	4926.240	-3.00	36.21	33.21	54.00	-20.79	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX G Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

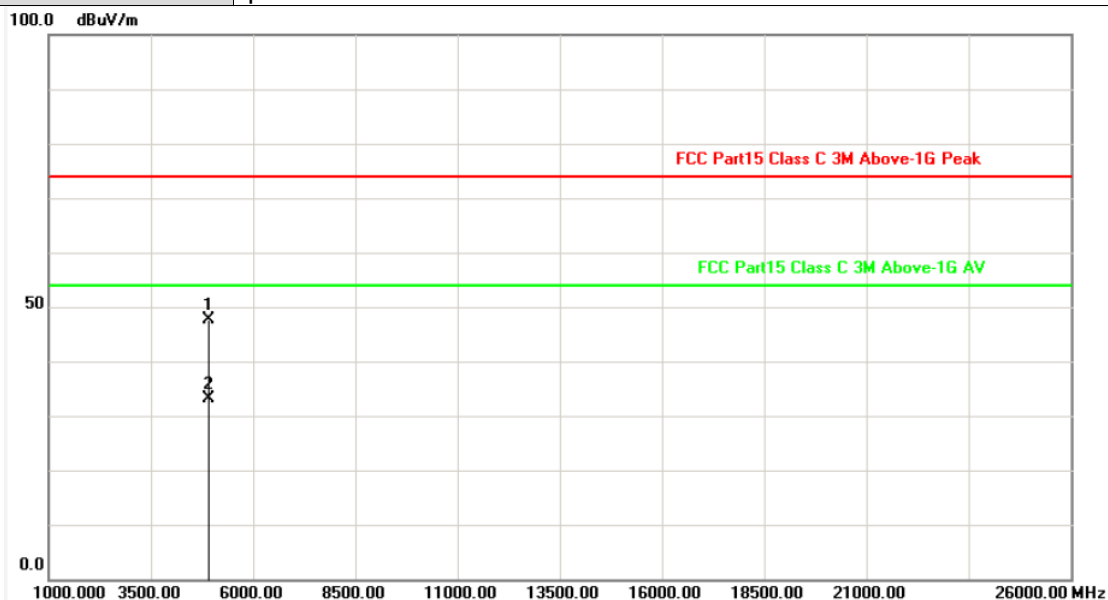


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4925.560	-3.00	50.63	47.63	74.00	-26.37	peak
2	4922.365	-3.01	36.20	33.19	54.00	-20.81	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

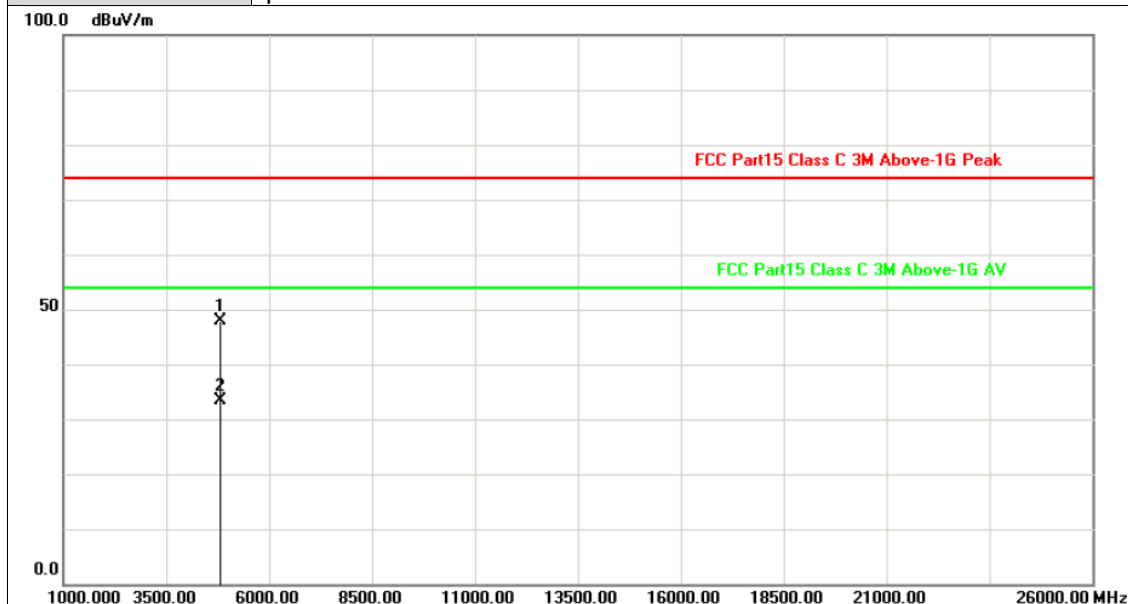


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4822.325	-3.27	51.04	47.77	74.00	-26.23	peak
2	4823.065	-3.26	36.58	33.32	54.00	-20.68	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

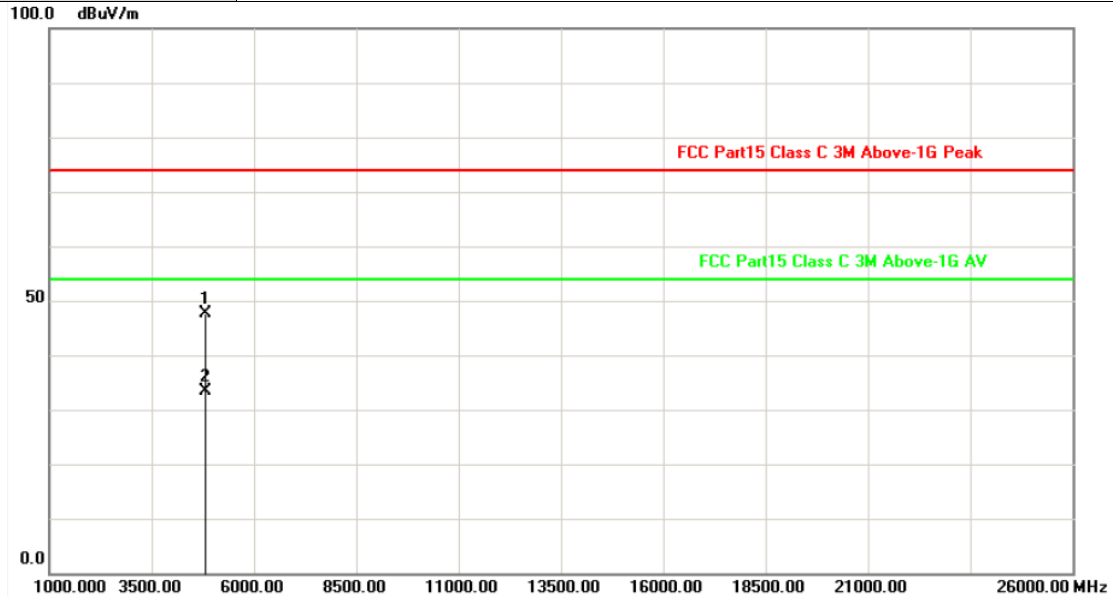


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4825.610	-3.26	50.86	47.60	74.00	-26.40	peak
2	4823.630	-3.26	36.57	33.31	54.00	-20.69	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

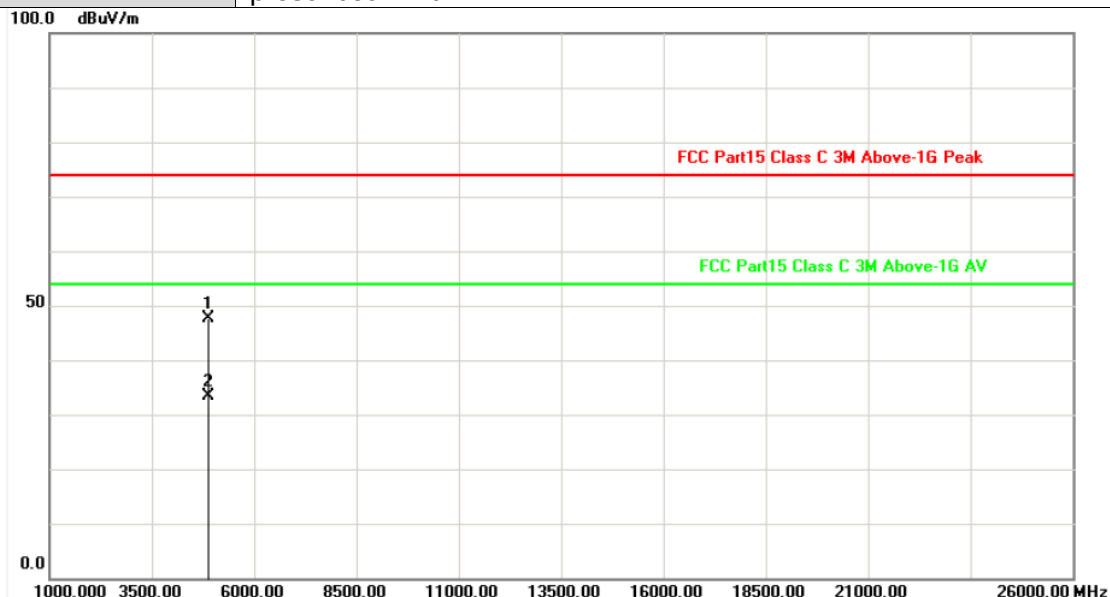


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4875.140	-3.13	50.76	47.63	74.00	-26.37	peak
2	4875.155	-3.13	36.62	33.49	54.00	-20.51	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

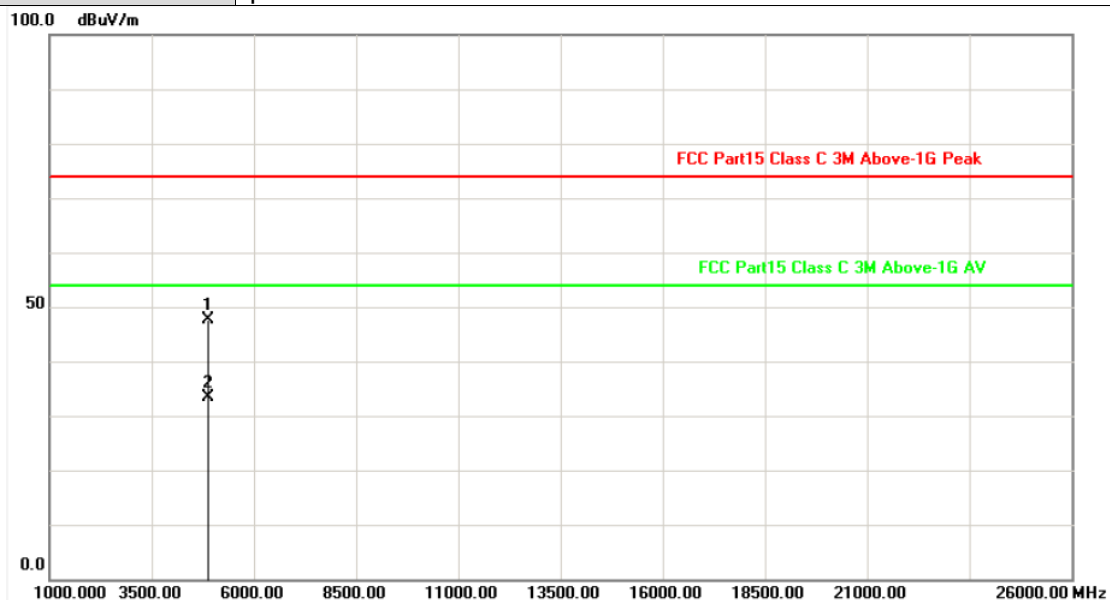


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4872.670	-3.13	50.87	47.74	74.00	-26.26	peak
2	4876.095	-3.13	36.62	33.49	54.00	-20.51	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX N20 Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

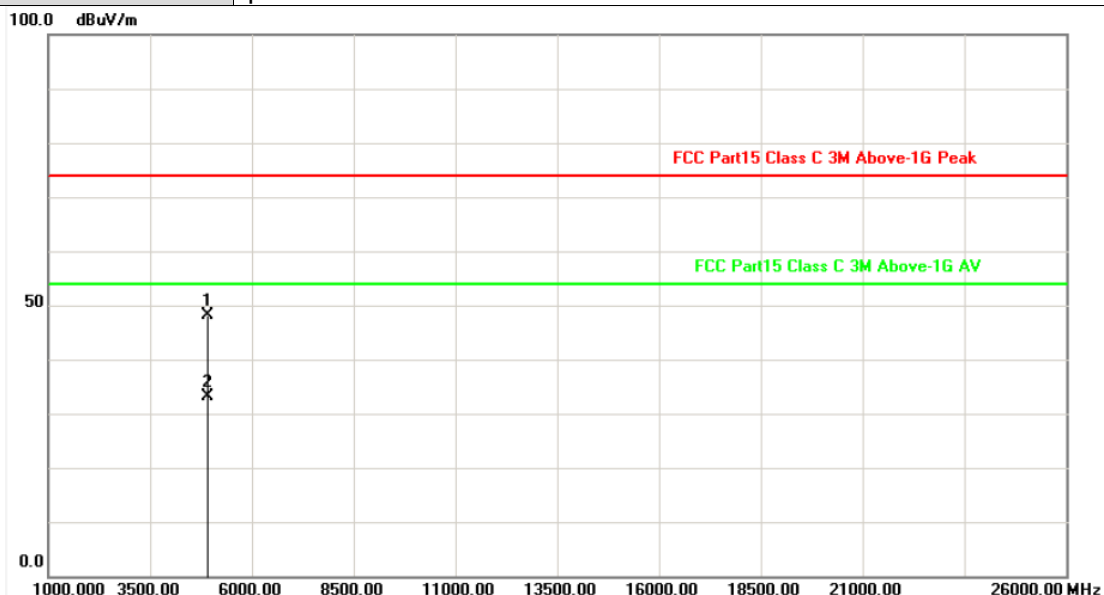


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4924.815	-3.00	51.01	48.01	74.00	-25.99	peak
2	4926.220	-3.00	36.20	33.20	54.00	-20.80	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant No.	Ant 2
Ant. Pol.	Vertical
Test Mode:	TX N20 Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

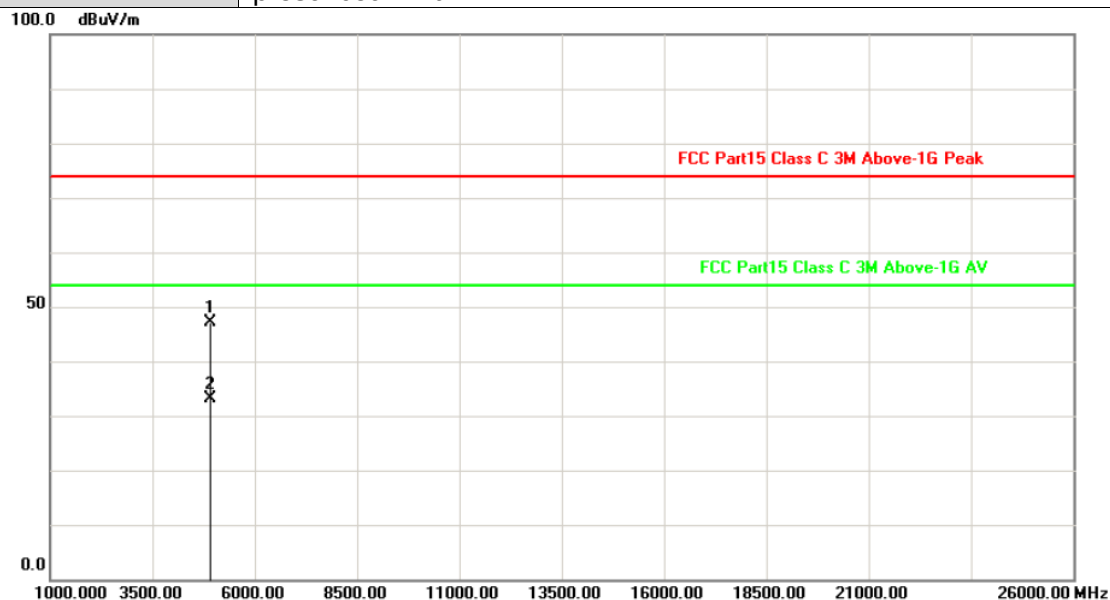

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4922.370	-3.01	50.25	47.24	74.00	-26.76	peak
2	4921.560	-3.01	36.19	33.18	54.00	-20.82	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

3.3. Band Edge Emissions


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS 247 5.5:

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Conducted band edge limit: The highest point of the operating frequency waveform down 20dB

Test Configuration

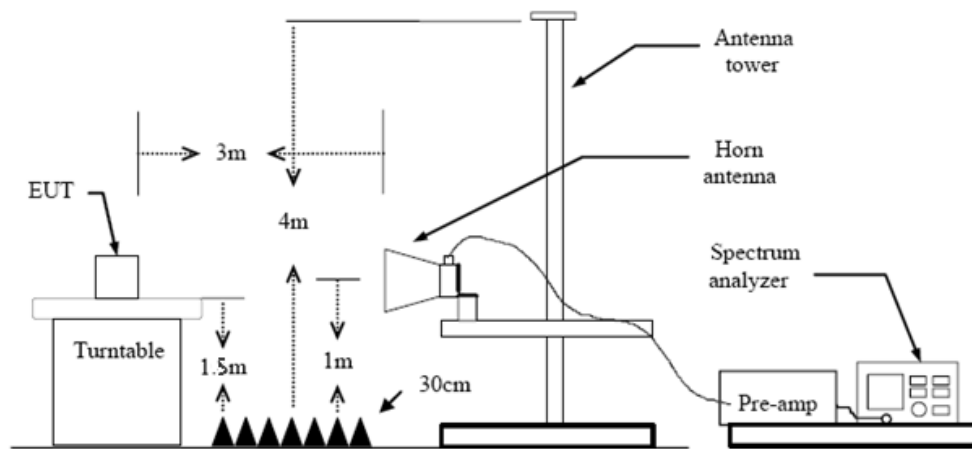

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.


Test Mode


Please refer to the clause 2.3.


Test Results





(1) Radiation Test

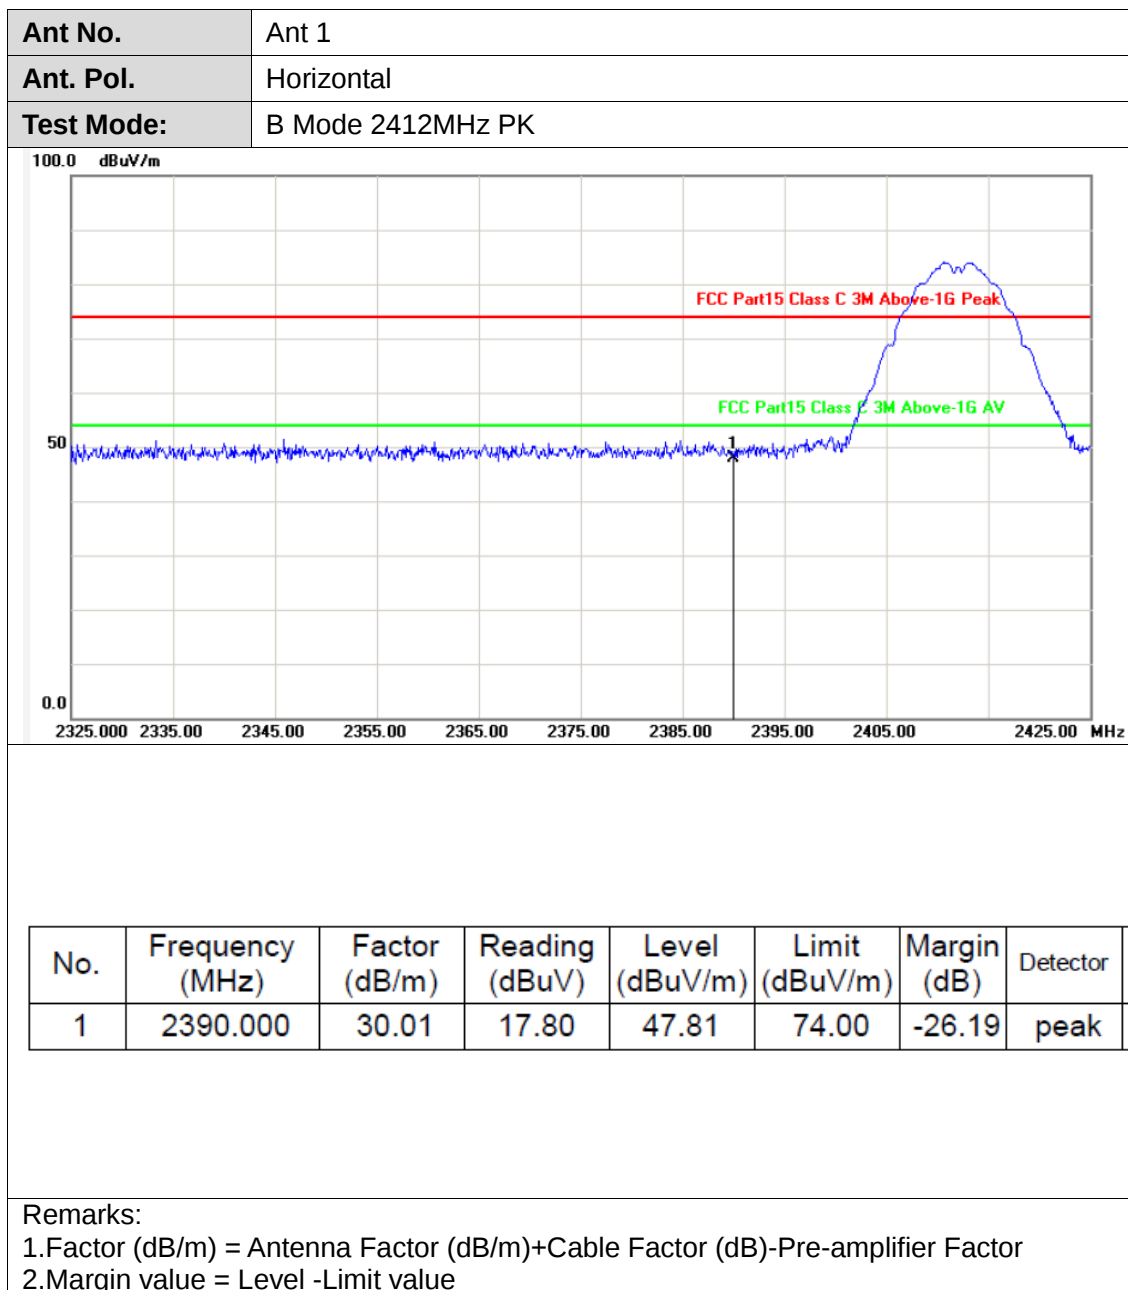


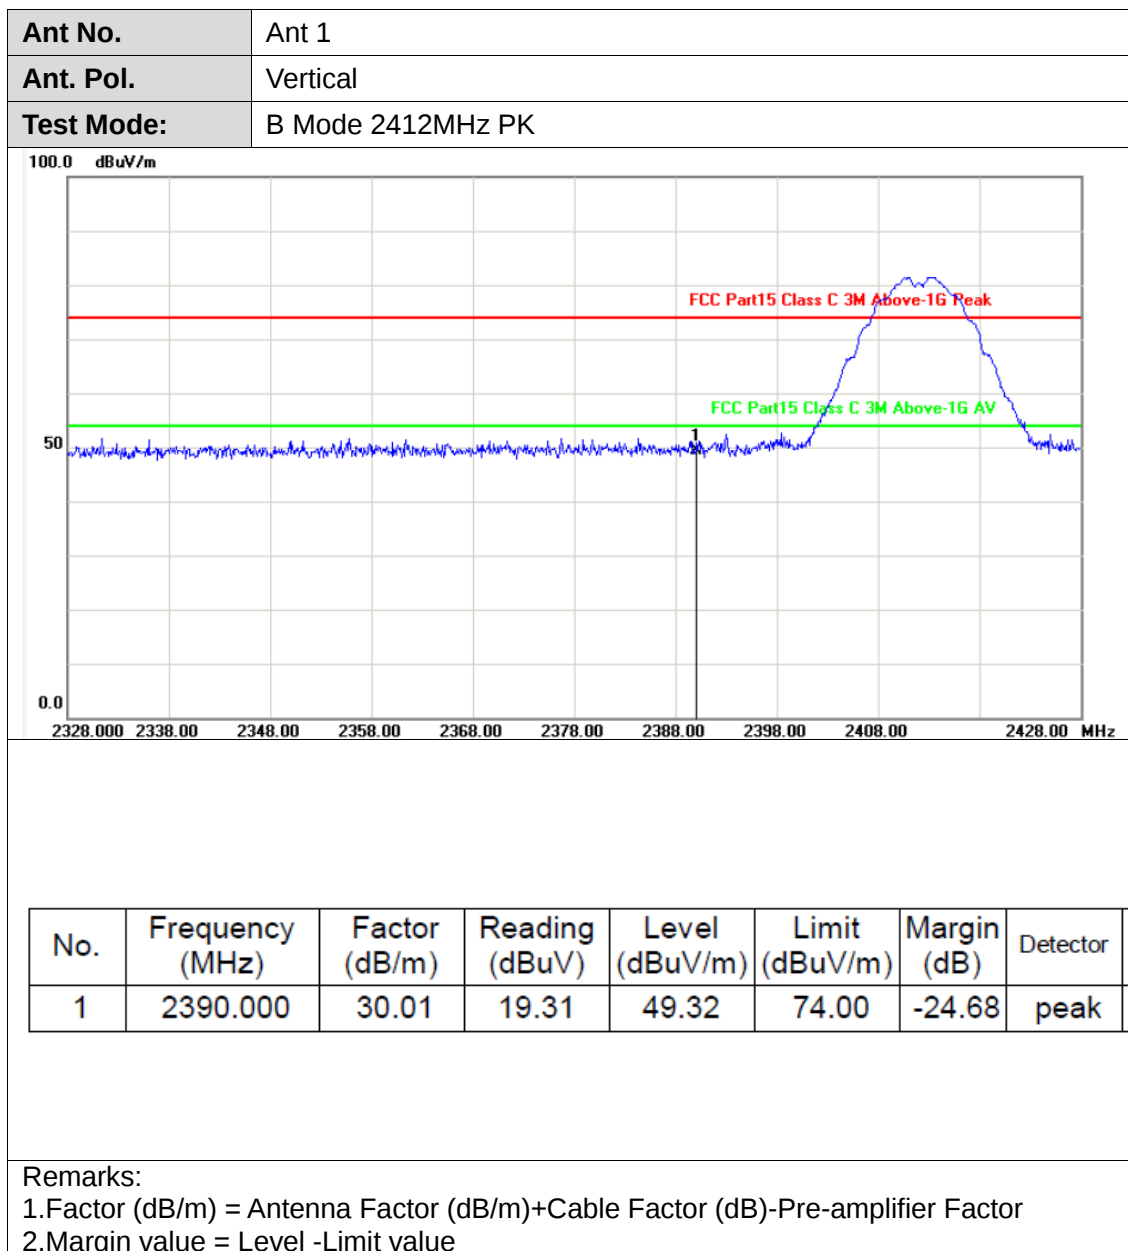


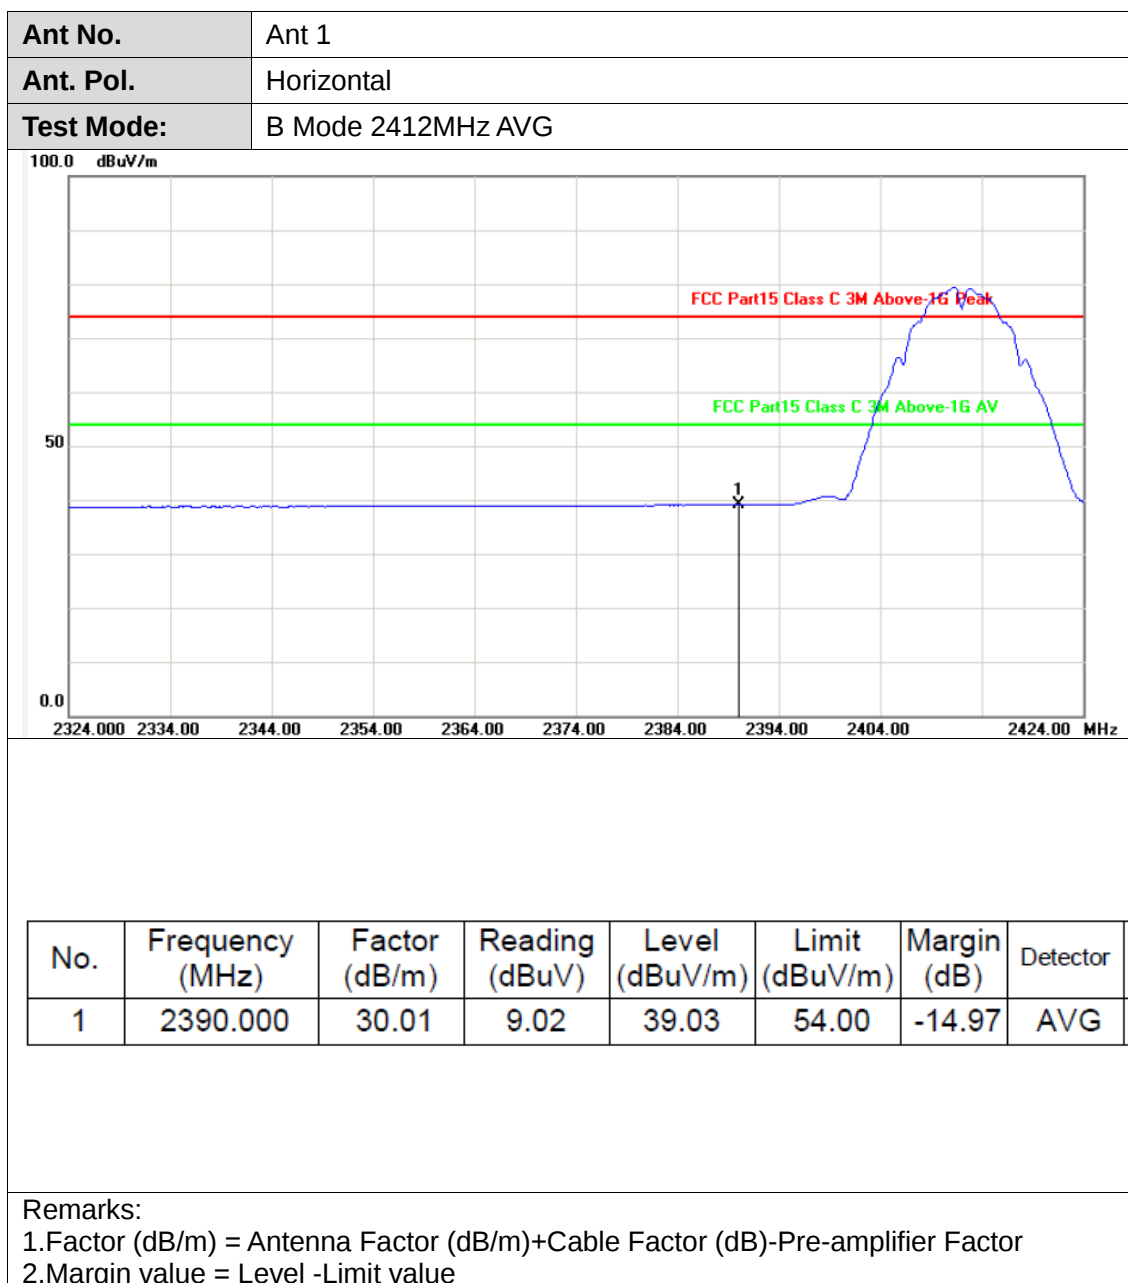


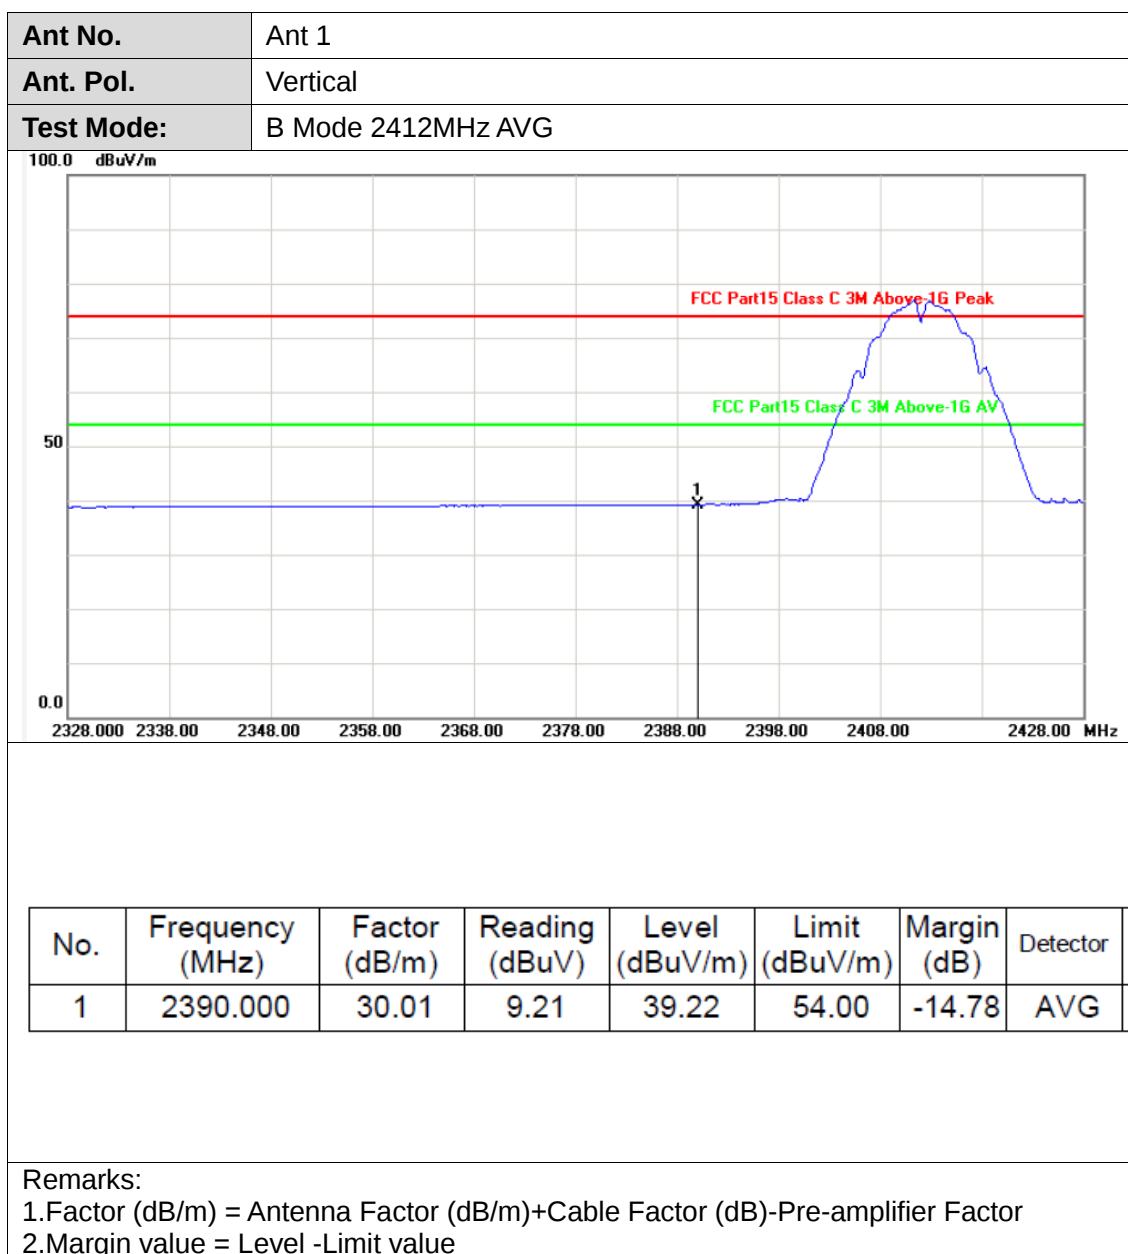


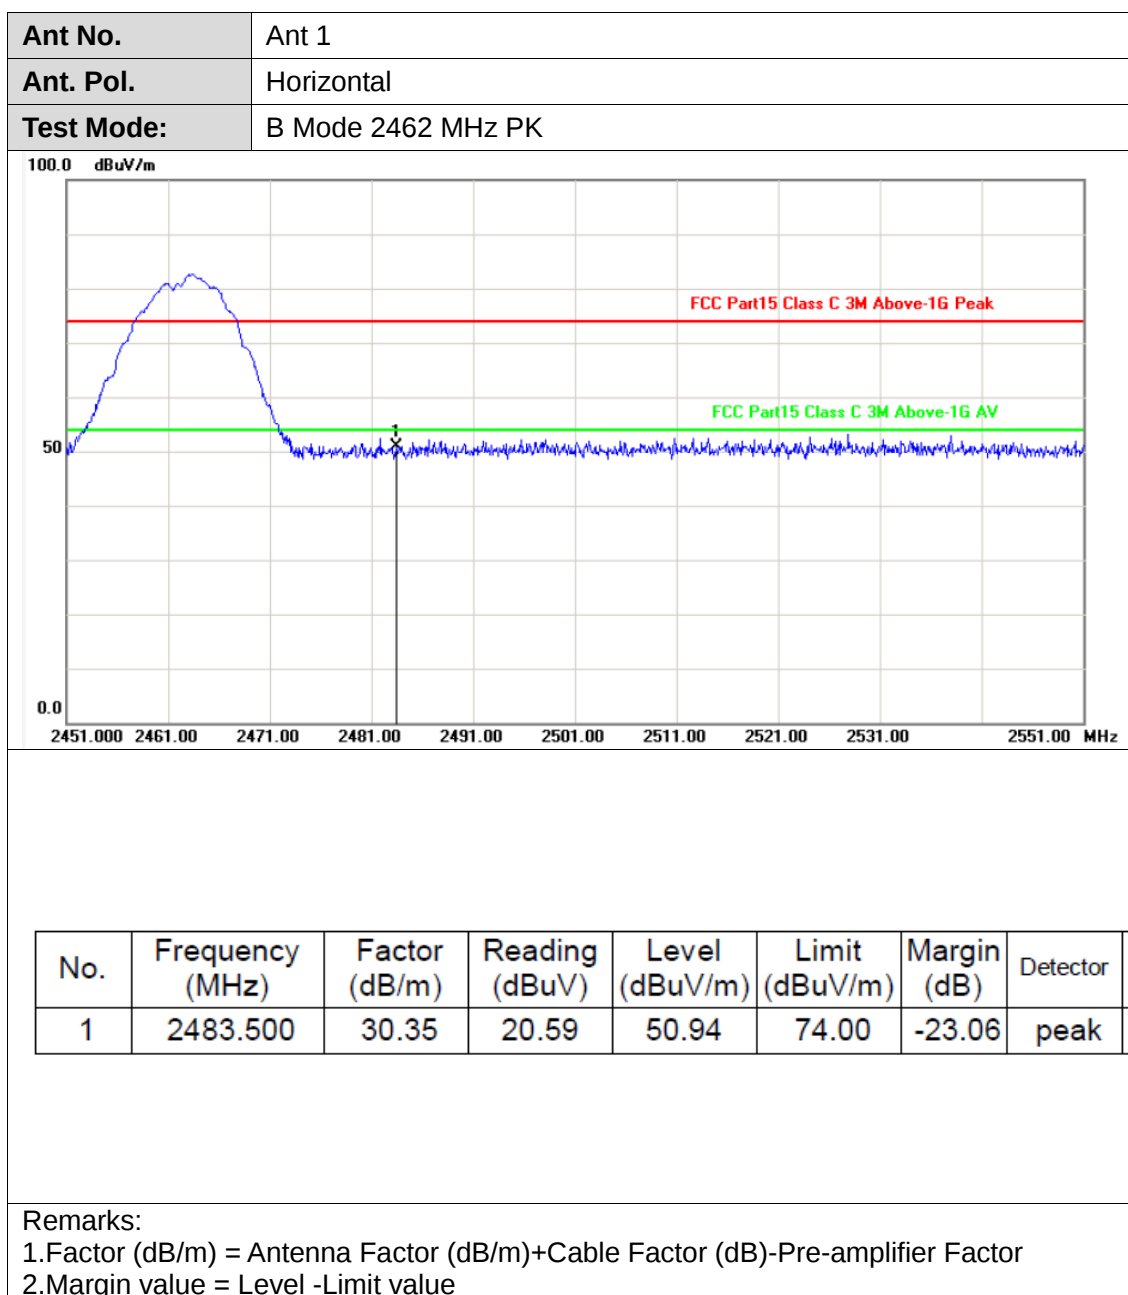


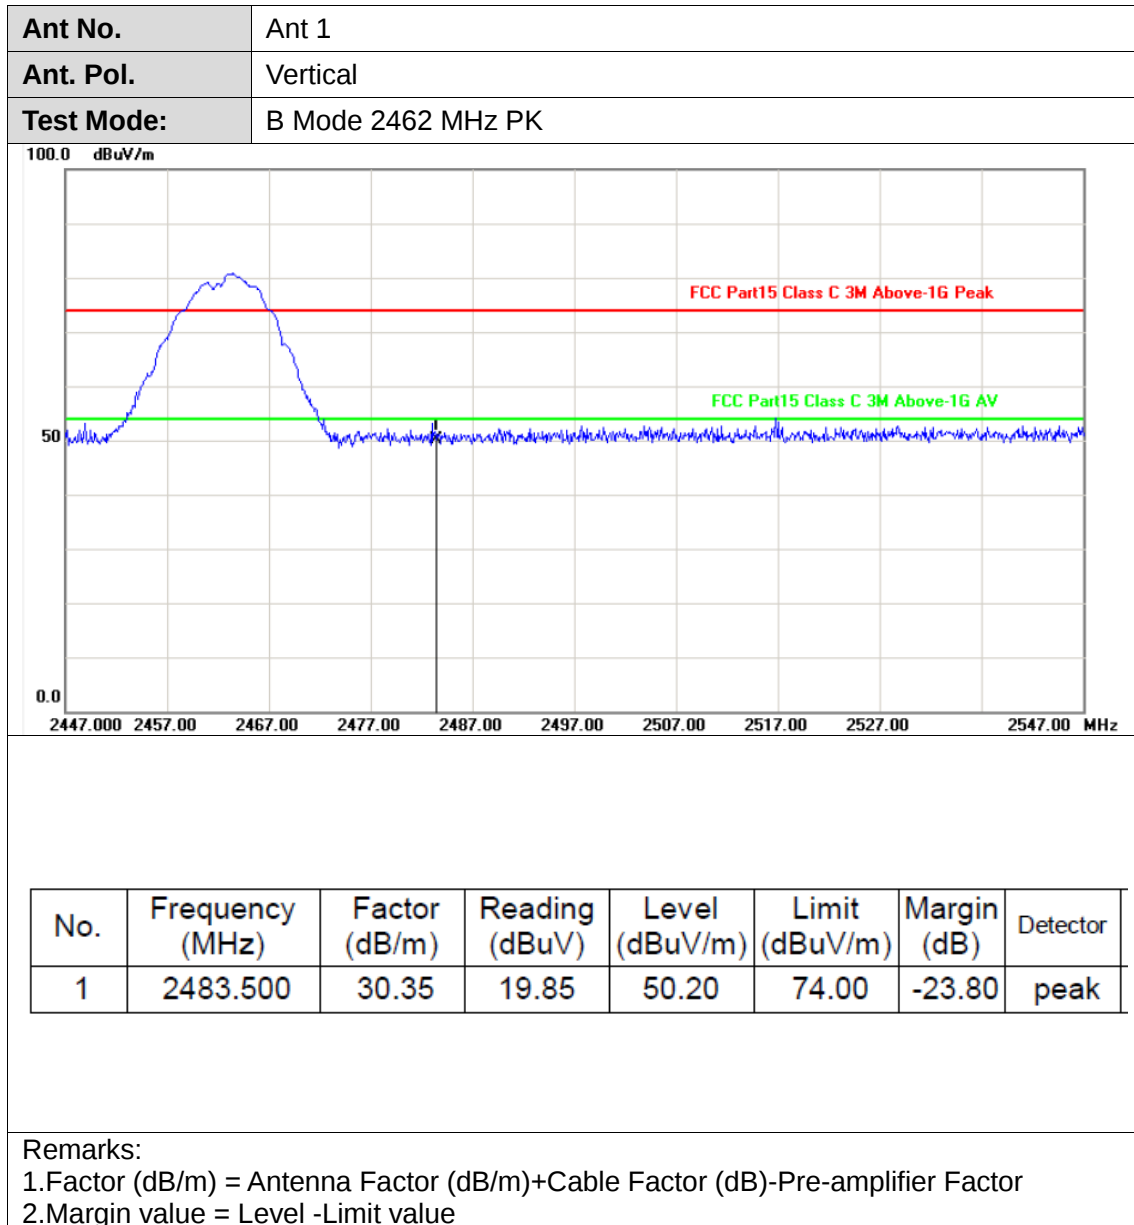


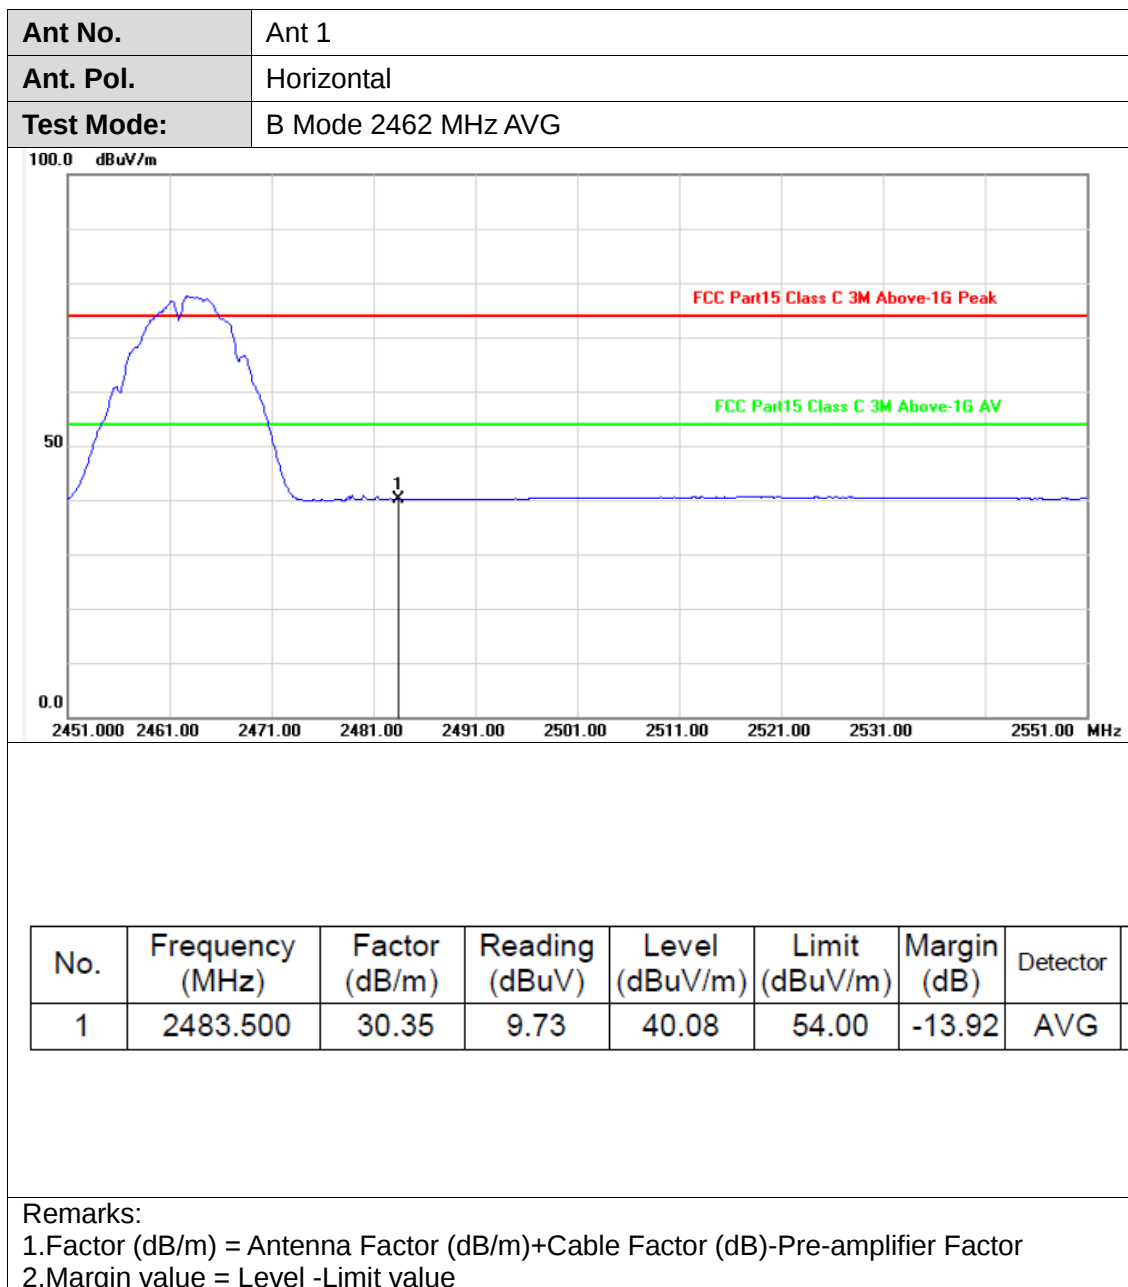


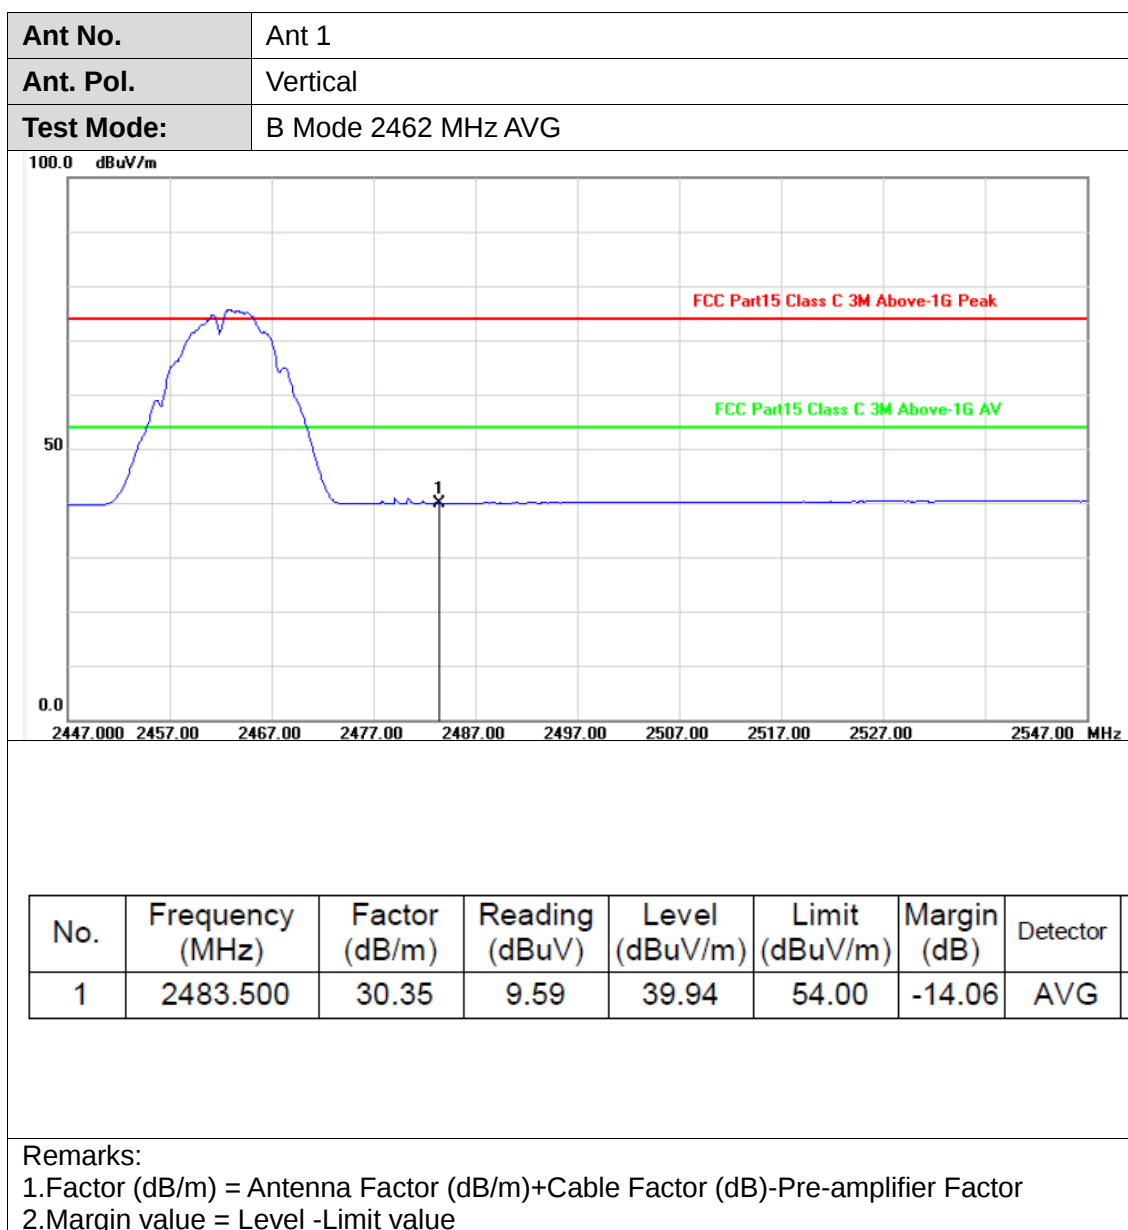

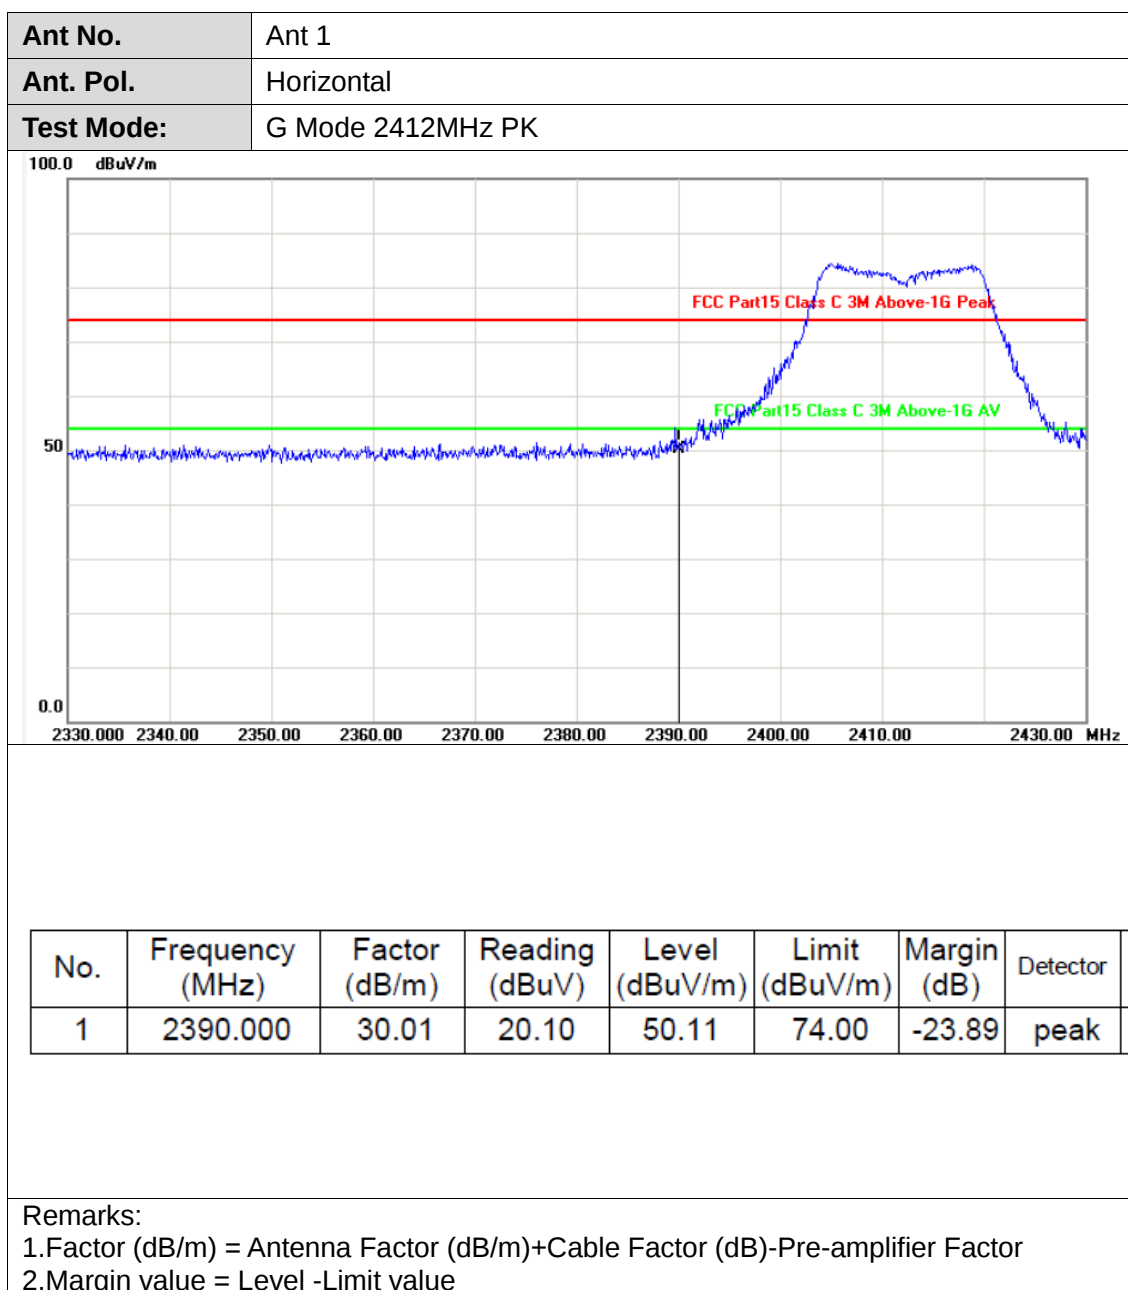

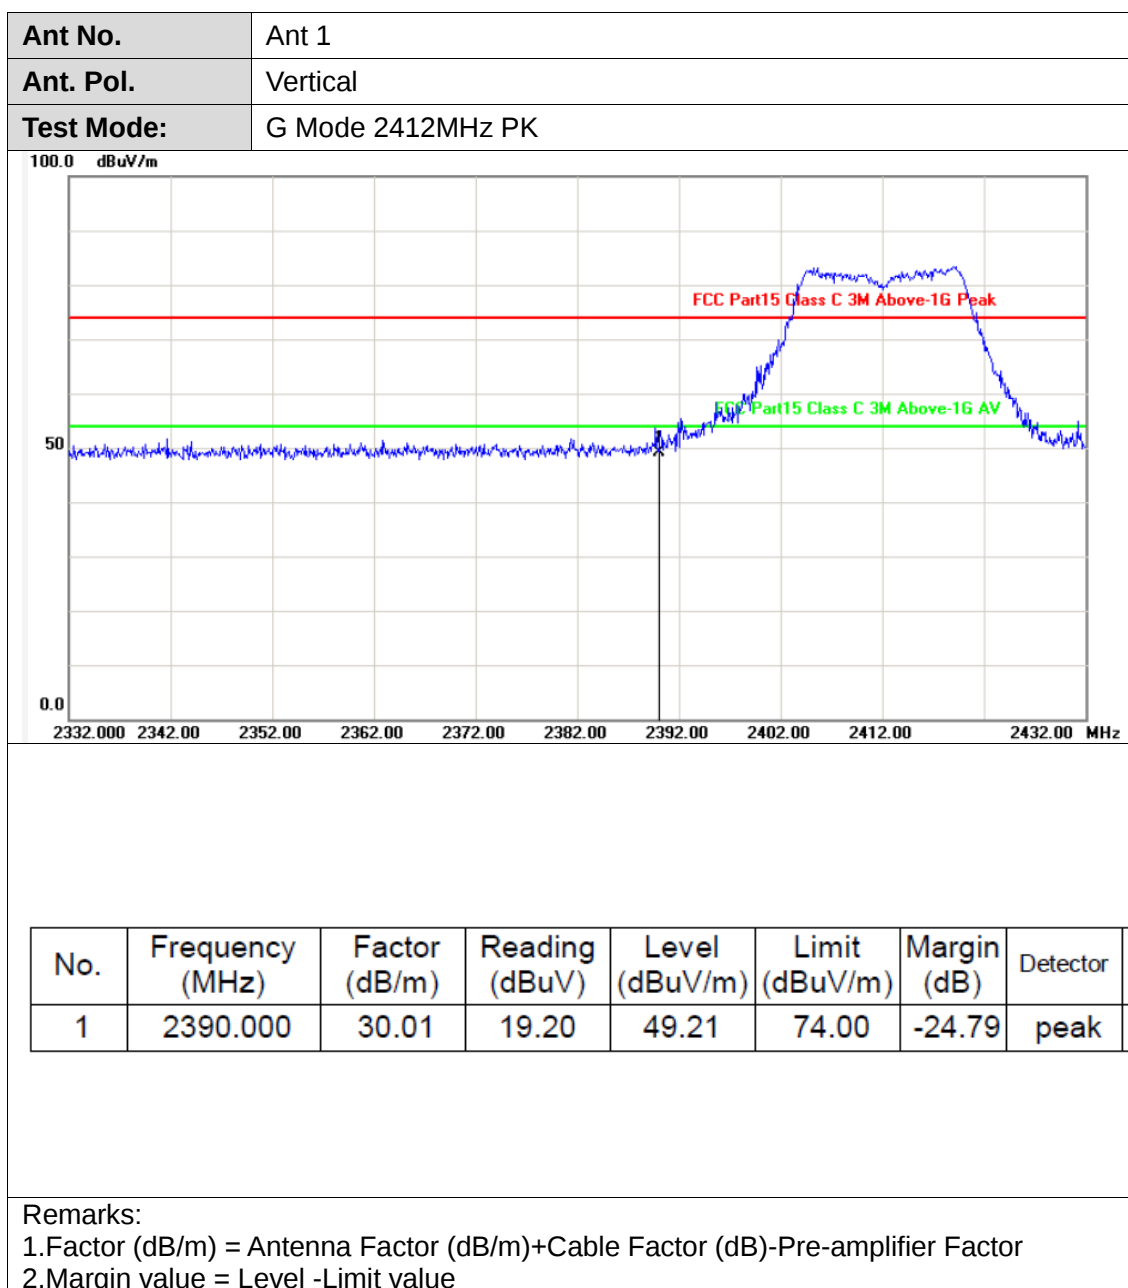


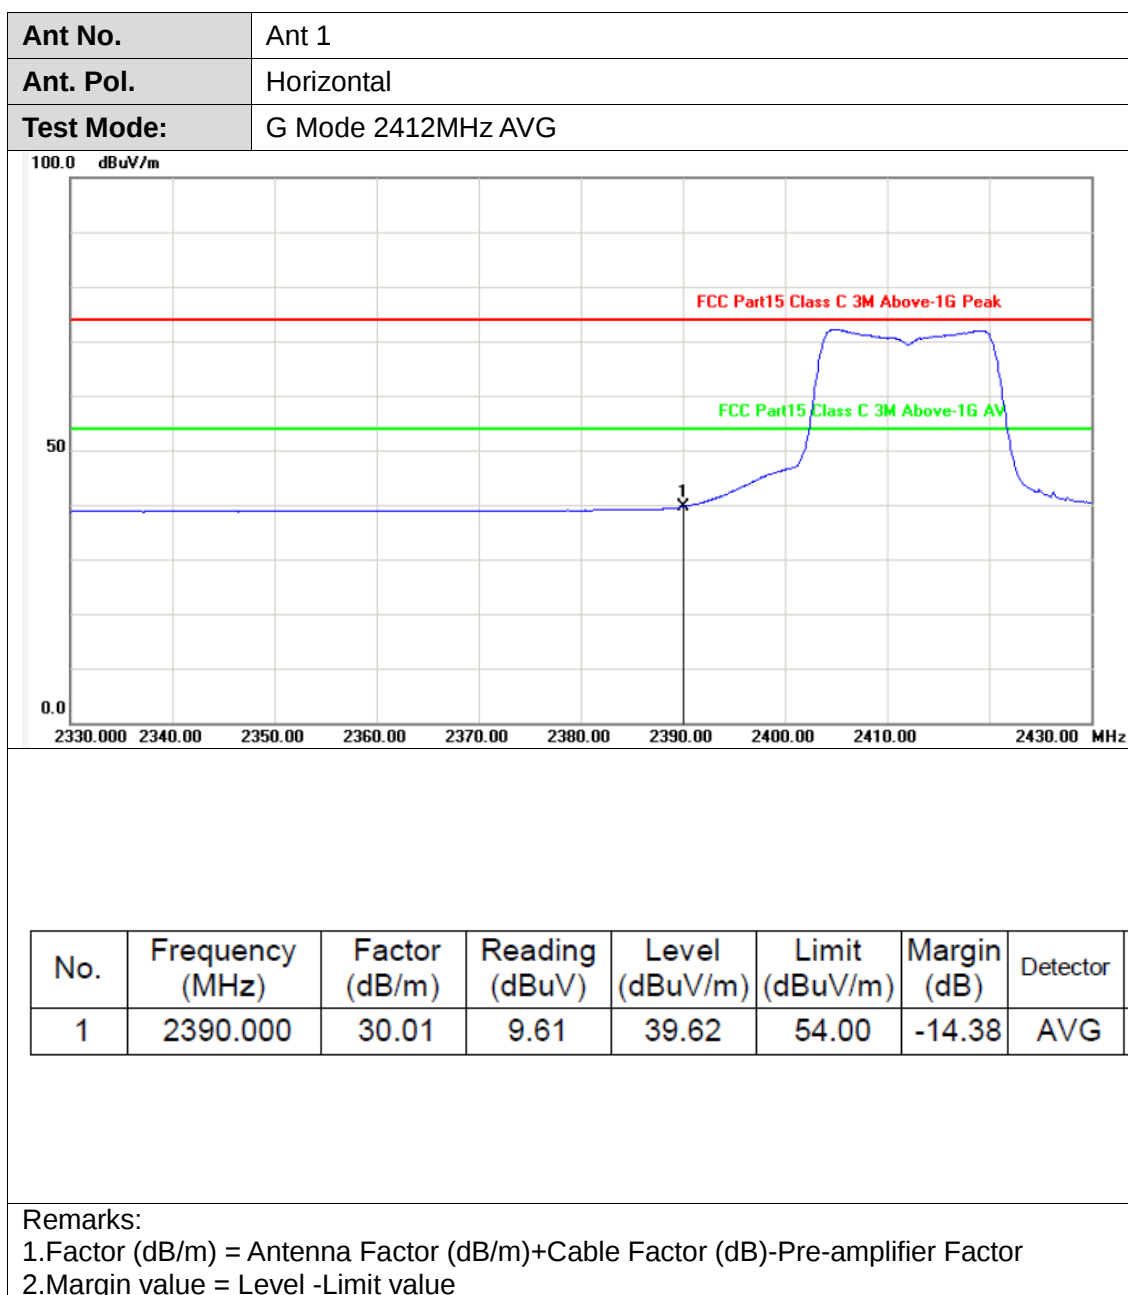

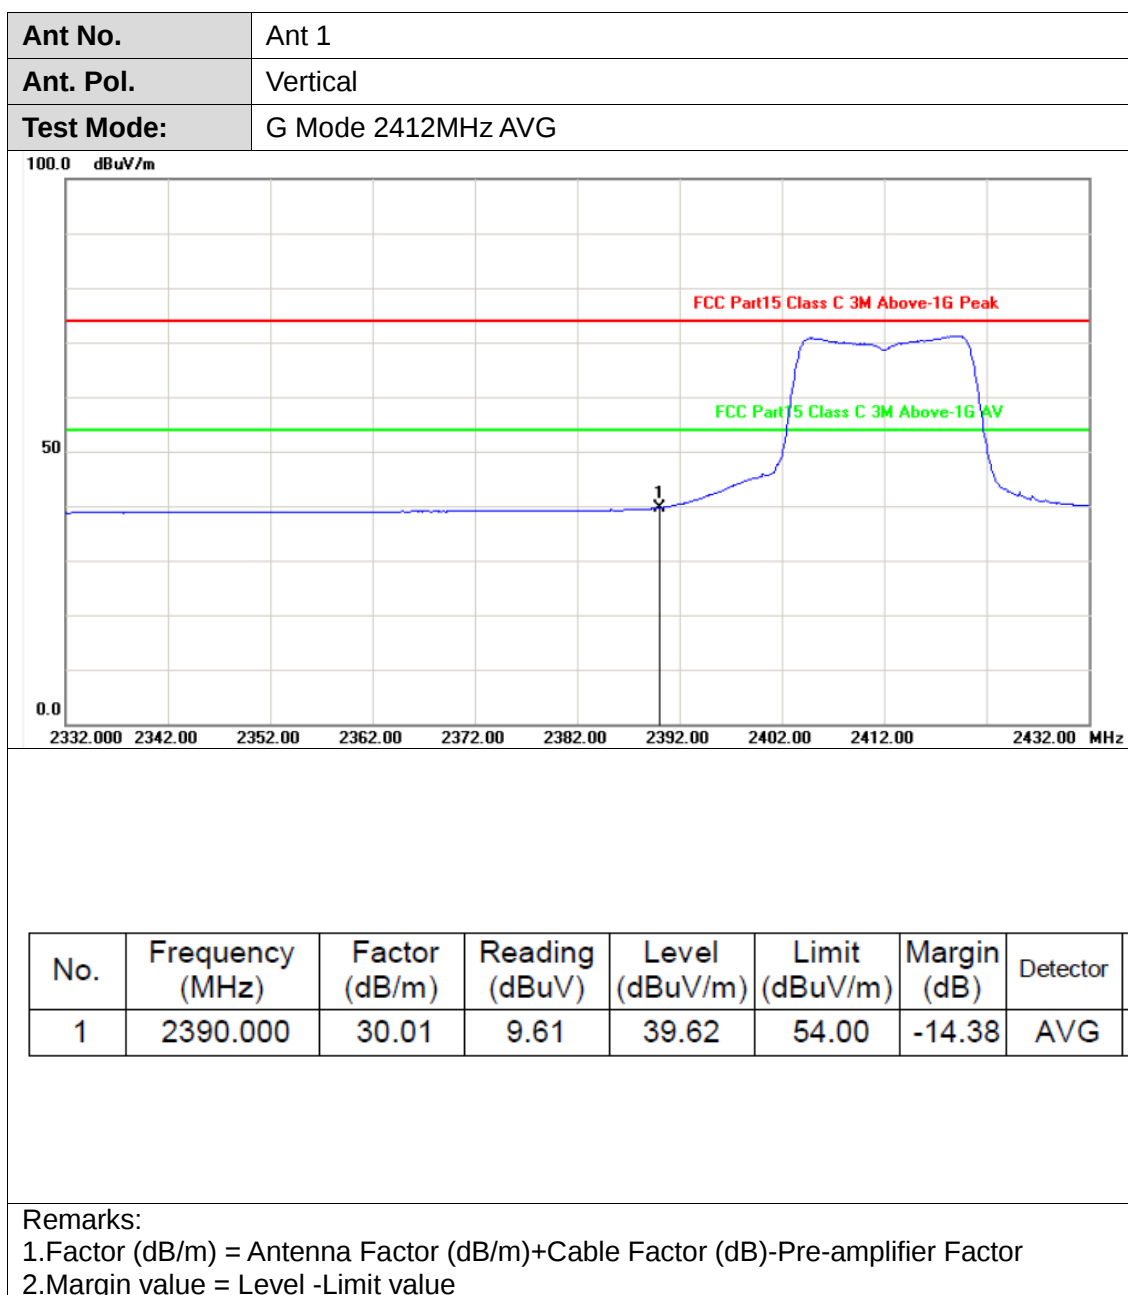




Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	G Mode 2462MHz PK

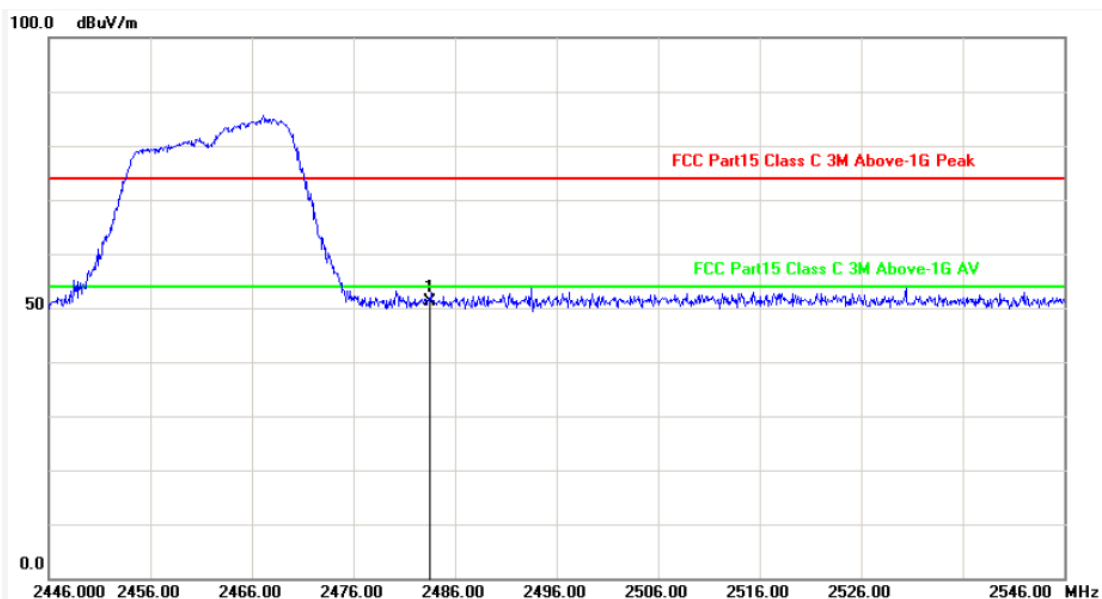

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	30.35	20.72	51.07	74.00	-22.93	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

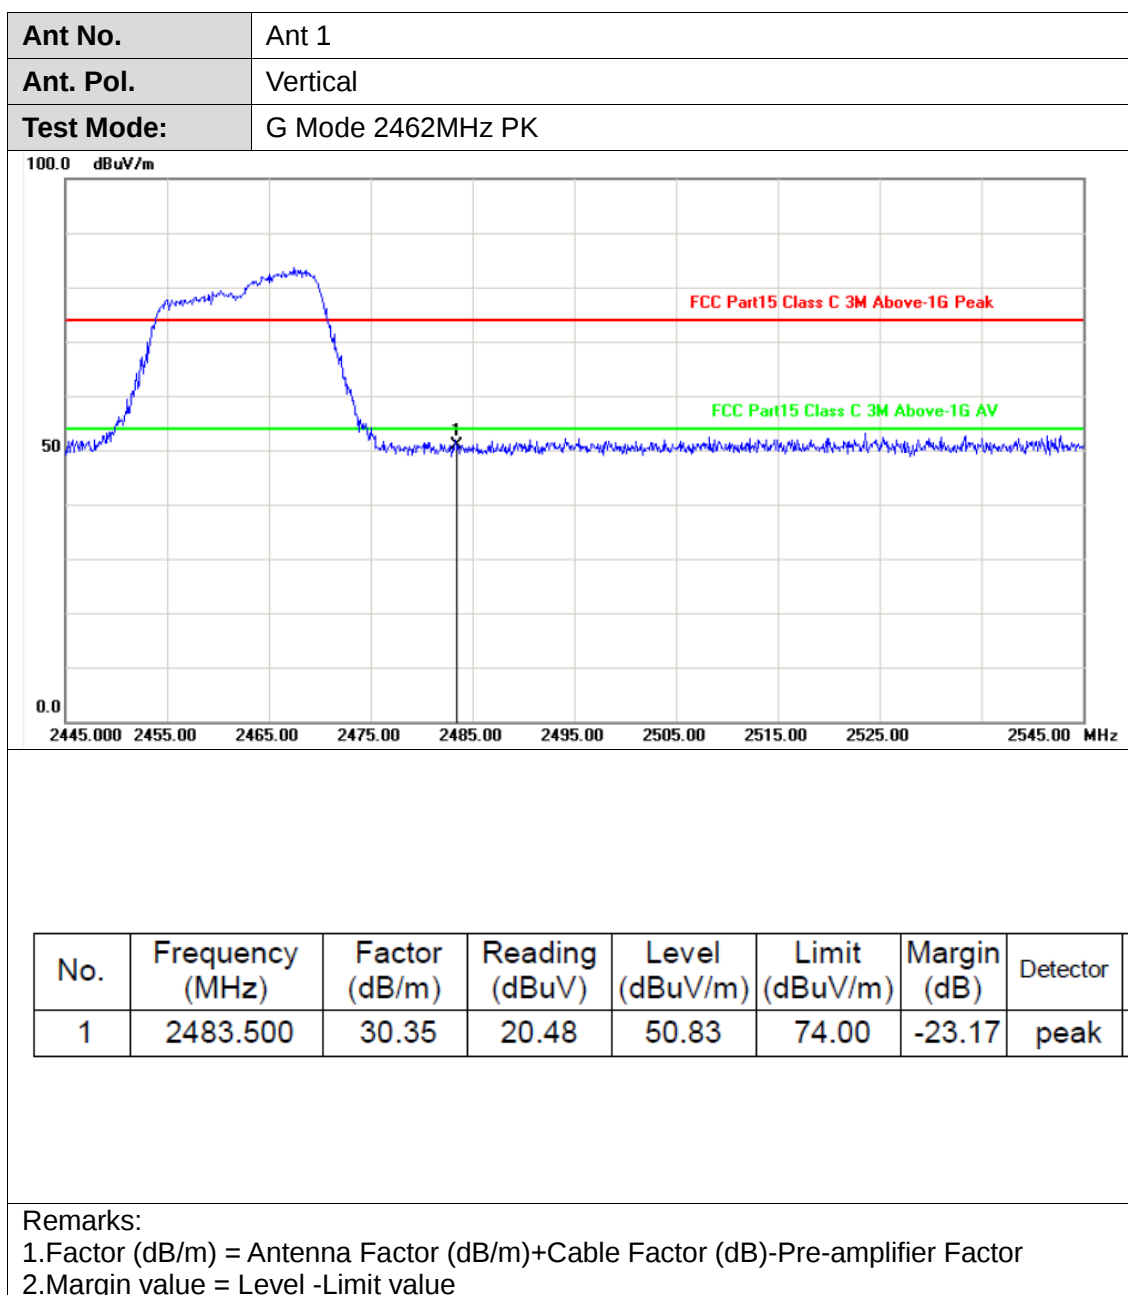




Ant No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	G Mode 2462MHz AVG

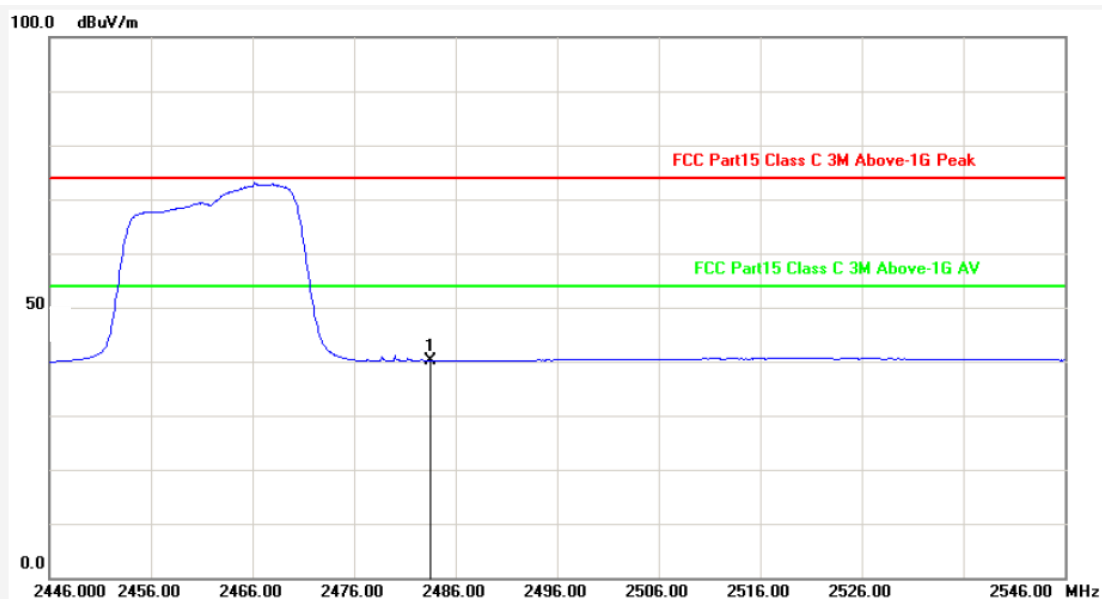



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	30.35	9.79	40.14	54.00	-13.86	AVG


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

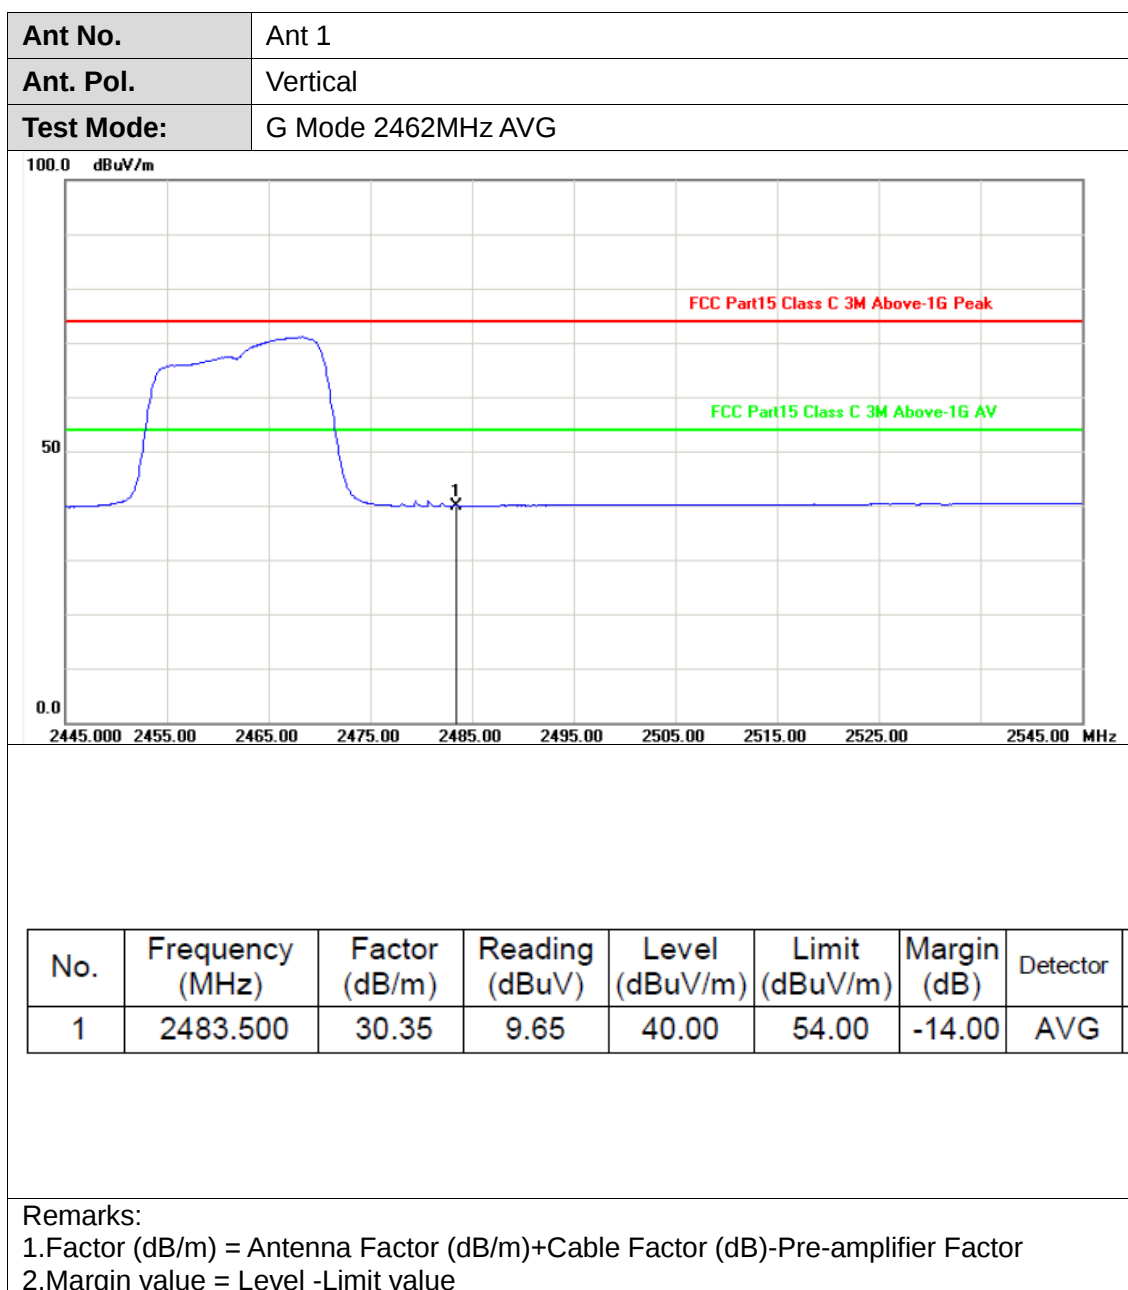


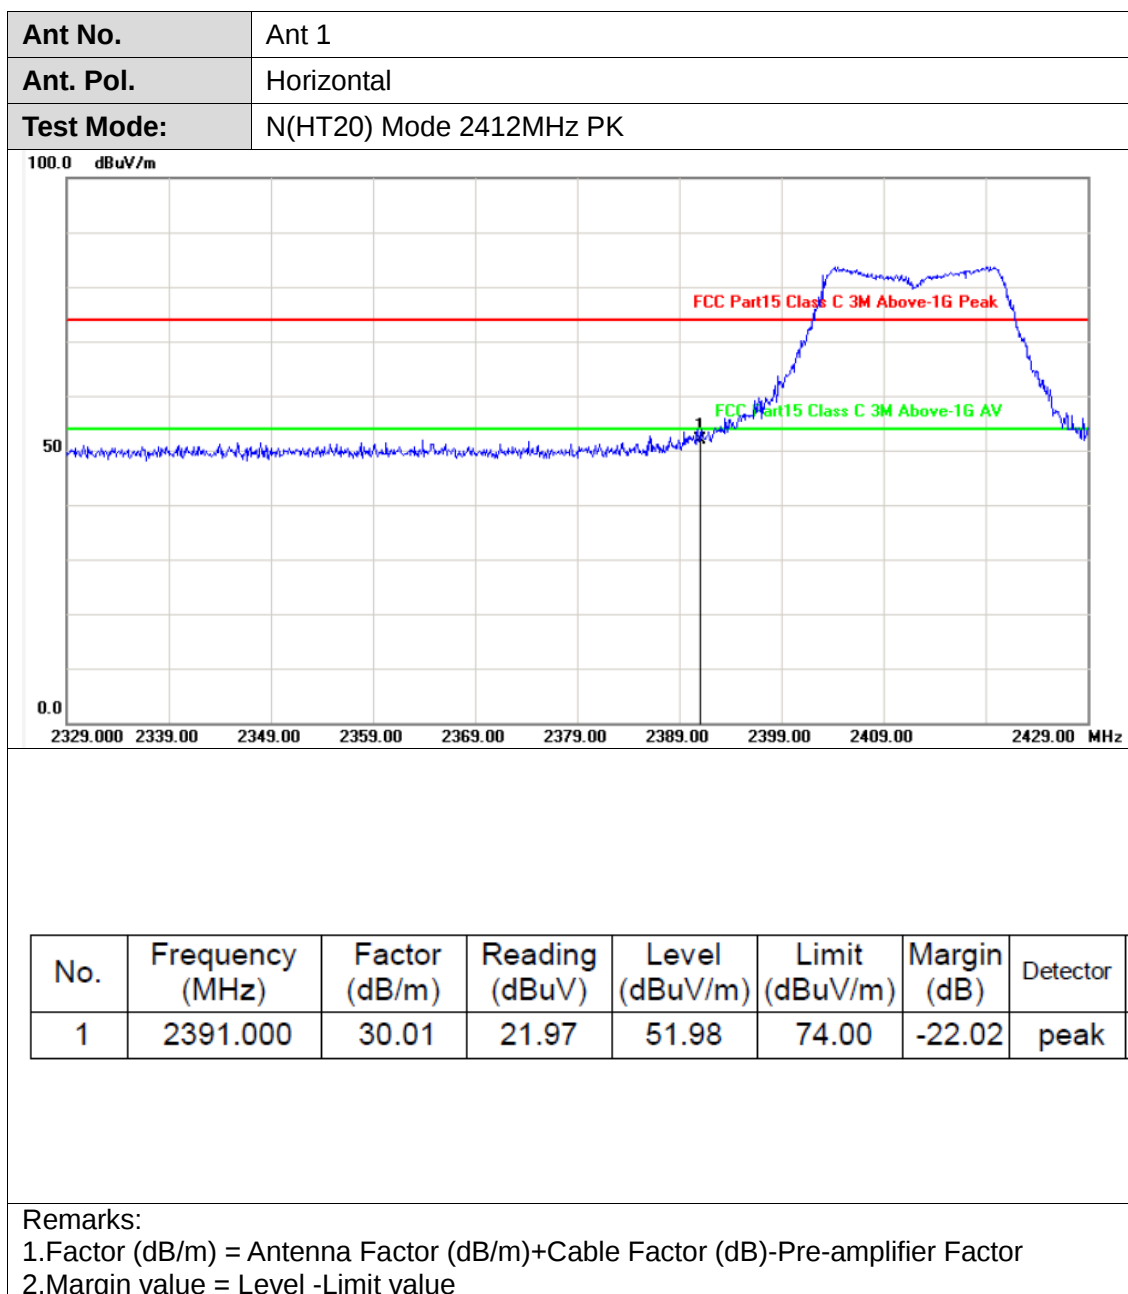


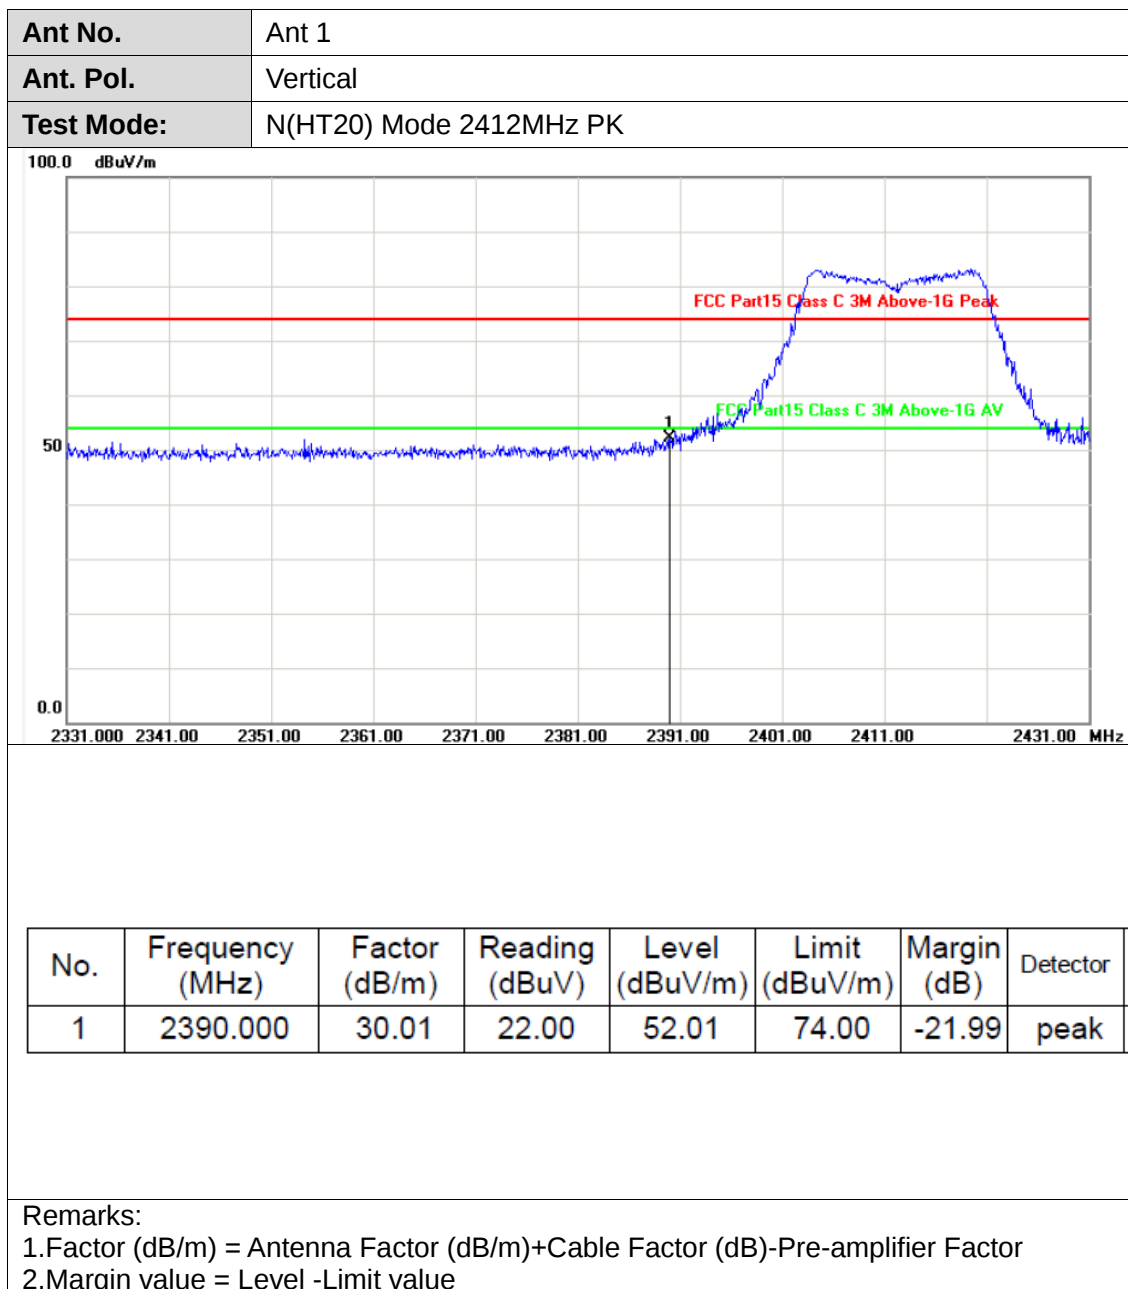


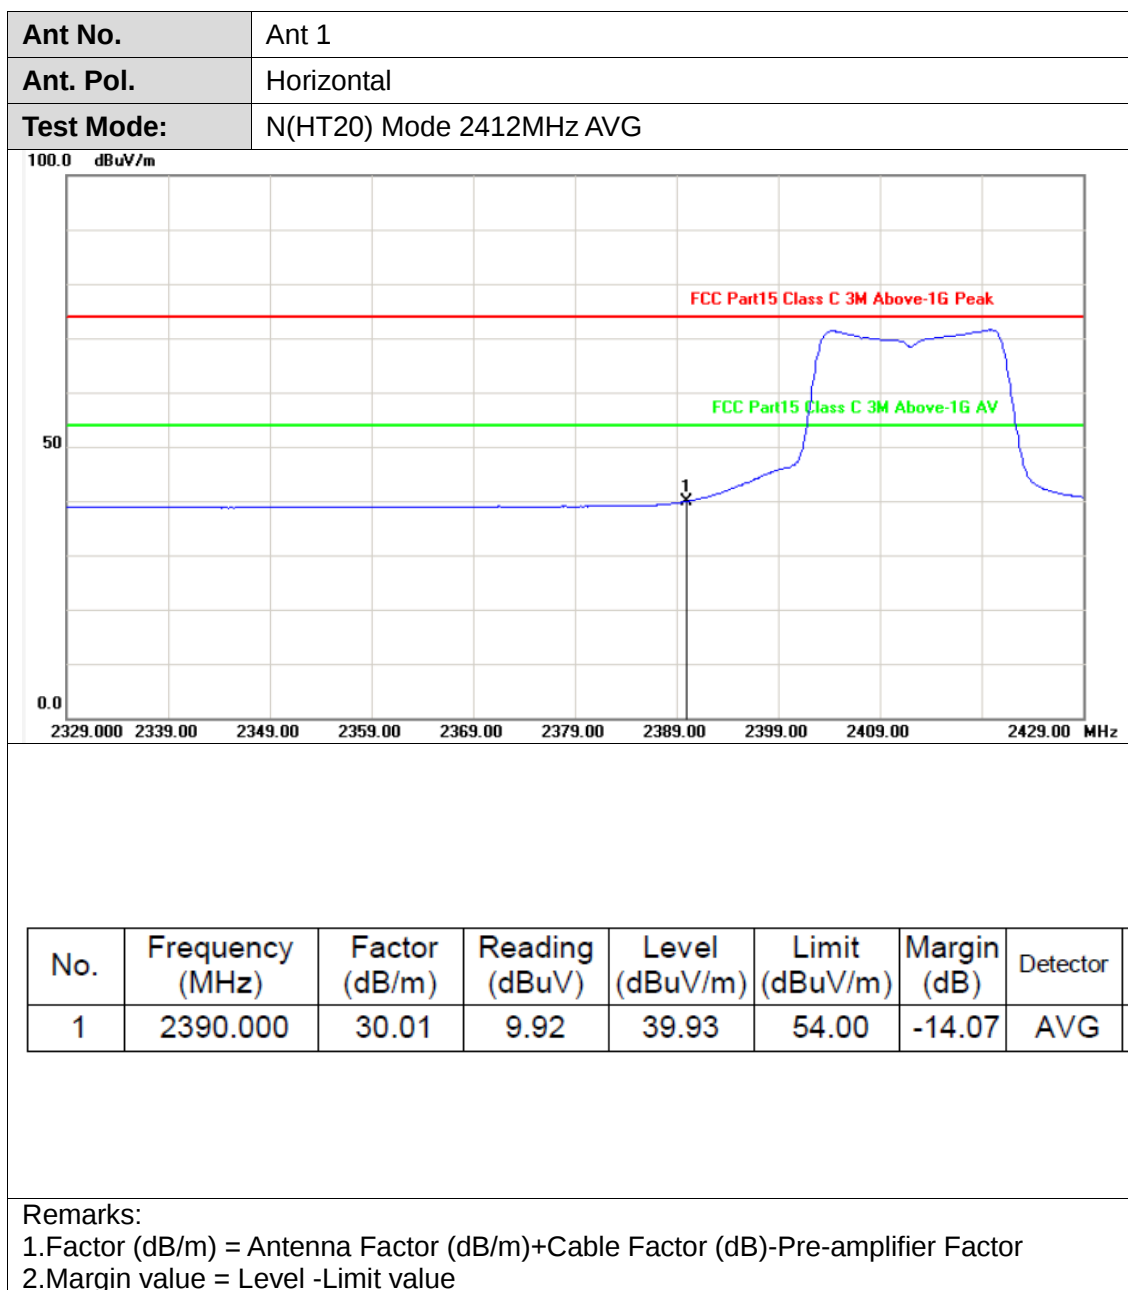


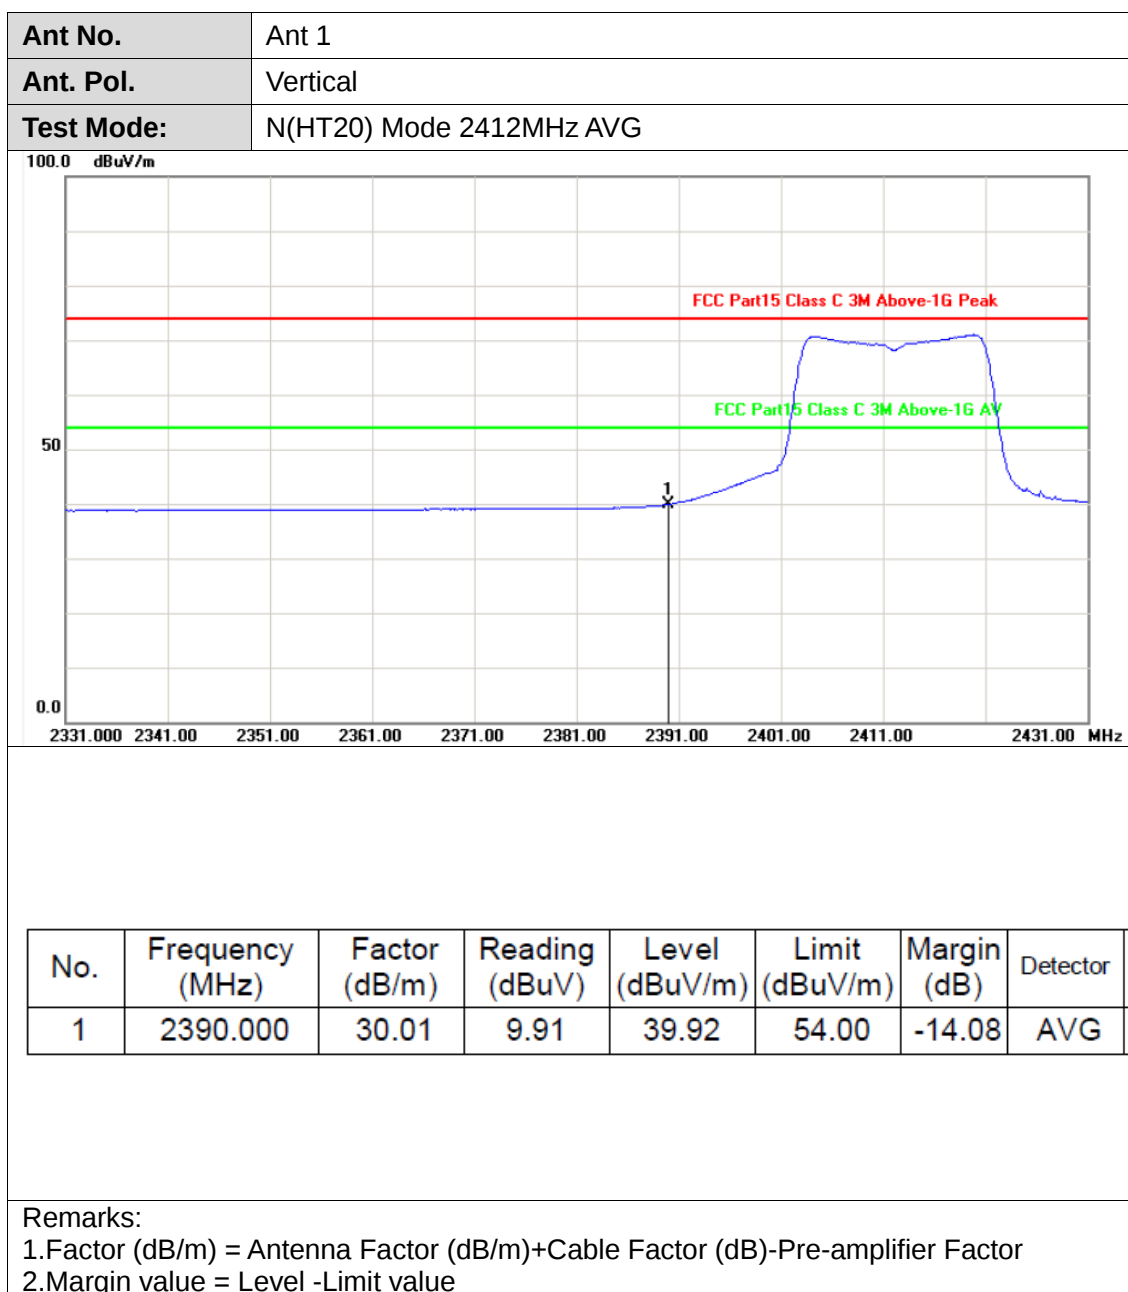


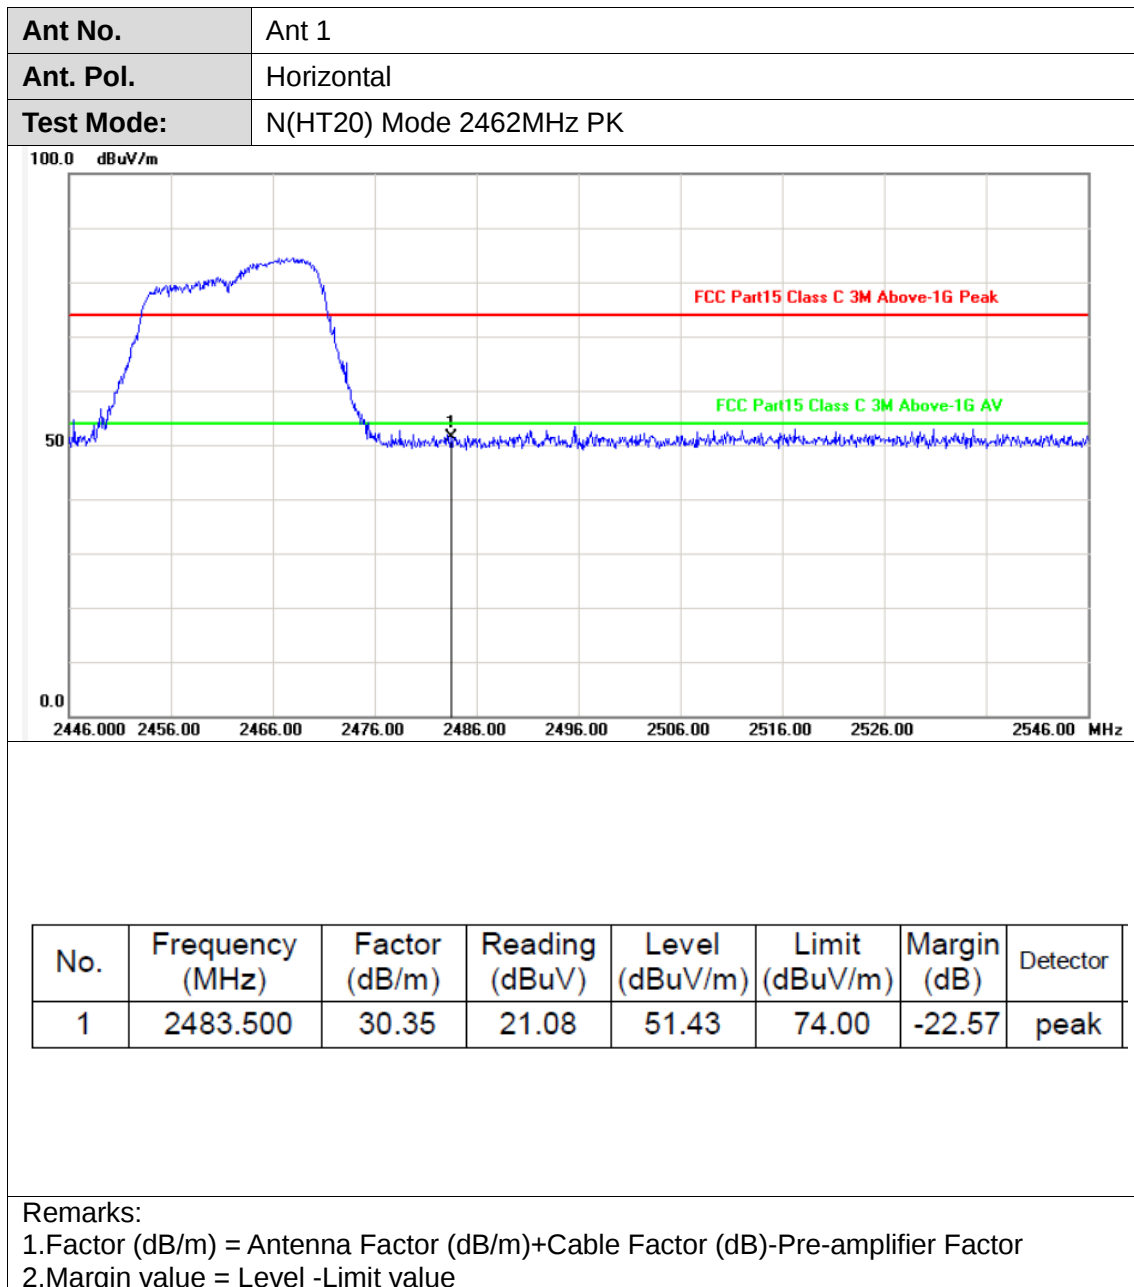


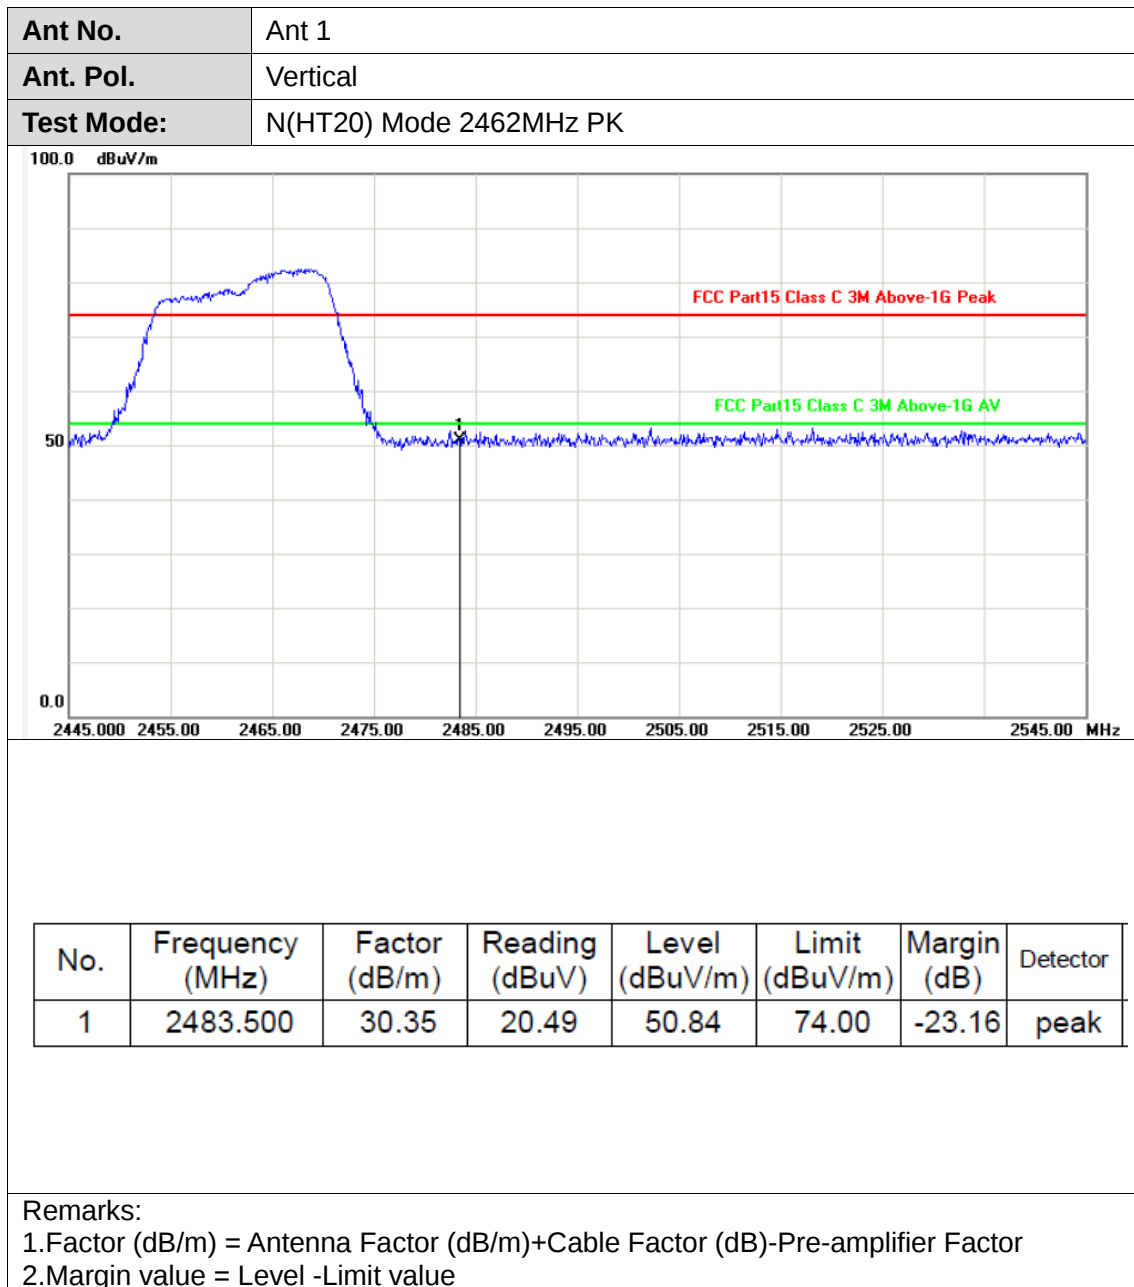


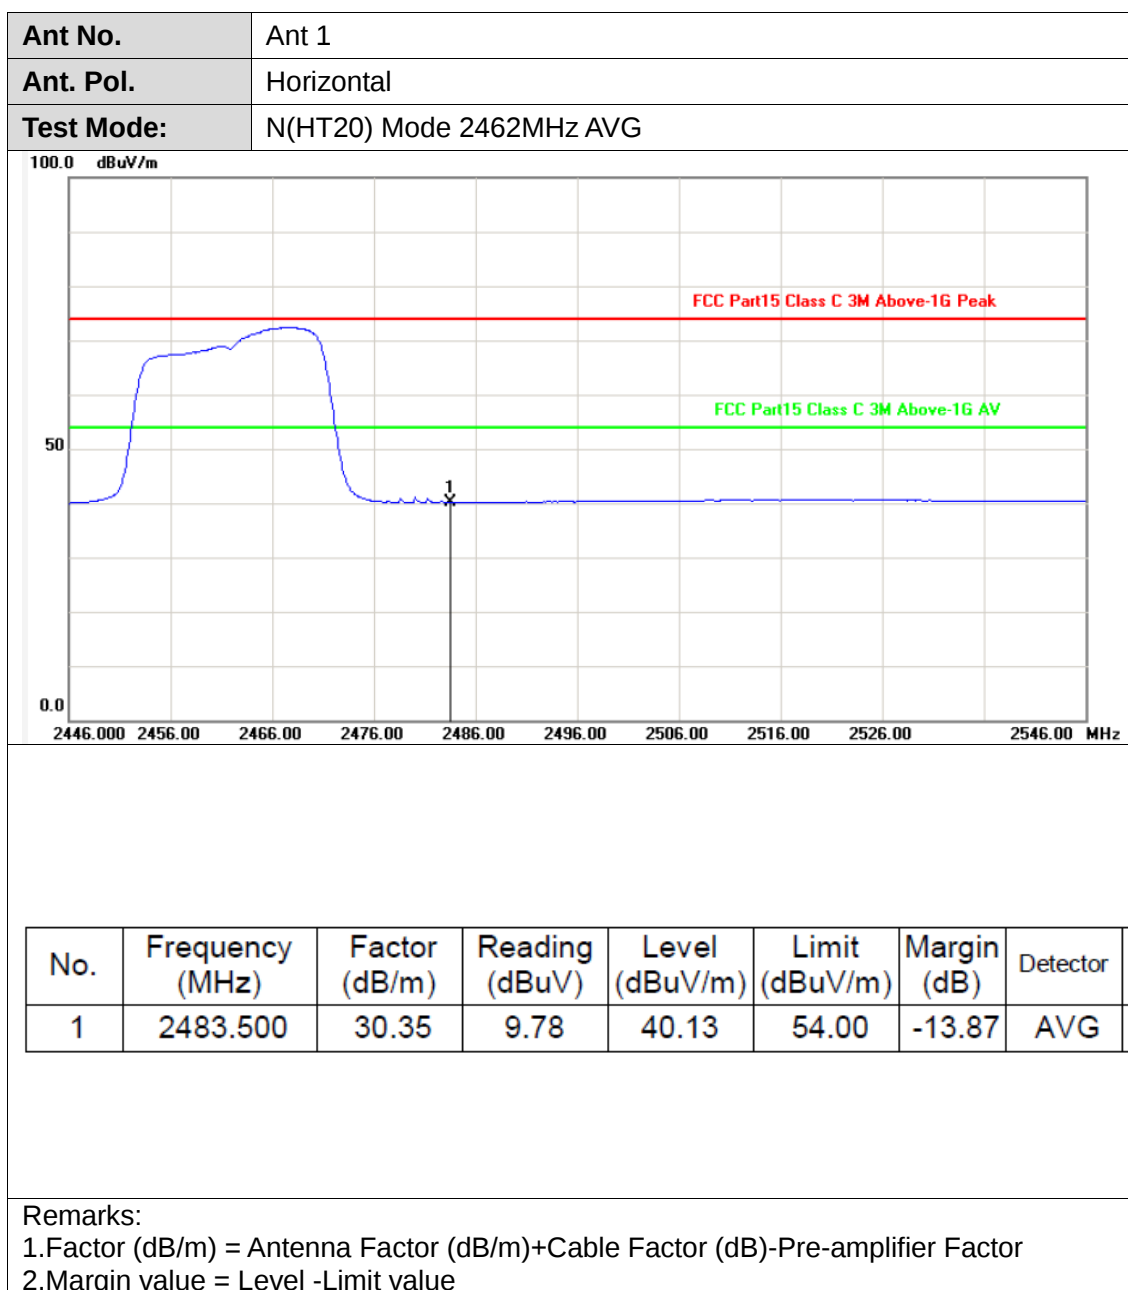


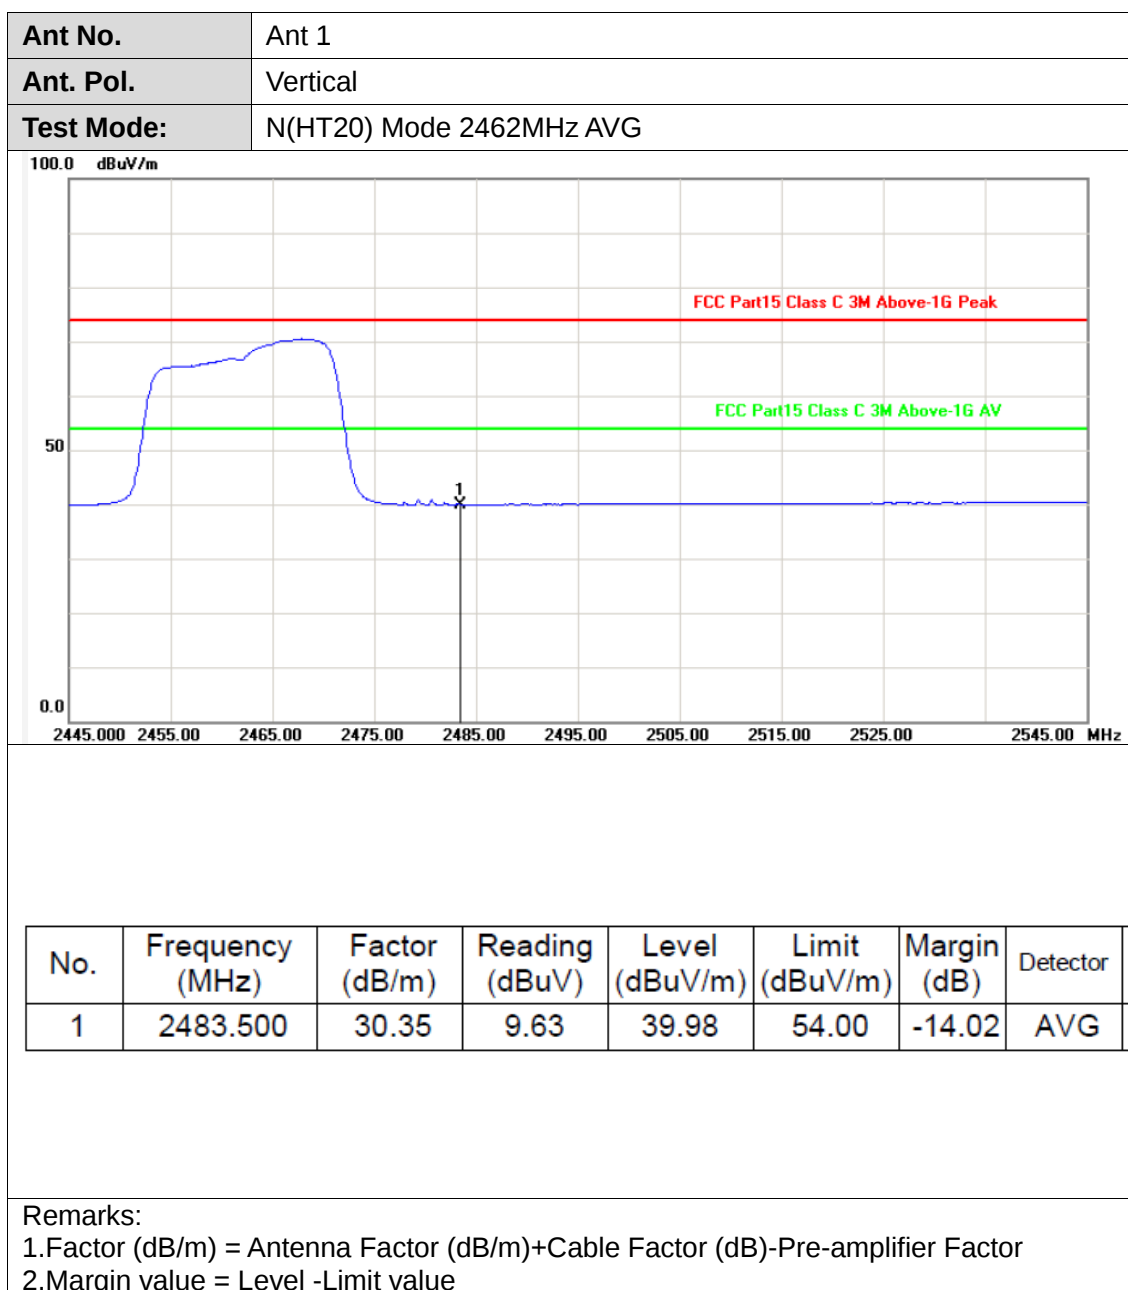


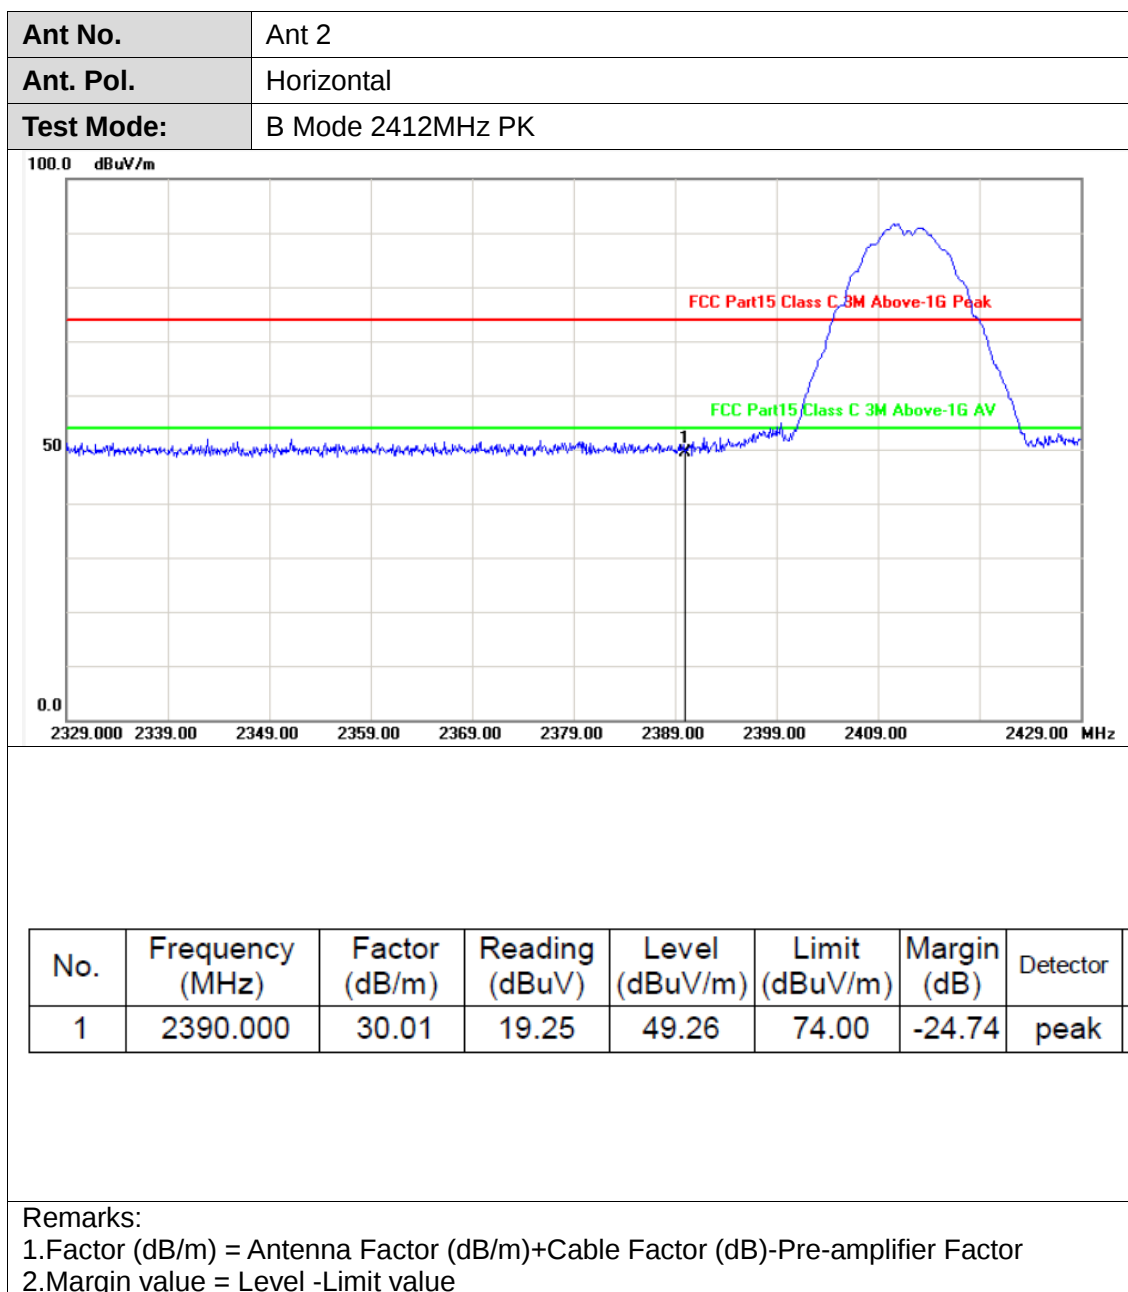


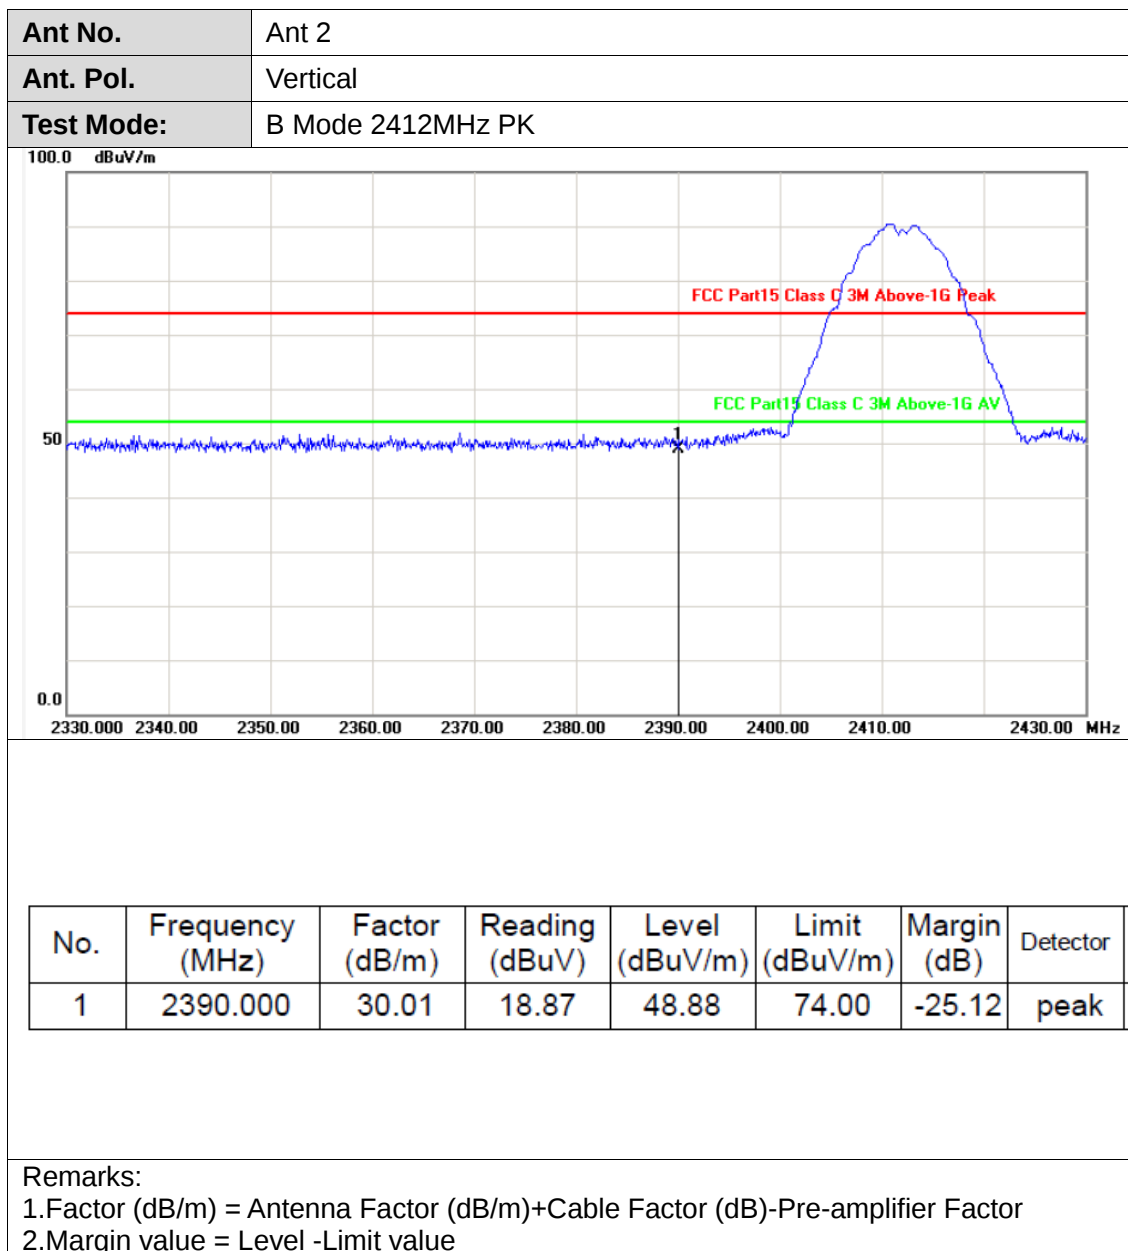


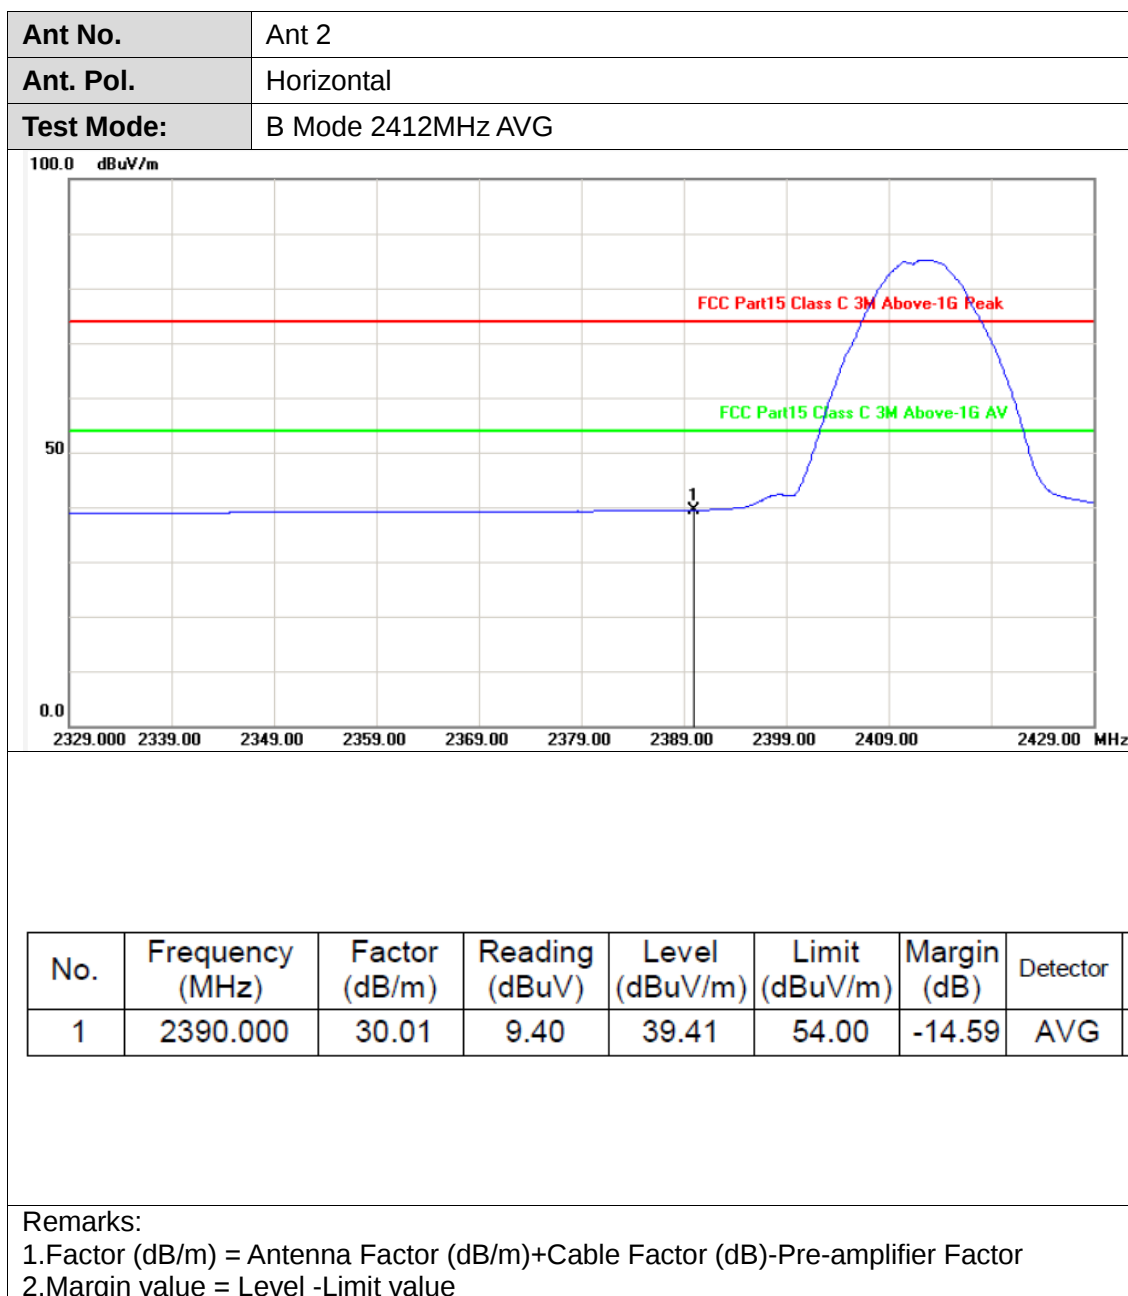


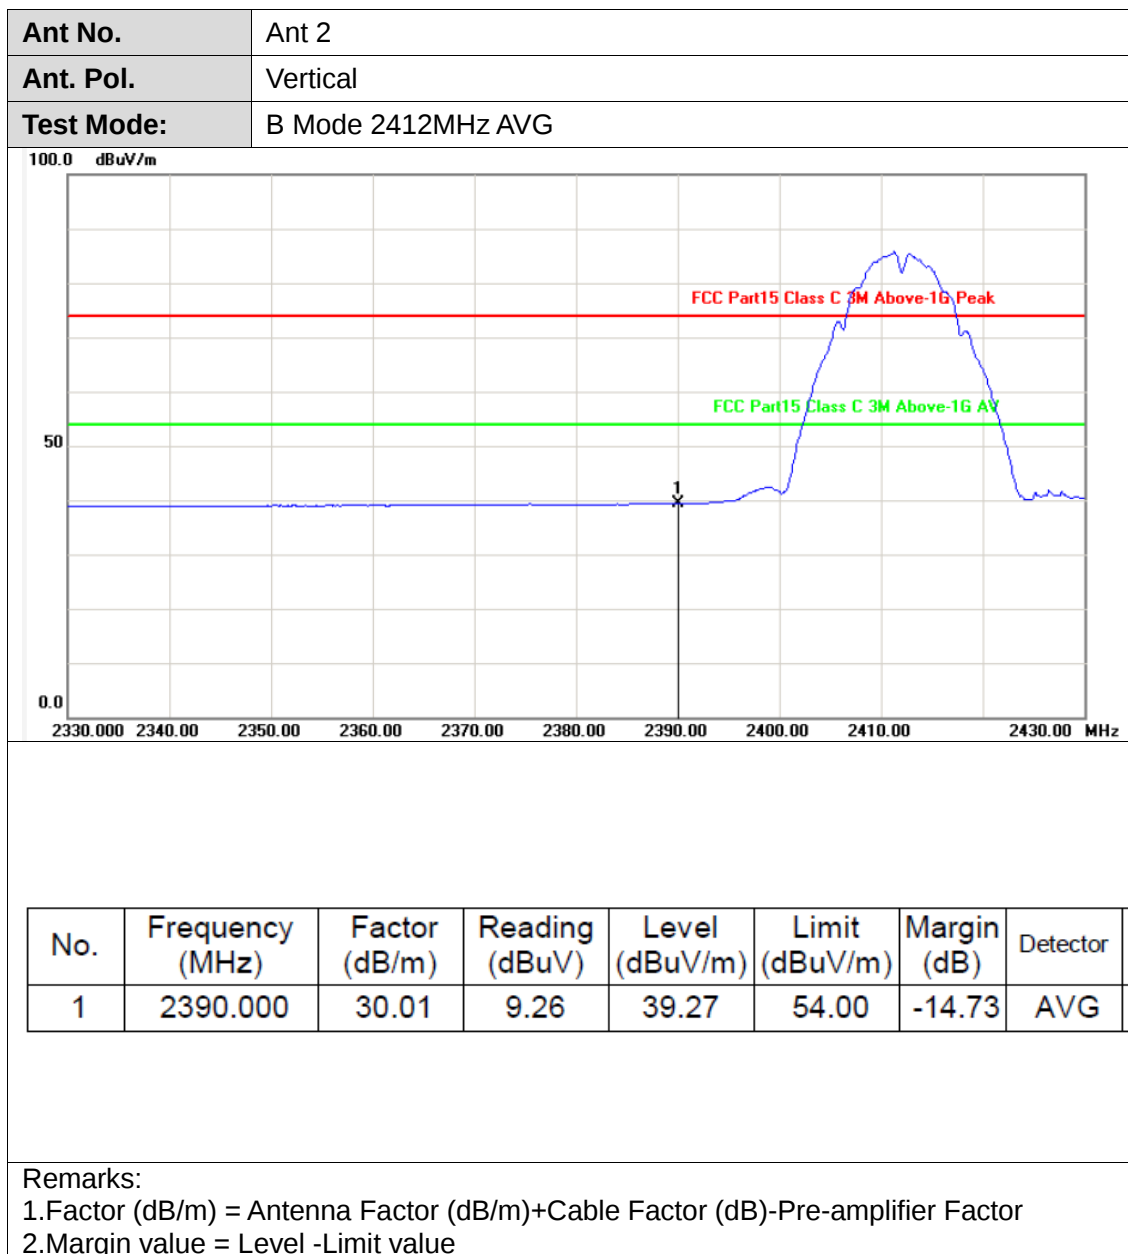


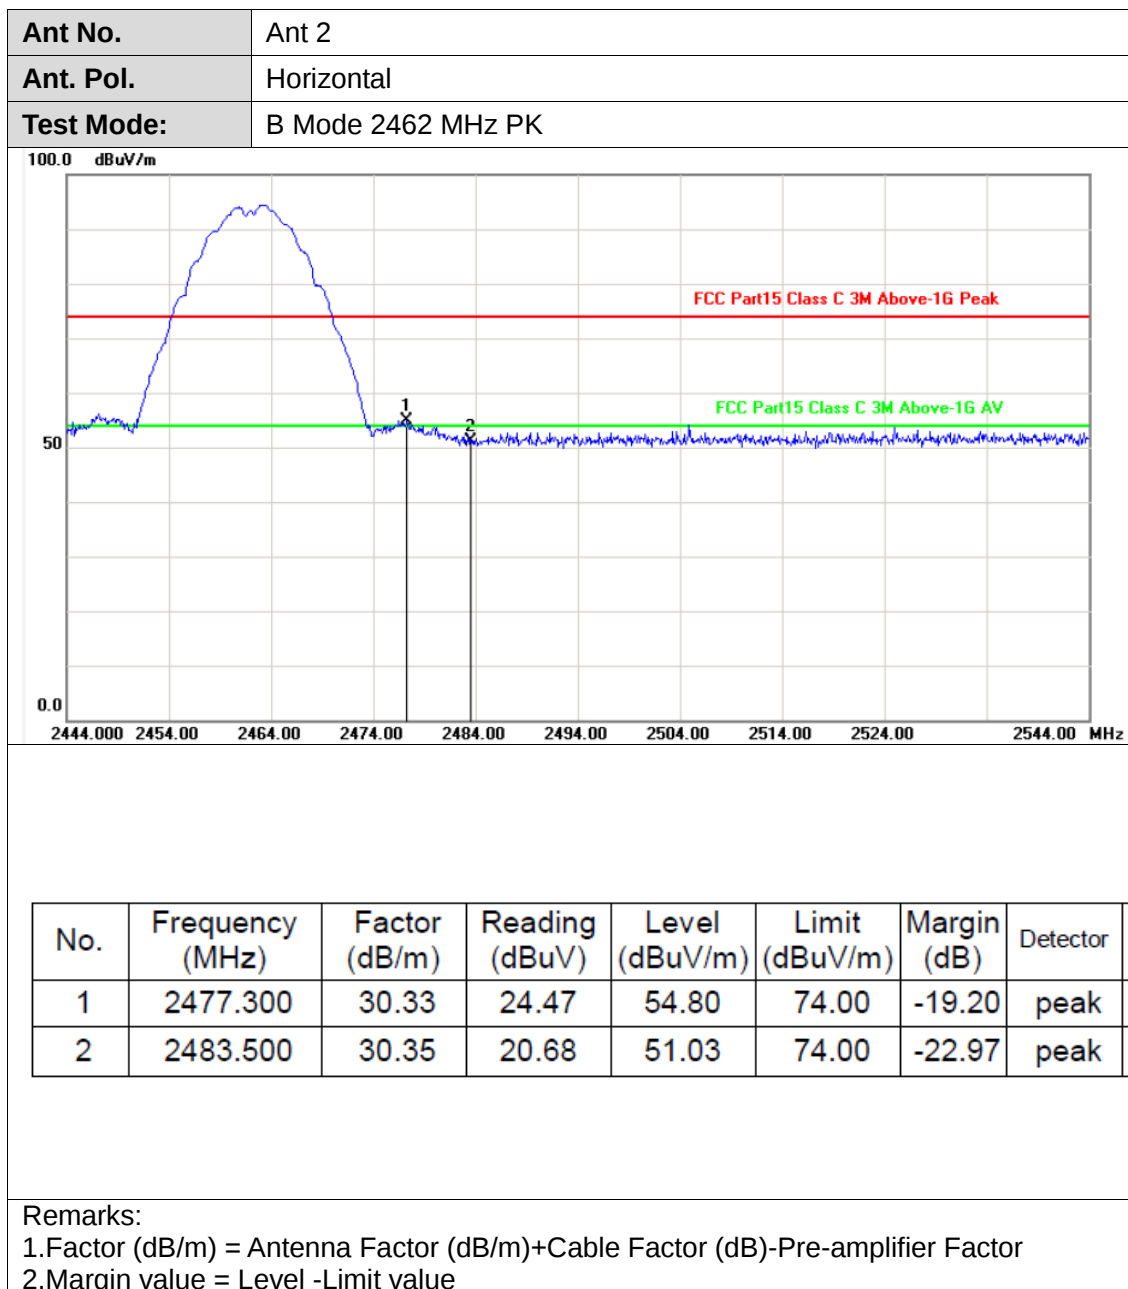


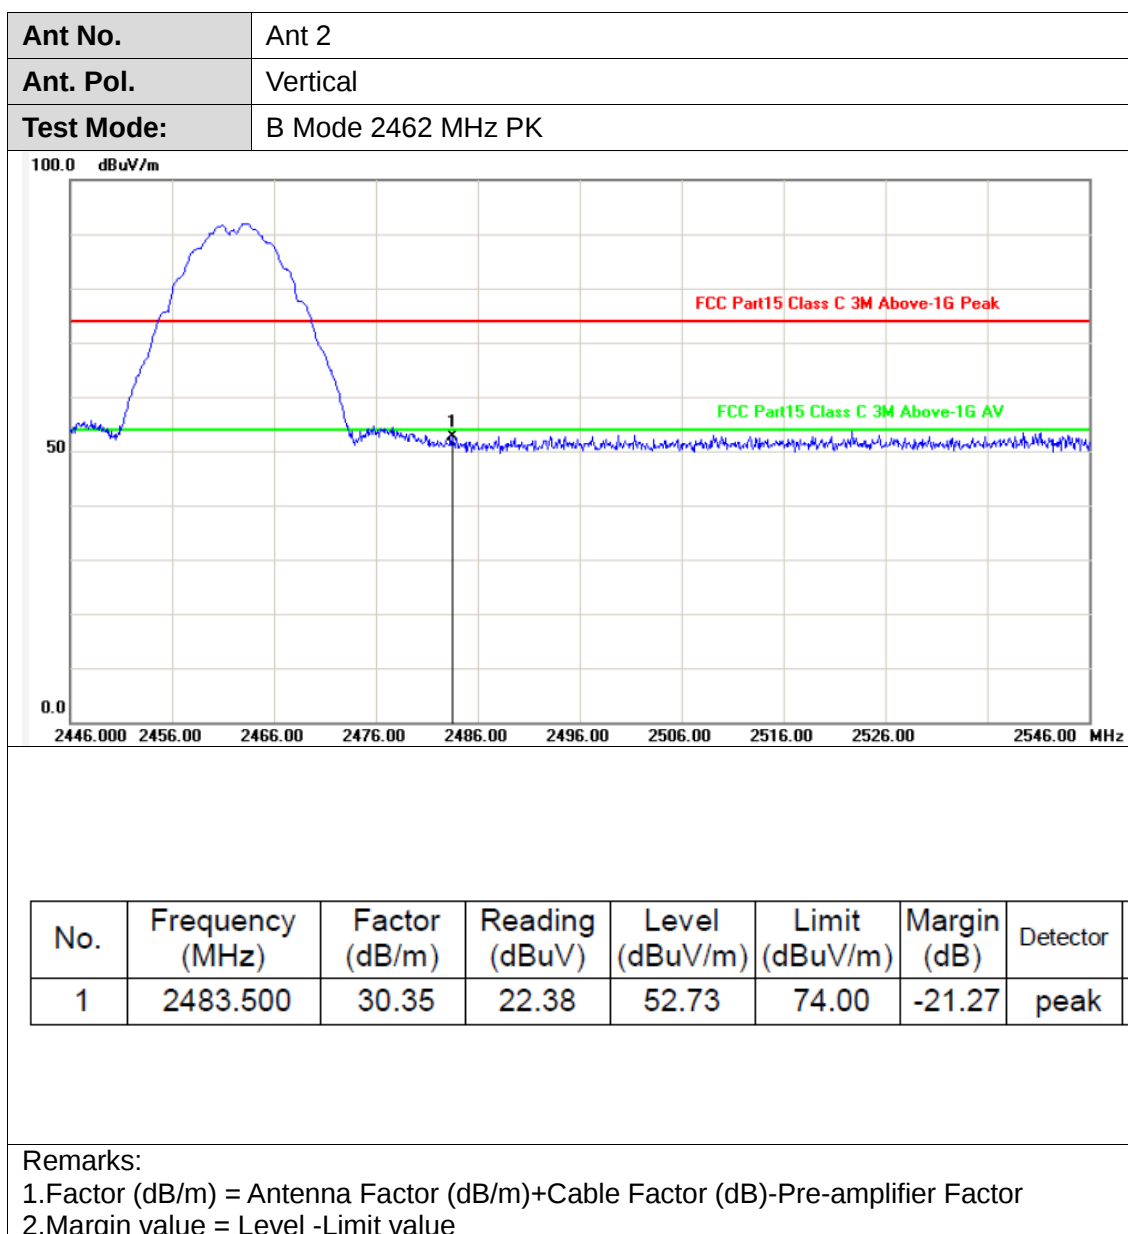


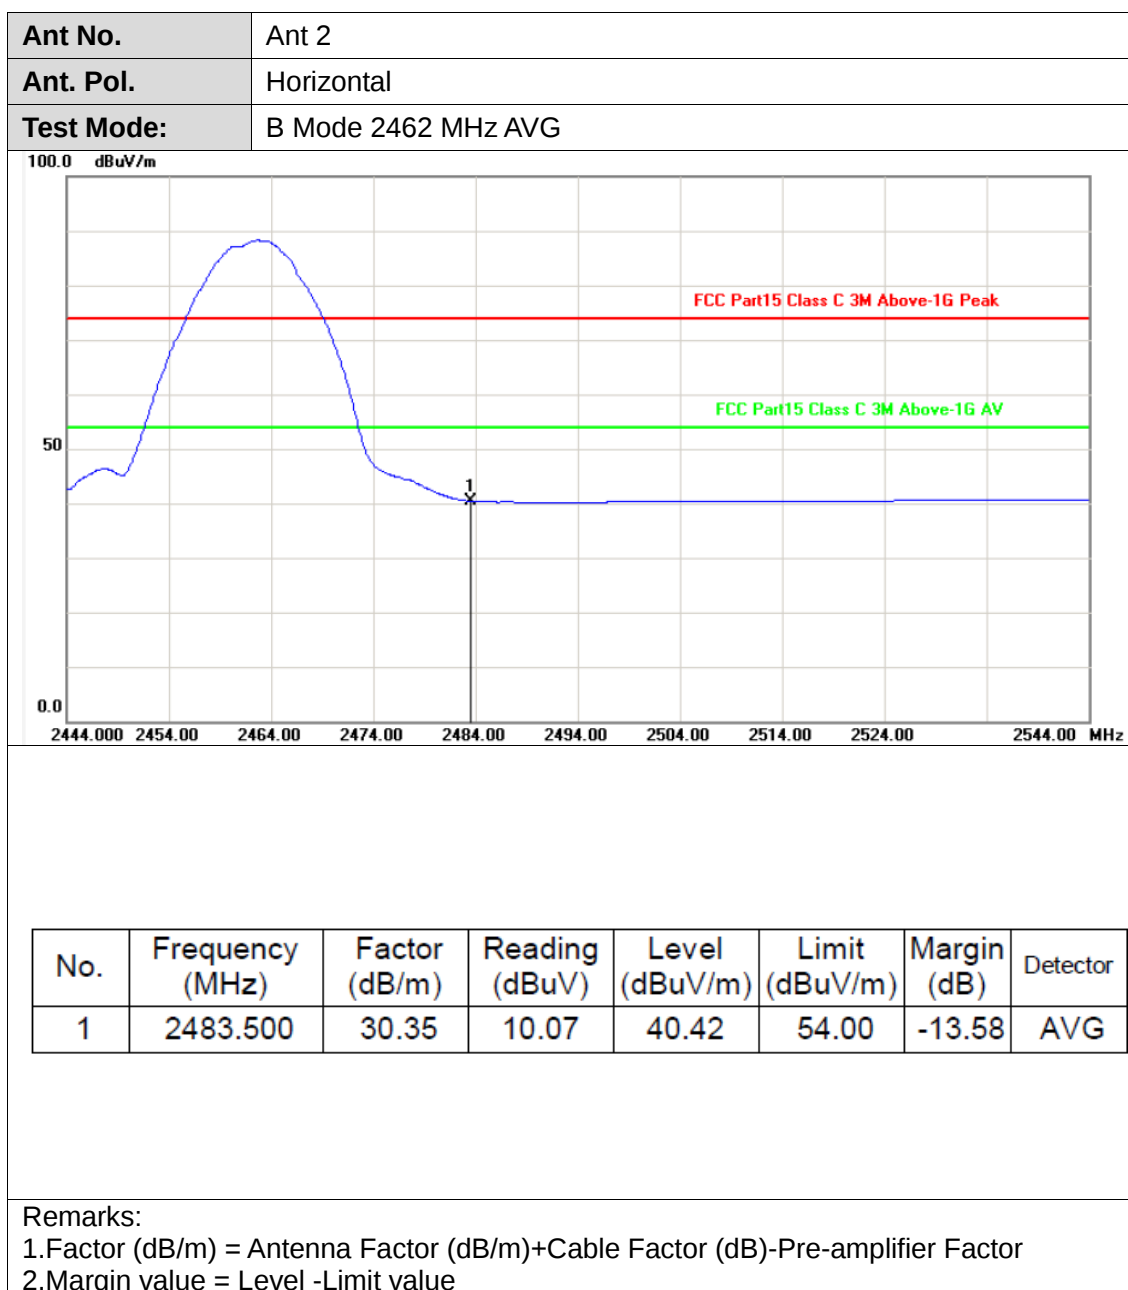


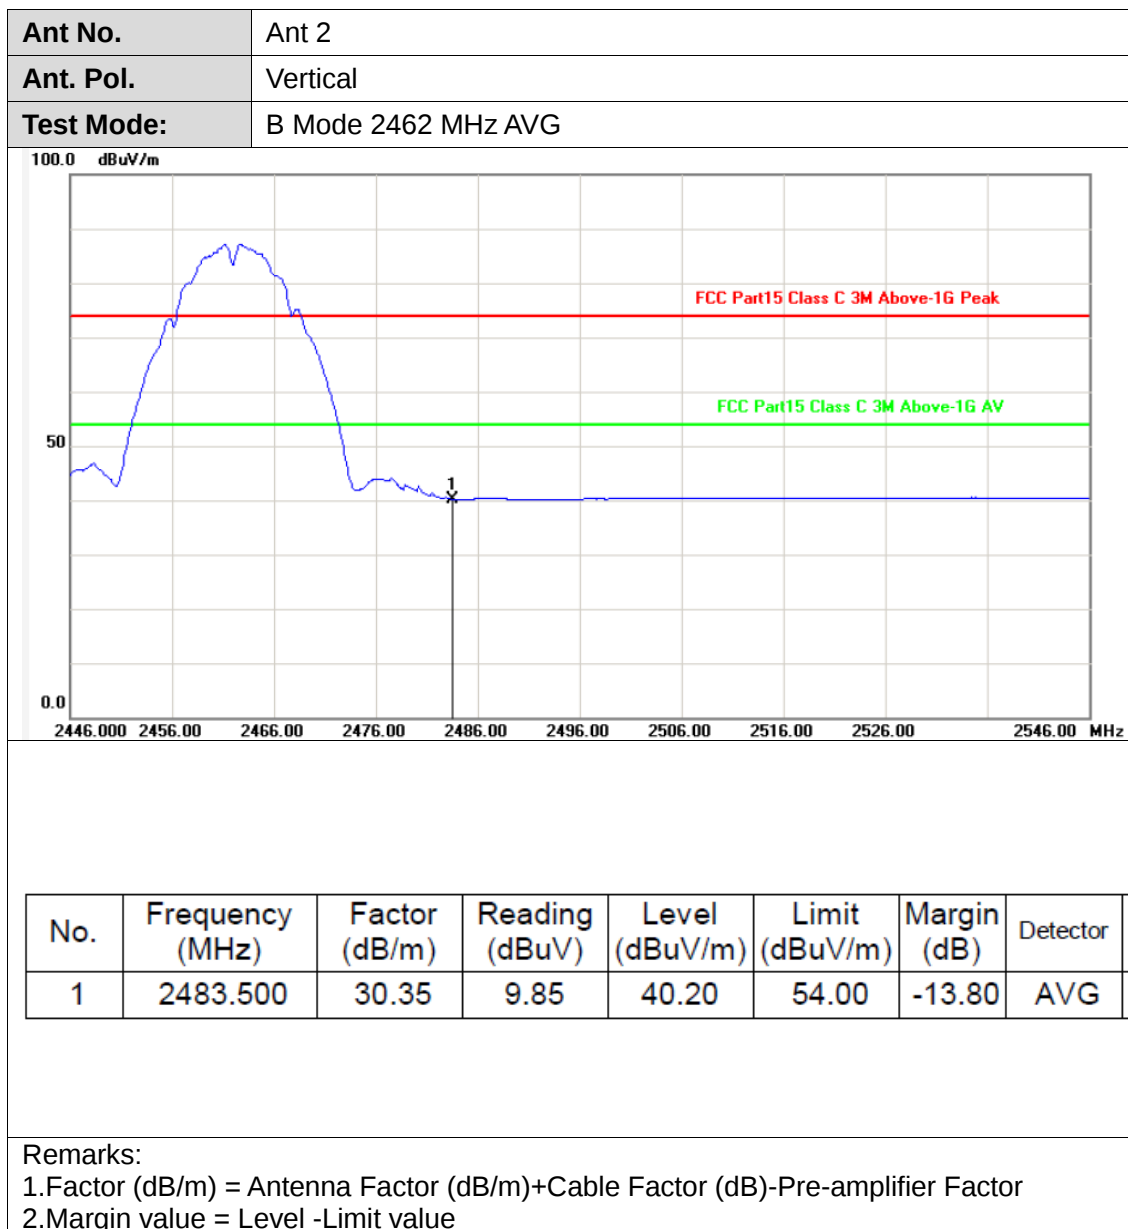

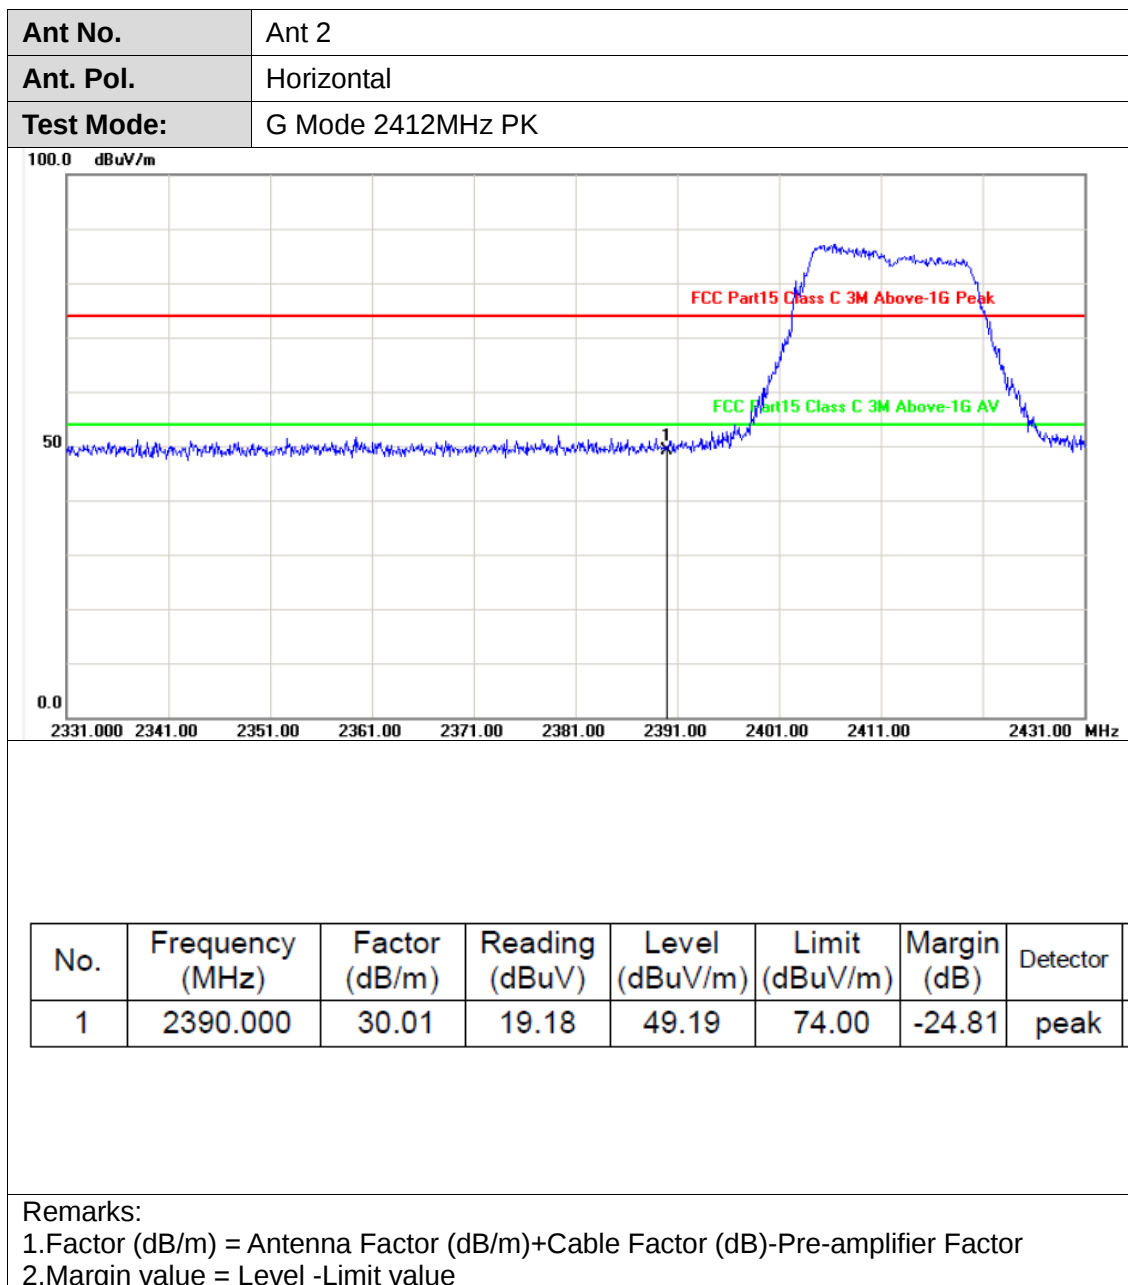

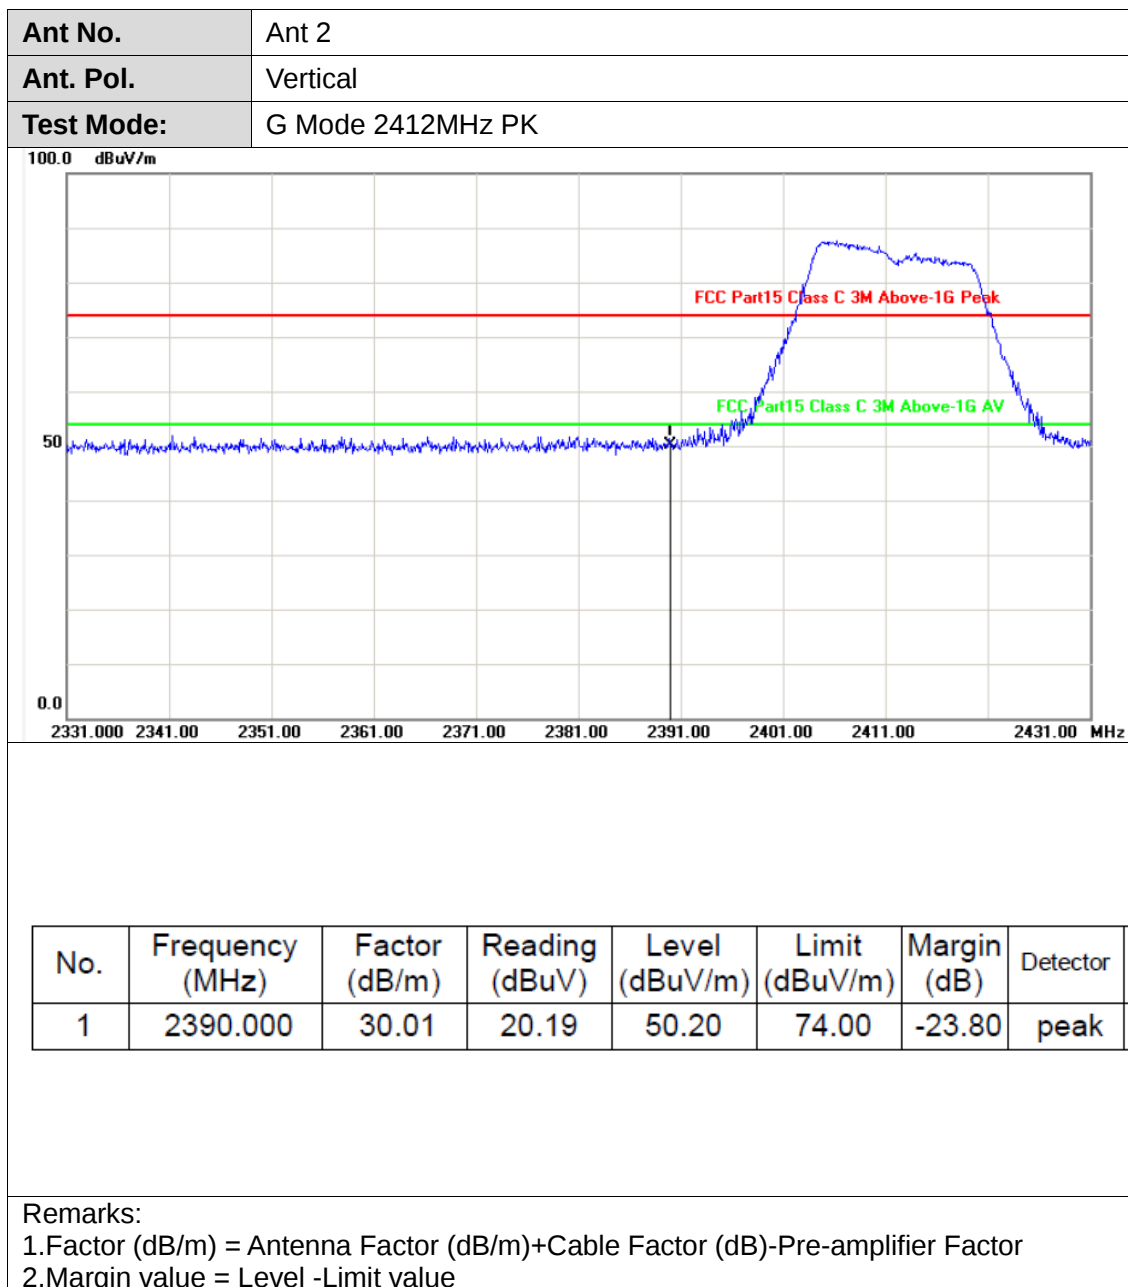


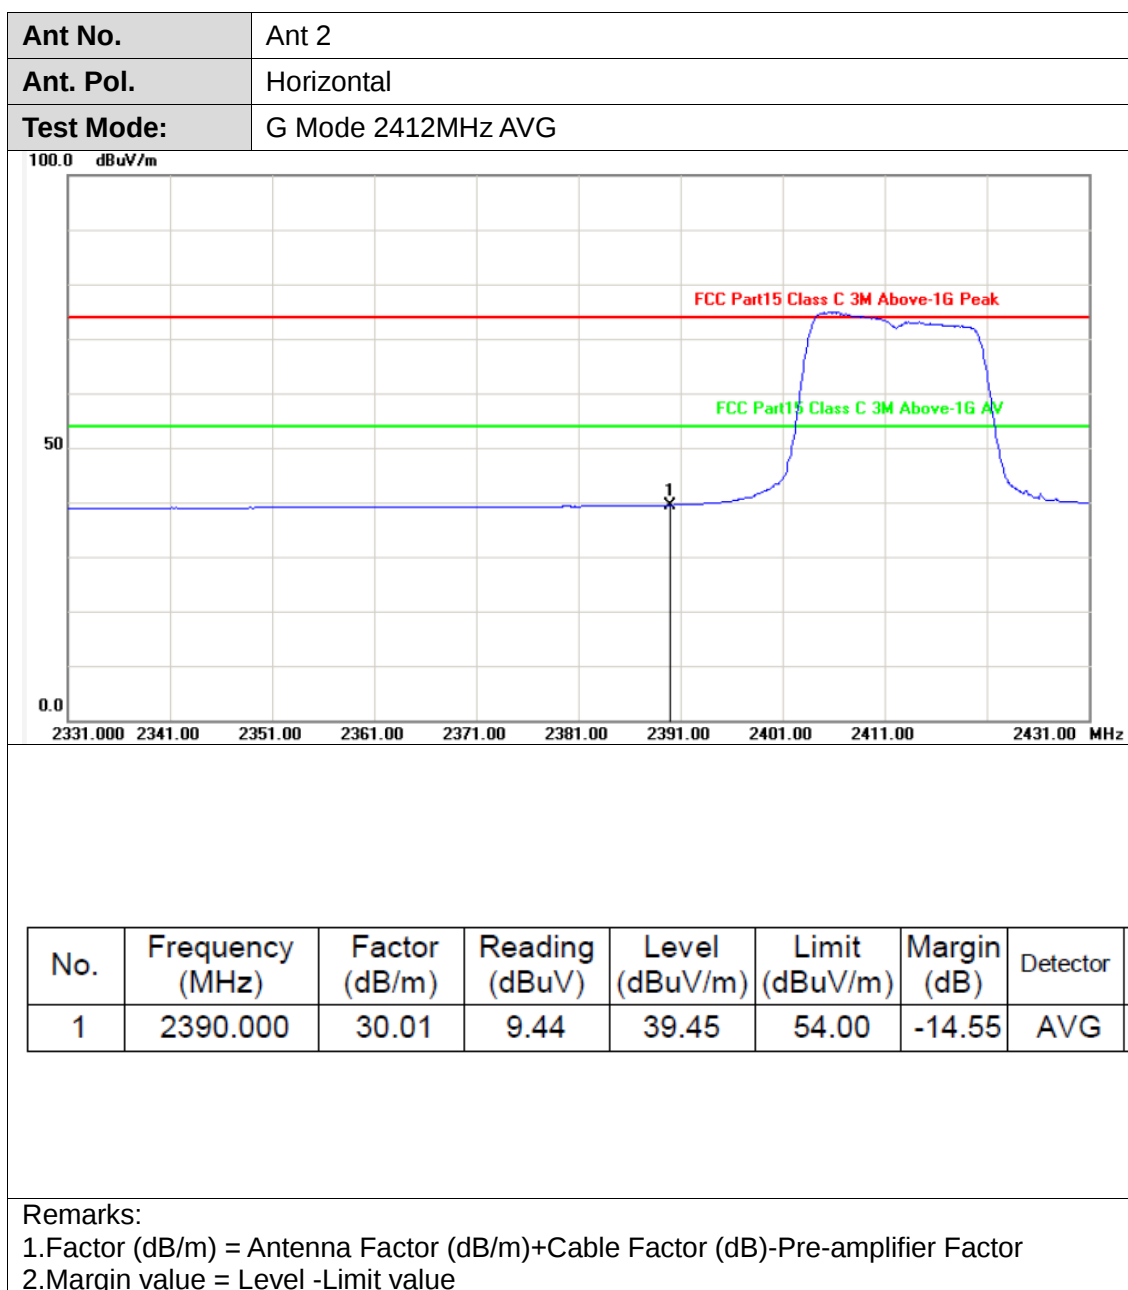

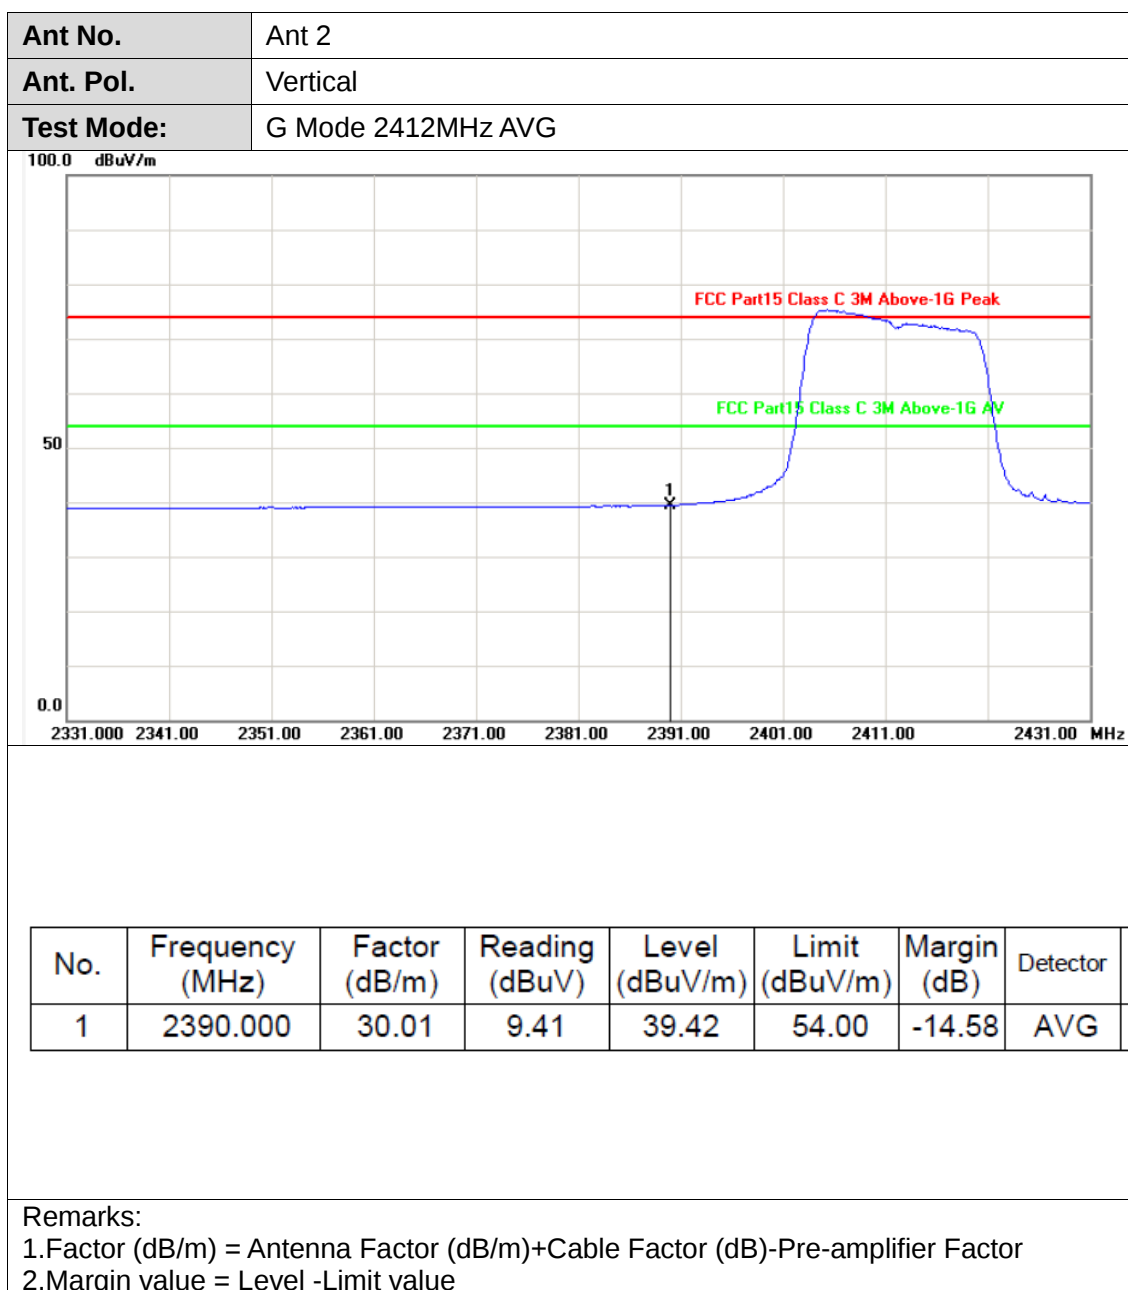



Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	G Mode 2462MHz PK

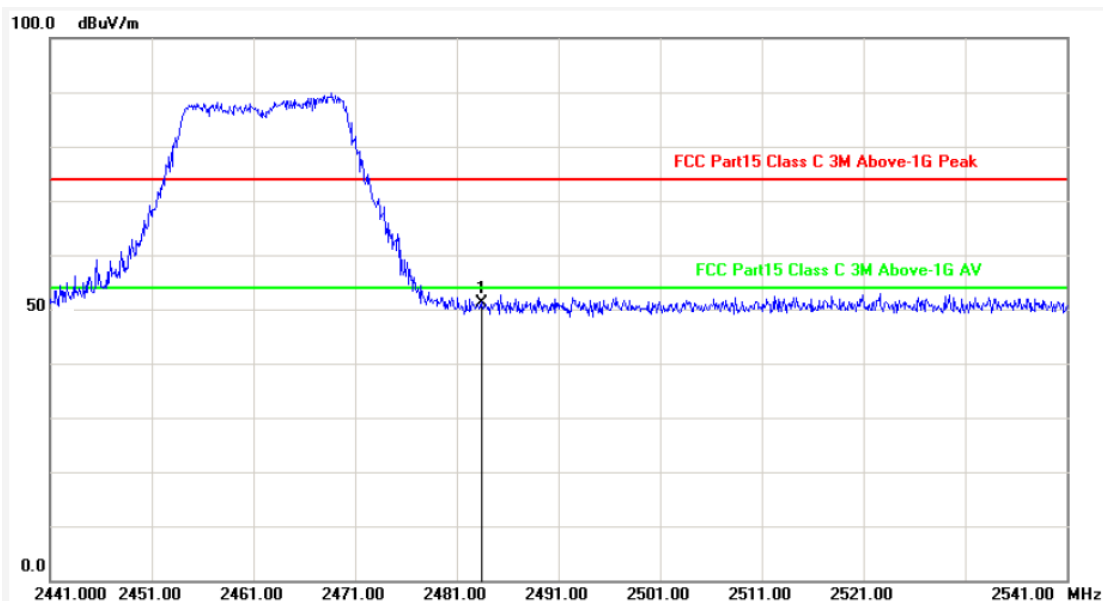


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	30.35	20.71	51.06	74.00	-22.94	peak

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value

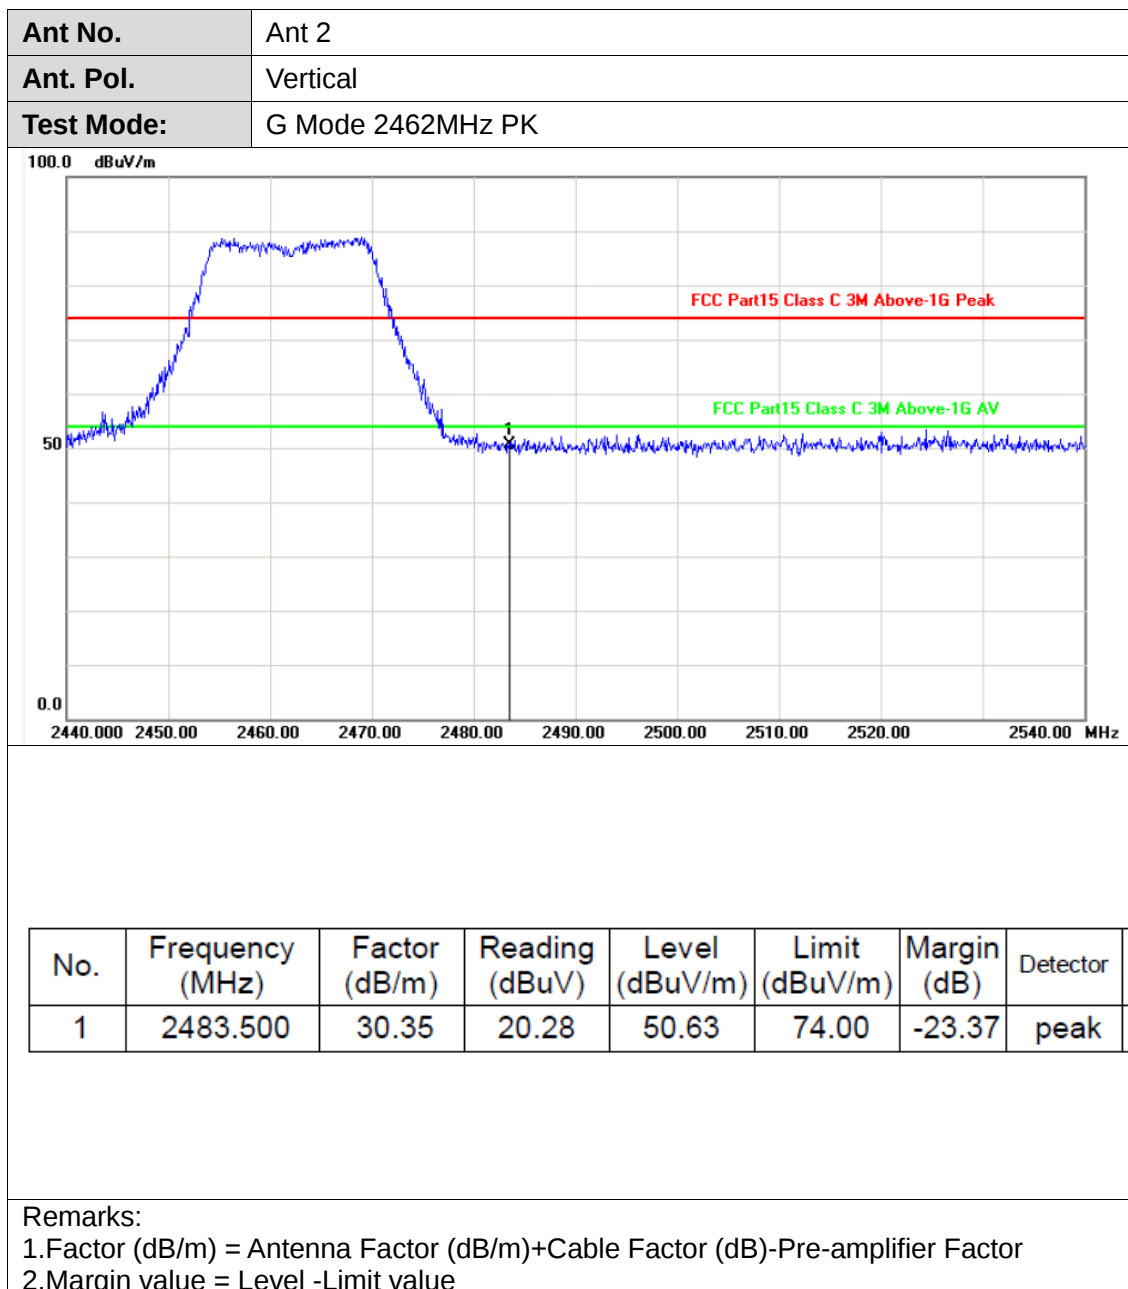




Ant No.	Ant 2
Ant. Pol.	Horizontal
Test Mode:	G Mode 2462MHz AVG

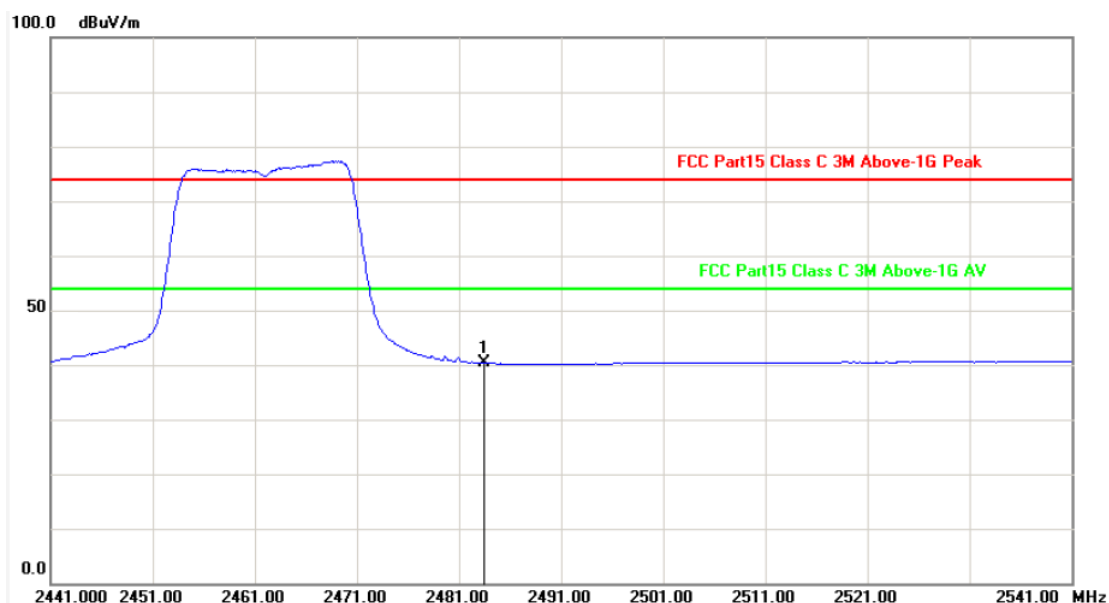



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	30.35	9.93	40.28	54.00	-13.72	AVG


Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value

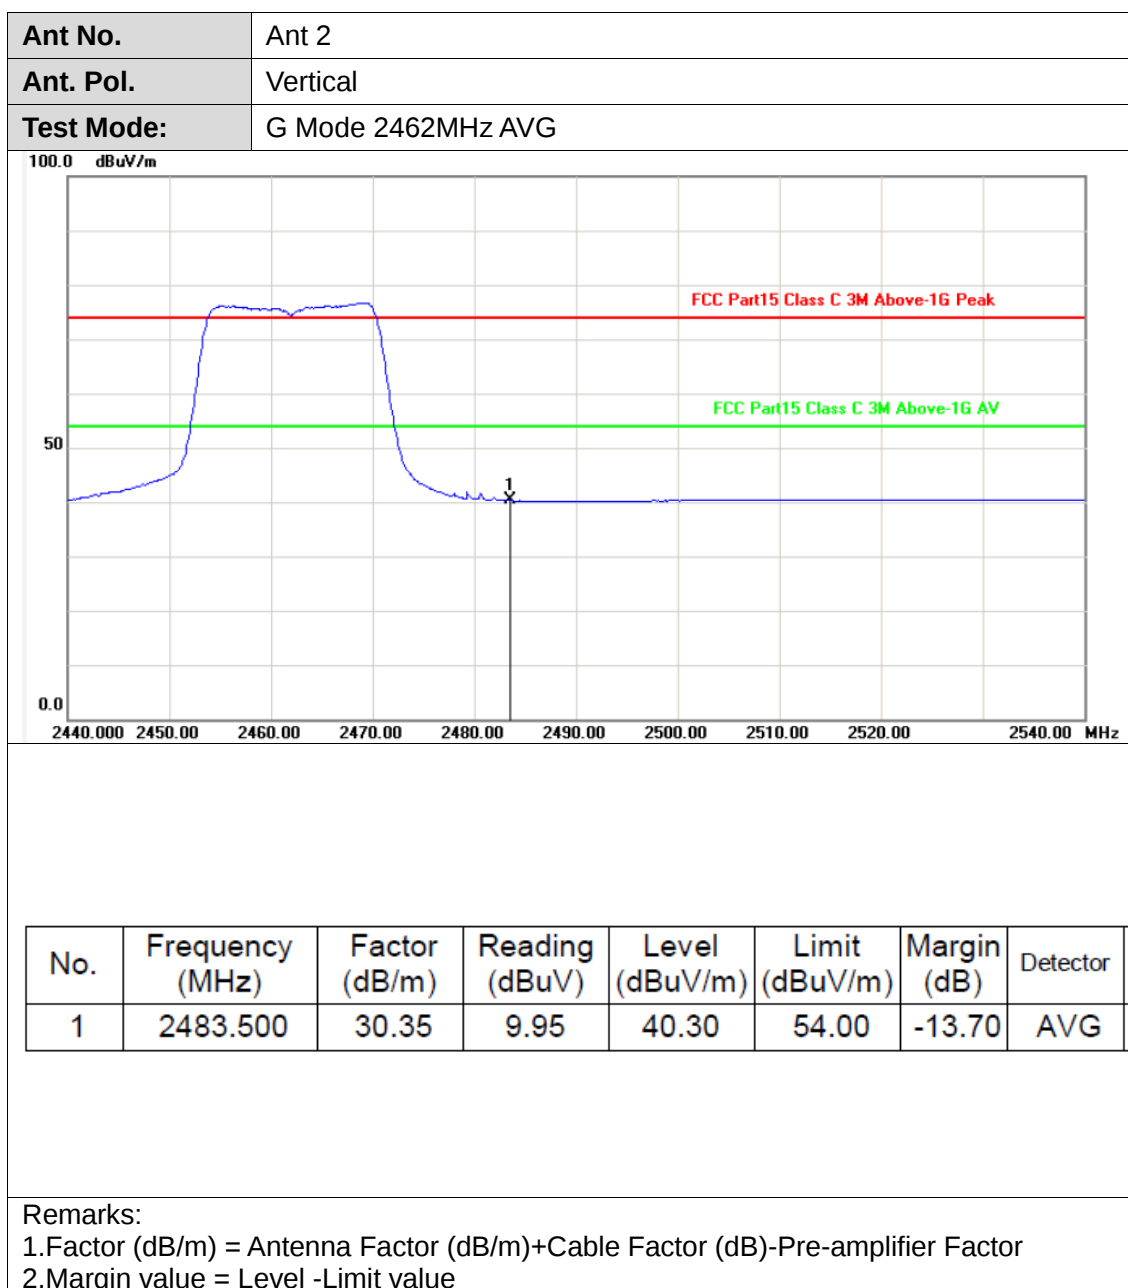


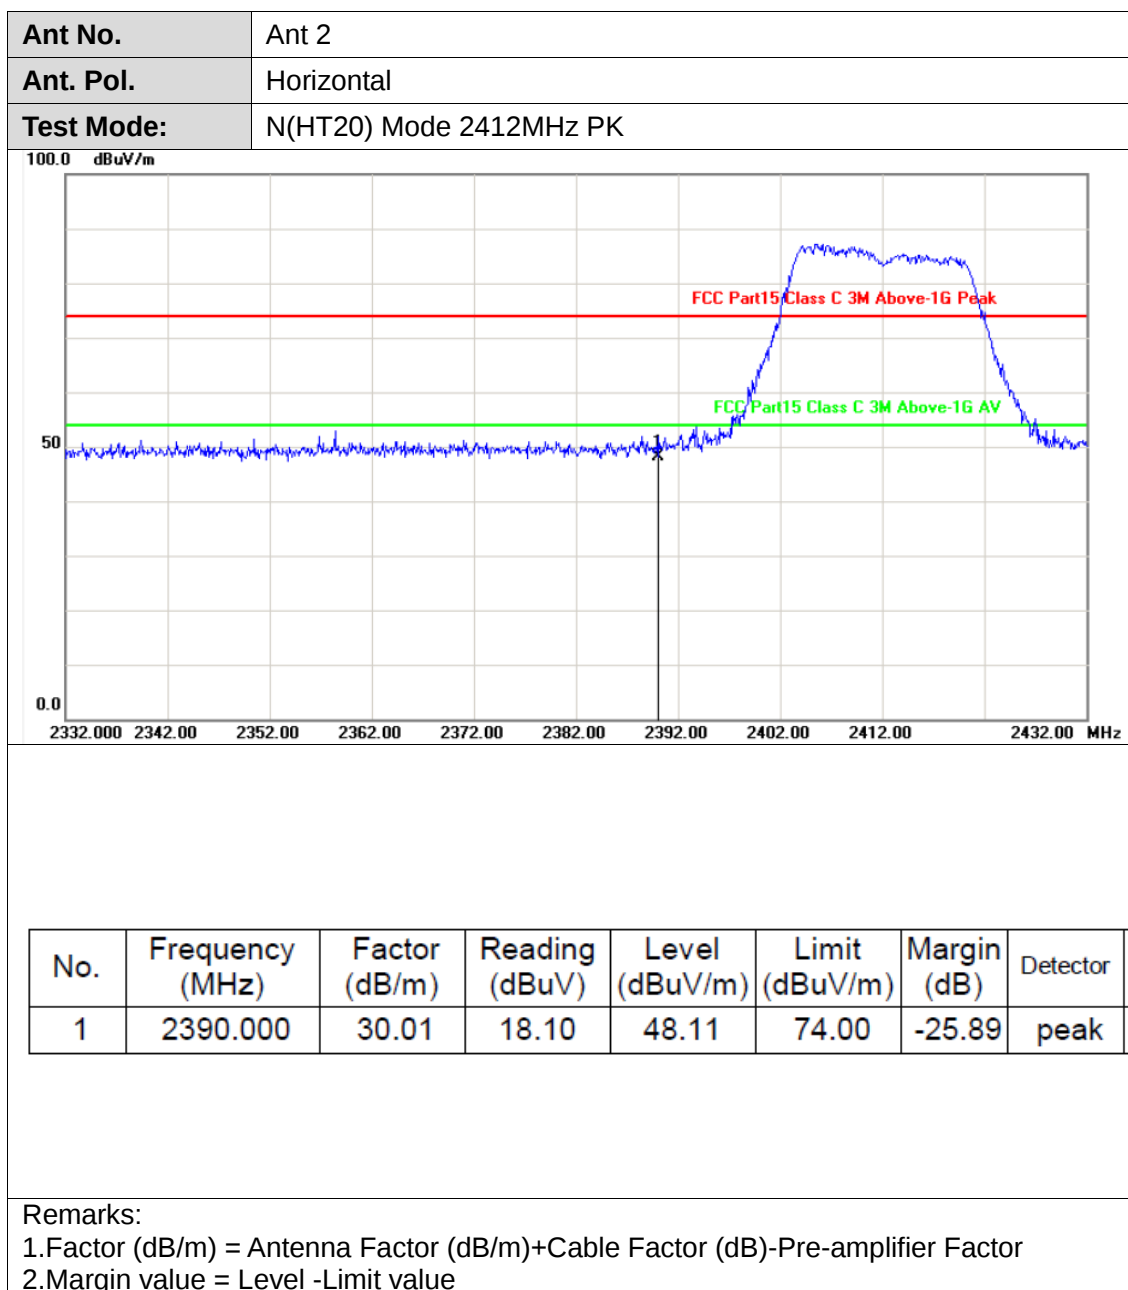


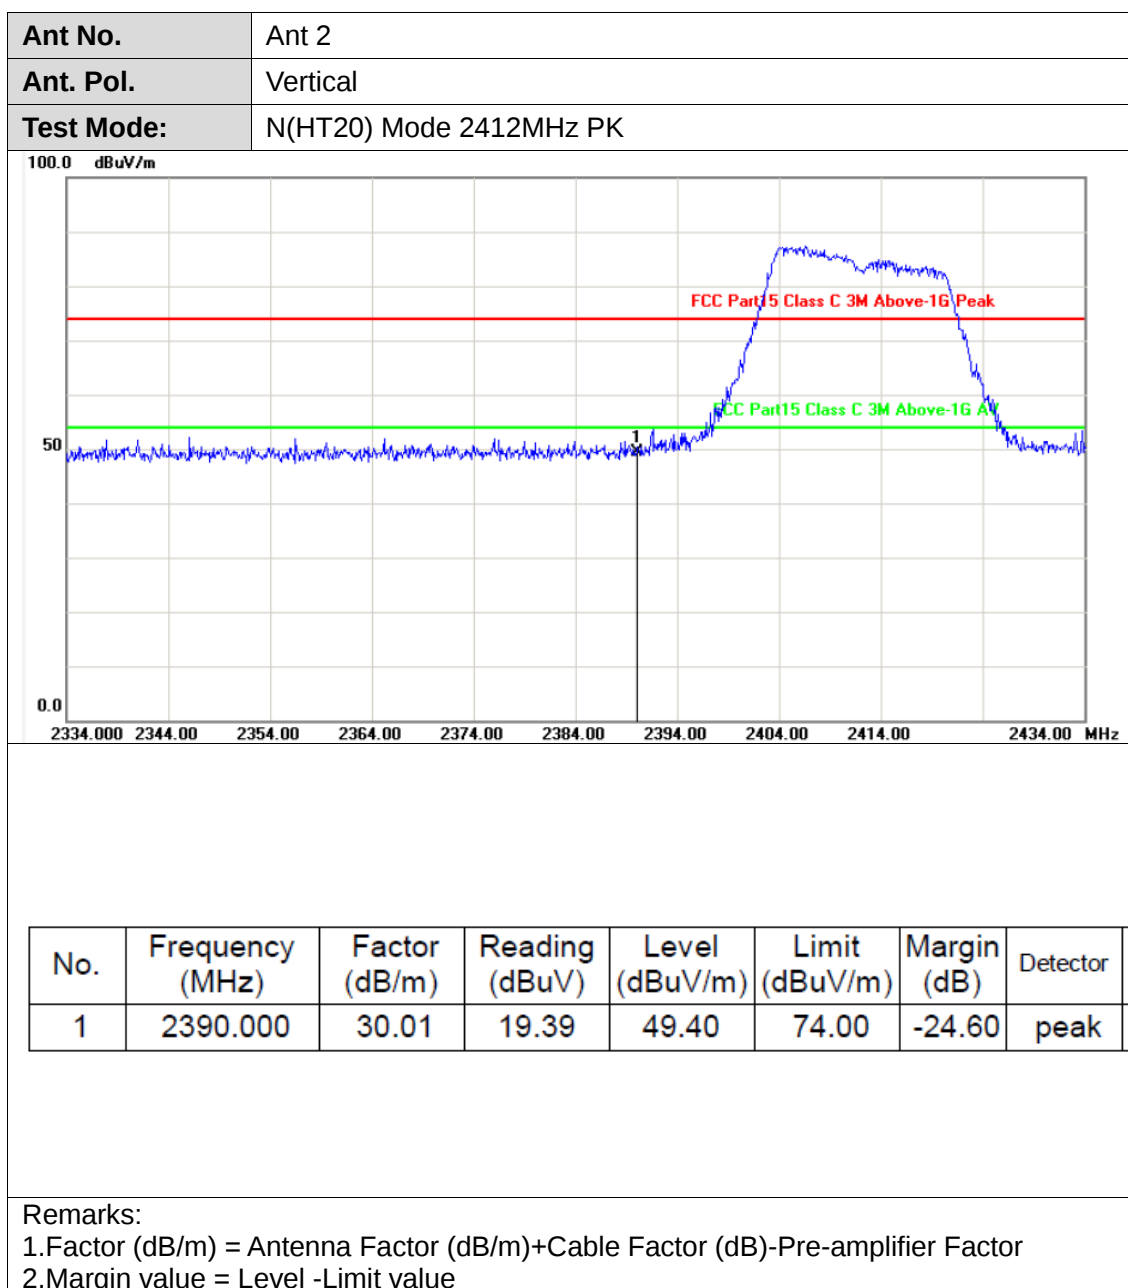


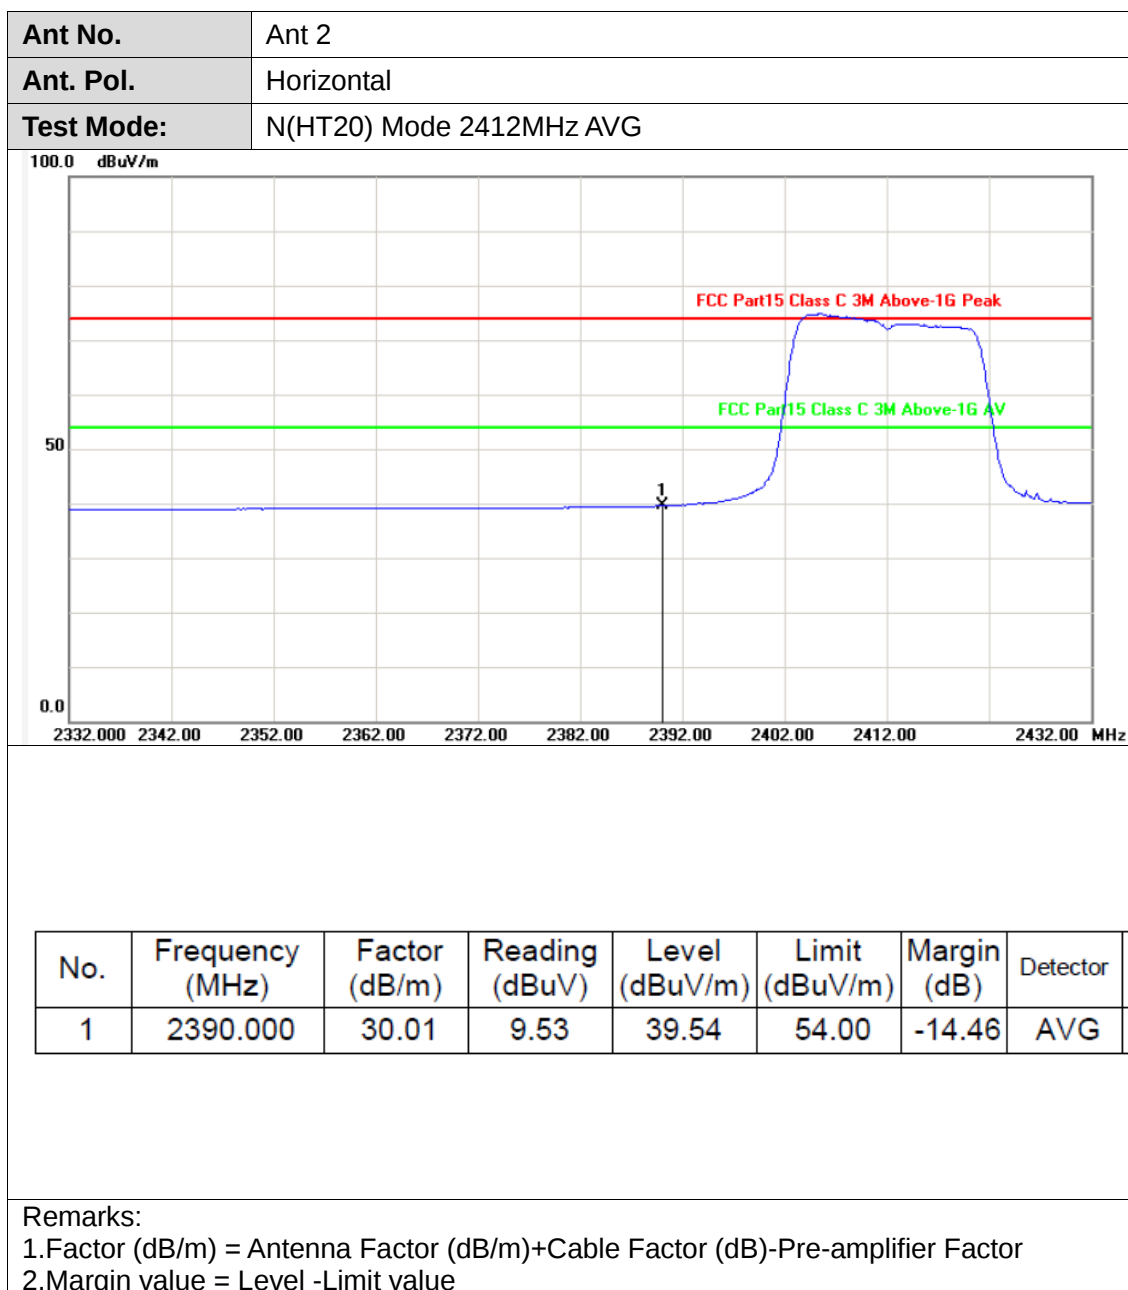


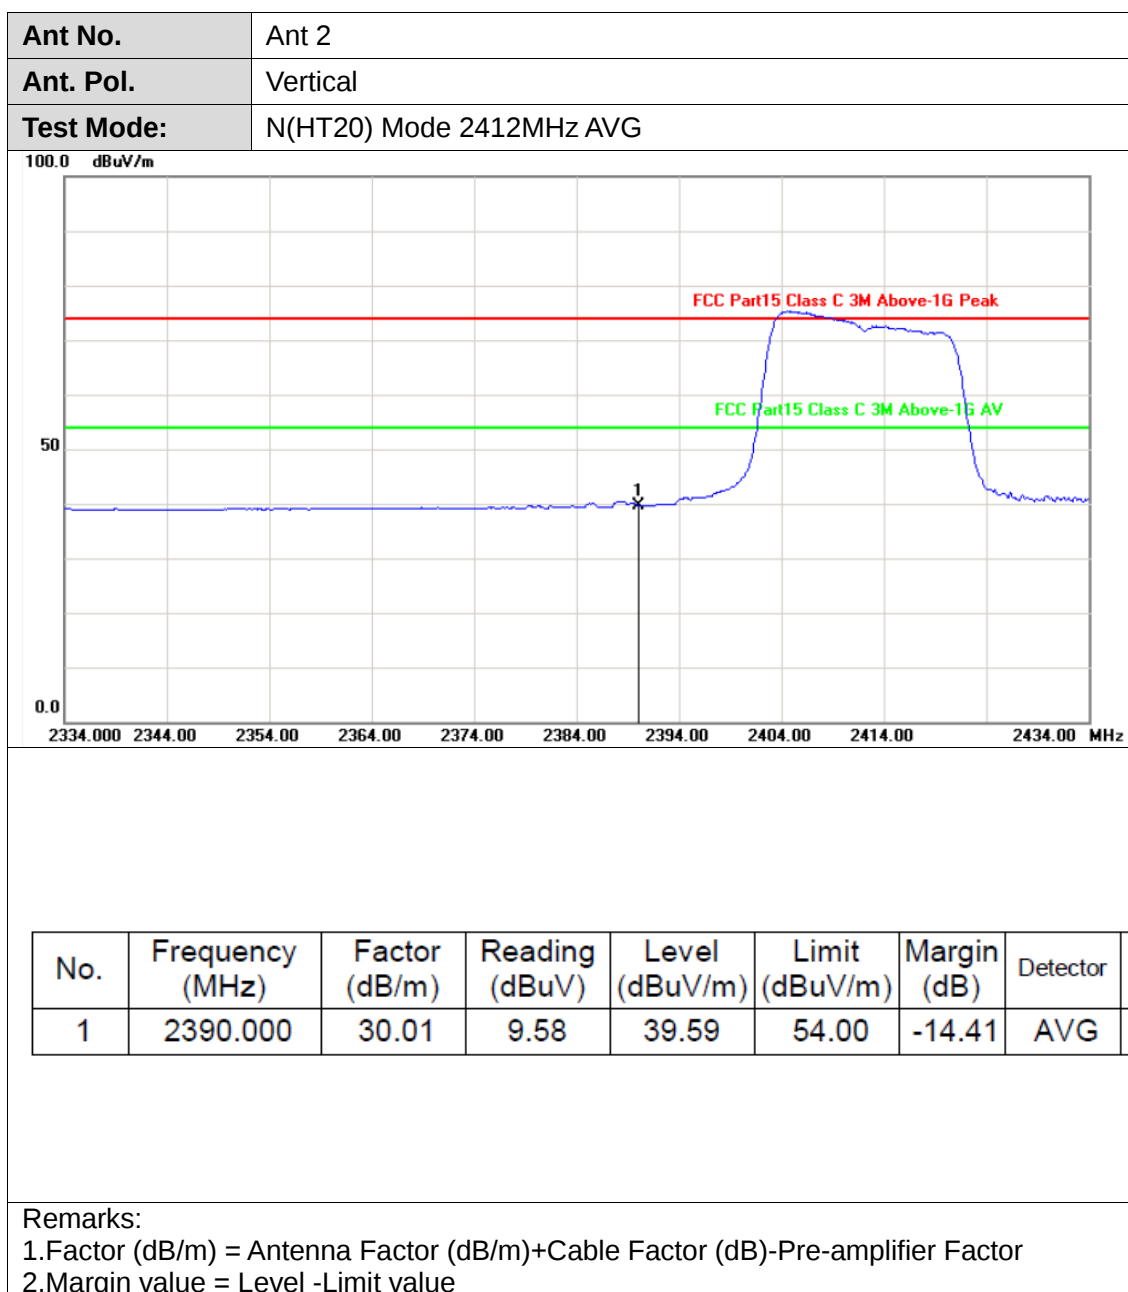

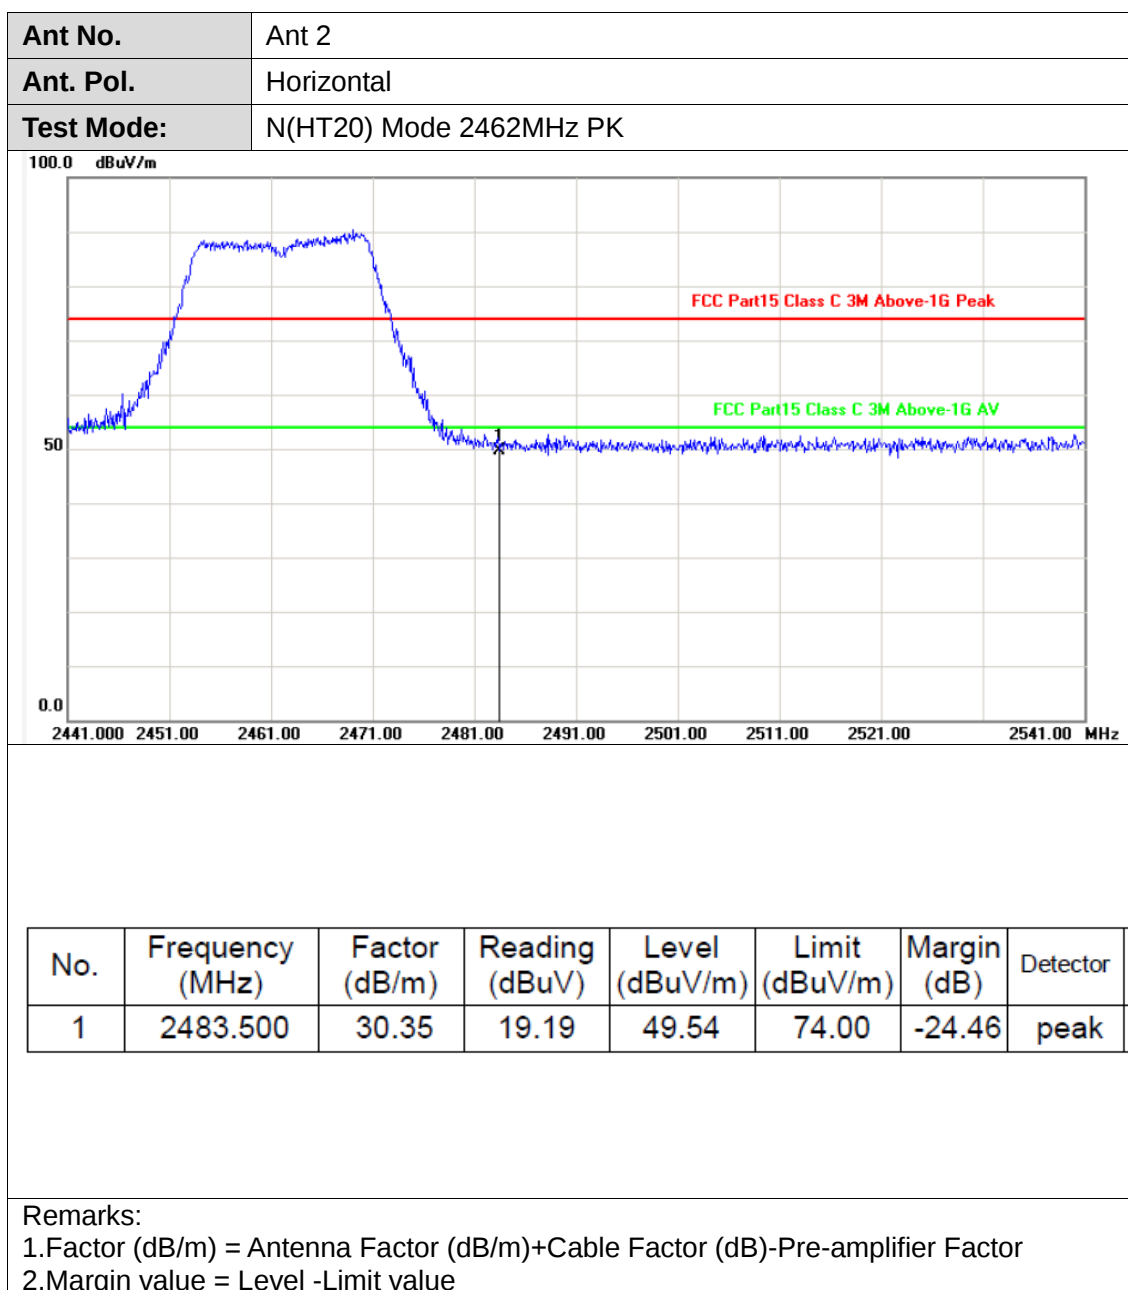

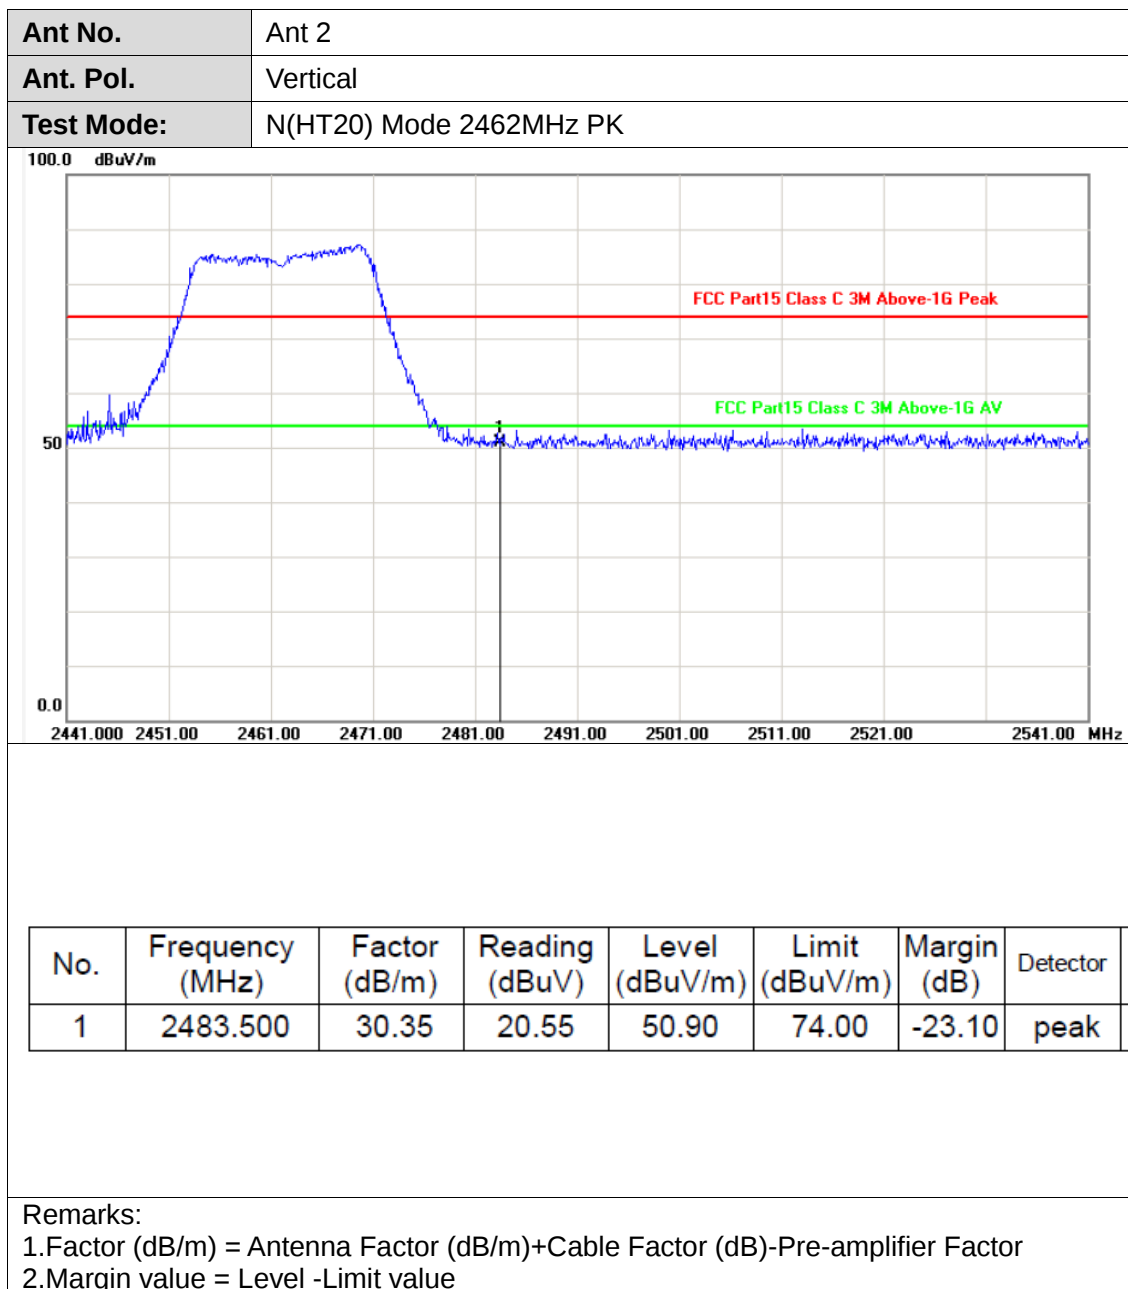

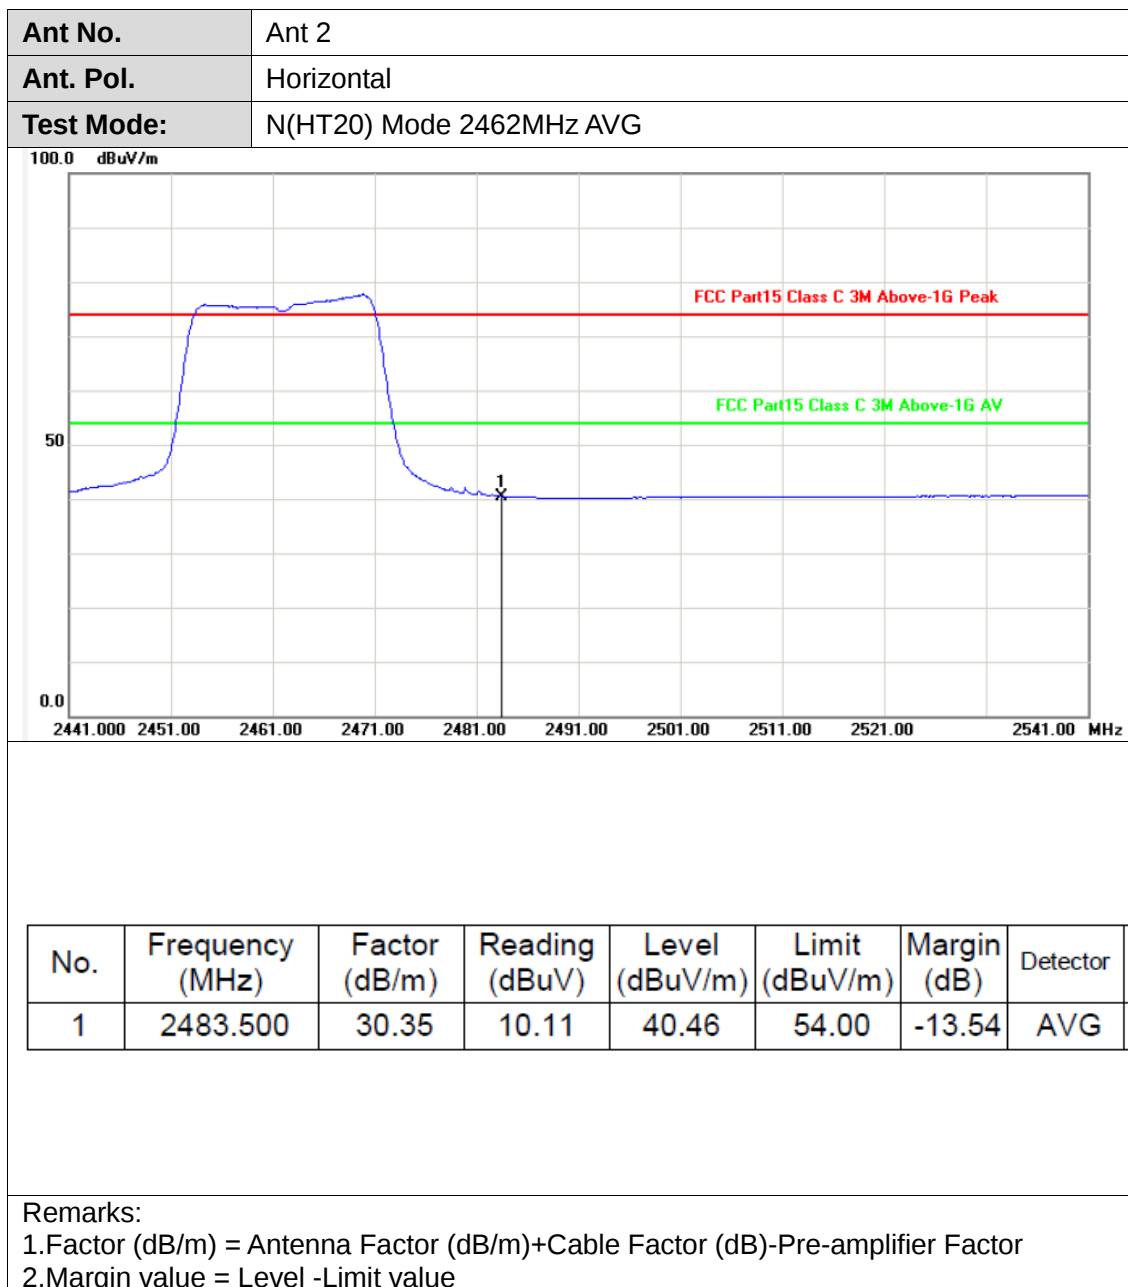

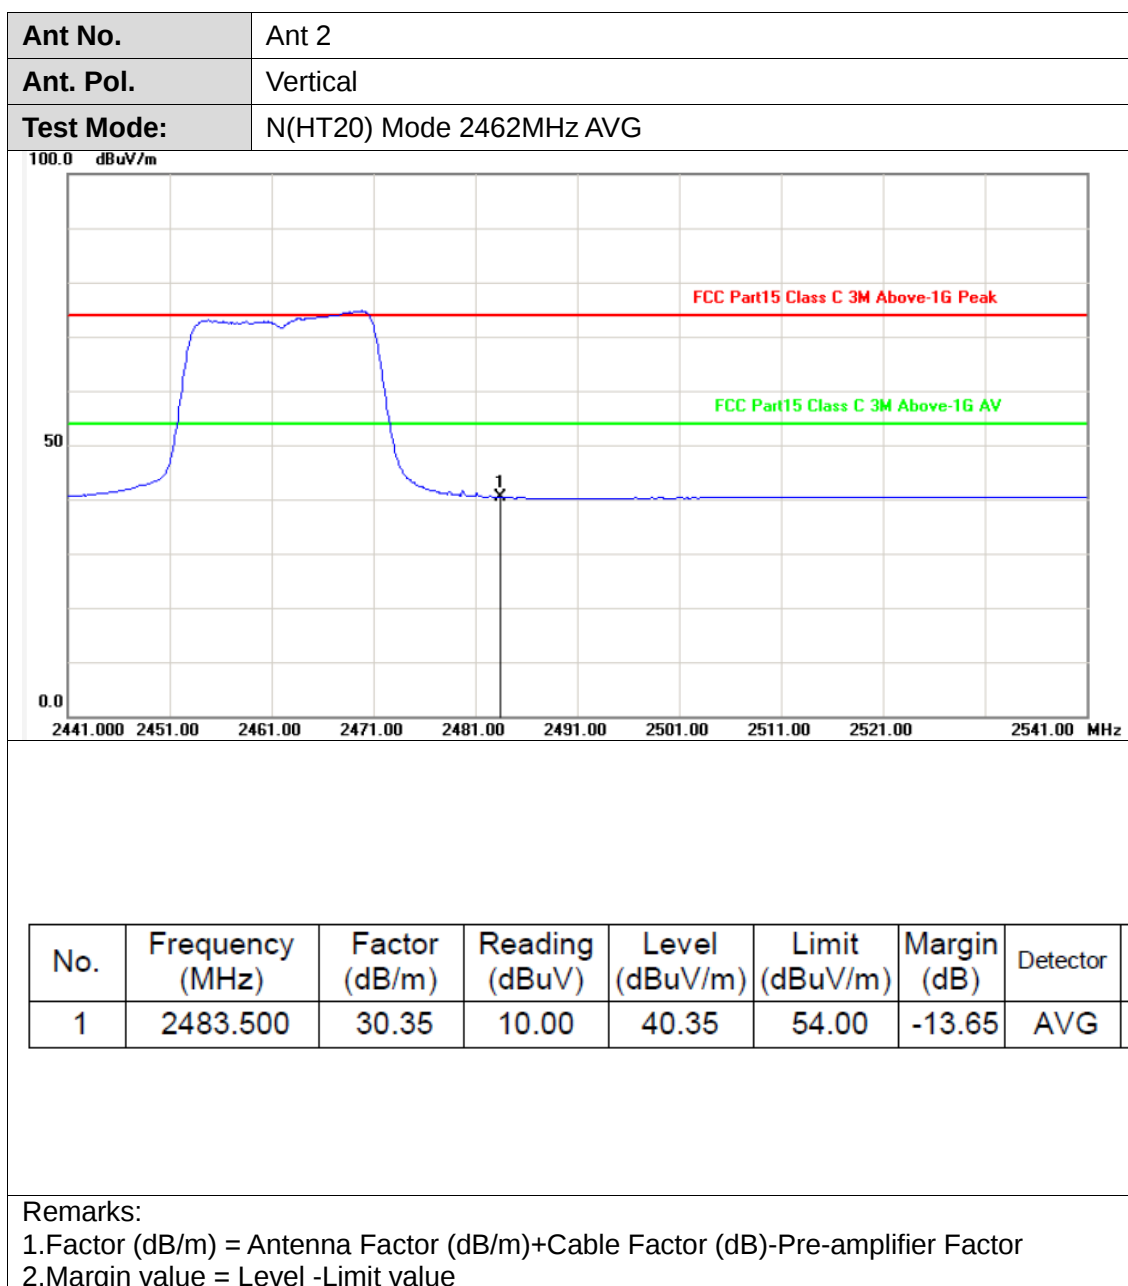



(2) Conducted Test

Ant No.	Ant 1		
Type:	802.11 b		
CH01	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max		

Ant No.	Ant 1																																					
Type:	802.11 b																																					
CH11	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm -80 dBm M1 M2 M3 M4 M1[1] M2[1] 3.09 dBm -60.24 dBm -62.83 dBm -59.90 dBm D1 -16.910 dBm CF 2.498 GHz 691 pts Span 100.0 MHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td></td><td>1</td><td>2.46298 GHz</td><td>3.09 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.4835 GHz</td><td>-60.24 dBm</td><td></td><td></td></tr><tr><td>M3</td><td></td><td>1</td><td>2.5 GHz</td><td>-62.83 dBm</td><td></td><td></td></tr><tr><td>M4</td><td></td><td>1</td><td>2.50046 GHz</td><td>-59.90 dBm</td><td></td><td></td></tr></tbody></table> Measuring... 17:41:19			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.46298 GHz	3.09 dBm			M2		1	2.4835 GHz	-60.24 dBm			M3		1	2.5 GHz	-62.83 dBm			M4		1	2.50046 GHz	-59.90 dBm		
	Type	Ref	Trc	X-value	Y-value	Function	Function Result																															
	M1		1	2.46298 GHz	3.09 dBm																																	
	M2		1	2.4835 GHz	-60.24 dBm																																	
	M3		1	2.5 GHz	-62.83 dBm																																	
M4		1	2.50046 GHz	-59.90 dBm																																		
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result																																			
2483.50	-60.24	-16.910	Pass																																			
2500.00	-62.83																																					
2500.46	-59.90																																					

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




Ant No.	Ant 1																																					
Type:	802.11 g																																					
CH01	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm -80 dBm M1[1] M2[1] M1 M2 M3 M4 -5.67 dBm 2.405800 GHz -39.04 dBm 2.400000 GHz D1 -25.670 dBm CF 2.377 GHz 691 pts Span 100.0 MHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td></td><td>1</td><td>2.4058 GHz</td><td>-5.67 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.4 GHz</td><td>-39.04 dBm</td><td></td><td></td></tr><tr><td>M3</td><td></td><td>1</td><td>2.39 GHz</td><td>-56.52 dBm</td><td></td><td></td></tr><tr><td>M4</td><td></td><td>1</td><td>2.388 GHz</td><td>-45.34 dBm</td><td></td><td></td></tr></tbody></table> Measuring... 17.07.2019 17:42:35 Date: 17. JUL. 2019 17:42:35			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4058 GHz	-5.67 dBm			M2		1	2.4 GHz	-39.04 dBm			M3		1	2.39 GHz	-56.52 dBm			M4		1	2.388 GHz	-45.34 dBm		
	Type	Ref	Trc	X-value	Y-value	Function	Function Result																															
	M1		1	2.4058 GHz	-5.67 dBm																																	
	M2		1	2.4 GHz	-39.04 dBm																																	
	M3		1	2.39 GHz	-56.52 dBm																																	
M4		1	2.388 GHz	-45.34 dBm																																		
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result																																			
2400.00	-39.04	-25.670	Pass																																			
2390.00	-56.52																																					
2388.00	-45.34																																					

Ant No.	Ant 1																																					
Type:	802.11 g																																					
CH11	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm -80 dBm M1 M2 M3 M4 D1 -26.510 dBm M1[1] -6.51 dBm 2.469520 GHz M2[1] -59.94 dBm 2.483500 GHz CF 2.496 GHz 691 pts Span 100.0 MHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.46952 GHz</td><td>-6.51 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.4835 GHz</td><td>-59.94 dBm</td><td></td><td></td></tr><tr><td>M3</td><td></td><td>1</td><td>2.5 GHz</td><td>-62.85 dBm</td><td></td><td></td></tr><tr><td>M4</td><td></td><td>1</td><td>2.51385 GHz</td><td>-62.25 dBm</td><td></td><td></td></tr></table> Measuring... 17.07.2019 17:43:34 Date: 17. JUL. 2019 17:43:33			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.46952 GHz	-6.51 dBm			M2		1	2.4835 GHz	-59.94 dBm			M3		1	2.5 GHz	-62.85 dBm			M4		1	2.51385 GHz	-62.25 dBm		
	Type	Ref	Trc	X-value	Y-value	Function	Function Result																															
	M1		1	2.46952 GHz	-6.51 dBm																																	
	M2		1	2.4835 GHz	-59.94 dBm																																	
	M3		1	2.5 GHz	-62.85 dBm																																	
M4		1	2.51385 GHz	-62.25 dBm																																		
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result																																			
2483.50	-59.94	-26.510	Pass																																			
2500.00	-62.85																																					
2513.85	-62.25																																					

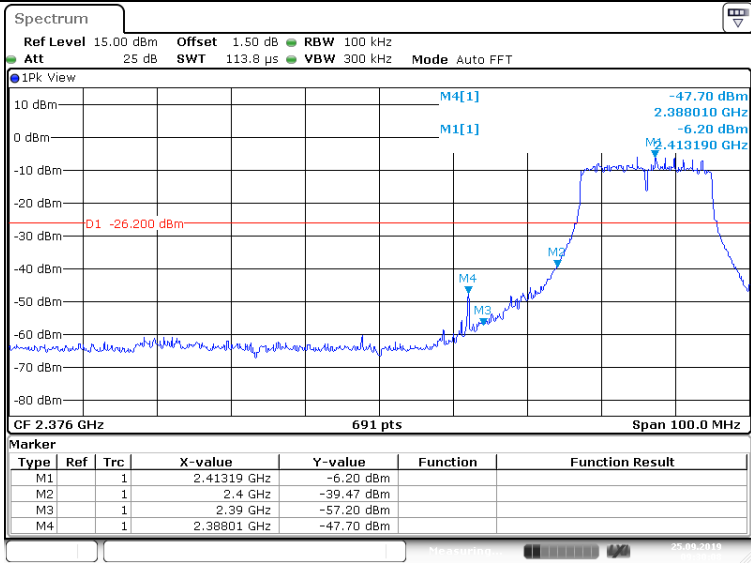



Ant No.	Ant 1		
Type:	802.11 n(HT20)		
CH01			
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.00	-39.47	-26.200	Pass
2390.00	-57.20		
2388.01	-47.70		

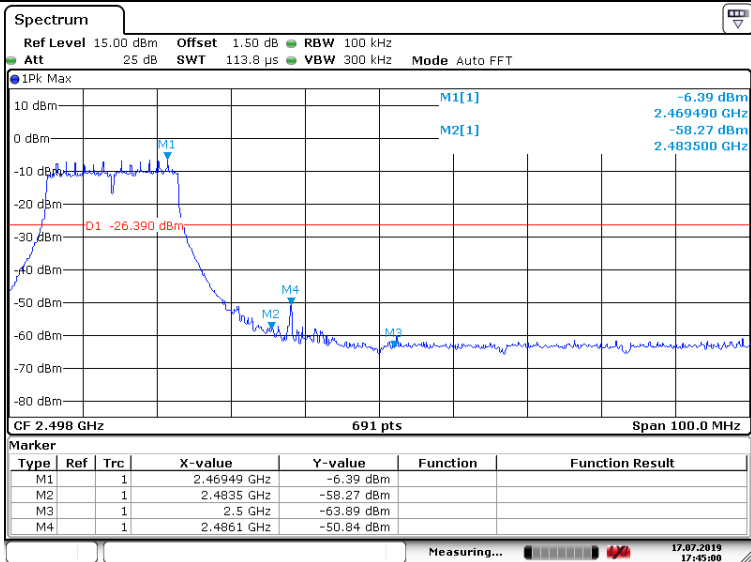Ant No.	Ant 1		
Type:	802.11 n(HT20)		
CH11			
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.50	-58.27	-26.390	Pass
2500.00	-63.89		
2486.10	-50.84		



Ant No.	Ant 2		
Type:	802.11 b		
CH01	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max </		

Ant No.	Ant 2																																					
Type:	802.11 b																																					
CH11	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max M1 M1[1] 6.28 dBm M2[1] 2.462520 GHz -61.70 dBm M2 2.483500 GHz -64.67 dBm D1 -13.720 dBm M3 M4 CF 2.5 GHz 691 pts Span 100.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.46252 GHz</td><td>6.28 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.4835 GHz</td><td>-61.70 dBm</td><td></td><td></td></tr><tr><td>M3</td><td></td><td>1</td><td>2.5 GHz</td><td>-64.67 dBm</td><td></td><td></td></tr><tr><td>M4</td><td></td><td>1</td><td>2.50868 GHz</td><td>-60.20 dBm</td><td></td><td></td></tr></table> Measuring... 17.07.2019 19:13:51 Date: 17.JUL.2019 19:13:50			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.46252 GHz	6.28 dBm			M2		1	2.4835 GHz	-61.70 dBm			M3		1	2.5 GHz	-64.67 dBm			M4		1	2.50868 GHz	-60.20 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																
M1		1	2.46252 GHz	6.28 dBm																																		
M2		1	2.4835 GHz	-61.70 dBm																																		
M3		1	2.5 GHz	-64.67 dBm																																		
M4		1	2.50868 GHz	-60.20 dBm																																		
Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result																																			
2483.50	-61.70	-13.720	Pass																																			
2500.00	-64.67																																					
2508.68	-60.20																																					

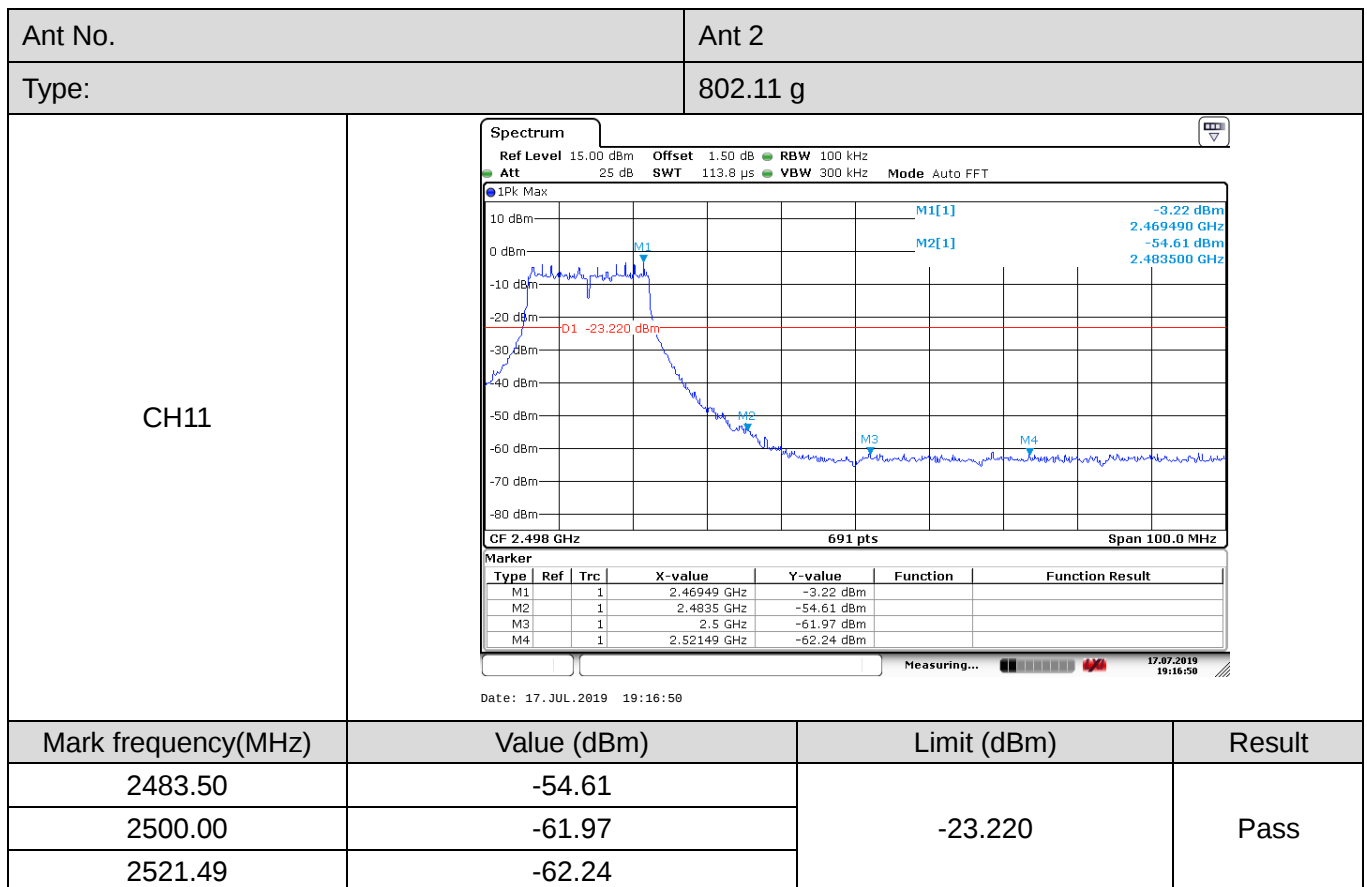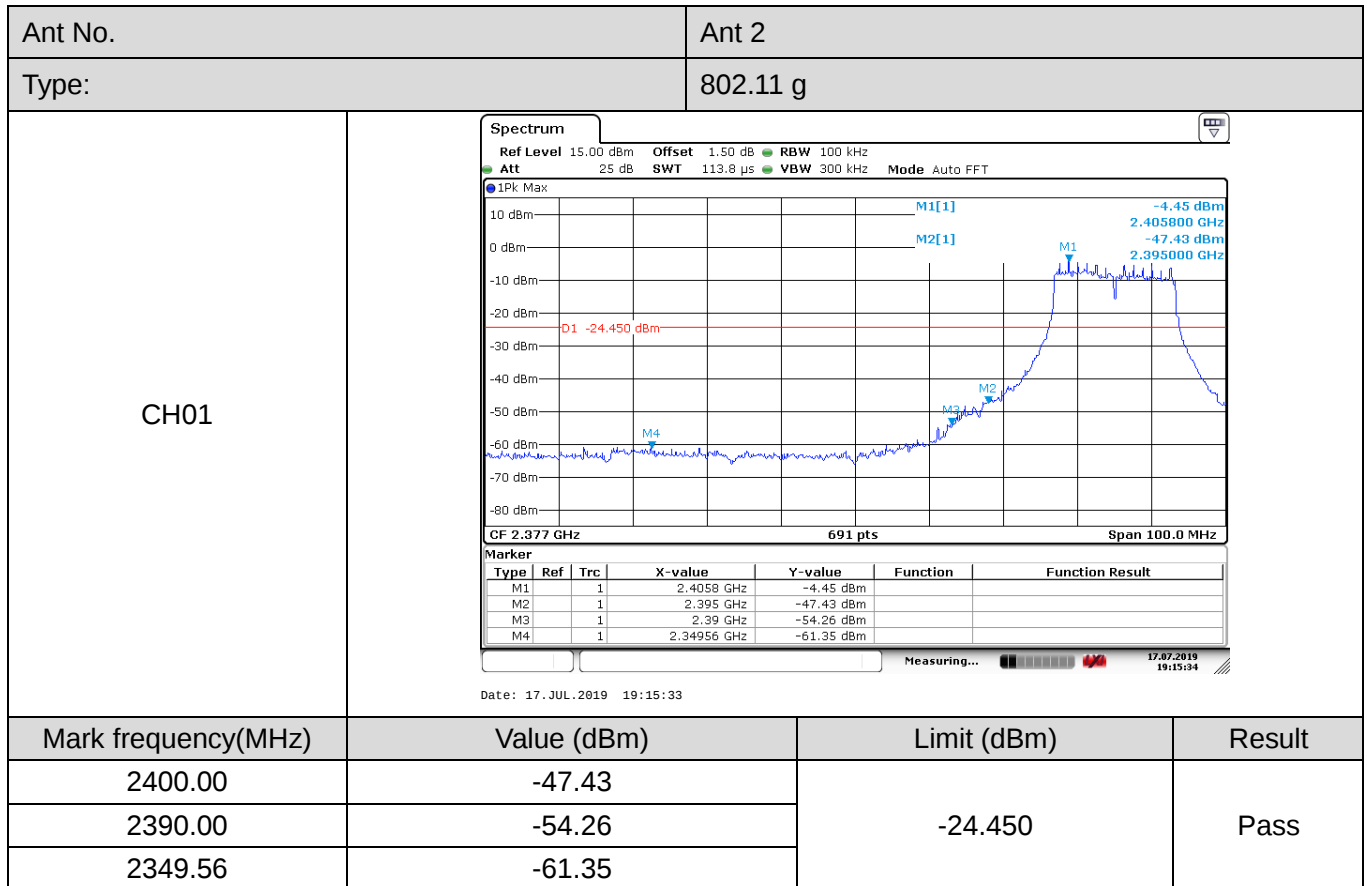



Ant No.	Ant 2		
Type:	802.11 n(HT20)		
CH01	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max		

Ant No.	Ant 2		
Type:	802.11 n(HT20)		
CH11	Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max <		




3.4. Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)/ RSS-247 5.2 a:

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.

Test Results




Ant No.	Ant 1			
Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	7.525	≥500	Pass
	06	7.525		
	11	7.583		
802.11g	01	16.208	≥500	Pass
	06	16.353		
	11	16.353		
802.11n(HT20)	01	17.189	≥500	Pass
	06	17.540		
	11	17.583		

Ant No.	Ant 2			
Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	7.583	≥500	Pass
	06	7.583		
	11	7.091		
802.11g	01	16.281	≥500	Pass
	06	16.100		
	11	16.389		
802.11n(HT20)	01	17.192	≥500	Pass
	06	17.583		
	11	17.583		



Test plot as follows:

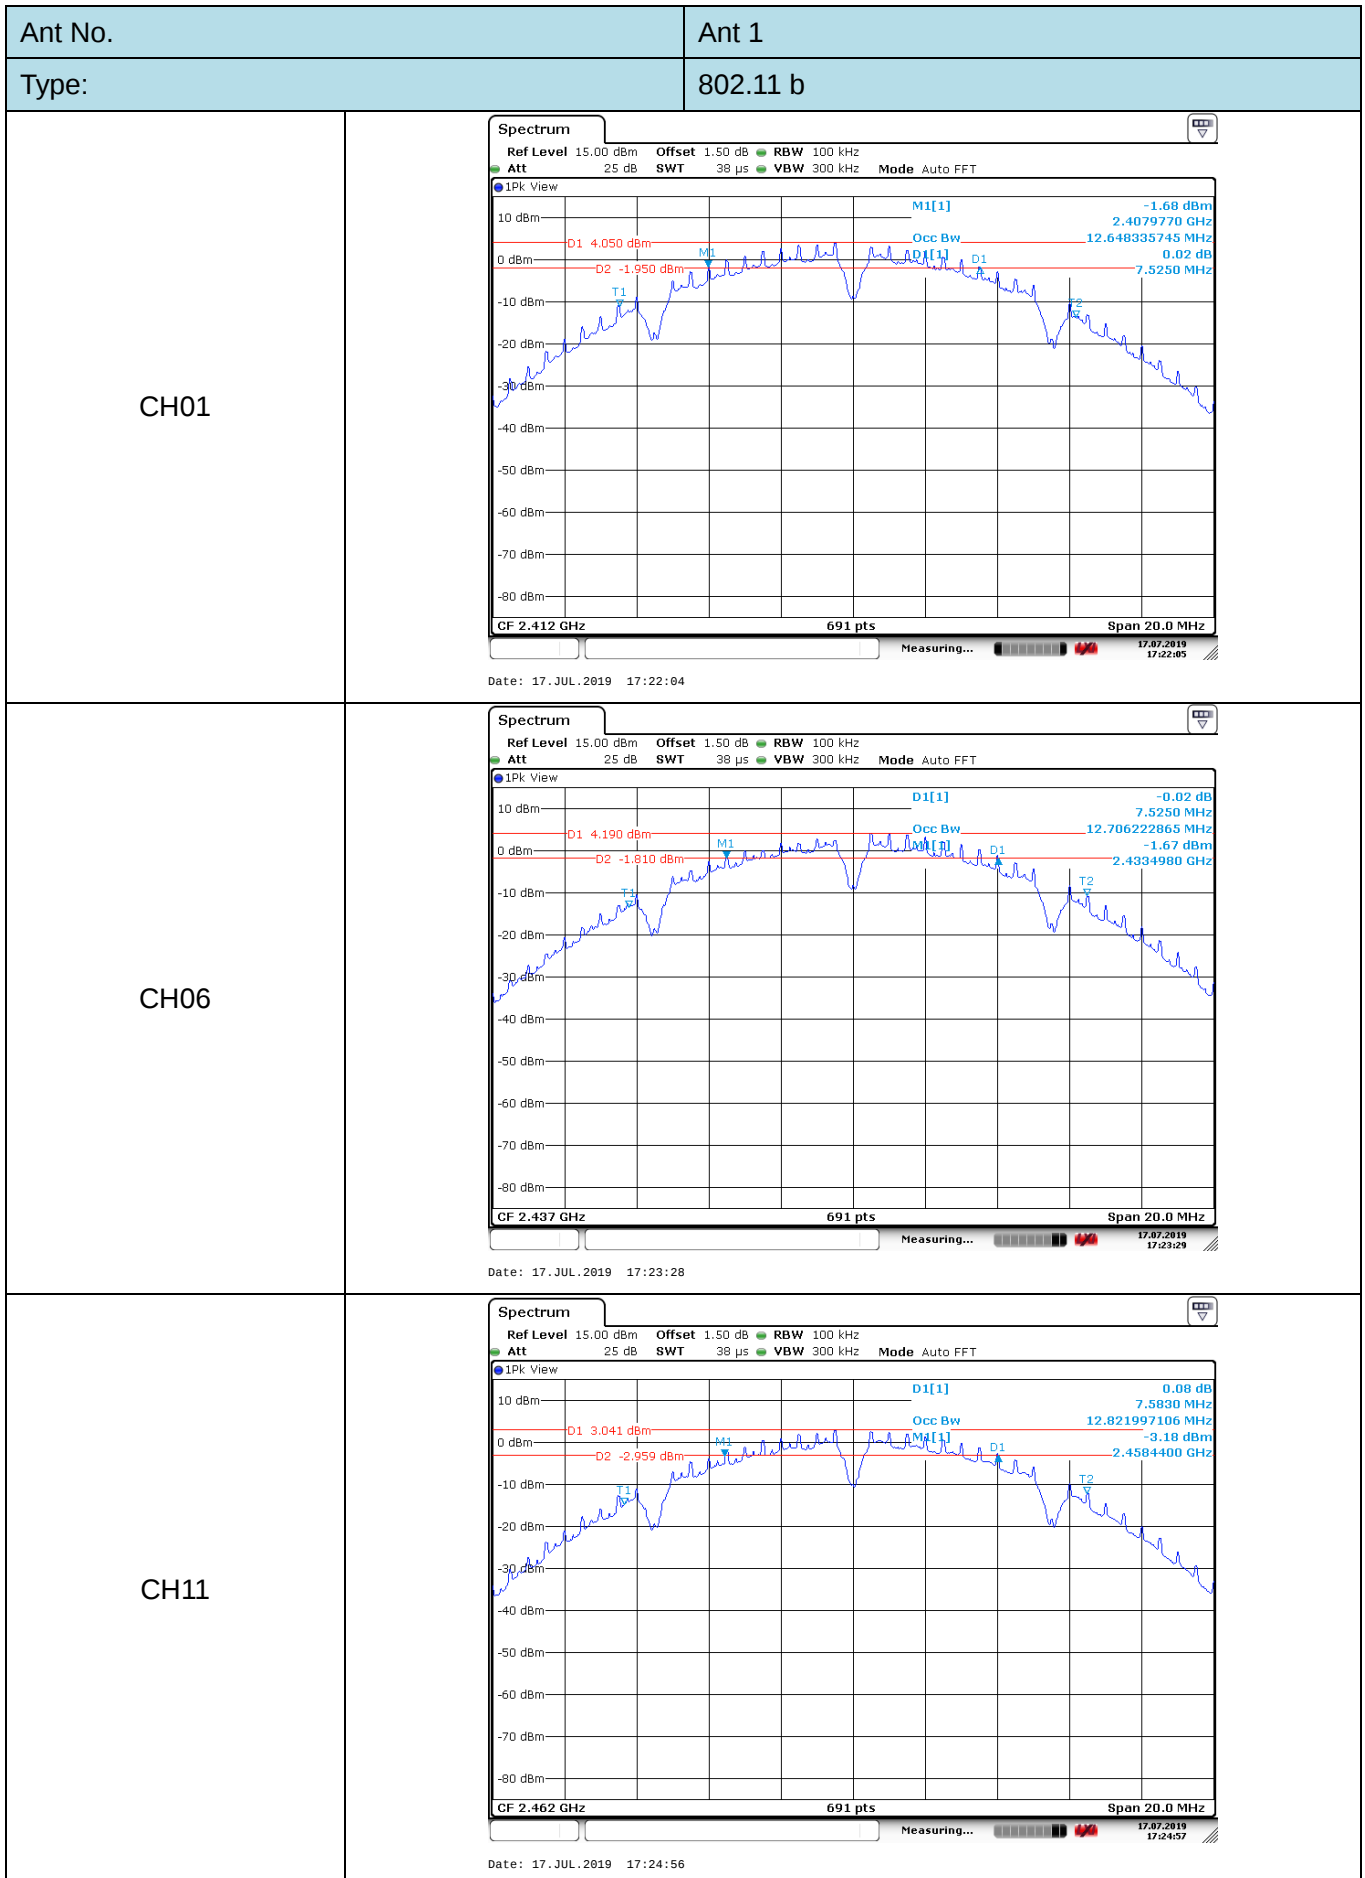

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

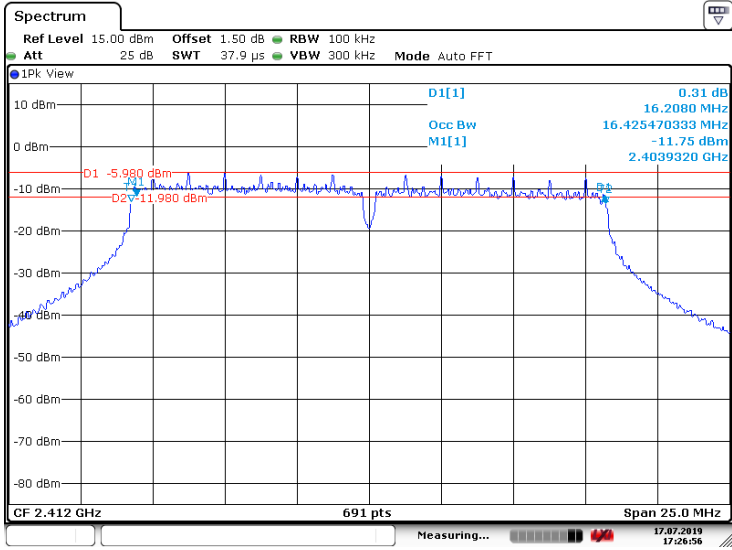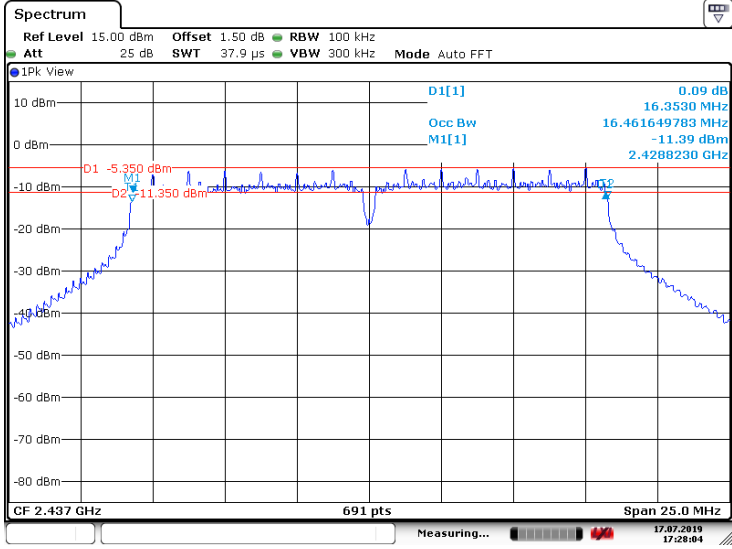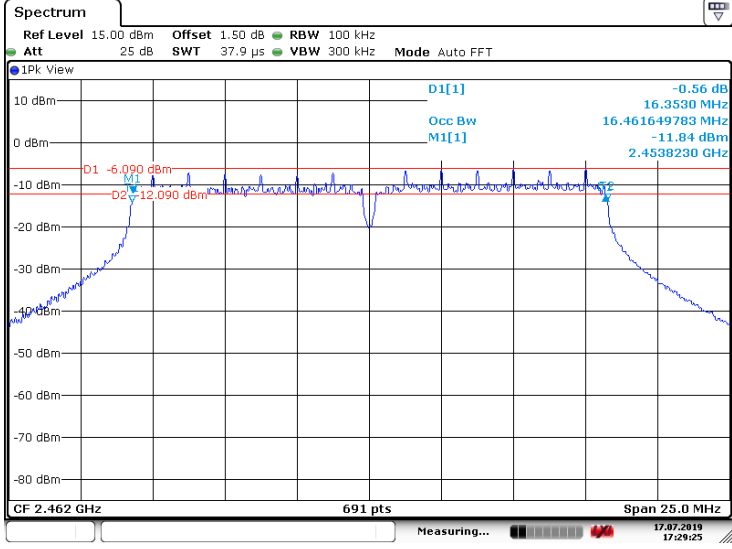

Ant No.	Ant 1
Type:	802.11 g
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT 1Pk View D1[1] 0.31 dBm 16.2080 MHz 16.425470333 MHz -11.75 dBm 2.4039320 GHz D1 -5.980 dBm D2 -11.980 dBm CF 2.412 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:26:55
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT 1Pk View D1[1] 0.09 dBm 16.3530 MHz 16.461649783 MHz -11.39 dBm 2.4288230 GHz D1 -5.350 dBm D2 -11.350 dBm CF 2.437 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:28:03
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT 1Pk View D1[1] -0.56 dBm 16.3530 MHz 16.461649783 MHz -11.84 dBm 2.4538230 GHz D1 -6.090 dBm D2 -12.090 dBm CF 2.462 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:29:24

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

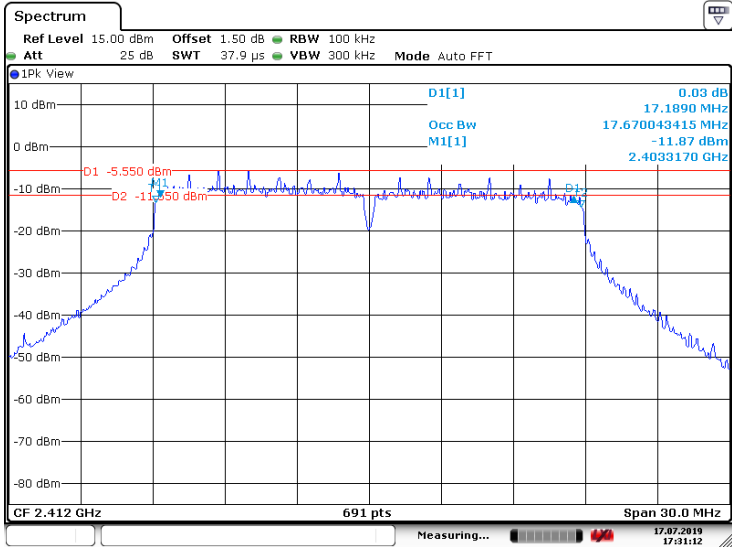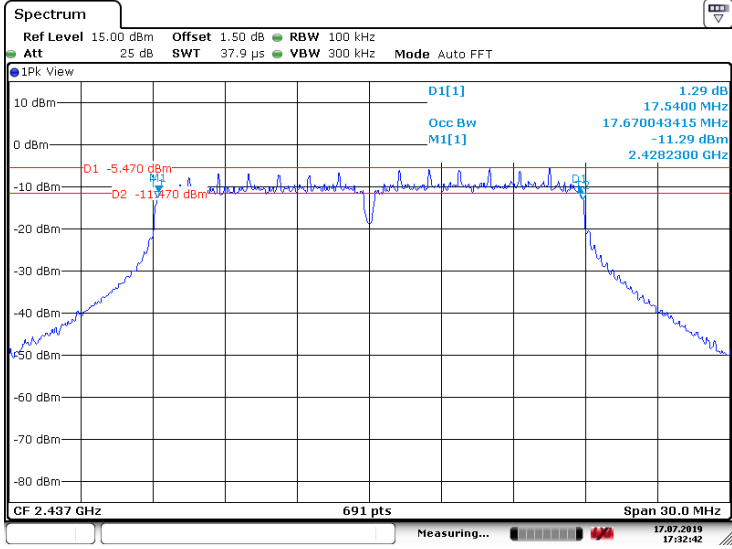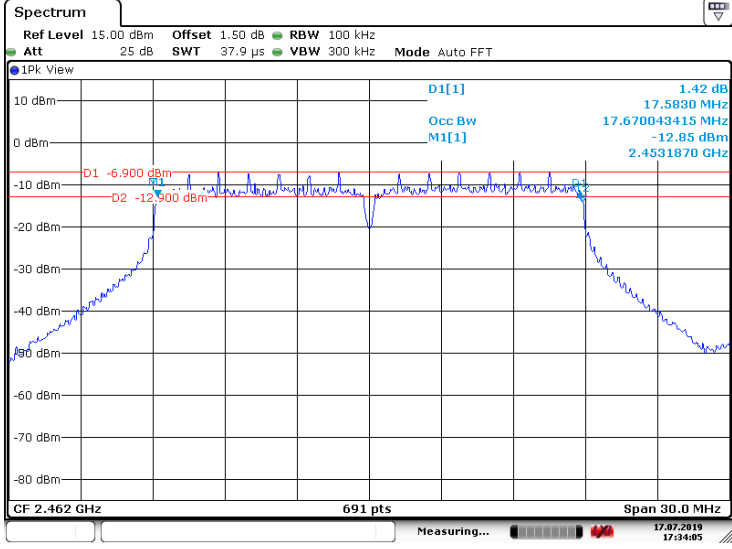

Ant No.	Ant 1
Type:	802.11n(HT20)
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 0.03 dBm Occ Bw 17.1890 MHz M1[1] 17.670043415 MHz D1 -5.550 dBm D2 -11.550 dBm M1 -11.87 dBm CF 2.412 GHz 691 pts Span 30.0 MHz Date: 17.JUL.2019 17:31:12
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 1.29 dBm Occ Bw 17.5400 MHz M1[1] 17.670043415 MHz D1 -5.470 dBm D2 -11.470 dBm M1 -11.29 dBm CF 2.437 GHz 691 pts Span 30.0 MHz Date: 17.JUL.2019 17:32:42
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 1.42 dBm Occ Bw 17.5830 MHz M1[1] 17.670043415 MHz D1 -6.900 dBm D2 -12.900 dBm M1 -12.85 dBm CF 2.462 GHz 691 pts Span 30.0 MHz Date: 17.JUL.2019 17:34:05

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

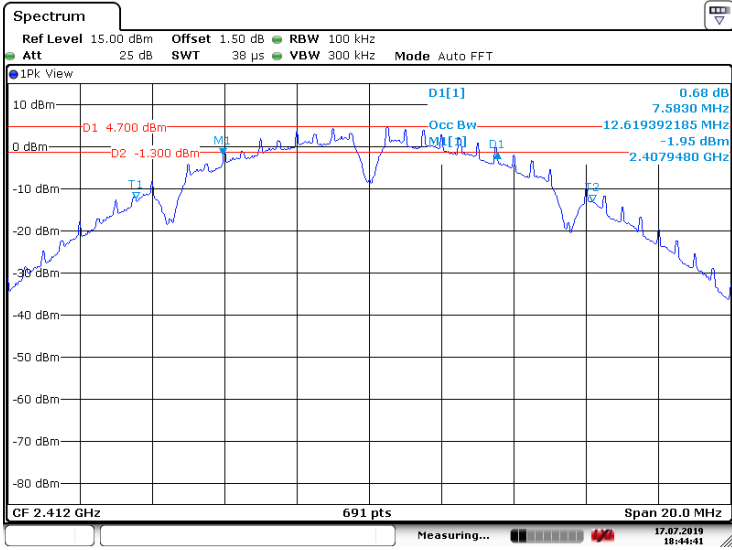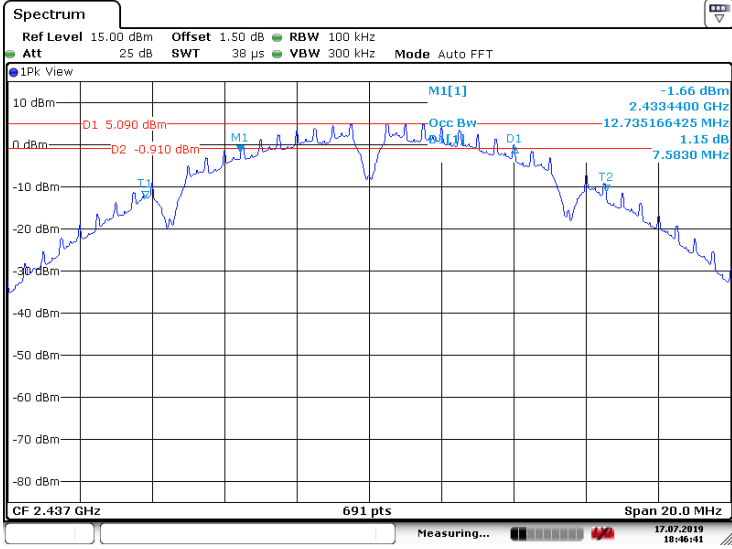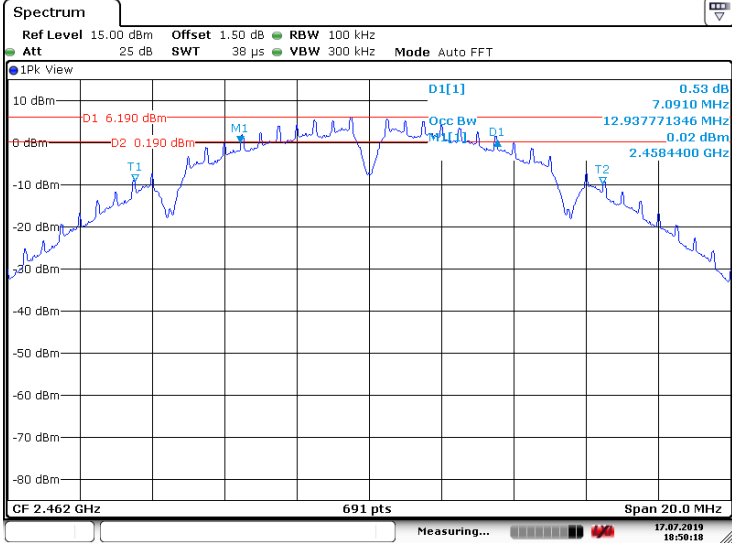

Ant No.	Ant 2
Type:	802.11 b
CH01	 Date: 17. JUL. 2019 18:44:41
CH06	 Date: 17. JUL. 2019 18:46:41
CH11	 Date: 17. JUL. 2019 18:50:17

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

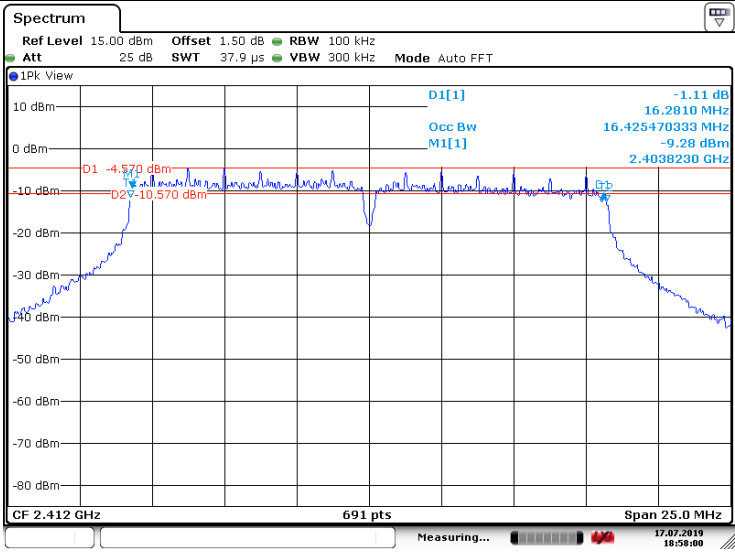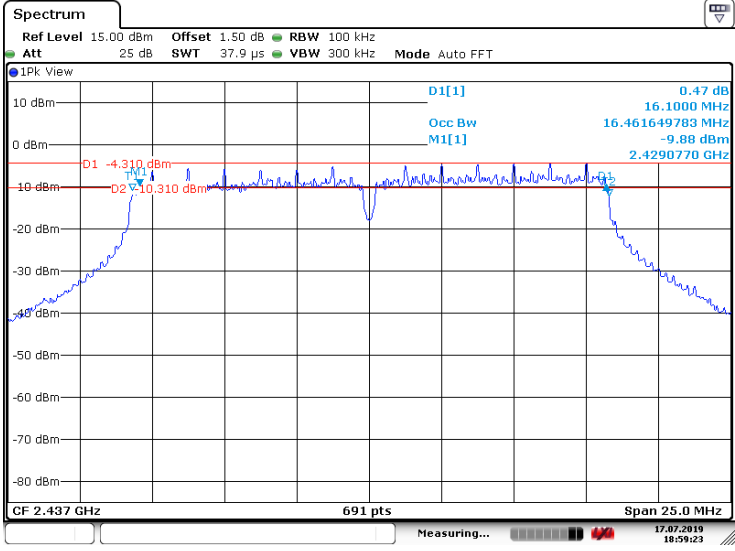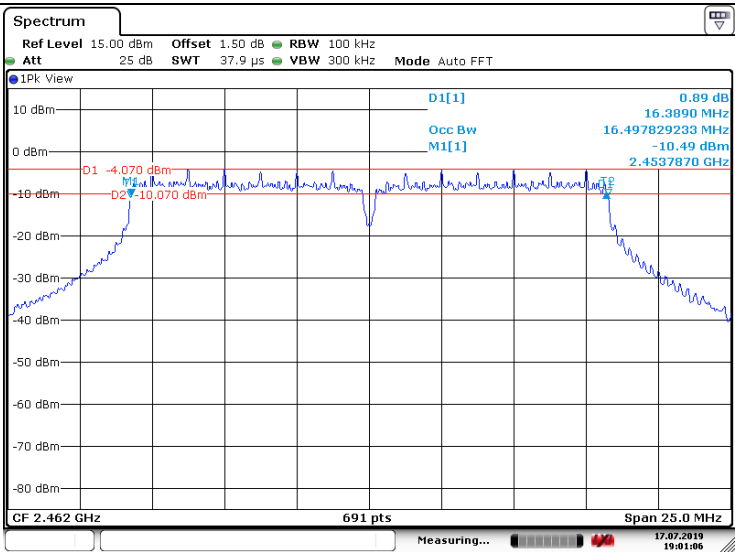

Ant No.	Ant 2
Type:	802.11 g
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] -1.11 dBm 16.2810 MHz Occ Bw 16.425470333 MHz M1[1] -9.28 dBm 2.4038230 GHz CF 2.412 GHz 691 pts Span 25.0 MHz Measuring... Date: 17. JUL. 2019 18:57:59
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 0.47 dBm 16.1000 MHz Occ Bw 16.461649783 MHz M1[1] -9.88 dBm 2.4290770 GHz CF 2.437 GHz 691 pts Span 25.0 MHz Measuring... Date: 17. JUL. 2019 18:59:23
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 0.89 dBm 16.3890 MHz Occ Bw 16.497829233 MHz M1[1] -10.49 dBm 2.4537870 GHz CF 2.462 GHz 691 pts Span 25.0 MHz Measuring... Date: 17. JUL. 2019 19:01:05

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

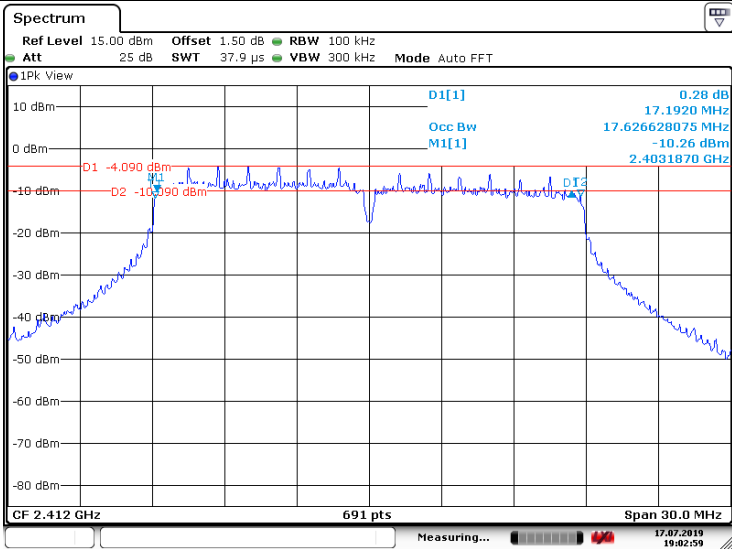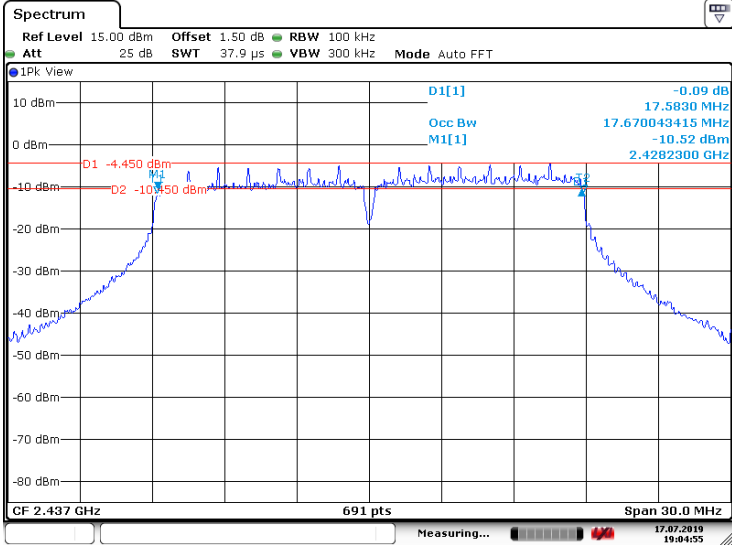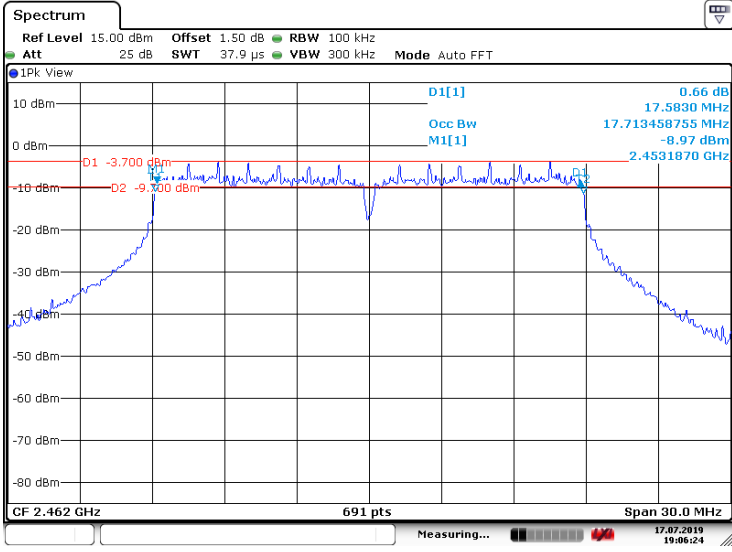

Ant No.	Ant 2
Type:	802.11n(HT20)
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 0.28 dB 17.1920 MHz Occ Bw 17.626628075 MHz M1[1] -10.26 dBm 2.4031870 GHz D1 -4.090 dBm D2 -10.390 dBm CF 2.412 GHz 691 pts Span 30.0 MHz Measuring... 17.07.2019 19:02:59 Date: 17. JUL. 2019 19:02:58
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] -0.09 dB 17.5830 MHz Occ Bw 17.670043415 MHz M1[1] -10.52 dBm 2.4282300 GHz D1 -4.450 dBm D2 -10.450 dBm CF 2.437 GHz 691 pts Span 30.0 MHz Measuring... 17.07.2019 19:04:53 Date: 17. JUL. 2019 19:04:54
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 100 kHz Att 25 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT IPk View D1[1] 0.66 dB 17.5830 MHz Occ Bw 17.713458755 MHz M1[1] -8.97 dBm 2.4531870 GHz D1 -3.700 dBm D2 -9.700 dBm CF 2.462 GHz 691 pts Span 30.0 MHz Measuring... 17.07.2019 19:06:24 Date: 17. JUL. 2019 19:06:23

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.5. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 5.4:

Section	Test Item	Limit	Frequency Range(MHz)
CFR 47 FCC 15.247(b)(3)	Maximum conducted output power	1 Watt or 30dBm	2400~2483.5
ISED RSS-247 5.4 d	EIRP	4 Watt or 36dBm	2400~2483.5

Test Configuration

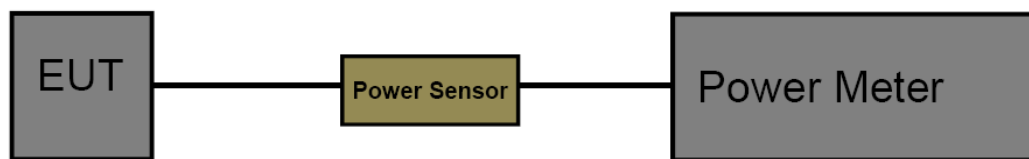

Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - Peak Detector: RBW $\geq$ DTS Bandwidth, VBW $\geq$ 3*RBW.
 - Sweep time=Auto.
 - Detector=Peak.
 - Trace mode=Maxhold.Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.2

Test Result



Ant No.	Ant 1			
Type	Channel	Output power (dBm)	Output power (EIRP)	Result
802.11b	01	14.70	16.20	Pass
	06	15.12	16.62	
	11	14.07	15.57	
802.11g	01	13.43	14.93	Pass
	06	13.88	15.38	
	11	13.07	14.57	
802.11n(HT20)	01	13.44	14.94	Pass
	06	13.86	15.36	
	11	12.76	14.26	

Ant No.	Ant 2			
Type	Channel	Output power (dBm)	Output power (EIRP)	Result
802.11b	01	15.58	17.08	Pass
	06	15.92	17.42	
	11	16.80	18.30	
802.11g	01	14.54	16.04	Pass
	06	15.02	16.52	
	11	15.55	17.05	
802.11n(HT20)	01	14.51	16.01	Pass
	06	14.92	16.42	
	11	15.59	17.09	




3.6. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 5.2 b:

Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyser center frequency to DTS channel center frequency.
Set the span to 1.5 times the DTS bandwidth.
Set the RBW to: 3 kHz
Set the VBW to: 10 kHz
Detector: peak
Sweep time: auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.2

Test Result






Ant No.	Ant 1			
Type	Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	01	-9.21	≤8.00	Pass
	06	-9.88		
	11	-9.79		
802.11g	01	-17.84	≤8.00	Pass
	06	-18.07		
	11	-20.20		
802.11n(HT20)	01	-18.52	≤8.00	Pass
	06	-18.42		
	11	-19.45		

Ant No.	Ant 2			
Type	Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	01	-8.23	≤8.00	Pass
	06	-8.22		
	11	-7.87		
802.11g	01	-17.04	≤8.00	Pass
	06	-15.72		
	11	-15.79		
802.11n(HT20)	01	-18.30	≤8.00	Pass
	06	-17.37		
	11	-16.96		



Test plot as follows:

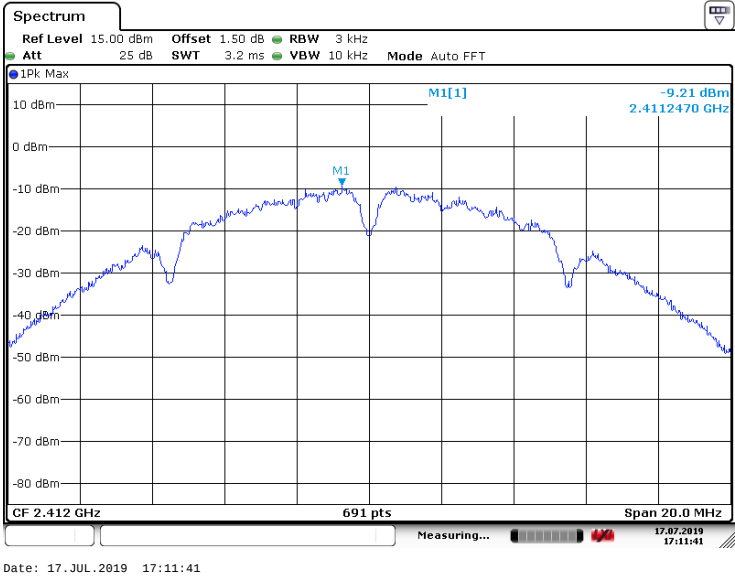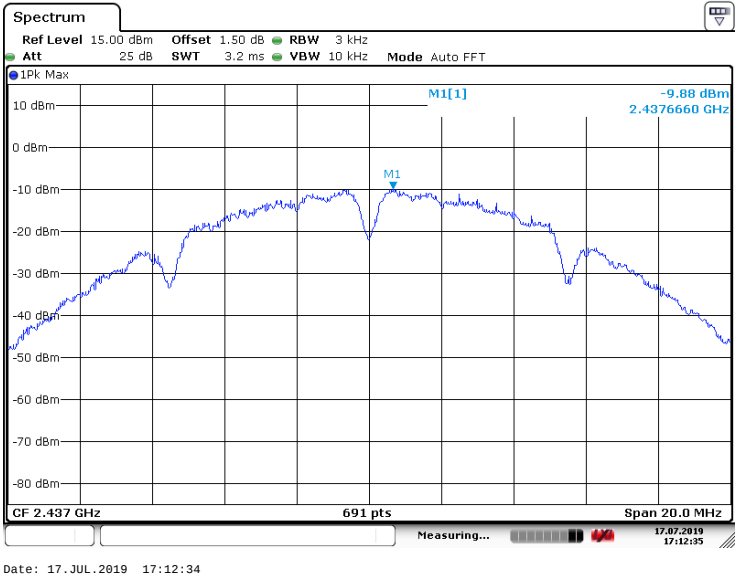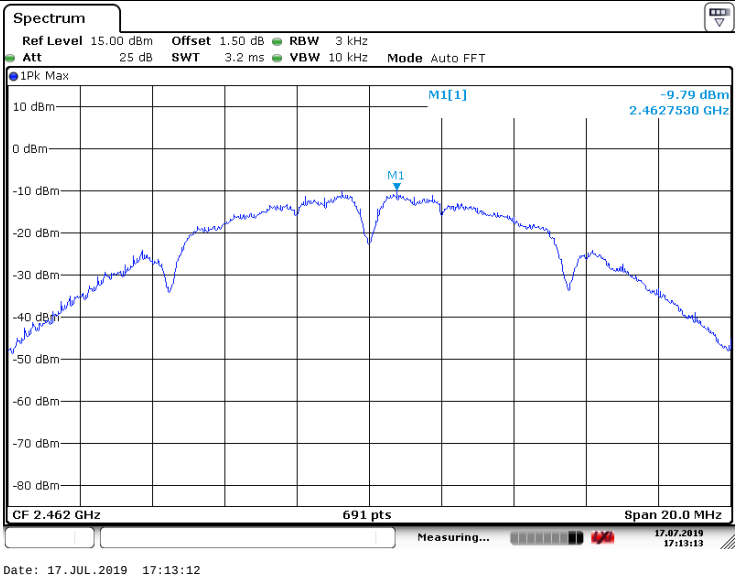Ant No.	Ant 1
Type:	802.11 b
CH01	
CH06	
CH11	

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

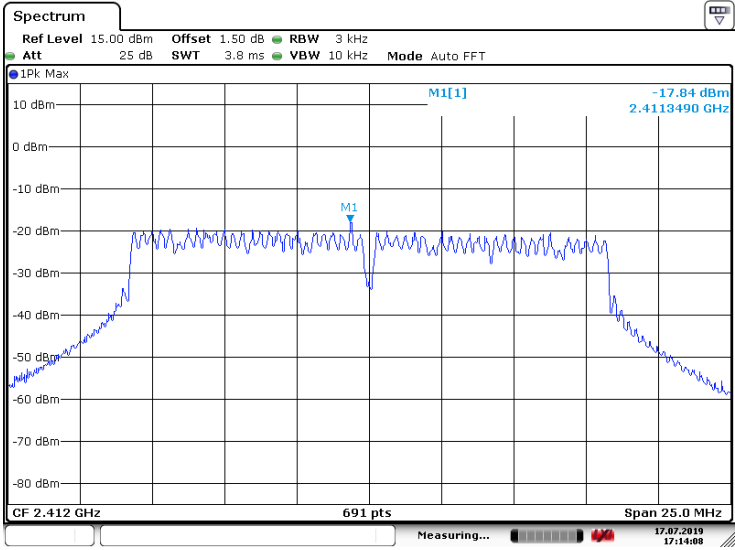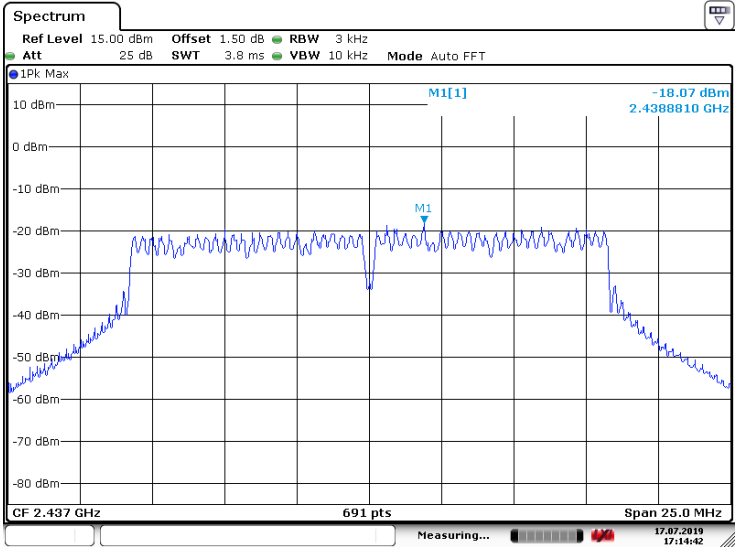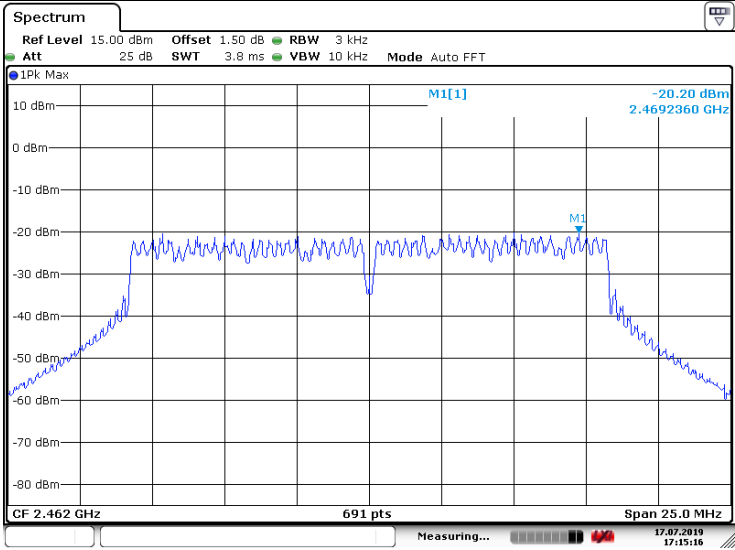

Ant No.	Ant 1
Type:	802.11 g
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -17.84 dBm 2.4113490 GHz CF 2.412 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:14:08
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -18.07 dBm 2.4388810 GHz CF 2.437 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:14:41
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -20.20 dBm 2.4692360 GHz CF 2.462 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:15:15

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

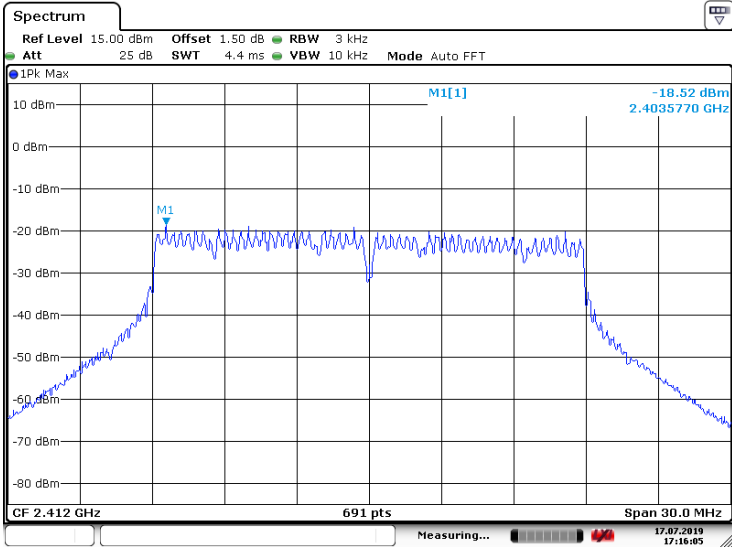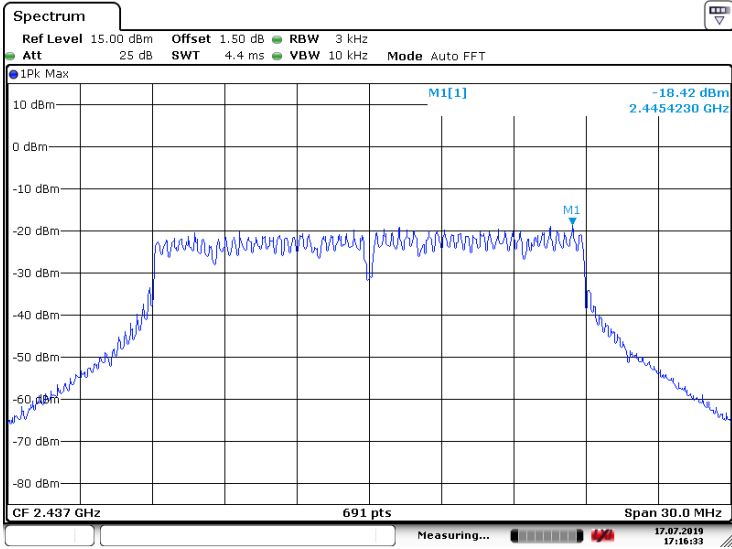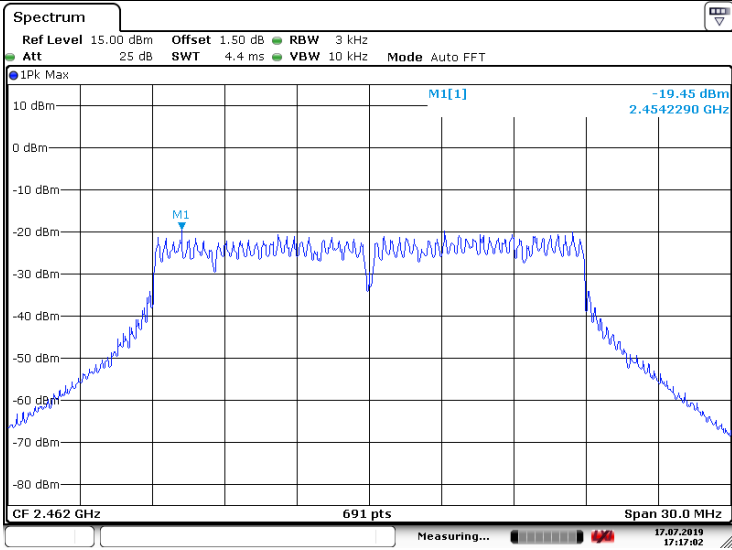

Ant No.	Ant 1
Type:	802.11n(HT20)
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 4.4 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -18.52 dBm 2.4035770 GHz CF 2.412 GHz 691 pts Span 30.0 MHz Date: 17.JUL.2019 17:16:04
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 4.4 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -18.42 dBm 2.4454230 GHz CF 2.437 GHz 691 pts Span 30.0 MHz Date: 17.JUL.2019 17:16:33
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 4.4 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -19.45 dBm 2.4542290 GHz CF 2.462 GHz 691 pts Span 30.0 MHz Date: 17.JUL.2019 17:17:02

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

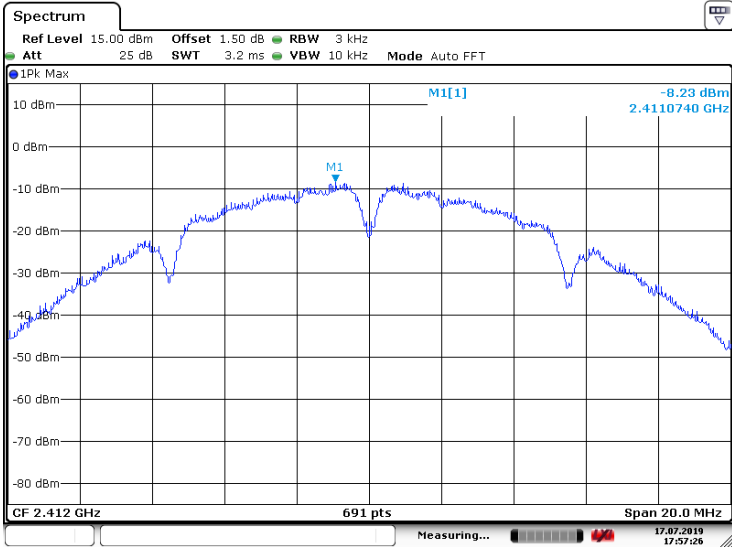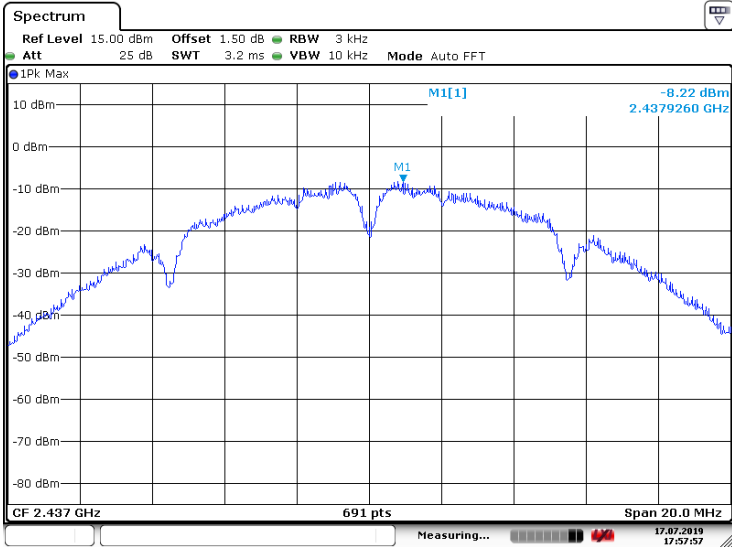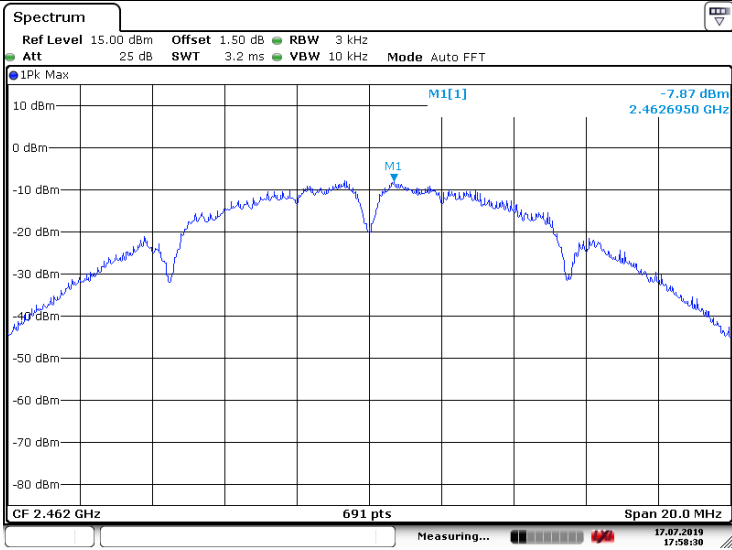

Ant No.	Ant 2
Type:	802.11 b
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.2 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -8.23 dBm 2.4110740 GHz CF 2.412 GHz 691 pts Span 20.0 MHz Date: 17. JUL. 2019 17:57:26
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.2 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -8.22 dBm 2.4379260 GHz CF 2.437 GHz 691 pts Span 20.0 MHz Date: 17. JUL. 2019 17:57:57
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.2 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -7.87 dBm 2.4626950 GHz CF 2.462 GHz 691 pts Span 20.0 MHz Date: 17. JUL. 2019 17:58:30

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

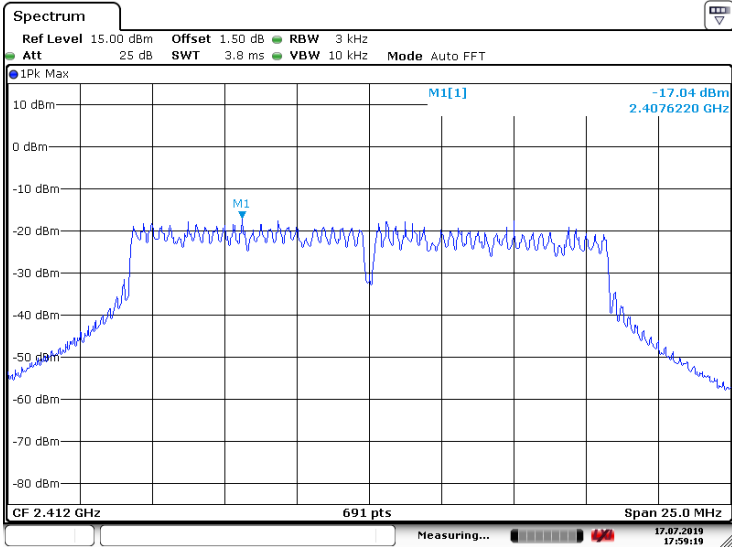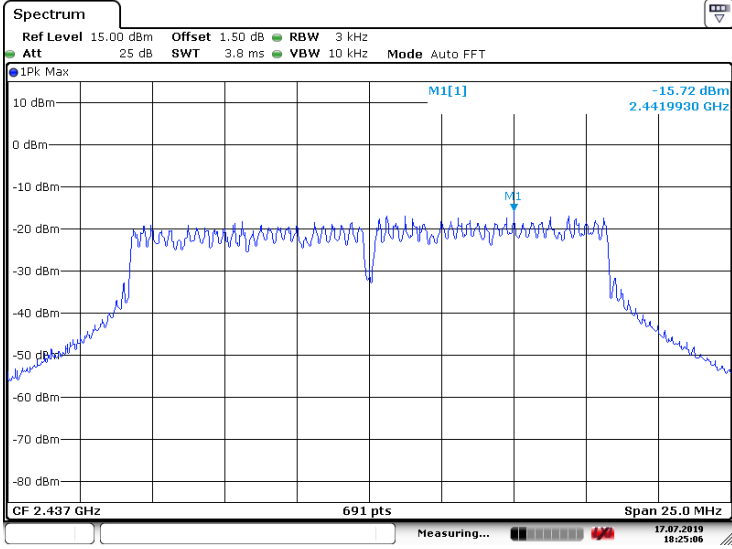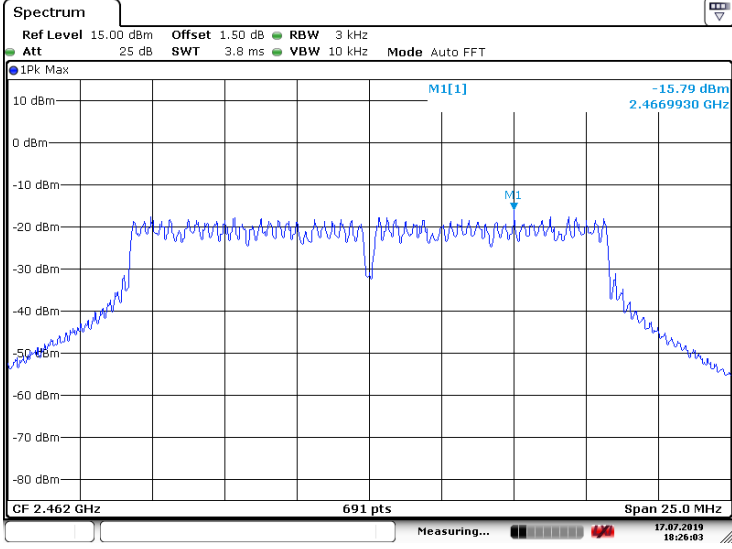

Ant No.	Ant 2
Type:	802.11 g
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -17.04 dBm 2.4076220 GHz CF 2.412 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 17:59:19
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -15.72 dBm 2.4419930 GHz CF 2.437 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 18:25:06
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -15.79 dBm 2.4669930 GHz CF 2.462 GHz 691 pts Span 25.0 MHz Date: 17. JUL. 2019 18:26:03

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

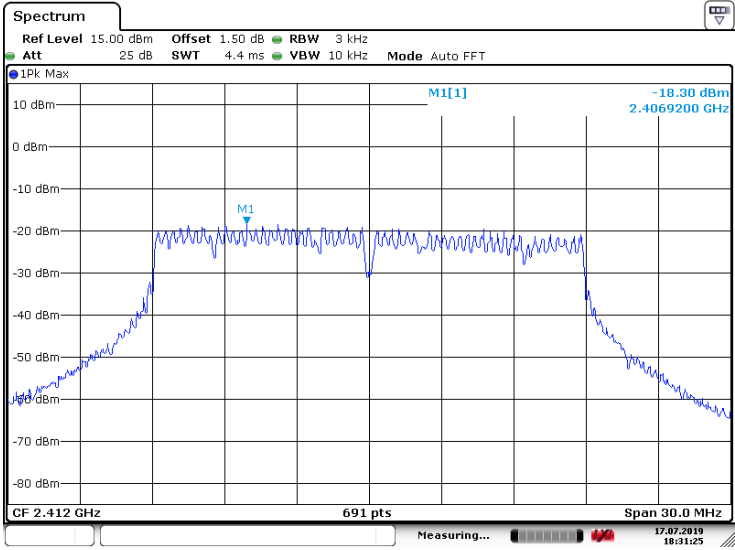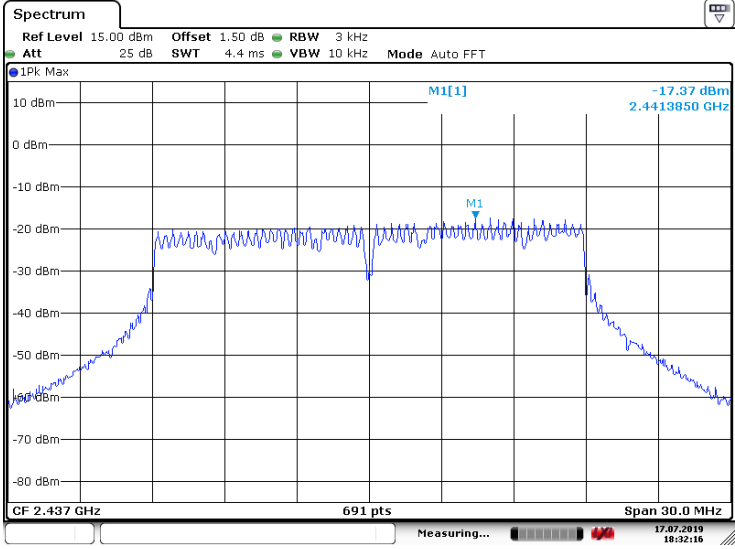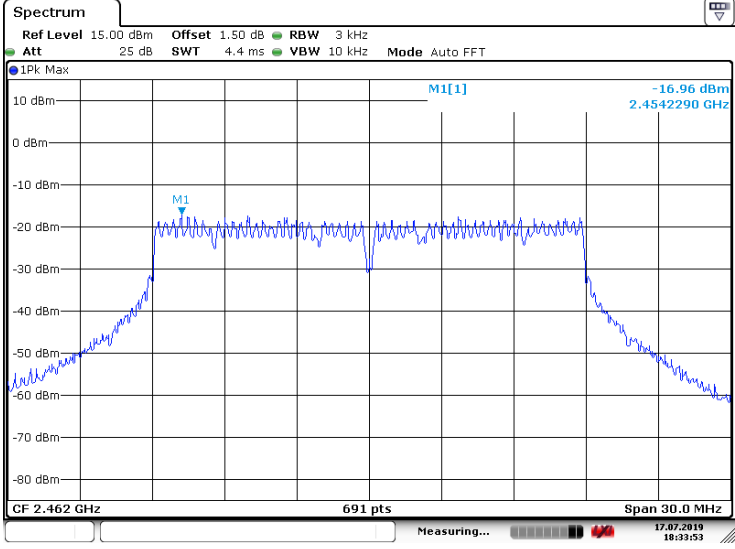

Ant No.	Ant 2
Type:	802.11n(HT20)
CH01	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 4.4 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -18.30 dBm 2.4069200 GHz M1 CF 2.412 GHz 691 pts Span 30.0 MHz Date: 17. JUL. 2019 18:31:25
CH06	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 4.4 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -17.37 dBm 2.4413850 GHz M1 CF 2.437 GHz 691 pts Span 30.0 MHz Date: 17. JUL. 2019 18:32:16
CH11	 Spectrum Ref Level 15.00 dBm Offset 1.50 dB RBW 3 kHz Att 25 dB SWT 4.4 ms VBW 10 kHz Mode Auto FFT 1Pk Max M1[1] -16.96 dBm 2.4542290 GHz M1 CF 2.462 GHz 691 pts Span 30.0 MHz Date: 17. JUL. 2019 18:33:53

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



3.7. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.