

TEST REPORT


Applicant:	STONKAM CO., LTD
Address of Applicant:	101, Building 6, No.1 Ruihua Road, Tianhe District, Guangzhou, Guangdong, P. R. China
Manufacturer:	STONKAM CO., LTD
Address of Manufacturer:	Building 3, No.1 Xingda Road, Yunpu Industrial Zone, Huangpu District, Guangzhou Guangdong, P. R. China
Product name:	2.4G Wireless Monitor
Model:	HDW737
Rating(s):	DC 24V
Trademark:	STONKAM
Standards:	47 CFR PART 15 Subpart C section 15.247
FCC ID:	2ATW7-HDW737RS
Data of Receipt:	2024-09-03
Date of Test:	2024-09-03-2024-11-01
Date of Issue:	2024-11-01
Test Result	Pass*

* In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:**Test by:****Reviewed by:**

Nov. 01, 2024


Chivas Tsang



Project Engineer

Nov. 01, 2024

Victor Meng



Project Manager

Date

Name/Position

Signature

Date

Name/Position

Signature

n

Possible test case verdicts:

test case does not apply to the test object...: N/A
test object does meet the requirement.....: P (Pass)
test object does not meet the requirement...: F (Fail)

Testing Laboratory information:

Testing Laboratory Name: ITL Co., Ltd
Address.....: No. 8 Jinqianling Street 5, Huangjiang Town, Dongguan,
Guangdong, 523757 P.R.C.
Testing location : Same as above
Tel : 0086-769-39001678
Fax : 0086-20-62824387
E-mail : itl@i-testlab.com

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

The model HDW737 has 2 different appearances.

The main difference is that IPEX antenna is used for one appearance and RP-SMA antenna is used for the other.

1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth (-20dB)	FCC PART 15 C section 15.247 (a)(1);	ANSI C63.10:2013	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1);	ANSI C63.10:2013	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10:2013	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii);	ANSI C63.10:2013	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1);	ANSI C63.10:2013	PASS
Conducted Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.247(d);	ANSI C63.10:2013	PASS
Radiated Spurious Emission (9 kHz to 25 GHz)	FCC PART 15 C section 15.247(d);	ANSI C63.10:2013	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) &15.205	ANSI C63.10:2013	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207;	ANSI C63.10:2013	PASS
Radiated Emissions which fall in the restricted bands	FCC PART 15 C section 15.209	ANSI C63.10:2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List	ANSI C63.10:2013	PASS

Remark:

N/A: not applicable. Refer to the relative section for the details.
 EUT: In this whole report EUT means Equipment Under Test.
 Tx: In this whole report Tx (or tx) means Transmitter.
 Rx: In this whole report Rx (or rx) means Receiver.
 RF: In this whole report RF means Radio Frequency.
 ANSI C63.10:2013 the detail version is ANSI C63.10:2013 in the whole report.

2 Contents

TEST REPORT	1
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION	5
3.2 GENERAL DESCRIPTION OF E.U.T.	5
3.3 DETAILS OF E.U.T.	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 TEST LOCATION	5
3.6 DEVIATION FROM STANDARDS	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
3.9 TEST FACILITY	6
3.10 MEASUREMENT UNCERTAINTY	6
4 INSTRUMENTS USED DURING TEST	7
5 TEST RESULTS	8
5.1 E.U.T. TEST CONDITIONS	8
5.2 ANTENNA REQUIREMENT	9
5.3 OCCUPIED BANDWIDTH	10
5.4 CARRIER FREQUENCIES SEPARATED	13
5.5 HOPPING CHANNEL NUMBER	16
5.6 DWELL TIME	18
5.7 MAXIMUM PEAK OUTPUT POWER	23
5.8 CONDUCTED SPURIOUS EMISSIONS	26
5.9 RADIATED SPURIOUS EMISSIONS	29
5.9.1 Harmonic and other spurious emissions	32
5.10 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	48
5.11 BAND EDGES REQUIREMENT	50
5.12 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30 MHZ	55
5.12.1 Measurement Data	57
5.13 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	61

3 General Information

3.1 Client Information

Applicant: STONKAM CO., LTD
Address of Applicant: 101, Building 6, No.1 Ruihua Road, Tianhe District, Guangzhou, Guangdong, P. R. China

3.2 General Description of E.U.T.

Name: 2.4G Wireless Monitor
Model No.: HDW737
Operating Frequency: 2408 MHz to 2478 MHz
19 channels

Channels:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2408	6	2425	11	2448	16	2468
2	2411	7	2428	12	2452	17	2472
3	2415	8	2432	13	2455	18	2475
4	2418	9	2442	14	2458	19	2478
5	2422	10	2445	15	2465		

Modulation Technique: Frequency Hopping Spread Spectrum (FHSS)
Type of Modulation 16QAM/QPSK/BPSK
Dwell time Per channel is less than 0.4s.
Antenna Type IPEX antenna with 1.88 dBi gain, RP-SMA antenna with 3.44dBi gain

3.3 Details of E.U.T.

EUT Power Supply: DC 24V
The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel lowest (2408MHz), middle (2445MHz) and highest (2478MHz) are chosen for full testing.
Test mode:
Power cord: /

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

Details of Support Equipment(s)

Description	Manufacturer	Model No.	Connection	Working state
/	/	/	/	/

3.5 Test Location

All tests were performed at:
ITL Co., Ltd
No. 8 Jinqianling Street 5, Huangjiang Town, Dongguan, Guangdong, 523757 P.R.C.
0086-769-39001678

itl@i-testlab.com

No tests were sub-contracted.

3.6 Deviation from Standards

None.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- CNAS Lab code:L9342
- FCC Designation No.:CN5035
- IC Registration NO.: 12593A
- NVLAP LAB CODE: 600199-0

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	2.25%
total RF power, conducted	±1.34 dB
RF power density , conducted	±1.49 dB
All emissions, radiated	±2.72 dB
Temperature	±5.02 dB
Humidity	±0.8°C
DC and low frequency voltages	±1.5 %

4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Cal Data	Due Date
DGITL-301	Semi-Anechoic chamber	ETS•Lindgren	9*6*6	CT000874-1181	2023.08.02	2026.08.02
DGITL-307	EMI test receiver	SCHWARZBEC K	ESVS10	833616/003	2024.03.15	2025.03.15
DGITL-376	Wideband Radio Communication Tester	SCHWARZBEC K	CMW500	LR114195	2024.03.15	2025.03.15
DGITL-349a	Vector Signal Generator	ROHDE&SCHW ARZ	SMBV100A	259268	2024.03.15	2025.03.15
DGITL-306	Spectrum Analyzer	Agilent Technologies	N9010A	MY54200334	2024.03.15	2025.03.15
DGITL-352	Pre Amplifier	MInI-CIrcuits	ZFC-1000HX	SN292801110	2024.03.15	2025.03.15
DGITL-375	Spectrum Analyzer	SCHWARZBEC K	FSV40-N	6625-01-588-5515	2024.03.15	2025.03.15
DGITL-309	Horn Antenna	ETS Lindgren	3117	SN00152265	2023.05.14	2025.05.14
DGITL-308	Bilog Antenna	ETS· Lindgren	3142E	156975	2023.05.14	2025.05.14
DGITL-350	Wideband Amplifier Super Ultra	MInI-CIrcuits	ZVA-183X-S+	SN986401426	2024.03.15	2025.03.15
DGITL-371	Pre Amplifier	teramicrowave	TALA-0040G35	18081001	2024.03.15	2025.03.15
DGITL-363	Active Loop Antenna	SCHWARZBEC K	FMZB1519B	00062	2024.05.15	2026.05.11

5 Test Results

5.1 E.U.T. test conditions

Test Voltage: Input: DC 24V
Temperature: 20.0 -25.0 °C
Humidity: 38-50 % RH
Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

channel	Frequency	channel	Frequency	channel	Frequency	channel	Frequency
1	2408	6	2425	11	2448	16	2468
2	2411	7	2428	12	2452	17	2472
3	2415	8	2432	13	2455	18	2475
4	2418	9	2442	14	2458	19	2478
5	2422	10	2445	15	2465		

Test frequencies are the Lowest Channel: 1 channel (2408 MHz), Middle Channel: 10 channel (2445 MHz) and Highest Channel: 19 channel (2478 MHz)

5.2 Antenna requirement

Standard requirement

15.203 requirements:

For intentional device: According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1) (I) requirement:

(I) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The product uses two different antennas: RP-SMA Antenna, IPEX antenna and no consideration of replacement. IPEX antenna is an internal antenna.

The best case gain of the antenna is 1.88 dBi, 3.44 dBi respectively.

Test result: The unit does meet the FCC requirements.

5.3 Occupied Bandwidth


Test Requirement: FCC Part 15 C section 15.247

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Method: ANSI C63.10:2013

Test Status: Test the EUT in continuous transmitting mode at the lowest, middle and Highest Channel.

Test Configuration:

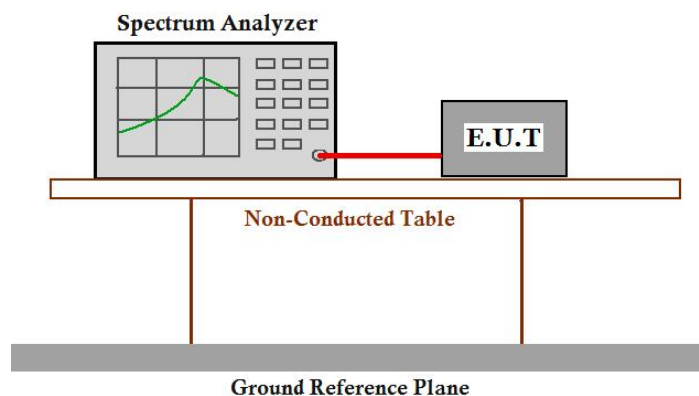

Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: $RBW \geq 1\%$ of the 20dB bandwidth $VBW \geq RBW$. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20dB point's bandwidth.

Test result (-20dB bandwidth):


Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	4.49	2.99
Middle	4.45	2.96
Highest	4.47	2.98

Result plot as follows:


Lowest Channel:

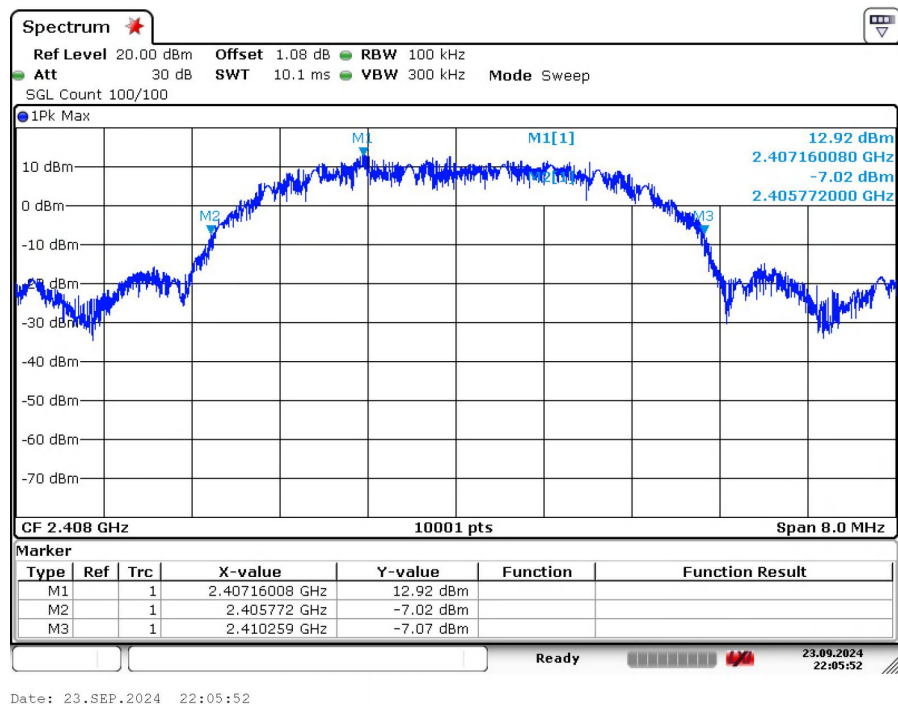

Middle Channel:

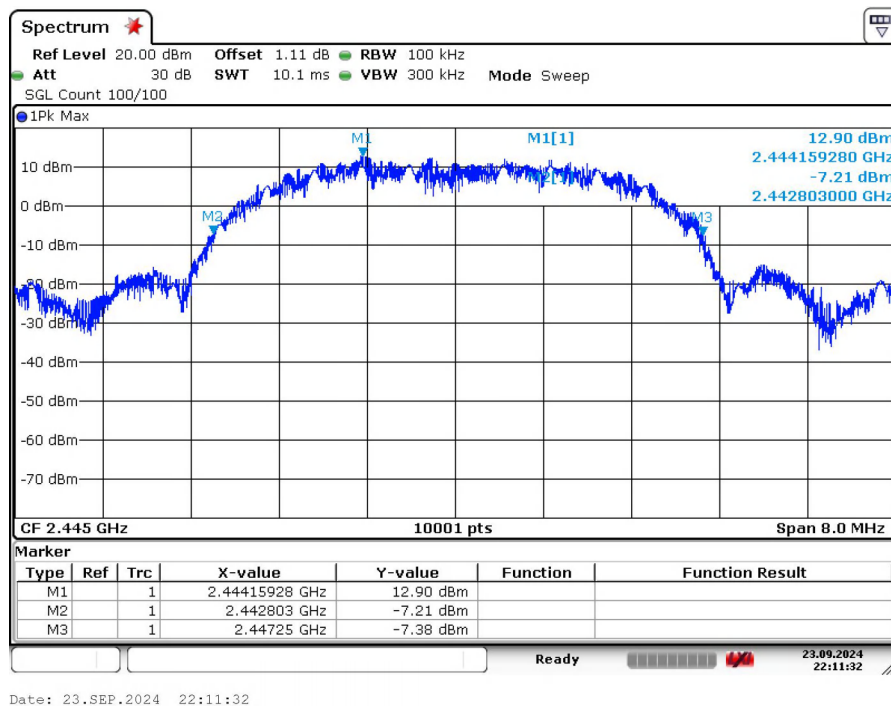

Highest Channel:

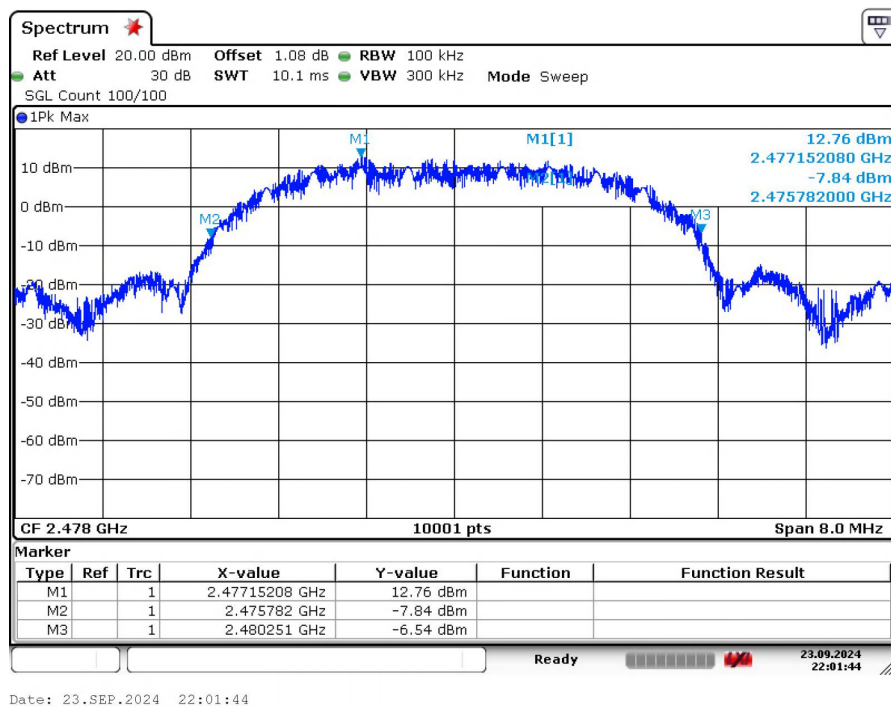

5.4 Carrier Frequencies Separated


Test Requirement: FCC Part 15 C section 15.247

(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Method: ANSI C63.10:2013

Test Status: Test the EUT in continuous transmitting mode at the lowest, middle and Highest Channel

Test Configuration:

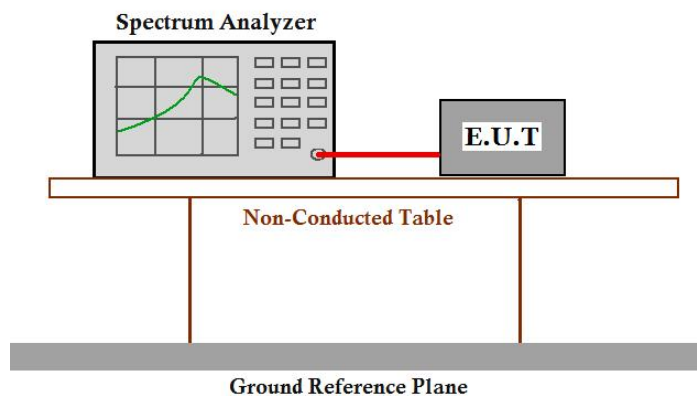

Test Procedure:


- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Test result:

Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels	4.316 MHz	Pass
Middle Channels	3.756 MHz	Pass
Upper Channels	3.037 MHz	Pass
Remark: The limit is maximum two-thirds of the 20 dB bandwidth: 2.99 MHz		


Carrier Frequencies Separated plot:

Lowest Channels:

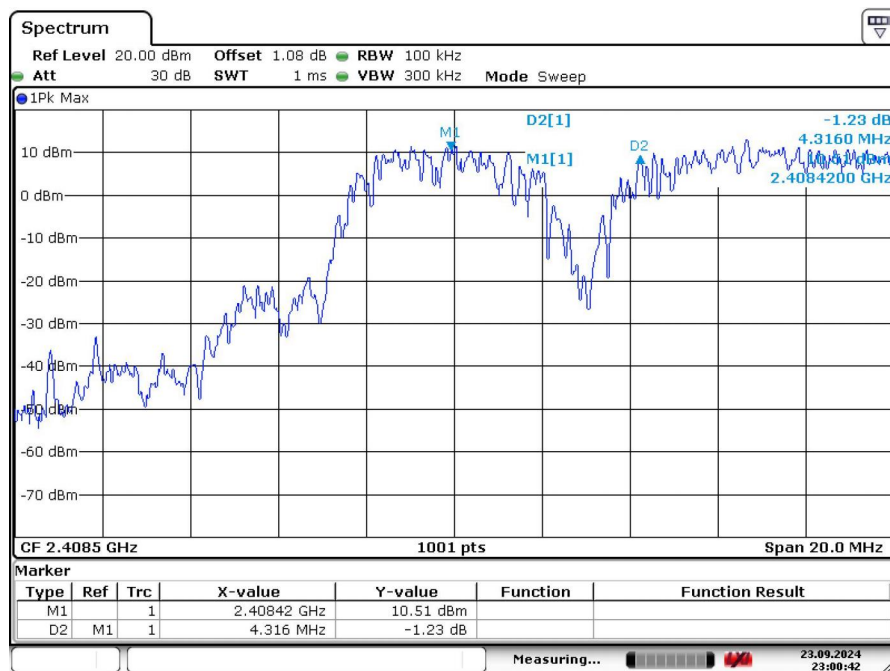


Date: 23.SEP.2024 23:00:42

Middle Channels:

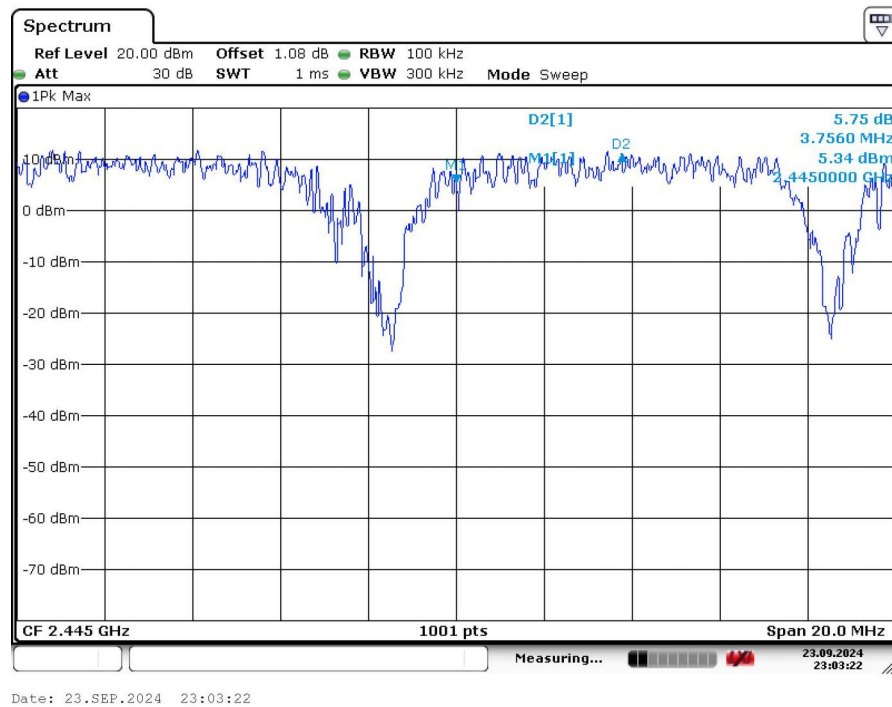

Highest Channels

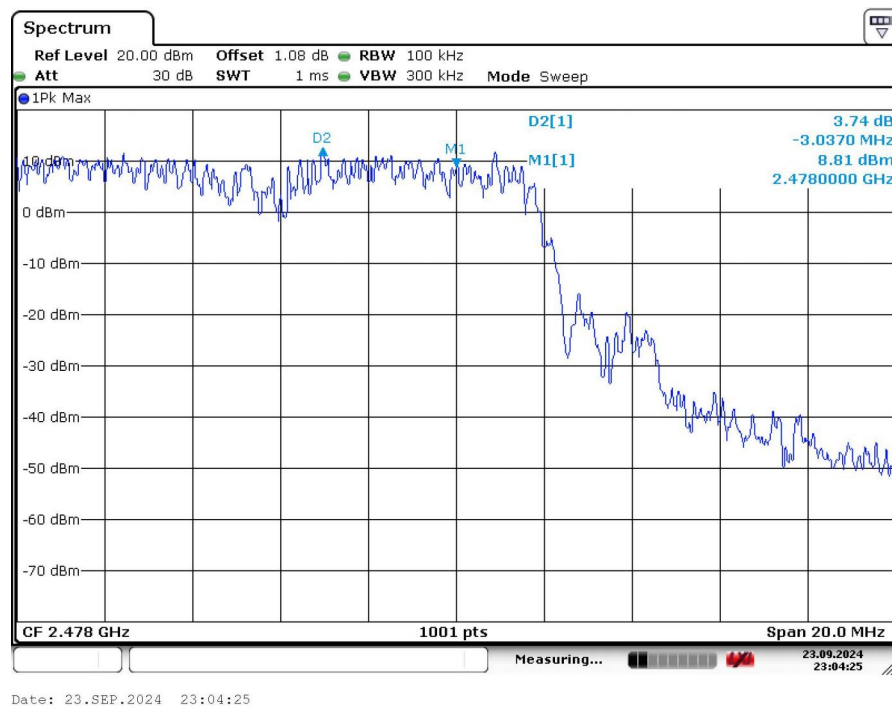

5.5 Hopping Channel Number


Test Requirement: FCC Part15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Method: ANSI C63.10:2013

Test Status: Test the EUT in hopping mode.


Test Configuration:

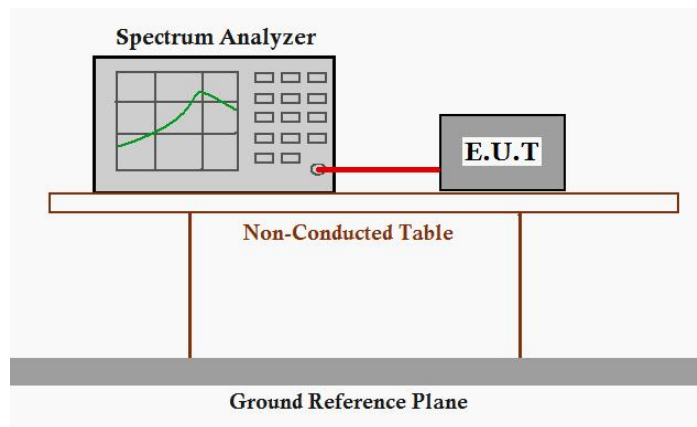

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. In order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400 MHz. stop frequency = 2483.5 MHz. Submit the test result graph.

Test result: Total channels are 19 channels.

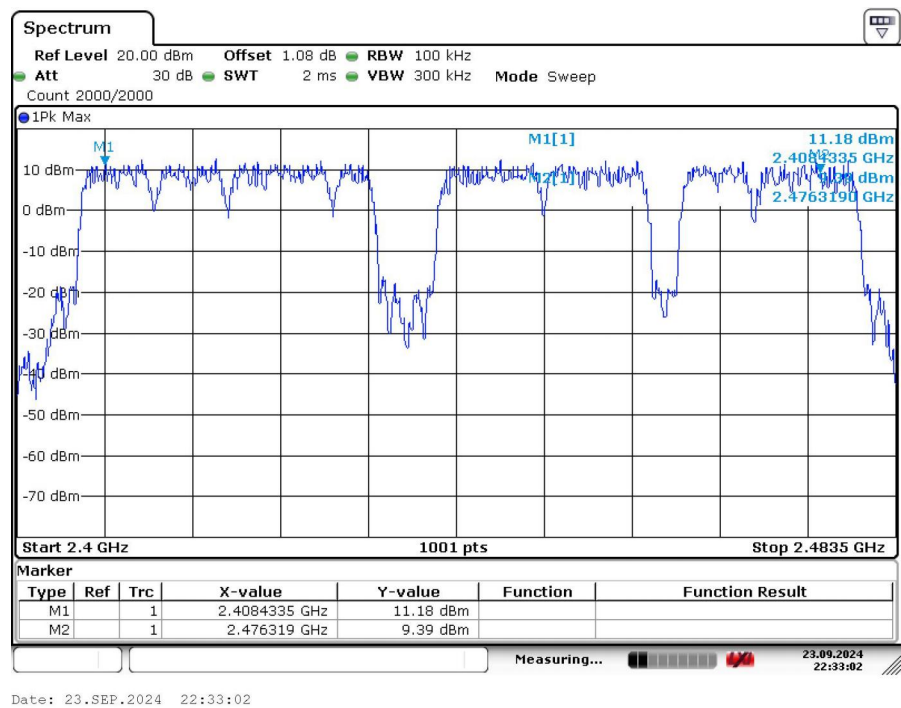

Test result: The unit does meet the FCC requirements.

5.6 Dwell Time


Test Requirement: FCC Part 15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Method: ANSI C63.10:2013

Test Status: Test the EUT in continuous transmitting mode at the lowest, middle and Highest Channel

Test Configuration:

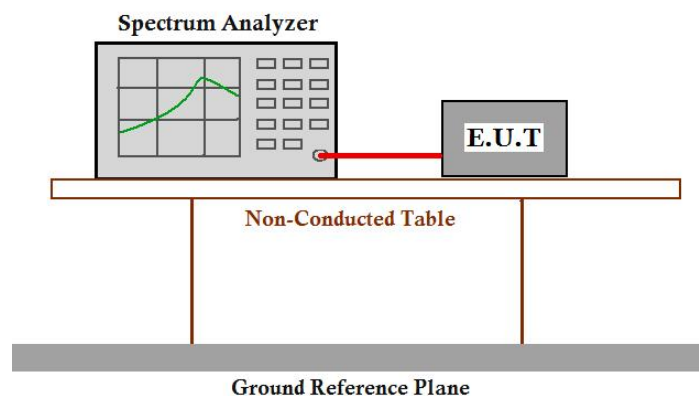


Test Procedure:

- Span: Zero span, centered on a hopping channel.
- RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- Detector function: Peak.
- Trace: Max hold.


Test Result:

Frequency (MHz)	Pulse Time (ms)	Observed pluses in 7.6s	Total Dwell Time (ms)	Limit (ms)	Verdict
2408	0.149	24	3.576	400	Pass
2445	0.149	36	5.364	400	Pass
2478	0.15	18	2.7	400	Pass


Lowest Channel (2.408 GHz):

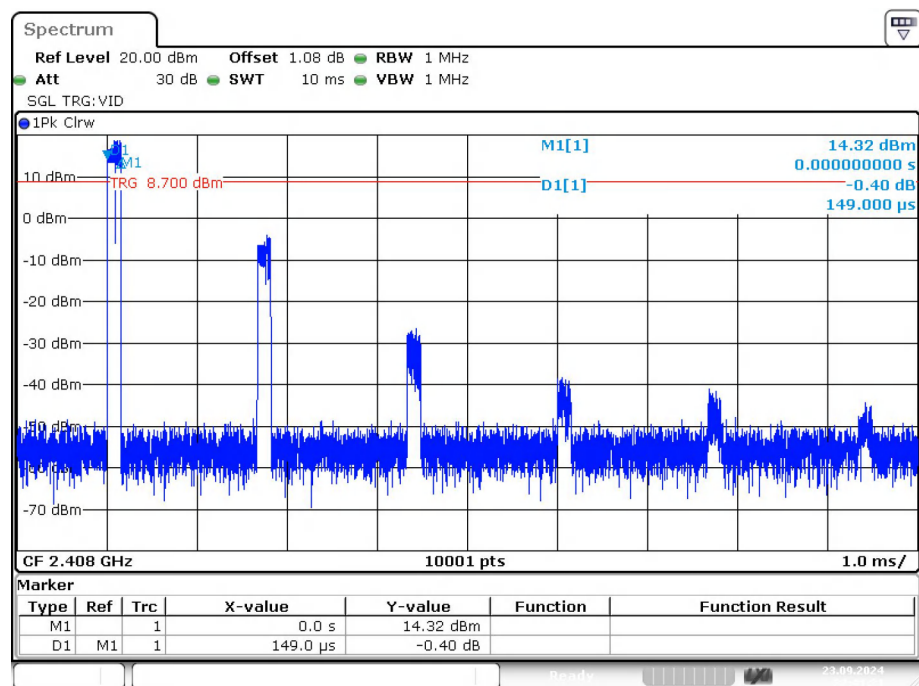


Date: 23.SEP.2024 22:41:21

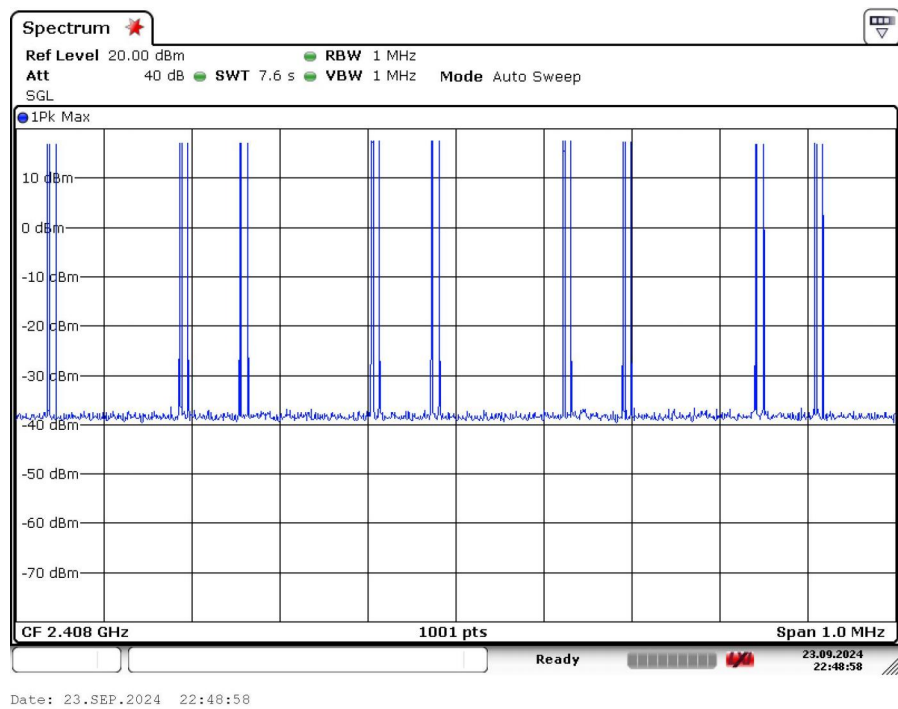



Middle channel (2.445 GHz):

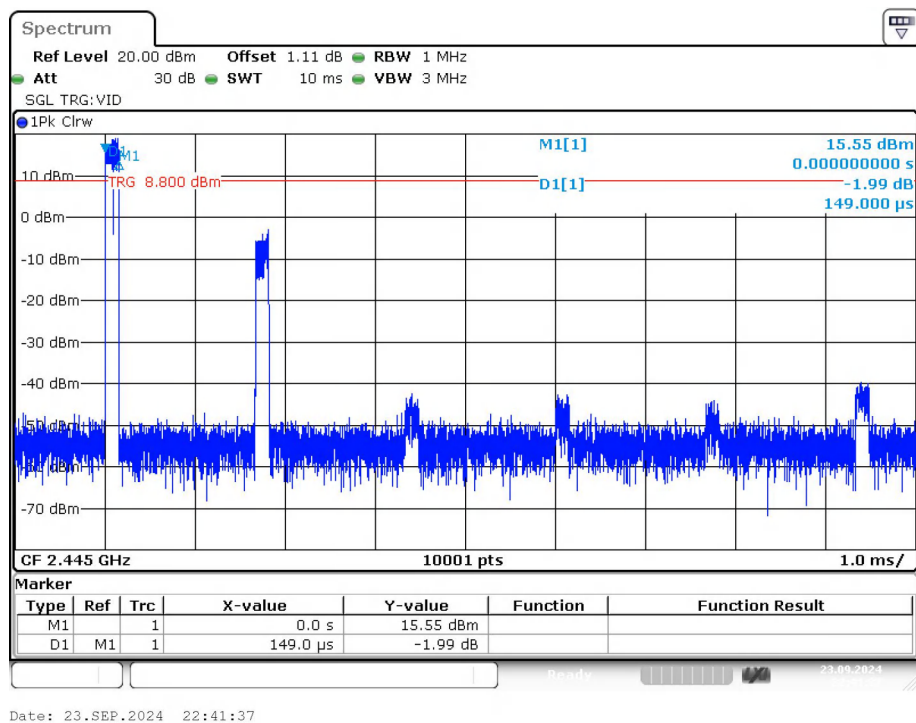

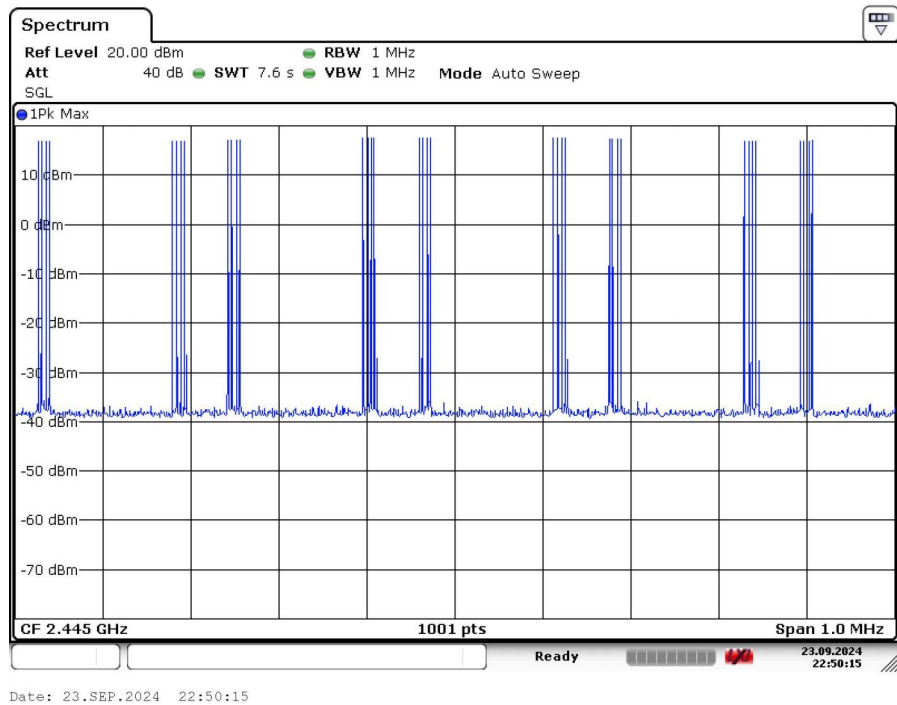

Highest Channel (2.478 GHz):

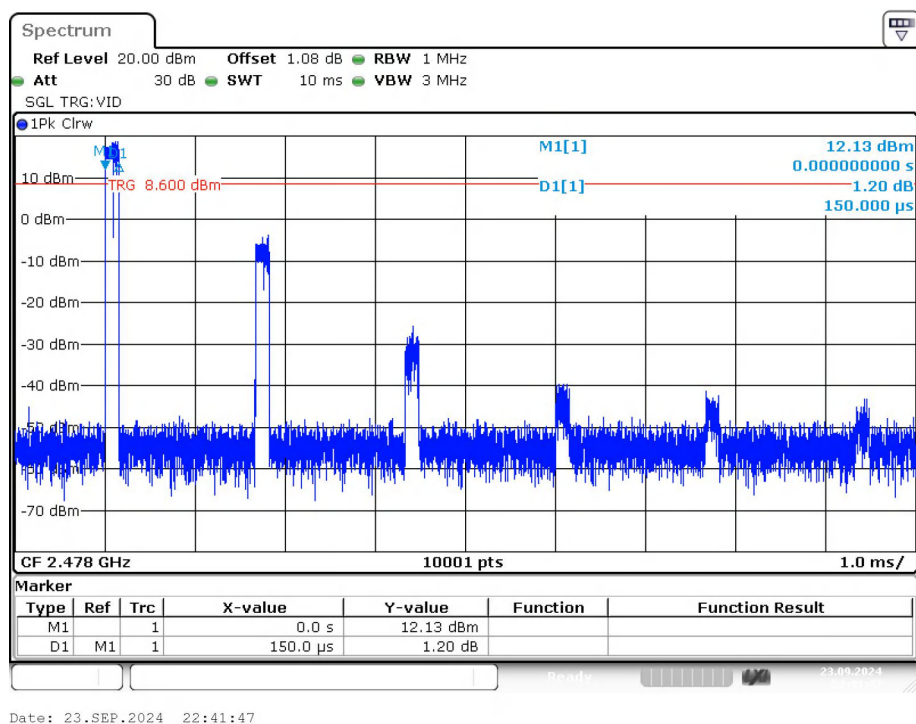

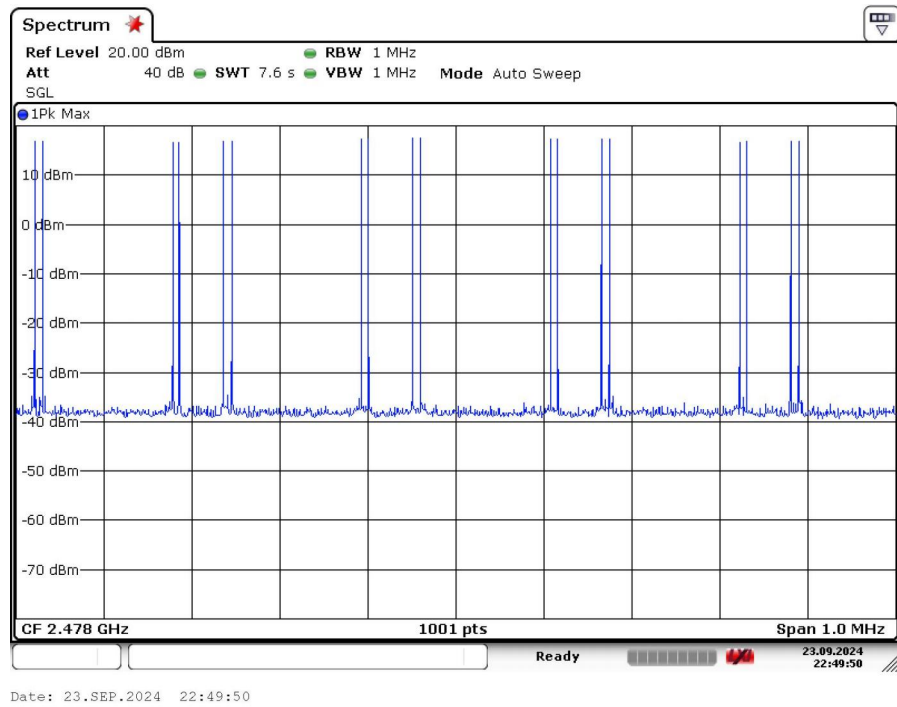

The results are not greater than 0.4 seconds

The unit does meet the FCC requirements.

5.7 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247

(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125W


Refer to the result "Hopping channel number" of this document. The 1 watt (30.0 dBm) limit applies.

Test Method: ANSI C63.10:2013

Test Limit:

Test mode: Test the EUT in continuous transmitting mode at the lowest, middle and Highest Channel.

Test Configuration:

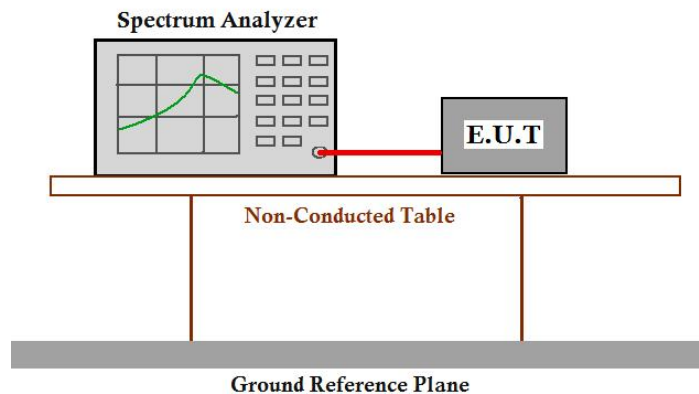

Test Procedure:


- 1 . Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
- 2 . Set the spectrum analyzer parameters as below:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW
 - 4) Sweep: Auto
 - 5) Detector function: Peak
 - 6) Trace: Max hold
- 3 . Keep the EUT in transmitting at lowest, medium and Highest Channel individually. Record the max value.

Test Result:


Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2408	17.65	21	Pass
Middle	2445	18.02	21	Pass
Highest	2478	20.84	21	Pass

Test result plot as follows:


Lowest Channel:

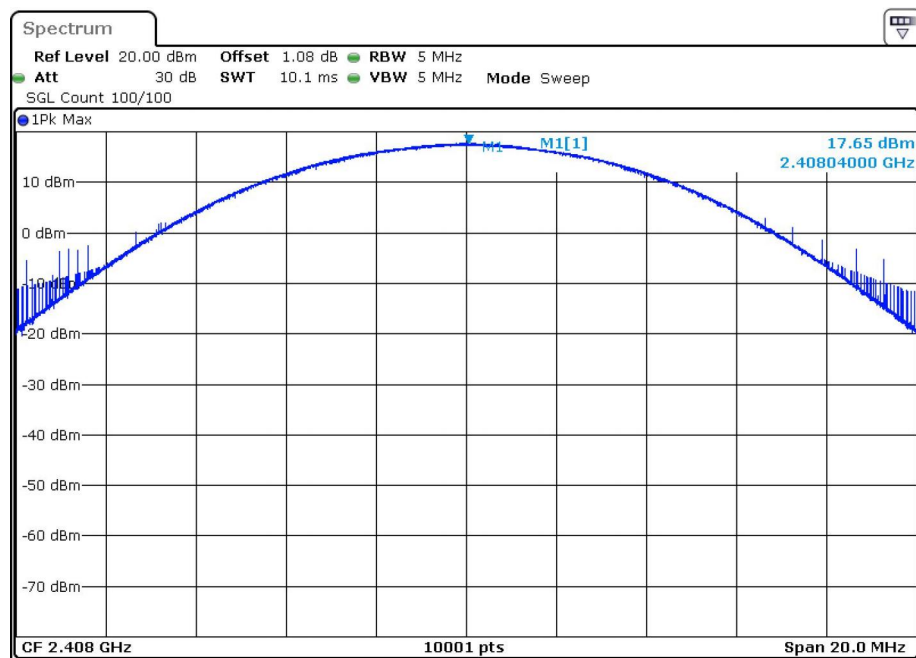

Middle Channel:

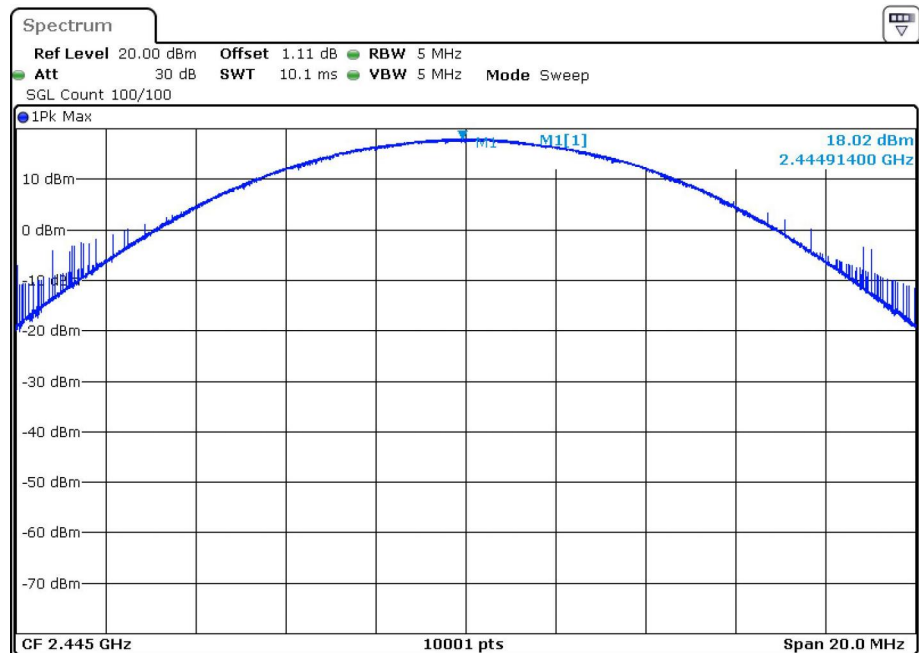

Highest Channel:

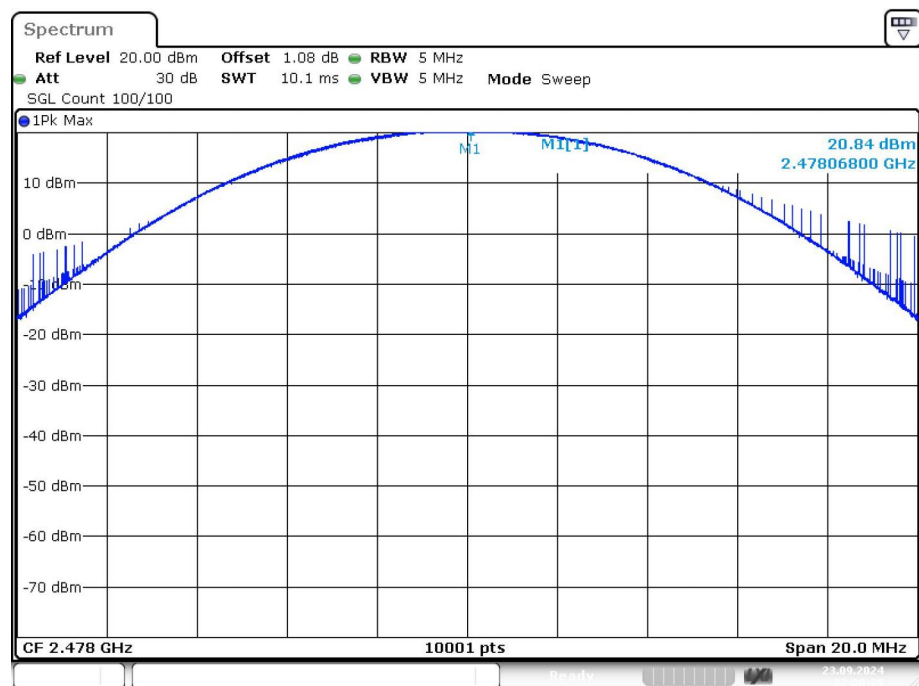

Date: 23.SEP.2024 22:00:25

Test result: The unit does meet the FCC requirements.

5.8 Conducted Spurious Emissions


Test Requirement: FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013

Test Status: Test the EUT in continuous transmitting mode at the lowest, middle and Highest Channel.

Test Configuration:

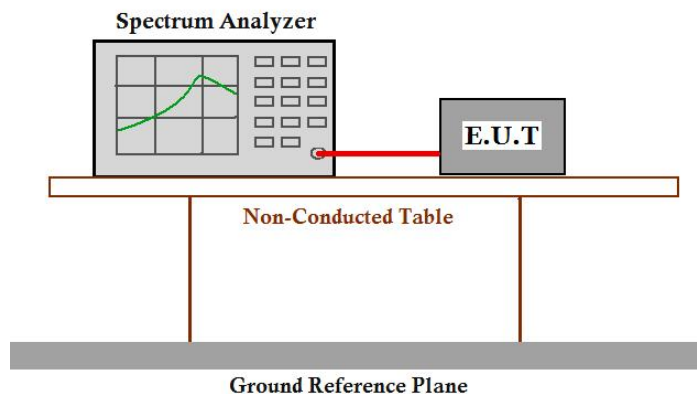


Test Procedure:


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW $\geq$ RBW. Sweep = auto; Detector Function = Peak (Max. hold).

Test result plot as follows


Lowest Channel:

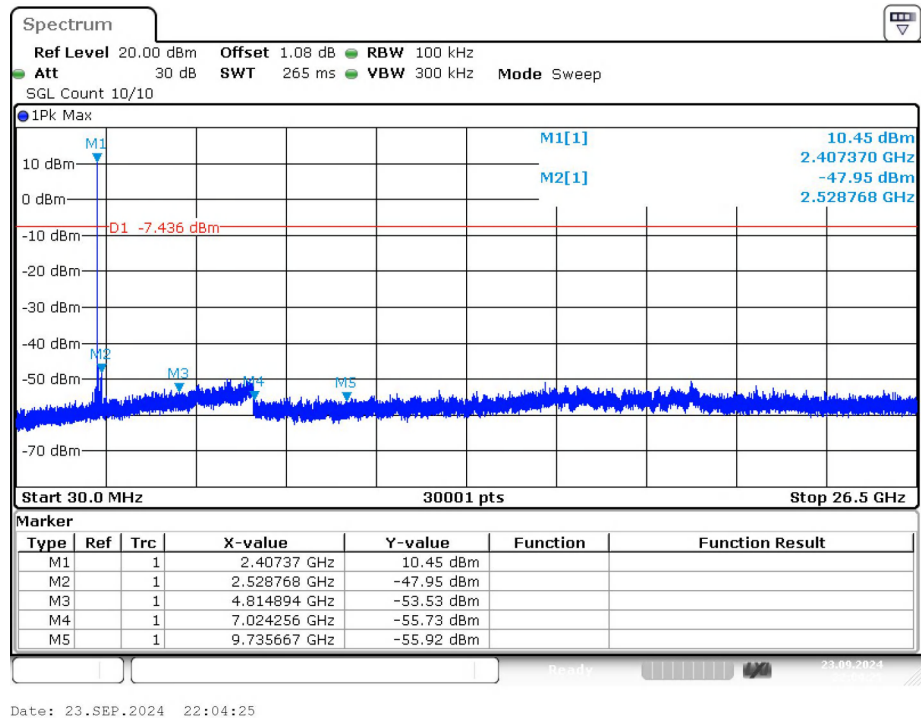

Middle Channel

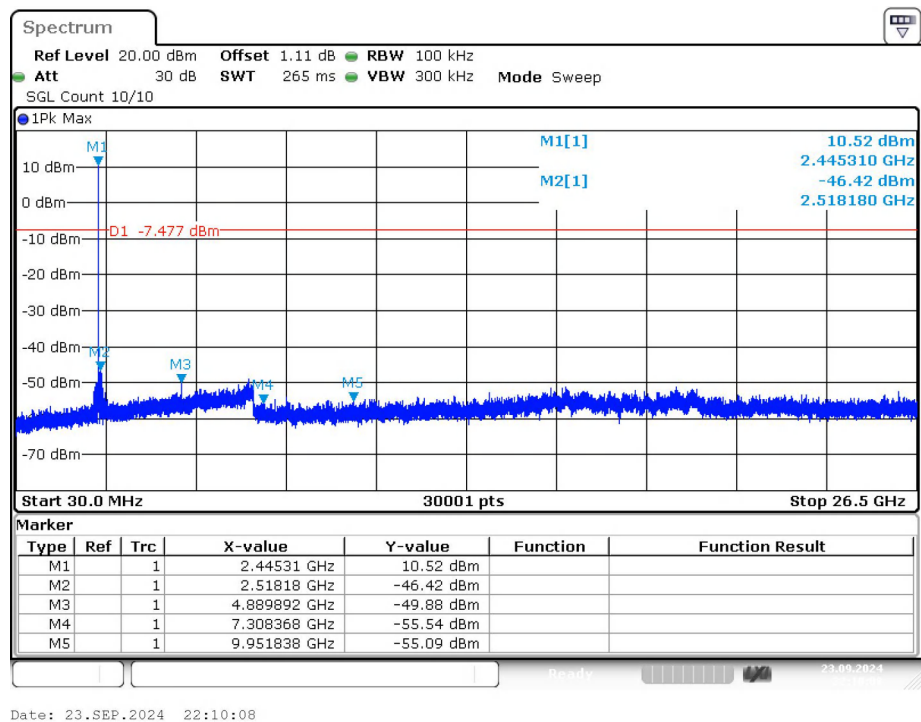

Highest Channel

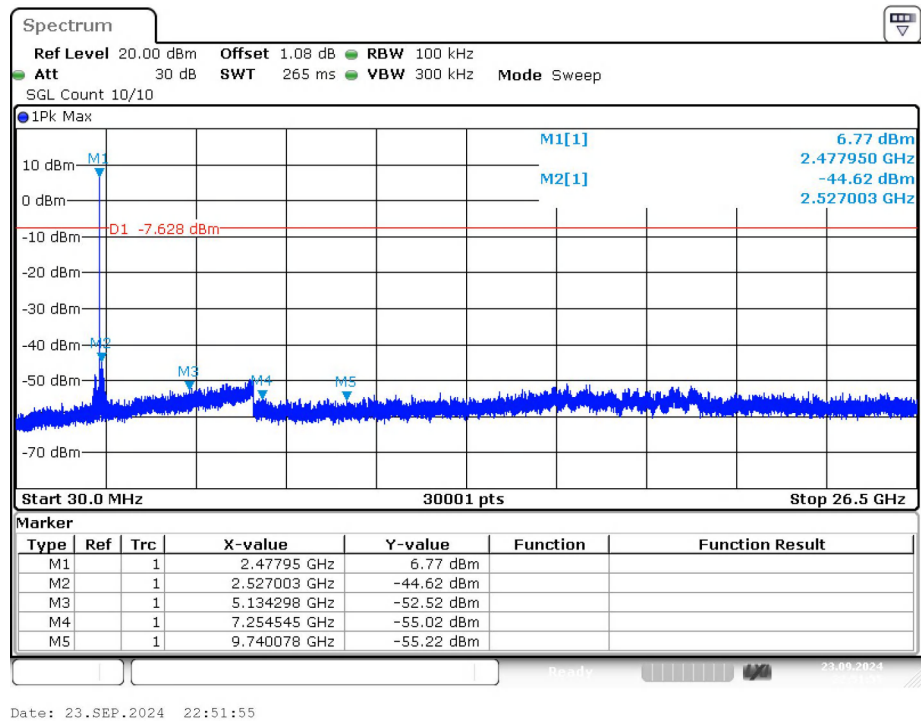

Test result: The unit does meet the FCC requirements.

5.9 Radiated Spurious Emissions

Test Requirement: FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013

Test Status: Test the EUT in continuous transmitting mode at the lowest, middle and Highest Channel.

Detector: For PK value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9k Hz for <30 MHz

VBW $\geq$ RBW Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9k Hz for <30 MHz

VBW =10 Hz

Sweep = auto

Detector function = peak


Trace = max hold

15.209 Limit:


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Test Configuration:


- 1) 9k Hz to 30 MHz emissions:

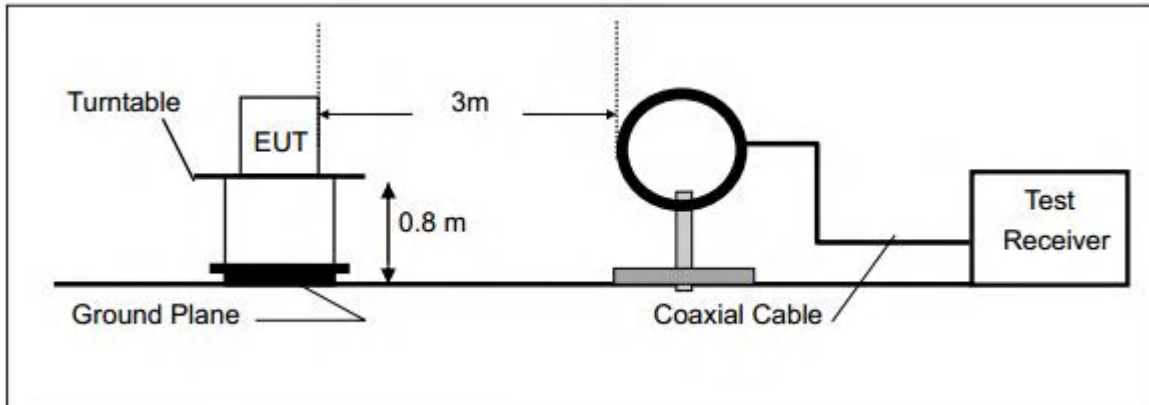

- 2) 30 MHz to 1 GHz emissions:

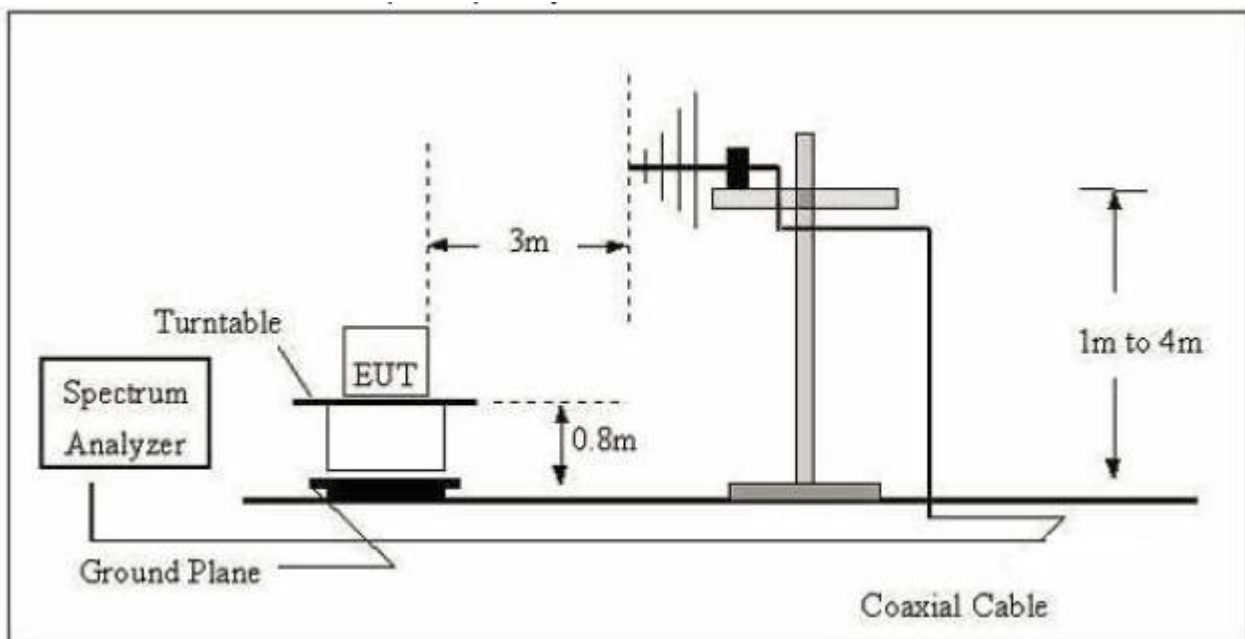

3) 1 GHz to 40 GHz emissions:

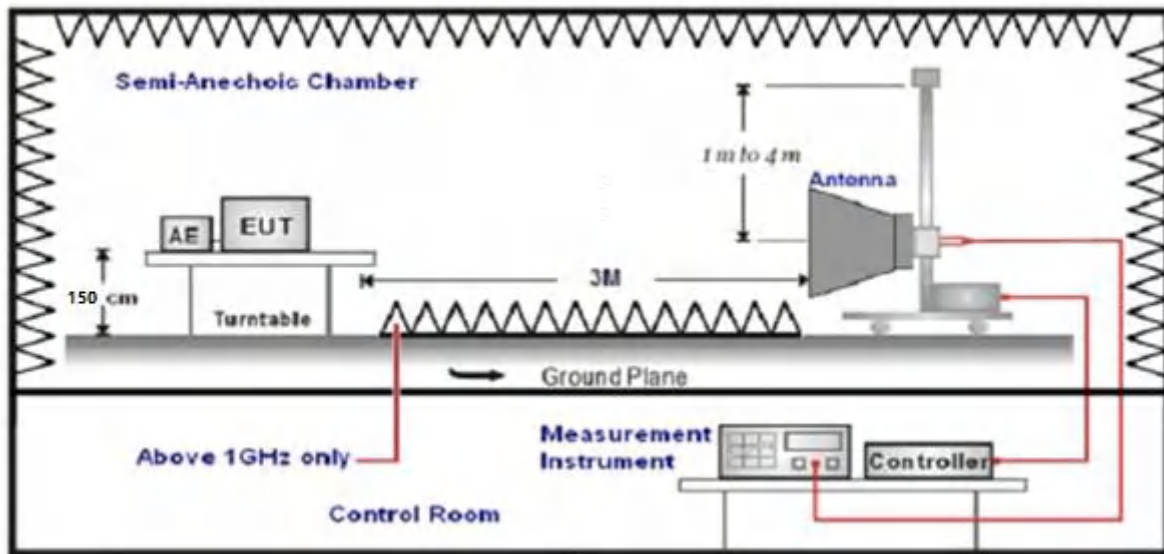

Test Procedure: The receiver was scanned from 9 kHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. After pre-test, it was found that the worse radiation emission was get at the X position. So the data shown was the X position only. The worst case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

5.9.1 Harmonic and other spurious emissions

HDW737 with IPEX Antenna

The monitor and camera work at the same time

Test at low Channel in transmitting status

Worst case Channel

9 kHz~30 MHz Test result


The Low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dB μ V/m)

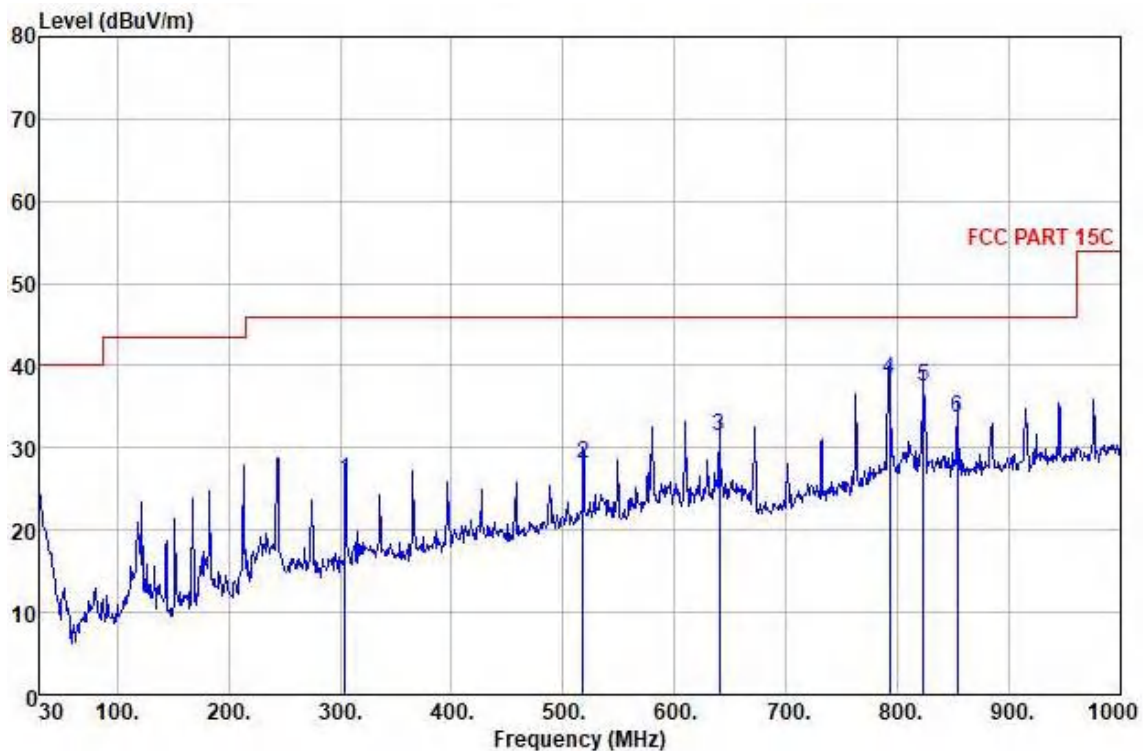


Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamplifier Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	304.510	38.10	13.17	2.11	27.58	26.13	16.00	-19.87	HORIZONTAL	QP
2	517.910	36.75	17.25	2.83	28.66	28.17	16.00	-17.83	HORIZONTAL	QP
3	640.130	37.58	19.20	3.17	28.12	31.53	16.00	-14.47	HORIZONTAL	QP
4	792.420	41.30	21.02	3.55	27.61	38.26	16.00	-7.74	HORIZONTAL	QP
5	823.160	39.97	21.37	3.62	27.51	37.15	16.00	-8.55	HORIZONTAL	QP
6	853.530	35.70	21.70	3.69	27.54	33.55	16.00	-12.45	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

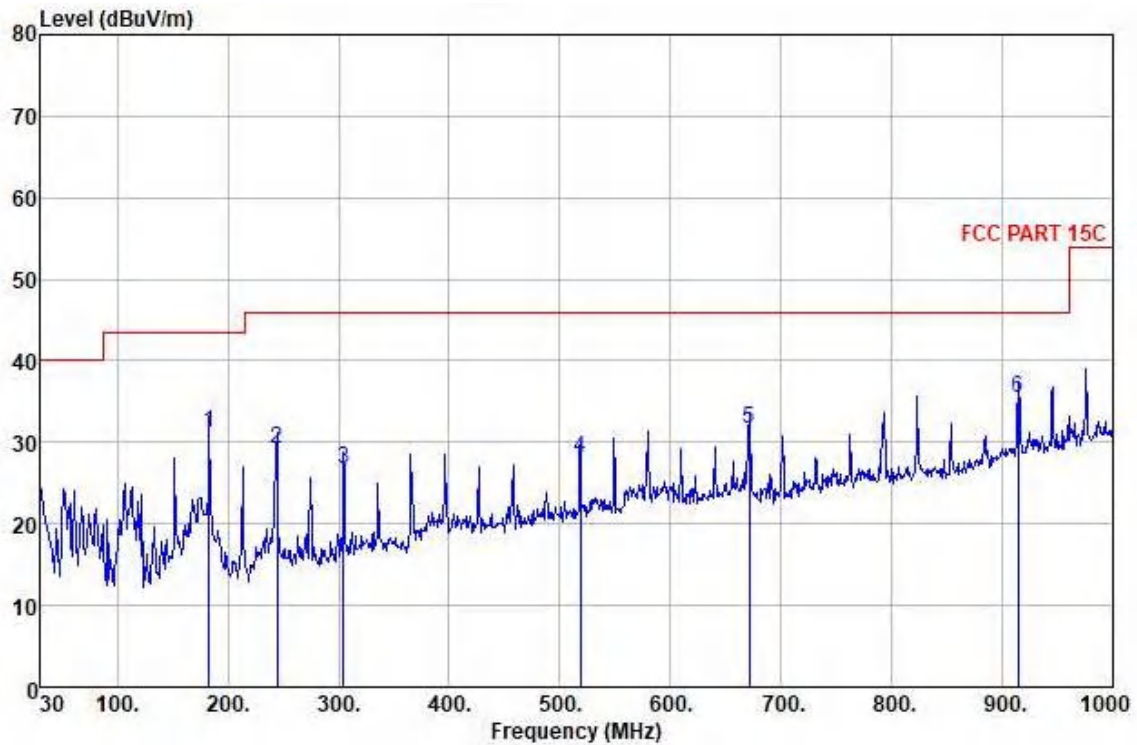Level (dB μ V/m)


Quasi-peak measurement

No.	Freq MHz	Read Level dB μ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB μ V/m	Limit Line dB μ V/m	Over Limit dB	Pol/Phase	Remark
1	183.260	47.51	9.73	1.63	27.73	31.14	13.50	-12.36	VERTICAL	QP
2	244.370	41.97	12.67	1.90	27.24	29.30	16.00	-16.70	VERTICAL	QP
3	304.510	39.06	13.17	2.14	27.58	26.79	16.00	-19.21	VERTICAL	QP
4	518.880	36.65	17.27	2.83	28.65	28.10	16.00	-17.90	VERTICAL	QP
5	671.170	37.45	19.19	3.25	28.64	31.55	16.00	-14.45	VERTICAL	QP
6	914.640	36.46	22.47	3.83	27.32	35.44	16.00	-10.56	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Spurious emissions above 1GHz**Test at Lowest Channel in transmitting status****Horizontal:**

Peak scan

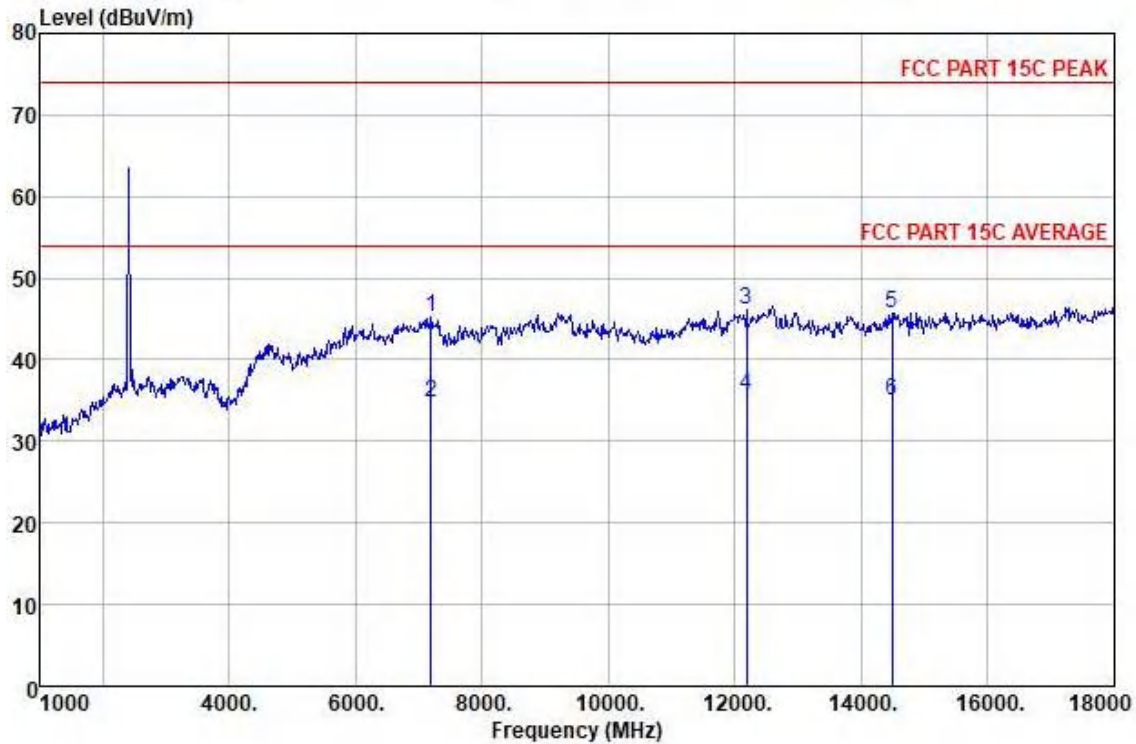
Level (dB μ V/m)

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
7188.000	23.85	36.70	12.11	27.33	45.33	74.00	-28.67	HORIZONTAL	Peak
7188.000	13.34	36.70	12.11	27.33	34.82	74.00	-39.18	HORIZONTAL	Average
12186.000	16.73	39.56	16.52	26.78	16.03	74.00	-27.97	HORIZONTAL	Peak
12186.000	6.33	39.56	16.52	26.78	35.63	74.00	-38.37	HORIZONTAL	Average
14481.000	13.86	39.68	18.39	26.15	15.78	74.00	-28.22	HORIZONTAL	Peak
14481.000	3.08	39.68	18.39	26.15	35.00	74.00	-39.00	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

Vertical:

Peak scan

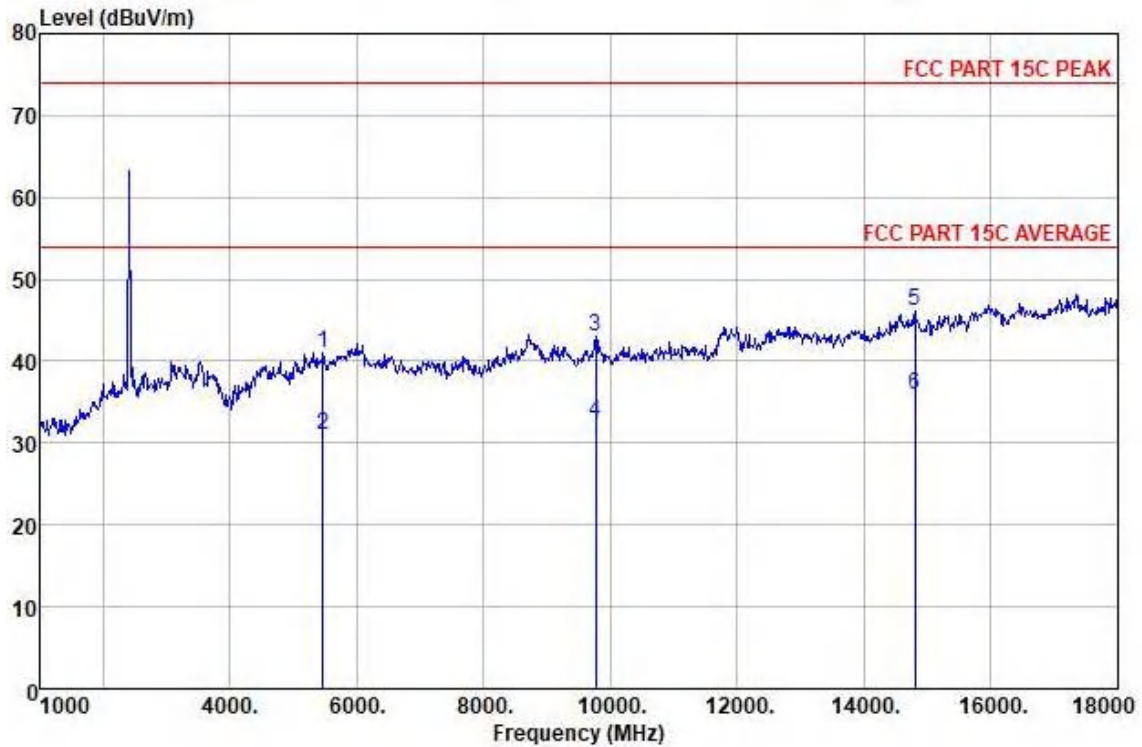Level (dB μ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
5471.000	24.22	33.88	10.33	27.50	40.93	74.00	-33.07	VERTICAL	Peak
5471.000	14.16	33.88	10.33	27.50	30.87	74.00	-43.13	VERTICAL	Average
9772.000	16.66	38.91	14.49	27.12	42.94	74.00	-31.06	VERTICAL	Peak
9772.000	6.29	38.91	14.49	27.12	32.57	74.00	-41.43	VERTICAL	Average
14804.000	13.61	39.94	18.60	26.10	46.05	74.00	-27.95	VERTICAL	Peak
14804.000	3.52	39.94	18.60	26.10	35.96	74.00	-38.04	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Middle Channel in transmitting status**Horizontal:**

Peak scan

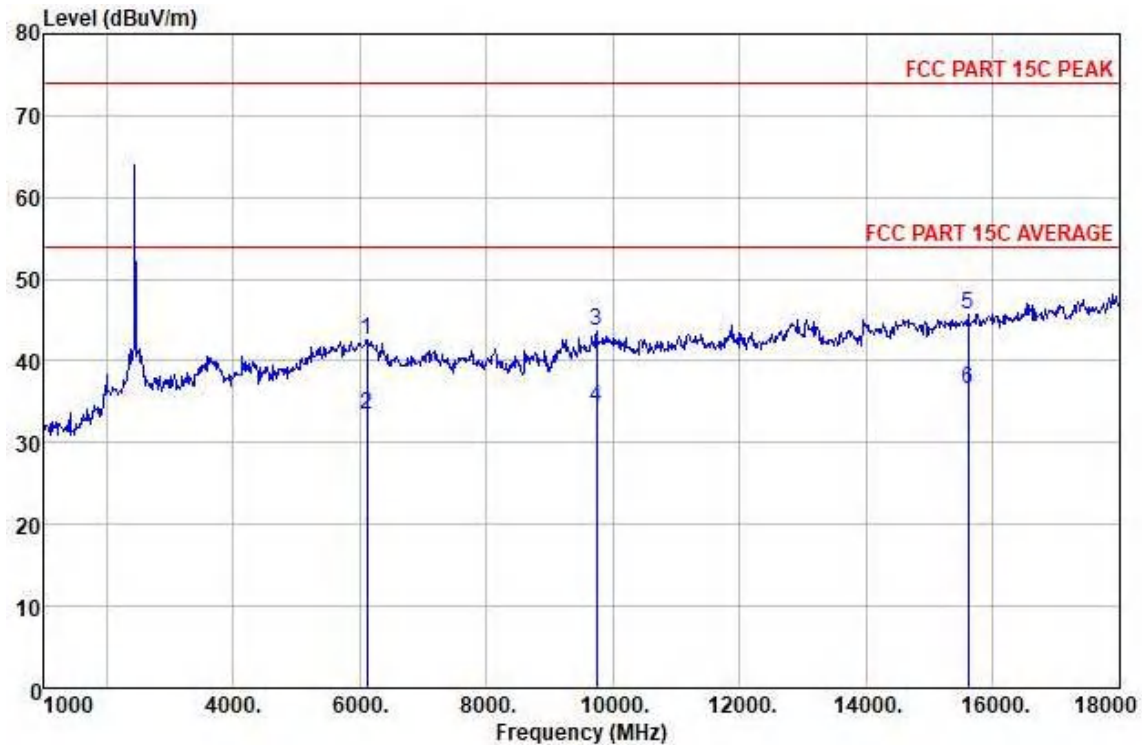Level (dB μ V/m)

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
6117.000	24.12	35.88	11.02	27.41	43.61	74.00	-30.39	HORIZONTAL	Peak
6117.000	14.97	35.88	11.02	27.41	34.46	54.00	-19.54	HORIZONTAL	Average
9466.000	18.89	38.80	14.31	27.15	44.85	74.00	-29.15	HORIZONTAL	Peak
9466.000	8.97	38.80	14.31	27.15	34.93	54.00	-19.07	HORIZONTAL	Average
13053.000	16.68	40.63	17.22	26.46	48.07	74.00	-25.93	HORIZONTAL	Peak
13053.000	6.76	40.63	17.22	26.46	38.15	54.00	-15.85	HORIZONTAL	Average


$$\text{Level} = \text{Read Level} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$$

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dB μ V/m)

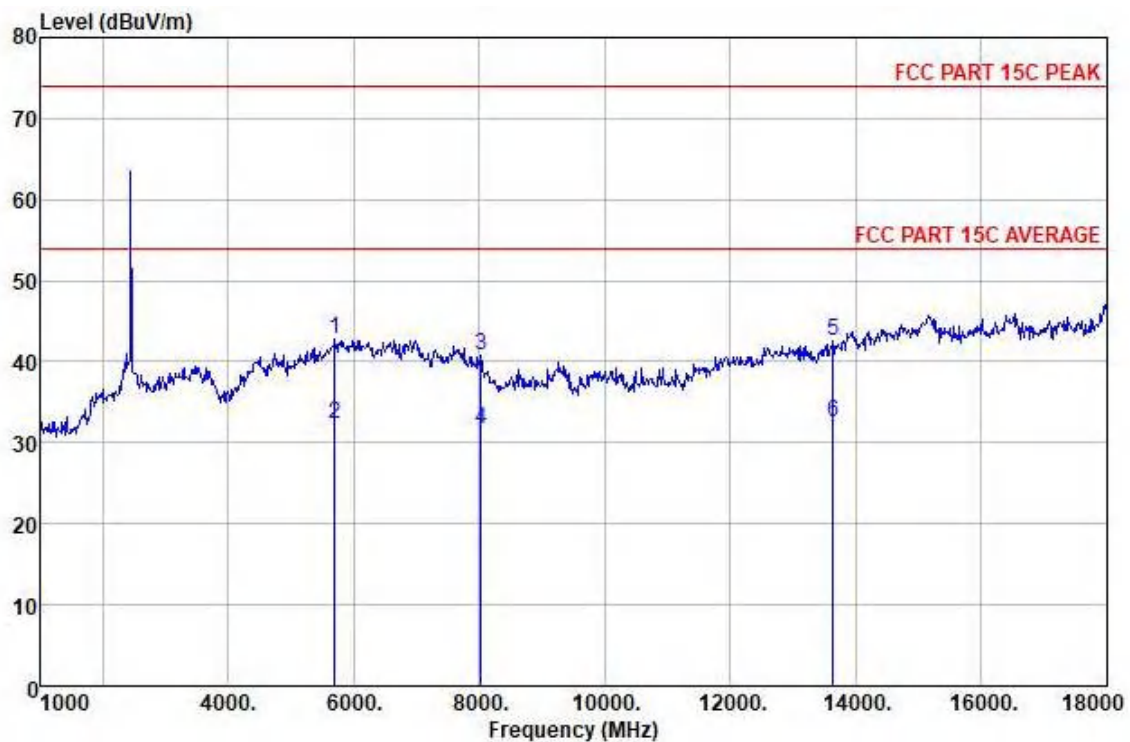


Freq MHz	Read Level dB μ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB μ V/m	Limit Line dB μ V/m	Over Limit dB	Pol/Phase	Remark
5692.000	24.86	34.71	10.57	27.46	42.68	74.00	-31.32	VERTICAL	Peak
5692.000	14.43	34.71	10.57	27.46	32.25	74.00	-41.75	VERTICAL	Average
8021.000	18.20	37.03	12.93	27.30	40.86	74.00	-33.14	VERTICAL	Peak
8021.000	8.95	37.03	12.93	27.30	31.61	74.00	-42.39	VERTICAL	Average
13631.000	11.48	39.79	17.69	26.29	42.67	74.00	-31.33	VERTICAL	Peak
13631.000	1.24	39.79	17.69	26.29	32.43	74.00	-41.57	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Highest Channel in transmitting status**Horizontal:**

Peak scan

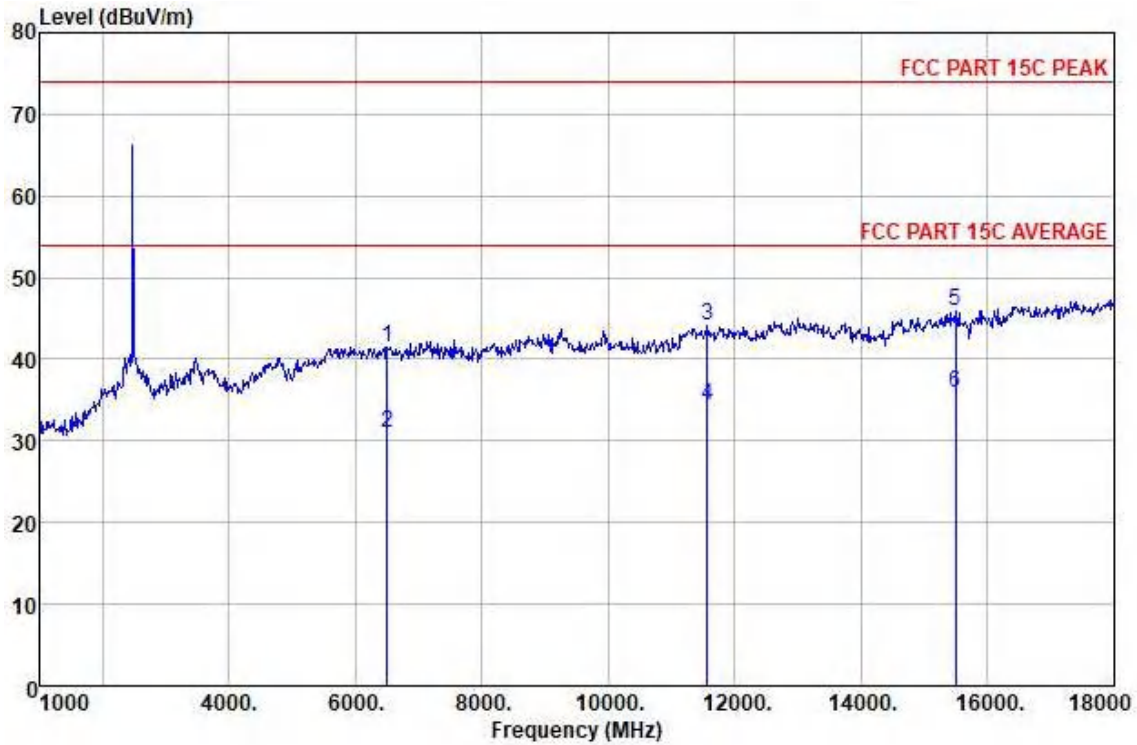Level (dB μ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
6508.000	21.92	35.51	11.43	27.37	41.49	74.00	-32.51	HORIZONTAL	Peak
6508.000	11.31	35.51	11.43	27.37	30.88	74.00	-43.12	HORIZONTAL	Average
11557.000	15.37	39.60	16.00	26.96	41.01	74.00	-29.99	HORIZONTAL	Peak
11557.000	5.72	39.60	16.00	26.96	31.36	74.00	-39.64	HORIZONTAL	Average
15484.000	13.26	39.42	19.13	25.99	45.82	74.00	-28.18	HORIZONTAL	Peak
15484.000	3.34	39.42	19.13	25.99	35.90	74.00	-38.10	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

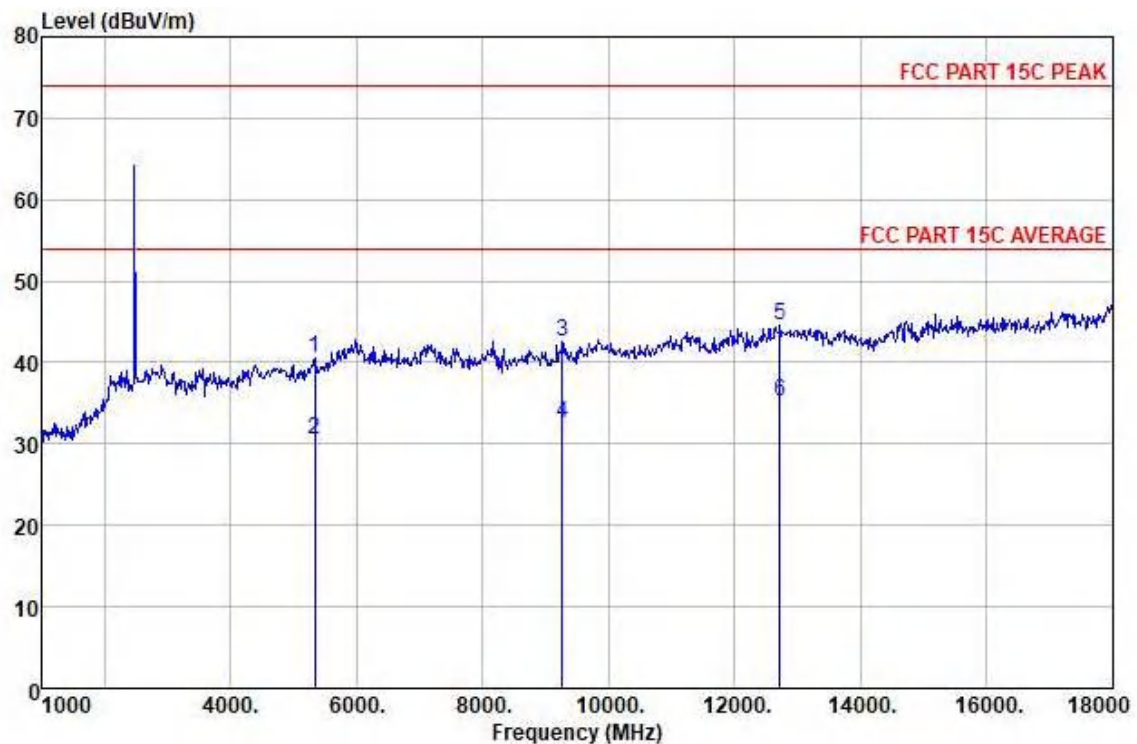Level (dB μ V/m)

Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
5335.000	24.06	33.77	10.18	27.52	40.19	74.00	-33.51	VERTICAL	Peak
5335.000	14.18	33.77	10.18	27.52	30.61	74.00	-43.39	VERTICAL	Average
9262.000	16.80	38.80	14.13	27.18	42.55	74.00	-31.45	VERTICAL	Peak
9262.000	6.88	38.80	14.13	27.18	32.63	74.00	-41.37	VERTICAL	Average
12713.000	14.27	40.01	16.95	26.59	41.64	74.00	-29.36	VERTICAL	Peak
12713.000	-1.82	40.01	16.95	26.59	35.19	74.00	-38.81	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

HDW-737 with RP-SMA Antenna**The monitor and camera work at the same time****Worst case Channel**

9 kHz~30 MHz Test result


The Low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

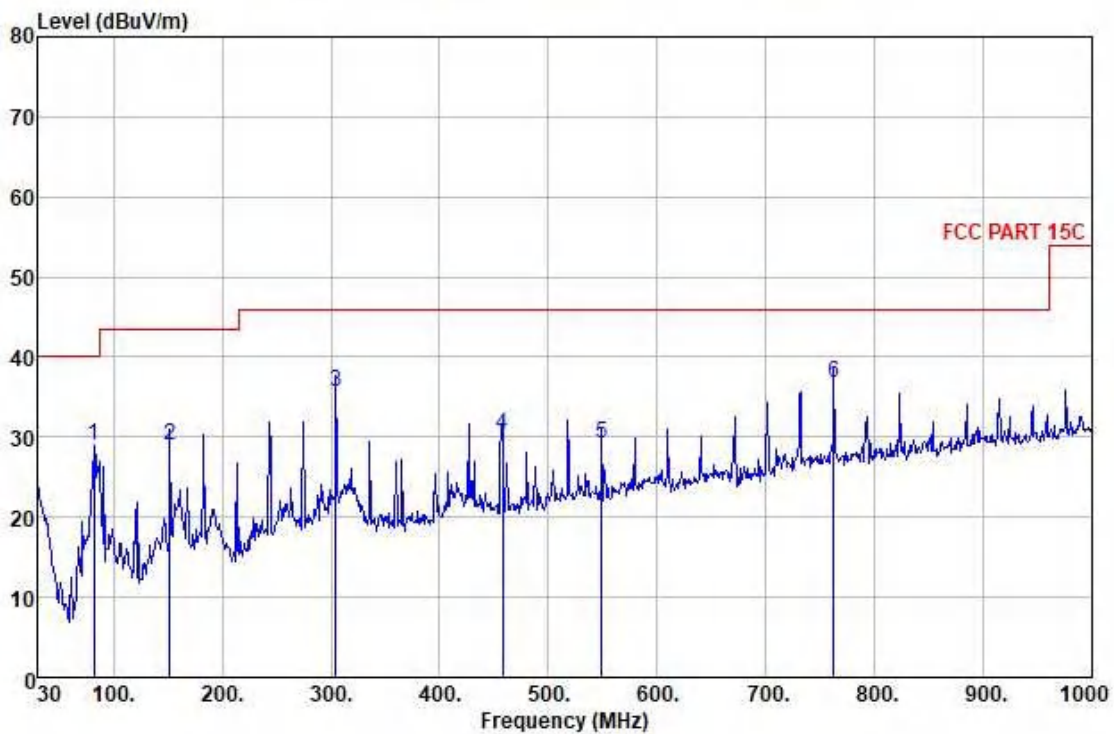
**Quasi-peak measurement**

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	82.380	48.62	7.50	1.06	28.17	29.01	40.00	-10.99	HORIZONTAL	QP
2	152.220	47.98	7.91	1.47	28.49	28.90	43.50	-14.60	HORIZONTAL	QP
3	304.510	47.92	13.17	2.11	27.58	35.65	46.00	-10.35	HORIZONTAL	QP
4	457.770	40.17	15.92	2.65	28.51	30.20	46.00	-15.80	HORIZONTAL	QP
5	548.950	37.40	17.68	2.91	28.89	29.10	46.00	-16.90	HORIZONTAL	QP
6	762.350	39.94	20.72	3.47	27.45	36.68	46.00	-9.32	HORIZONTAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

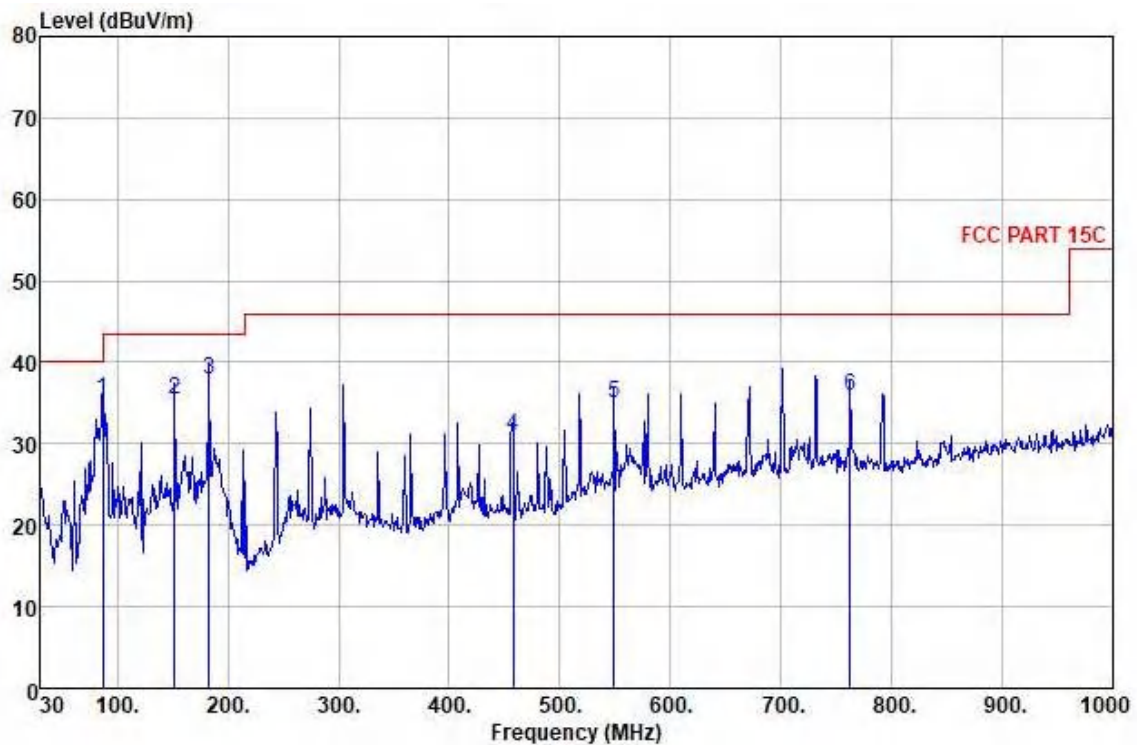Level (dB μ V/m)


Quasi-peak measurement

No.	Freq MHz	Read Level dB μ V	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Pol/Phase	Remark
1	87.230	55.08	7.69	1.09	28.32	35.51	10.00	-4.46	VERTICAL	QP
2	152.220	51.43	7.94	1.47	28.49	35.35	13.50	-8.15	VERTICAL	QP
3	183.260	54.18	9.73	1.63	27.73	37.81	13.50	-5.69	VERTICAL	QP
4	457.770	40.93	15.92	2.65	28.51	30.96	16.00	-15.04	VERTICAL	QP
5	518.950	43.30	17.68	2.91	28.89	35.00	16.00	-11.00	VERTICAL	QP
6	762.350	39.22	20.72	3.47	27.45	35.96	16.00	-10.04	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Spurious emissions above 1GHz**Test at Lowest Channel in transmitting status****Horizontal:**

Peak scan

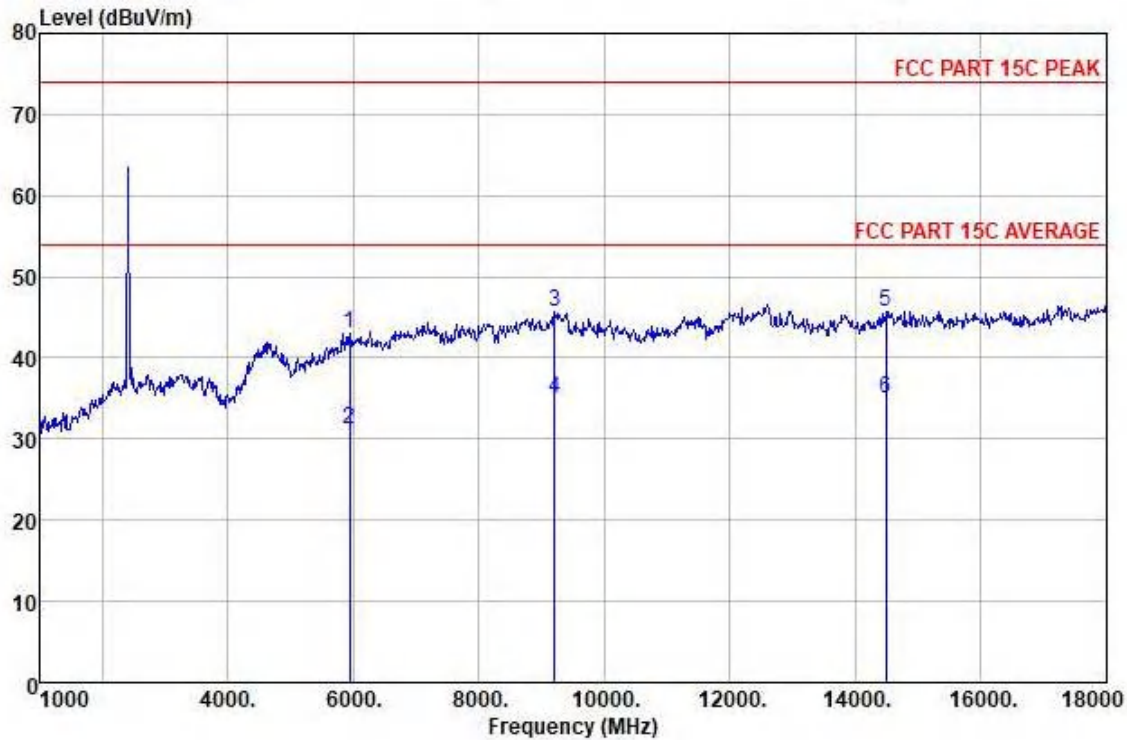Level (dB μ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
5947.000	23.92	35.78	10.84	27.43	43.11	74.00	-30.89	HORIZONTAL	Peak
5947.000	12.09	35.78	10.84	27.43	31.28	74.00	-42.72	HORIZONTAL	Average
9211.000	19.98	38.80	14.08	27.18	45.68	74.00	-28.32	HORIZONTAL	Peak
9211.000	9.38	38.80	14.08	27.18	35.08	74.00	-38.92	HORIZONTAL	Average
14481.000	13.86	39.68	18.39	26.15	45.78	74.00	-28.22	HORIZONTAL	Peak
14481.000	3.08	39.68	18.39	26.15	35.00	74.00	-39.00	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

Vertical:

Peak scan

Level (dBμV/m)

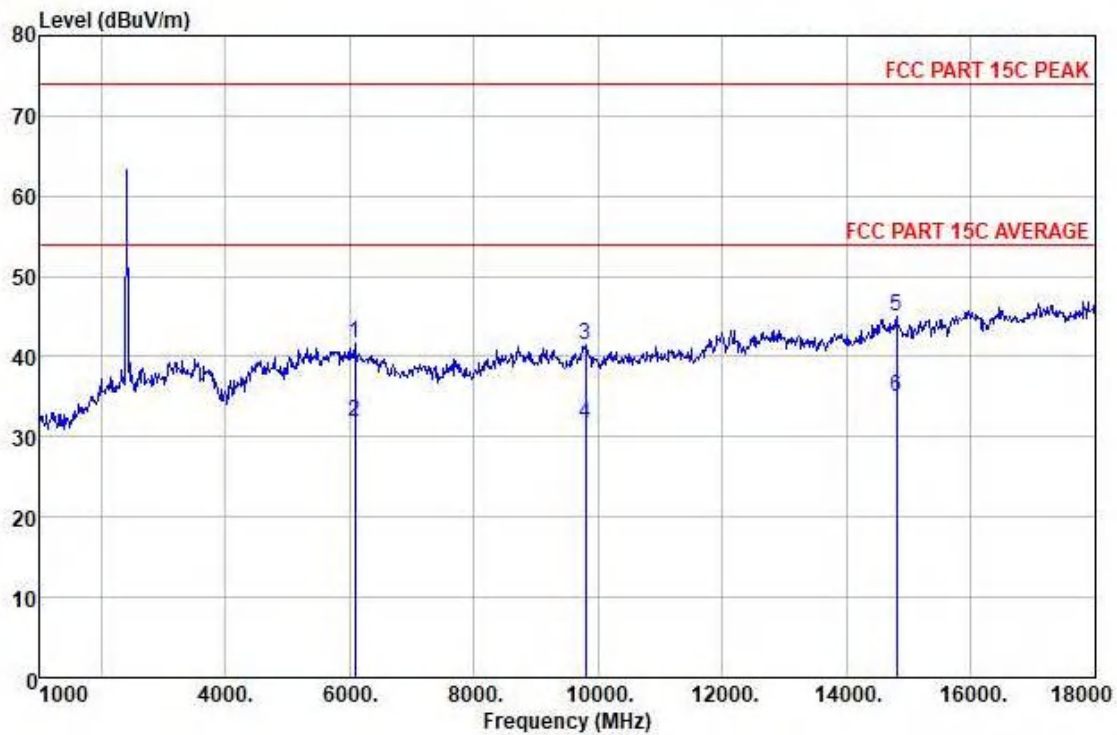


Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
6083.000	22.27	35.92	10.99	27.41	41.77	74.00	-32.23	VERTICAL	Peak
6083.000	12.32	35.92	10.99	27.41	31.82	74.00	-42.18	VERTICAL	Average
9789.000	15.17	38.92	14.50	27.12	41.47	74.00	-32.53	VERTICAL	Peak
9789.000	5.35	38.92	14.50	27.12	31.65	74.00	-42.35	VERTICAL	Average
14804.000	12.61	39.91	18.60	26.10	45.05	74.00	-28.95	VERTICAL	Peak
14804.000	2.52	39.91	18.60	26.10	31.96	74.00	-39.01	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Middle Channel in transmitting status**Horizontal:**

Peak scan

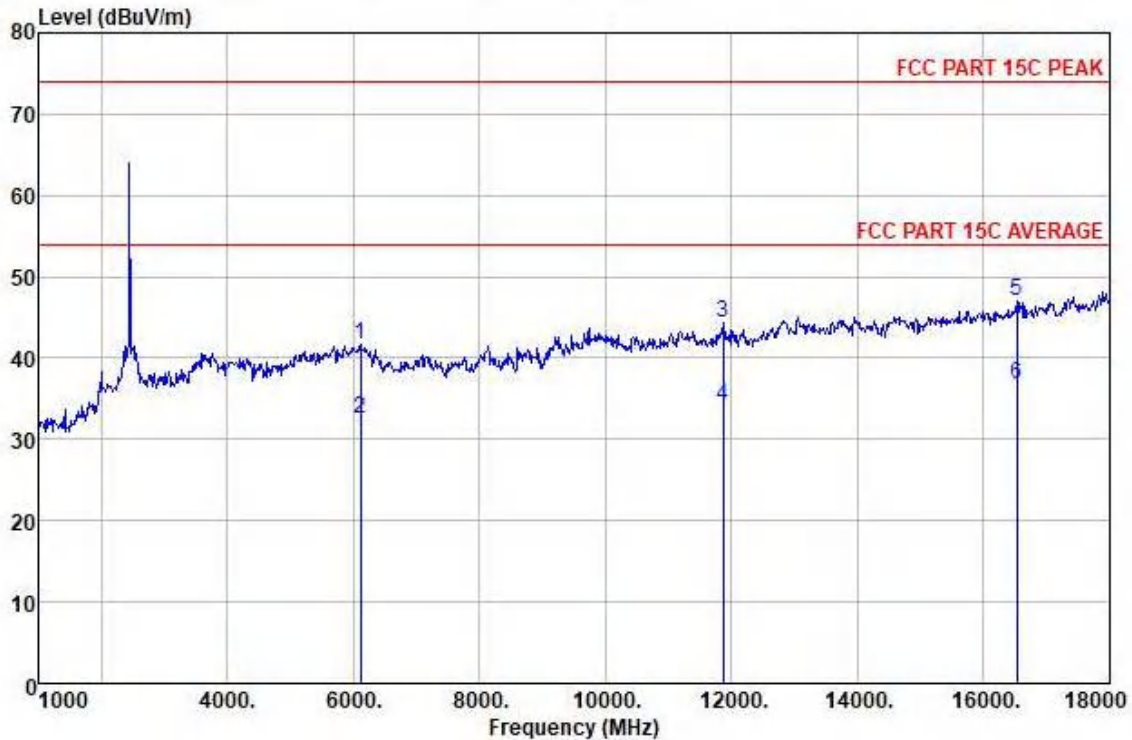Level (dB μ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
6117.000	22.12	35.88	11.02	27.41	41.61	74.00	-32.39	HORIZONTAL	Peak
6117.000	12.97	35.88	11.02	27.41	32.46	74.00	-41.54	HORIZONTAL	Average
11863.000	15.40	39.60	16.25	26.88	44.37	74.00	-29.63	HORIZONTAL	Peak
11863.000	5.16	39.60	16.25	26.88	34.13	74.00	-39.87	HORIZONTAL	Average
16521.000	12.44	40.36	19.84	25.66	46.98	74.00	-27.02	HORIZONTAL	Peak
16521.000	2.14	40.36	19.84	25.66	36.68	74.00	-37.32	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

Vertical:

Peak scan

Level (dBμV/m)

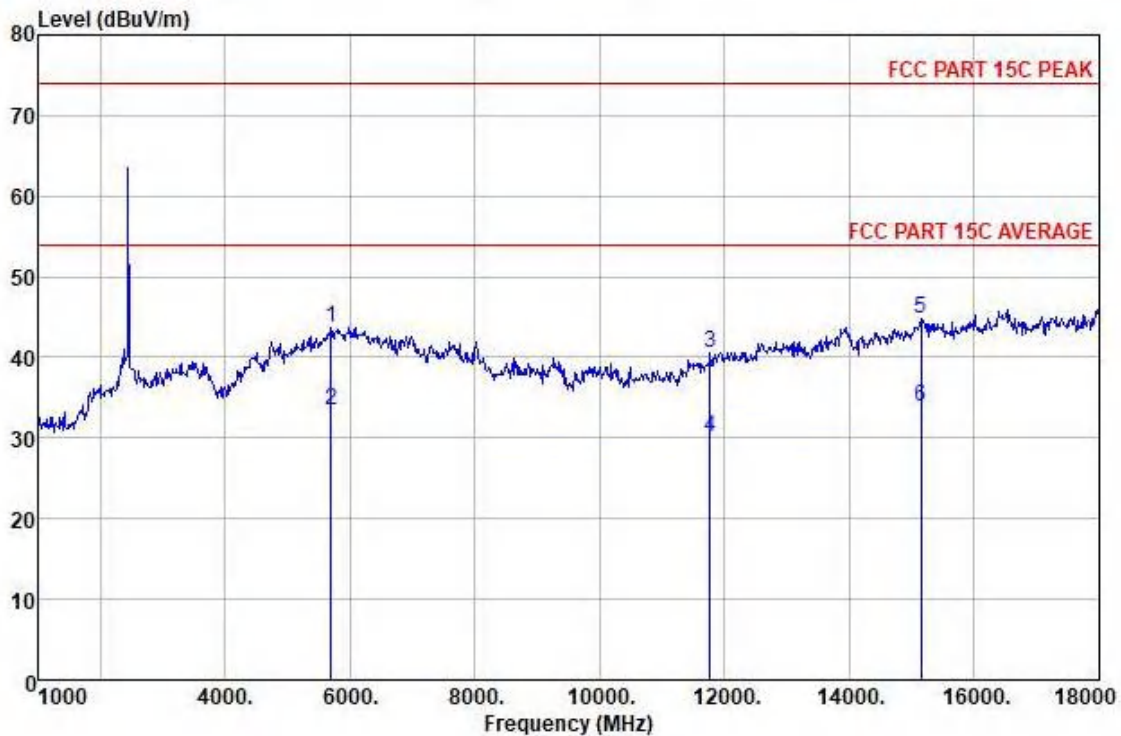


Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit dBμV/m	Over Limit dB	Pol/Phase	Remark
5692.000	25.86	34.71	10.57	27.46	43.68	74.00	-30.32	VERTICAL	Peak
5692.000	15.63	34.71	10.57	27.46	33.45	74.00	-40.55	VERTICAL	Average
11761.000	11.59	39.60	16.16	26.90	40.45	74.00	-33.55	VERTICAL	Peak
11761.000	1.13	39.60	16.16	26.90	29.99	74.00	-44.01	VERTICAL	Average
15144.000	11.99	39.90	18.85	26.05	44.69	74.00	-29.31	VERTICAL	Peak
15144.000	1.24	39.90	18.85	26.05	33.94	74.00	-40.06	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Highest Channel in transmitting status**Horizontal:**

Peak scan

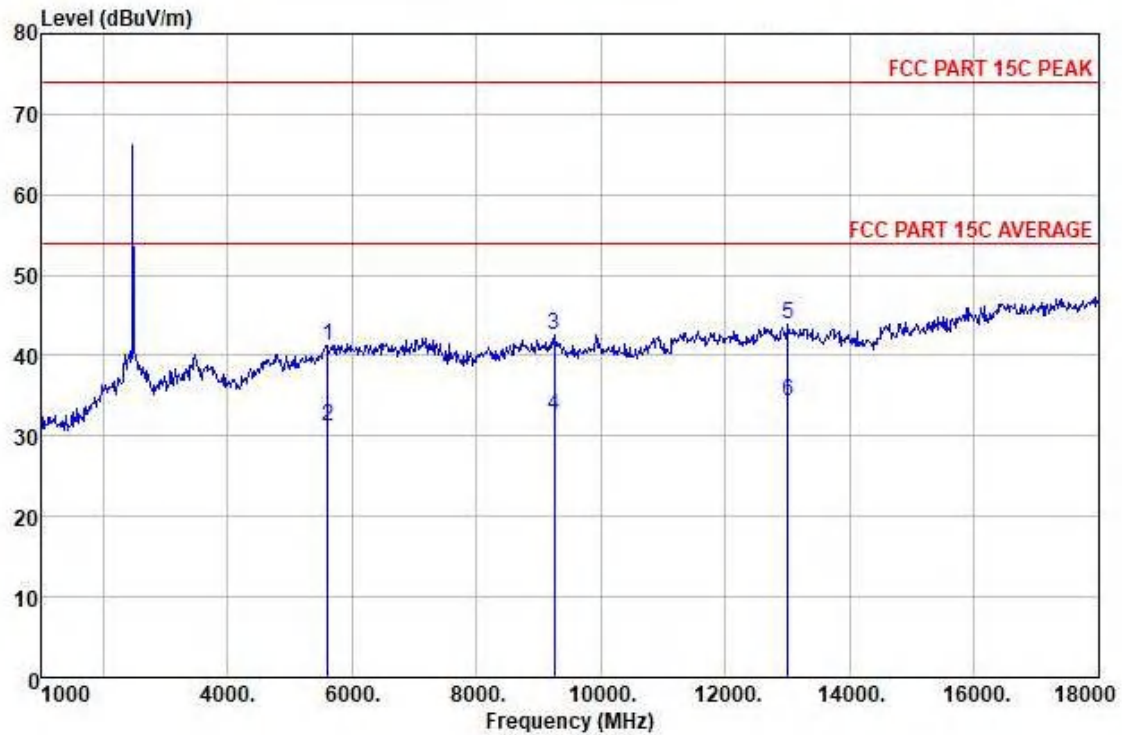Level (dB μ V/m)


Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
5607.000	23.95	34.35	10.18	27.18	41.30	74.00	-32.70	HORIZONTAL	Peak
5607.000	13.86	34.35	10.18	27.18	31.21	74.00	-42.79	HORIZONTAL	Average
9245.000	16.85	38.80	14.11	27.18	42.58	74.00	-31.42	HORIZONTAL	Peak
9245.000	6.87	38.80	14.11	27.18	32.60	74.00	-41.40	HORIZONTAL	Average
13002.000	12.54	40.70	17.18	26.48	43.94	74.00	-30.06	HORIZONTAL	Peak
13002.000	2.95	40.70	17.18	26.48	34.35	74.00	-39.65	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**Note: The emission above limit is fundamental emission, which is not subject to the limit.**

Vertical:

Peak scan

Level (dBμV/m)

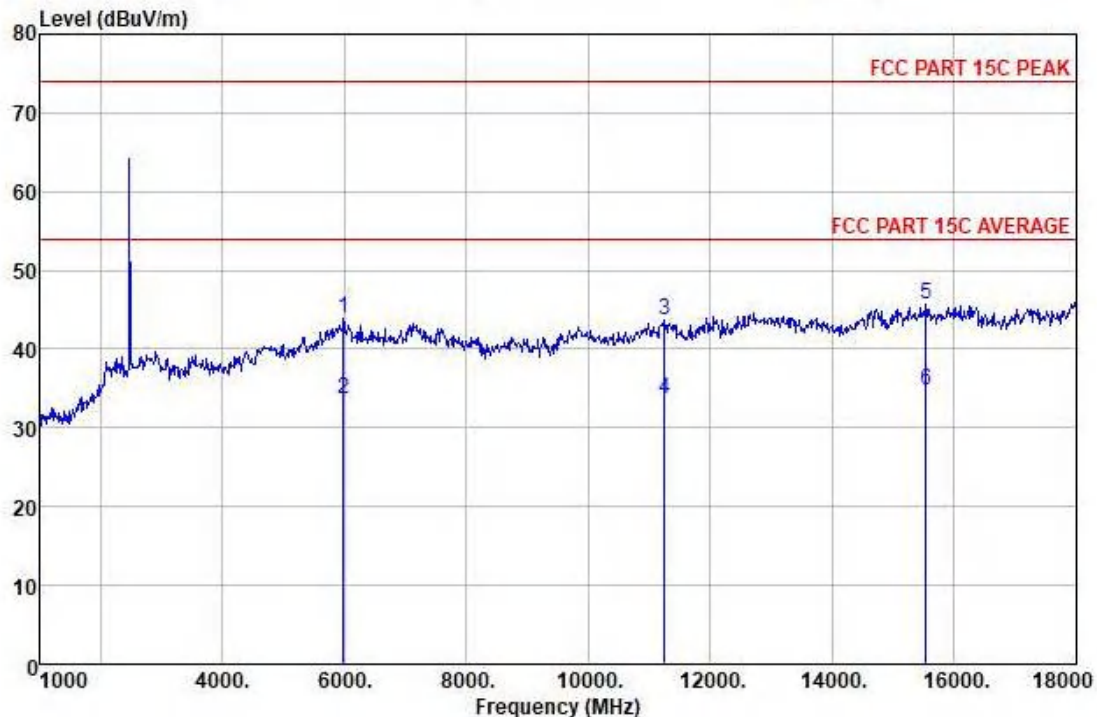

Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
5981.000	24.51	35.92	10.88	27.42	43.89	74.00	-30.11	VERTICAL	Peak
5981.000	11.23	35.92	10.88	27.42	33.61	74.00	-40.39	VERTICAL	Average
11251.000	15.51	39.40	15.77	27.00	43.68	74.00	-30.32	VERTICAL	Peak
11251.000	5.56	39.40	15.77	27.00	33.73	74.00	-40.27	VERTICAL	Average
15535.000	12.99	39.11	19.17	25.98	45.59	74.00	-28.41	VERTICAL	Peak
15535.000	2.09	39.11	19.17	25.98	31.69	74.00	-39.31	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

5.10 Radiated Emissions which fall in the restricted bands

Test Requirement: FCC Part15 C Section 15.247

(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Method: ANSI C63.10:2013 Clause 6.4, 6.5 and 6.6

Test Status: Test the EUT in continuous transmitting mode at the lowest (2408MHz) and highest (2478 MHz) channel.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: Section 15.209(a)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Detector: For PK value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW =10 Hz

Sweep = auto

Detector function = peak

Trace = max hold

Test Result:

Frequency (MHz)	Reading Level (dBμV/m)	Correct (dB/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna polarization	Detector
Low Channel							
2310.000	34.18	6.54	38.48	74.00	35.81	H	PK
2310.000	17.99	6.54	25.12	54.00	30.62	H	AV
2390.000	30.11	6.61	34.12	74.00	38.05	V	PK
2390.000	15.44	6.61	23.18	54.00	30.25	V	AV
High Channel							
2483.500	31.15	6.70	38.54	74.00	34.82	H	PK
2483.500	16.77	6.70	22.11	54.00	30.11	H	AV
2500.000	28.19	6.72	32.16	74.00	39.48	V	PK
2500.000	18.44	6.72	23.19	54.00	31.70	V	AV

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.

5.11 Band Edges Requirement

Test Requirement: FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205 (c)).

Frequency Band: 2400 MHz to 2483.5 MHz

Test Method: ANSI C63.10:2013 Clause 6.9

Test Status: Test the EUT in continuous transmitting mode at the lowest (2408 MHz), and highest (2478 MHz) channel and hopping mode

Test Configuration:

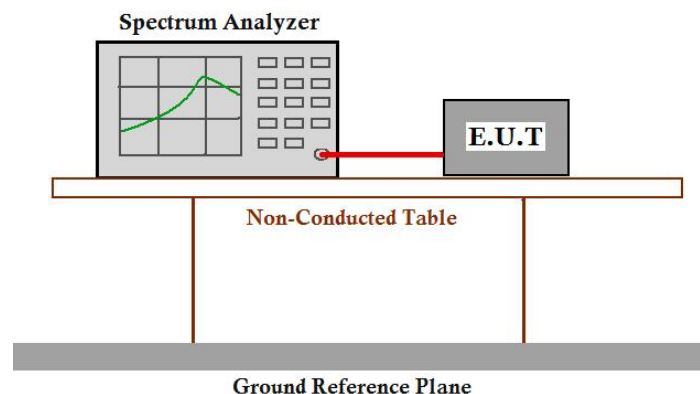

Test Procedure:

Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 10MHz bandwidth from band edge.

The band edges were measured and recorded Result:

The Lower Edges attenuated more than 20dB.



The Upper Edges attenuated more than 20dB.

The graph as below:

Represents the emissions take for this device.

Fixed Mode:

Lowest Channel:

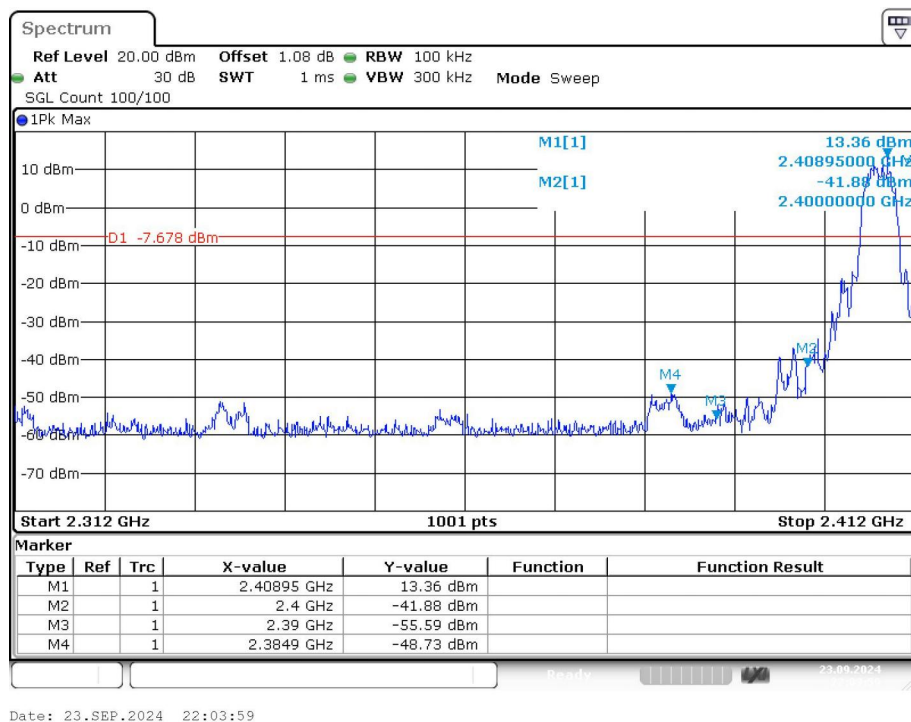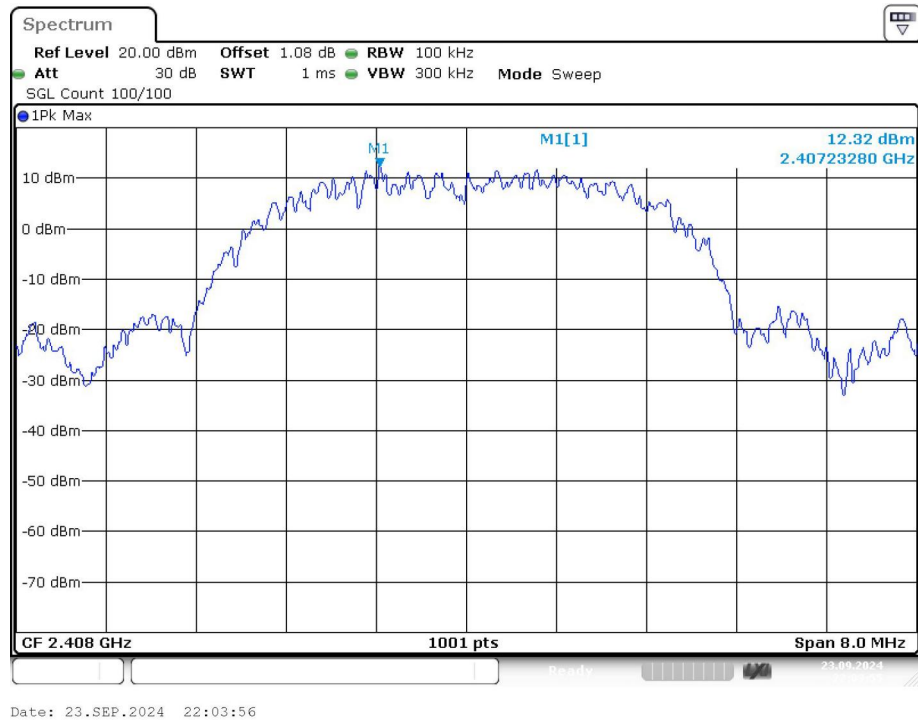


Date: 23.SEP.2024 22:00:54




Hopping Mode:

Lowest Channel

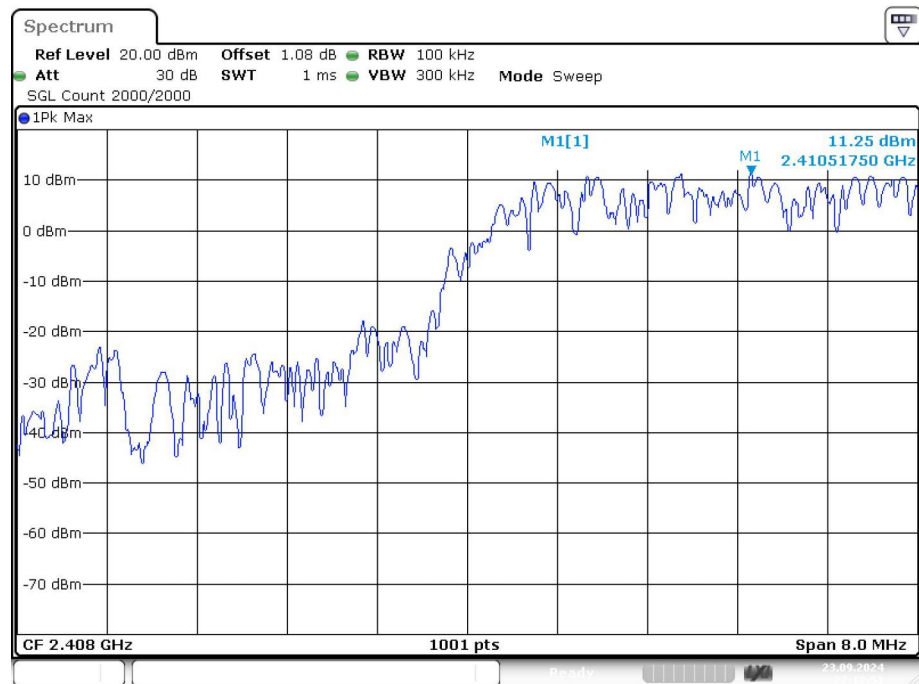


Date: 23.SEP.2024 22:13:51

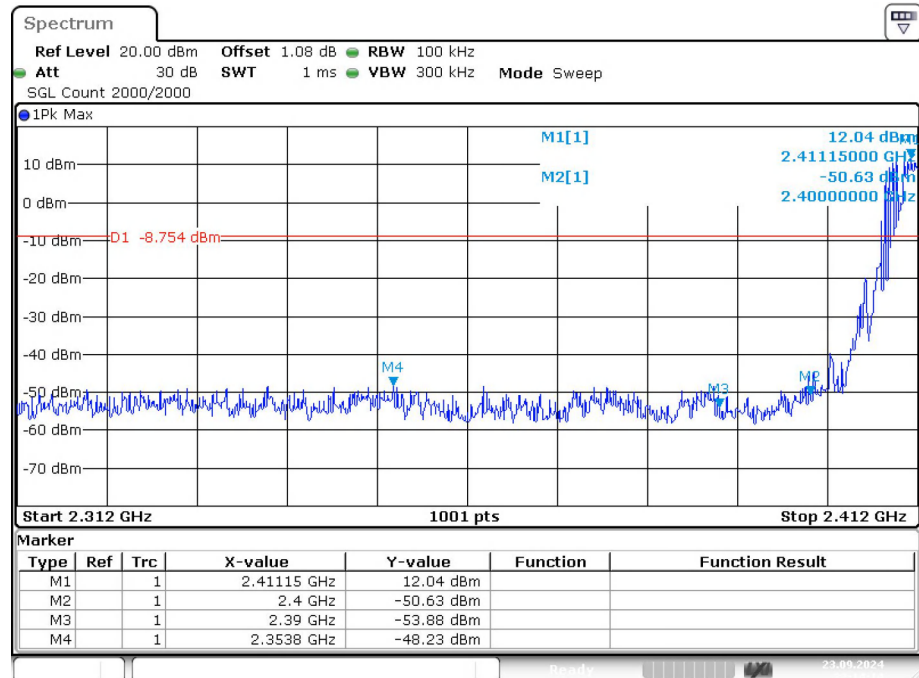


Date: 23.SEP.2024 22:14:14

Highest Channel

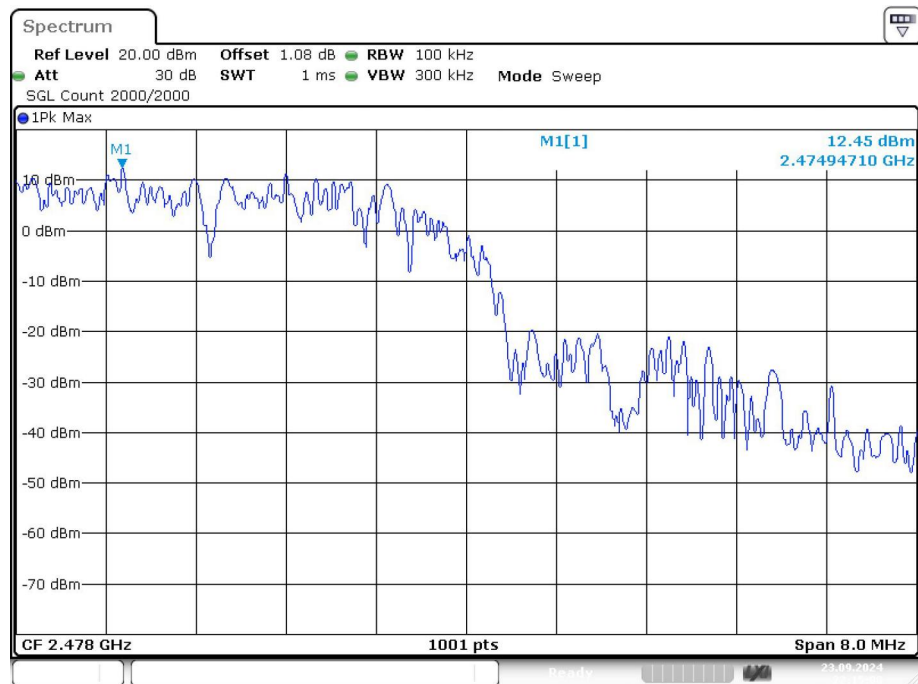

Date: 23.SEP.2024 22:15:00

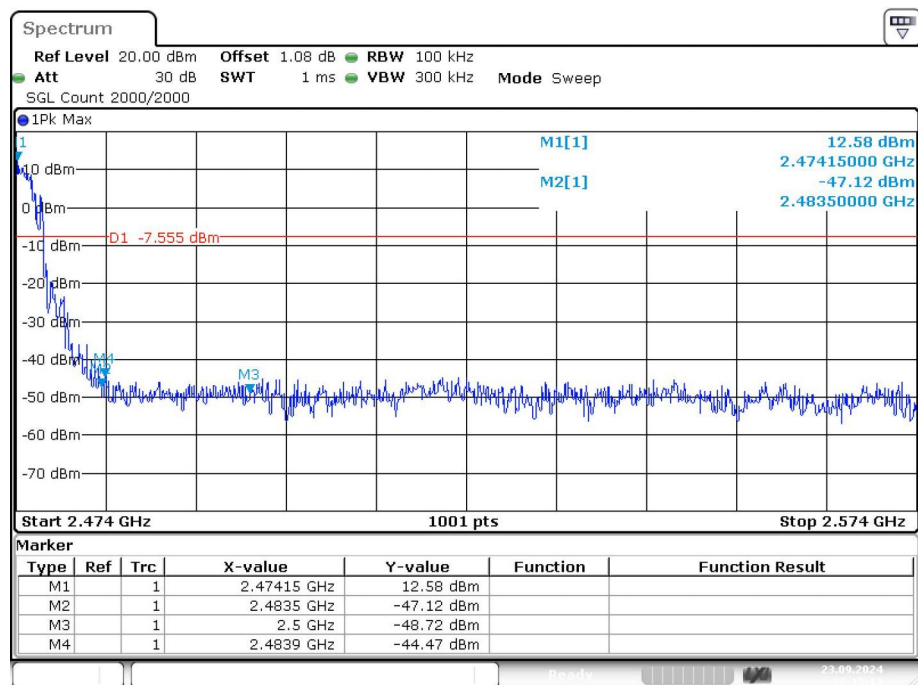

Date: 23.SEP.2024 22:15:13

Test result: The unit does meet the FCC requirements.

5.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207

Test Method: ANSI C63.10:2013 Clause 6.2

Test Voltage: 120V 60Hz

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)


Test Limit**Limits for conducted disturbance at the mains ports of class B**

Frequency Range	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

EUT Operation:

Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

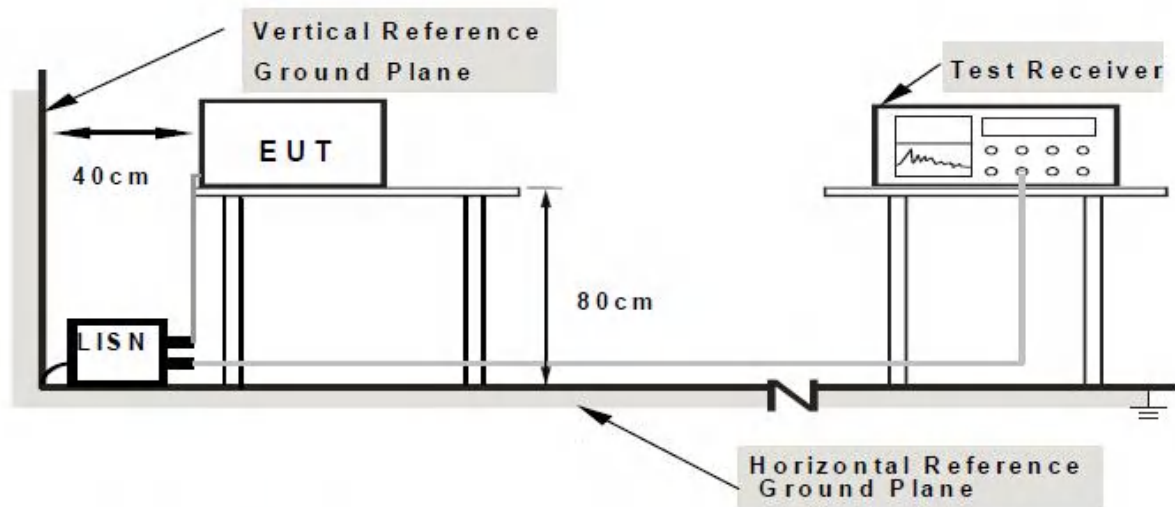Test Configuration:

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

5.12.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.


The following Quasi-Peak and Average measurements were performed on the EUT

HDW737 with IPEX Antenna

Live line

Peak Scan:

Level (dBμV)

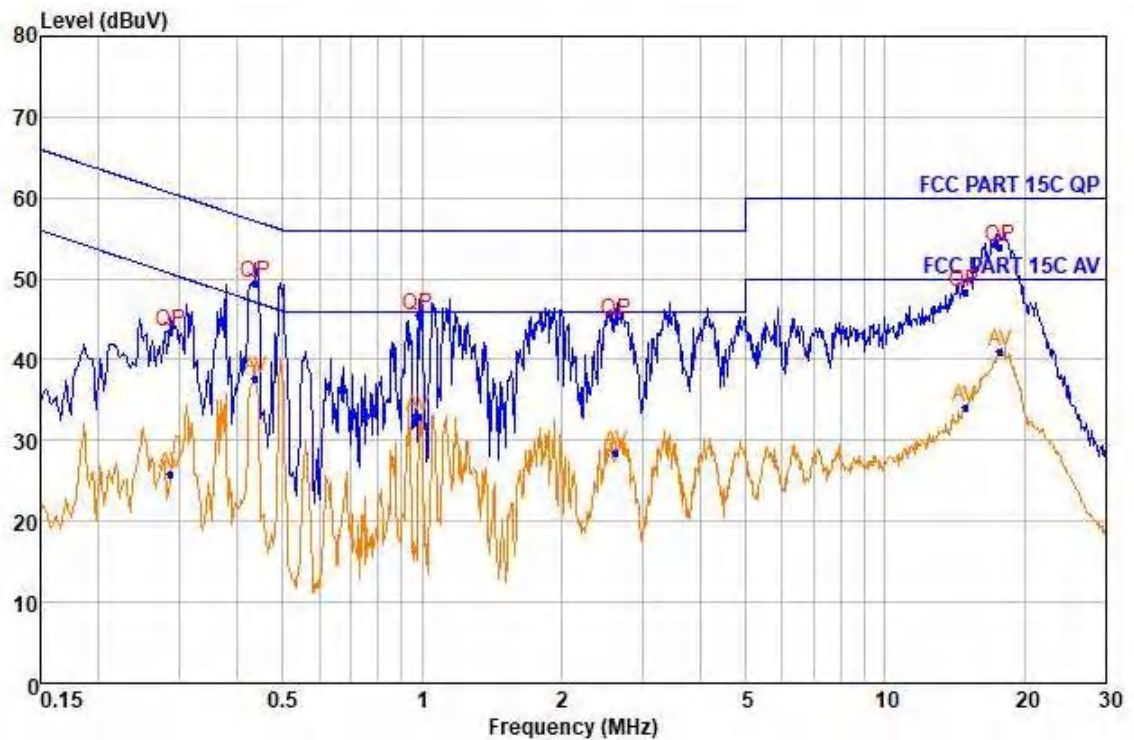

Quasi-peak and Average measurement


NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.286	43.51	QP	9.67	0.24	60.63	-17.12
2	0.286	25.86	Average	9.67	0.24	50.63	-24.77
3	0.436	49.43	QP	9.65	0.26	57.13	-7.70
4	0.436	37.68	Average	9.65	0.26	47.13	-9.45
5	0.981	45.55	QP	9.67	0.31	56.00	-10.45
6	0.981	33.00	Average	9.67	0.31	46.00	-13.00
7	2.630	41.71	QP	9.64	0.36	56.00	-11.29
8	2.630	28.55	Average	9.64	0.36	46.00	-17.45
9	14.869	48.37	QP	9.71	0.46	60.00	-11.63
10	14.869	34.07	Average	9.71	0.46	50.00	-15.93
11	17.715	53.98	QP	9.69	0.47	60.00	-6.02
12	17.715	41.00	Average	9.69	0.47	50.00	-9.00

Level=Read Level + LISN Factor + Cable Loss

Neutral Line

Peak Scan:

Level (dBμV)

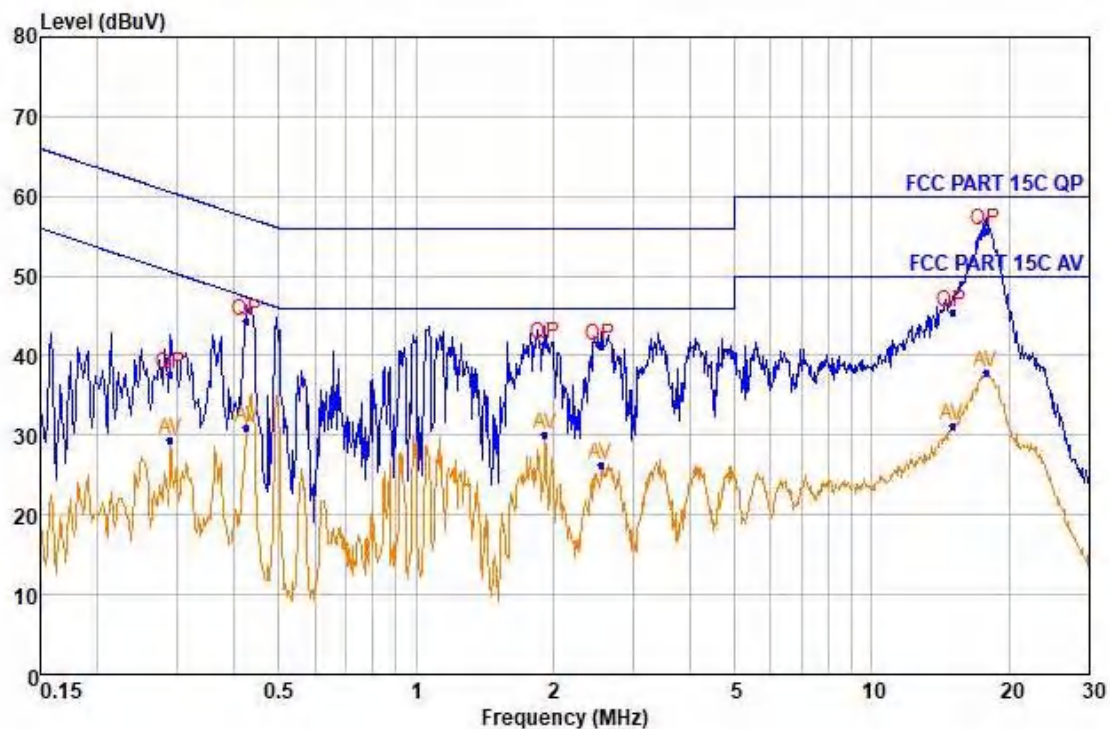

Quasi-peak and Average measurement


NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.289	37.65	QP	9.65	0.24	60.54	-22.89
2	0.289	29.52	Average	9.65	0.24	50.54	-21.02
3	0.425	44.25	QP	9.66	0.26	57.35	-13.10
4	0.425	30.93	Average	9.66	0.26	47.35	-16.42
5	1.914	41.54	QP	9.62	0.34	56.00	-14.46
6	1.914	30.05	Average	9.62	0.34	46.00	-15.95
7	2.547	41.31	QP	9.62	0.36	56.00	-14.69
8	2.547	26.24	Average	9.62	0.36	46.00	-19.76
9	15.000	45.39	QP	9.63	0.46	60.00	-14.61
10	15.000	31.11	Average	9.63	0.46	50.00	-18.89
11	17.813	55.62	QP	9.62	0.47	60.00	-4.38
12	17.813	37.90	Average	9.62	0.47	50.00	-12.10

Level=Read Level + LISN Factor + Cable Loss

HDW737 with RP-SMA Antenna
Live line

Peak Scan:

Level (dBμV)

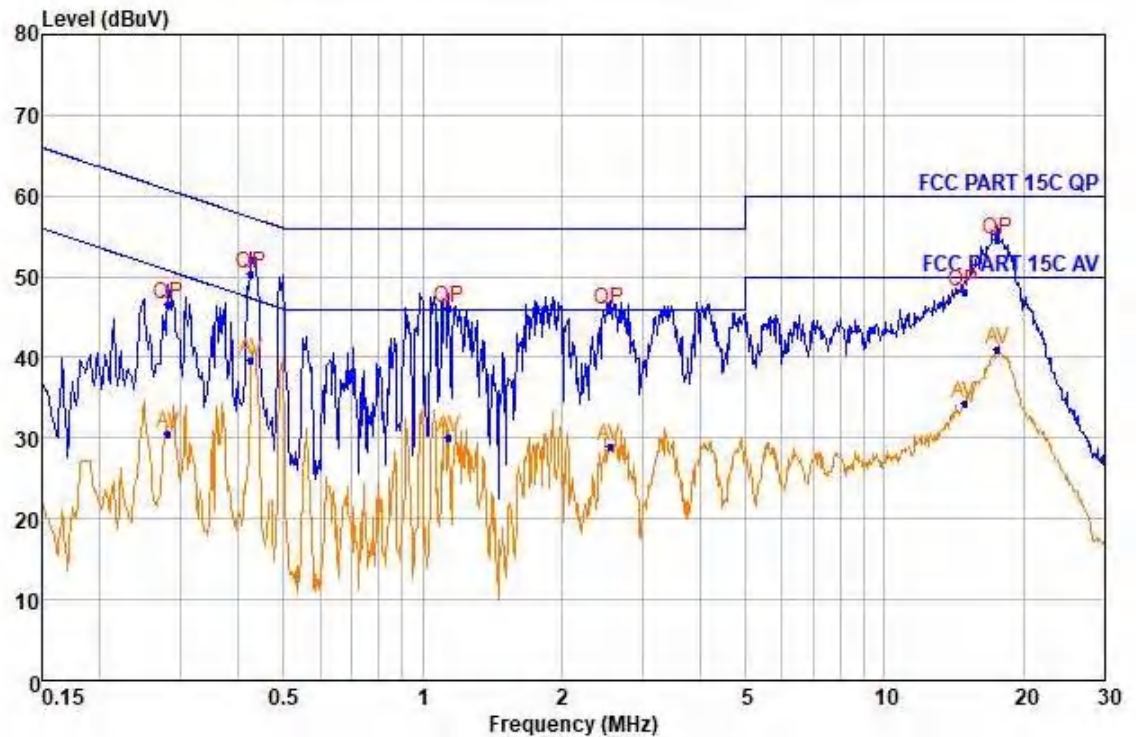

Quasi-peak and Average measurement


NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.282	46.67	QP	9.67	0.24	60.76	-14.09
2	0.282	30.52	Average	9.67	0.24	50.76	-20.24
3	0.425	50.38	QP	9.66	0.26	57.35	-6.97
4	0.425	39.57	Average	9.66	0.26	47.35	-7.78
5	1.138	46.19	QP	9.67	0.31	56.00	-9.81
6	1.138	30.19	Average	9.67	0.31	46.00	-15.81
7	2.547	45.94	QP	9.64	0.36	56.00	-10.06
8	2.547	28.98	Average	9.64	0.36	46.00	-17.02
9	14.869	48.22	QP	9.71	0.46	60.00	-11.78
10	14.869	34.32	Average	9.71	0.46	50.00	-15.68
11	17.532	54.53	QP	9.69	0.47	60.00	-5.47
12	17.532	40.97	Average	9.69	0.47	50.00	-9.03

Level=Read Level + LISN Factor + Cable Loss

Neutral Line

Peak Scan:

Level (dBμV)

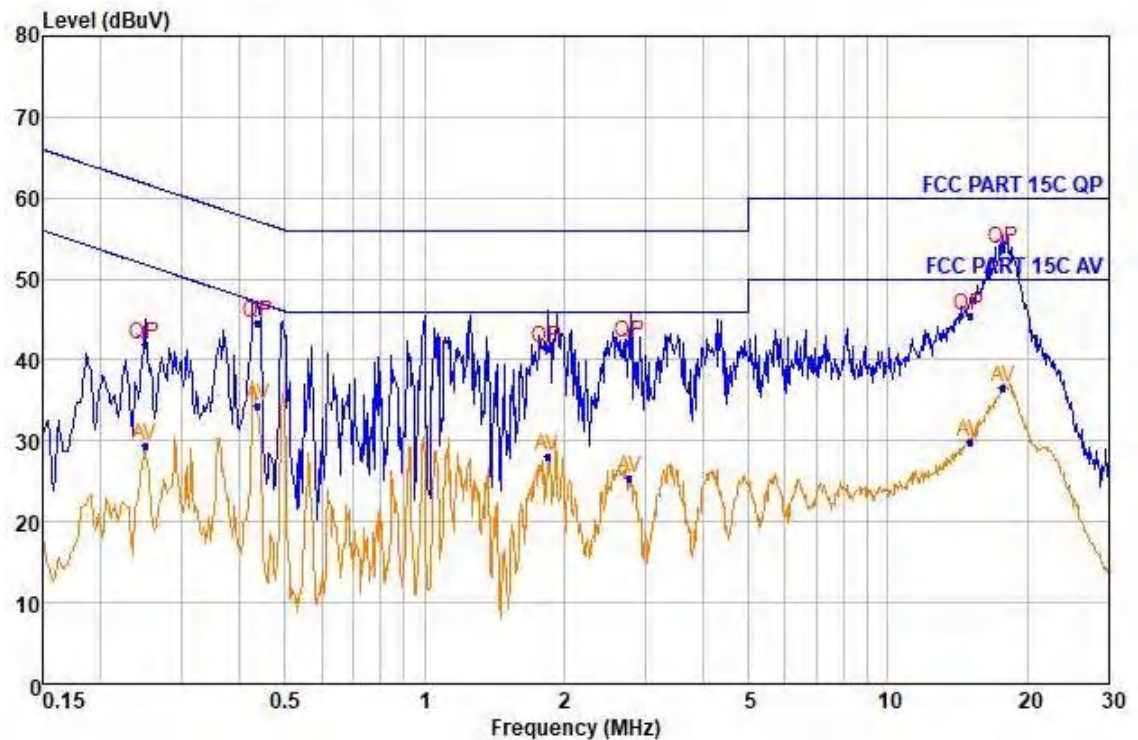

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.249	41.84	QP	9.64	0.23	61.78	-19.94
2	0.249	29.48	Average	9.64	0.23	51.78	-22.30
3	0.436	44.64	QP	9.66	0.26	57.13	-12.49
4	0.436	34.24	Average	9.66	0.26	47.13	-12.89
5	1.845	41.43	QP	9.62	0.34	56.00	-14.57
6	1.845	28.19	Average	9.62	0.34	46.00	-17.81
7	2.774	42.13	QP	9.62	0.37	56.00	-13.87
8	2.774	25.39	Average	9.62	0.37	46.00	-20.61
9	15.000	45.47	QP	9.63	0.46	60.00	-14.53
10	15.000	29.97	Average	9.63	0.46	50.00	-20.03
11	17.715	53.73	QP	9.62	0.47	60.00	-6.27
12	17.715	36.50	Average	9.62	0.47	50.00	-13.50

Level=Read Level + LISN Factor + Cable Loss

5.13 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement: 47 CFR Part 15C Section 15.247 (a) (1), (h) requirement

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted.

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1)


The pseudorandom sequence may be generated in a nine stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONE s; i.e. the shift register is initialized with nine ones.

- Number of shift registers stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

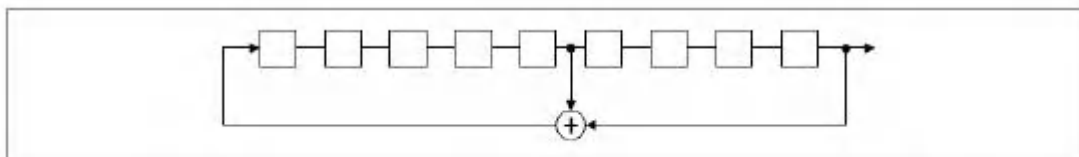

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

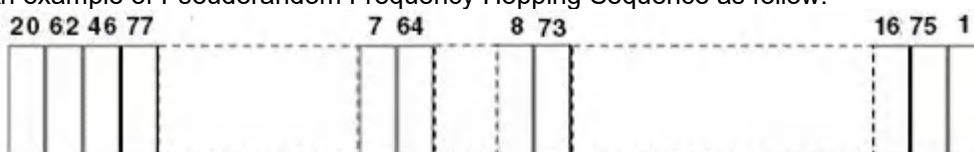

Each frequency used equally on the average by each transmitter.

The receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

The system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

The system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

--End of Report--