



FCC Test Report

Report No: FCS202407100W01

Issued for

Applicant:	AUDSTER INC.
Address:	55 CONCORD ST NEWARK NJ07114
Product Name:	speaker
Brand Name:	AUDSTER
Model Name:	AUD-X770
Series Model:	AUD-X755,AUD-X760,AUD-X765,AUD-X780, AUD-X785,AUD-X800,AUD-X805,AUD-X810, AUD-X815,AUD-X820,AUD-X825,AUD-X890, AUD-X895,AUD-X900,AUD-X905,AUD-X910, AUD-X915,AUD-X920,AUD-X925,AUD-X930, AUD-X935,AUD-X940,AUD-X945
FCC ID:	2ATWN-AUDX770
<p>Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com</p>	



TEST RESULT CERTIFICATION

Applicant's Name.....: AUDSTER INC.
 Address.....: 55 CONCORD ST NEWARK NJ07114
 Manufacture's Name.....: GUANGZHOU HANSUO INTELLIGENT TECHNOLOGY CO.,LTD
 Address.....: NO.200-7, PINGLONG ROAD, HUASHAN TOWN,HUADU DISTRICT, GUANGZHOU

Product Description

Product Name.....: speaker
 Brand Name.....: AUDSTER
 Model Name.....: AUD-X770
 Series Model.....: AUD-X755,AUD-X760,AUD-X765,AUD-X780,AUD-X785, AUD-X800,AUD-X805,AUD-X810,AUD-X815,AUD-X820, AUD-X825,AUD-X890,AUD-X895,AUD-X900,AUD-X905, AUD-X910,AUD-X915,AUD-X920,AUD-X925,AUD-X930, AUD-X935,AUD-X940,AUD-X945
 Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 247
 Test Procedure.....: ANSI C63.10:2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date (s) of performance of tests.: Jul 15, 2024 ~ Jul 25, 2024

Date of Issue.....: Jul 25, 2024

Test Result.....: Pass

Tested by : Scott Shen
 (Scott Shen)

Reviewed by : Duke Qian
 (Duke Qian)

Approved by : Jack Wang
 (Jack Wang)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST	12
3. 20 DB BANDWIDTH	13
3.1 Limit	13
3.2 Test Procedure	13
3.3 Test setup	13
3.4 Test results	14
3.5 Original Test Data	15
4. CONDUCTED OUTPUT POWER	21
4.1 LIMIT	21
4.2 TEST SETUP	21
4.3 TEST RESULTS	21
5 NUMBER OF HOPPING CHANNEL	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 TEST SETUP	25
5.4 EUT OPERATION CONDITIONS	25
5.5 TEST RESULTS	26
6. BAND EDGE AND SPURIOUS(CONDUCTED)	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27
6.3 TEST SETUP	27
6.4 TEST RESULTS	28
6.5 Original test data	28
6.6 For Hopping Band edge	35

Table of Contents	Page
7. RADIATED EMISSION MEASUREMENT	36
7.1 RADIATED EMISSION LIMITS	36
7.2 TEST PROCEDURE	37
7.3 TESTSETUP	38
7.4. TEST RESULTS	39
7.5 (30MHZ-1000MHZ)	40
7.6 ABOVE 1GHZ	44
7.6 RADIATED BAND EDGE DATA	50
8. AVERAGE TIME OF OCCUPANCY	54
8.1 LIMIT	54
8.2 TEST PROCEDURE	54
8.3 TEST SETUP	54
8.4 TEST RESULTS	55
8.5 ORIGINAL TEST DATA	56
9. HOPPING CHANNEL SEPARATION MEASUREMEN	58
9.1 LIMIT	58
9.2 TEST PROCEDURE	58
9.3 TEST SETUP	58
9.4 EUT OPERATION CONDITIONS	58
9.5 TEST RESULTS	59
10 CONDUCTED EMISSION MEASUREMENT	62
10.1 LIMIT	62
10.2 TEST PROCEDURE	62
10.3 TEST SETUP	63
10.4 TEST RESULTS	64
11. ANTENNA REQUIREMENT	68
11.1 STANDARD REQUIREMENT	68
11.2 RESULT	68



Revision History

Rev.	Issue Date	Effect Page	Contents
00	Jul 25, 2024	N/A	N/A

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(a)(1)	Hopping Channel Separation	PASS	--
15.247 (b)(1)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(1)(i)	Number of Hopping Frequency	PASS	--
15.247(a)(1)(i)	Dwell Time	PASS	--
15.247(a)(1)	20dB Bandwidth 99% Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
Laboray Accreditations	
FCC Test Firm Registration Number: 514908 CNAS Number: L15566 Designation number: CN0127 A2LA accreditation number: 5545.01 ISED Number: 25801	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	All emissions radiated (9KHz -30MHz)	± 3.1 dB
5	Conducted Emission (150KHz-30MHz)	± 4.74 dB
6	All emissions, radiated (<1G) 30MHz-1000MHz	± 5.2 dB
7	All emissions, radiated 1GHz -18GHz	± 4.66 dB
8	All emissions, radiated 18GHz -40GHz	± 4.31 dB
9	Occupied bandwidth and PSD	± 0.3 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	speaker
Trade Name	AUDSTER
Model Name	AUD-X770
Series Model	AUD-X755,AUD-X760,AUD-X765,AUD-X780,AUD-X785,AUD-X800,AUD-X805,AUD-X810,AUD-X815,AUD-X820,AUD-X825,AUD-X890,AUD-X895,AUD-X900,AUD-X905,AUD-X910,AUD-X915,AUD-X920,AUD-X925,AUD-X930,AUD-X935,AUD-X940,AUD-X945
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, the only difference is the model name and colour.
Channel List	Please refer to the Note 2.
Operation frequency	2402MHz-2480MHz
Modulation:	GFSK
Channel number	79 CH
Transmitter rate:	1MHz
Power Supply	DC 5V
Battery	DC 3.7V*2
Report number	FCS202407100W01
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	PCB antenna	N/A	-0.58	Antenna 1
2	N/A	N/A	PCB antenna	N/A	-0.58	Antenna 2

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software:

 FCC Assist 1.0.4

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model description
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Hopping GFSK

Note:

1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. During the test, The test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data.
4. The chip only supports the BR function, and the EDR function has been blocked through software.

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	adapter	XIAOMI	AD652G	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2023.08.29	2024.08.28
Signal Analyzer	R&S	FSV40-N	FCS-E012	2023.08.29	2024.08.28
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2023.08.29	2024.08.28
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2023.08.29	2024.08.28
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2023.08.29	2024.08.28
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2023.08.29	2024.08.28
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2023.08.29	2024.08.28
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2023.08.29	2024.08.28
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E005	2023.08.29	2024.08.28
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2023.08.29	2024.08.28
LISN	R&S	ENV216	FCS-E007	2023.08.29	2024.08.28
LISN	ETS	3810/2NM	FCS-E009	2023.08.29	2024.08.28
Temperature & Humidity	HTC-1	victor	FCS-E008	2023.08.29	2024.08.28
Testing Software	EZ-EMC(Ver.EMC-CON 3A1.1)				

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2023.08.29	2024.08.28
Spectrum Analyzer	Agilent	E4447A	MY50180039	2023.08.29	2024.08.28
Spectrum Analyzer	R&S	FSV-40	101499	2023.08.29	2024.08.28
Power Sensor	Agilent	UX2021XA	FCS-E021	2023.08.29	2024.08.28
Testing Software	EZ-EMC(Ver.STSLAB 03A1 RE)				

3. 20 DB BANDWIDTH

3.1 Limit

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247a(1)	20dB bandwidth	N/A	2400-2483.5

3.2 Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 20 dB Bandwidth :30KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 20dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

3.3 Test setup



3.4 Test results

ANT 1


TestMode	Channel (MHz)	99%OBW(MHz)	20dB Bandwidth (MHz)	Verdict
Lowest	2402MHz	0.887	0.968	Pass
Middle	2441MHz	0.886	0.966	Pass
Highest	2480MHz	0.887	0.964	Pass

ANT 2


TestMode	Channel (MHz)	99%OBW(MHz)	20dB Bandwidth (MHz)	Verdict
Lowest	2402MHz	0.886	0.968	Pass
Middle	2441MHz	0.887	0.966	Pass
Highest	2480MHz	0.887	1.022	Pass

3.5 Original Test Data


ANT1
20BW,1DH1,LOWEST

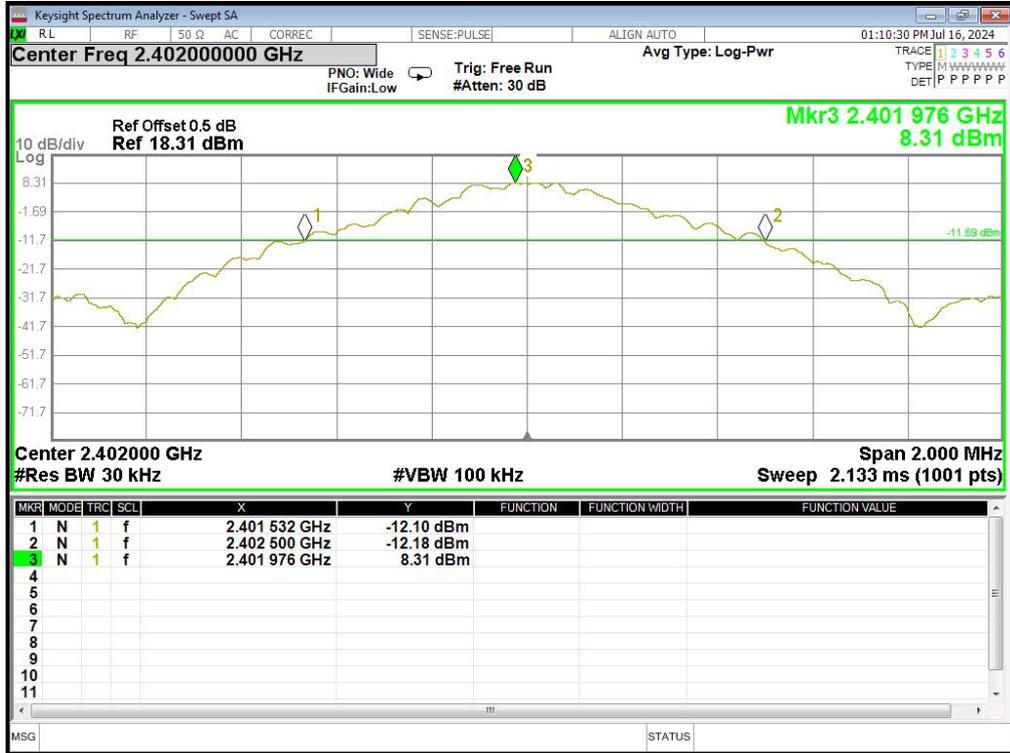


20BW,1DH1,MIDDLE

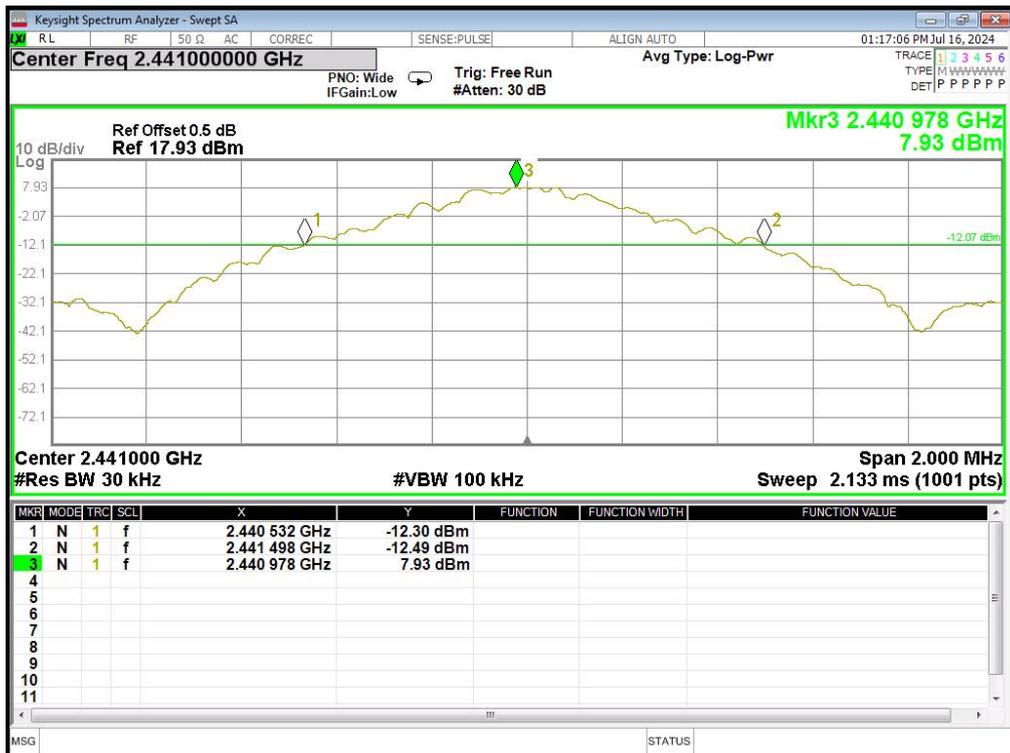


20BW,1DH1,HIGHEST

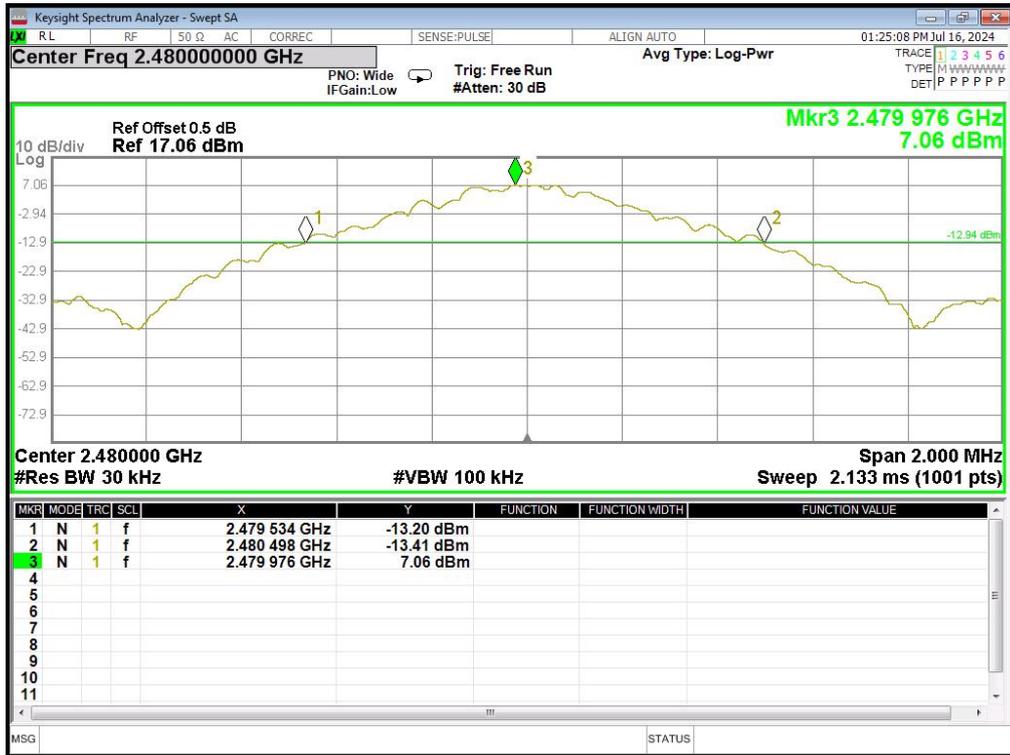


OBW,1DH1,LOWEST

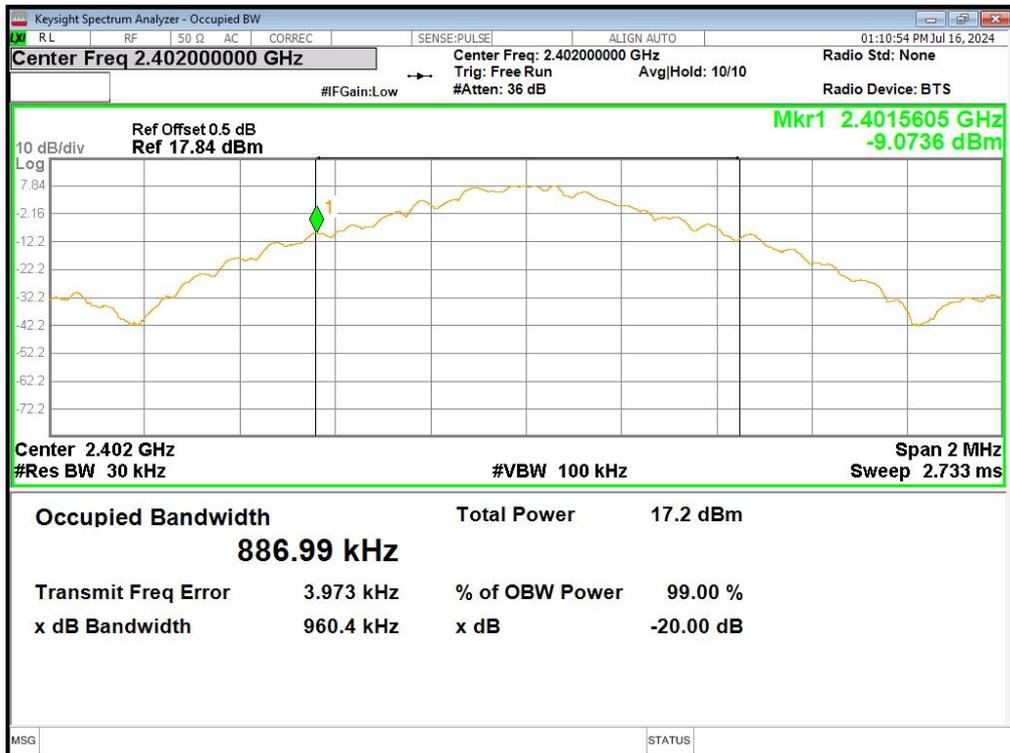

OBW,1DH1,MIDDLE

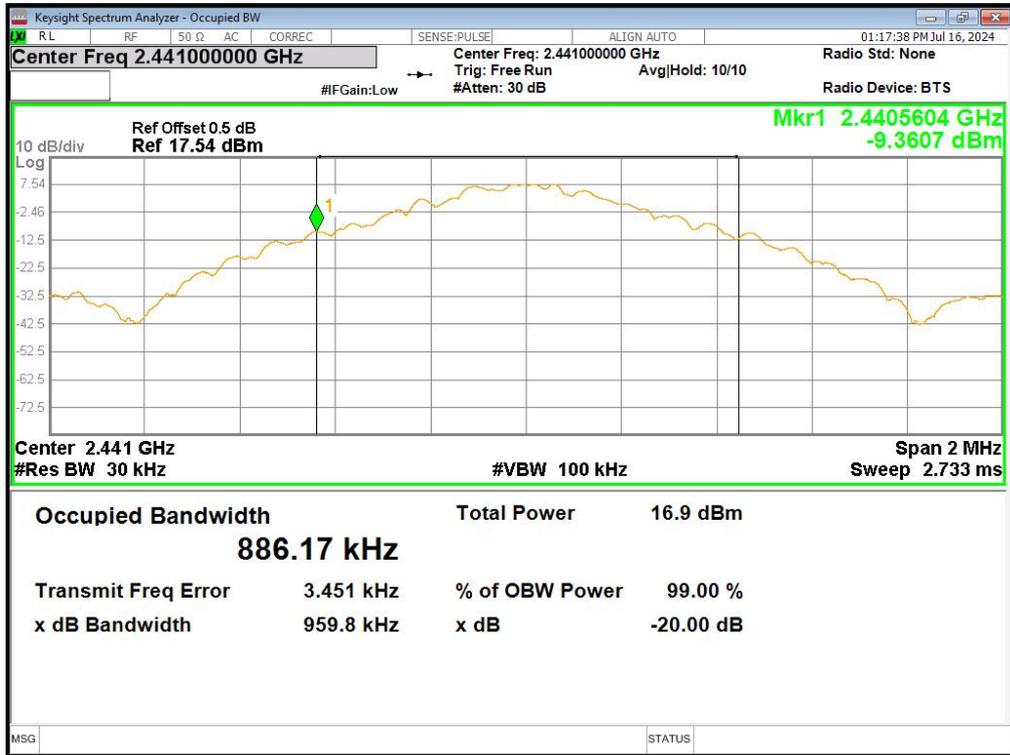


OBW,1DH1,HIGHEST

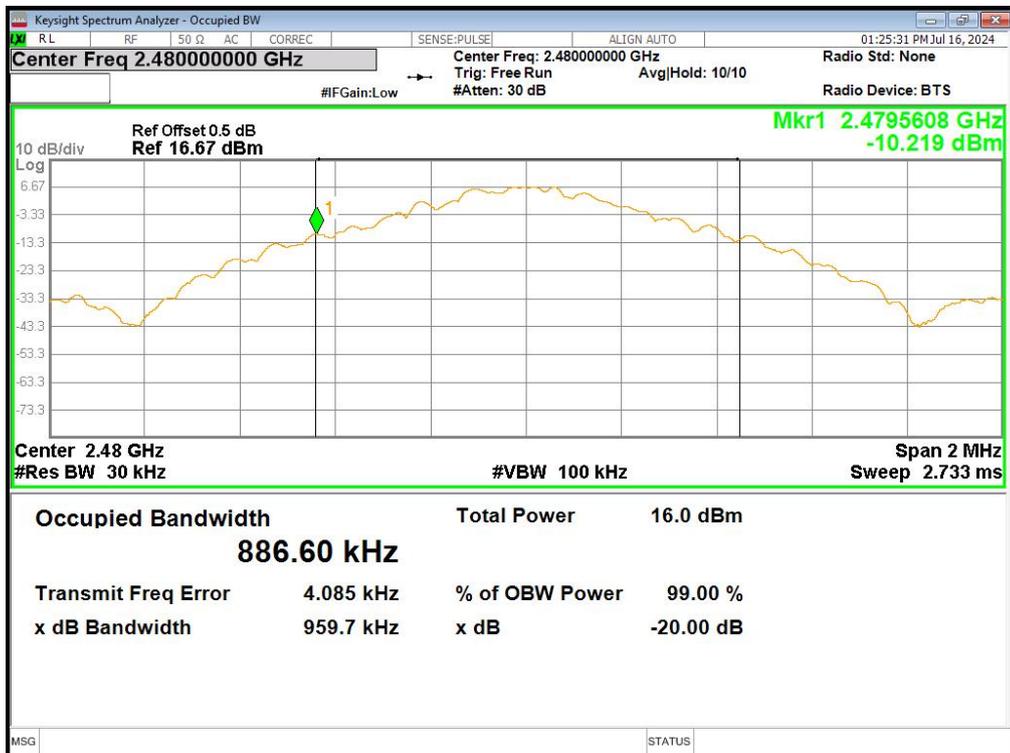


ANT 2


20BW,1DH1,LOWEST

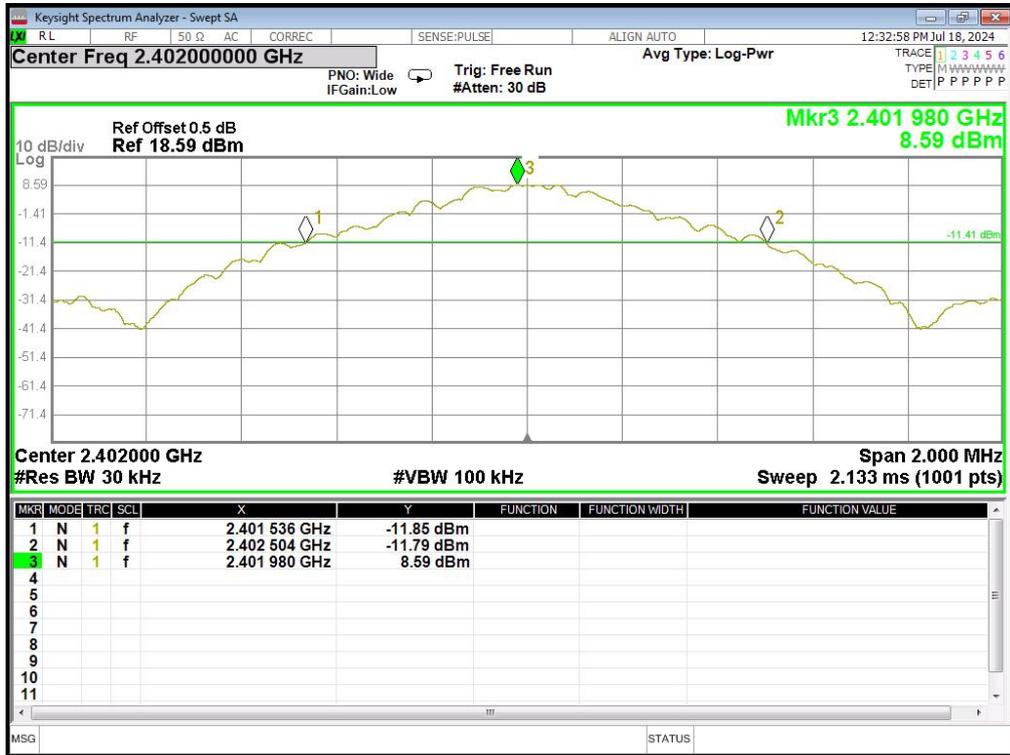


20BW,1DH1,MIDDLE

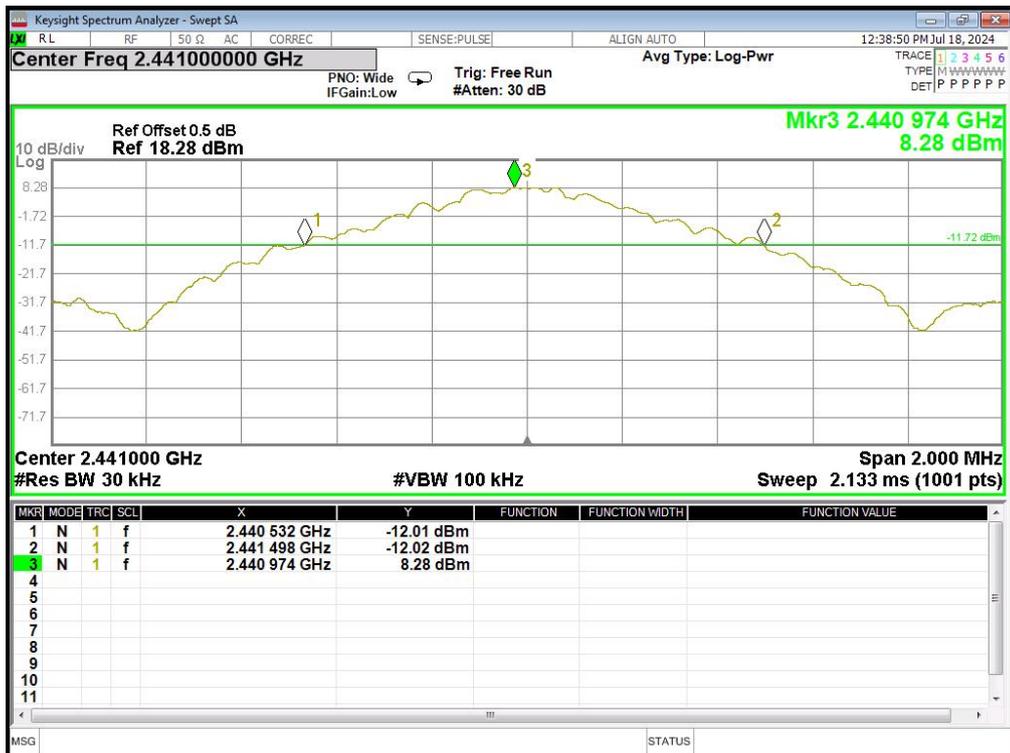


20BW,1DH1,HIGHEST

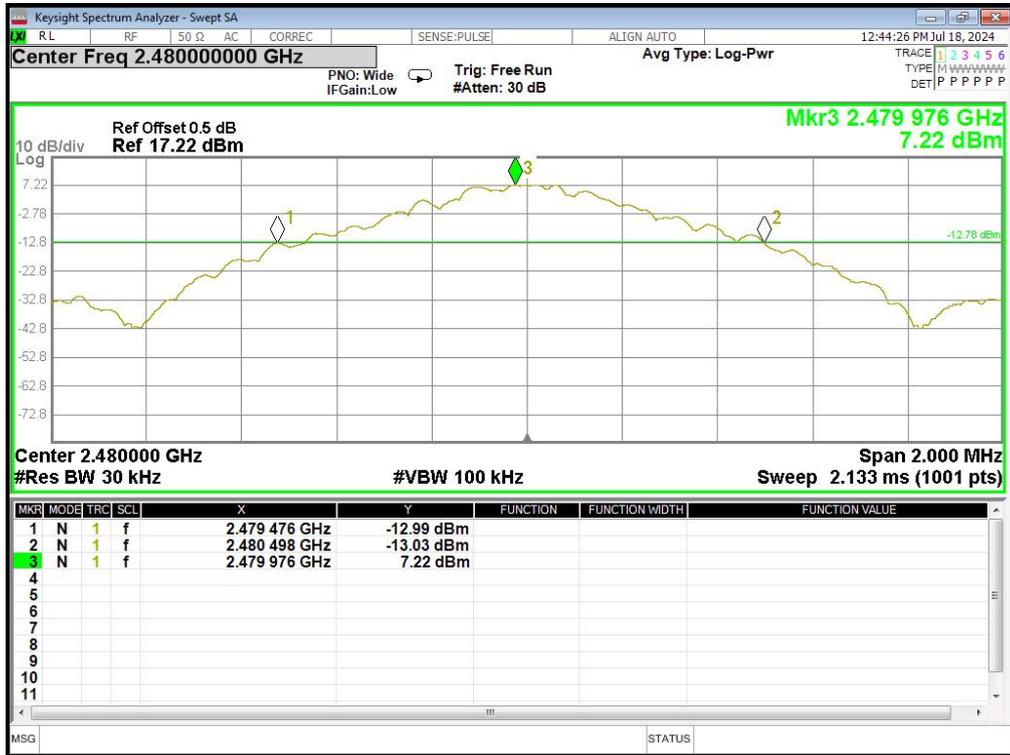


OBW,1DH1,LOWEST

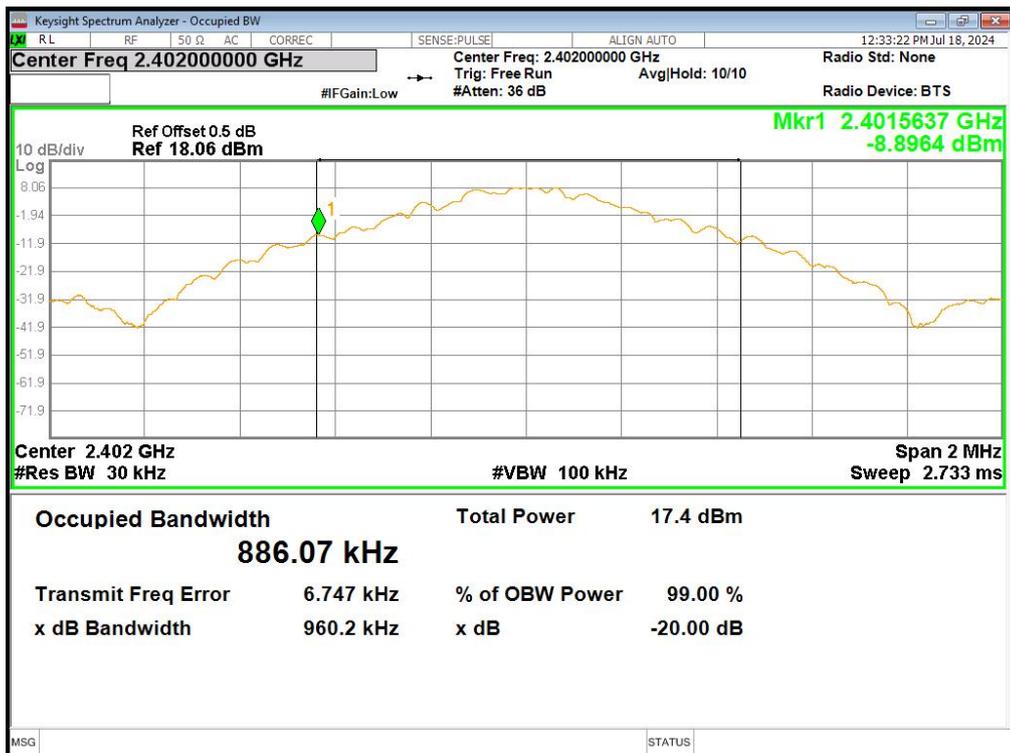

OBW,1DH1,MIDDLE

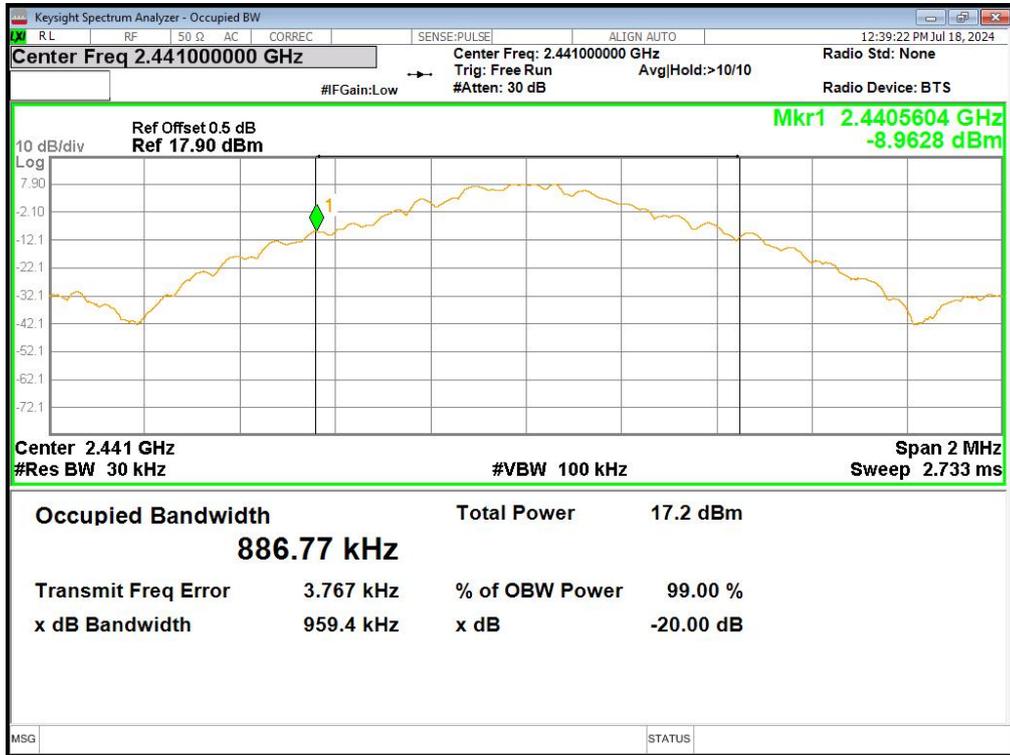

OBW,1DH1,HIGHEST

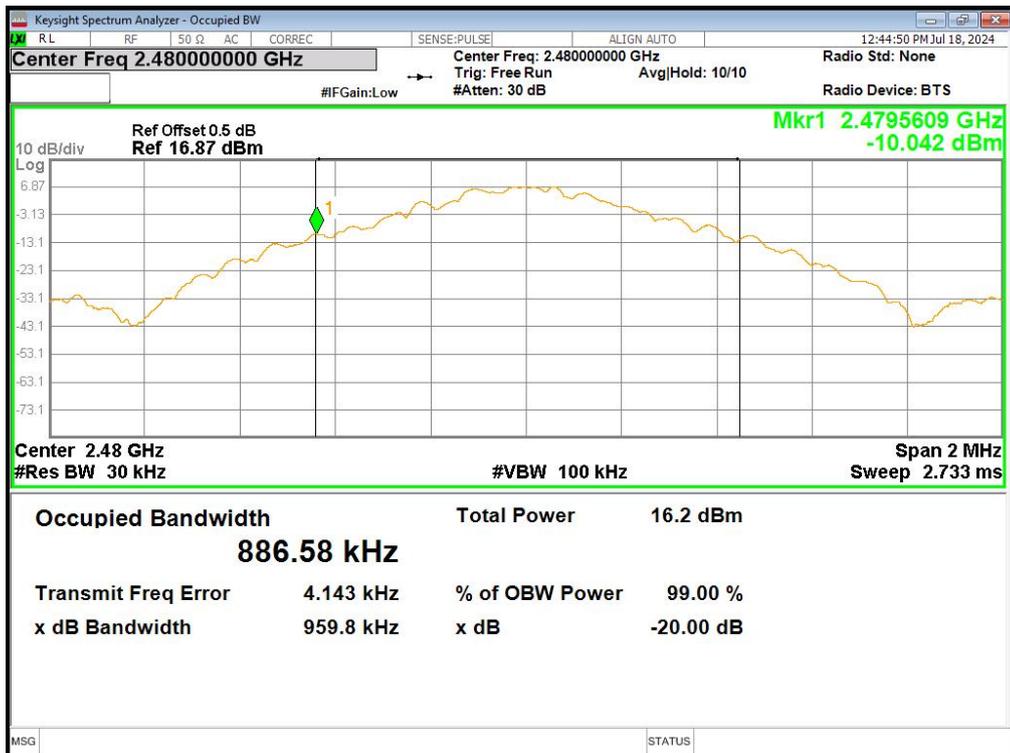

4. CONDUCTED OUTPUT POWER

4.1 LIMIT

FCC Part 15 Subpart C			
Section	Test Item	Limit	Frequency Range
15.247(b)(1)	Peak output power	Power <1W(30dBm)	2400-2483.5

- 1.Connect each EUT’s antenna output to power sensor by RF cable and attenuator
- 2.Measure the PK output power of each antenna port by power sensor.

4.2 TEST SETUP



4.3 TEST RESULTS

ANT 1


TestMode	Channel (MHz)	Result (dBm)	Limit (dBm)	Verdict
Lowest	2402MHz	10.91	30	Pass
Middle	2441MHz	10.55	30	Pass
Highest	2480MHz	9.67	30	Pass

ANT 2


TestMode	Channel (MHz)	Result (dBm)	Limit (dBm)	Verdict
Lowest	2402MHz	11.49	30	Pass
Middle	2441MHz	10.93	30	Pass
Highest	2480MHz	9.82	30	Pass

ANT 1


LOW-2402MHZ

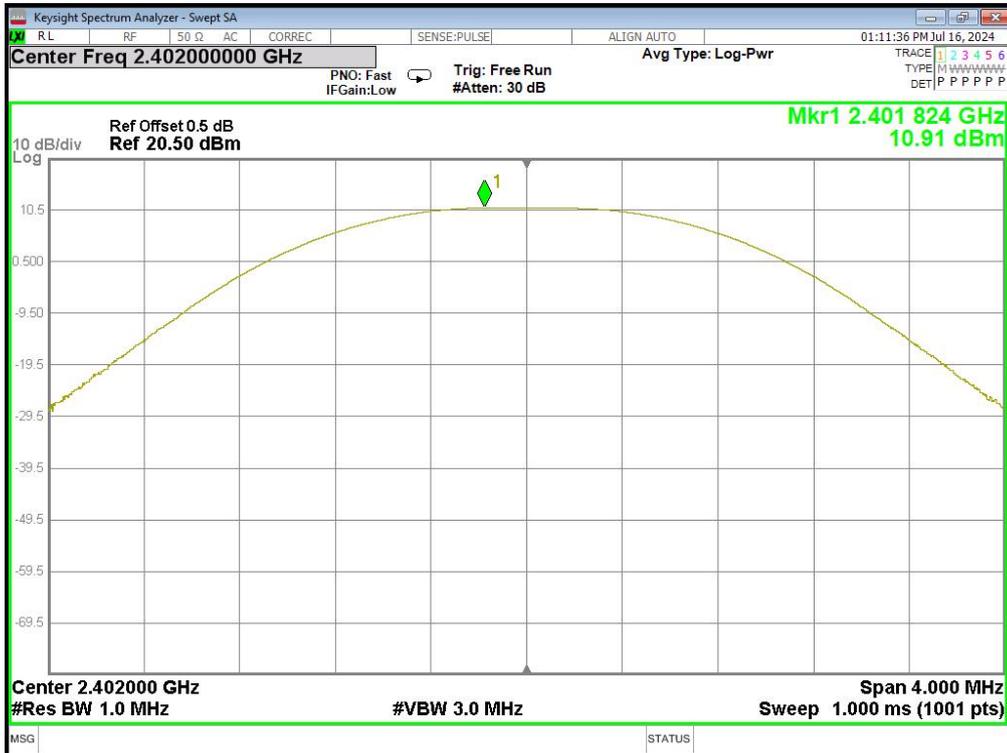

MID-2441MHZ

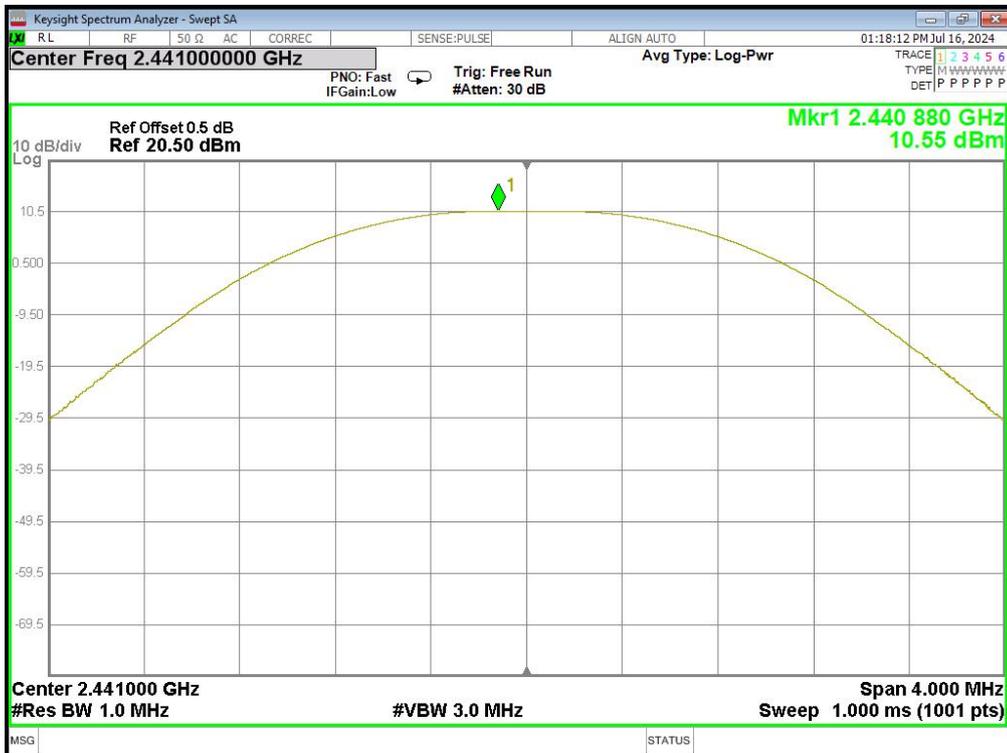


HIG-2480MHz

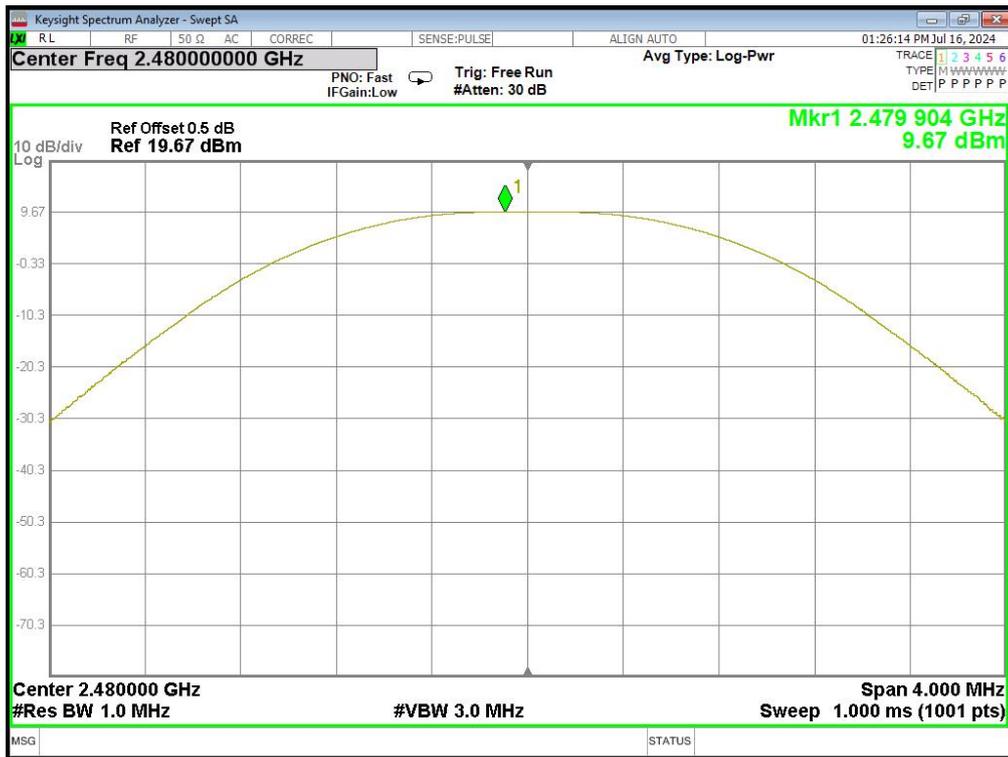


ANT 2


LOW-2402MHz

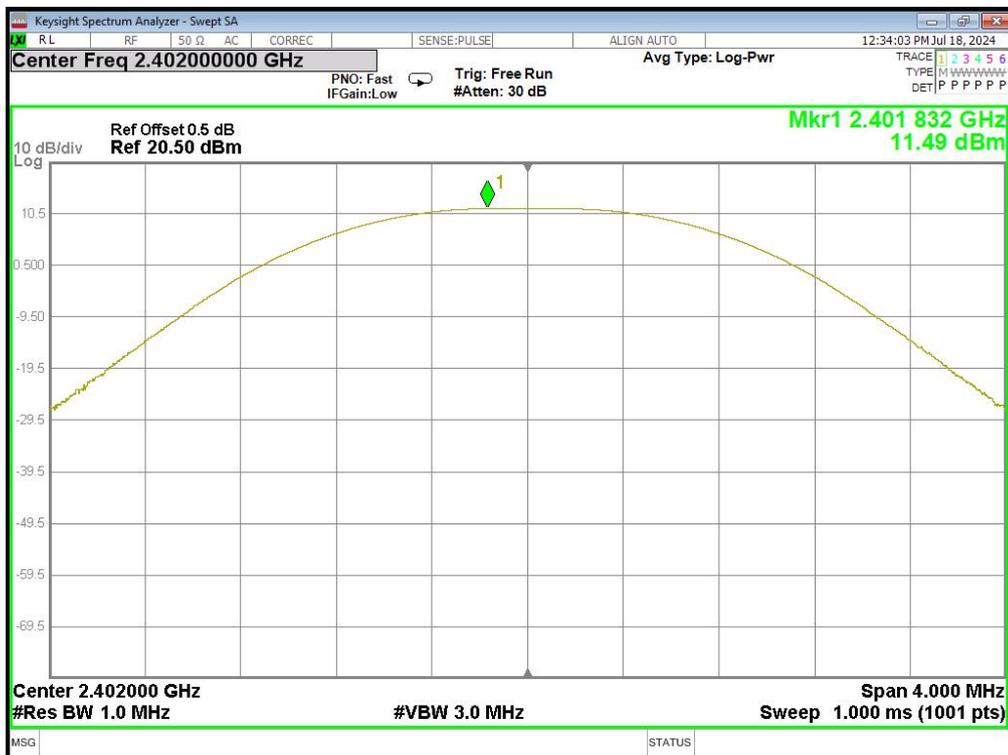

MID-2441MHZ

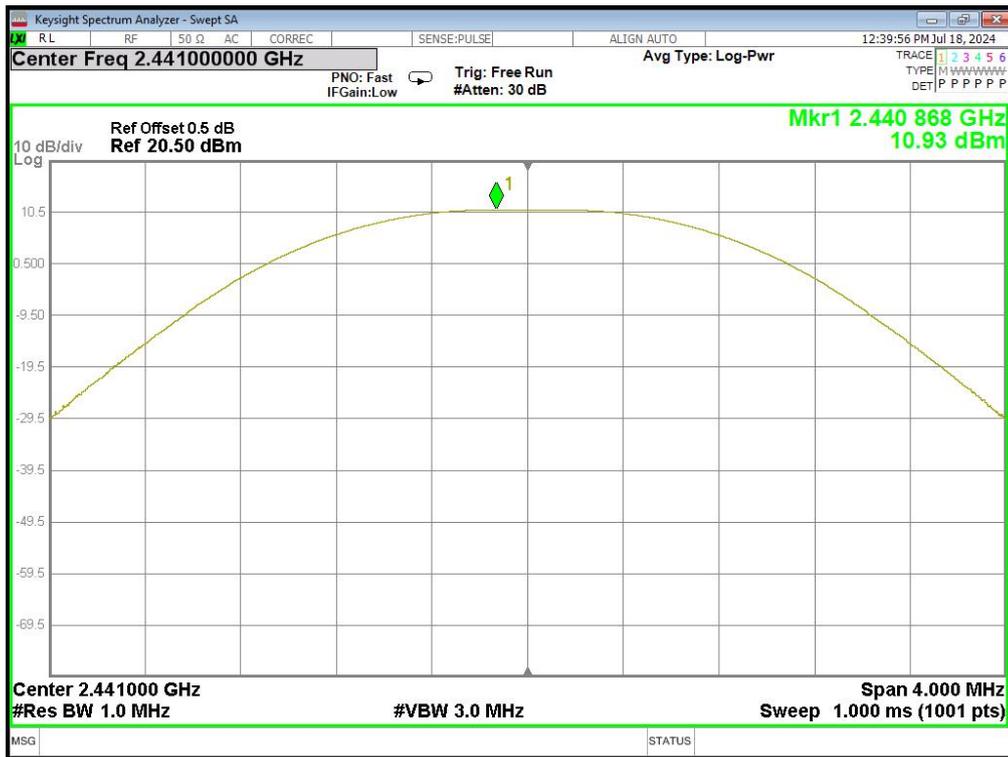

HIG-2480MHZ

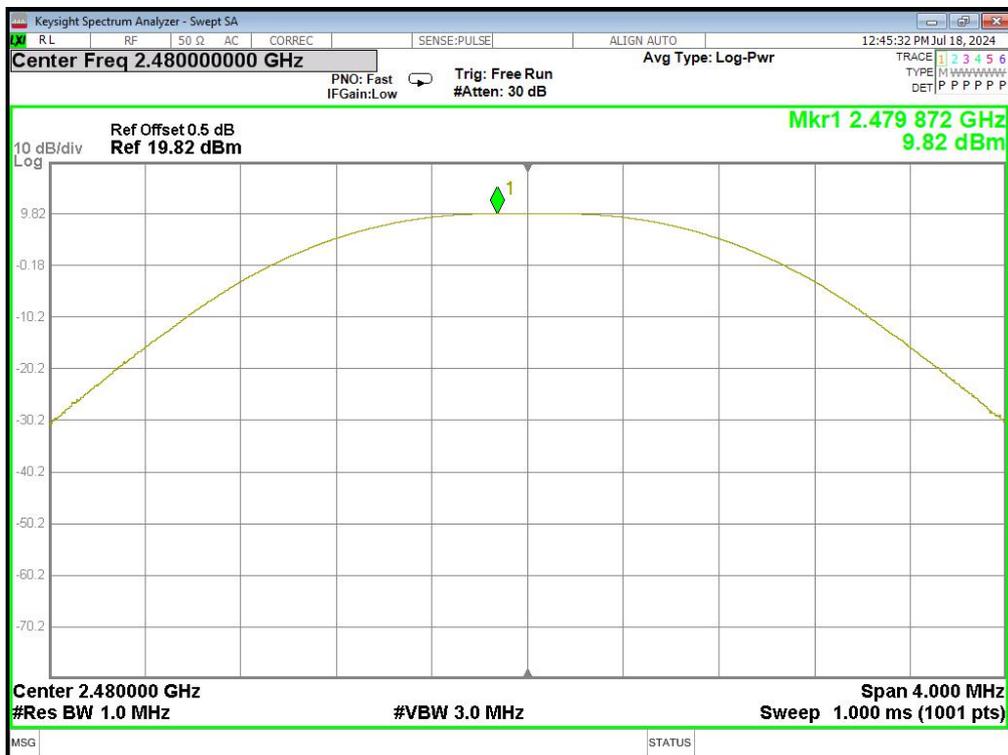

5 NUMBER OF HOPPING CHANNEL

5.1 LIMIT


FCC Part 15.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii) RSS-247	Number of Hopping Channel	>15	2400-2483.5	PASS

5.2 TEST PROCEDURE

a The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto

5.3 TEST SETUP

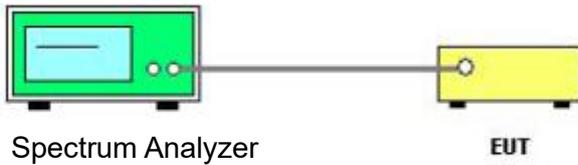

5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Hopping Mode -GFSK Mode	Test Voltage:	DC 5V

ANT 1



ANT 2

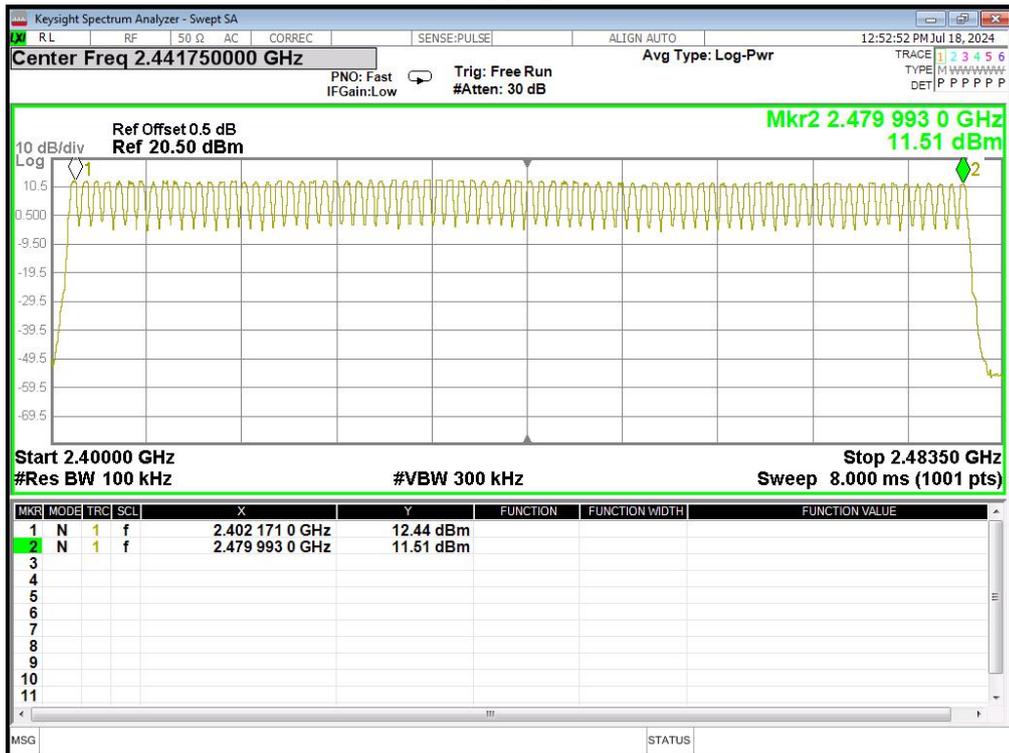

6. BAND EDGE AND SPURIOUS(CONDUCTED)

6.1 LIMIT

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Establish Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

6.3 TEST SETUP

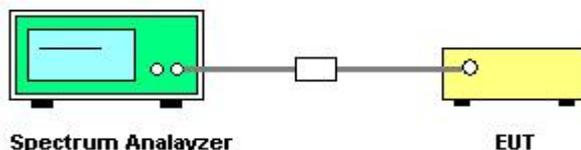

6.4 TEST RESULTS

ANT 1


Eut set mode	CH or Frequency	Result
GFSK	CH1	Pass
	CH79	Pass

ANT 2


Eut set mode	CH or Frequency	Result
GFSK	CH1	Pass
	CH79	Pass

6.5 Original test data


ANT 1 CH1 2402MHZ

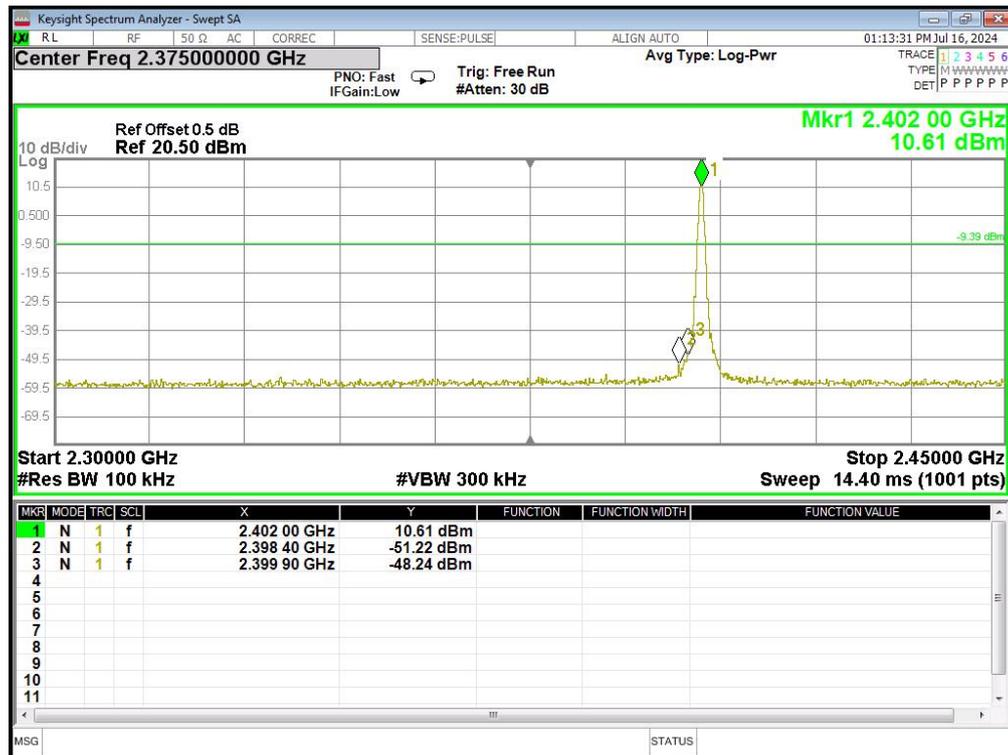


CH79 2480MHZ

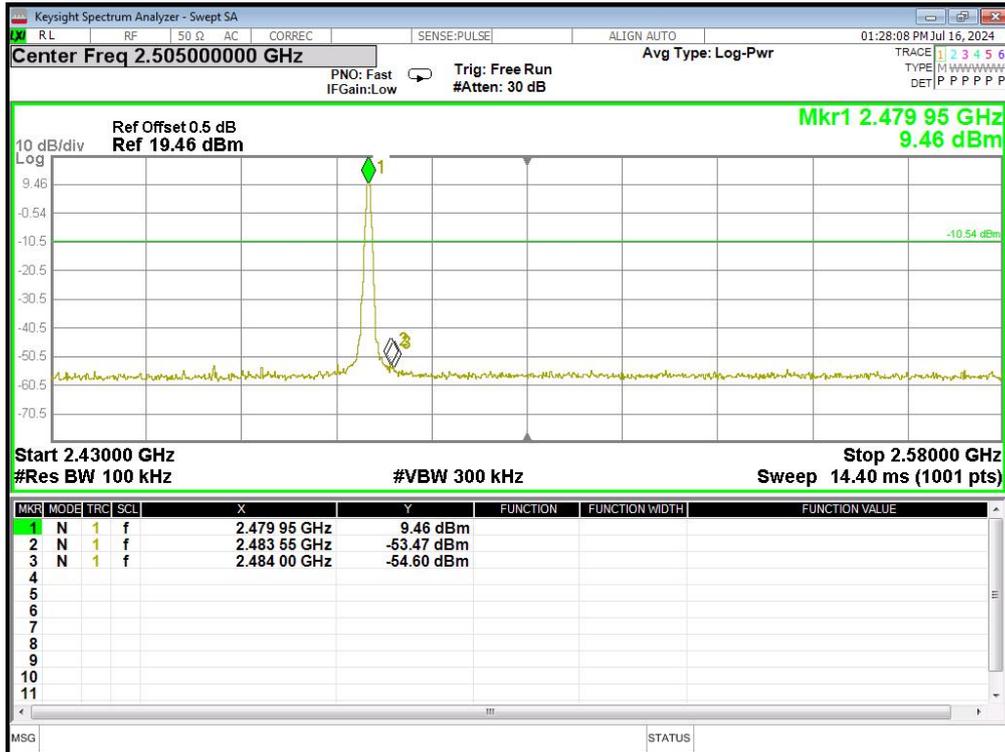

ANT 2 CH1 2402MHZ

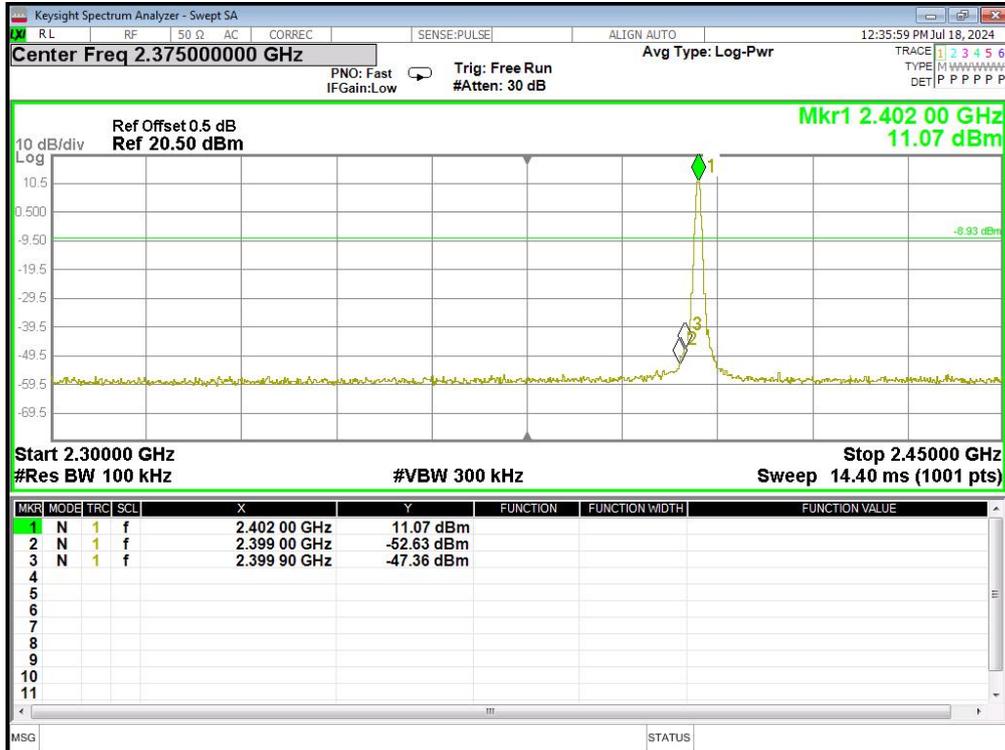


CH79 2480MHZ

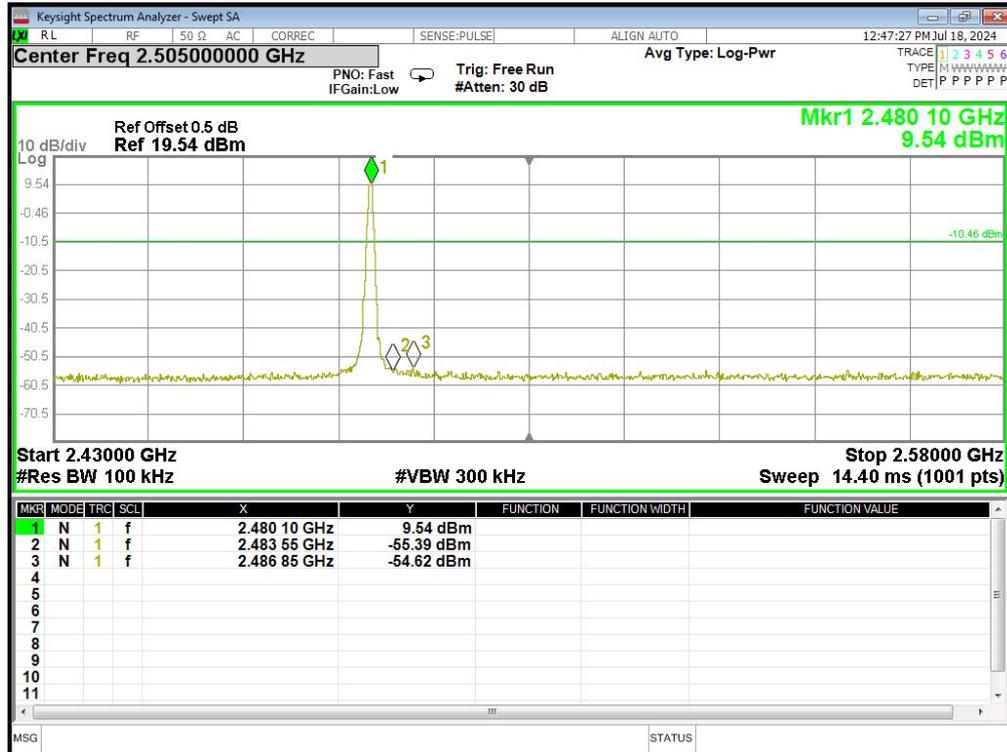


Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 5V

Spurious emissions


ANT 1
Low Channel 30MHz-26.5GHz

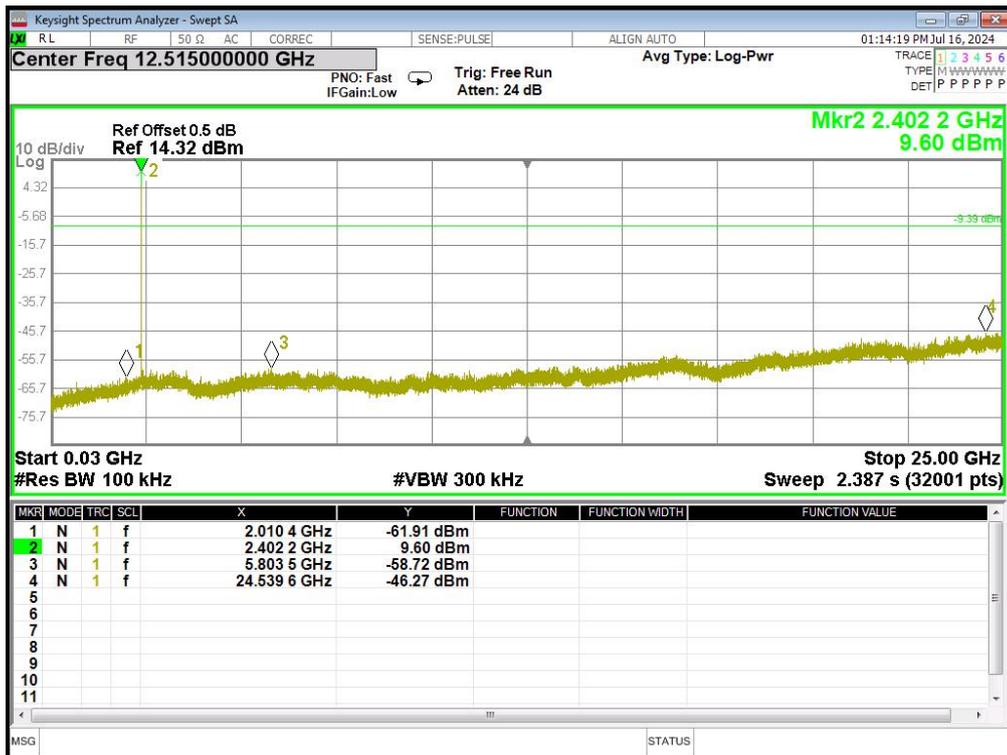


Middle Channel 30MHz-26.5GHz

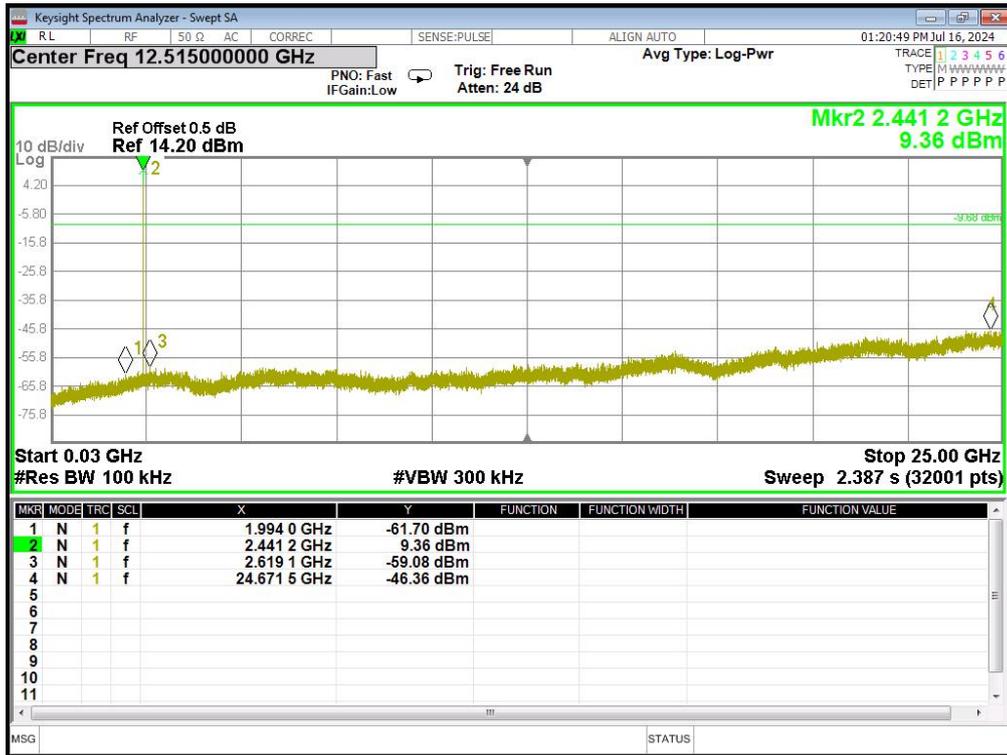


High Channel 30MHz-26.5GHz

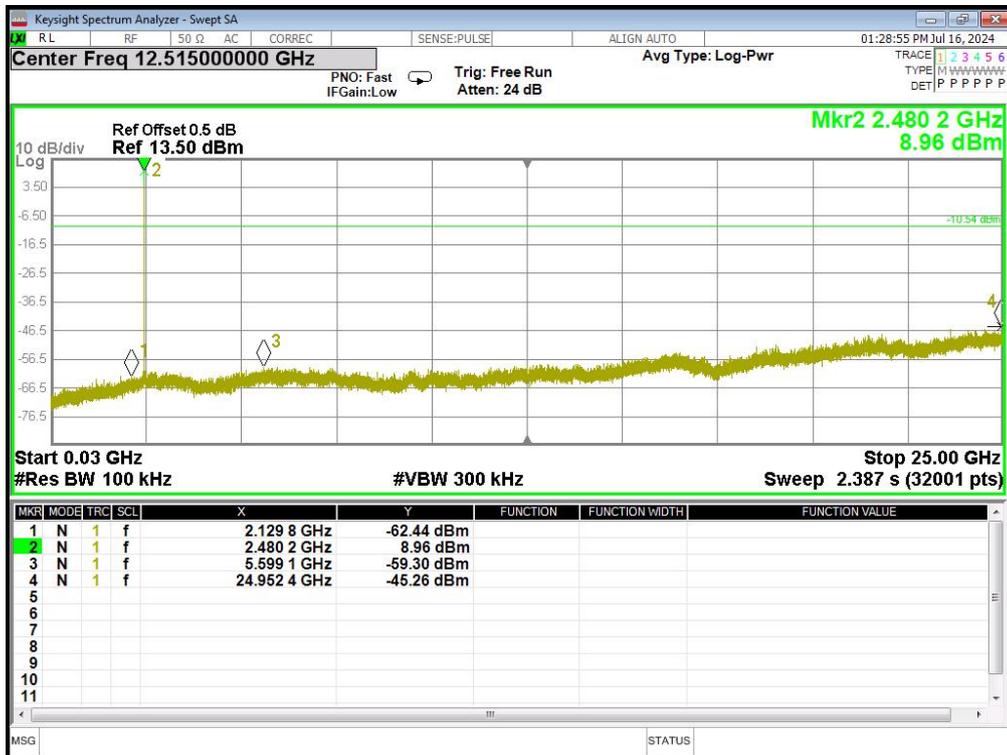


ANT 2 Low Channel 30MHz-26.5GHz

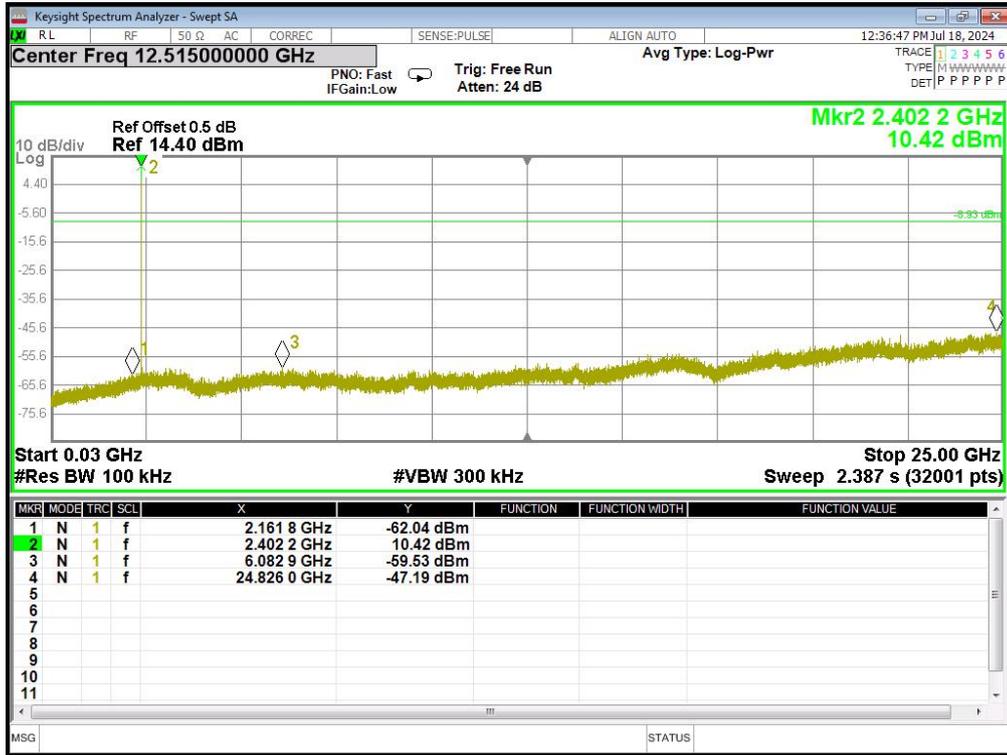

Middle Channel 30MHz-26.5GHz

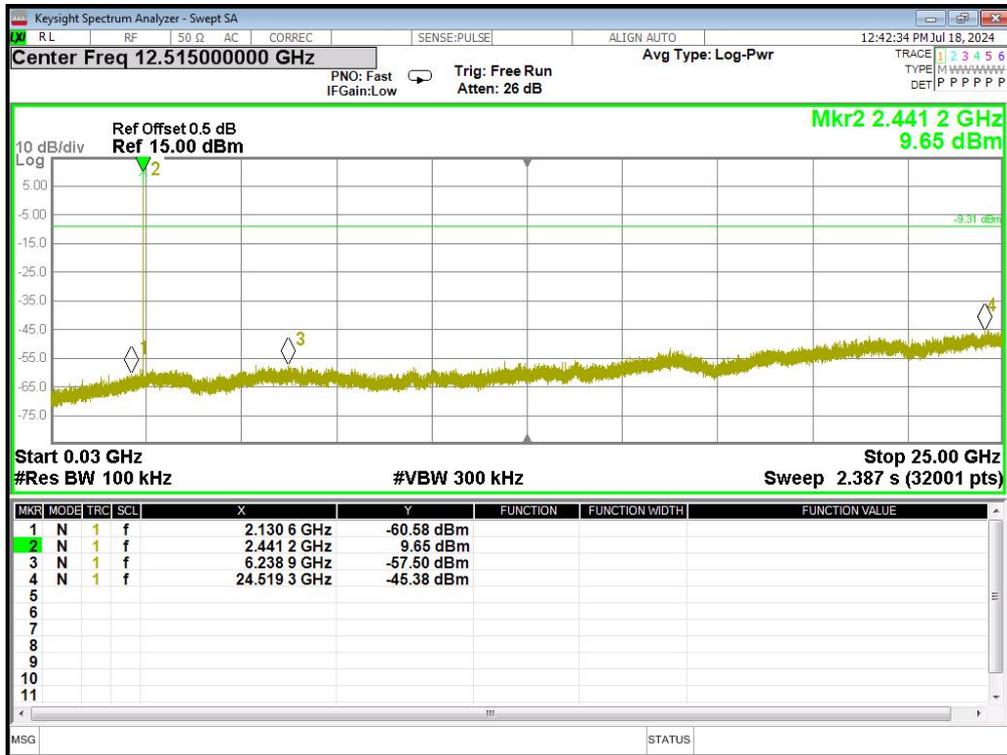


High Channel 30MHz-26.5GHz

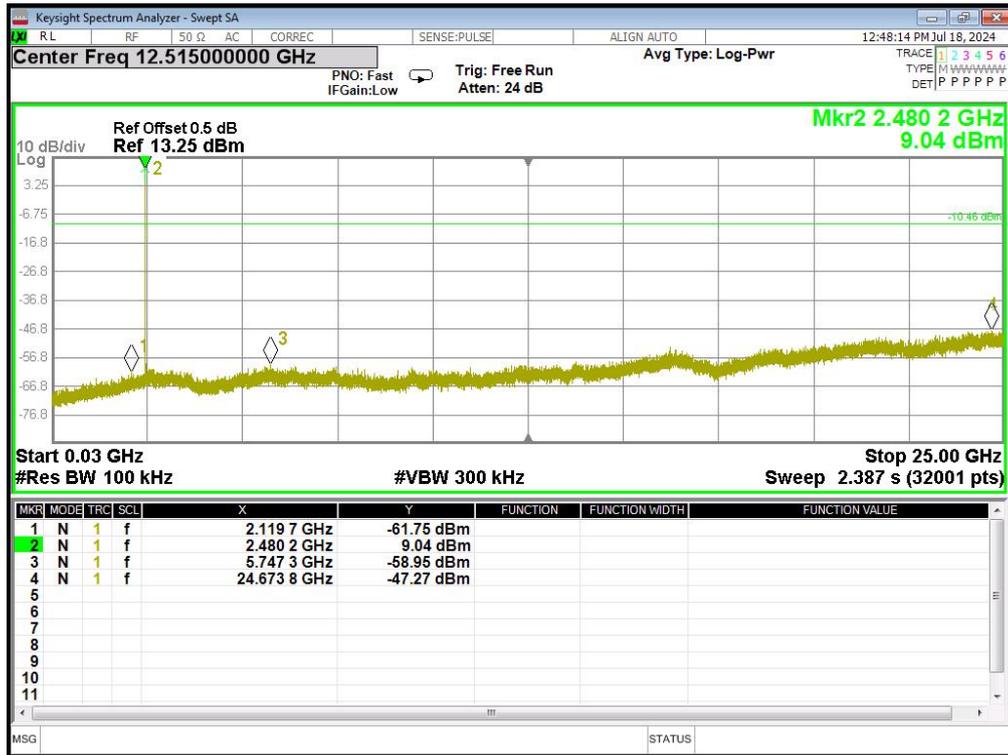


6.6 For Hopping Band edge

ANT 1

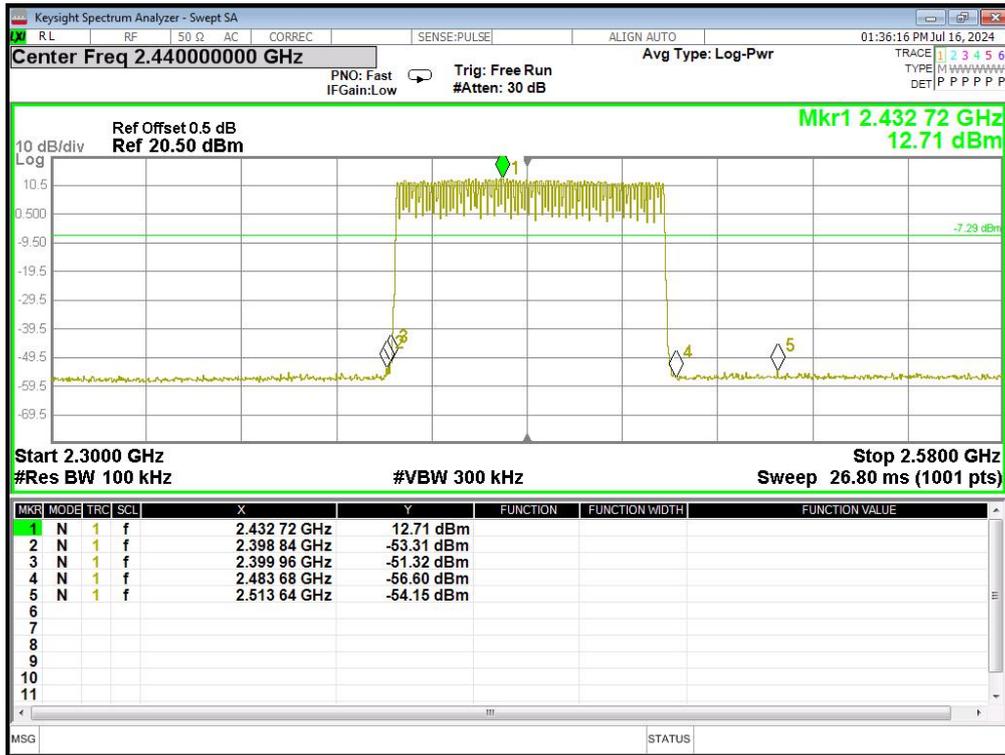

ANT 2

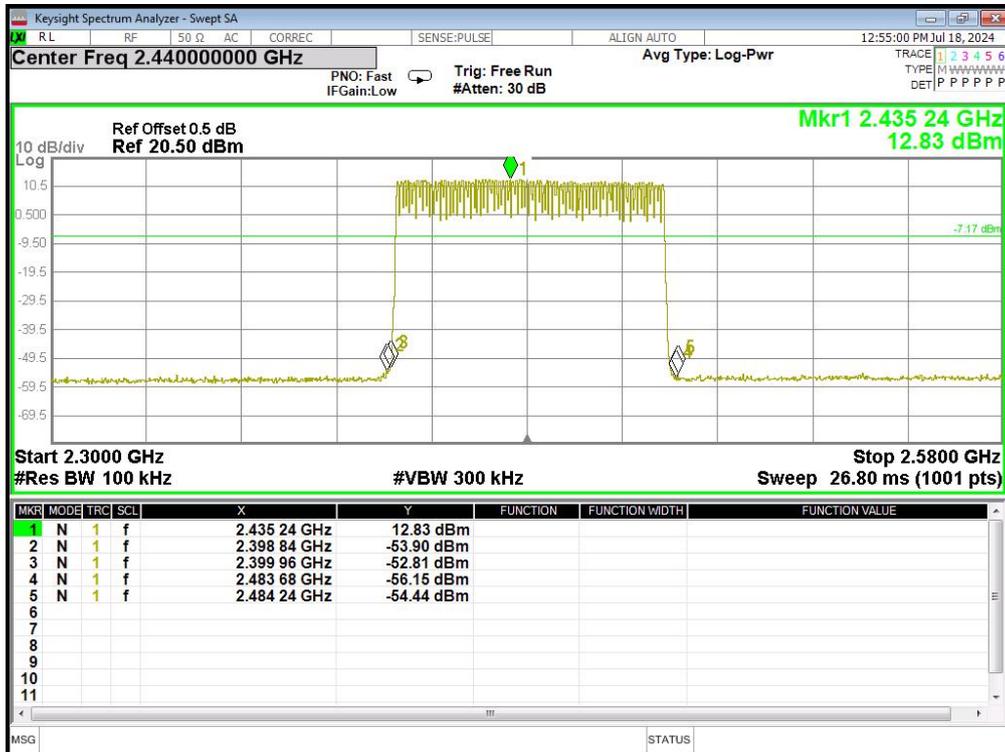

7. RADIATED EMISSION MEASUREMENT

7.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.1 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

7.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

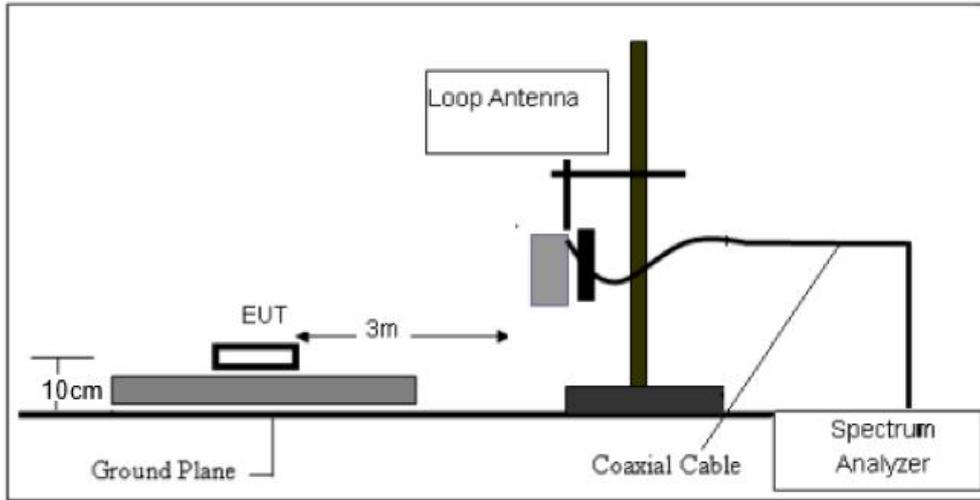

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

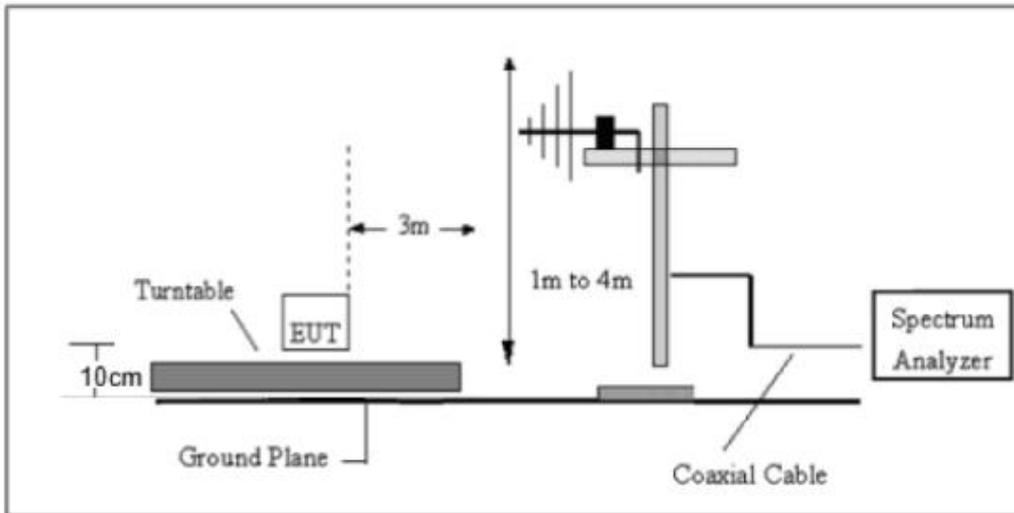

(C) Radiated Emission Test-Up Frequency Above 1GHz

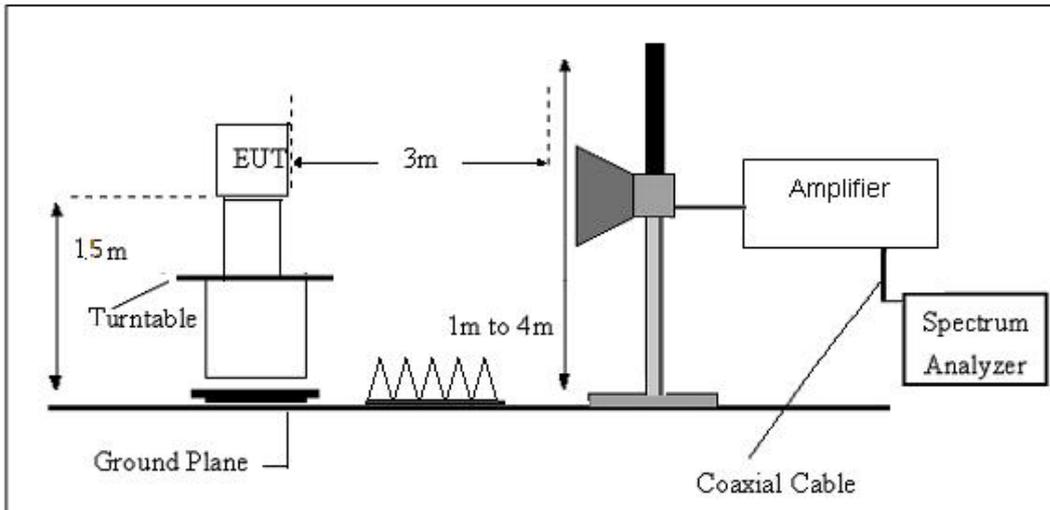

7.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Test Mode:	GFSK(worst mode)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits (dBuV) + distance extrapolation factor.

7.5 (30MHZ-1000MHZ)
ANT 1

Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	GFSK(worst mode)		

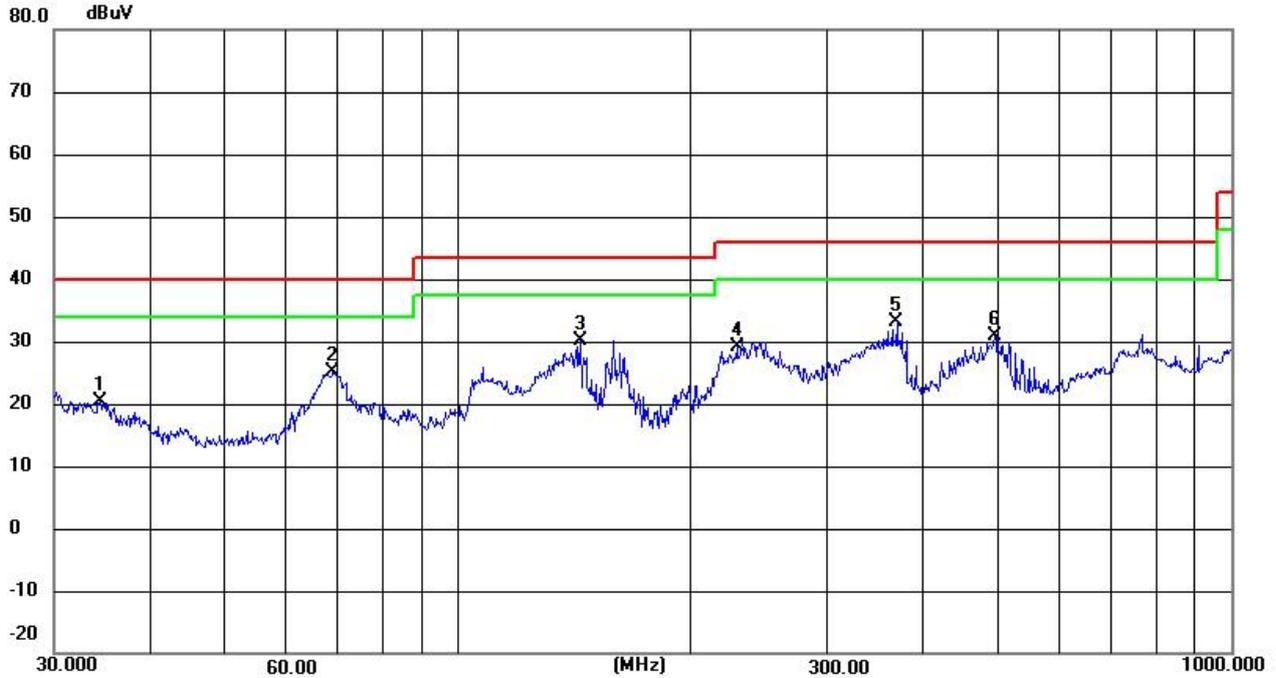


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.3962	30.49	-10.14	20.35	40.00	-19.65	QP
2	68.8721	44.95	-19.91	25.04	40.00	-14.96	QP
3	143.8291	62.35	-32.13	30.22	43.50	-13.28	QP
4	229.2930	61.04	-32.01	29.03	46.00	-16.97	QP
5	369.4045	64.72	-31.69	33.03	46.00	-12.97	QP
6	494.1983	62.24	-31.32	30.92	46.00	-15.08	QP

Note: 1. Margin = Result (Result =Reading + Factor)–Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	GFSK(worst mode)		

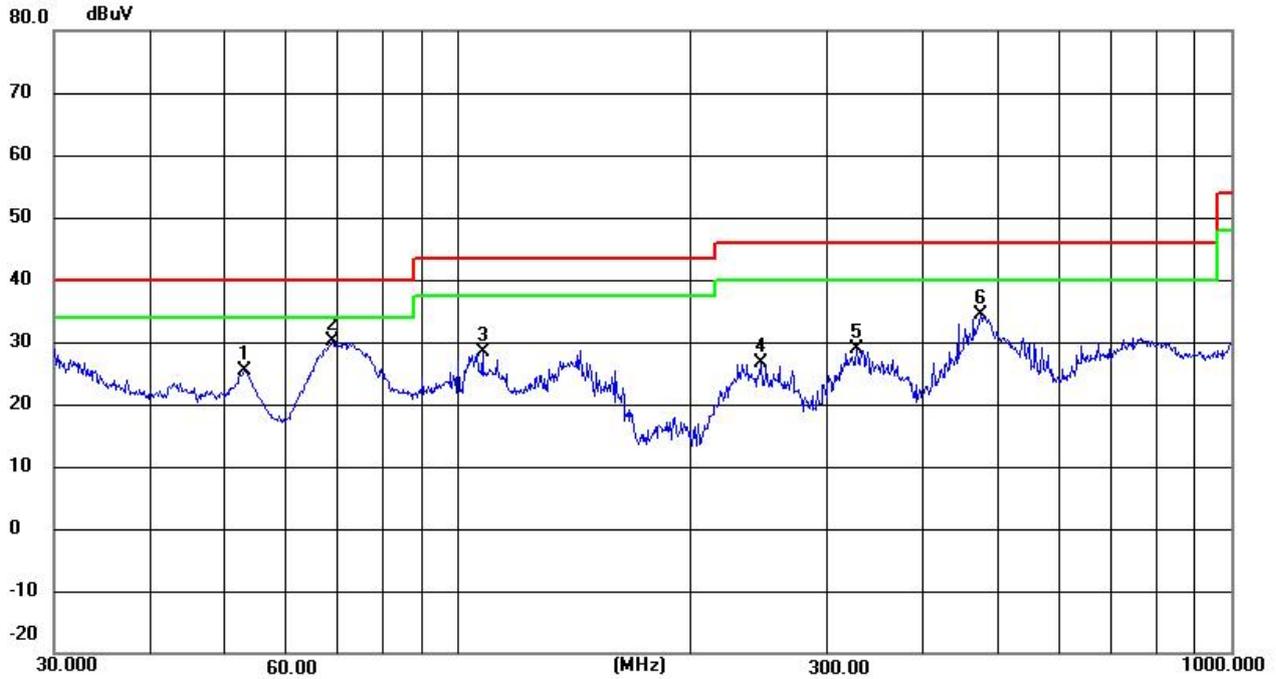

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	52.9453	44.36	-18.89	25.47	40.00	-14.53	QP
2	68.8721	50.00	-19.91	30.09	40.00	-9.91	QP
3	107.5100	60.61	-32.19	28.42	43.50	-15.08	QP
4	246.8150	58.60	-31.98	26.62	46.00	-19.38	QP
5	327.8872	60.63	-31.82	28.81	46.00	-17.19	QP
6	473.8346	65.73	-31.38	34.35	46.00	-11.65	QP


Note: 1. Margin = Result (Result =Reading + Factor)–Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

ANT 2

Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	GFSK(worst mode)		

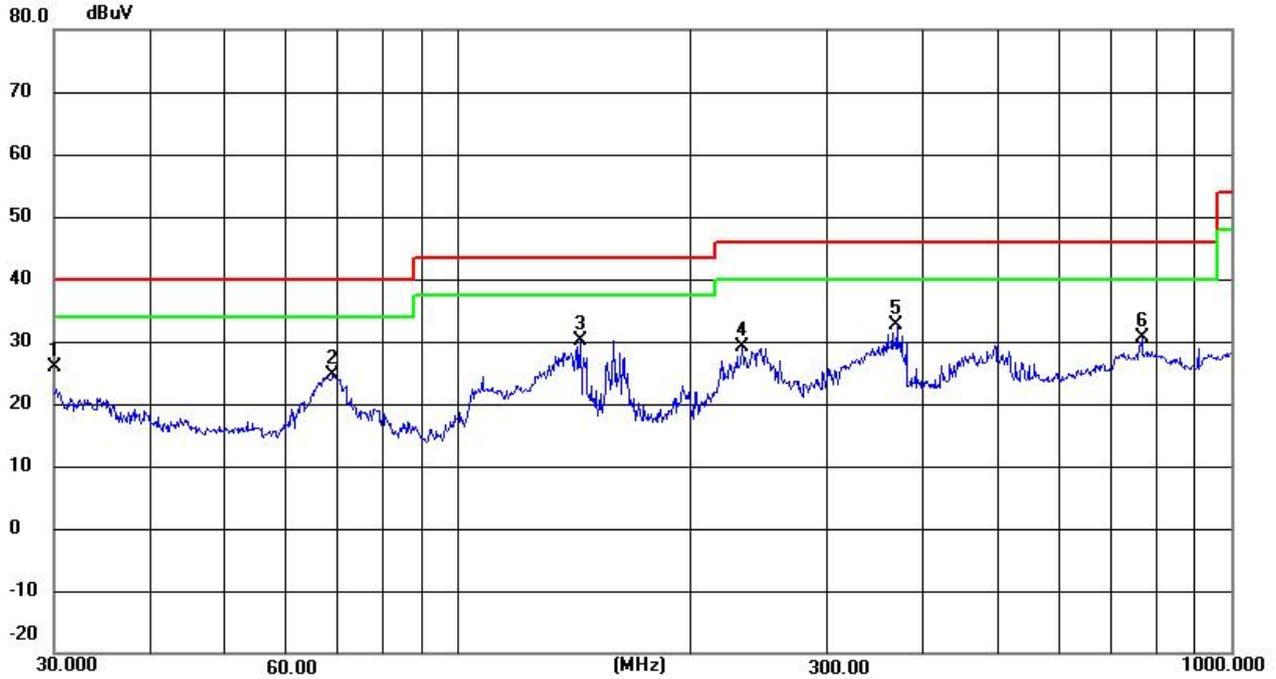


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	32.97	-7.17	25.80	40.00	-14.20	QP
2	68.8721	44.45	-19.91	24.54	40.00	-15.46	QP
3	143.8291	62.35	-32.13	30.22	43.50	-13.28	QP
4	233.3486	61.25	-32.00	29.25	46.00	-16.75	QP
5	369.4045	64.22	-31.69	32.53	46.00	-13.47	QP
6	766.0570	61.48	-30.86	30.62	46.00	-15.38	QP

Note: 1. Margin = Result (Result =Reading + Factor)–Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	GFSK(worst mode)		

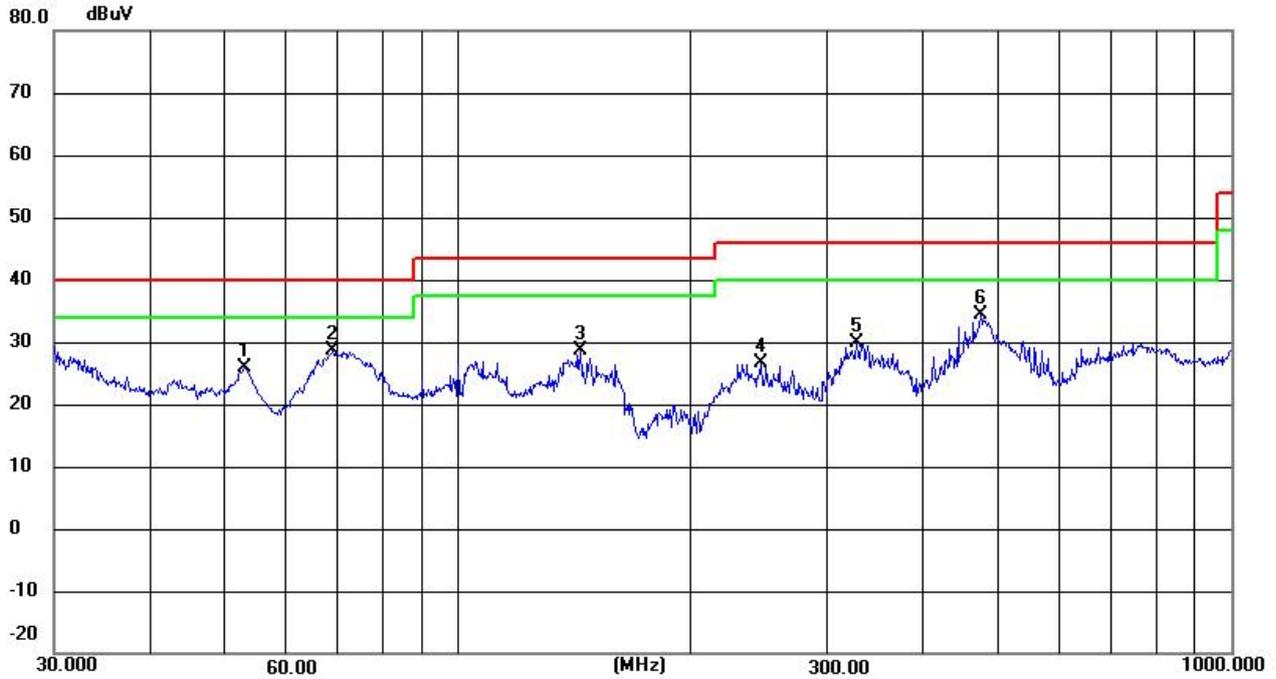

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	52.9453	44.86	-18.89	25.97	40.00	-14.03	QP
2	68.8721	48.50	-19.91	28.59	40.00	-11.41	QP
3	143.8291	60.75	-32.13	28.62	43.50	-14.88	QP
4	246.8150	58.60	-31.98	26.62	46.00	-19.38	QP
5	327.8872	61.63	-31.82	29.81	46.00	-16.19	QP
6	473.8346	65.73	-31.38	34.35	46.00	-11.65	QP

- Note: 1. Margin = Result (Result =Reading + Factor)–Limit
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

7.6 ABOVE 1GHZ
ANT 1

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Low CH (GFSK)	Test Voltage:	DC 5V

Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	35.21	31.78	8.60	32.09	43.5	74.00	-30.50	Vertical
7206.00	30.34	36.15	11.65	32.00	46.14	74.00	-27.86	Vertical
9608.00	30.83	37.95	14.14	31.62	51.3	74.00	-22.70	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.51	31.78	8.60	32.09	47.8	74.00	-26.20	Horizontal
7206.00	32.42	36.15	11.65	32.00	48.22	74.00	-25.78	Horizontal
9608.00	29.69	37.95	14.14	31.62	50.16	74.00	-23.84	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Avg

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	25.36	31.78	8.60	32.09	33.65	54.00	-20.35	Vertical
7206.00	19.58	36.15	11.65	32.00	35.38	54.00	-18.62	Vertical
9608.00	18.24	37.95	14.14	31.62	38.71	54.00	-15.29	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.31	31.78	8.60	32.09	37.6	54.00	-16.4	Horizontal
7206.00	21.75	36.15	11.65	32.00	37.55	54.00	-16.45	Horizontal
9608.00	18.88	37.95	14.14	31.62	39.35	54.00	-14.65	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. "***", means this data is the too weak instrument of signal is unable to test.

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Middle CH (GFSK)	Test Voltage:	DC 5V

Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.00	36.15	31.85	8.67	32.12	44.55	74.00	-29.45	Vertical
7323.00	30.47	36.37	11.72	31.89	46.67	74.00	-27.33	Vertical
9764.00	30.39	38.35	14.25	31.62	51.37	74.00	-22.63	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	40.67	31.85	8.67	32.12	49.07	74.00	-24.93	Horizontal
7323.00	32.25	36.37	11.72	31.89	48.45	74.00	-25.55	Horizontal
9764.00	30.83	38.35	14.25	31.62	51.81	74.00	-22.19	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Avg

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.00	25.21	31.85	8.67	32.12	33.61	54.00	-20.39	Vertical
7323.00	19.25	36.37	11.72	31.89	35.45	54.00	-18.55	Vertical
9764.00	18.84	38.35	14.25	31.62	39.82	54.00	-14.18	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	29.33	31.85	8.67	32.12	37.73	54.00	-16.27	Horizontal
7323.00	21.71	36.37	11.72	31.89	37.91	54.00	-16.09	Horizontal
9764.00	18.89	38.35	14.25	31.62	39.87	54.00	-14.13	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. "***", means this data is the too weak instrument of signal is unable to test.

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	High CH(GFSK)	Test Voltage:	DC 5V

Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	35.24	31.93	8.73	32.16	43.74	74.00	-30.26	Vertical
7440.00	30.73	36.59	11.79	31.78	47.33	74.00	-26.67	Vertical
9920.00	30.13	38.81	14.38	31.88	51.44	74.00	-22.56	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.88	31.93	8.73	32.16	48.38	74.00	-25.62	Horizontal
7440.00	32.61	36.59	11.79	31.78	49.21	74.00	-24.79	Horizontal
9920.00	29.38	38.81	14.38	31.88	50.69	74.00	-23.31	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Avg

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	25.66	31.93	8.73	32.16	34.16	54.00	-19.84	Vertical
7440.00	19.59	36.59	11.79	31.78	36.19	54.00	-17.81	Vertical
9920.00	18.24	38.81	14.38	31.88	39.55	54.00	-14.45	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	29.35	31.93	8.73	32.16	37.85	54.00	-16.15	Horizontal
7440.00	21.79	36.59	11.79	31.78	38.39	54.00	-15.61	Horizontal
9920.00	18.54	38.81	14.38	31.88	39.85	54.00	-14.15	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. "***", means this data is the too weak instrument of signal is unable to test.

ANT 2

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Low CH (GFSK)	Test Voltage:	DC 5V

Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	33.04	31.78	8.60	32.09	41.33	74.00	-32.67	Vertical
7206.00	31.27	36.15	11.65	32.00	47.07	74.00	-26.93	Vertical
9608.00	32.35	37.95	14.14	31.62	52.82	74.00	-21.18	Vertical
12010.00	*					74.00	-74	Vertical
14412.00	*					74.00	-74	Vertical
4804.00	38.24	31.78	8.60	32.09	46.53	74.00	-27.47	Horizontal
7206.00	33.38	36.15	11.65	32.00	49.18	74.00	-24.82	Horizontal
9608.00	30.82	37.95	14.14	31.62	51.29	74.00	-22.71	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Avg

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.00	26.25	31.78	8.60	32.09	34.54	54.00	-19.46	Vertical
7206.00	18.17	36.15	11.65	32.00	33.97	54.00	-20.03	Vertical
9608.00	19.82	37.95	14.14	31.62	40.29	54.00	-13.71	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.04	31.78	8.60	32.09	38.33	54.00	-15.67	Horizontal
7206.00	22.35	36.15	11.65	32.00	38.15	54.00	-15.85	Horizontal
9608.00	19.05	37.95	14.14	31.62	39.52	54.00	-14.48	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. "***", means this data is the too weak instrument of signal is unable to test.

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	Middle CH (GFSK)	Test Voltage:	DC 5V

Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.00	35.04	31.85	8.67	32.12	43.44	74.00	-30.56	Vertical
7323.00	31.28	36.37	11.72	31.89	47.48	74.00	-26.52	Vertical
9764.00	29.21	38.35	14.25	31.62	50.19	74.00	-23.81	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	41.68	31.85	8.67	32.12	50.08	74.00	-23.92	Horizontal
7323.00	31.17	36.37	11.72	31.89	47.37	74.00	-26.63	Horizontal
9764.00	31.21	38.35	14.25	31.62	52.19	74.00	-21.81	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Avg

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.00	26.68	31.85	8.67	32.12	35.08	54.00	-18.92	Vertical
7323.00	19.24	36.37	11.72	31.89	35.44	54.00	-18.56	Vertical
9764.00	17.74	38.35	14.25	31.62	38.72	54.00	-15.28	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	28.34	31.85	8.67	32.12	36.74	54.00	-17.26	Horizontal
7323.00	22.55	36.37	11.72	31.89	38.75	54.00	-15.25	Horizontal
9764.00	19.81	38.35	14.25	31.62	40.79	54.00	-13.21	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. "***", means this data is the too weak instrument of signal is unable to test.

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	High CH(GFSK)	Test Voltage:	DC 5V

Peak

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	34.75	31.93	8.73	32.16	43.25	74.00	-30.75	Vertical
7440.00	31.38	36.59	11.79	31.78	47.98	74.00	-26.02	Vertical
9920.00	31.59	38.81	14.38	31.88	52.90	74.00	-21.10	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.39	31.93	8.73	32.16	46.89	74.00	-27.11	Horizontal
7440.00	32.02	36.59	11.79	31.78	48.62	74.00	-25.38	Horizontal
9920.00	30.75	38.81	14.38	31.88	52.06	74.00	-21.94	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Avg

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.00	24.15	31.93	8.73	32.16	32.65	54.00	-21.35	Vertical
7440.00	18.83	36.59	11.79	31.78	35.43	54.00	-18.57	Vertical
9920.00	17.41	38.81	14.38	31.88	38.72	54.00	-15.28	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	30.26	31.93	8.73	32.16	38.76	54.00	-15.24	Horizontal
7440.00	22.36	36.59	11.79	31.78	38.96	54.00	-15.04	Horizontal
9920.00	19.97	38.81	14.38	31.88	41.28	54.00	-12.72	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss- Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. "***", means this data is the too weak instrument of signal is unable to test.

7.6 RADIATED BAND EDGE DATA
 ANT 1
 Low CH (GFSK)
 Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	38.15	27.61	5.36	30.18	40.94	74.00	-33.06	Horizontal
2390.00	37.36	27.59	5.38	30.18	40.15	74.00	-33.85	Horizontal
2400.00	54.39	27.58	5.39	30.18	57.18	74.00	-16.82	Horizontal
2310.00	37.18	27.61	5.36	30.18	39.97	74.00	-34.03	Vertical
2390.00	38.54	27.59	5.38	30.18	41.33	74.00	-32.67	Vertical
2400.00	55.32	27.58	5.39	30.18	58.11	74.00	-15.89	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	32.19	27.61	5.36	30.18	34.98	54.00	-19.02	Horizontal
2390.00	29.33	27.59	5.38	30.18	32.12	54.00	-21.88	Horizontal
2400.00	40.59	27.58	5.39	30.18	43.38	54.00	-10.62	Horizontal
2310.00	31.51	27.61	5.36	30.18	34.30	54.00	-19.70	Vertical
2390.00	29.12	27.59	5.38	30.18	31.91	54.00	-22.09	Vertical
2400.00	41.57	27.58	5.39	30.18	44.36	54.00	-9.64	Vertical

High CH(GFSK)
Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	39.26	27.53	5.47	29.93	42.33	74.00	-31.67	Horizontal
2500.00	39.35	27.55	5.49	29.93	42.46	74.00	-31.54	Horizontal
2483.50	39.53	27.53	5.47	29.93	42.60	74.00	-31.40	Vertical
2500.00	40.49	27.55	5.49	29.93	43.60	74.00	-30.40	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	32.36	27.53	5.47	29.93	35.43	54.00	-18.57	Horizontal
2500.00	31.24	27.55	5.49	29.93	34.35	54.00	-19.65	Horizontal
2483.50	33.88	27.53	5.47	29.93	36.95	54.00	-17.05	Vertical
2500.00	30.27	27.55	5.49	29.93	33.38	54.00	-20.62	Vertical

Remark.

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Pre-amplifier Factor
2. The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.
3. All restriction bands have been tested, and only the worst case is shown in report

ANT 2
Low CH (GFSK)
Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.16	27.61	5.36	30.18	41.95	74.00	-32.05	Horizontal
2390.00	38.97	27.59	5.38	30.18	41.76	74.00	-32.24	Horizontal
2400.00	53.14	27.58	5.39	30.18	55.93	74.00	-18.07	Horizontal
2310.00	36.63	27.61	5.36	30.18	39.42	74.00	-34.58	Vertical
2390.00	39.97	27.59	5.38	30.18	42.76	74.00	-31.24	Vertical
2400.00	54.88	27.58	5.39	30.18	57.67	74.00	-16.33	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	31.39	27.61	5.36	30.18	34.18	54.00	-19.82	Horizontal
2390.00	28.56	27.59	5.38	30.18	31.35	54.00	-22.65	Horizontal
2400.00	41.13	27.58	5.39	30.18	43.92	54.00	-10.08	Horizontal
2310.00	32.05	27.61	5.36	30.18	34.84	54.00	-19.16	Vertical
2390.00	28.44	27.59	5.38	30.18	31.23	54.00	-22.77	Vertical
2400.00	40.83	27.58	5.39	30.18	43.62	54.00	-10.38	Vertical

High CH(GFSK)
Peak

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.25	27.53	5.47	29.93	41.32	74.00	-32.68	Horizontal
2500.00	38.63	27.55	5.49	29.93	41.74	74.00	-32.26	Horizontal
2483.50	40.87	27.53	5.47	29.93	43.94	74.00	-30.06	Vertical
2500.00	39.04	27.55	5.49	29.93	42.15	74.00	-31.85	Vertical

Avg

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.38	27.53	5.47	29.93	36.45	54.00	-17.55	Horizontal
2500.00	32.26	27.55	5.49	29.93	35.37	54.00	-18.63	Horizontal
2483.50	34.81	27.53	5.47	29.93	37.88	54.00	-16.12	Vertical
2500.00	29.02	27.55	5.49	29.93	32.13	54.00	-21.87	Vertical

Remark.

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Pre-amplifier Factor
2. The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.
3. All restriction bands have been tested, and only the worst case is shown in report

8. AVERAGE TIME OF OCCUPANCY

8.1 LIMIT

FCC Part 5 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(1)	Average Time of Occupancy	0.4 sec	2400-2483.5

8.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW = 1MHz/VBW = 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $3.37 \times 31.6 = 106.6$.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $5.06 \times 31.6 = 160$.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $10.12 \times 31.6 = 320$.

8.3 TEST SETUP



8.4 TEST RESULTS

ANT 1

AVERAGE TIME OF OCCUPANCY							
CONDITION	MODE	FREQUENCY (MHZ)	PULSE TIME (MS)	AVERAGE TIME OF OCCUPANCY (MS)	LIMIT (MS)	BURST NUMBER	RESULTS
NVNT	1DH1	2441	0.385	123.328	400	320	PASS
NVNT	1DH3	2441	1.654	263.050	400	159	PASS
NVNT	1DH5	2441	2.9	319.000	400	110	PASS

ANT 2

AVERAGE TIME OF OCCUPANCY							
CONDITION	MODE	FREQUENCY (MHZ)	PULSE TIME (MS)	AVERAGE TIME OF OCCUPANCY (MS)	LIMIT (MS)	BURST NUMBER	RESULTS
NVNT	1DH1	2441	0.385	123.328	400	320	PASS
NVNT	1DH3	2441	1.645	254.975	400	155	PASS
NVNT	1DH5	2441	2.896	315.664	400	109	PASS