


CUSTOMER	Ningbo weie Electronic Technology Co., Ltd	MATERIAL CODE	M75-A
DESCRIPTION	TX750010-20.5-20-S1H-35	PART NAME	COIL
KIND PLANK NO	CXZN20220597	D A T E	20 September 2022

一、Appearance of size


Unit: mm

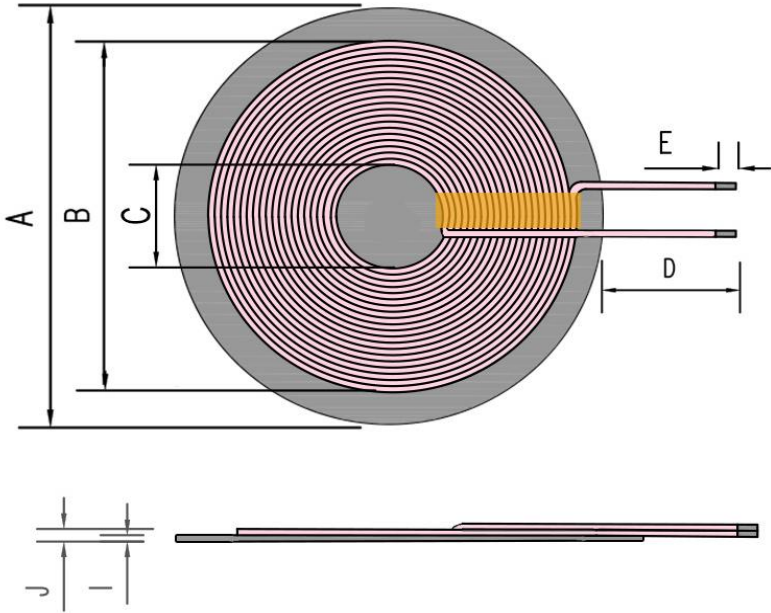

Note: 1.High temperature tape is 5mm wide; 2.Add black Mylar behind nickel zinc;

A	75±1	B	62±1.5	C	20.5±1	D	35±2	
E	3±1.5	I	1.0±0.1	J	2.8 Max			

二、Schematic Diagram



CUSTOMER	Ningbo weie Electronic Technology Co., Ltd		MATERIAL CODE	M75-A	
DESCRIPTION	TX750010-20.5-20-S1H-35		PART NAME	COIL	
KIND PLANK NO	CXZN20220597		D A T E	20 September 2022	
三、 Winding Structure Diagram					
WINDING	S	F	WIRE	TURNS	INDUCTANCE
N1	1	2	silk wire 0.08*105P	20 Ts	28.5 uH±10%
四、 Electrical parameters					
TEST PROJECT	SPEC	TEST FREQ		TEST STRUMENTS	
Inductance L (coil + magnetic piece)	28.5 uH±10%	at 25°C 1KHz/1V		HG2817A 200KHz	
DC resistance (DCR)	145 mΩ MAX	at 25°C 1KHz/1V		HG2817A 200KHz	
五、 BOM					
MATERIAL	SPECIFICATIONS	MANUFACTURERS		UL UL FILE NO	
WIRE	silk wire 0.08*105P	JIANGSU BAOJIELONG MAGNET WIRES CO.LTD (or equivalent)		E326176	
Nickel zinc	75*1.0	JINRUI TECHNOLOGY CO.,LTD (or equivalent)		N/A	

CUSTOMER	Ningbo weie Electronic Technology Co., Ltd	MATERIAL CODE	M75-A
DESCRIPTION	TX750010-20.5-20-S1H-35	PART NAME	COIL
KIND PLANK NO	CXZN20220597	D A T E	20 September 2022

六、 Winding Structure Diagram

appearance	1. The product shall be provided with a certificate of conformity and a waterproof and washable label, and the model and specification shall be indicated.
	2. The product appearance is clean and free of dirt.
packing	1. The packing box shall be marked with the model, quantity, delivery date, name of the manufacturer and delivery inspection seal of the product:
	2. After the goods are delivered to the customer, the sealing strip of the packing box shall be intact, and the box shall be free of damage, cracking and other phenomena:
	3 after unpacking, the packing materials in the box shall be free of damage. The products shall be packed in layers. If there is less than one box, padding shall be added.