

FCC Part 15C Measurement and Test Report

For

**SHANGHAI UNISPLENDOR LELIAN INTERNET OF THINGS
TECHNOLOGY CO.,LTD.**

**Building C, 888 huanhu west 2nd road, nanhui new town, pudong new area,
Shanghai, China**

FCC ID: 2ATY4-C4220100

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>Dimmer switch</u>
Tested Model:	<u>C4220100</u>
Report No.:	<u>WTX19X11077270W</u>
Sample Receipt Date:	<u>2019-11-08</u>
Tested Date:	<u>2019-11-08 to 2019-11-18</u>
Issued Date:	<u>2019-11-18</u>
Tested By:	<u>Mike Shi / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Mike Shi

Silin Chen

Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
2. SUMMARY OF TEST RESULTS.....	9
3. RF EXPOSURE.....	10
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
4. ANTENNA REQUIREMENT.....	11
4.1 STANDARD APPLICABLE.....	11
4.2 EVALUATION INFORMATION.....	11
5. POWER SPECTRAL DENSITY.....	12
5.1 STANDARD APPLICABLE.....	12
5.2 TEST PROCEDURE.....	12
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	12
6. 6DB BANDWIDTH.....	14
6.1 STANDARD APPLICABLE.....	14
6.2 TEST PROCEDURE.....	14
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	14
7. RF OUTPUT POWER.....	16
7.1 STANDARD APPLICABLE.....	16
7.2 TEST PROCEDURE.....	16
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	16
8. FIELD STRENGTH OF SPURIOUS EMISSIONS.....	18
8.1 STANDARD APPLICABLE.....	18
8.2 TEST PROCEDURE.....	18
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	19
9. OUT OF BAND EMISSIONS.....	27
9.1 STANDARD APPLICABLE.....	27
9.2 TEST PROCEDURE.....	27
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	28
10. CONDUCTED EMISSIONS.....	30
10.1 TEST PROCEDURE.....	30
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	30
10.3 TEST RECEIVER SETUP.....	30
10.4 SUMMARY OF TEST RESULTS/PLOTS.....	30

Report version

Version No.	Date of issue	Description
Rev.00	2019-11-18	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHANGHAI UNISPLENDOR LELIAN INTERNET OF THINGS TECHNOLOGY CO.,LTD.
 Address of applicant: Building C, 888 huanhu west 2nd road, nanhui new town, pudong new area, Shanghai, China

Manufacturer: HENAN ULTRAMODERN INTERNET OF THINGS TECHNOLOGIES COMPANY LIMITED.
 Address of manufacturer: Building 3, no.67 dongqing street, high-tech industrial development zone, zhengzhou, China

General Description of EUT	
Product Name:	Dimmer switch
Trade Name:	UIOT
Model No.:	C4220100
Adding Model(s):	/
Rated Voltage:	AC120V 60Hz
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	IEEE802.15.4
Frequency Range:	2405-2475MHz
RF Output Power:	15.58dBm (Conducted)
Type of Modulation:	OQPSK
Quantity of Channels:	15
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	2.0dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v05r02: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2405MHz
TM2	Middle	2440MHz
TM3	High	2475MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1091	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the fixed transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an Integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Summary of Test Results/Plots

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
ZigBee	Low	3.59	8
	Middle	3.42	8
	High	2.90	8

Please refer to the following test plots:
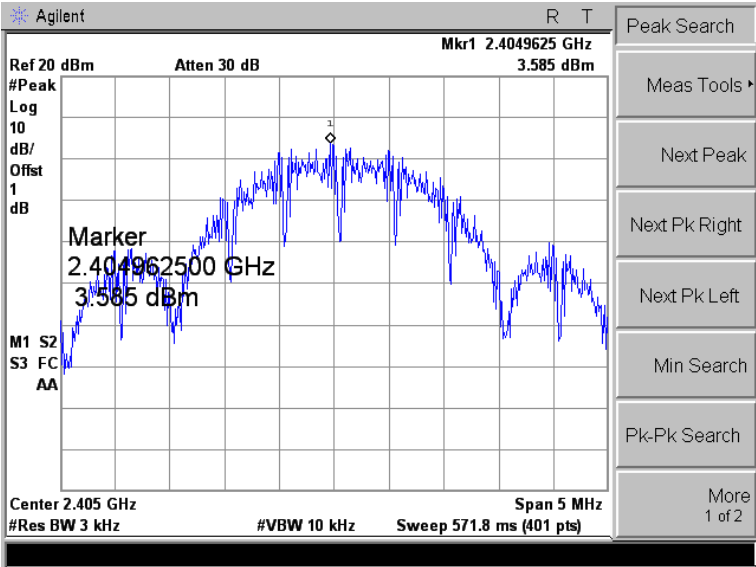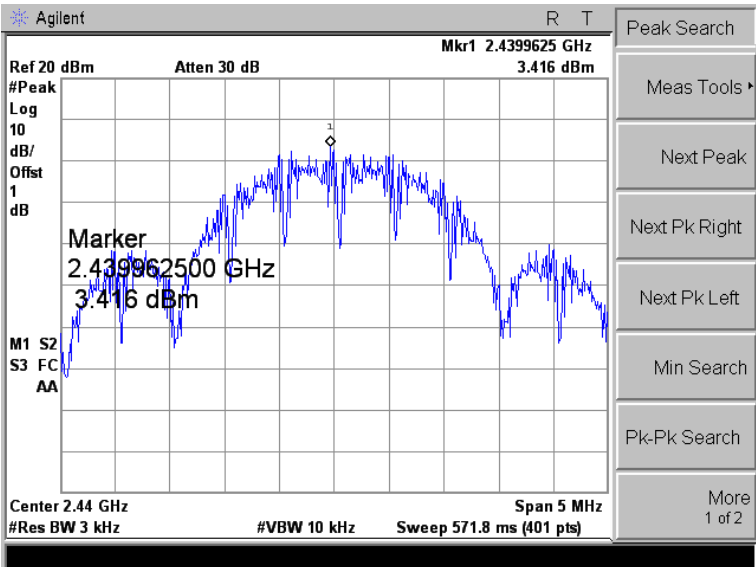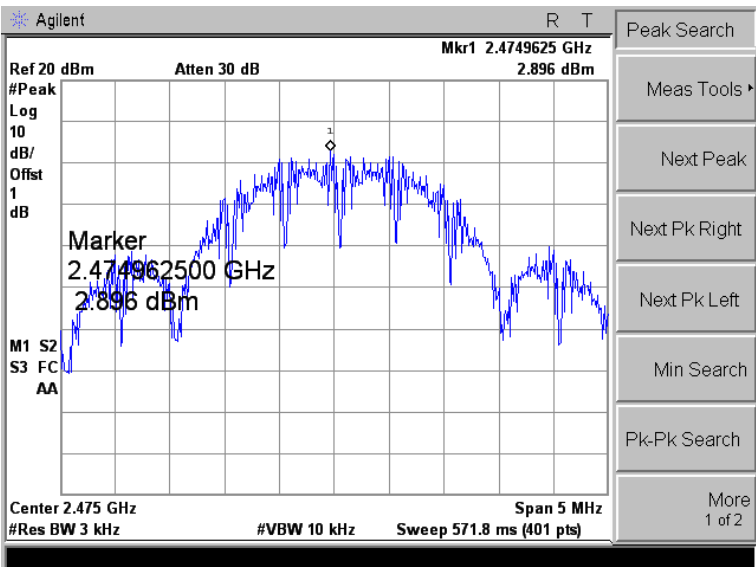
<p>Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.40496250 GHz 3.585 dBm #Peak Log 10 dB/ Offst 1 dB Marker 2.404962500 GHz 3.585 dBm M1 S2 S3 FC AA Center 2.405 GHz Span 5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 571.8 ms (401 pts)</p>
<p>Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.4399625 GHz 3.416 dBm #Peak Log 10 dB/ Offst 1 dB Marker 2.439962500 GHz 3.416 dBm M1 S2 S3 FC AA Center 2.44 GHz Span 5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 571.8 ms (401 pts)</p>
<p>High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 2.4749625 GHz 2.896 dBm #Peak Log 10 dB/ Offst 1 dB Marker 2.474962500 GHz 2.896 dBm M1 S2 S3 FC AA Center 2.475 GHz Span 5 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 571.8 ms (401 pts)</p>

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

Test Mode	Test Channel	6 dB Bandwidth MHz	Limit kHz
ZigBee	Low	1.569	≥ 500
	Middle	1.567	≥ 500
	High	1.600	≥ 500

Please refer to the following test plots:
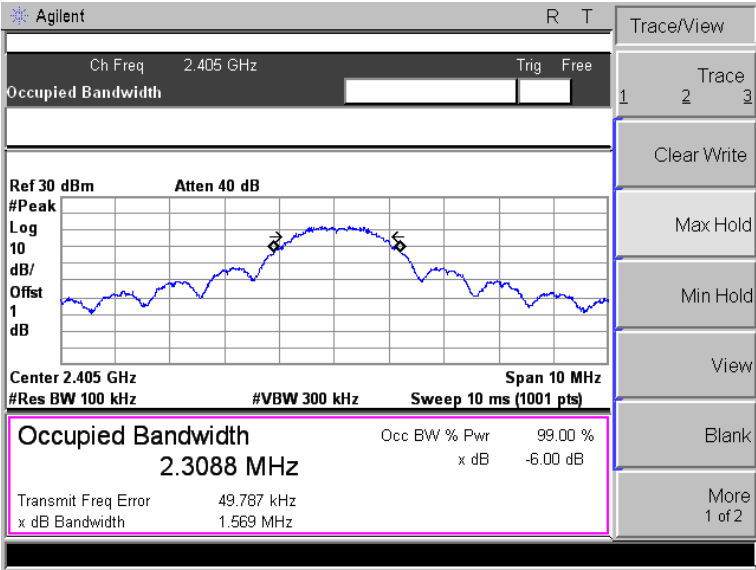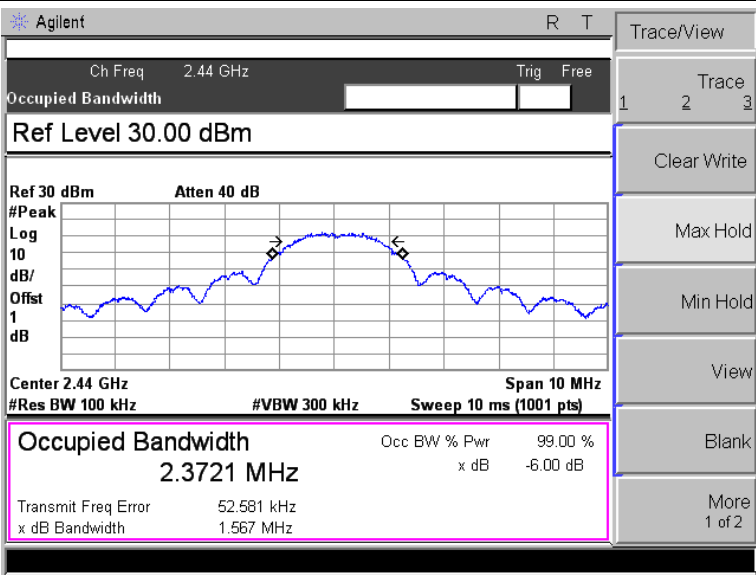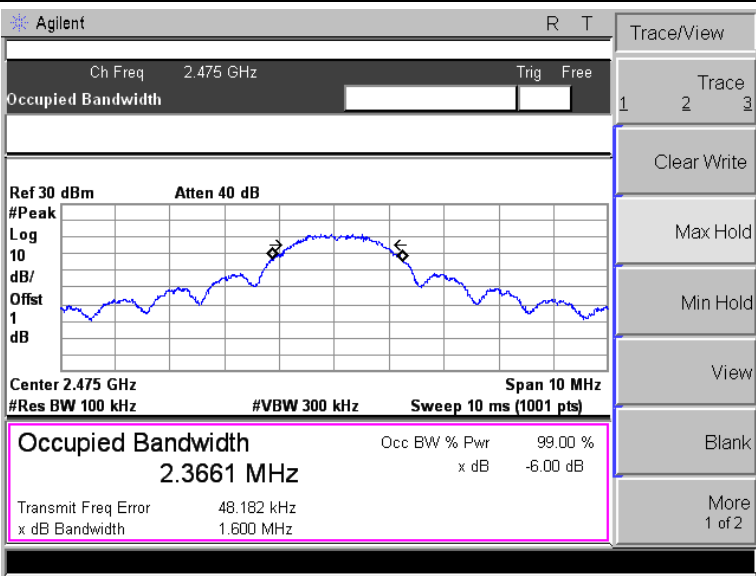
<p>Low</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.405 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 40 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.405 GHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.3088 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 49.787 kHz x dB Bandwidth 1.569 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>Middle</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref Level 30.00 dBm</p> <p>Ref 30 dBm Atten 40 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.44 GHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.3721 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 52.581 kHz x dB Bandwidth 1.567 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>High</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.475 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 30 dBm Atten 40 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.475 GHz Span 10 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 2.3661 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 48.182 kHz x dB Bandwidth 1.600 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

7. RF Output Power

7.1 Standard Applicable




According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

7.3 Summary of Test Results/Plots

Test Mode	Test Channel	Reading dBm	Output Power mW	Limit mW
ZigBee	Low	15.58	36.14	1000
	Middle	15.52	35.65	1000
	High	15.09	32.28	1000
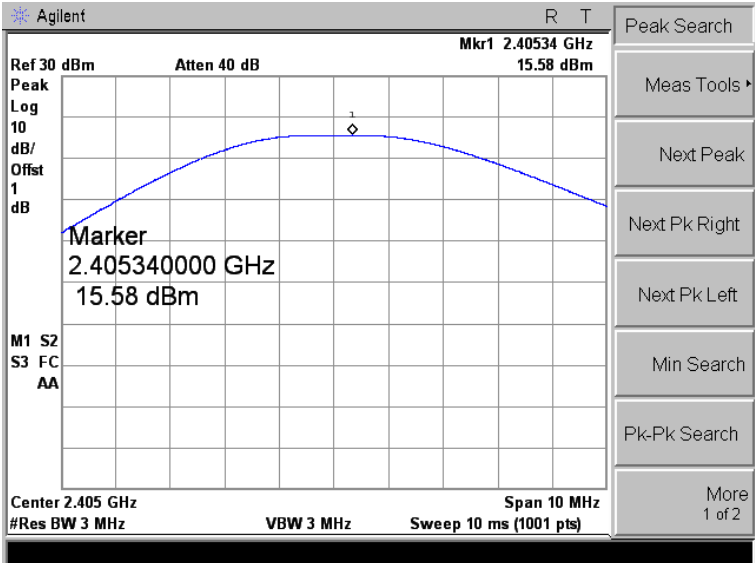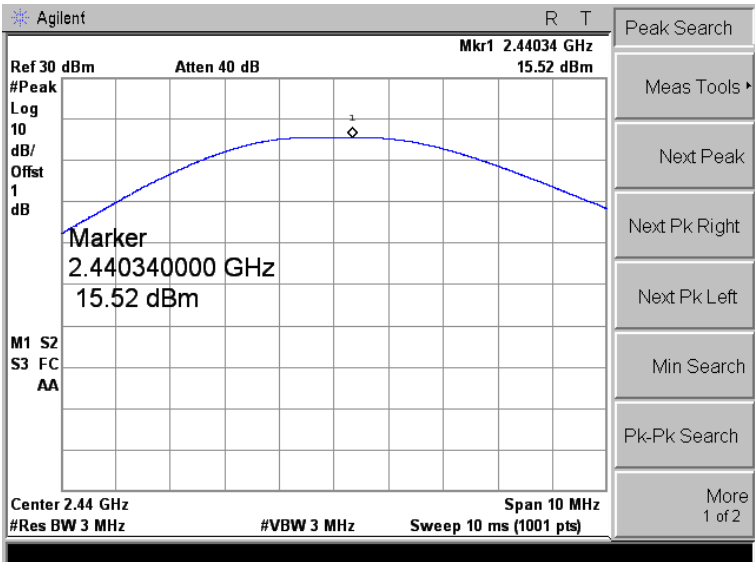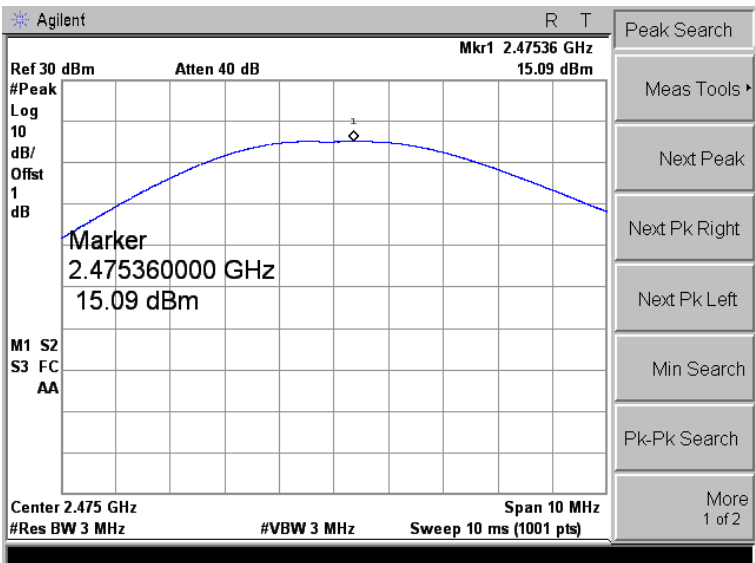
<p style="text-align: center;">Low</p>	
<p style="text-align: center;">Middle</p>	
<p style="text-align: center;">High</p>	

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

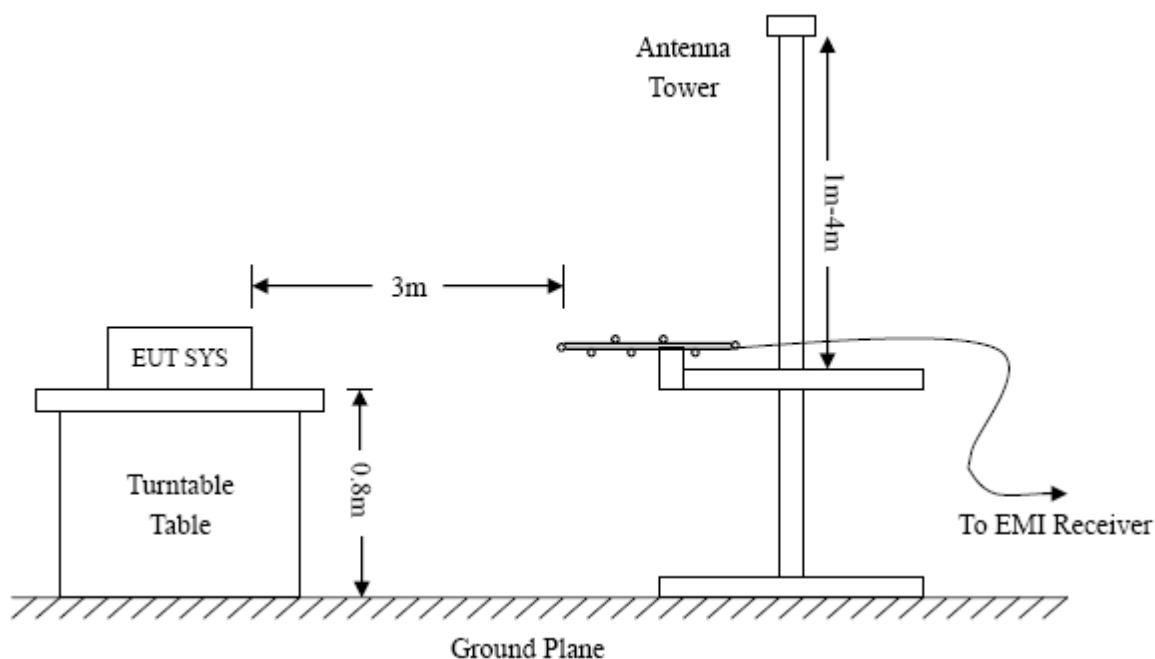

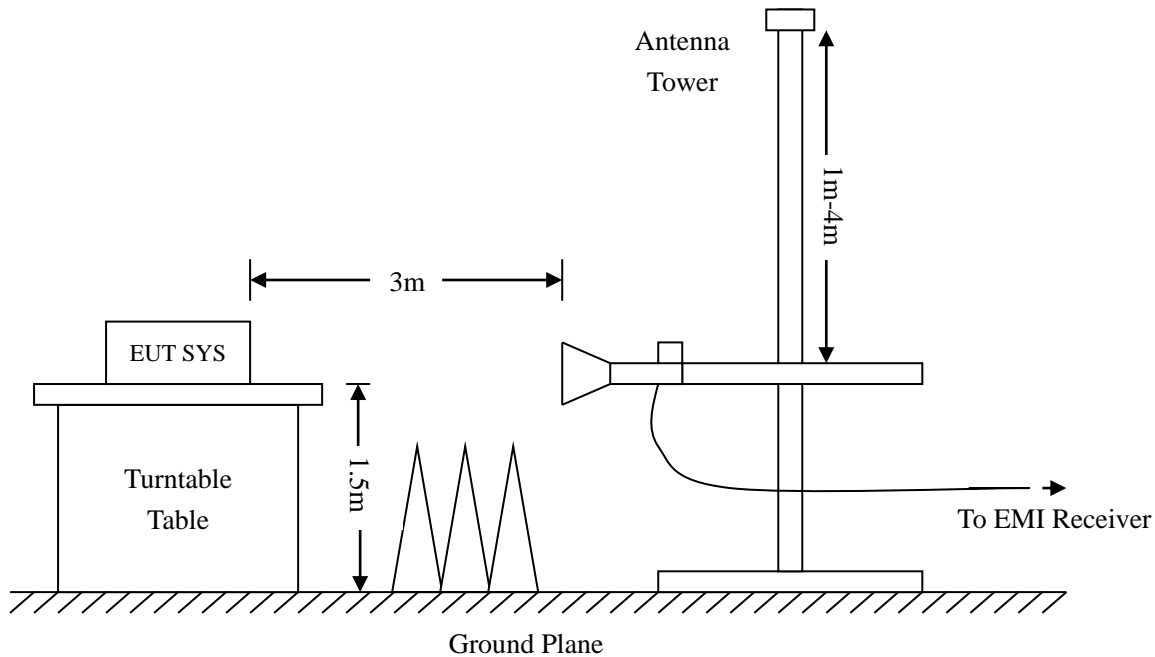

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

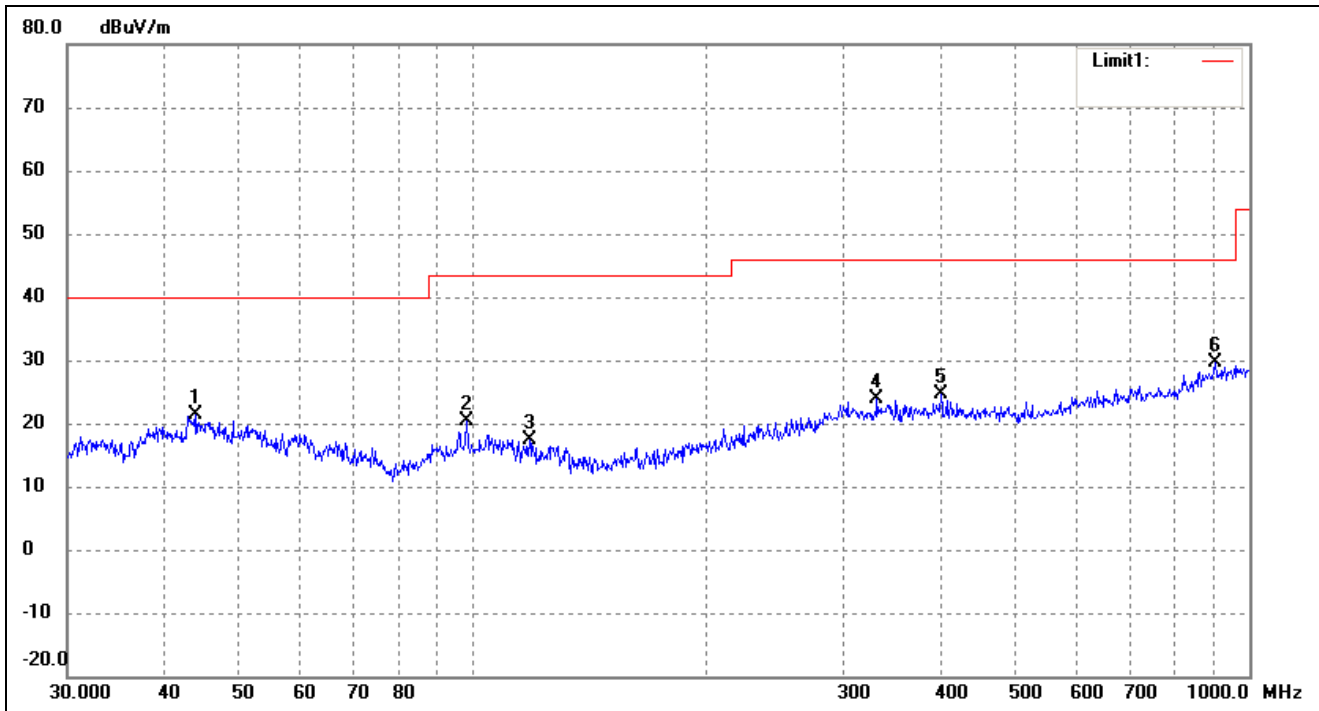


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.9658	35.41	-13.98	21.43	40.00	-18.57	61	100	peak
2	98.1419	35.61	-15.29	20.32	43.50	-23.18	155	100	peak
3	118.1862	32.83	-15.48	17.35	43.50	-26.15	73	100	peak
4	331.3547	32.05	-8.26	23.79	46.00	-22.21	113	100	peak
5	400.4319	32.48	-7.86	24.62	46.00	-21.38	54	100	peak
6	903.3094	30.66	-1.14	29.52	46.00	-16.48	162	100	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

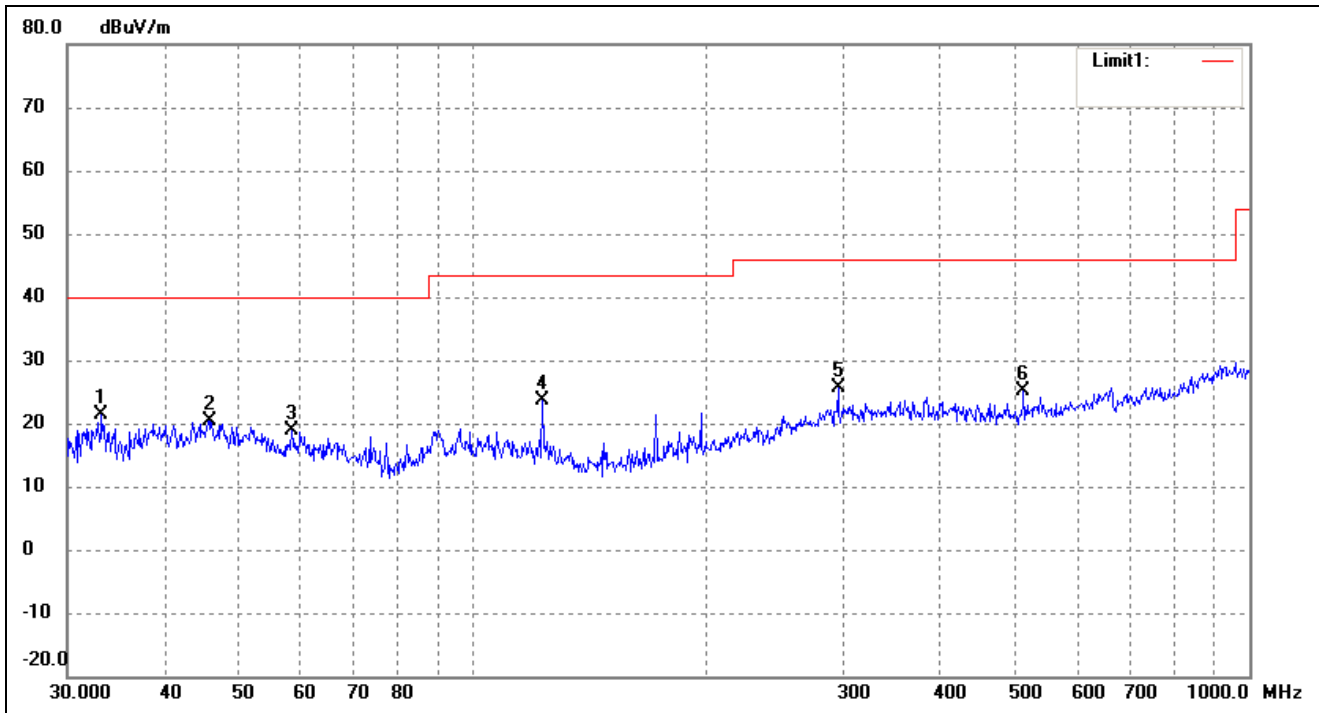


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	37.54	-16.19	21.35	40.00	-18.65	118	100	peak
2	45.6948	34.27	-13.89	20.38	40.00	-19.62	91	100	peak
3	58.4074	33.91	-15.14	18.77	40.00	-21.23	117	100	peak
4	122.8340	39.85	-16.34	23.51	43.50	-19.99	133	100	peak
5	295.1469	33.88	-8.24	25.64	46.00	-20.36	163	100	peak
6	511.8352	33.11	-7.98	25.13	46.00	-20.87	340	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

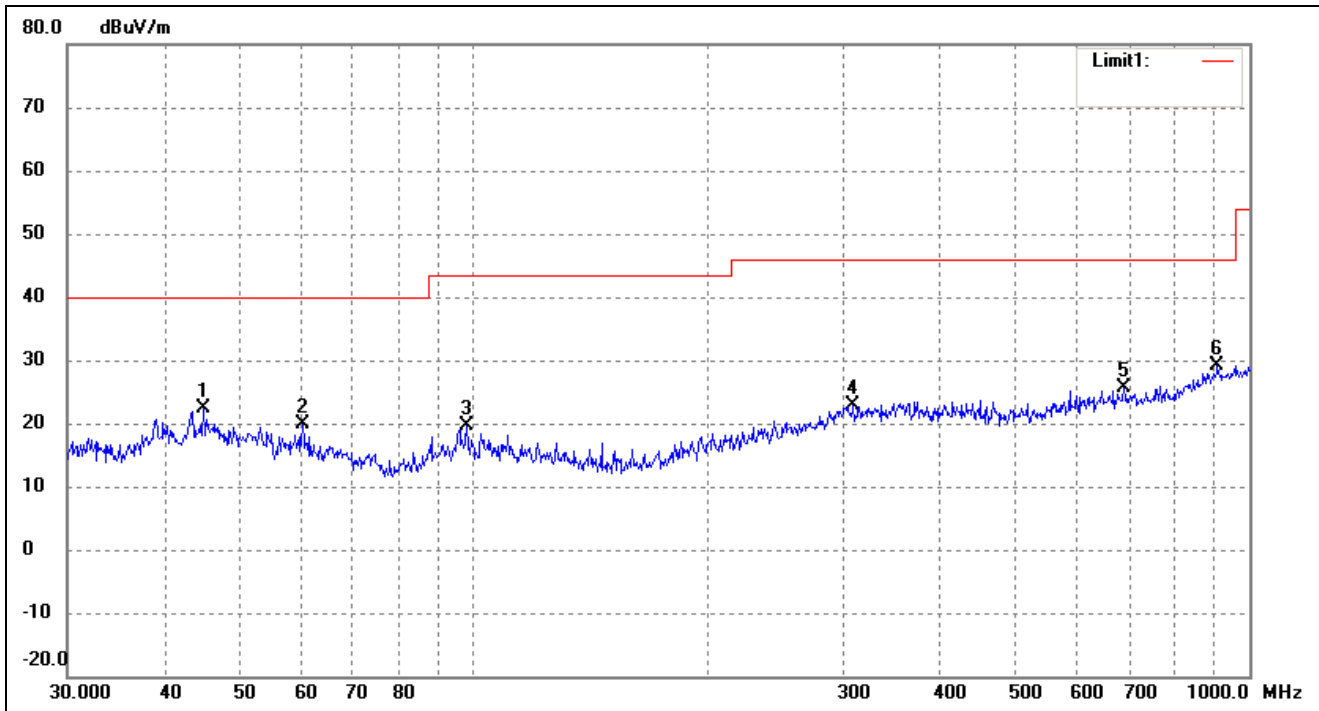


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.9006	36.37	-13.94	22.43	40.00	-17.57	238	100	peak
2	60.2801	35.08	-15.20	19.88	40.00	-20.12	132	100	peak
3	98.1419	34.87	-15.29	19.58	43.50	-23.92	57	100	peak
4	308.9126	31.04	-8.06	22.98	46.00	-23.02	138	100	peak
5	689.5644	30.98	-5.32	25.66	46.00	-20.34	144	100	peak
6	909.6667	30.24	-1.04	29.20	46.00	-16.80	174	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

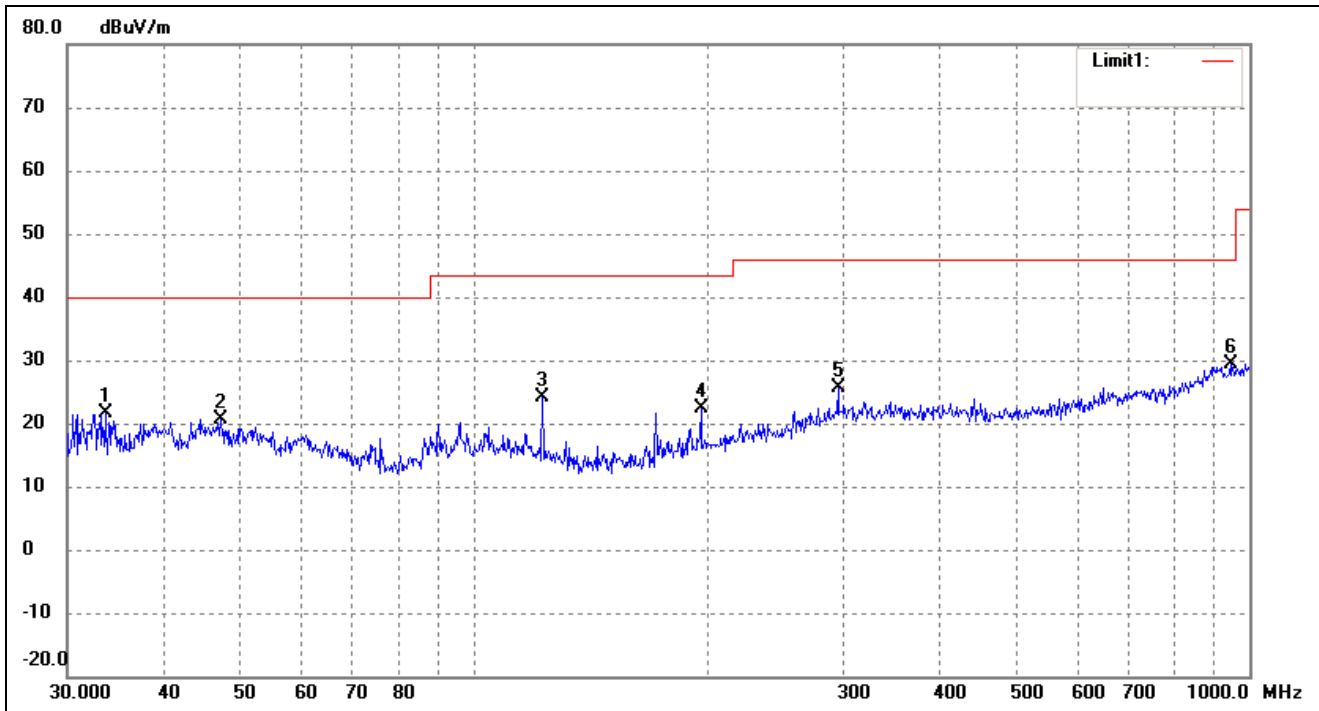


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.5624	37.78	-16.18	21.60	40.00	-18.40	309	100	peak
2	47.3255	34.51	-13.79	20.72	40.00	-19.28	96	100	peak
3	122.8340	40.41	-16.34	24.07	43.50	-19.43	121	100	peak
4	196.5098	35.24	-12.96	22.28	43.50	-21.22	94	100	peak
5	295.1469	33.89	-8.24	25.65	46.00	-20.35	357	100	peak
6	945.4399	30.46	-1.09	29.37	46.00	-16.63	191	100	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

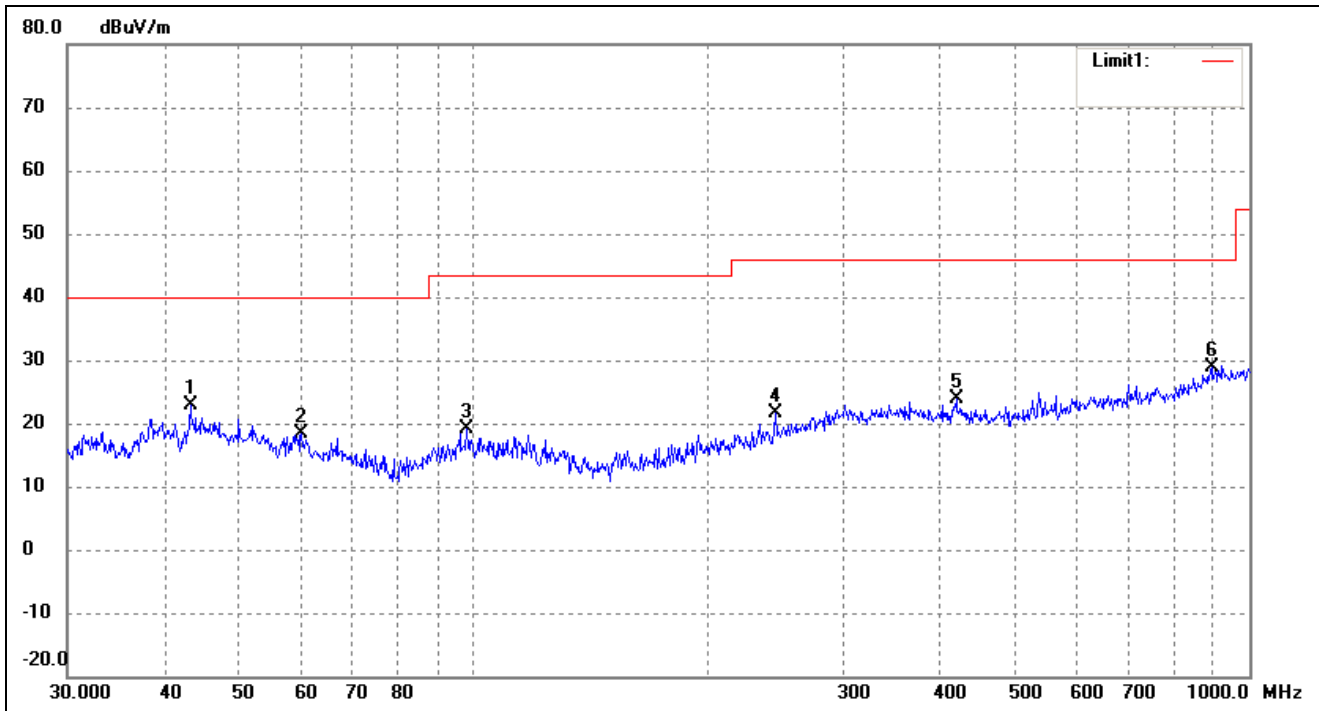

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.2017	36.97	-14.01	22.96	40.00	-17.04	289	100	peak
2	60.0691	33.60	-15.16	18.44	40.00	-21.56	99	100	peak
3	98.1419	34.34	-15.29	19.05	43.50	-24.45	321	100	peak
4	245.0900	32.46	-10.82	21.64	46.00	-24.36	99	100	peak
5	419.1081	31.73	-7.89	23.84	46.00	-22.16	213	100	peak
6	893.8567	30.34	-1.48	28.86	46.00	-17.14	199	100	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

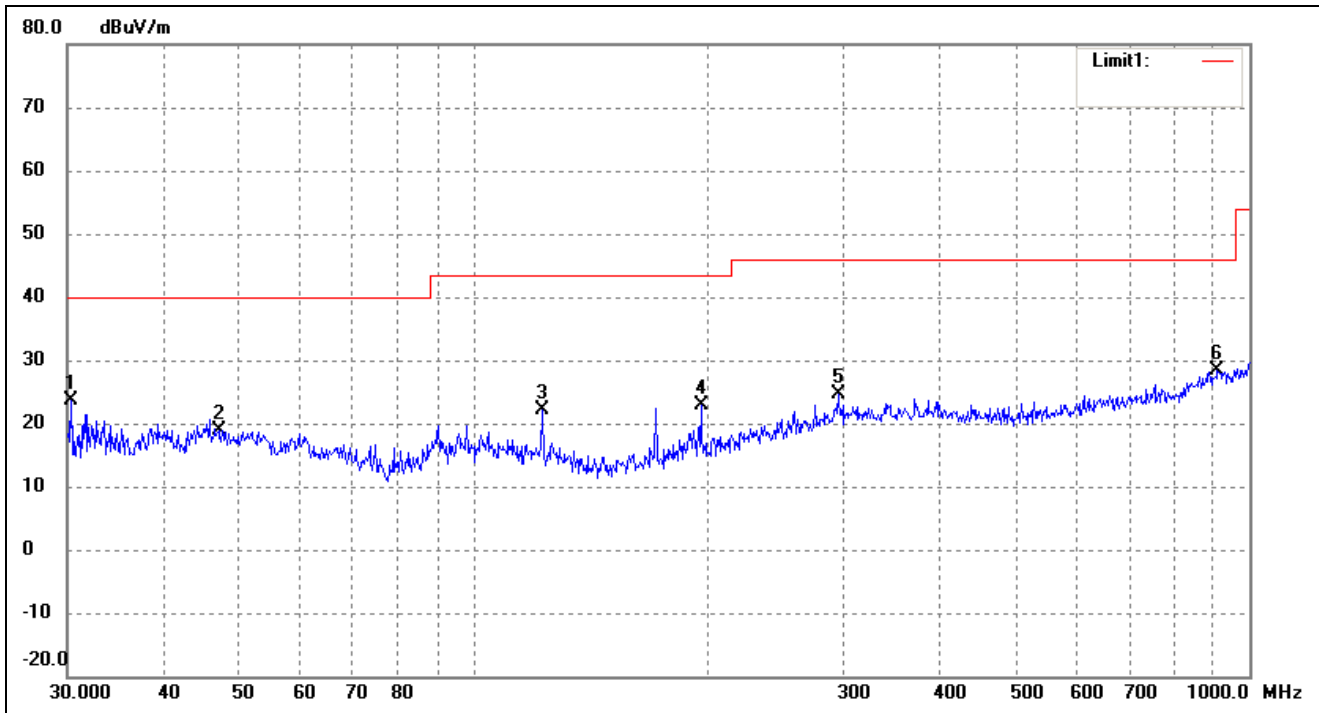

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.3173	39.92	-16.38	23.54	40.00	-16.46	255	100	peak
2	46.9948	32.68	-13.82	18.86	40.00	-21.14	245	100	peak
3	122.8340	38.57	-16.34	22.23	43.50	-21.27	62	100	peak
4	196.5098	35.88	-12.96	22.92	43.50	-20.58	133	100	peak
5	295.1469	32.82	-8.24	24.58	46.00	-21.42	106	100	peak
6	909.6667	29.45	-1.04	28.41	46.00	-17.59	112	100	peak

➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2405MHz							
4810	60.31	-3.53	56.78	74	-17.22	H	PK
4810	41.17	-3.53	37.64	54	-16.36	H	AV
7215	59.79	-0.50	59.29	74	-14.71	H	PK
7215	39.54	-0.50	39.04	54	-14.96	H	AV
4810	58.71	-3.53	55.18	74	-18.82	V	PK
4810	41.27	-3.53	37.74	54	-16.26	V	AV
7215	59.65	-0.50	59.15	74	-14.85	V	PK
7215	41.55	-0.50	41.05	54	-12.95	V	AV
Middle Channel-2440MHz							
4880	60.78	-3.41	57.37	74	-16.63	H	PK
4880	38.72	-3.41	35.31	54	-18.69	H	AV
7320	63.02	-0.42	62.60	74	-11.40	H	PK
7320	41.23	-0.42	40.81	54	-13.19	H	AV
4880	57.66	-3.41	54.25	74	-19.75	V	PK
4880	41.28	-3.41	37.87	54	-16.13	V	AV
7320	59.82	-0.42	59.40	74	-14.60	V	PK
7320	41.43	-0.42	41.01	54	-12.99	V	AV
High Channel-2475MHz							
4950	58.90	-3.38	55.52	74	-18.48	H	PK
4950	38.13	-3.38	34.75	54	-19.25	H	AV
7425	60.79	-0.35	60.44	74	-13.56	H	PK
7425	42.14	-0.35	41.79	54	-12.21	H	AV
4950	60.71	-3.38	57.33	74	-16.67	V	PK
4950	39.21	-3.38	35.83	54	-18.17	V	AV
7425	59.61	-0.35	59.26	74	-14.74	V	PK
7425	42.19	-0.35	41.84	54	-12.16	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.


According to the KDB 558074, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


9.3 Summary of Test Results/Plots

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

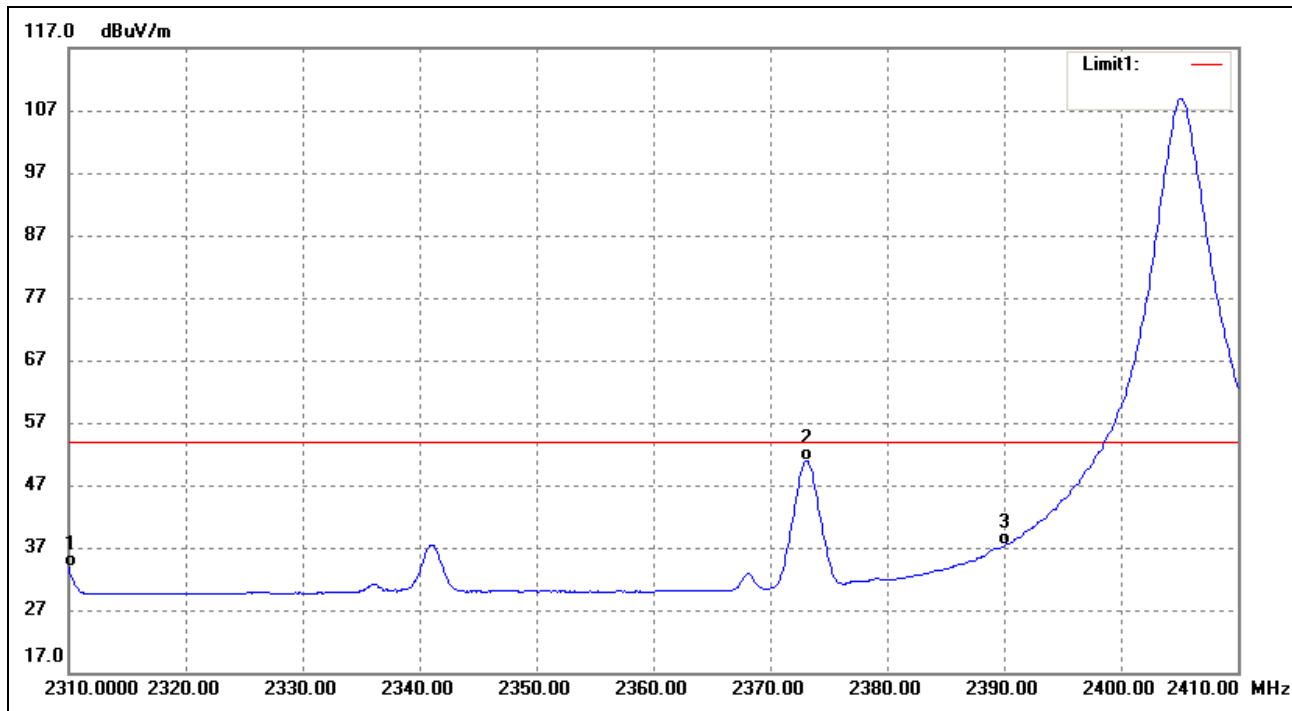

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.44	-9.66	33.78	54.00	-20.22	Average Detector
	2310.000	54.53	-9.66	44.87	74.00	-29.13	Peak Detector
2	2373.100	60.42	-9.54	50.88	54.00	-3.12	Average Detector
	2373.600	64.76	-9.54	55.22	74.00	-18.78	Peak Detector
3	2390.000	46.80	-9.50	37.30	54.00	-16.70	Average Detector
	2390.000	59.03	-9.50	49.53	74.00	-24.47	Peak Detector
4	2405.100	118.39	-9.48	108.91	/	/	Average Detector
	2405.400	121.03	-9.48	111.55	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

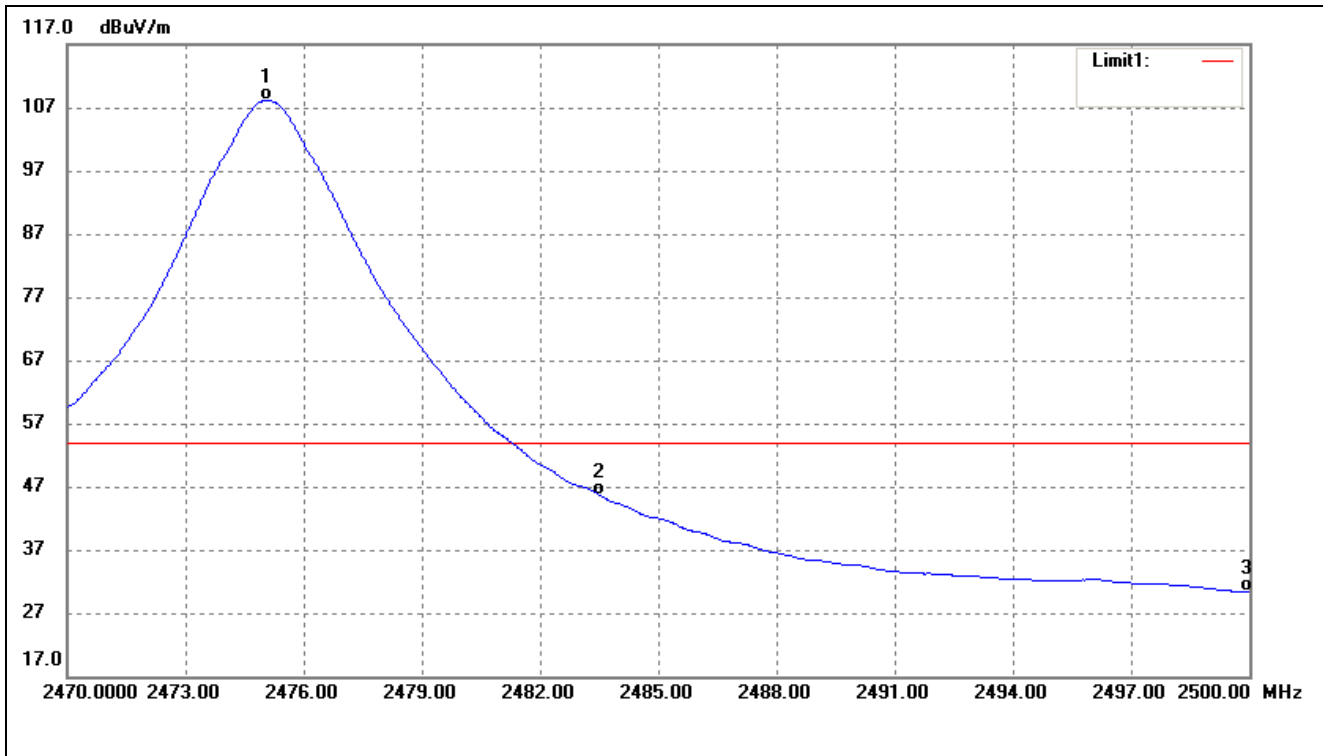

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.070	117.52	-9.33	108.19	/	/	Average Detector
	2474.590	120.90	-9.34	111.56	/	/	Peak Detector
2	2483.500	55.04	-9.31	45.73	54.00	-8.27	Average Detector
	2483.500	68.71	-9.31	59.40	74.00	-14.60	Peak Detector
3	2500.000	39.64	-9.28	30.36	54.00	-23.64	Average Detector
	2500.000	53.70	-9.28	44.42	74.00	-29.58	Peak Detector


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

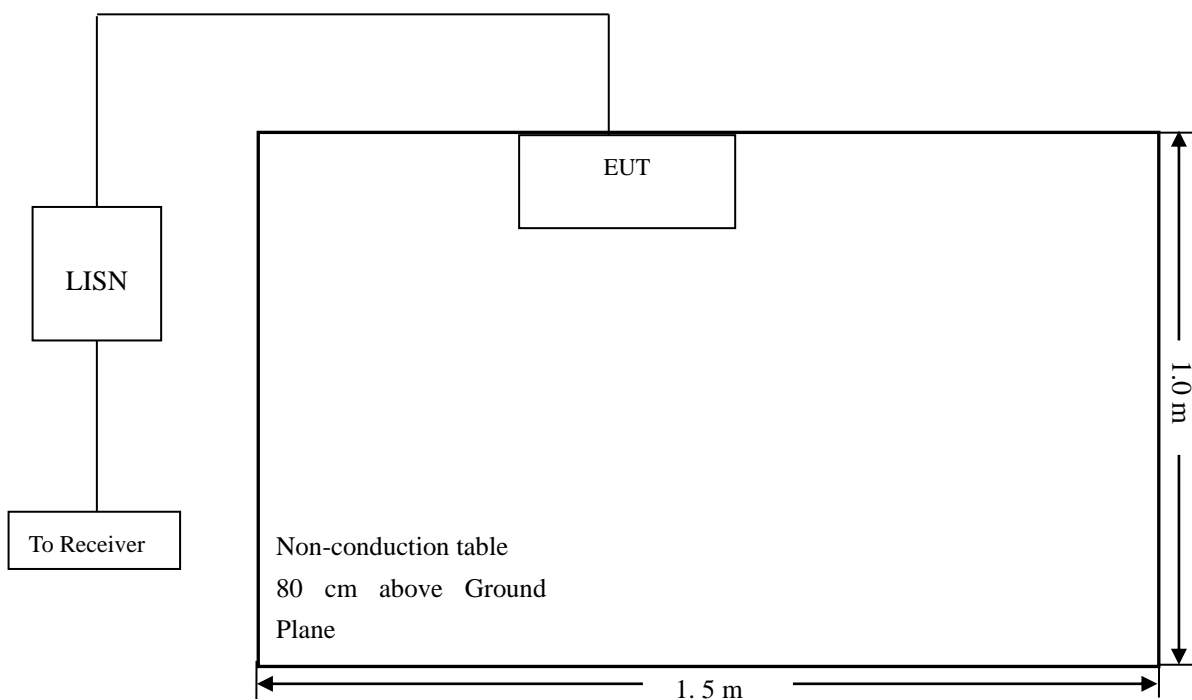


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

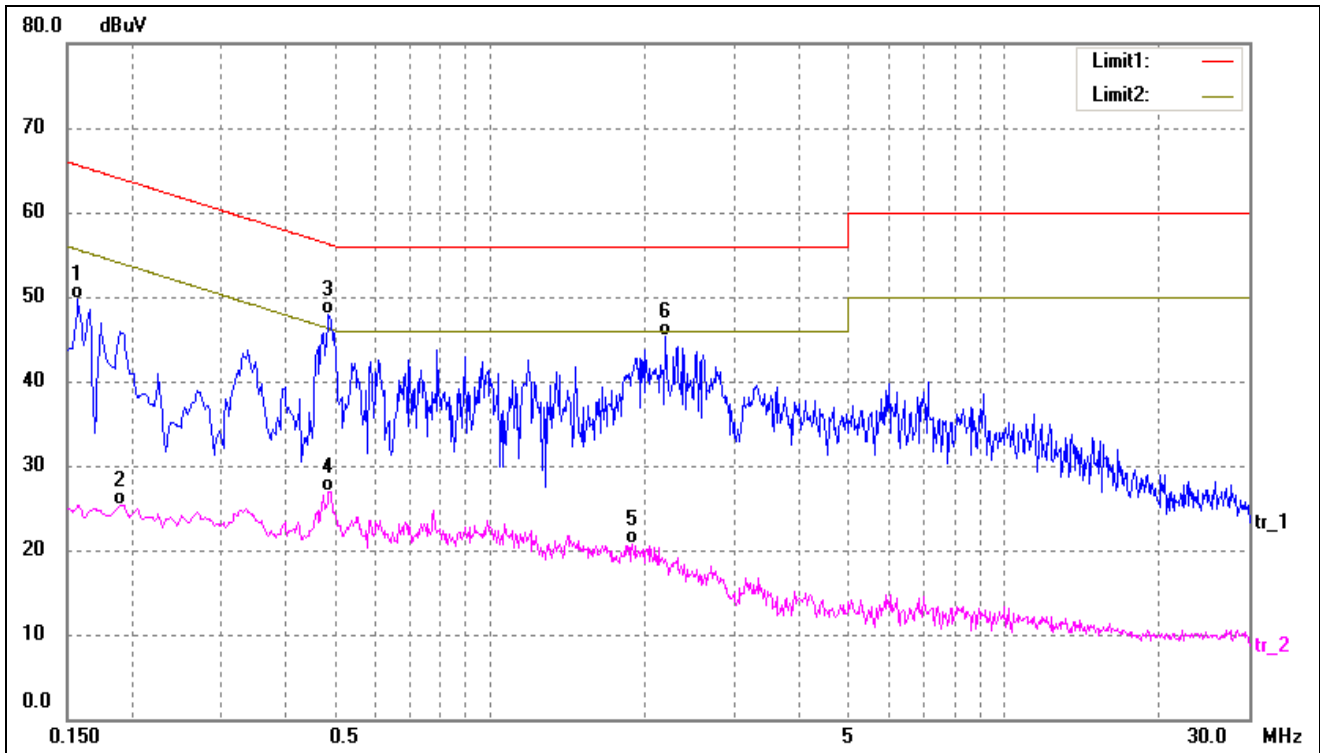

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	39.66	9.95	49.61	65.57	-15.96	QP
2	0.1900	15.40	9.96	25.36	54.04	-28.68	AVG
3*	0.4860	37.95	10.02	47.97	56.24	-8.27	QP
4	0.4860	16.96	10.02	26.98	46.24	-19.26	AVG
5	1.8940	10.26	10.37	20.63	46.00	-25.37	AVG
6	2.1900	34.85	10.37	45.22	56.00	-10.78	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

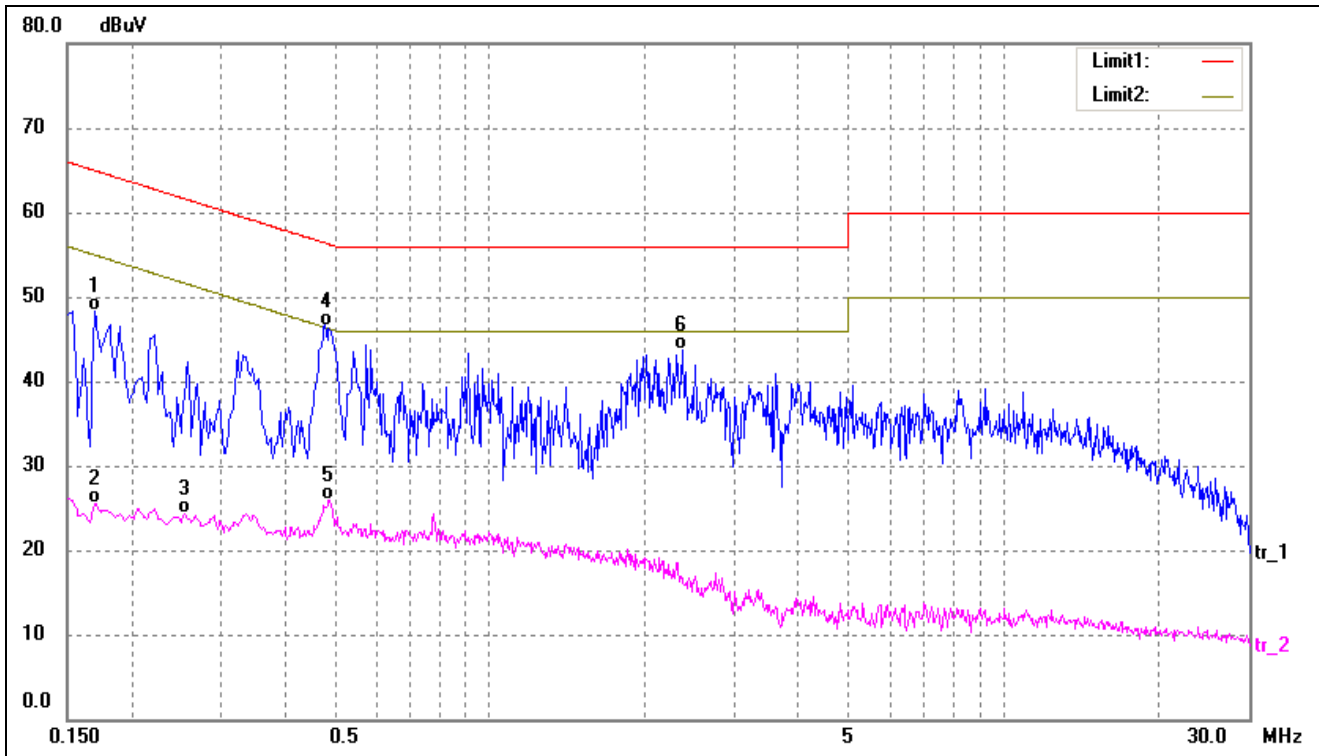

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	38.40	9.95	48.35	64.96	-16.61	QP
2	0.1700	15.59	9.95	25.54	54.96	-29.42	AVG
3	0.2540	14.26	10.02	24.28	51.63	-27.35	AVG
4*	0.4780	36.58	10.02	46.60	56.37	-9.77	QP
5	0.4860	15.84	10.02	25.86	46.24	-20.38	AVG
6	2.3820	33.35	10.37	43.72	56.00	-12.28	QP

***** END OF REPORT *****